


Servo drives CMMT-AS

FESTO

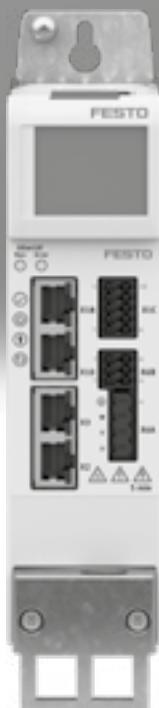

Festo core product range
Covers 80% of your automation tasks

Worldwide:
Superb:
Easy:

Always in stock
Festo quality at an attractive price
Simplified procurement and warehousing

- ★ Generally ready for dispatch from the factory within 24 hours
In stock at 13 Service Centres worldwide
More than 2200 products
- ★ Generally ready for dispatch from the factory within 5 days
Assembled for you at 4 Service Centres worldwide
Up to 6×10^{12} variants per product family

Just look
for the
star!

Key features


At a glance

- Universal servo drive for PM-synchronous servo motors up to 6000 W continuous power
- Supports the motor series EMMT-AS, EMME-AS, EMMB-AS and EMMS-AS as well as third-party motors
- Integrated single-phase/three-phase mains connection 230/400 VAC, mains filter and braking resistor, connection option for external braking resistor
- Precise torque, speed and position control
- Motion from point-to-point to interpolated motion
- Comprehensively integrated protective functions for the servo drive, motor and axis with automatic motor shut-down/quick stop
- Bus protocols



- Modbus TCP is available as an additional protocol for all EtherNet/IP devices
- Prepared device description files and function blocks for integration in PLC systems

The technology in detail

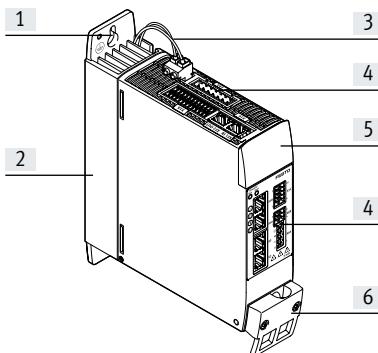

- Configuration:
 - Automatically with the "Festo Automation Suite" as well as auto-tuning
 - Directly via fieldbus and PLC
 - Data backup concept via PLC or operator unit CDSB
- Supports digital absolute encoders (EnDat, HIPERFACE, Nikon-A) in the motor as well as incremental (A/B, Sin/Cos) displacement encoders on the axis
- Integrated safety functions:
 - Safe torque off (STO) up to SIL3/Cat. 4 PL e
 - Safe stop 1 (SS1) when using a suitable external safety relay unit and suitable circuit for the servo drive
 - Safe brake control (SBC) up to SIL3/Cat. 3 PL e
 - Diagnostic outputs STA and SBA for feedback of the active safety function

PositioningDrives

Configuring electromechanical drives

Axis	Motor	Servo Drive	Load	Speed	Current	Position	Force	Power
1	BLDC 400W 100V	CMMT-AS 200	100 N	1000 rpm	0.1 A	0.1 Nm	0.1 W	0.1 W
2	BLDC 400W 100V	CMMT-AS 200	100 N	1000 rpm	0.1 A	0.1 Nm	0.1 W	0.1 W
3	BLDC 400W 100V	CMMT-AS 200	100 N	1000 rpm	0.1 A	0.1 Nm	0.1 W	0.1 W
4	BLDC 400W 100V	CMMT-AS 200	100 N	1000 rpm	0.1 A	0.1 Nm	0.1 W	0.1 W
5	BLDC 400W 100V	CMMT-AS 200	100 N	1000 rpm	0.1 A	0.1 Nm	0.1 W	0.1 W
6	BLDC 400W 100V	CMMT-AS 200	100 N	1000 rpm	0.1 A	0.1 Nm	0.1 W	0.1 W

- Elongated hole for mounting the servo drive on the control cabinet back wall
- Cooling element for dissipating heat. The internal braking resistor is housed in the cooling element
- Connection for braking resistor
- Connections
- Blanking plate (optionally with plug-on operator unit CDSB
→ page 14)
- Shield clamp and strain relief

Create the optimum drive package quickly and reliably. PositioningDrives calculates suitable combinations of electric axis, electric motor and servo drive using just a few application details. You can sort the results according to your specifications and obtain all the relevant data including the bill of materials and documentation for the selected combination. This avoids design errors and results in significantly improved energy efficiency for the system.

Key features

Library for EPLAN


→ www.festo.de/eplan



EPLAN macros for fast and reliable planning of electrical projects in combination with servo drives, motors and cables. This enables a high level of planning reliability and standardisation of documentation without the need to create symbols, graphics and master data.


Festo Automation Suite

Parameterisation and programming software for electronic devices from Festo

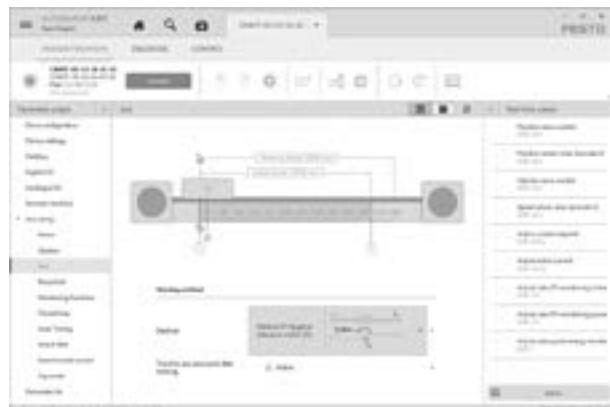

- Parameterisation, programming and commissioning in a clear and user-friendly interface
- Optimum support for complex processes thanks to guided wizards (e.g. for commissioning, drive configuration, etc.)
- Fast access to the required documents and additional information
- Easy integration of electric drives in the controller programming

System overview

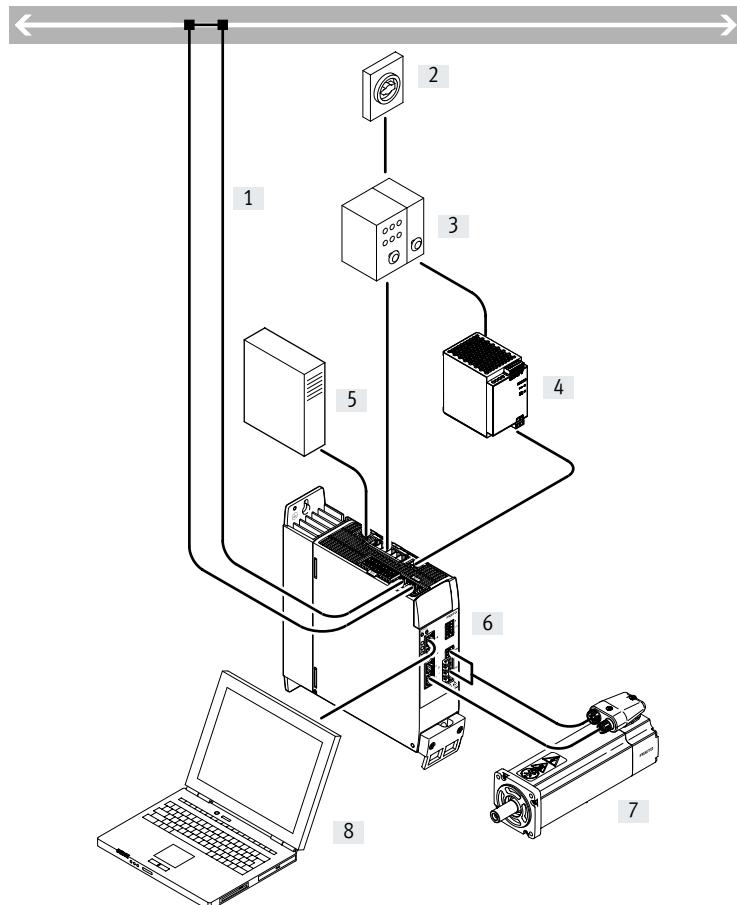

- [1] Bus/network
- [2] Main switch
- [3] Circuit breaker/fuses
- [4] Fixed power supply for logic voltage supply 24 V DC (PELV)
- [5] External braking resistor (optional)
- [6] Servo drive CMMT-AS
- [7] Servo motor
- [8] PC with Ethernet connection for parameterisation

Type codes

001	Series	
CMMT	Motor controller	
002	Motor type	
AS	AC synchronous	
003	Nominal current	
C2	2 A	
C3	3 A	
C4	4 A	
C5	5 A	
C7	7 A	
C12	12 A	

004	Nominal input voltage	
3A	230 V AC/50-60Hz	
11A	400 V AC	
005	Number of phases	
	Single-phase	
P3	Three-phase	
006	Bus protocol/activation	
EC	EtherCAT®	
EP	EtherNet/IP	
PN	Profinet	
007	Safety function	
S1	Standard safety	

Data sheet

Bus protocols



EtherNet/IP



General technical data

CMMT-AS-	C2-3A...	C4-3A...	C2-11A...	C3-11A...	C5-11A...	C7-11A...	C12-11A...
Type of mounting	Mounting plate, screwed in						
Indicators	Green/yellow/red LED or operator unit CDSB with plain-text message						
Controller mode of operation	<ul style="list-style-type: none"> • Cascade controller • P position controller • PI speed controller • PI current regulator for F or M • Profile operation with record and direct mode • Interpolated mode via fieldbus • Homing/setup mode/auto-tuning 						
Operating mode	<ul style="list-style-type: none"> • Field-oriented control, position resolution 24-bit/rev. • Sampling rate 16 kHz • PWM with 8 or 16 kHz, vector modulation with third harmonic (16 kHz only with CMMT-AS-C2-3A and CMMT-AS-C4-3A) • Real-time data acquisition: <ul style="list-style-type: none"> – 2x input position capture – 2x output position trigger – 2x position encoder input – 1x SYNC interface for encoder emulation or encoder input 						
Mounting position	Vertical						
Product weight [g]	1300	1400	2100	2100	2200	4100	4100

Bus protocols

Interface	EtherCAT	PROFINET RT/IRT	EtherNet/IP	Modbus TCP
Function	Bus connection incoming/outgoing			
Process interfacing	Interpolated mode CSP	AC1: adjustable-speed drives	Adjustable-speed drives	Adjustable-speed drives
	Interpolated mode CSV	AC3: drives with positioning function	Drives with positioning function	Drives with positioning function
	Interpolated mode CST	AC4: synchronous servo application		
	Point-to-point mode PP			
	Point-to-point mode PV			
	Point-to-point mode PT			
	Homing mode HM			
	Record table with 128 entries			
Communication profile	CiA402	PROFIdrive	DriveProfile	DriveProfile
	CoE (CANopen over EtherCAT)	PROFenergy		
	EoE (Ethernet over EtherCAT)			
Max. fieldbus transmission rate [Mbps]	100			
Connection type	2x bushing			
Connection technology	RJ45			

Data sheet

Electrical data							
CMMT-AS-	C2-3A...	C4-3A...	C2-11A...	C3-11A...	C5-11A...	C7-11A...	C12-11A...
Output connection data							
Output voltage range	[V AC]	3x (0 – Input)					
Nominal current per phase	[A _{eff}]	2	4	1.7	2.5	5	7
Peak current per phase	[A _{eff}]	6	12	5.1	7.5	15	21
Max. peak current duration (at f _s ≥ 5 Hz)	[s]	2					
Nominal power	[W]	350	700	800	1200	2500	4000
Peak power	[W]	1000	2000	2400	3600	7500	12000
Output frequency	[Hz]	0 ... 599					
Max. motor cable length ¹⁾	[m]	25/25		50/100			25/100
Load voltage AC							
Nominal operating voltage phases		Single-phase		Three-phase			
Input voltage range	[V AC]	100 –20% ... 230 +15%		200 –10% ... 480 +10%			
Nominal operating voltage	[V AC]	230		400			
Nominal current	[A _{eff}]	2.8	5.6	2	3	6	9
Peak current		8.4	16.8	6	9	18	27
Mains frequency	[Hz]	48 ... 62					
System voltage to EN 61800-5-1	[V]	300					
Max. short circuit current rating of the mains	[kA]	100		10			
Mains types of system earthing		TN, TT, IT		TN, IT			
Mains filter		Integrated					
Load voltage DC							
Input voltage range	[V DC]	80 ... 360		80 ... 700			
Max. DC link voltage	[V DC]	395		800			
Nominal current							
at 320 V DC	[A]	1.3	2.6	–	–	–	–
at 560 V DC	[A]	–	–	1.5	2.3	4.7	7.5
							11.2
Logic supply							
Nominal voltage	[V DC]	24 ±20%					
Max. current consumption	[A]	0.5/2.3 ²⁾			0.5/2.5 ²⁾		

1) Without/with external mains filter

2) Max. current at full expansion, with two position encoders, brake output and all I/Os with max. specified loads connected

Braking resistor							
CMMT-AS-	C2-3A...	C4-3A...	C2-11A...	C3-11A...	C5-11A...	C7-11A...	C12-11A...
Integrated							
Resistance	[Ω]	100		130			47
Pulse power	[kW]	1.6		5			13.6
Pulse energy	[Ws]	230		850			1200
Nominal power	[W]	23		48	48	58	100
External							
Resistance	[Ω]	100 ... 160	67 ... 100	130 ... 250	130 ... 250	80 ... 130	60 ... 85
Max. continuous power	[W]	180	350	400	600	1200	1500
							3000

Motor auxiliary connections							
CMMT-AS-	C2-3A...	C4-3A...	C2-11A...	C3-11A...	C5-11A...	C7-11A...	C12-11A...
Motor temperature monitoring							
Digital		Connection for temperature switch (PTC, N/C contact or N/O contact)					
Analogue		Connection for analogue temperature sensor (KTY81 ... 84, NTC, Pt1000)					
Output for holding brake							
Design		High-side switch; 24 V; monitored internally					
Output current	[A]	1.0			1.3		1.5
Output for 2nd brake							
Design		High-side switch; 24 V; monitored internally					
Output current	[A]	0.1					

Data sheet

Interfaces	
Ethernet	
Function	Parameterisation and commissioning
Protocol	DHCP
	FTP
	TCP/IP
Position encoders	
Function of position encoder 1	ENDAT 2.1 encoder
	ENDAT 2.2 encoder
	HIPERFACE encoder
	Incremental encoder
	SIN/COS encoder
	Nikon-A
Function of position encoder 2	Incremental encoder
	SIN/COS encoder
Synchronisation	
Function	Encoder emulation A/B/Z
	Encoder input A/B/Z
Encoder output, characteristics	1 MHz maximum output frequency
	Resolution up to 16384 ppr
Encoder input, characteristics	1 MHz maximum input frequency
	Resolution up to 16384 ppr
Input/output	
Digital inputs	
Number	10 ... 12 (depending on device design)
Number of high-speed	2
Time resolution of high-speed [μs]	1
Switching logic	PNP
Characteristics	Not galvanically isolated
	Freely configurable in some cases
	Safety inputs in some cases
Specification	Based on IEC 61131-2, type 3
Operating range [V]	0 ... 30
Digital outputs	
Number	4 ... 6 (depending on device design)
Number of high-speed	2
Time resolution of high-speed [μs]	1
Switching logic	PNP
Characteristics	Not galvanically isolated
	Freely configurable in some cases
Max. current [mA]	20
Analogue setpoint inputs	
Number	1
Characteristics	Differential input
	Configurable for current/force, rotational speed and position
Operating range [V]	±10
Impedance [kΩ]	70
Floating switching outputs	
Number	1
Max. current [mA]	50

Data sheet

Safety characteristics	
Safety function to EN 61800-5-2	Safe torque off (STO) Safe stop 1 (SS1) Safe brake control (SBC)
Performance Level (PL) to EN ISO 13849-1	
Safe torque off (STO)	Category 4, Performance Level e
Safe brake control (SBC)	Category 3, Performance Level e
Safety integrity level (SIL) to EN 62061 and EN 61508	
Safe torque off (STO)	SIL 3/SILCL 3
Safe brake control (SBC)	SIL 3/SILCL 3
Certificate issuing authority and no.	TÜV Rheinland (German Technical Control Board) 01/205/5640.00/18
Proof test interval	
Safe torque off (STO)	Up to 20a
Safe brake control (SBC)	24 h
Diagnostic coverage	[%]
Safe failure fraction (SFF)	[%]
Hardware fault tolerance	1

Operating and environmental conditions	
Degree of protection	IP20
Ambient temperature ¹⁾	[°C] 0 ... +50
Storage temperature	[°C] -25 ... +55
Relative humidity	[%] 5 ... 90 (non-condensing)
Protection class	I
Oversupply category	III
Pollution degree	2
Surge resistance	[kV] 6
Max. installation height ²⁾	[m] 2000
Shock and vibration resistance	To EN 61800-2 and EN 61800-5-1
CE marking (see declaration of conformity)	To EU EMC Directive ³⁾ To EU Machinery Directive To EU Low Voltage Directive To EU RoHS Directive
KC marking	KC EMC
Certification	c UL us listed (OL) RCM compliance mark
Note on materials	Contains paint-wetting impairment substances RoHS-compliant

1) Above 40°C power is reduced by 3% per K.

2) Above 1000 m power is reduced by 1% per 100 m.

3) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.


Data sheet

View of servo drives


Front view

- | | |
|---|---|
| [1] PE connection, housing | [7] [X9B] Connection for braking resistor |
| [2] [X5] Connection for operator unit (behind blanking plate) | [8] [X1C] Inputs/outputs for the axis |
| [3] [X18] Standard Ethernet | [9] [X6B] Motor auxiliary connection |
| [4] [X10] Device synchronisation | [10] [X6A] Motor phase connection |
| [5] [X3] Position encoder 2 | [11] Shield clamp and strain relief |
| [6] [X2] Position encoder 1 | |


CMMT-AS-....-3A

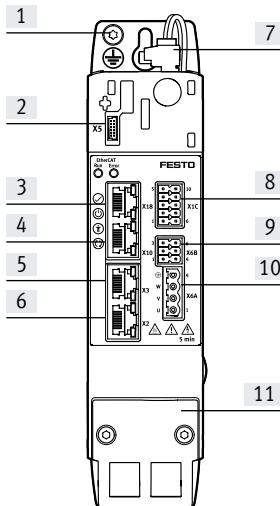

CMMT-AS-C2/C3/C5-....-11A

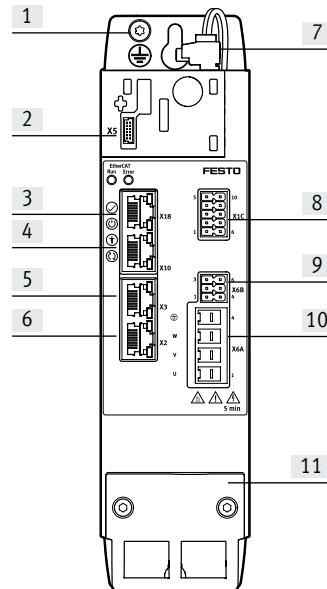


CMMT-AS-C7/C12-....-11A

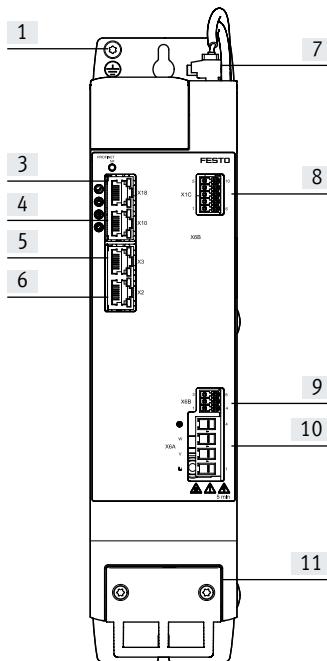


Top view

- | | |
|------------------------------------|--|
| [1] Cooling element | [5] [X9B] Connection for braking resistor |
| [2] [X1A] I/O interface | [6] [X9A] Supply: mains, DC link and logic voltage |
| [3] [XF2 OUT] RTE interface port 2 | [7] [X9A] Supply: mains and DC link voltage |
| [4] [XF1 IN] RTE interface port 1 | [8] [X9C] Supply: logic voltage |


CMMT-AS-....-3A

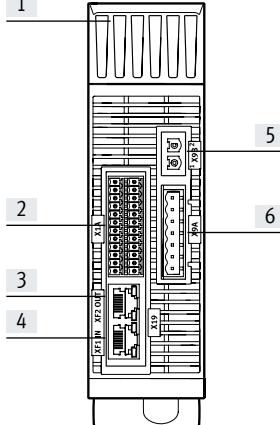

CMMT-AS-C2/C3/C5-....-11A

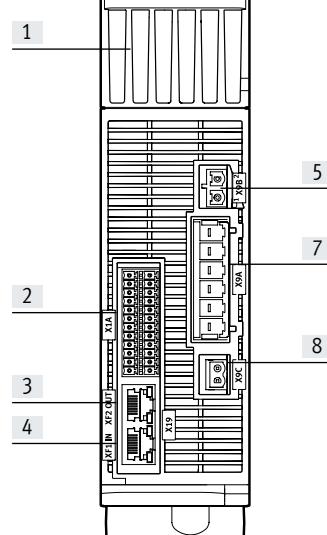


CMMT-AS-C7/C12-....-11A

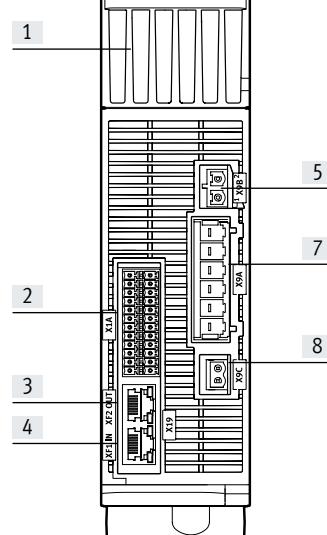

Data sheet

Installation clearance for servo drives

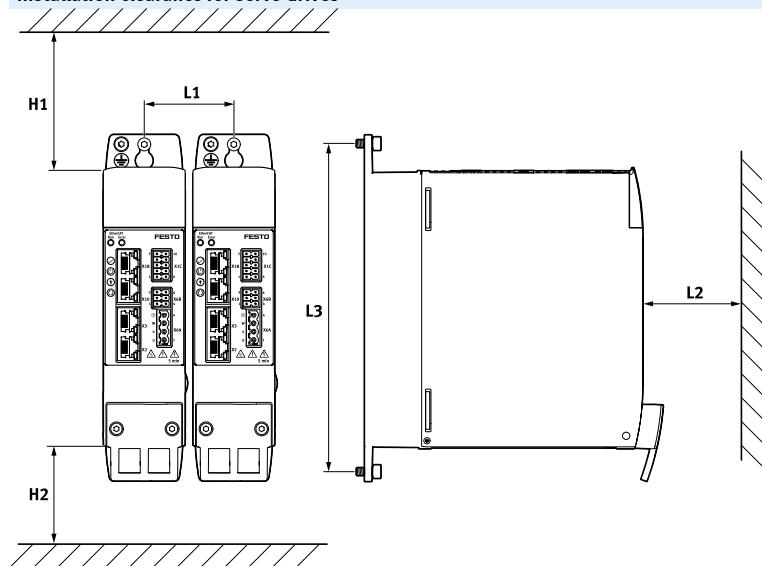


Type	H1	H2 ¹⁾	L1	L2	L3
CMMT-AS-C2-...-3A	70	70	52	70	200
CMMT-AS-C4-...-3A					
CMMT-AS-C2-...-11A	100	70	62	70	230
CMMT-AS-C3-...-11A					
CMMT-AS-C5-...-11A					
CMMT-AS-C7-...-11A	100	70	78	70	300
CMMT-AS-C12-...-11A					

1) An installation clearance of 150 mm underneath the servo drive is recommended for optimum wiring of the motor or encoder cable

Data sheet

Dimensions

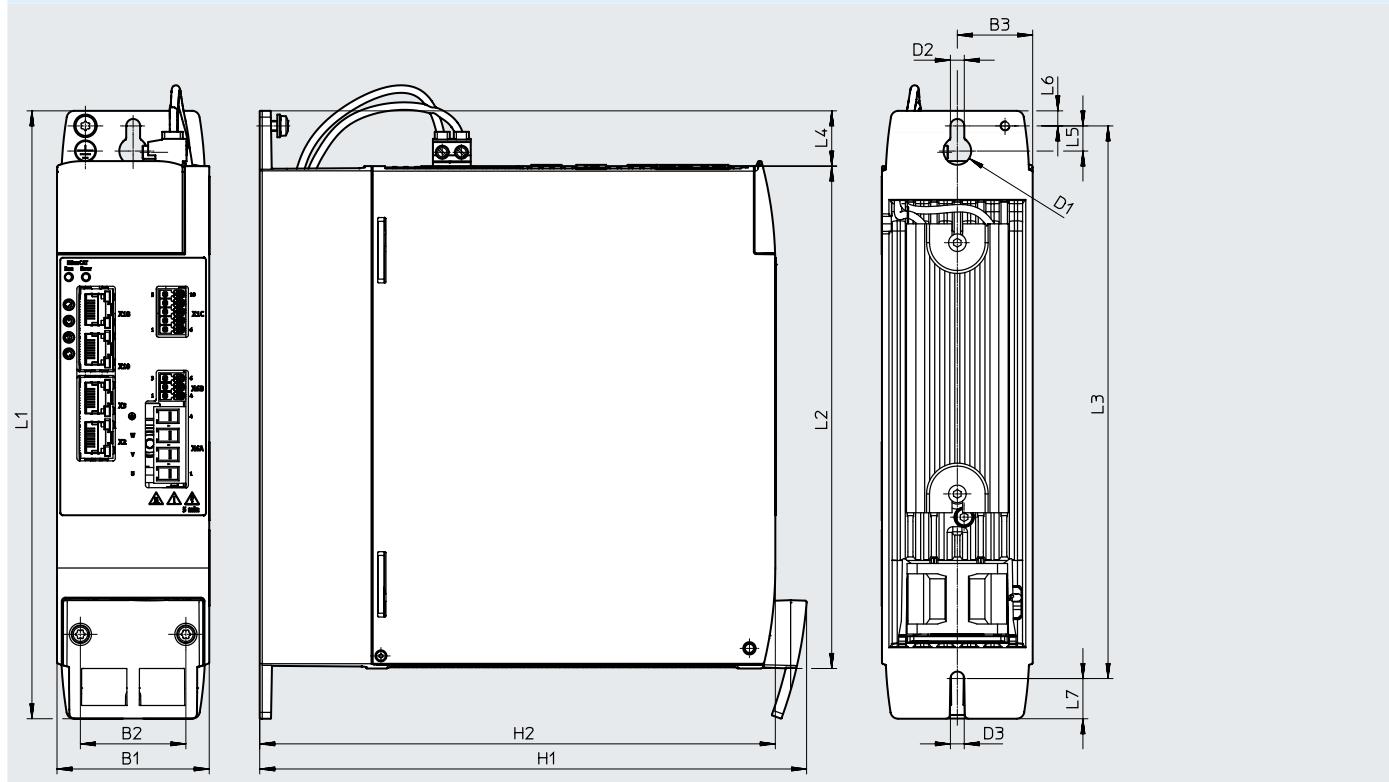Download CAD data → www.festo.com

Type	B1	B2	B3	D1 ∅	D2	D3	H1	H2
CMMT-AS-2....3A	50	34	25	11	5.5	5.5	183	170
CMMT-AS-4....3A								
CMMT-AS-2....11A	60	42	29.7	11	5.5	5.5	218	205
CMMT-AS-3....11A								
CMMT-AS-5....11A								
CMMT-AS-7....11A	75	44	37.5	11	5.5	5.5	224	205
CMMT-AS-12....11A								

Type	L1	L2	L3	L4	L5	L6	L7
CMMT-AS-2....3A	212	170	200	22	10	6	9
CMMT-AS-4....3A							
CMMT-AS-2....11A	242	198	220	22	10	6	16
CMMT-AS-3....11A							
CMMT-AS-5....11A							
CMMT-AS-7....11A	319	276	300	22	10	6	13
CMMT-AS-12....11A							

Data sheet

Ordering data		Description	Number of phases	Nominal current	Part no.	Type
Bus protocol: EtherCAT						
Single-phase	2		★ 5340819	CMMT-AS-C2-3A-EC-S1		
	4		★ 5340820	CMMT-AS-C4-3A-EC-S1		
Three-phase	2		★ 5340821	CMMT-AS-C2-11A-P3-EC-S1		
	3		★ 5340822	CMMT-AS-C3-11A-P3-EC-S1		
	5		★ 5340823	CMMT-AS-C5-11A-P3-EC-S1		
	7		★ 8133354	CMMT-AS-C7-11A-P3-EC-S1		
	12		★ 8133355	CMMT-AS-C12-11A-P3-EC-S1		
Bus protocol: PROFINET RT/IRT						
Single-phase	2		★ 5340814	CMMT-AS-C2-3A-PN-S1		
	4		★ 5340815	CMMT-AS-C4-3A-PN-S1		
Three-phase	2		★ 5340816	CMMT-AS-C2-11A-P3-PN-S1		
	3		★ 5340817	CMMT-AS-C3-11A-P3-PN-S1		
	5		★ 5340818	CMMT-AS-C5-11A-P3-PN-S1		
	7		★ 8133352	CMMT-AS-C7-11A-P3-PN-S1		
	12		★ 8133353	CMMT-AS-C12-11A-P3-PN-S1		
Bus protocol: EtherNet/IP and Modbus TCP						
Single-phase	2		★ 5340824	CMMT-AS-C2-3A-EP-S1		
	4		★ 5340825	CMMT-AS-C4-3A-EP-S1		
Three-phase	2		★ 5340826	CMMT-AS-C2-11A-P3-EP-S1		
	3		★ 5340827	CMMT-AS-C3-11A-P3-EP-S1		
	5		★ 5340828	CMMT-AS-C5-11A-P3-EP-S1		
	7		★ 8133356	CMMT-AS-C7-11A-P3-EP-S1		
	12		★ 8133357	CMMT-AS-C12-11A-P3-EP-S1		

Festo core product range



Generally ready for dispatch from the factory within 24 hours



Generally ready for dispatch from the factory within 5 days


Ordering data – Modular product system

Ordering table			Condi-	Code	Enter
Series	-3A	-11A	tions		code
Module no.	5111184	5111189			
Series	CMMT		CMMT		
Motor type	AC synchronous		-AS		
Nominal current					
2 A				-C2	
3 A	–		[1]	-C3	
4 A		–	[2]	-C4	
5 A	–		[1]	-C5	
7 A	–		[1]	-C7	
12 A	–		[1]	-C12	
Nominal input voltage					
230 V AC/50-60 Hz		–		-3A	
400 V AC	–			-11A	
Number of phases					
Single-phase		–			
Three-phase	–			-P3	
Bus protocol/control					
	EtherCAT		-EC		
	PROFINET RT/IRT		-PN		
	EtherNet/IP and Modbus TCP		-EP		
Safety function	Standard safety		-S1		-S1

[1] C3, C5, C7, C12 Only with nominal input voltage 11 A
[2] C4 Only with nominal input voltage 3 A

Accessories


Ordering data – Required accessories

	Description	For CMMT-AS...		Part no.	Type
		-3A	-11A		
Assortment of plugs					
	For single wiring connection	■	–	★ 4325822	NEKM-C6-C16-S
	For double wiring connection	■	–	★ 5054513	NEKM-C6-C16-D
	For single wiring connection	–	■	★ 5119205	NEKM-C6-C45-P3-S
	For double wiring connection	–	■	★ 5118001	NEKM-C6-C45-P3-D
Not included in the scope of delivery of the servo drive					

Ordering data – Optional accessories



Operator unit CDSB-A1

- Display of full-text messages. This means that errors, warnings and selected data can be read at a glance
 - Easy data backup of parameters and firmware in the unit for e.g. serial commissioning or device replacement
 - One operator unit can be used for several servo drives
- Additional technical data:
→ Internet: cdsb

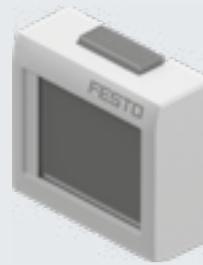

Ambient temperature [°C]	Storage temperature [°C]	Degree of protection	Weight [g]	Part no.	Type
0 ... 60	-20 ... +70	IP20	40	8070984	CDSB-A1
Not included in the scope of delivery of the servo drive					

Ordering data – Optional accessories

	Description	Part no.	Type
Connecting cable			
	Patch cable for the daisy-chain connection of the bus interfaces X19/A/B Patch cable for master/slave functionality (X10-X10) Ethernet category Cat 5e Not included in the scope of delivery of the servo drive	★ 8082383	NEBC-R3G8-KS-0.2-N-S-R3G8-ET
Mains filter			
	Single-phase, 8 A, sufficient for: 2x CMMT-AS-C2-3A or 1x CMMT-AS-C4-3A	★ 8088928	CAMF-C6-F-C8-3A
	Single-phase, 20 A, sufficient for: 6x CMMT-AS-C2-3A or 3x CMMT-AS-C4-3A	★ 8088929	CAMF-C6-F-C20-3A
	Three-phase, 16 A, sufficient for: 8x CMMT-AS-C2-11A or 5x CMMT-AS-C3-11A or 2x CMMT-AS-C5-11A or 2x CMMT-AS-C7-11A or 1x CMMT-AS-C12-11A	8096868	CAMF-C6-F-C16-11A
	Three-phase, 42 A, sufficient for: 21x CMMT-AS-C2-11A or 14x CMMT-AS-C3-11A or 7x CMMT-AS-C5-11A or 5x CMMT-AS-C7-11A or 3x CMMT-AS-C12-11A	8096894	CAMF-C6-F-C42-11A
Not included in the scope of delivery of the servo drive			

Festo core product range





Generally ready for dispatch from the factory within 24 hours





Generally ready for dispatch from the factory within 5 days

Accessories

Ordering data – Optional accessories		Description	Part no.	Type
Flow control filter				
	Single-phase, 6 A, sufficient for: 2x CMMT-AS-C2-3A or 1x CMMT-AS-C4-3A		★ 8088930	CAMF-C6-FD-C6-3A
	Three-phase, 6 A, sufficient for: 3x CMMT-AS-C2-11A or 2x CMMT-AS-C3-11A or 1x CMMT-AS-C5-11A		8096867	CAMF-C6-FD-C6-11A
Not included in the scope of delivery of the servo drive				

Ordering data – Optional accessories		Resistance value [Ω]	Nominal power [W]	Part no.	Type	Data sheets → Internet: cacr
Braking resistor						

	For type CMMT-AS-							
	C2-3A	C4-3A	C2-11A	C3-11A	C5-11A			
	–	■	–	–	–	72	200	1336611 CACR-LE2-72-W500
	■	■	–	–	■	100	200	1336615 CACR-LE2-100-W500
	–	–	■	■	–	240	200	8091543 CACR-LE2-240-W500
	–	–	■	■	–	240	720	8091544 CACR-KL2-240-W1800
	■	■	–	–	■	100	720	8091545 CACR-KL2-100-W1800
Not included in the scope of delivery of the servo drive								1336617 CACR-KL2-67-W1800
For type CMMT-AS-								
	C7-11A	C12-11A						
	■	–		72	200	1336611	CACR-LE2-72-W500	
	■	–		100	200	1336615	CACR-LE2-100-W500	
	■	–		67	720	1336617	CACR-KL2-67-W1800	
	■	–		100	720	8091545	CACR-KL2-100-W1800	
	–	■		50	200	2882342	CACR-LE2-50-W500	
	–	■		40	800	2882343	CACR-KL2-40-W2000	

Ordering data – Optional accessories		Description	Part no.	Type
Adapter				
	Required in combination with the linear axes EGC-...-M1/M2 or ELGA-...-M1/M2 (external displacement encoder) as adapter between encoder cable NEBM-M12G8-...-V3 and interface X3 (position encoder 2)		8106112	NEFM-S1G9-K-0.5-R3G8
Not included in the scope of delivery of the servo drive				

Festo core product range



Generally ready for dispatch from the factory within 24 hours



Generally ready for dispatch from the factory within 5 days

Accessories

Ordering data – Optional accessories		Description	For CMMT-AS-			Part no.	Type
			C2/C4-3A	C2/C3/C5-11A	C7/C12-11A		
Blanking plate							
	<ul style="list-style-type: none"> Used to cover the connections if no operator unit used Included in the scope of delivery of the servo drive 		■	■	■	★ 5395254	CAFC-06-C
Shield clamp							
	<ul style="list-style-type: none"> For fixing in place the shield and strain relief for the motor cable Included in the scope of delivery of the servo drive 		■	-	-	5326867	CAMA-C6-SK-S2
			-	■	-	5335956	CAMA-C6-SK-S3
			-	-	■	★ 8114689	CAMA-C6-SK-S4

Festo core product range



Generally ready for dispatch from the factory within 24 hours



Generally ready for dispatch from the factory within 5 days