

- **Modular, flexible and sturdy terminal up to 512 I/Os**
- **Selectable connection technology**
- **Open to all fieldbus protocols and Ethernet**
- **Integrated diagnostic and service function**
- **Integrated IT services**
- **Suitable for MPA, CPA, MIDI/MAXI, VTSA/ISO**
- **CPX as a dedicated remote I/O module**

Terminal CPX

Key features

FESTO



Key features

Installation concept	Electrical components	Mounting	Operation
<ul style="list-style-type: none"> Choice of multiple valve terminal types for different applications: <ul style="list-style-type: none"> Type 03 MIDI/MAXI Type 12 CPA Type 32 MPA Type 44 VTSA/VTSA-F Economical from the smallest configuration level right up to the maximum number of modules Up to 9 electrical input/output modules plus bus nodes and pneumatic interface/electronics modules for valves Extensive range of functions and connection options for the electrical modules Selectable connection technology for technically and economically optimised connections (M8, M12, Sub-D, Cage Clamp) Can be used as a dedicated remote I/O module 	<ul style="list-style-type: none"> High operating voltage tolerance ($\pm 25\%$) Choice of M18 or 7/8" connection for power supply Open to all common fieldbus protocols and Ethernet Optional function and technology modules for preprocessing IT services and TCP/IP such as remote maintenance, remote diagnosis, web server, SMS and e-mail alert Digital inputs and outputs, 4-fold/8-fold/16-fold Analogue inputs and outputs, 2-fold/4-fold Temperature inputs -200 to +850 °C Protection to IP65 and IP67 	<ul style="list-style-type: none"> Wall or H-rail mounting Conversions/extensions are possible at any time Modular system offering a range of configuration options Fully assembled and tested unit Lower costs for selection, ordering, assembly and commissioning Design of optimised control chains thanks to selectable pneumatic components Centralised CPX terminal Decentralised, subordinate installation system CPI improves cycle times by up to 30% Optimised installation costs thanks to option of including centralised and decentralised I/O modules that are installed close to the machine Safe and convenient earthing thanks to earthing plate 	<ul style="list-style-type: none"> Fast troubleshooting thanks to an extensive selection of LEDs (some of which are multi-coloured) on the bus node and on all I/O modules Suitable for direct machine mounting (IP65/IP67) or in a control cabinet with a terminal connection (IP20) Supports module- and channel-oriented diagnosis On-the-spot diagnosis in plain text via handheld control unit Fieldbus/Ethernet remote diagnosis Innovative diagnostic support with integrated web server/web monitor Optimised commissioning thanks to parameterisable functions Reliable servicing through the fast replacement of connection blocks and modules without changing the wiring

Terminal CPX

Key features



Pneumatic variants of the CPX terminal


The electrical CPX terminal is a modular peripheral system for valve terminals. The system is specifically designed so

that the valve terminal can be adapted to suit different applications. The modular system design lets you


configure the correct number of valves, inputs and additional outputs to suit the application.

The CPX terminal can also be used without a valve terminal as a remote I/O module.


As a remote I/O module

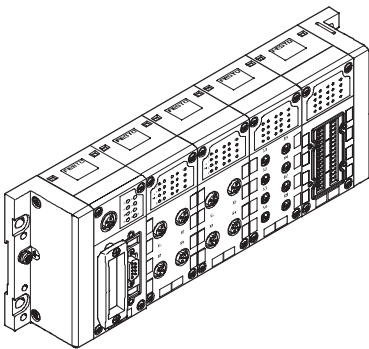


With valve terminal MPA

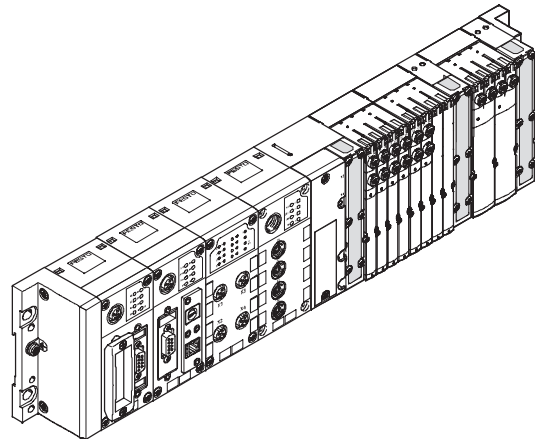


With valve terminal VTSA

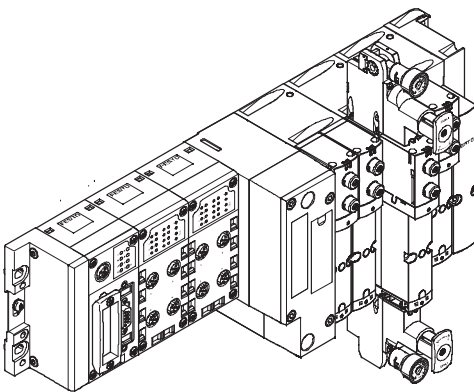

With valve terminal MIDI/MAXI

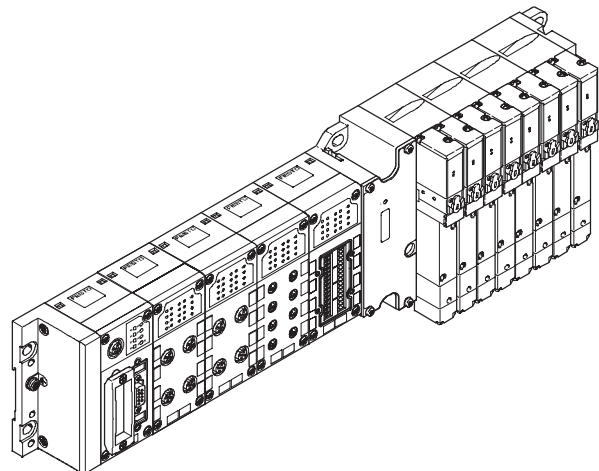

With valve terminal CPA

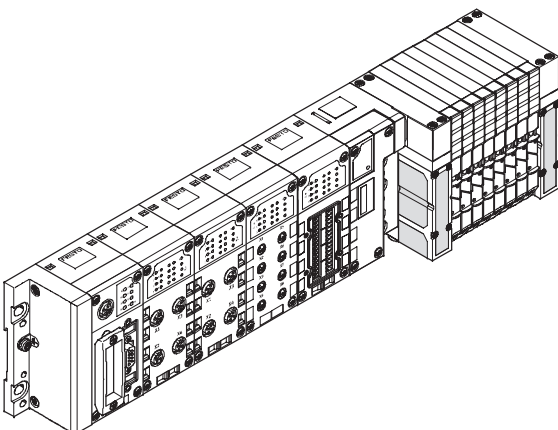

Terminal CPX

Key features



Variants of the CPX terminal controller (with fieldbus node, without preprocessing)

Fieldbus node

Different bus nodes are used for integration in the control systems of various manufacturers.

The CPX terminal can therefore be operated on over 90% of the most commonly used fieldbus systems:

- Profibus DP
- Interbus

- DeviceNet
- CANopen
- CC-Link

Integration in universal networks based on Ethernet opens up new possibilities. Faster data transmission, real-time capability and

above all additional IT services such as file transfer, web servers, web monitors as integrated home pages, SMS/e-mail alerts, etc. are opening up a wide range of synergies.


This incorporates standardised and universal communications technology across all areas, including operating

level, control level and field level with protection to IP 65/67.

The following protocols are supported:

- Ethernet/IP
- Modbus/TCP
- Profinet

Fieldbus node

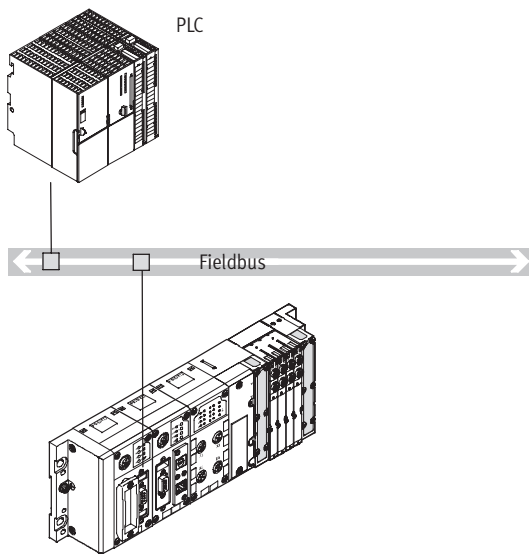

- Communication with higher-order controller via fieldbus
- No preprocessing


- Fieldbus protocol depending on CPX fieldbus node used
- Up to 512 I/Os, depending on the fieldbus node used

- - Note

Every electrical connection can be combined with an appropriate number of I/O modules and/or pneumatic components, depending on its address capacity.

Likewise every pneumatic variant of the CPX terminal can be operated with every electrical connection variant.

Fieldbus node Industrial Ethernet

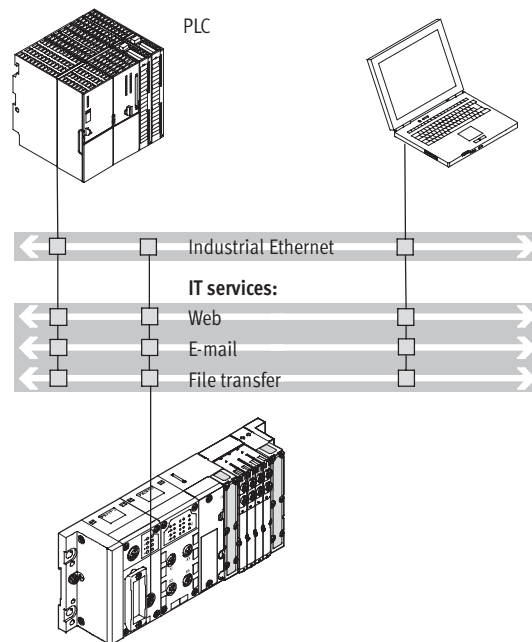

- Connection to a higher-order controller directly via Ethernet/IP, Modbus/TCP or Profinet
- No preprocessing

- Monitoring via Ethernet and web applications
- Up to 512 I/Os

Terminal CPX

Key features

Variants of the CPX terminal controller (with preprocessing in the FEC)


Control block

The optional Front End Controller CPX-FEC, in parallel with a fieldbus node, permits simultaneous access via Ethernet and an integrated web

server, as well as autonomous preprocessing. Access via Modbus/TCP and EasyIP is also possible.

- Commissioning, programming and diagnosis using the Festo software tool FST 4.1 with hardware configurator.

With FEC in standalone mode

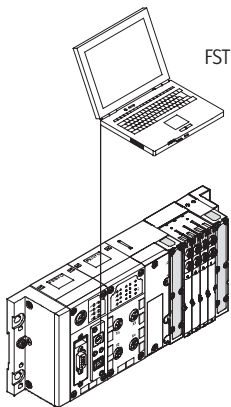


- Decentralised controller with direct machine mounting
- Interaction options via CPX-MMI or Front End Display (FED)
- Possibility of downloading programs via Ethernet (or via the programming interface)
- Supports full expansion of all CPX peripherals
- More than 300 I/Os

Beneficial application areas:

- Autonomous workstations
- Interlinked, standalone subsystems
- Automation using IT technology

With FEC in Festo EasyIP mode

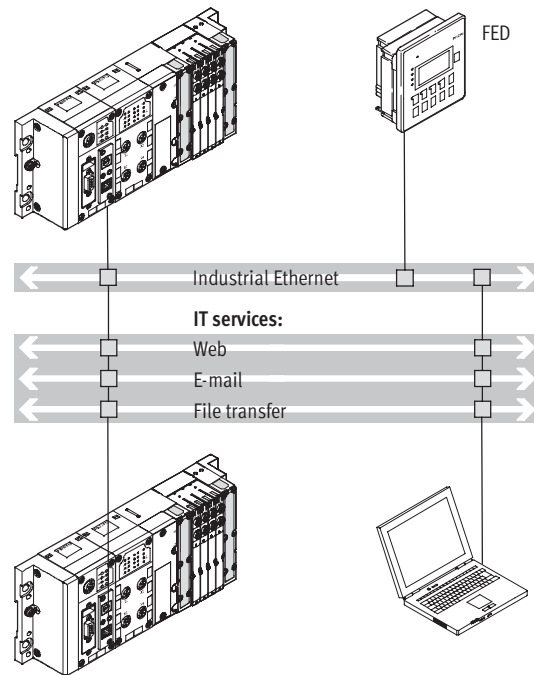

- Fast preprocessing of the CPX peripherals in the FEC
- Any data can be exchanged between the FEC via EasyIP
- Several FECs can be operated and monitored via one FED

- No higher-order controller is required
- More than 300 I/Os per CPX-FEC

Terminal CPX


Key features



Variants of the CPX terminal controller (with preprocessing in the FEC)

With FEC as remote controller on the Ethernet

Remote controller on the Ethernet as the preprocessing unit for decentralised, standalone subsystems using IT technology.

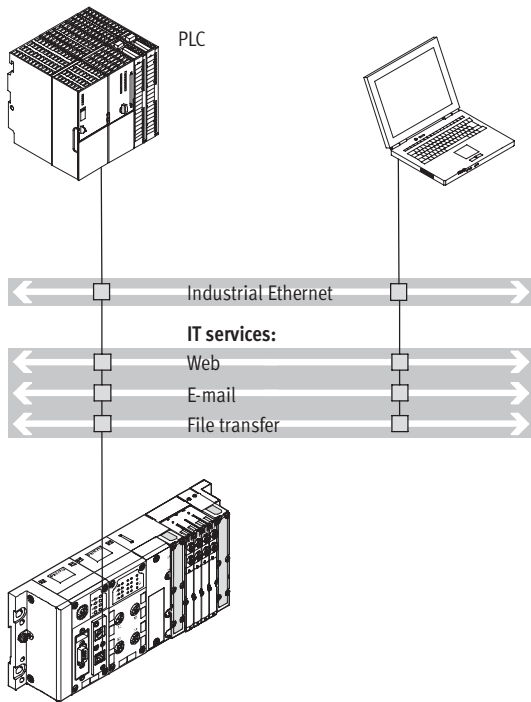


- Connection to a higher-order controller directly via Ethernet, no further fieldbus nodes are required
- Monitoring via Ethernet and web applications

- Preprocessing of the CPX peripherals through CPX-FEC
- More than 300 I/Os

With FEC as remote controller on the fieldbus

Fieldbus remote controller (combination with fieldbus nodes for Interbus, Profibus DP, CANopen, DeviceNet or CC-Link) as the preprocessing unit for decentralised, standalone subsystems.

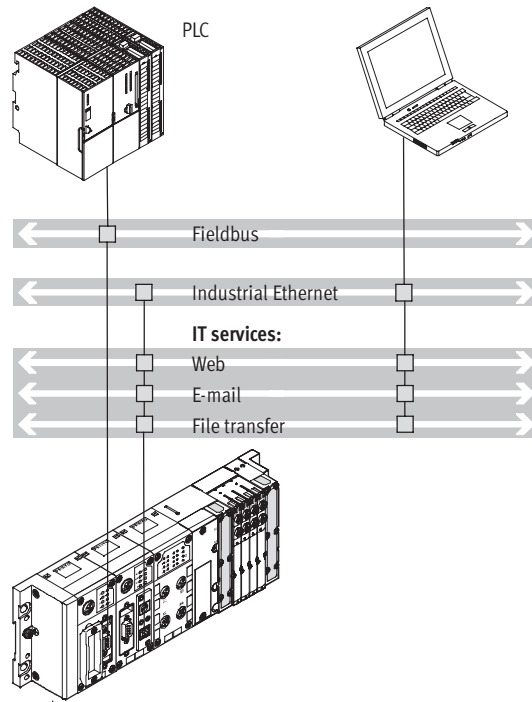

- Fast preprocessing of the CPX peripherals in the FEC
- Communication with higher-order controller via fieldbus
- Optional additional monitoring via Ethernet and web applications


- Downloading of programs via programming interface
- More than 300 I/Os, fieldbus nodes are only used for communication with the higher-order PLC
- Two fieldbus nodes for redundant communication configuration

Terminal CPX

Key features

CPX Web Monitor – Online diagnosis for the CPX terminal → 4 / 4.8-47

What is a CPX Web Monitor? **What can a CPX Web Monitor do?**



The CPX Web Monitor is a software tool from Festo for all CPX modules with integrated web server and Ethernet connection:

- Supplied on CD-ROM
- Installation on PC
- Adaptation to application
- Loading via Ethernet to the web server of the CPX module

The Web Monitor dynamically visualises information about the CPX system and its modules via Ethernet in the browser of a PC:

- Status and diagnosis of the CPX system via modules and channels
- Status of the channels/valves

- SMS or e-mail alerts can be set
 - Reading of CPX error memory (fault trace)
 - Setting of outputs (force mode)
- Three password-protected access levels protect access to the CPX terminal.

How does the CPX Web Monitor communicate? **What advantages does a CPX Web Monitor have?**

An IP address is allocated to the integrated web server. Depending on the performance of the connected Ethernet network, the CPX web server can be accessed from any PC.

Controllers or intelligent display and operating units can communicate with the CPX terminal.

- Expensive servicing is avoided
- Remote maintenance and monitoring of important device functions (counters) for the prevention of unjustified rights of recourse

- Preventive maintenance for reduced downtimes
- No engineering/no development of web applications

CPX Web Monitor – Application examples

Channel-oriented diagnosis **Monitoring of analogue values**

- Channel-specific status and error message of an I/O module
- Error message in "plain text" on the type of error
- Exact error identified and efficient service tasks possible

- Possible error messages:**
- Short circuit
 - Overload
 - Open load
 - Supply voltage below the tolerance limit

- Channel-specific status and error message of an I/O module
- Display in plain text
- Dynamic display of the current values at the inputs/outputs

- Possible error messages:**
- Open load
 - Upper or lower limit value exceeded

Error memory (fault trace)

Quick access to the last 40 diagnostic results with timestamp.

Assistance in finding sporadic errors and statistical accumulations.


Terminal CPX

Key features



Connection of inputs and outputs to the CPX terminal

Digital and analogue CPX I/O modules

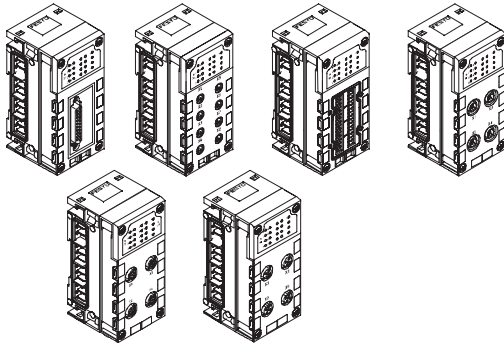


Electrical connection

The connection technology for the sensors and additional actuators offers a wide range of digital and analogue input and output modules and is freely selectable – depending on your standards or application:

- M12-5Pin
- M12-5Pin with quick lock and metal thread
- M12-8Pin
- M8-3Pin
- M8-4Pin
- Sub-D
- Harax®
- CageClamp® (with cover also for IP65/67)

With CPX-CP interface

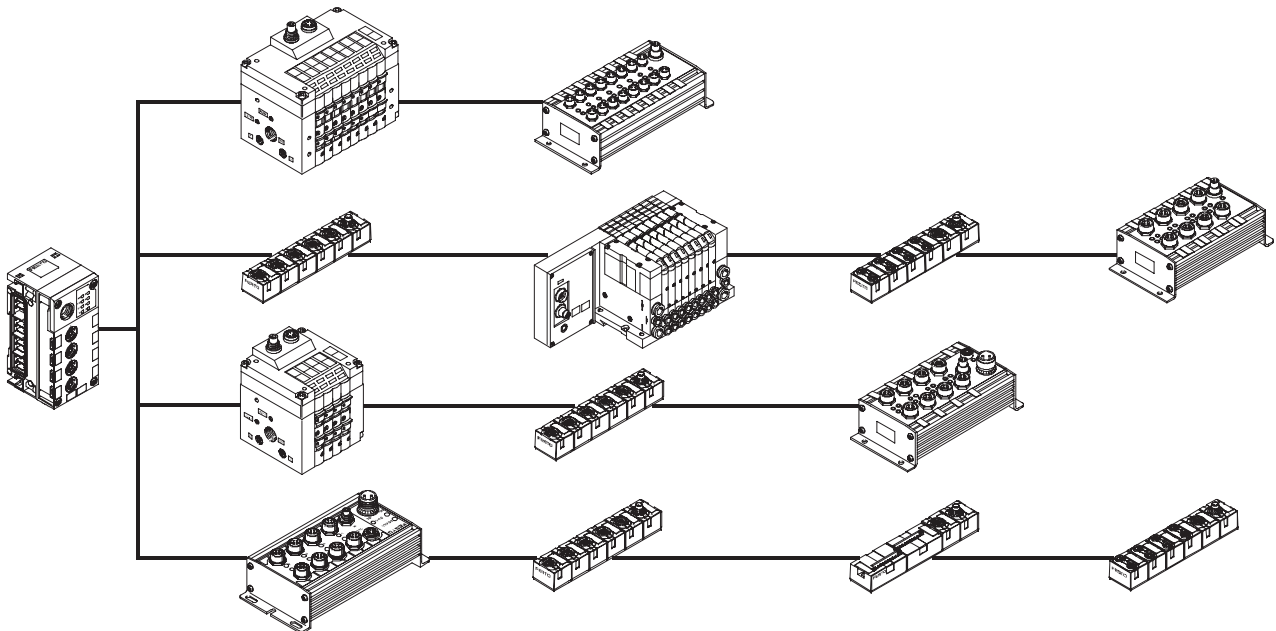


- Up to 4 strings per CP interface possible
- Up to 4 subordinate CP modules can be combined in a string

- Up to 32 I/Os can be connected per string
- Modules with M8, M12 and terminal connection

Several CP interface modules can be combined in one CPX terminal (depending on the controller used).

Combination of central CPX I/O modules and decently mounted I/O modules of the CPI installation system.

Combined centralised and decentralised connection (valve terminal with CP interface/output module)

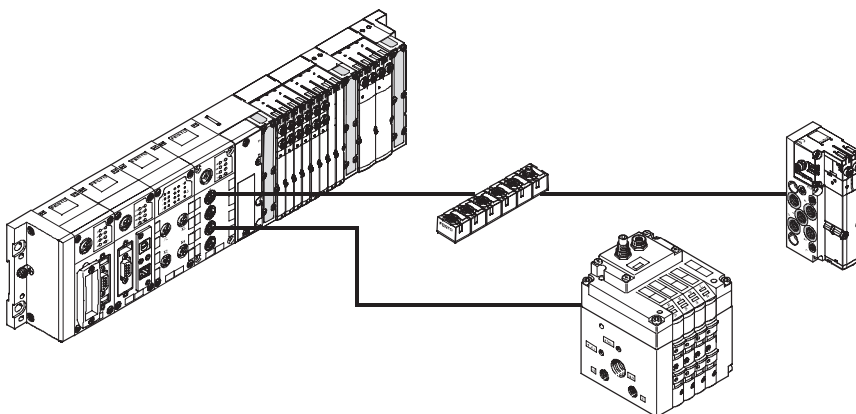

- Can be scaled to different requirements within a system
- One control interface in the system, reduces installation complexity with concentrated and widely separated actuators
- Permits the implementation of an optimum electrical and pneumatic control chain

Terminal CPX

Key features

FESTO

Ordering

The CPX terminal with valve terminal is fully assembled according to order specifications and individually tested. The finished valve terminal consists of the electrical peripherals including the desired actuation and the selected components of the VTSA (ISO), CPA, MPA or MIDI/MAXI modules.

The CPX terminal with valve terminal is ordered using two separate order codes. One order code defines the electrical peripherals type CPX, while the other specifies the pneumatic components of the valve terminal.

The electrical peripherals type CPX can naturally also be configured without a valve terminal and can be used on a fieldbus. For this order, you only require the order code for the electrical peripherals.

The order lists for the pneumatic components can be found in

- ➔ Valve terminal type 44 VTSA, ISO 15407-2
- ➔ Valve terminal type 12 CPA, Compact Performance
4 / 2.1-87
- ➔ Valve terminal type 32 MPA, Modular Performance
4 / 2.2-1
- ➔ Valve terminal type 03 VIMP-/VIFB-03, multi-functional MIDI/MAXI
4 / 2.2-56
4 / 2.2-1

The order lists for the CP/CPI components can be found in


- ➔ Installation system CPI
4 / 4.6-1

Terminal CPX

Peripherals overview



Complete overview of modules

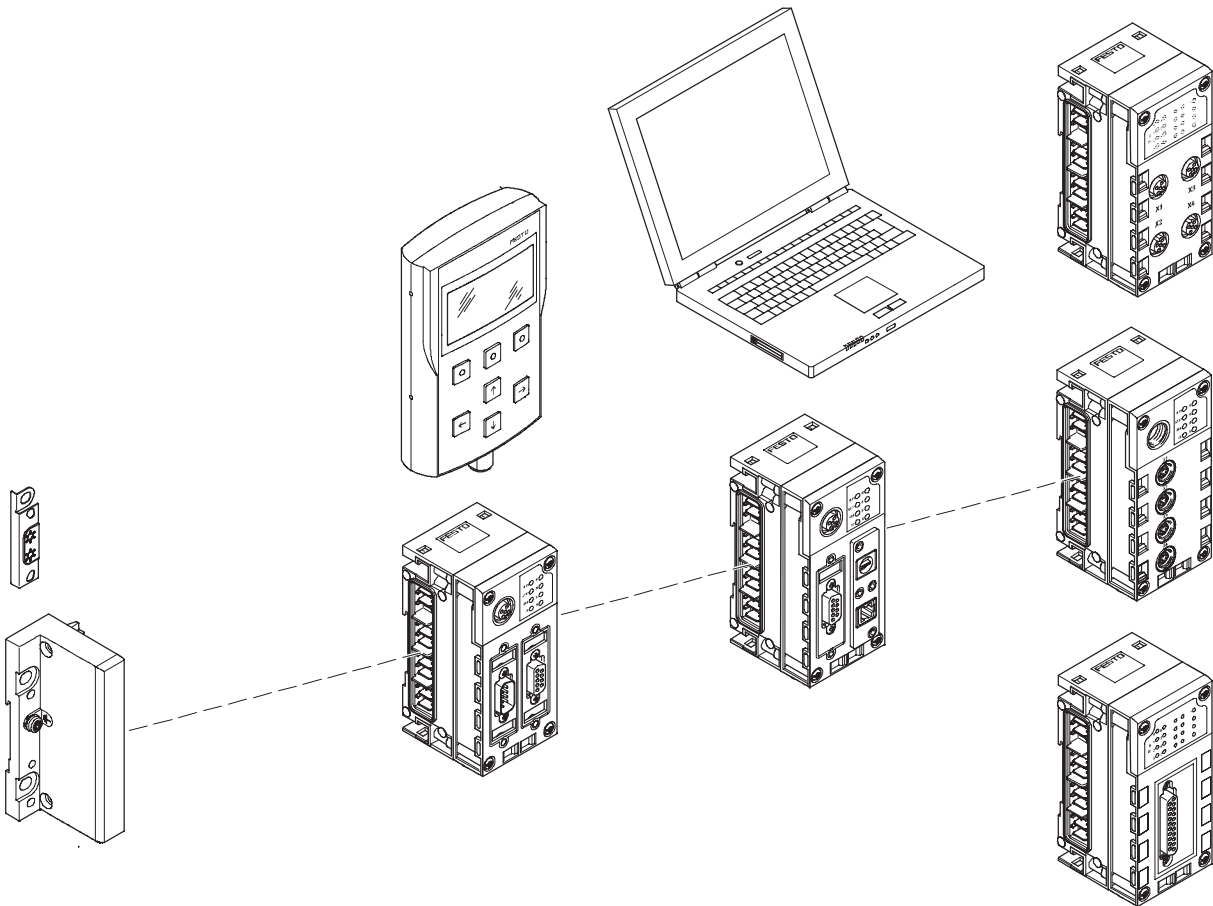

End plate

- Mounting holes for wall mounting
- Functional earthing connection
- Special earthing plate for safe and easy connection to the machine bed or H-rail

Bus node

- Fieldbus/Industrial Ethernet connection using various types of connection technology
- Setting of fieldbus parameters via DIL switch
- Display of fieldbus and peripheral equipment status via LED

Handheld control unit

- Connection to bus nodes or control block
- Display and modification of parameter settings
- Plain text display for texts, messages (e.g. individual channel diagnosis, condition monitoring), menus, etc.

Control block

- Preprocessing, autonomous controller or remote unit CPX-FEC
- Connection via Ethernet TCP/IP or Sub-D programming interface
- Setting of operating modes via DIL switch and program selection via rotary switch

Web Monitor

- Integrated home page for valve terminal
- Dynamic status display
- Online diagnosis
- SMS/e-mail alert

Input/output modules

- Combination of
- Interlinking block
 - Electronics module
 - Connection block

CP interface


- CP interface for decentralised installation systems, thus optimising the pneumatic control chain (short tubes/short cycle times)
- Up to 4 strings with up to 4 modules each and up to 32 I/Os in total per string
- Power supply and bus interface via the same line

Terminal CPX

Peripherals overview

FESTO

Complete overview of modules

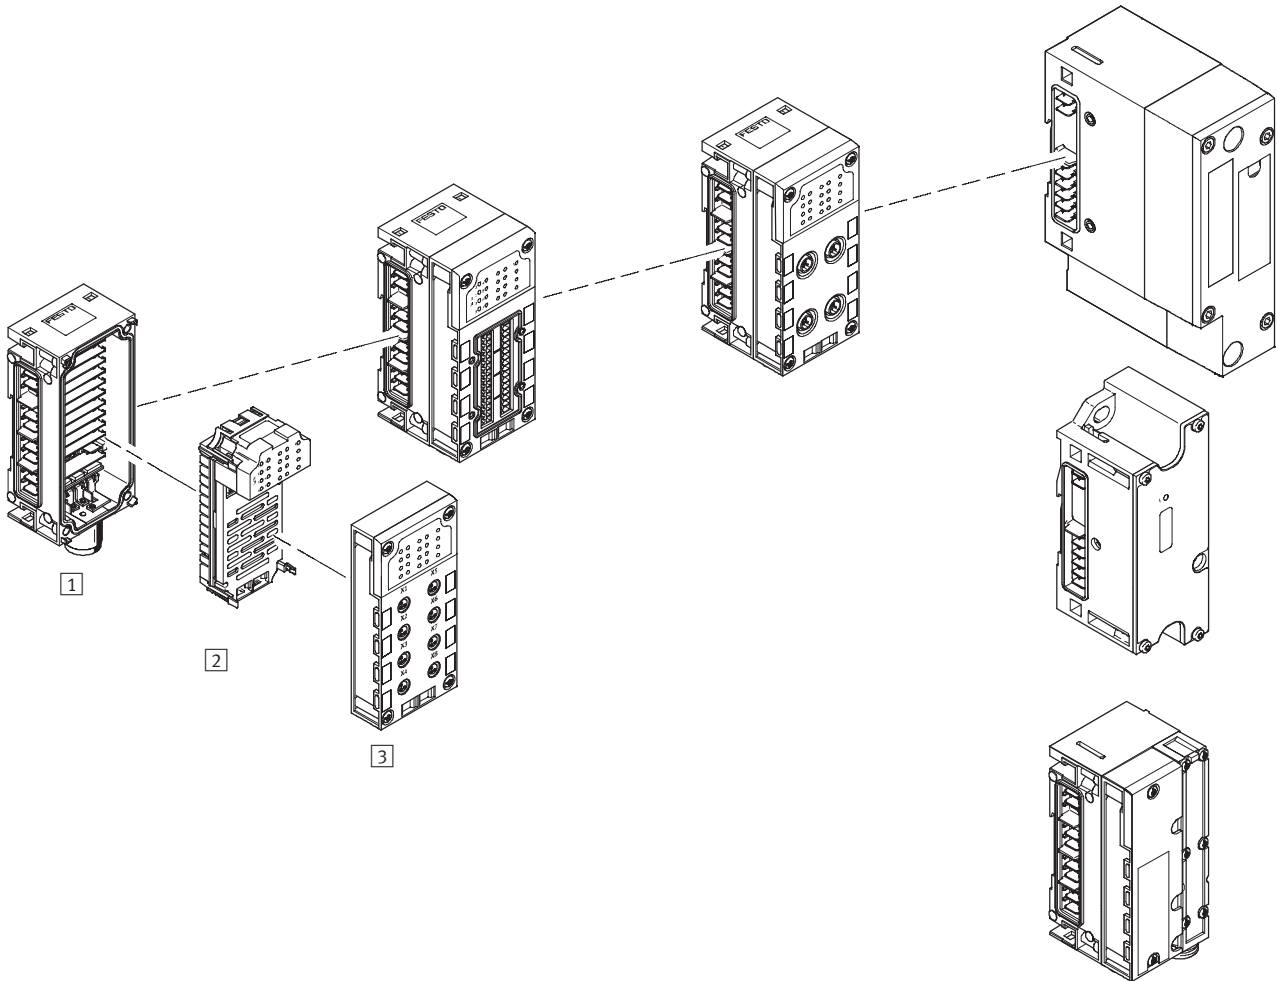

Input/output modules

1 Interlinking block

- Internal linking of the power supply and serial communication
- External power supply for the entire system
- Additional power supply for outputs or valves
- M18 or 7/8" connection accessories

2 Electronics module

- Digital inputs for connecting the sensors
- Digital outputs for activation of additional actuators
- Analogue inputs
- Temperature inputs (analogue)
- Analogue outputs

3 Connection block

- Selectable connection technology with 8 variants
- Protection class IP65/IP67 or IP20
- Freely combinable with the electronics modules
- M8/M12/Sub-D/Harax connection accessories
- M8/M12/Sub-D, etc. connecting cables
- Modular system for M8/M12 connecting cables

Pneumatic interface


- MPA1/2
- VTSA/VTSA-F
- MIDI/MAXI
- CPA10/14

Terminal CPX

Peripherals overview

Individual overview of modules


Bus node



Bus node for

- Profibus DP
- Interbus
- DeviceNet
- CANopen
- CC-Link
- Ethernet/IP
(integrated web server)


Control block



Control block

- Ethernet interface
- Modbus/TCP
- EasyIP
- Integrated web server
- Sub-D programming interface


CP interface



CP interface

- 4 CP strings
- Max. 4 modules per string
- 32/320 per string
- CPI functionality

Connection block



Direct machine mounting
(protection class IP65/IP67)

- M8-3Pin
- M8-4Pin
- M12-5Pin
- M12-5Pin Speedcon quick lock,
metal thread screened
- M12-8Pin
- Sub-D
- Harax®
- Clamped terminal connection
(CageClamp®) with cover

Protected fitting space
(protection class IP20)

- Clamped terminal connection
(CageClamp®)

Screening concept


- Optional screening plate for
connection blocks with M12
connection technology

Terminal CPX

Peripherals overview

Individual overview of modules

Digital electronics module for inputs/outputs




Digital inputs and outputs

- 4 digital inputs
- 8 digital inputs NPN
- 8 digital inputs PNP
- 8 digital inputs PNP with individual channel diagnosis
- 16 digital inputs
- 4 digital outputs (1 A per channel, individual channel diagnosis)
- 8 digital outputs (0.5 A per channel, individual channel diagnosis)

Multi I/O modules

- 8 digital inputs and 8 digital outputs

Analogue electronics module for inputs/outputs



Analogue inputs

- 2 analogue inputs (0 – 10 V DC, 0 – 20 mA, 4 – 20 mA)
- 4 analogue inputs (0 – 20 mA, 4 – 20 mA)


Analogue temperature inputs

- 4 analogue inputs for temperature measurement (Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni500, Ni1000)

Analogue outputs

- 2 analogue outputs (0 – 10 V DC, 0 – 20 mA, 4 – 20 mA)

Interlinking block



System linking

- Different voltage values for supplying the modules
- Serial communication between the modules

System supply

- M18, 4-pin
- 7/8" 4- or 5-pin

In addition to system linking, power supply for the

- electronics plus sensors (16 A)
- valves plus actuators (16 A)

Additional power supply

In addition to system linking, power supply for the

- actuators (16 A per supply)

Power supply for the

- valves (16 A per supply)



Note

The max. current is limited to 12 A with the 7/8" system supply.

When using a conventional pre-assembled cable, the max. current is limited to 8 A.

Terminal CPX


Peripherals overview

FESTO

Individual overview of modules

Pneumatic interface MPA

→ 4 / 4.8-123




Valve terminal

- MPA1 (360 l/min)
- MPA2 (700 l/min)
- Up to 128 solenoid coils
- Up to 16 modules can be configured

Pneumatic interface VTSA/VTSA-F

→ 4 / 4.8-124




Valve terminal

- 18 mm: Valve flow rate up to 700 l/min
- 26 mm: Valve flow rate up to 1,400 l/min
- 42 mm: Valve flow rate up to 1,500 l/min
- Max. 32 valve positions/
max. 32 solenoid coils

Pneumatic interface MIDI/MAXI

→ 4 / 4.8-125




Valve terminal

- MIDI valves (500 l/min)
or/and
MAXI valves (1,250 l/min)
- Up to 26 solenoid coils
- Setting of the number of valves via
DIL switch

Pneumatic interface CPA


→ 4 / 4.8-127



Valve terminal

- CPA10 (300 l/min)
- CPA14 (600 l/min)
- Up to 22 solenoid coils
- Setting of the number of valves via
DIL switch


End plate

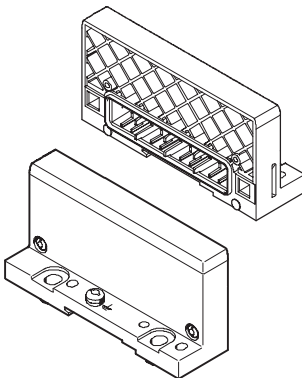

End plate

- Left-hand
- Right-hand (for use without valves)

Earthing plate




Earthing plate

- For safe and easy connection to the
machine bed or H-rail, suitable for
right-hand and left-hand end plate
- Assembly and earthing in a single
processing step, which means:
 - 50% time saving
 - No additional material required

Terminal CPX

Peripherals overview

General basic data and guidelines

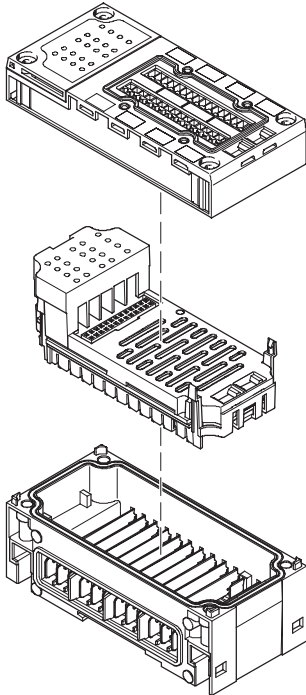

Max. 11 modules in total:

- One bus node and/or one control block, freely positionable
- Up to 9 further input/output modules, freely positionable
- An additional pneumatic interface, always positioned as the last module on the right-hand side
 - For VTSA, CPA and MIDI/MAXI: fixed operating range, set using DIL switch
 - For MPA: 16 MPA modules can be configured
- Address capacity max. 512 inputs and 512 outputs, depending on bus node or control block
- One interlinking block with system supply, freely positionable
- Multiple interlinking blocks with additional power supply, always positioned to the right of the interlinking block with system supply
- The connection blocks can, with just a small number of exceptions, be freely combined with the electronics modules for inputs/outputs (→ table below)
- All electronics modules for inputs/outputs can be combined with any interlinking block

Combinations of connection blocks and electronics modules for inputs/outputs

Connection blocks	Digital electronics modules							
	CPX-4DE	CPX-8DE	CPX-16DE	CPX-8DE-D	CPX-8NDE	CPX-4DA	CPX-8DA	CPX-8DE-8DA
CPX-AB-8-M8-3POL	■	■	-	■	■	■	■	-
CPX-AB-8-M8X2-4POL	-	-	■	-	-	■	■	-
CPX-AB-4-M1 2x2-5POL	■	■	-	■	■	■	■	-
CPX-AB-4-M1 2x2-5POL-R	■	■	-	■	■	■	■	-
CPX-AB-4-M1 2-8POL	-	-	-	-	-	-	-	■
CPX-AB-8-KL-4POL	■	■	■	■	■	■	■	■
CPX-AB-1-SUB-BU-25POL	■	■	■	■	■	■	■	■
CPX-AB-4-HARx2-4POL	■	■	-	■	■	■	■	-

Connection blocks	Analogue electronics modules			
	CPX-2AE	CPX-4AE-I	CPX-4AE-T	CPX-2AA
CPX-AB-8-M8-3POL	-	-	-	-
CPX-AB-8-M8X2-4POL	-	-	-	-
CPX-AB-4-M1 2x2-5POL	■	■	■	■
CPX-AB-4-M1 2x2-5POL-R	■	■	■	■
CPX-AB-4-M1 2-8POL	-	-	-	-
CPX-AB-8-KL-4POL	■	■	■	■
CPX-AB-1-SUB-BU-25POL	■	■	-	■
CPX-AB-4-HARx2-4POL	-	-	■	-


Terminal CPX

Key features – Electrical components



Electrical connection – Connection block

CPX-AB-8-M8-3POL with 8-pin M8 (M8-3POL) connection

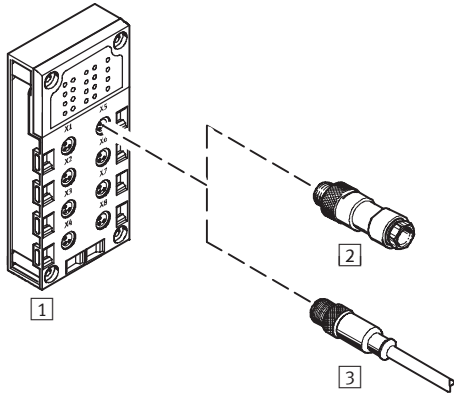

- Compact for pre-assembled individual connection
- 8 sockets
- 3-pin design for connection of 1 channel per socket



Note

Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on customer request:

- Individual
- Fits perfectly
- Installation-saving

Combination of connection block with electrical connection technology


Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
1 CPX-AB-8-M8-3POL	Socket, M8, 3-pin	2 SEA-GS-M8	Solderable lugs
		2 SEA-3GS-M8-S	Screw terminals
		3 KM8-M8-GSGD-... (pre-assembled connecting cable)	Socket, M8, 3-pin
		3 KM8-M12-GSGD-... (pre-assembled connecting cable)	Socket, M12, 3-pin
		3 NEBU-...-M8G3 (modular system for connecting cables)	Socket, M5, 3-pin
			Socket, M8, 3-pin
Socket, M8, 4-pin			
			Socket, M12, 5-pin
			Open cable end

Terminal CPX

Key features – Electrical components

Electrical connection – Connection block

CPX-AB-8-M8X2-4POL with 4-pin M8 (M8-4POL) connection

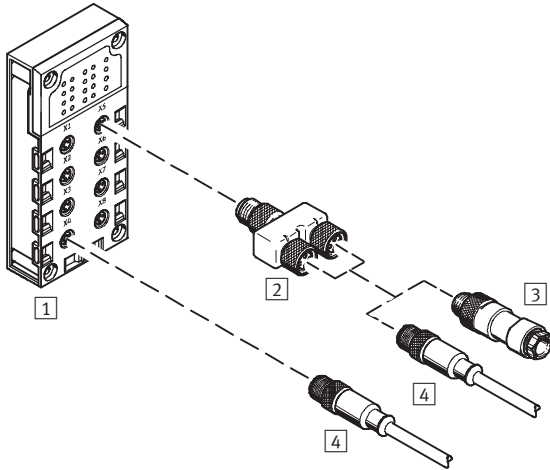

- Compact for pre-assembled individual connection
- 8 sockets
- 4-pin design for connection of 2 channels per socket

Combination of connection block with electrical connection technology

Connection block	Connection technology	Plug connector/ connecting cable	Selectable connection technology	Plug connector/ connecting cable	Selectable connection technology	
1 CPX-AB-8-M8X2-4POL	Socket, M8, 4-pin	4 NEBU-...-M8G4 (modular system for connecting cables)	Socket, M5, 3-pin	-	-	
			Socket, M8, 3-pin	-	-	
			Socket, M8, 4-pin	-	-	
			Socket, M12, 5-pin	-	-	
			Open cable end	-	-	
		2 NEDU-M8D3-M8T4 (T-adapter)	1x plug M8, 4-pin to 2x socket M8, 3-pin		3 SEA-GS-M8	Solderable lugs
					3 SEA-3GS-M8-S	Screw terminals
					4 KM8-M8-GSGD-... (pre-assembled connecting cable)	Socket, M8, 3-pin
					4 KM8-M12-GSGD-... (pre-assembled connecting cable)	Socket, M12, 3-pin
					4 NEBU-...-M8G3 (modular system for connecting cables)	Socket, M5, 3-pin
						Socket, M8, 3-pin
						Socket, M8, 4-pin
Socket, M12, 5-pin						
Open cable end						


Terminal CPX

Key features – Electrical components



Electrical connection – Connection block

CPX-AB-4-M12x2-5POL and CPX-AB-4-M12x2-5PPOL-R with M12-5PIN connection

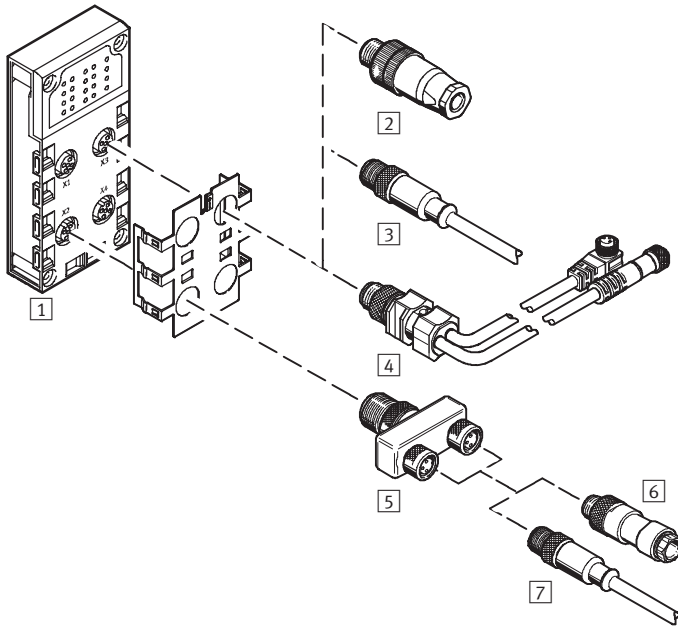

- Pre-assembled and sturdy with 2 channels per socket
- 4 sockets
- 5-pin design for each socket
- Version ...-R with Speedcon quick-lock technology and metal thread for screening
- With two channels per socket, the corresponding input signals can be easily connected via a T-adaptor and conventional cable with M8 connection.

Terminal CPX

Key features – Electrical components




Combination of connection block with electrical connection technology					
Connection block	Connection technology	Plug connector/connecting cable	Connection technology	Plug connector/connecting cable	Connection technology
1 CPX-AB-4-M12x2-5POL CPX-AB-4-M12x2-5POL-R	Socket, M12, 5-pin	2 SEA-GS-7	Screw terminals	-	-
		2 SEA-4GS-7-2,5	Screw terminals	-	-
		2 SEA-GS-9	Screw terminals	-	-
		2 SEA-M12-5GS-PG7	Screw terminals	-	-
		2 SEA-GS-11-DUO	Screw terminals, for two cables	-	-
		2 SEA-5GS-11-DUO	Screw terminals, for two cables	-	-
		3 KM12-M12-... (pre-assembled connecting cable)	Socket, M12, 4-pin	-	-
		3 NEBU-...-M12G4	Socket, M5, 4-pin	-	-
		3 NEBU-...-M12G5	Socket, M8, 4-pin	-	-
			Socket, M12, 5-pin	-	-
			Open cable end	-	-
		4 KM12-DUO-M8-... (pre-assembled connecting cable)	Plug M12, 4-pin to 2x socket M8, 3-pin	6 SEA-GS-M8	Solderable lugs
		5 NEDU-M8D3-M12T4 (T-adapter)		6 SEA-3GS-M8-S	Screw terminals
		5 NEDU-M12D5-M12T4 (T-adapter)	Plug M12, 4-pin to 2x socket M12, 5-pin	7 KM8-M8-GSGD-... (pre-assembled connecting cable)	Socket, M8, 3-pin
				7 KM8-M12-GSGD-... (pre-assembled connecting cable)	Socket, M12, 3-pin
				7 NEBU-...-M8G3 (modular system for connecting cables)	Socket, M5, 3-pin
					Socket, M8, 3-pin
					Socket, M8, 4-pin
					Socket, M12, 5-pin
				Open cable end	
				6 SEA-GS-7	Screw terminals
				6 SEA-4GS-7-2,5	Screw terminals
				6 SEA-GS-9	Screw terminals
		6 SEA-M12-5GS-PG7	Screw terminals		
		6 SEA-GS-11-DUO	Screw terminals, for two cables		
		6 SEA-5GS-11-DUO	Screw terminals, for two cables		
7 KM12-M12-... (pre-assembled connecting cable)	Socket, M12, 4-pin				
7 NEBU-...-M12G4 (modular system for connecting cables)	Socket, M5, 4-pin				
7 NEBU-...-M12G5 (modular system for connecting cables)	Socket, M8, 4-pin				
	Socket, M12, 5-pin				
	Open cable end				

Terminal CPX

Key features – Electrical components

Electrical connection – Connection block

CPX-AB-4-M12-8POL with 8-pin M12 (M12-8POL) connection

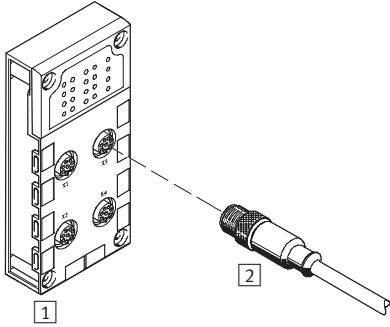


- Connection to cylinder-valve combinations with max. 3 inputs and 2 outputs
- 4 sockets
- 8-pin design for each socket

Combination of connection block with electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
1 CPX-AB-4-M12-8POL	Socket, M12, 8-pin	2 KM12-8GD8GS-2-PU (pre-assembled connecting cable)	Socket, M12, 8-pin

CPX-AB-8-KL-4POL with terminal (CageClamp®) connection

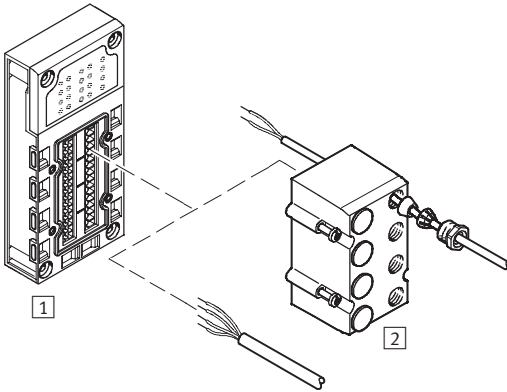

- Fast connection technology for use in control cabinets
- 32 CageClamp® spring-loaded terminals
- 4 terminals per channel
- Wire cross sections 0.05 ... 1.5 mm²
- Optional cover with fittings for IP65/67 connection
 - 8 through-holes M9
 - 1 through-hole M16
 - Blanking plug
 - For I/O distributors, consoles or individual sensors/actuators

Combination of connection block with electrical connection technology


Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
1 CPX-AB-8-KL-4POL	Cage clamp terminals, 32-pin	2 AK-8KL (cover)	–

Terminal CPX

Key features – Electrical components

Electrical connection – Connection block

CPX-AB-1-SUB-BU-25POL with Sub-D connection

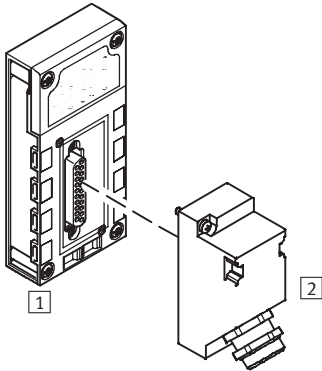


- Multi-pin connection for I/O distributor or console
- One socket
- 25-pin design

Combination of connection block with electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
1 CPX-AB-1-SUB-BU-25POL	Socket, Sub-D, 25-pin	2 SD-SUB-D-ST25	Crimp contacts

CPX-AB-4-HARx2-4POL with HARAX connection



- Sturdy, fast connection technology for individual connections
- 4 sockets
- 4-pin design for each socket

Combination of connection block with electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
1 CPX-AB-4-HARx2-4POL	Socket, HARAX, 4-pin	2 SEA-GS-HAR-4POL	Insulation displacement connectors

Terminal CPX

Key features – Mounting types




Mounting options

Valve terminals with CPX terminal support different mounting methods for direct machine mounting with high

protection and control cabinet installation.

H-rail mounting



The H-rail mounting is formed in the reverse profile of the CPX interlinking blocks. The CPX terminal can be attached to the H-rail using the H-rail mounting kit.

The CPX terminal is attached to the H-rail as follows (see arrow A).

It is first swivelled on the H-rail and then secured in place with the clamping component (see arrow B). The optional earthing plate allows a convenient working connection to be established to the machine potential/earth.


The following mounting kit is required for H-rail mounting:

- CPA-BG-NRH

This permits mounting of the CPX on H-rails to EN 60715.


An additional mounting kit is required for combination with valve terminals.

Wall mounting

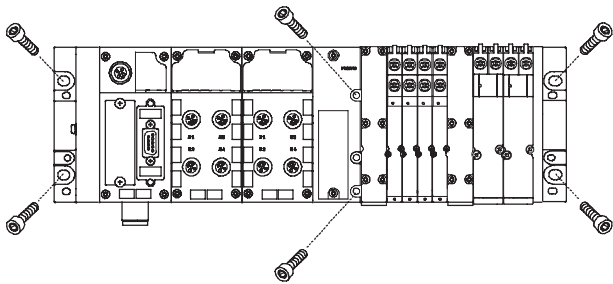

The end plates of the CPX terminal, the valve terminal and the pneumatic interface include mounting holes for wall mounting.

Additional mountings

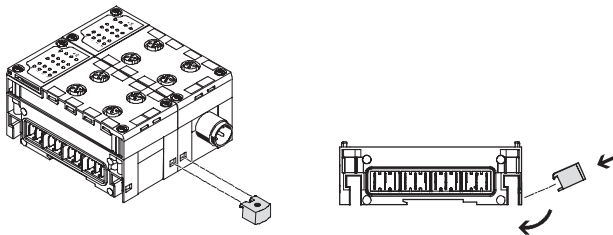


For longer valve terminals, there are additional mountings for the CPX terminal that can be fitted between two modules.

 Note

In order to reduce stress caused by vibration or impact, an additional mounting must be used every 2 to 3 modules.

Tie rod

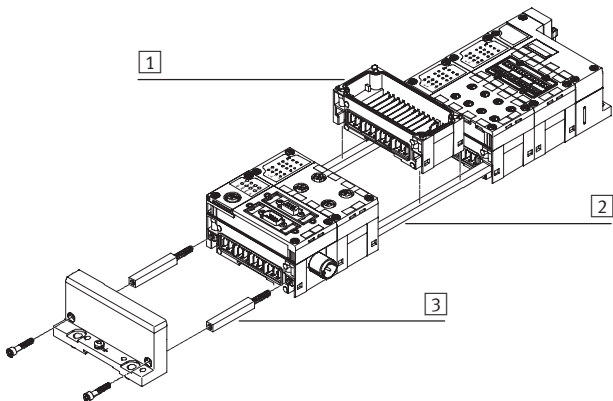

The mechanical connection between the CPX modules is created using special tie rods [2]. Two screws in the end plates are all that are needed to assemble the entire unit.

The tie rod ensures that the unit resists high mechanical loads and is therefore the “mechanical backbone” of the CPX terminal.

The open design allows interlinking blocks [1] to be replaced in the assembled state.



The tie rod expansion kit [3] allows an extra module to be added to the CPX terminal.

Terminal CPX

Key features – Power supply

Power supply concept

General information

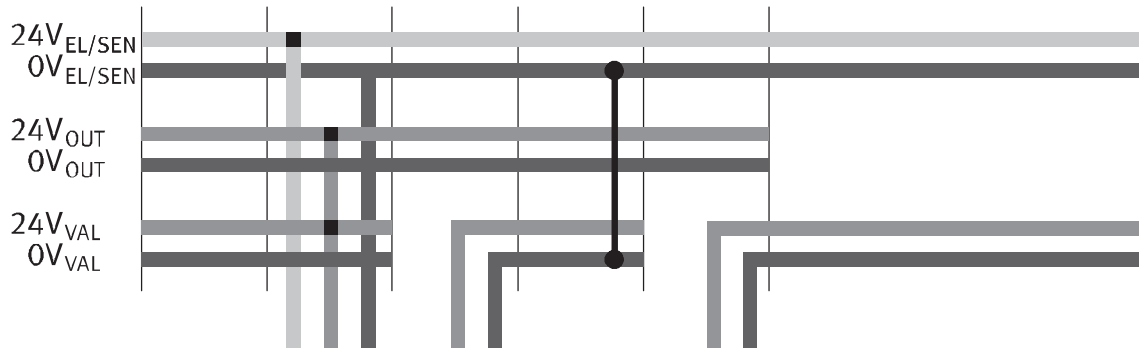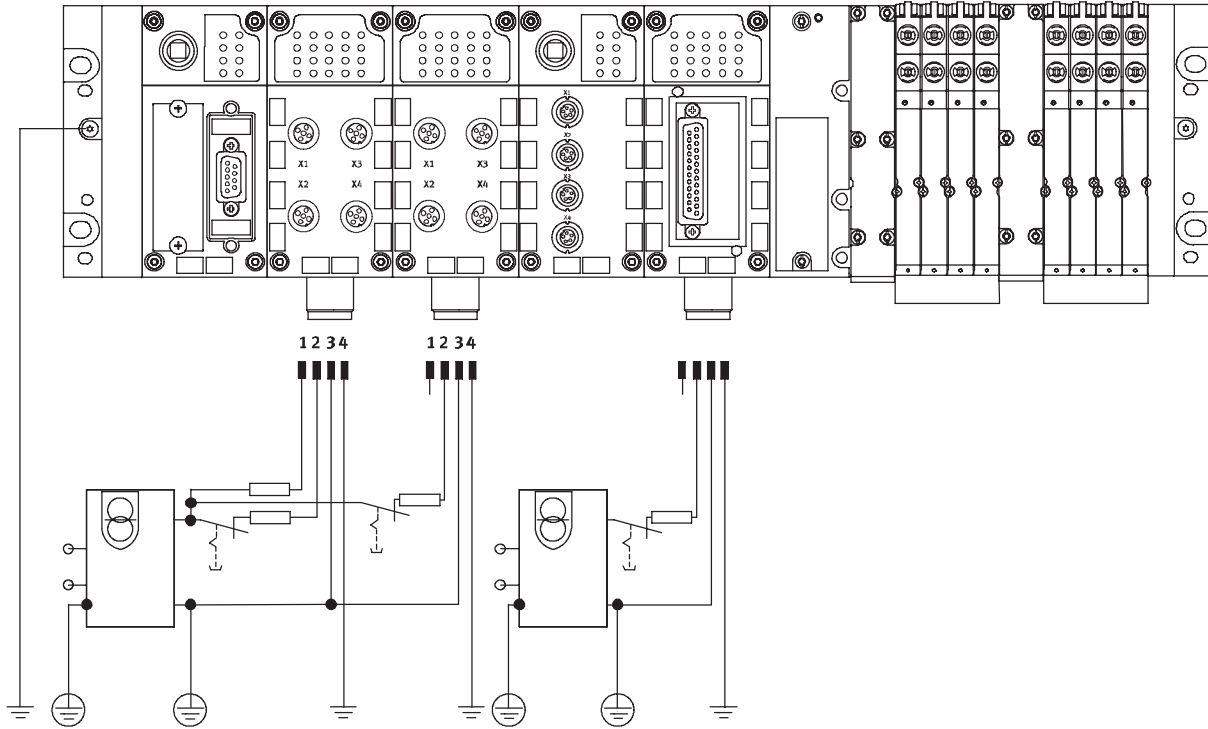

The use of decentralised devices on the fieldbus – particularly with high protection for direct machine mounting – demands a flexible power supply

concept. A valve terminal with CPX can supply all voltages using a single socket. A distinction is made between supply

for
 • electronics plus sensors
 • valves plus actuators
 in this case. The following connecting

thread can be selected:
 • M18
 • 7/8"

Interlinking blocks

Interlinking blocks represent the backbone of the CPX terminal with all supply lines. They provide the power supply for the modules used on them

as well as the bus connection. Many applications require the CPX terminal to be segmented into voltage zones. This applies in particular to the

separate disconnection of solenoid coils and outputs. The interlinking blocks provide either a space-saving central power supply

for the entire CPX terminal or electrically isolated, all-pin disconnectable potential groups/voltage segments.


Terminal CPX

Key features – Power supply



Interlinking blocks

With system supply




- Type
- CPX-GE-EV-S
 - CPX-GE-EV-S-7/8-5POL
 - CPX-GE-EV-S-7/8-4POL

- Connection technology
- M18
 - 7/8" 5-pin
 - 7/8" 4-pin

- Power supply
- For CPX terminal modules and connected sensors
 - For valves that are connected to the CPX terminal via a pneumatic interface
 - For actuators that are connected to CPX terminal output modules

Without power supply




- Type
- CPX-GE-EV

–

- No power supply

With additional power supply for outputs




- Type
- CPX-GE-EV-Z
 - CPX-GE-EV-Z-7/8-5POL
 - CPX-GE-EV-Z-7/8-4POL

- Connection technology
- M18
 - 7/8" 5-pin
 - 7/8" 4-pin

- Power supply
- For actuators that are connected to CPX terminal output modules

With additional power supply for valves



- Type
- CPX-GE-EV-V
 - CPX-GE-EV-V-7/8-4POL

- Connection technology
- M18
 - 7/8" 4-pin

- Power supply
- For valves that are connected to the CPX terminal via a pneumatic interface

Note
 Note the following for 7/8":
 – Commercially available accessories are often limited to max. 8 A


Note
 Valve terminal type 32 MPA has either a 7/8", 5-pin, 7/8", 4-pin or M18, 3-pin power supply for one or more voltage zones of the valves.
 Electrically isolated, all-pin disconnectable with voltage monitoring in the following MPA module.

Terminal CPX

Key features – Diagnosis

Diagnosis

System performance

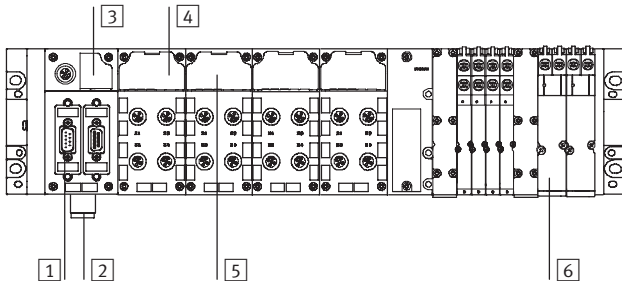

- 1 Diagnosis via bus interface
- 2 Undervoltage monitor
- 3 Diagnostic overview LED
 - Fieldbus status
 - CPX status
- 4 Status and diagnostic LED for module and I/O channels
- 5 Module- and channel-specific diagnosis
- 6 Valve-specific diagnosis for module and solenoid coils

Detailed diagnostic functions are needed in order to quickly locate the causes of errors in the electrical installation and therefore reduce downtimes in production plants. A basic distinction is made between on-the-spot diagnosis using LEDs or handheld control unit and diagnosis using a bus interface.


The CPX terminal supports on-the-spot diagnosis via a row of LEDs. This is separate from the connection area and therefore provides good visual access to status and diagnostic information.

Module- and channel-specific diagnosis is supported, for example

- Undervoltage identification for the outputs and valves
- Short circuit detection for sensors, outputs and valves
- Open-circuit detection for a missing solenoid coil
- Storage of the last 40 causes of errors with error start and error end


The diagnostic messages can be read via bus interface in the master controller and visualised for the centralised recording and evaluation of error causes. This is done using the individual fieldbus-specific channels. The CPX-FEC also offers the option of access via the integrated Ethernet interface (remote maintenance via PC/web applications).

Overview of LEDs on the bus node



- 1 Fieldbus-specific LEDs
 - On each bus node, a maximum of 4 fieldbus-specific LEDs display the fieldbus communication status of the CPX terminal with the master controller.
- 2 CPX-specific LEDs
 - A further 4 CPX-specific LEDs provide non-fieldbus-specific information about the status of the CPX terminal, for example
 - Power system
 - Power load
 - System errors
 - Modification parameters

Input/output module status and diagnostic LEDs




- 1 Status LEDs for inputs and outputs
 - Each input and output channel is assigned a status LED.
- 2 Channel-oriented diagnostic LED
 - Depending on the module design, another diagnostic LED is available for each I/O channel.
- 3 Central diagnostic LED
 - An LED displays a collective diagnosis for each module.

Terminal CPX

Key features – Parameterisation

Diagnosis

Display on handheld control unit



1 LCD graphical display for plain text diagnosis


Display on Web Monitor



CPX Web Monitor overview



Analogue module, channel-oriented diagnosis



Error memory (fault trace)

The Web Monitor displays all static and dynamic information on a CPX terminal via Ethernet online – in the web browser of the PC. This facility is optionally available via intranet and Internet. Everything is plug & work – without the need for web programming such as HTML or JAVA.


Parameterisation

Changes to the application are often required during commissioning. Thanks to the parameterisable characteristics of CPX modules, functions can be very easily changed by means of configuration software. This reduces the number of modules and, consequently, the amount of storage space required.

It is therefore possible for example to reduce the input debounce time for an input module – normally 3 ms – to 0.1 ms on a “fast” input module for faster processes, or to set the response of a valve following a fieldbus interrupt.

Depending on the modules used, parameterisation can be performed via the following interfaces:

- Ethernet
- Fieldbus
- FEC direct interface (programming interface)
- Handheld control unit CPX-MMI

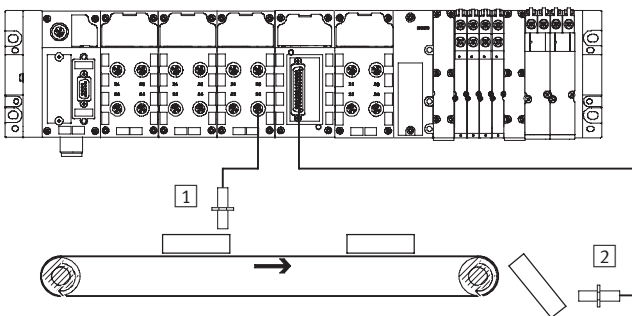

- 1 Input debounce time 3 ms
2 Input debounce time 0.1 ms

Terminal CPX

Key features – Addressing

Addressing

General information on addressing

The various CPX modules occupy a different number of I/O addresses within the CPX system. The maximum address space for bus nodes depends on the performance of the fieldbus system.

Maximum system extension:

- 1 bus node or control block
- 9 I/O modules
- 1 pneumatic interface (e.g. pneumatic interface MPA with up to 16 MPA modules)

The maximum system extension can be limited in individual cases by exceeding the address space.

 Note

Please refer to the detailed description of the configuration/addressing rules in the technical data for CPX bus nodes.

Overview – Allocated addresses for CPX modules

	Inputs [bit]	Outputs [bit]
CPX-4DE	4	–
CPX-8DE	8	–
CPX-16DE	16	–
CPX-8DE-D	8	–
CPX-8NDE	8	–
CPX-4DA	–	4
CPX-8DA	–	8
CPX-8DE-8DA	8	8
CPX-2AE	2 x 16	–
CPX-4AE-I	4 x 16	–
CPX-4AE-T	4 x 16	–
CPX-2AA	–	2 x 16
VABA-S6-1-X1	–	8, 16, 24, 32 ¹⁾
CPX-GP-CPA-10	–	8, 16, 24 ¹⁾
CPX-GP-CPA-14	–	8, 16, 24 ¹⁾
CPX-GP-03-4,0	–	8, 16, 24, 32 ¹⁾
VMPA1-FB-EMS-8	–	8
VMPA-FB-EMG-8	–	8
VMPA2-FB-EMS-4	–	4
VMPA2-FB-EMG-4	–	4

1) Depends on the DIL switch setting on the pneumatic interface

Terminal CPX

Key features – Addressing



Overview – Address space for CPX bus node and control block							
	Protocol	Max. total		Max. digital		Max. analogue	
		Inputs	Outputs	Inputs	Outputs	Inputs	Outputs
CPX-FEC	<ul style="list-style-type: none"> • TCP/IP • EasyIP • Modbus TCP • HTTP 	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB6	Interbus	96 bit	96 bit	96 DI	96 DO	6 AI	6 AO
CPX-FB11	DeviceNet	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB13	Profibus	512 bit	512 bit	512 DI	512 DO	32 AI	18 AO
CPX-FB14	CANopen	192 bit	192 bit	64 DI (+ 64 DI)	64 DO (+ 64 DO)	8 AI (+ 8 AI)	8 AO (+ 8 AO)
CPX-FB23	CC-Link	–	–	64 DI	64 DO	16 AI	16 AO
CPX-FB32	Ethernet/IP	128 bit	128 bit	128 DI	128 DO	8 AI	8 AO

Example – CPX-FB6 (Interbus)			
	Digital inputs	Digital outputs	Remarks
3x CPX-8DE	24	–	<ul style="list-style-type: none"> • The address space is occupied with 7 CPX I/O modules plus pneumatic interface • No additional modules can be configured
1x CPX-8DE-8DA	8	8	
2x CPX-2AE	64	–	
1x CPX-2AA	–	32	
3x VMPA1	–	24	
Allocated address space	96	96	

DI = Digital inputs (1 bit)




DO = Digital outputs (1 bit)

AO = Analogue outputs (16 bit)

AI = Analogue inputs (16 bit)

Terminal CPX

Key features – Type codes

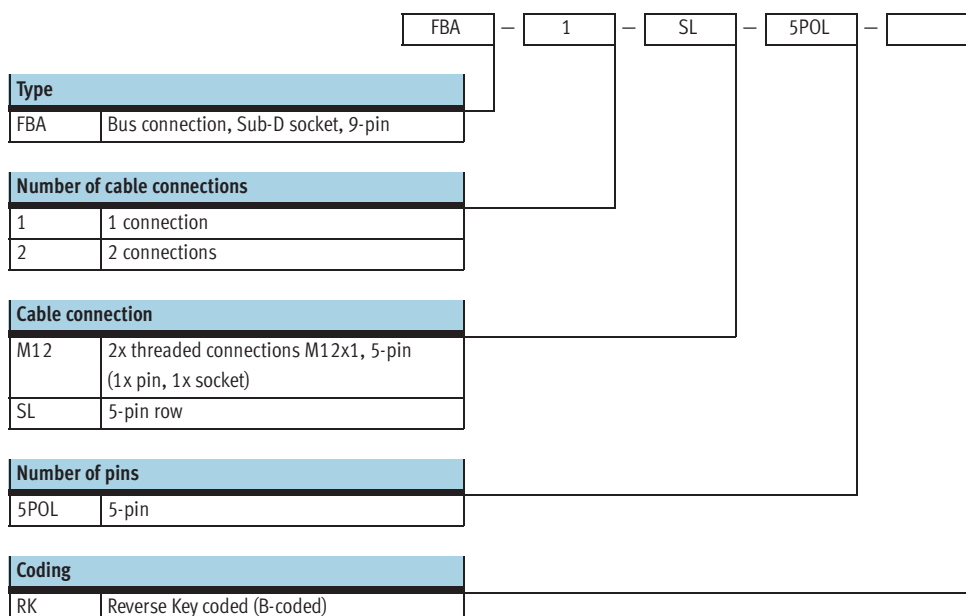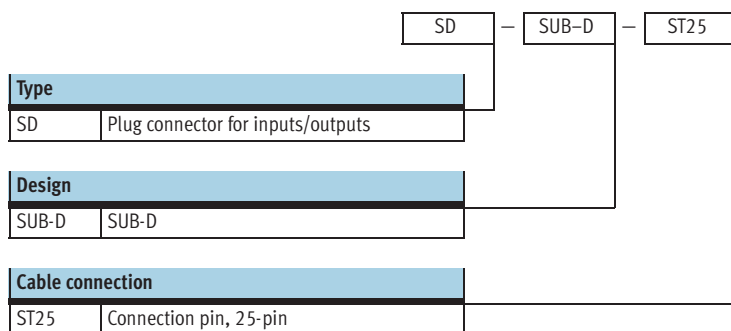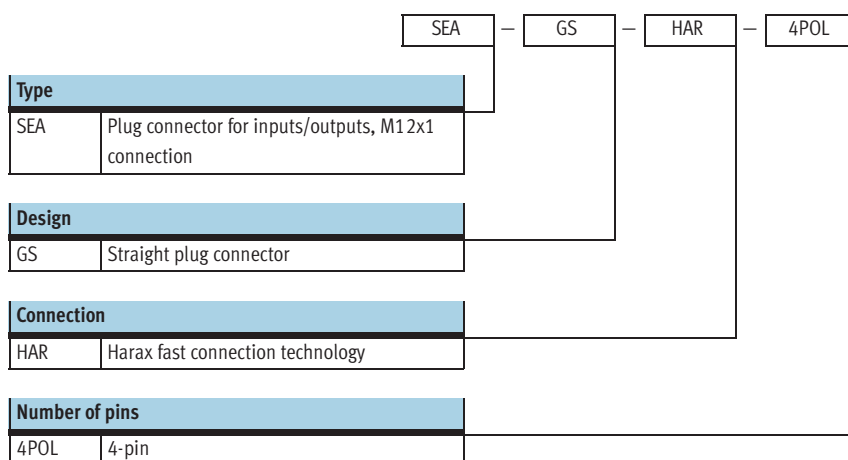

Terminal CPX

Key features – Type codes

FBS – SUB – 9 – GS – 1X9POL – B




Type	
FBS	Plug connector for bus connection
Design	
SUB	SUB-D
Number of pins	
9	9-pin
Cable connection design	
BU	Socket
GS	Straight plug connector
Cable connection	
2X4POL	2x PG threaded connector (2x terminal block, 4-pin)
1X9POL	PG9 threaded connector (2x terminal block, 4-pin)
IB	For Interbus
Generation	
B	B series

SEA – GS – 7 –

Type	
SEA	Plug connector for inputs/outputs
Design	
GS	Straight plug connector
Cable connection	
7	PG7 connector (cable opening 4 ... 6 mm)
9	PG9 connector (cable opening 6 ... 8 mm)
11	PG11 connector (cable opening 3 ... 5 mm)
No. of outputs	
DUO	For 2 cables

Terminal CPX

Key features – Type codes

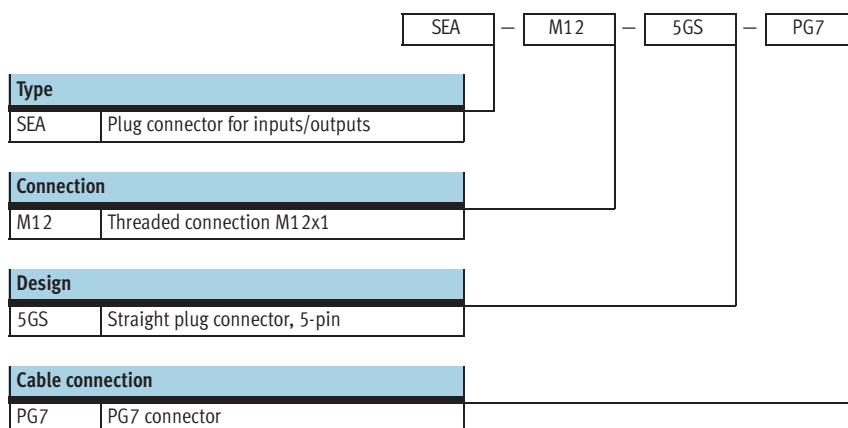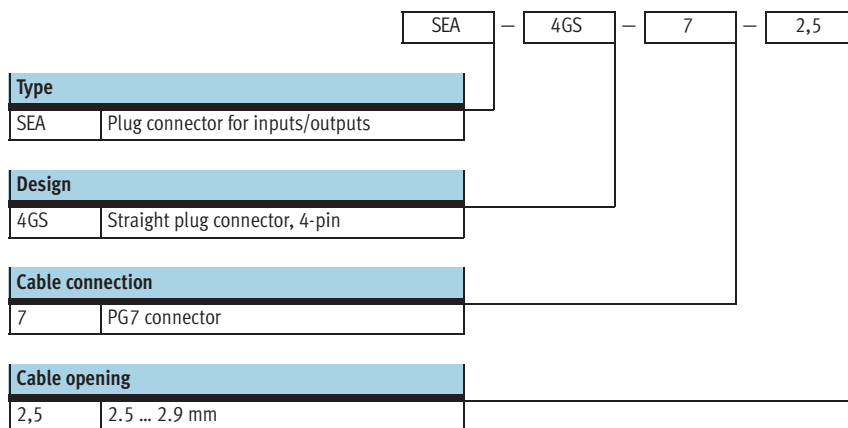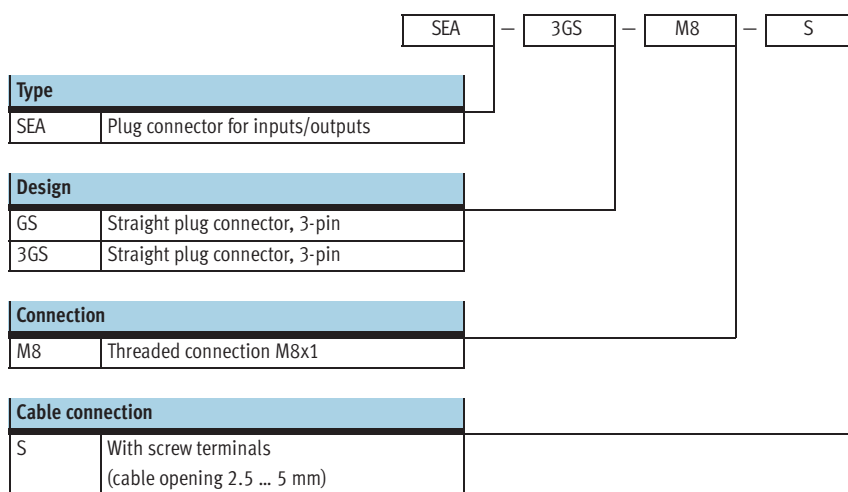

Terminal CPX

Key features – Type codes

NTSD – GD – 13,5

Type	
NTSD	Plug socket for mains connection

Design	
GD	Straight socket, 4-pin

Cable connection	
9	PG9 connector (cable opening 6 ... 8 mm)
13,5	PG13.5 connector

NTSD – WD – 9

Type	
NTSD	Plug socket for mains connection

Design	
WD	Angled plug socket, 4-pin

Cable connection	
9	Cable opening 6 ... 11 mm
11	Cable opening 5 ... 11 mm

CPX-AB – 2 – M12 – RK – IB

Type	
CPX-AB	Connection block for CPX Profibus node

Number of cable connections	
2	2 connections



Connection	
M12	Threaded connection M12x1

Coding	
RK	Reverse Key coded (B-coded)

Cable connection	
IB	For Interbus
DP	For Profibus

Terminal CPX

Key features – Type codes

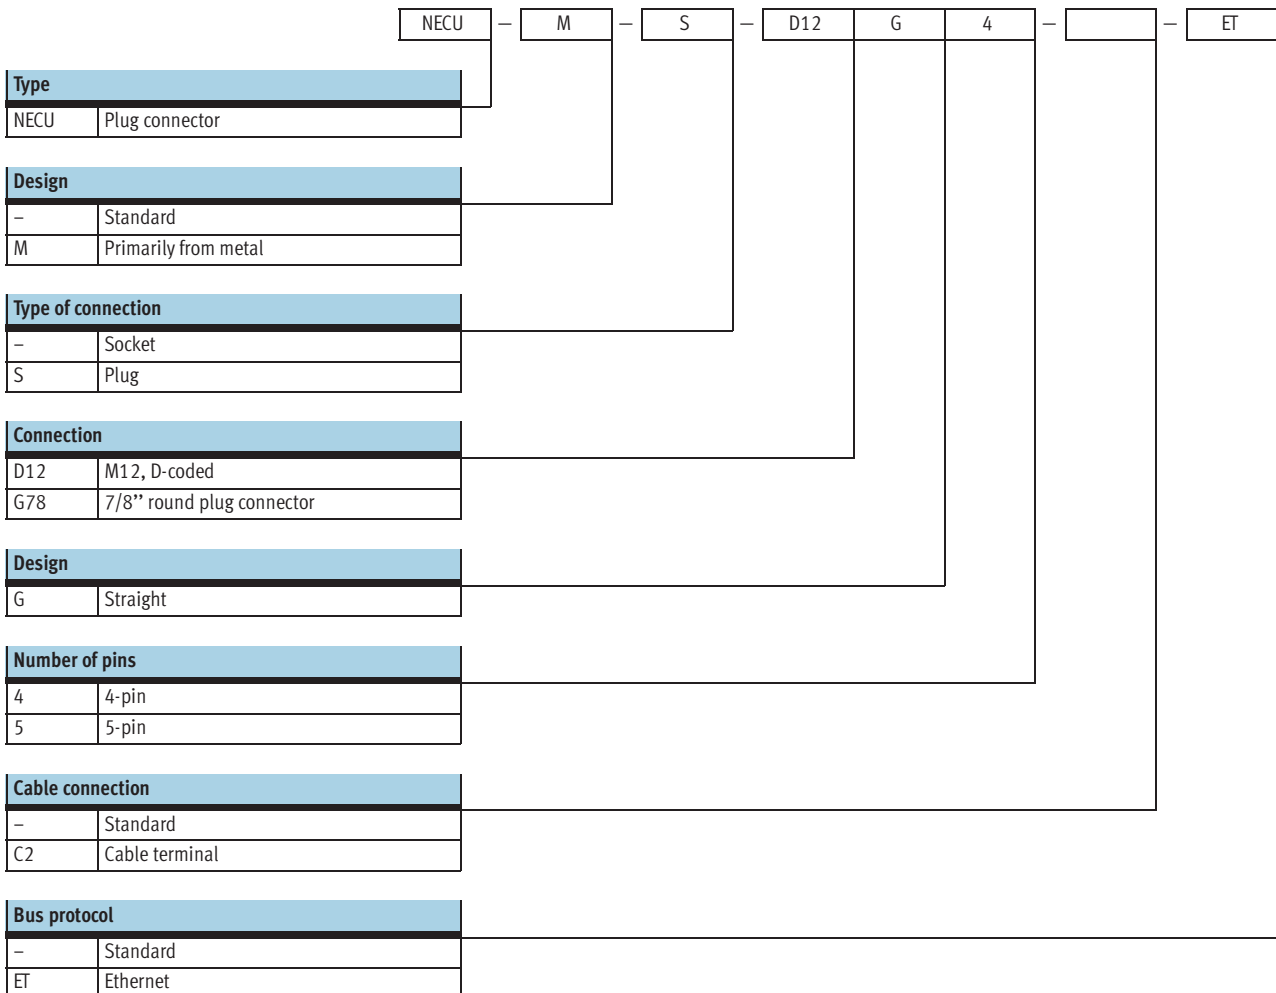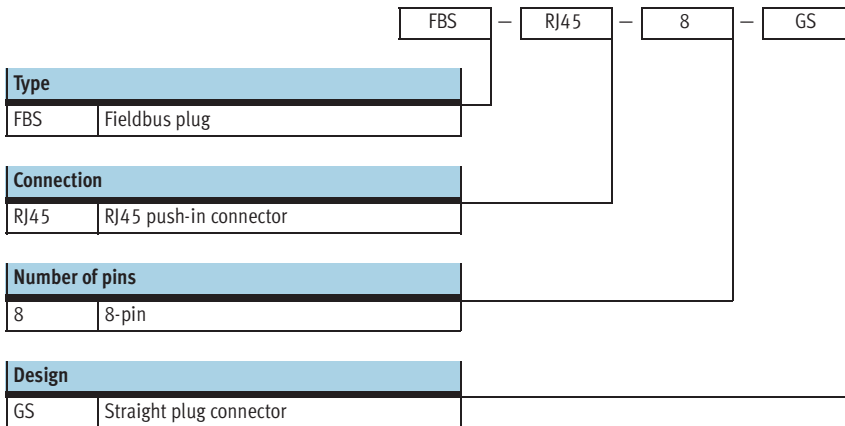

Terminal CPX

Key features – Type codes



NEBU		M12	W	5	P	K	2.5			LE	3
Function											
NEBU	Connecting cable										
Connection, left-hand											
M5	Socket with connecting thread										
M8	Socket with connecting thread										
M12	Socket with connecting thread, A-coded										
Socket design											
G	Straight										
W	Angled										
Number of pins/wires (left-hand end)											
3	3-pin (suitable for M8 plug)										
4	4-pin (suitable for M8 plug)										
5	5-pin (suitable for 3-, 4- and 5-pin M12 plug)										
Display											
-	Without LED, DC (standard)										
P	LED, PNP										
N	LED, NPN										
Cable attribute											
K	Standard										
E	Suitable for chain link trunking										
R	Suitable for robots										
Cable length											
0.1 ... 25	0.1 ... 25 m										
Alternative wire cross section											
-	0.25 mm ² (standard)										
Q3	0.14 mm ²										
Cable designation											
-	With inscription label holder (standard)										
N	Without inscription label holder										
Connection, right-hand											
LE	Open end										
M8	Socket with connecting thread										
M12	Socket with connecting thread, A-coded										
Plug design											
G	Straight										
W	Angled										
Number of pins/wires (right-hand end)											
3	3-pin (suitable for M8/M12 socket)										
4	4-pin (suitable for M8/M12 socket)										
5	5-pin (suitable for M12 socket)										

Terminal CPX


Key features – Type codes

		NEDU	–	M12	D	5	–	M12	T	4
Function										
NEDU	Push-in T-connector									
Connection, left-hand										
M8	M8x1									
M12	M12x1, A-coded									
Socket design										
D	Multiple socket									
Number of pins/wires										
3	3-pin									
5	5-pin									
Connection, right-hand										
M8	M8x1									
M12	M12x1, A-coded									
Plug design										
T	T-piece									
Number of pins/wires										
4	4-pin									


Terminal CPX

Technical data



-  - Module width
50 mm



-  - Note
The data given here applies to the CPX system. If components that conform to lower values are used in the system, the specification for the entire system is reduced to the values for the components used.

Example
Protection class IP65/IP67 applies only to the fully assembled system with fitted plugs or covers (which must also conform to IP65/67). If components with a lower protection class are used, the protection level of the entire system is reduced to the protection class of the component with the lowest protection level, e.g. Cage-Clamp connection block with IP20 protection or MPA pneumatics with IP65 protection.

General technical data			
Module No.		197 330	
Max. no. of modules ¹⁾	Control block	1	
	Bus node	1	
	I/O module/CP interface	9	
	Pneumatic interface	1	
Max. address capacity	Inputs	[Byte]	64
	Outputs	[Byte]	64
Internal cycle time		[ms]	< 1
Configuration support		Fieldbus-specific	
LED displays	Bus node/control block		Up to 4 LEDs, bus-specific 4 LEDs, CPX-specific • PS = Power system • PL = Power load • SF = System error • M = Modify parameter/forcing active
	I/O modules		Min. one centralised diagnostic LED Channel-oriented status and diagnostic LED, depending on module
	Pneumatic interface		One centralised diagnostic LED Valve status LED on valve
Diagnosis		<ul style="list-style-type: none"> • Channel and module-oriented diagnosis for inputs/outputs and valves • Detection of module undervoltage for the different voltage potential values • Storage of the last 40 errors with timestamp (acyclic access) 	

1) A maximum of 11 modules in total can be combined (e.g. 1 control block + 9 I/O modules + 1 pneumatic interface, or 1 control block + 1 bus node + 8 I/O modules + 1 pneumatic interface)

Terminal CPX

Technical data

FESTO







General technical data		
Module No.	197 330	
Parameterisation	Module-specific and entire system, for example: <ul style="list-style-type: none"> • Diagnostic behaviour • Condition monitoring • Profile of inputs • Failsafe response of outputs and valves 	
Commissioning support	Forcing of inputs and outputs	
Protection class to EN 60529	IP65/IP67	
Power supply	[V DC]	24
Power supply	Interlinking block with system supply	
	Electronics plus sensors [A]	Max. 16 A (M18 supply), max. 12 A (7/8" supply)
	Actuators plus valves [A]	Max. 16 A (M18 supply), max. 12 A (7/8" supply)
	Additional power supply	
	Actuators [A]	Max. 16 A per M18 supply, max. 12 A per 7/8" supply
	Additional power supply for valves [A]	Max. 16 A per M18 supply
Current consumption	Depending on system configuration	
Power failure buffering (bus electronics only)	[ms]	10
Voltage supply connection	M18, 4-pin	
	7/8" 5-pin	
	7/8" 4-pin	
Fuse concept	Per module with electronic fuses	
Temperature range, electronics	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Temperature range, electronics plus pneumatic components	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +40
Relative air humidity (non-condensing)	[%]	5 ... 90
Tests	Vibration test To DIN/IEC 68/EN 60068, Parts 2 – 6	<ul style="list-style-type: none"> • For wall mounting: Severity level 2 • For H-rail mounting: Severity level 1
	Shock test To DIN/IEC 68/EN 60068, Parts 2 – 27	<ul style="list-style-type: none"> • For wall mounting: Severity level 2 • For H-rail mounting: Severity level 1
PWIS classification	Free of paint wetting impairment substances	
Interference immunity	EN 61000-6-2 (industry)	
Interference emission	EN 61000-6-4 (industry)	
Isolation test for electrically isolated circuits to IEC 1131 Part 2	[V]	500 DC
Electrical isolation of electrical voltages	[V]	80 DC
Protection against direct and indirect contact	PELV (Protected Extra-Low Voltage)	
Materials	Polymer (end plates: die-cast aluminium)	
Grid dimension	[mm]	50

Weights [g]					
Control block	FEC	140.0	Interlinking block	Without power supply	80.0
Bus node	FB6	125.0		With system supply	100.0
	FB11	120.0	Tie rod	1-fold	19.0 ±2.5
	FB13	115.0		2-fold	32.5 ±2.5
	FB14	115.0		3-fold	46.0 ±2.5
	FB23	115.0		4-fold	59.5 ±2.5
	FB32	125.0		5-fold	73.0 ±2.5
I/O module		38.0		6-fold	86.5 ±2.5
CP interface		140		7-fold	100.0 ±2.5
Pneumatic interface	MPA	238.4		8-fold	113.5 ±2.5
	VTSA/VTSA-F	485.0		9-fold	127.0 ±2.5
	MIDI/MAXI	390.0		10-fold	140.5 ±2.5
	CPA	150.0	End plate	Left-hand	77.0
Manifold block	70.0	Right-hand		70.0	

Terminal CPX

Accessories





FESTO

Ordering data – Accessories					
Designation		Type	Part No.		
Mounting set					
	Attachment for wall mounting (for long valve terminals, 10 pieces)	CPX-BG-RW-10x	529 040		
	Mounting for H-rail	CPX without pneumatic components	CPA-BG-NRH	173 498	
		CPX-VTSA	CPX-CPA-BG-NRH	526 032	
		CPX-MPA			
		CPX-CPA			
		CPX-MIDI	CPX-03-4,0	526 033	
CPX-MAXI	CPX-03-7,0	526 034			
Tie rod					
	Tie rod CPX	Extension 1-fold	CPX-ZA-1-E	525 418	
		1-fold	CPX-ZA-1	195 718	
		2-fold	CPX-ZA-2	195 720	
		3-fold	CPX-ZA-3	195 722	
		4-fold	CPX-ZA-4	195 724	
		5-fold	CPX-ZA-5	195 726	
		6-fold	CPX-ZA-6	195 728	
		7-fold	CPX-ZA-7	195 730	
		8-fold	CPX-ZA-8	195 732	
		9-fold	CPX-ZA-9	195 734	
		10-fold	CPX-ZA-10	195 736	
Interlinking blocks					
	Basic unit, without voltage input	–	CPX-GE-EV	195 742	
		With system supply	M18	CPX-GE-EV-S	195 746
			7/8" – 5-pin	CPX-GE-EV-S-7/8-5POL	541 244
	7/8" – 4-pin		CPX-GE-EV-S-7/8-4POL	541 248	
	With additional power supply for outputs	M18	CPX-GE-EV-Z	195 744	
		7/8" – 5-pin	CPX-GE-EV-Z-7/8-5POL	541 248	
		7/8" – 4-pin	CPX-GE-EV-Z-7/8-4POL	541 250	
	With additional power supply for valves	M18	CPX-GE-EV-V	533 577	
		7/8" – 4-pin	CPX-GE-EV-V-7/8-4POL	541 252	
End plates					
	End plate	Right-hand	CPX-EPR-EV	195 714	
		Left-hand	CPX-EPL-EV	195 716	
	Earthing element for right-hand/left-hand end plates (5 pieces)	CPX-EPFE-EV	538 892		

Terminal CPX

Accessories

FESTO

Ordering data – Accessories				
Designation			Type	Part No.
Plug sockets				
	Plug socket for mains connection M18, straight	for 1.5 mm ²	NTSD-GD-9	18 493
		for 2.5 mm ²	NTSD-GD-13,5	18 526
	Plug socket for mains connection M18, angled	for 1.5 mm ²	NTSD-WD-9	18 527
		for 2.5 mm ²	NTSD-WD-11	533 119
	Plug socket for mains connection 7/8', straight, 5-pin	0.25 ... 2.0 mm ²	NECU-G78G5-C2	543 107
	Plug socket for mains connection 7/8', straight, 4-pin	0.25 ... 2.0 mm ²	NECU-G78G4-C2	543 108
Inscription labels				
	Inscription labels, 6x10, 64 pieces, in frames		IBS-6x10	18 576
User documentation				
	CPX System Manual	German	P.BE-CPX-SYS-DE	526 445
		English	P.BE-CPX-SYS-EN	526 446
		Spanish	P.BE-CPX-SYS-ES	526 447
		French	P.BE-CPX-SYS-FR	526 448
		Italian	P.BE-CPX-SYS-IT	526 449
		Swedish	P.BE-CPX-SYS-SV	526 450
	Operator unit CPX-MMI-1	German	P.BE-CPX-MMI-1-DE	534 824
		English	P.BE-CPX-MMI-1-EN	534 825
		French	P.BE-CPX-MMI-1-FR	534 827
		Italian	P.BE-CPX-MMI-1-IT	534 828
		Swedish	P.BE-CPX-MMI-1-SV	534 829
		Spanish	P.BE-CPX-MMI-1-ES	534 826

Terminal CPX

Accessories



User documentation – General information

Comprehensive user documentation is vital for the fast and consistent implementation of fieldbus components.

The documentation provided by Festo contains step-by-step instructions for using CPX terminals:

1. Installation
2. Commissioning and parameterisation
3. Diagnosis

Application-oriented explanations are provided for integration of the CPX terminal in the programming and configuration software of the various controller manufacturers.

Use the order code to select the language you want.

The manual for the configuration you have ordered is supplied automatically.

It can be downloaded quickly and conveniently from the download area of the Festo Internet home page.

→ www.festo.com



User documentation overview

Type	Title	Description
Electronics		
P.BE-CPX-SYS-...	System description, installing and commissioning	Overview of the design, components and mode of operation of the CPX terminal; installation and commissioning instructions as well as basic principles of parameterisation.
P.BE-CPX-EA-...	CPX-EA modules, digital	Connection technology and assembly, installation and commissioning instructions for digital input and output modules of type CPX-... as well as CPA, MIDI/MAXI and MPA pneumatic interface.
P.BE-CPX-AX-...	CPX-EA modules, analogue	Connection technology and assembly, installation and commissioning instructions for digital input and output modules of type CPX-...
P.BE-CPX-CP...	CPX CP interface	Instructions on assembly, installation, commissioning and diagnosis of the CP interface.
P.BE-CPX-FB...	CPX fieldbus node	Instructions on assembly, installation, commissioning and diagnosis of the relevant bus nodes.
P.BE-CPX-FEC...	CPX control block	Instructions on assembly, installation, commissioning and diagnosis of the relevant control block.
P.BE-CPX-MMI-1-...	Universal handheld type CPX-MMI-1	Instructions on assembly, installation, commissioning and diagnosis of the CPX operator unit.

Terminal CPX

Accessories

User documentation overview		
Type	Title	Description
Pneumatics		
P.BE-VTSA-44-...	Valve terminals with VTSA pneumatics	Instructions on assembly, installation, commissioning and diagnosis of the VTSA pneumatic components.
P.BE-CPA-...	Valve terminals with CPA pneumatics	Instructions on assembly, installation, commissioning and diagnosis of the CPA pneumatic components.
P.BE-Midi/Maxi-03-...	Valve terminals with MIDI/MAXI pneumatics	Instructions on assembly, installation, commissioning and diagnosis of the MIDI/MAXI pneumatic components.
P.BE-MPA-...	Valve terminals with MPA pneumatics	Instructions on assembly, installation, commissioning and diagnosis of the MPA pneumatic components.

User documentation – GSD, EDS, ...

Device description files and icons are used to explain integration of the CPX terminal in the configuration software of the various controller manufacturers.

These can be downloaded quickly and conveniently from the download area of the Festo Internet home page.

→ www.festo.com/fieldbus



Terminal CPX

Accessories



CPX macro library for ePLAN

Type	GSWC-TE-EP-LA
Part No.	537 041

Project planning – pure service:
ePLAN macros for fast and reliable planning of electrical projects in combination with valve terminals. Available in German and English.



Key technical data

- CD with CPX macro library ePLAN 5 and P8 for CPX terminal (supports the planning of bus nodes, interlinking blocks, I/O modules, connection blocks, pneumatic interface and valves)
- Creation and administration of projects


Systematically more reliable:
The CPX macro library contains symbols, graphics and master data. Result: A fast, reliable and standardised system for designing and documenting your circuits.

- Creation and editing of circuit diagrams, terminal and cable plans, cross-reference lists, assembly drawings, bills of material and maintenance plans
- Connection to programmable logic controllers
- Generation of the contact and potential cross-references

Simply practical:
High level of planning reliability, standardisation of documentation, no need to create symbols, graphics and master data since everything is stored in the CPX macro library.

- Automatic protective contact mirroring
- Generation of documents in paper format and HTML format for viewing in browsers, etc. Library in DXF format for use with AutoCad or other CAD programs

Design example:
From an idea to a functional solution – quickly and reliably
Project planning, design, production, assembly, commissioning, service

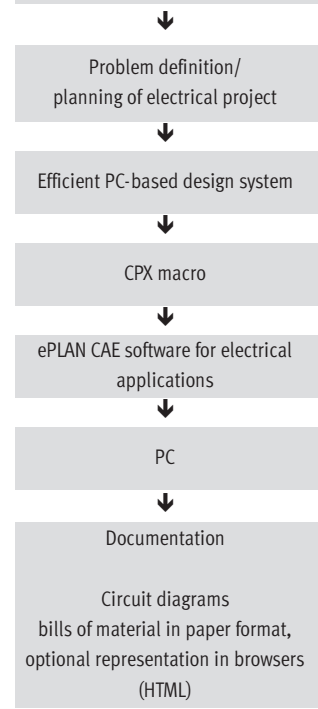

fluidPLAN from ePLAN and FluidDRAW from Festo

ePLAN and Festo also work together in the creation of pneumatic circuit diagrams:
The Engineering Tool ePLAN fluid has a direct interface to the Festo electronic

catalogue (DKI). All of the relevant data for the bills of material as well as the pneumatic circuit symbols for Festo products are transferred using this import function.

The FluidDRAW software from Festo makes the creation of circuit diagrams

for the pneumatic part on the PC both simple and intuitive.

Terminal CPX

Technical data – Operator unit

-  - Width
81 mm

The operator unit is a small, handy commissioning and service device for the CPX terminal. It provides data request, configuration and diagnosis functions for CPX terminals. Its extremely flexible application range means that data can be read in or out at any location. IP65 compatibility makes it suitable for use in harsh industrial environments.



Application

Functions

- Advance commissioning through the monitoring/forcing of inputs and outputs without fieldbus master/PLC
- Test function for parameter settings, e.g. fail-safe of the outputs or switch-on delay of the inputs
- Normal text diagnosis of module and channel-oriented errors
- Condition monitoring:
Preselection/loading of counters, activation of the channels to be monitored
- Display of the last 40 error events with timestamp
- Identification of sporadic causes of errors through display of the diagnostic history
- Password protection

Connection

The operator unit is connected to the CPX bus nodes or control block, as appropriate, using a pre-assembled M12 cable.

The voltage for the operator unit is supplied through the CPX bus node.
➔ Plug & Work.

Communication

Once connected to the CPX terminal, the operator unit loads the available configuration for the I/O modules, valves, etc.

This ensures the availability of up-to-date texts, messages, menus and displays.
Status information, diagnostic messages and parameter bits are exchanged during operation.

Mounting

A mounting bracket for the operator unit offers the option of wall or H-rail mounting.


The mounting bracket also has an option for temporary mounting using a hanging device.

Terminal CPX

Technical data – Operator unit




Connection

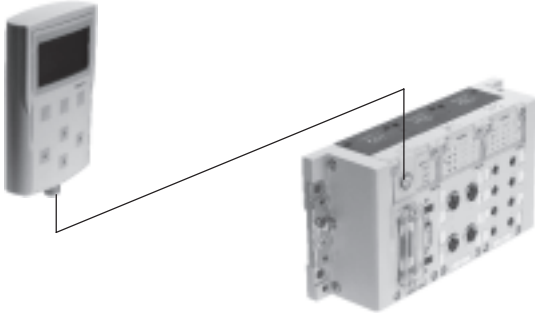

The operator unit is connected to the CPX terminal using pre-assembled cables.

Function examples

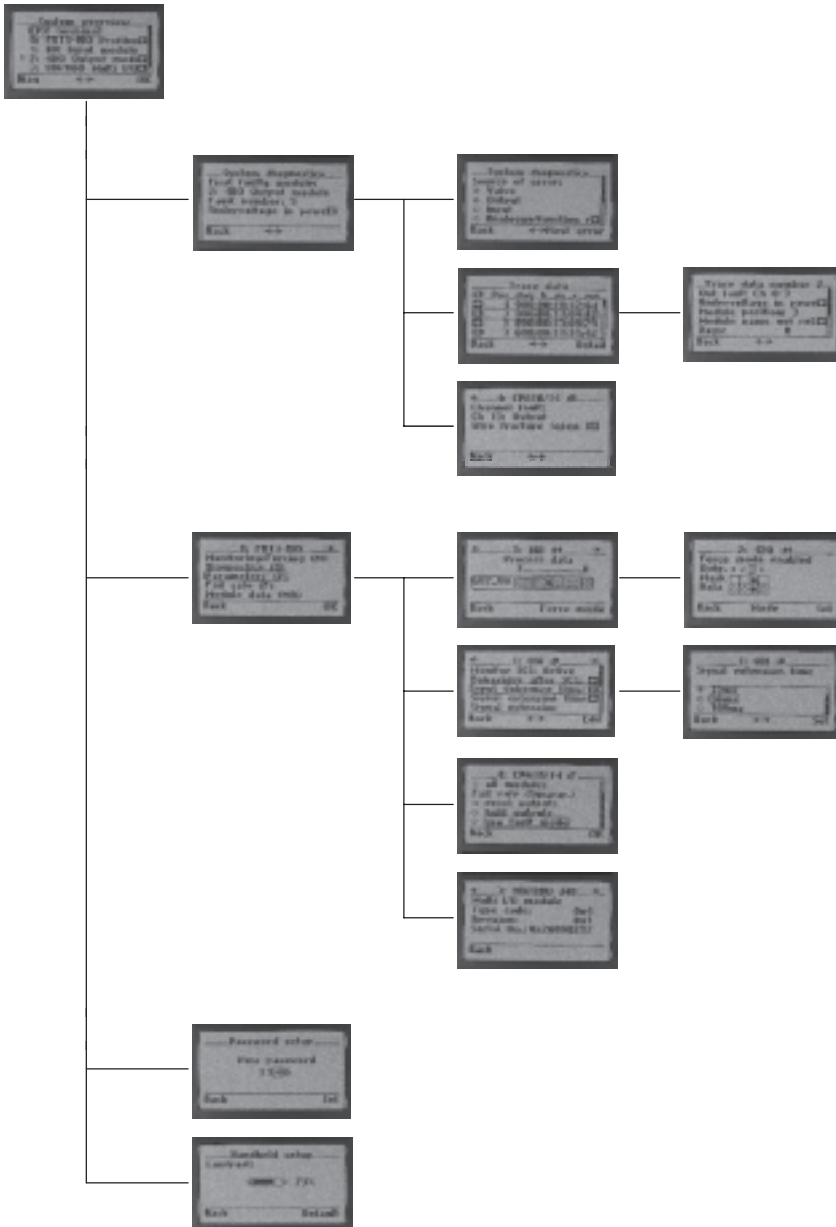

System overview

- Overview of configured modules and current diagnostic messages

Diagnosis

- Fast access to the diagnostic history and the modules with diagnostic message
- Display of the last 40 error messages with timestamp
- Display of the current diagnostic message for a module

Commissioning

- Selection of module-specific data and parameters
- Display and modification of the current status of the inputs and outputs of a module
- Display and modification of the current settings for module-specific parameters

Setup


- Setting of access permission (password)
- Contrast setting of the display

Terminal CPX

Technical data – Operator unit

General technical data		
Type	CPX-MMI-1	
Part No.	529 043	
Display component	LCD graphical display with background illumination (128 x 64 pixels)	
Control elements	7 keys: 4 arrow keys and 3 function keys	
Interface	M12-5-pin	
Electromagnetic compatibility	Interference emission tested to DIN EN 61000-6-4, industry	
	Interference immunity tested to DIN EN 61000-6-2, industry	
Operating voltage	[V]	24 DC, supplied from the connected device
Current consumption	[mA]	Max. 55
Protection class to EN 60529	IP65, IP67	
Relative air humidity	[%]	90, non-condensing
Vibration resistance	Tested to DIN/IEC 68/EN 60068, Parts 2-6 <ul style="list-style-type: none"> • For wall mounting: Severity level 2 • For H-rail mounting: Severity level 1 	
Shock resistance	Tested to DIN/IEC 68/EN 60068, Parts 2-27 <ul style="list-style-type: none"> • For wall mounting: Severity level 2 • For H-rail mounting: Severity level 1 	
Temperature range	Operation	[°C] 0 ... +50
	Storage/transport	[°C] -20 ... +70
Material	Reinforced polyamide	
Dimensions (W x H x D)	[mm]	81 x 137 x 28
Weight	[g]	150





Connection and display components

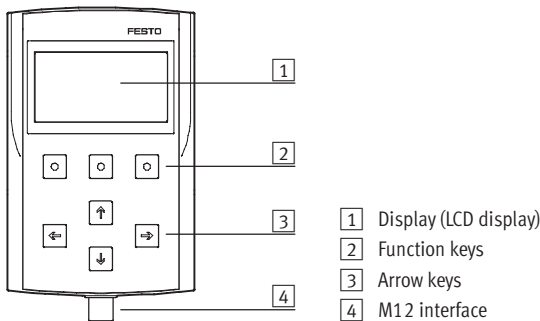

Terminal CPX

Accessories – Operator unit

FESTO

Ordering data				
Designation		Type	Part No.	
Cable				
	Extension cable M12-M12	1.5 m	KV-M12-M12-1,5	529 044
		3.5 m	KV-M12-M12-3,5	530 901
Mounting				
	Bracket		CPX-MMI-1-H	534 705
	Mounting for H-rail		CPX-MMI-1-NRH	536 689
User documentation				
	User manual for operator unit CPX-MMI-1	German	P.BE-CPX-MMI-1-DE	534 824
		English	P.BE-CPX-MMI-1-EN	534 825
		French	P.BE-CPX-MMI-1-FR	534 827
		Italian	P.BE-CPX-MMI-1-IT	534 828
		Swedish	P.BE-CPX-MMI-1-SV	534 829
		Spanish	P.BE-CPX-MMI-1-ES	534 826

Terminal CPX

Technical data – Web Monitor

Function

Web Monitor is a software tool from Festo for all CPX modules with integrated web server and Ethernet connection for displaying the CPX service information in real time on a PC connected via a network.

- Supplied on CD-ROM
- Installation on PC
- Adaptation to application
- Loading via Ethernet to the web server of the CPX module



Application

Only from Festo

CPX is a modular electrical terminal for the connection of pneumatic and electrical control chains to automation systems – suitable for all currently used fieldbus systems.

Valve terminals with the comprehensive diagnostic package consisting of pneumatics, electrics and networking systems creates unique synergies and

simplify the communication between the electrical and pneumatic control levels. The Web Monitor makes this diagnostic and additional information

visible at every station and without extra programming. Convenient error analysis by Web Monitor provides permanent diagnostic reliability.


General technical data		
Type	CPX-WEB-MONITOR	
Part No.	545 413	
System requirements	PC	IBM-compatible, Pentium class or comparable
	Drive	CD-ROM
	Interfaces	Network connection and access
	Operating system	Microsoft Windows 98, ME, 2000 or XP
Browser requirements	Microsoft Internet Explorer	Version 5.5 and later
	Mozilla Firefox	Version 1.0 and later (full version of Web Monitor only)
	Java plug-in	Java Runtime Environment (JRE) 1.3 or higher
Java script	Enabled	
Cookies	Enabled	
Scope of functions	<ul style="list-style-type: none"> • Changing HTML links • Changing symbol names for systems, modules and channels • Incorporating own web pages • Changing passwords • Incorporating Java applets • Commands for dynamic contents 	
Scope of delivery	CD-ROM with	<ul style="list-style-type: none"> • Installation program • Description in German and English • E-mail driver for FST projects (only relevant when using CPX-FEC modules): SMTP-Driver V0.5 • HTML pages for the web server of CPX terminals
Configurable e-mail alerts	8	
Non-volatile storage for e-mail alerts	Yes	
Sending of e-mails	Initiated by events (positive edge at input bit, output bit, diagnostic bit, flag bit)	
E-mail text	Max. 255 characters	

Terminal CPX

Technical data – Web Monitor


Display elements

System overview of CPX terminal

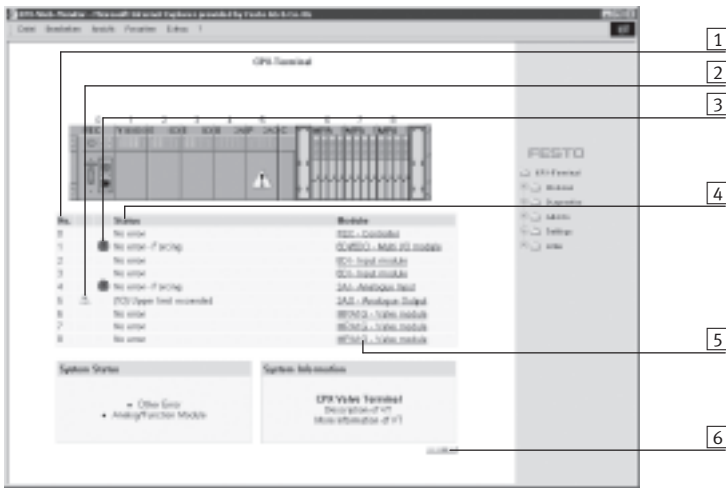

- 1 Module numbers from the graphic system overview
- 2 Signalling of fault messages via yellow warning triangle analogous to graphic system overview opposite
- 3 Signalling of activated Force mode via exclamation mark on blue background
- 4 Status information in clear text
- 5 Module designations
- 6 Monitoring display for data communication

Module overview of a selected module

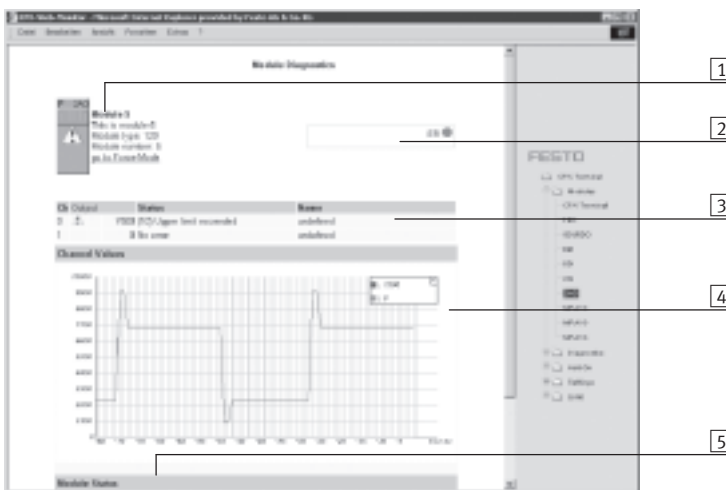

- 1 General information about the module
- 2 Copy of the module display elements
- 3 Table with status information on all channels of the module
- 4 Graphic representation of the channel values plotted on a time axis
- 5 Graphic representation of the module status plotted on a time axis


Fault protocol of the CPX Web Monitor



- 1 Running number of the entries
- 2 Link for updating the protocol ("Update trace")
- 3 Start/end time of the message
- 4 Text message
- 5 Module affected (module code/M. number/channel)

Terminal CPX

Technical data – Control block CPX-FEC



IT services:



Powerful control block for preprocessing actuation of the CPX modules. The voltage supply to and communication with other modules takes place via the interlinking block.

In addition to the connection for the Ethernet interface in RJ45 and a programming interface in Sub-D, LEDs are also provided for the bus status, operating status of the PLC and CPX peripherals information, as are switch elements and a diagnostic interface for CPX-MMI.



Application

Bus connection
The CPX-FEC is a separate controller, which can be connected to a higher-order PLC via the fieldbus nodes of the CPX terminal or via Ethernet. At the

same time, it is possible to operate the CPX-FEC as a compact standalone controller directly on the machine.

- Operating modes**
- Standalone/EasyIP
 - Fieldbus remote controller
 - Modbus/TCP remote controller
 - Remote I/O Modbus/TCP

- Communication protocols**
- Profibus, DeviceNet, Interbus, CANopen and CC-Link via CPX fieldbus nodes
 - Modbus/TCP
 - EasyIP
 - IP
 - TCP
 - UDP
 - SMTP
 - HTTP
 - DHCP
 - BootP
 - TFTP

Setting options

For monitoring, programming and commissioning, CPX-FEC has the following interfaces:

- For the CPX-MMI
- Serial interface RS232 for a Front End Display (FED), for example
- Ethernet interface for IT applications

The operating mode and fieldbus protocol are set using the DIL switch on the CPX-FEC.

The integrated web server offers a convenient means of querying data saved in the CPX-FEC.

Terminal CPX

Technical data – Control block CPX-FEC



General technical data			
Type	CPX-FEC-1-IE		
Part No.	529 041		
Ethernet interface	RJ45 (8-pin, socket)		
Data interface	RS232 (Sub-D, 9-pin, socket)		
MMI interface	M12, 5-pin, socket		
Baud rates	Ethernet interface	[Mbps]	10/100 (acc. to IEEE802.3, 10BaseT)
	Data interface	[kbps]	9.6 ... 115.2
	MMI interface	[kbps]	56.6
Protocol	<ul style="list-style-type: none"> • TCP/IP • EasyIP • Modbus TCP • HTTP 		
Processing time for 1,024 binary instructions	[ms]	Approx. 1	
Flags	M0.0 ... M9999, addressable as bits or words		
	No. of time flags	T0 ... T255	
	Time range	[s]	0.01 to 655.35
	No. of counting flags	Z0 ... Z255	
Counting range	0 to 65535		
Register	R0 ... R255, addressable as words		
Special FE	FE 0 ... 255, init flag		
IP address setting	BOOTP/DHCP via FST or via MMI		
Max. address capacity	Inputs	[Byte]	64
	Outputs	[Byte]	64
Program memory	User program	[kB]	250
	WEB applications	[kB]	550
Programming language	<ul style="list-style-type: none"> • STL • LDR 		
Arithmetic functions	+, -, *, :, further functions via functional modules		
Functional modules	<ul style="list-style-type: none"> • CPX diagnostic status • Copy CPX diagnostic trace • Read CPX module diagnosis • Write CPX module parameter • ... 		
No. of programs/tasks	P0 ... P63		
LED displays (FEC-specific)	RUN = Program is being executed/Modbus connection active STOP = Program is stopped/no Modbus connection ERR = Error in the program execution TP = Status of the Ethernet connection		
Device-specific diagnosis	Module and channel-specific diagnosis via peripherals error		
Parameterisation	<ul style="list-style-type: none"> • Start-up parameterisation via FST • Parameterisation of the operating time via the functional module 		
Control elements	<ul style="list-style-type: none"> • DIL switch for setting the operating mode • Rotary switch for program selection/program start 		
Additional functions	<ul style="list-style-type: none"> • Storage of the last 40 errors with timestamp (access via PCP) • 8 bit system status in image table for inputs • 2 byte inputs and 2 byte outputs, system diagnostics in image table 		

Terminal CPX

Technical data – Control block CPX-FEC

General technical data			
Type	CPX-FEC-1-IE		
Part No.	529 041		
Operating voltage	Nominal value	[V DC]	24 (reverse polarity protected)
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Residual ripple		[Vss]	4
Current consumption		[mA]	Max. 200
Interference emission	To EN 61000-6-4 (industry)		
Interference immunity	To EN 61000-6-2 (industry)		
Protection class to EN 60529	IP65/IP67		
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Materials	Polymer		
Grid dimension		[mm]	50
Dimensions (incl. interlinking block) W x L x H		[mm]	50 x 107 x 55
Weight	Without interlinking block	[g]	140
	Incl. interlinking block without power supply	[g]	220
	Incl. interlinking block with system supply	[g]	240

 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Overview of the operating modes	Standalone	Remote controller		Remote I/O
		Ethernet	Fieldbus	
CPX-FEC function	Controller	Controller and communication		Ethernet slave
CPX module controlled by	CPX-FEC	CPX-FEC		Higher-order controller
Preprocessing of data in the FEC	Yes	Yes		No
Communication with higher-order controller	No	Via Ethernet • EasyIP • Modbus/TCP	Via fieldbus	Via Ethernet • EasyIP • Modbus/TCP
Web server	Possible	Possible		Possible
Configuration	FST 4.1 or higher	FST 4.1 or higher		Higher-order controller
Parameterisation	Via FST/CPX-MMI	Via FST/CPX-MMI		Via CPX-MMI/Modbus
Order code	T03	T03		T05
Addressing	Changeable	Changeable		Prescribed
Memory	• 250 kB for user program • 550 kB for WEB applications	• 250 kB for user program • 550 kB for WEB applications		• 800 kB for WEB applications
CPX-MMI	Can be connected to CPX-FEC	Can be connected to CPX-FEC		Can be connected to CPX-FEC

Terminal CPX

Technical data – Control block CPX-FEC

Connection and display components



Pin allocation for the programming interface (RS232)

Connection allocation	Pin	Signal	Description
Sub-D plug			
	1	n.c.	Not connected
	2	RxD	Received data
	3	TxD-P	Transmitted data
	4	n.c.	Not connected
	5	GND	Data reference potential
	6	n.c.	Not connected
	7	n.c.	Not connected
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	Screening	Connection to (FE) functional earth











Pin allocation for the Ethernet interface

Connection allocation	Pin	Signal	Description
Plug RJ45			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
Housing	Screening	Screening	

Terminal CPX

Accessories – Control block CPX-FEC



Ordering data				
Designation		Type	Part No.	
Bus connection				
	Sub-D plug	FBS-SUB-9-GS-1x9POL-B	534 497	
	Inspection cover, transparent	AK-SUB-9/15-B	533 334	
	Inscription label holder for connection block	CPX-ST-1	536 593	
	RJ45/plug	FBS-RJ45-8-GS	534 494	
	Cover for RJ45 connection	AK-Rj45	534 496	
	Programming cable	KDI-PPA-3-BU9	151 915	
	Connecting cable FED	FEC-KBG7	539 642	
	Connecting cable FED	FEC-KBG8	539 643	
User documentation				
	User documentation for control block CPX-FEC	German	P.BE-CPX-FEC-DE	538 474
		English	P.BE-CPX-FEC-EN	538 475
		Spanish	P.BE-CPX-FEC-ES	538 476
		French	P.BE-CPX-FEC-FR	538 477
		Italian	P.BE-CPX-FEC-IT	538 478
		Swedish	P.BE-CPX-FEC-SV	538 479
Software				
	CPX remote diagnosis and process visualisation	CPX-WEB-MONITOR	545 413	
	Programming software	German	FST4.1DE	537 927
		English	FST4.1GB	537 928

Terminal CPX

Technical data – Bus node CPX-FB6



Bus node for handling communication between the electrical CPX terminal and a higher-order master via INTERBUS.

The bus node receives system supply from the interlinking block and processes communication via the I/O modules.

The status of the CPX terminal is displayed as a common message via 4 CPX-specific LEDs.

The fieldbus communication status is displayed via 4 INTERBUS-specific LEDs.



Application

Bus connection

The bus connection is established via a 9-pin Sub-D socket and a 9-pin Sub-D plug with a typical INTERBUS pin allocation.

The bus connector plugs (with protection class IP65/IP67 from Festo or IP20 from other manufacturers) facilitate the connection of the incoming and outgoing bus cable.

The outgoing bus plug contains the typical INTERBUS RBST bridge for identification of the outgoing bus connection.

The Sub-D interfaces are designed for the control of network components with a fibre optic cable connection.

INTERBUS implementation


The CPX-FB6 supports the INTERBUS protocol to EN 50254.

In addition to cyclic I/O exchange, the optional PCP channel can be used for parameterisation and diagnostic functions.

The PCP channel provides access to advanced system information and assigns operation parameters while the controller is running via the user program.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

With its address capacity of 96 inputs and 96 outputs, the CPX-FB6 supports a large number of I/O module configurations, including pneumatic interface.

 **Note**
If the PCP channel is used, the maximum number of possible process data bits is reduced by 16.

Special features in combination with CPX-FEC

When a fieldbus node is combined with a CPX-FEC (in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are actuated via the CPX-FEC.

In this case, the fieldbus node only

provides the communication interface to the PLC.

Communication between CPX-FEC and CPX fieldbus node takes place via interlinking of the CPX modules.

The CPX-FEC occupies an address capacity of the CPX fieldbus node of:

- 8 byte outputs
- 8 byte inputs

As no other components (e.g. I/O modules) are actuated via the CPX fieldbus node, its address capacity is thus reduced effectively to an 8 byte I/O.

The full address capacity of the CPX-FEC is available for actuation of the peripherals:

- 64 byte inputs
- 64 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB6

General technical data			
Type	CPX-FB6		
Part No.	195 748		
Fieldbus interface	Sub-D, 9-pin, socket and pin		
Baud rates	[Mbps]	0.5 and 2	
Bus type	Remote bus		
Ident. code	1, 2 or 3 (configuration-specific) 243 (PCP channel activated)		
Profile	I2 (I/O device)		
PCP channel	Yes, 16 bit (optional via DIL switch)		
Configuration support	Icons for CMD software		
Max. no. of process data bits	Inputs	[Bit]	96
	Outputs	[Bit]	96
LED displays (bus-specific)	UL = Operating voltage for INTERBUS interface RC = Remotebus check BA = Bus active RD = Remotebus disable TR = Transmit/receive		
Device-specific diagnosis	Via peripherals errors		
Parameterisation	<ul style="list-style-type: none"> Start-up parameterisation via user functions (CMD) Via PCP communication 		
Additional functions	<ul style="list-style-type: none"> Storage of the last 40 errors with timestamp (access via PCP) 8 bit system status in image table for inputs 2 byte inputs and 2 byte outputs, system diagnostics in image table 		
Operating voltage	Nominal value	[V]	24 DC (reverse polarity protected)
	Permissible range	[V]	18 ... 30 DC
	Power failure buffering	[ms]	10
Current consumption	[mA]	Max. 200	
Protection class to EN 60529	IP65/IP67		
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Material	Polymer		
Grid dimension	[mm]	50	
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 50	
Weight	without interlinking block	[g]	125
	incl. interlinking block without power supply	[g]	205
	incl. interlinking block with system supply	[g]	225

 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB6

Connection and display components



Pin allocation for the INTERBUS interface

Pin allocation for Sub-D	Pin	Signal	Designation	Pin	Pin allocation for M12
Incoming					
	1	DO1	Data out	1	
	2	DI1	Data in	3	
	3	GND	Reference conductor/earth	5	
	4	n.c.	Not connected	2	
	5	n.c.	Not connected	4	
	6	/DO1	Data out inverse		
	7	/DI1	Data in inverse		
	8	n.c.	Not connected		
	9	n.c.	Not connected		
	Housing	Screen	Connection to FE (functional earth) via R/C combination	Housing	
Outgoing					
	1	DO2	Data out	1	
	2	DI2	Data in	3	
	3	GND	Reference conductor/earth	5	
	4	n.c.	Not connected	2	
	5	+5 V	Station detection ¹⁾	4	
	6	/DO2	Data out inverse		
	7	/DI2	Data in inverse		
	8	n.c.	Not connected		
	9	RBST	Station detection ¹⁾		
	Housing	Screen	Connection to FE (functional earth)	Housing	







The incoming interface is electrically isolated from the CPX peripherals. The plug housing is connected to the functional earth FE of the CPX terminal via an R/C combination.

1) The CPX terminal contains the protocol chip SUP1 3 OPC. This ensures automatic detection of additional connected INTERBUS stations. There is therefore no need for a bridge between pin 5 and pin 9.

Terminal CPX

Accessories – Bus node CPX-FB6



Ordering data				
Designation			Type	Part No.
Bus connection				
	Sub-D plug	Incoming	FBS-SUB-9-BU-IB-B	532 218
		Outgoing	FBS-SUB-9-GS-IB-B	532 217
	Connection block M12 adapter plug (B-coded)		CPX-AB-2-M12-RK-IB	534 505
	Inscription label holder for connection block M12		CPX-ST-1	536 593
	Inspection cover, transparent		AK-SUB-9/15-B	533 334
	Threaded sleeve, 4 pieces		UNC4-40/M3x6	533 000
User documentation				
	User documentation for bus node CPX-FB6	German	P.BE-CPX-FB6-DE	526 433
		English	P.BE-CPX-FB6-EN	526 434
		Spanish	P.BE-CPX-FB6-ES	526 435
		French	P.BE-CPX-FB6-FR	526 436
		Italian	P.BE-CPX-FB6-IT	526 437
		Swedish	P.BE-CPX-FB6-SV	526 438

Terminal CPX

Technical data – Bus node CPX-FB11



Bus node for handling communication between the electrical CPX terminal and a DeviceNet network.

The bus node receives system supply from the interlinking block and processes communication via the I/O modules.

The status of the CPX terminal is displayed as a common message via 4 CPX-specific LEDs.

The fieldbus communication status is displayed via the 3 DeviceNet-specific LEDs.



Application

Bus connection

The bus connection can be selected when ordering – either Micro Style as 2xM12 round connectors or OpenStyle as a terminal strip with IP20 protection.

Both connection types have the function of an integrated T-distributor with incoming and outgoing bus line.

DeviceNet implementation

The CPX-FB11 operates with the “Predefined Master/Slave connection set” as a “Group 2 only Server”. The polled I/O, change of state or cyclic method is used for the transmission of cyclic I/O data. The type of transmission can be selected in the network configuration.

The device diagnosis for all bus nodes CPX-FB11 is effectively gathered with strobed I/O and displayed in the input table of the controller. In addition to cyclic data transmission, acyclic communication is supported through explicit messaging, which allows detailed device diagnosis and parameterisation.

A comprehensive EDS file supports the display of acyclic data. It is also possible to display system information and assign parameters while the controller is running via the user program or the configuration software.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type. With its address capacity of 64 byte inputs and 64 byte outputs, the CPX-FB11 supports any configuration of I/O modules, including pneumatic interface.

Special features in combination with CPX-FEC

When a fieldbus node is combined with a CPX-FEC (in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are actuated via the CPX-FEC.

provides the communication interface to the PLC. Communication between CPX-FEC and CPX fieldbus node takes place via interlinking of the CPX modules. The CPX-FEC occupies an address capacity of the CPX fieldbus node of:

- 8 byte outputs
 - 8 byte inputs
- As no other components (e.g. I/O modules) are actuated via the CPX fieldbus node, its address capacity is thus reduced effectively to an 8 byte I/O.

The full address capacity of the CPX-FEC is available for actuation of the peripherals:

- 64 byte inputs
- 64 byte outputs

Terminal CPX


Technical data – Bus node CPX-FB11

General technical data			
Type	CPX-FB11		
Part No.	526 172		
Fieldbus interface	Either <ul style="list-style-type: none"> • MicroStyle bus connection: 2xM12 protection class IP65/IP67 • OpenStyle bus connection: 5-pin terminal strip IP20 		
Baud rates	[kbps]	125, 250, 500	
Addressing range	0 ... 63 Set using DIL switch		
Product	Type	Communication adapter (12 dec.)	
	Code	4554 dec.	
Communication types	Polled I/O, change of state/cyclic, strobed I/O and explicit messaging		
Configuration support	EDS file and bitmaps		
Max. address capacity	Inputs	[Byte]	64
	Outputs	[Byte]	64
LED displays (bus-specific)	MS = Module status NS = Network status IO = I/O status		
Device-specific diagnosis	Module and channel-oriented diagnosis through manufacturer-specific diagnosis object		
Parameterisation	<ul style="list-style-type: none"> • Module and system parameterisation via configuration interface in normal text (EDS) • Online in run or program mode 		
Additional functions	<ul style="list-style-type: none"> • Storage of the last 40 errors with timestamp (access via EDS) • 8 bit system status in image table for inputs • 2 byte inputs and 2 byte outputs, system diagnostics in image table 		
Operating voltage	Nominal value	[V]	24 DC
	Permissible range	[V]	18 ... 30 DC
	Power failure buffering	[ms]	10
Current consumption	[mA]	Max. 200	
Protection class to EN 60529	IP65/IP67		
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Material	Polymer		
Grid dimension	[mm]	50	
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 50	
Weight	without interlinking block	[g]	120
	incl. interlinking block	[g]	200
	without power supply	[g]	220
	incl. interlinking block with system supply	[g]	220

Terminal CPX

Technical data – Bus node CPX-FB11

Connection and display components

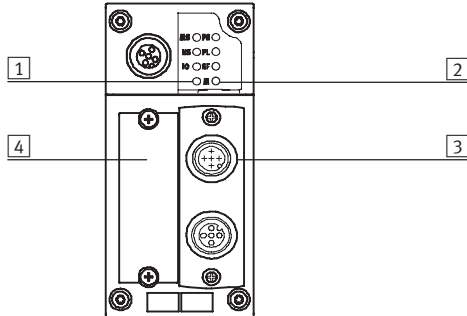

- 1 Bus-specific LEDs
- 2 CPX-specific status LEDs
- 3 Selectable fieldbus connection
Micro Style
Open Style
- 4 DIL switch cover

Pin allocation for the DeviceNet interface









Terminal allocation	Pin	Signal-specific core colour ¹⁾	Signal	Designation
Sub-D plug				
	1	–	n.c.	Not connected
	2	blue	CAN_L	Received/transmitted data low
	3	black	0 V bus	0 V CAN interface
	4	–	n.c.	Not connected
	5	blank	Screen	Connection to housing
	6	–	n.c.	Not connected
	7	white	CAN_H	Received/transmitted data high
	8	–	n.c.	Not connected
	9	red	24 V DC bus	24 V DC supply CAN interface
Bus connection Micro Style (M12) incoming/outgoing				
Incoming 	1	blank	Screen	Connection to housing
	2	red	24 V DC bus	24 V DC supply CAN interface
	3	black	0 V bus	0 V CAN interface
	4	white	CAN_H	Received/transmitted data high
	5	blue	CAN_L	Received/transmitted data low
Outgoing 	1	blank	Screen	Connection to housing
	2	red	24 V DC bus	24 V DC supply CAN interface
	3	black	0 V bus	0 V CAN interface
	4	white	CAN_H	Received/transmitted data high
	5	blue	CAN_L	Received/transmitted data low
Bus connection Open Style				
	1	black	0 V bus	0 V CAN interface
	2	blue	CAN_L	Received/transmitted data low
	3	blank	Screen	Connection to housing
	4	white	CAN_H	Received/transmitted data high
	5	red	24 V DC bus	24 V DC supply CAN interface

1) Typical for DeviceNet cables.

Terminal CPX

Accessories – Bus node CPX-FB11



Ordering data				
Designation		Type	Part No.	
Bus connection				
	Sub-D plug	FBS-SUB-9-BU-2x5POL-B	532 219	
	Bus connection Micro Style, 2xM12	FBA-2-M12-5POL	525 632	
	Socket for Micro Style connection, M12	FBSD-GD-9-5POL	18 324	
	Plug for Micro Style connection, M12	FBS-M12-5GS-PG9	175 380	
	Bus connection Open Style for 5-pin terminal strip	FBA-1-SL-5POL	525 634	
	Bus connection, 5-pin terminal strip	FBSD-KL-2x5POL	525 635	
	Inscription label holder for connection block M12	CPX-ST-1	536 593	
	Inspection cover, transparent	AK-SUB-9/15-B	533 334	
User documentation				
	User documentation for bus node CPX-FB11	German	P.BE-CPX-FB11-DE	526 421
		English	P.BE-CPX-FB11-EN	526 422
		Spanish	P.BE-CPX-FB11-ES	526 423
		French	P.BE-CPX-FB11-FR	526 424
		Italian	P.BE-CPX-FB11-IT	526 425
		Swedish	P.BE-CPX-FB11-SV	526 426

Terminal CPX

Technical data – Bus node CPX-FB13



Bus node for handling communication between the electrical CPX terminal and a higher-order master via Profibus DP.

The bus node receives system supply from the interlinking block and processes communication via the I/O modules.

The status of the CPX terminal is displayed as a common message via 4 CPX-specific LEDs.

The fieldbus communication status is displayed via the Profibus-specific fault LED.



Application

Bus connection

The bus connection is established via a 9-pin Sub-D socket with a typical Profibus allocation (to EN 50170).

The bus connector plug (with protection class IP65/IP67 from Festo or IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

An active bus terminal can be connected using the DIL switch integrated in the plug.

The Sub-D interface is designed for the control of network components with a fibre optic cable connection.

Profibus DP implementation

The CPX-FB13 supports the Profibus DP protocol to EN 50170 Volume 2 for cyclic I/O exchange, parameterisation and diagnostic functions (DPV0).

In addition to DPV0, acyclic communication to the advanced specification DPV1 is supported. DPV1 provides acyclic access to advanced system information and assigns operation parameters while the controller is running via the user program.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

With its address capacity of 64 byte inputs and 64 byte outputs, the CPX-FB13 supports any configuration of I/O modules, including pneumatic interface.

Special features in combination with CPX-FEC

When a fieldbus node is combined with a CPX-FEC (in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are actuated via the CPX-FEC. In this case, the fieldbus node only

provides the communication interface to the PLC. Communication between CPX-FEC and CPX fieldbus node takes place via interlinking of the CPX modules. The CPX-FEC occupies an address capacity of the CPX fieldbus node of:

- 8 byte outputs
- 8 byte inputs

As no other components (e.g. I/O modules) are actuated via the CPX fieldbus node, its address capacity is thus reduced effectively to an 8 byte I/O.

The full address capacity of the CPX-FEC is available for actuation of the peripherals:

- 64 byte inputs
- 64 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB13

General technical data			
Type	CPX-FB13		
Part No.	195 740		
Fieldbus interface	Sub-D socket, 9-pin (EN 50170) Electrically isolated 5 V		
Baud rates	[Mbps]	0.0096 ... 12	
Addressing range	1 ... 125 Set using DIL switch		
Product family	4: Valves		
Ident. number	0x059E		
Communication types	DPV0: Cyclic communication DPV1: Acyclic communication		
Configuration support	GSD file and bitmaps		
Max. address capacity	Inputs	[Byte]	64
	Outputs	[Byte]	64
LED displays (bus-specific)	BF: Bus Fault		
Device-specific diagnosis	Identifier and channel-specific diagnosis to EN 50170 (Profibus standard)		
Parameterisation	<ul style="list-style-type: none"> Start-up parameterisation via configuration interface in normal text (GSD) Acyclic parameterisation via DPV1 		
Additional functions	<ul style="list-style-type: none"> Storage of the last 40 errors with timestamp (access via DPV1) 8 bit system status in image table for inputs 2 byte inputs and 2 byte outputs, system diagnostics in image table 		
Operating voltage	Nominal value	[V]	24 DC
	Permissible range	[V]	18 ... 30 DC
	Power failure buffering	[ms]	10
Current consumption			[mA]
Protection class to EN 60529	IP65/IP67		
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Material	Polymer		
Grid dimension			[mm]
Dimensions (incl. interlinking block) W x L x H			[mm]
Weight	without interlinking block	[g]	115
	incl. interlinking block without power supply	[g]	195
	incl. interlinking block with system supply	[g]	215


 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB13

Connection and display components

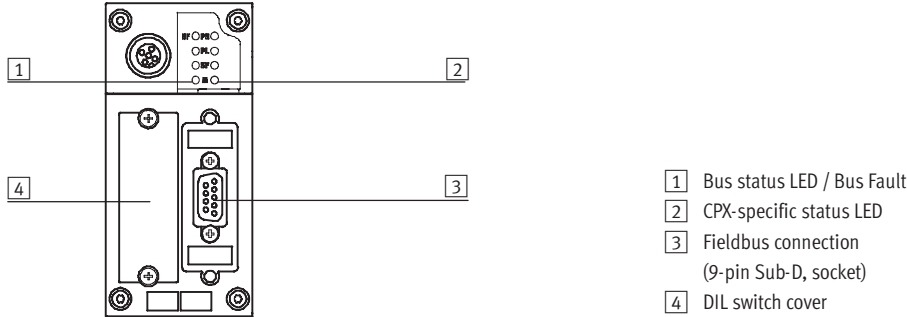

- 1 Bus status LED / Bus Fault
- 2 CPX-specific status LED
- 3 Fieldbus connection (9-pin Sub-D, socket)
- 4 DIL switch cover

Pin allocation for Profibus DP interface








Terminal allocation	Pin	Signal	Designation
Sub-D plug			
	1	n.c.	Not connected
	2	n.c.	Not connected
	3	RxD/TxD-P	Received/transmitted data P
	4	CNTR-P ¹⁾	Repeater control signal
	5	DGND	Data reference potential (M5V)
	6	VP	Supply voltage (P5V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Received/transmitted data N
	9	n.c.	Not connected
	Housing	Screen	Connection to housing
Bus connection M12 adapter plug (B-coded)			
Incoming			
	1	n.c.	Not connected
	2	RxD/TxD-N	Received/transmitted data N
	3	n.c.	Not connected
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Screen	Connection to FE (functional earth)
Outgoing			
	1	VP	Supply voltage (P5V)
	2	RxD/TxD-N	Received/transmitted data N
	3	DGND	Data reference potential (M5V)
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Screen	Connection to FE (functional earth)

1) The repeater control signal CNTR-P is realised as a TTL signal.

Terminal CPX

Accessories – Bus node CPX-FB13



Ordering data				
Designation	Type	Part No.		
Bus connection				
	Sub-D plug	FBS-SUB-9-GS-DP-B	532 216	
	Bus connection M12 adapter plug (B-coded)	FBA-2-M12-5POL-RK	533 118	
	Connection block M12 adapter plug (B-coded)	CPX-AB-2-M12-RK-DP	541 519	
	Inscription label holder for connection block M12	CPX-ST-1	536 593	
	Inspection cover, transparent	AK-SUB-9/15-B	533 334	
	Threaded sleeve, 4 pieces	UNC4-40/M3x6	533 000	
User documentation				
	User documentation for bus node CPX-FB13	German	P.BE-CPX-FB13-DE	526 427
		English	P.BE-CPX-FB13-EN	526 428
		Spanish	P.BE-CPX-FB13-ES	526 429
		French	P.BE-CPX-FB13-FR	526 430
		Italian	P.BE-CPX-FB13-IT	526 431
		Swedish	P.BE-CPX-FB13-SV	526 432

Terminal CPX

Technical data – Bus node CPX-FB14



Bus node for handling communication between the electrical CPX terminal and a CANopen network master or CANopen network.

The bus node receives system supply from the interlinking block and processes communication via the I/O modules.

The status of the CPX terminal is displayed as a common message via 4 CPX-specific LEDs.

The different CANopen statuses and the fieldbus communication status are displayed via 3 additional LEDs.



Application

Bus connection

The bus connection is established via a 9-pin Sub-D plug (pin) as per the CAN in Automation (CiA) specification DS 102 with additional 24 V CAN transceiver supply (option as per DS 102).

The bus connector plug (with protection class IP65/IP67 from Festo or IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

There are 4 contacts available for the 4 wires (CAN_L, CAN_H, 24 V, 0 V) of the incoming and outgoing bus cables.

CANopen implementation

The CPX-FB14 supports the CANopen protocol in accordance with the specifications DS 301 V4.01 and DS 401 V2.0. Implementation is based on the CiA Pre-defined Connection Set. There are 4 PDOs available for fast I/O data exchange.

Advanced system information can also be accessed by means of SDO communication. SDO communication also facilitates parameterisation before network startup or while the controller is running via the user program. An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

With its address capacity, the CPX-FB14 supports a large number of I/O module configurations, including pneumatic interface. By default, 8 byte digital inputs and 8 byte digital outputs can be addressed via PDO 1.

8 analogue input channels and 8 analogue output channels can be addressed via PDO 2 and 3. Status and diagnostic information can be evaluated via PDO 4. Additional 8 byte digital inputs and outputs as well as 8 analogue input and output channels can be addressed via mapping.

Special features in combination with CPX-FEC

When a fieldbus node is combined with a CPX-FEC (in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are actuated via the CPX-FEC. In this case, the fieldbus node only

provides the communication interface to the PLC. Communication between CPX-FEC and CPX fieldbus node takes place via interlinking of the CPX modules. The CPX-FEC occupies an address capacity of the CPX fieldbus node of:

- 8 byte outputs
- 8 byte inputs

As no other components (e.g. I/O modules) are actuated via the CPX fieldbus node, its address capacity is thus reduced effectively to an 8 byte I/O.


The full address capacity of the CPX-FEC is available for actuation of the peripherals:

- 64 byte inputs
- 64 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB14

General technical data			
Type	CPX-FB14		
Part No.	526 174		
Fieldbus interface	Sub-D connector, 9-pin (to DS 102) Bus interface electrically isolated via optocoupler 24 V supply CAN interface via bus		
Baud rates	[kbps]	125, 250, 500 and 1000 can be set via DIL switch	
Addressing range	Node ID 1 ... 127 Set using DIL switch		
Product family	Digital inputs and outputs		
Communication profile	DS 301, V4.01		
Device profile	DS 401, V2.0		
Number	PDO	4 Tx/4 Rx	
	SDO	1 server SDO	
Configuration support	EDS file and bitmaps		
Max. address capacity	Inputs	[Byte]	16 digital, 16 analogue channels
	Outputs	[Byte]	16 digital, 16 analogue channels
LED displays (bus-specific)	MS = Module status NS = Network status IO = I/O status		
Device-specific diagnosis	Via emergency message Object 1001, 1002 and 1003		
Parameterisation	Via SDO		
Additional functions	<ul style="list-style-type: none"> • Storage of the last 40 errors with timestamp (access via SDO) • 8 bit system status via transmit PDO 4 (default) • 2 byte inputs and 2 byte outputs, system diagnostics via PDO 4 • Minimum boot-up • Variable PDO mapping • Emergency message • Node guarding • Heart beat 		
Operating voltage	Nominal value	[V]	24 DC
	Permissible range	[V]	18 ... 30 DC
	Power failure buffering	[ms]	10
Current consumption		[mA]	Max. 200
Protection class to EN 60529	IP65/IP67		
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Material	Polymer		
Grid dimension		[mm]	50
Dimensions (incl. interlinking block) W x L x H		[mm]	50 x 107 x 50
Weight	without interlinking block	[g]	115
	incl. interlinking block without power supply	[g]	195
	incl. interlinking block with system supply	[g]	215

 Note
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB14

Connection and display components



Pin allocation for the CANopen interface










Terminal allocation	Pin	Signal	Designation
Sub-D plug			
	1	n.c.	Not connected
	2	CAN_L	Received/transmitted data low
	3	CAN_GND	0 V CAN interface
	4	n.c.	Not connected
	5	CAN_Shld	Optional screened connection
	6	GND	Ground ¹⁾
	7	CAN_H	Received/transmitted data high
	8	n.c.	Not connected
	9	CAN_V+	24 V DC supply CAN interface
	Housing	Screen	Connection to FE (functional earth)
Bus connection Micro Style (M12)			
Incoming			
	1	Screen	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Outgoing			
	1	Screen	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Bus connection Open Style			
	1	CAN_GND	0 V CAN interface
	2	CAN_L	Received/transmitted data low
	3	Screen	Connection to FE (functional earth)
	4	CAN_H	Received/transmitted data high
	5	CAN_V+	24 V DC supply CAN interface

1) Connected internally via Pin 3.

Terminal CPX

Accessories – Bus node CPX-FB14



Ordering data				
Designation		Type	Part No.	
Bus connection				
	Sub-D plug	FBS-SUB-9-BU-2x5POL-B	532 219	
	Bus connection Micro Style (M12)	FBA-2-M12-5POL	525 632	
	Fieldbus socket for Micro Style connection, M12	FBSD-GD-9-5POL	18 324	
	Plug for Micro Style connection, M12	FBS-M12-5GS-PG9	175 380	
	Bus connection Open Style	FBA-1-SL-5POL	525 634	
	Bus connection, 5-pin terminal strip	FBSD-KL-2x5POL	525 635	
	Inscription label holder for connection block M12	CPX-ST-1	536 593	
	Inspection cover, transparent	AK-SUB-9/15-B	533 334	
	Threaded sleeve, 4 pieces	UNC4-40/M3x6	533 000	
User documentation				
	User documentation for bus node CPX-FB14	German	P.BE-CPX-FB14-DE	526 409
		English	P.BE-CPX-FB14-EN	526 410
		Spanish	P.BE-CPX-FB14-ES	526 411
		French	P.BE-CPX-FB14-FR	526 412
		Italian	P.BE-CPX-FB14-IT	526 413
		Swedish	P.BE-CPX-FB14-SV	526 414

Terminal CPX

Technical data – Bus node CPX-FB23



Bus node for handling communication between the electrical CPX terminal and a higher-order master for Control & Communication-Link (CC-Link) from Mitsubishi.

The bus node receives system supply from the interlinking block and processes communication via the I/O modules.

The status of the CPX terminal is displayed as a common message via 4 CPX-specific LEDs.

The fieldbus communication status is displayed via 4 CC-Link-specific LEDs.



Application

Bus connection

The bus connection can be selected when ordering and is established by means of a screw terminal with IP20 protection, a Sub-D plug with IP65/IP67 protection from Festo or IP20 protection from other manufacturers.

Both connection types have the function of an integrated T-distributor and thus support the connection of an incoming and outgoing bus cable.

The integrated interface with RS 485 transmission technology is designed for the typical CC-Link 3-wire connection technology (in accordance with CLPA CC-Link Spec. V1.11).

CC-Link implementation

The CPX-FB23 supports max. 4 stations per slave. The number of stations used can be set by means of DIL switch. Cyclic data transmission for digital and analogue I/Os is

conducted using the bit and word ranges (Rx/Ry/RWr/RWw).

The CPX-FB23 supports an address space of max. 64 digital inputs and 64 digital outputs (Rx/Ry) or up to

16 analogue inputs and 16 analogue outputs (RWr/RWw). Mixed operation of digital and analogue inputs/outputs is possible.

Example:
Station 1 + 2 = 32 digital inputs and 32 digital outputs
Station 3 = 4 analogue inputs and 4 analogue outputs

Special features in combination with CPX-FEC

When a fieldbus node is combined with a CPX-FEC (in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are actuated via the CPX-FEC.

In this case, the fieldbus node only

provides the communication interface to the PLC.

Communication between CPX-FEC and CPX fieldbus node takes place via interlinking of the CPX modules.

The CPX-FEC occupies an address capacity of the CPX fieldbus node of:

- 8 byte outputs
 - 8 byte inputs
- As no other components (e.g. I/O modules) are actuated via the CPX fieldbus node, its address capacity is thus reduced effectively to an 8 byte I/O.

The full address capacity of the CPX-FEC is available for actuation of the peripherals:

- 64 byte inputs
- 64 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB23

General technical data		
Type	CPX-FB23	
Part No.	526 176	
Fieldbus interface	Either <ul style="list-style-type: none"> • Sub-D socket, 9-pin • Bus connection screw terminal, IP20 	
Baud rates	[kbps]	156 ... 10 000
Addressing range	1 ... 64 Set using DIL switch	
No. of stations per slave	1, 2, 3 or 4 stations Set using DIL switch	
Vendor code	0x0177	
Machine type	0x3C	
Communication types	Cyclic communication	
Configuration support	–	
Max. address capacity, inputs	digital	Station 1, 2, 3, 4 = 64 Rx
	analogue	Station 1, 2, 3, 4 = 16 RWr
Max. address capacity, outputs	digital	Station 1, 2, 3, 4 = 64 Ry
	analogue	Station 1, 2, 3, 4 = 16 RWw
LED displays (bus-specific)	RUN = Data communication OK ERROR = CRC error or data communication error SD = Send data RD = Receive data	
Device-specific diagnosis	<ul style="list-style-type: none"> • 8 bit system status in image table for inputs • 2 byte inputs and 2 byte outputs, system diagnostics in image table 	
Parameterisation	Hold/clear by means of DIL switch	
Additional functions	Storage of the last 40 errors with timestamp (access via system diagnostics)	
Operating voltage	Nominal value	[V] 24 DC
	Permissible range	[V] 18 ... 30 DC
	Power failure buffering	[ms] 10
Current consumption	[mA]	Max. 200
Protection class to EN 60529	IP65/IP67	
Temperature range	Operation	[°C] –5 ... +50
	Storage/transport	[°C] –20 ... +70
Material	Polymer	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 50
Weight	without interlinking block	[g] 115
	incl. interlinking block without power supply	[g] 195
	incl. interlinking block with system supply	[g] 215



Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB23

Connection and display components



Pin allocation for the CC-Link interface







Terminal allocation	Pin	Signal	Designation
Sub-D plug			
	1	n.c.	Not connected
	2	DA	Data A
	3	DG	Data reference potential
	4	n.c.	Not connected
	5	FE ¹⁾	Functional earth
	6	n.c.	Not connected
	7	DB	Data B
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	SLD	Screen
Bus connection screw terminal			
	1	FG	Functional earth/housing
	2	SLD	Screen
	3	DG	Data reference potential
	4	DB	Data B
	5	DA	Data A

1) Via RC element on housing.

Terminal CPX

Accessories – Bus node CPX-FB23



Ordering data				
Designation		Type	Part No.	
Bus connection				
	Sub-D plug	FBS-SUB-9-GS-2x4POL-B	532 220	
	Bus connection screw terminal	FBA-1-KL-5POL	197 962	
	Inscription label holder for connection block M12	CPX-ST-1	536 593	
	Inspection cover, transparent	AK-SUB-9/15-B	533 334	
	Threaded sleeve, 4 pieces	UNC4-40/M3x6	533 000	
User documentation				
	User documentation for bus node CPX-FB23	German	P.BE-CPX-FB23-DE	526 403
		English	P.BE-CPX-FB23-EN	526 404

CPX terminal

Technical data – Bus node CPX-FB32



Bus node for handling communication between the electrical CPX terminal and the Ethernet/IP network. The bus node receives system supply from the interlinking block and processes communication via the I/O modules. The status of the CPX terminal is displayed as a common message via 4 CPX-specific LEDs.



Application

Bus connection

The bus connection is established via an M12 plug, D-coded to IEC947-5-2 with protection class IP65/67.

Ethernet/IP is an open bus system based on the Ethernet standard and TCP/IP technology (IEEE802.3).

Ethernet/IP implementation

The CPX-FB32 supports the Remote I/O and Remote Controller operating modes. In remote I/O operating mode, all functions of the CPX valve terminal are

directly controlled by the Ethernet/IP master (host). In addition to having control via a bus system, it is possible to use IT technologies. An integrated web server

allows diagnostic data to be visualised via HTML. Various programs support direct access to the data of the device from the automation network.

The Ethernet/IP node for CPX supports the transmission technology that conforms to DIN EN 50173 / CAT 5 as an integrated interface.

Special features in combination with CPX-FEC

When a fieldbus node is combined with a CPX-FEC (in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are actuated via the

CPX-FEC. In this case, the fieldbus node only provides the communication interface to the PLC.

Communication between CPX-FEC and CPX fieldbus node takes place via interlinking of the CPX modules.

The CPX-FEC occupies an address capacity of the CPX fieldbus node of:

- 8 byte inputs/outputs or
- 16 byte inputs/outputs

CPX terminal

Technical data – Bus node CPX-FB32

General technical data			
Type	CPX-FB32		
Part No.	541 302		
Fieldbus interface	Plug connector, M12, D-coded, 4-pin		
Baud rates	[Mbps]	10/100, full/half duplex	
IP addressing	Via DHCP, DIL switch or network software		
Max. address capacity, inputs	[Byte]	64	
Max. address capacity, outputs	[Byte]	64	
LED displays (bus-specific)	MS = Module status NS = Network status IO = I/O status TP = Link/Traffic		
Device-specific diagnosis	System, module and channel oriented diagnosis		
Parameterisation	<ul style="list-style-type: none"> Start-up parameterisation Acyclic parameterisation via Explicit Messaging 		
Additional functions	<ul style="list-style-type: none"> Storage of the last 40 errors with timestamp (access via system diagnostics) 8 bit system status in image table for inputs 2 byte I/O, system diagnosis via image table 		
Operating voltage	Nominal value	[V DC]	24
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Current consumption	[mA]		Typically 65
Protection class to EN 60529	IP65/IP67		
Temperature range	Operation	[°C]	- 5... +50
	Storage/transport	[°C]	-20 ... +70
Materials	Polymer		
Grid dimension	[mm]		50
Dimensions (incl. interlinking block) W x L x H	[mm]		50 x 107 x 50
Weight	Without interlinking block	[g]	125
	Incl. interlinking block without power supply	[g]	215
	Incl. interlinking block with system supply	[g]	225


 Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

CPX terminal


Technical data – Bus node CPX-FB32

Connection and display components

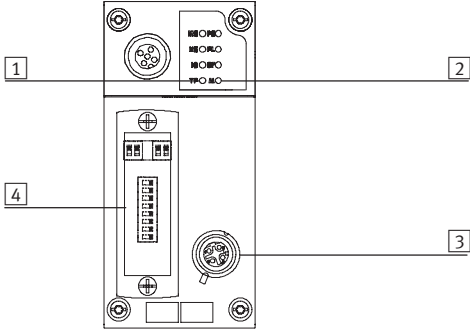






- 1 Bus-specific status LED
- 2 CPX-specific status LED
- 3 Fieldbus connection
(4-pin socket, M12, D-coded)
- 4 Transparent DIL switch cover

Pin allocation for the fieldbus interface

Connection allocation	Pin	Signal	Description
M12 socket, D-coded			
	1	TX+	Transmitted data+
	2	RX+	Received data+
	3	TX-	Transmitted data-
	4	RX-	Received data-
	Housing		


CPX terminal

Accessories – Bus node CPX-FB32

Ordering data				
Designation	Type	Part No.		
Bus connection				
	Plug, M12x1, 4-pin, D-coded	NECU-M-S-D12G4-C2-ET	543 109	
	Inspection cover, transparent	AK-SUB-9/15-B	533 334	
	Inscription label holder for connection block	CPX-ST-1	536 593	
User documentation				
	User documentation – Bus node CPX-FB32	German	P.BE-CPX-FB32-DE	693 134
		English	P.BE-CPX-FB32-EN	693 135
		Spanish	P.BE-CPX-FB32-ES	693 136
		French	P.BE-CPX-FB32-FR	693 137
		Italian	P.BE-CPX-FB32-IT	693 138
		Swedish	P.BE-CPX-FB32-SV	693 139
Software				
	CPX remote diagnosis and process visualisation	CPX-WEB-MONITOR	545 413	

Terminal CPX

Technical data – CPX-CP interface

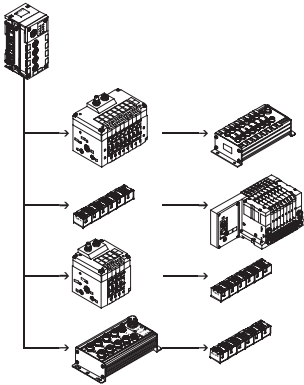

The CPX-CP electrical interface establishes the connection to CP modules of the CPI installation system via prefabricated cables. The I/O data of the connected valve terminals with CP string extension and CP input and output modules is transferred to the connected CPX bus node and thus via fieldbus to the higher-order controller. This permits the realisation of modular centralised and compact decentralised concepts with one system. The CP electrical interface is supported by all CPX fieldbus nodes and the CPX-FEC.



Application

CPI connection


As well as transmitting the communication data, the max. 4 CP strings of a CPX-CP interface also transmit the supply voltage to the connected sensors and the load supply to the valves (or outputs). Both circuits are supplied with 24 V separately from

one another, but with a common reference potential. The valve terminals with CP string extension (or outputs) are supplied with voltage for the electronics and valves by the interlinking block.

The following combinations are made possible by the CP interface:

- Centralised analogue and digital inputs and outputs of the CPX terminal
- Decentralised digital inputs and outputs of the CP installation system
- Valve/valve terminals that can be connected both centrally and decentrally

CP interface and CP modules example

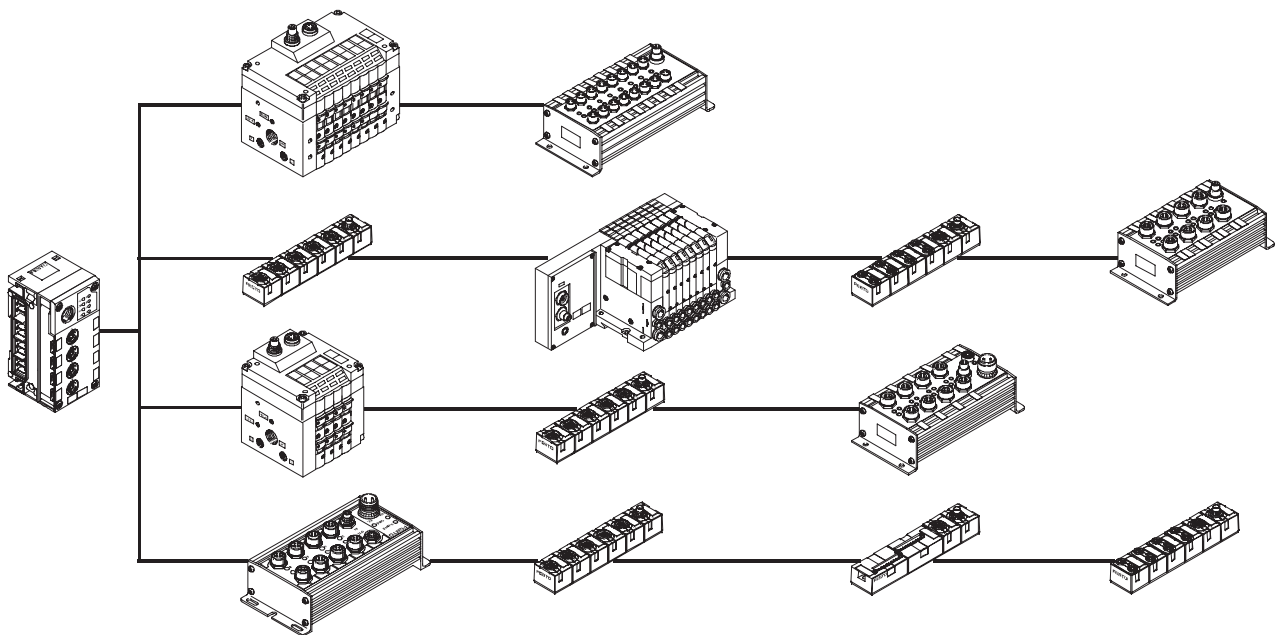

Terminal CPX

Technical data – CPX-CP interface

Implementation

The CPX-CP interface supports the CPI system:

- Max. 4 individual electronically protected CP strings
- Max. 4 CP modules per string
- Max. 32 inputs/32 outputs per string
- The maximum length of a string is 10 m
- Modules with CPI functionality

The following CP module variants are available:

- Input modules with 8 or 16 digital inputs (connection technology M8, M12 and CageClamp)
- Output modules with 4 or 8 digital outputs (connection technology M12)
- Valve terminals with CP string extension (up to 16 solenoid coils, different valve functions)

CPI modules support the following functions:

- Module-oriented diagnosis
- Module/channel-oriented parameterisation
- Support of all functions by the CPX-MMI operator unit
- Module can be positioned anywhere within the string

Several CP interface modules can be combined in one CPX terminal, depending on the address capacity of the bus node.

Example:

- CPX-FB13 (512 I/O)
- Max. 4 CP interface modules (128 I/O each) possible

Note

When arranging the CP modules it should be noted that CP input modules without CPI functionality should always be placed at the end of a string.

Configuration

The following rules apply for a string of a CPX-CP interface:

- Max. one output module or one valve terminal without CPI functionality
- Max. one output module without CPI functionality or one valve terminal with CP string extension
- Any number of CP modules with CPI functionality, up to the maximum limit of 4 modules and/or 32 inputs/32 outputs per string

Maximum extension:

- 4 input modules and 4 valve terminals/output modules without CPI functionality
- 16 CP modules with CPI functionality

The configuration of the strings with respect to the module type and position of the modules in the string is read in by activating the SAVE key on the CPX-CP interface and saved there permanently (plug and work). Saved data is retained even when the CP interface is isolated from the voltage supply.

The representation of the CP interface within a CPX terminal and thus at the fieldbus is dependent on the characteristics of the relevant fieldbus system. In addition to input and output addressing, this also applies to the representation of the diagnosis and parameterisation of the CP module and the characteristics of the CPI system.

Note


The remanent saving of configuration data means that changes in the configuration or faulty modules are still displayed even after a voltage failure.

Terminal CPX

Technical data – CPX-CP interface

FESTO


General technical data			
Type	CPX-CP-4-FB		
Part No.	526 705		
Brief description		CP interface	
Max. number of	CP strings		4
	CP modules per string		4
	outputs per string		32
	inputs per string		32
CP connection		Socket M9, 5-pin	
Baud rate		[kbps]	1000
Cycle time	CP modules without extended functionality	[ms]	4
	CP modules with extended functionality	[ms]	2
LED displays		L1 ... 4 = Status of the CP string 1 ... 4 PS = Electronic supply, sensor supply PL = Load supply RN = Status of the CP system SF = System error	
Device-specific diagnosis		Via bus node	
Operating voltage	Nominal value	[V]	24 DC (reverse polarity protected)
	Permissible range	[V]	18 ... 30 DC
	Power failure buffering	[ms]	20
Supply voltage of sensors		[V]	24 DC ±25% coming from bus node
Load voltage of actuators		[V]	24 DC ±10% coming from bus node
Current consumption	without CP modules	[A]	Max. 0.2
	per CP string	[A]	Max. 1.6
Protection class to EN 60529		IP65/IP67	
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Material		Polyamide	
Grid dimension		[mm]	50
Dimensions (incl. interlinking block) W x L x H		[mm]	50 x 107 x 45
Weight	without interlinking block	[g]	140
	incl. interlinking block without power supply	[g]	220
	incl. interlinking block with system supply	[g]	240

-  - Note
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX






Accessories – CPX-CP interface

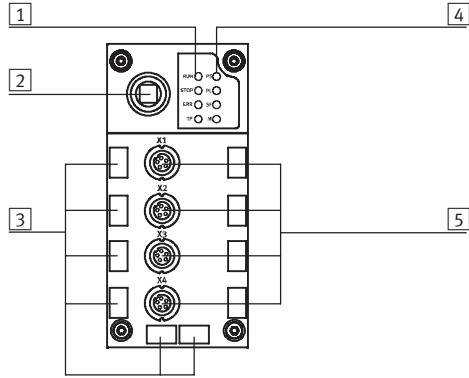Connection and display components



- 1 CP string LEDs
- 2 SAVE key
- 3 Holders for inscription labels (IBS 6x10)
- 4 CPX-specific status LEDs
- 5 CP connections for up to 4 strings (0 ... 3)

Ordering data

Designation		Type	Part No.	
Bus connection				
	Cover cap	M9	FLANSCHDOSE SER.712	356 684
		M12	ISK-M12	165 592
	Connecting cable WS-WD	0.25 m	KVI-CP-3-WS-WD-0,25	540 327
		0.5 m	KVI-CP-3-WS-WD-0,5	540 328
		2 m	KVI-CP-3-WS-WD-2	540 329
		5 m	KVI-CP-3-WS-WD-5	540 330
		8 m	KVI-CP-3-WS-WD-8	540 331
	Connecting cable GS-GD	2 m	KVI-CP-3-GS-GD-2	540 332
		5 m	KVI-CP-3-GS-GD-5	540 333
		8 m	KVI-CP-3-GS-GD-8	540 334
	Inscription label holder for connection block	CPX-ST-1		536 593
User documentation				
	User documentation for CPX-CP interface	German	P.BE-CPX-CP-DE	539 293
		English	P.BE-CPX-CP-EN	539 294
		Spanish	P.BE-CPX-CP-ES	539 295
		French	P.BE-CPX-CP-FR	539 296
		Italian	P.BE-CPX-CP-IT	539 297
		Swedish	P.BE-CPX-CP-SV	539 298

Terminal CPX

Technical data – Input module, digital

Function

Digital input modules allow the connection of two-wire and three-wire sensors (proximity sensors, inductive or capacitive sensors, etc.).

Depending on the connection block selected, the module supports various connection concepts with different numbers of sockets (single or double allocation).

Applications


- Input modules for 24 V DC sensor voltage supply
- PNP or NPN logic
- Supports connection blocks with M12, M8, Sub-D, Harax and terminal connection
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnosis through integrated electronic fuse protection



General technical data					
Type		CPX-4DE	CPX-8DE	CPX-8DE-D	CPX-8NDE
Part No.		195 752	195 750	541 480	543 813
No. of inputs		4	8	8	8
Max. power supply	per module	[A] 0.5			
	per channel	[A] 0.5			
Fuse protection		Internal electronic fuse protection for each module	Internal electronic fuse protection for each module	Internal electronic fuse protection for each channel	Internal electronic fuse protection for each module
Module current consumption (input logic level OFF)		[mA] Typ. 15	Typ. 15	Typ. 12	Typ. 4
Supply voltage of sensors		[V] 24 DC ±15%			24 DC ±25%
Electrical isolation	Channel – Channel	No			
	Channel – Internal bus	No			
Switching level	Signal 0	[V] ≤ 5 DC			≥ 11 DC
	Signal 1	[V] ≥ 11 DC			≤ 5 DC
Switch-on debounce time		[ms] 3 (0.1 ms, 10, 20 parameterisable)			
Input characteristic curve		IEC 1131-2			
Switching logic		Positive logic (PNP)			Negative Logic (NPN)
LED displays	Group diagnosis	1	1	1	1
	Channel diagnosis	–	–	8	–
	Channel status	4	8	8	8
Diagnosis		Short circuit/overload, sensor supply			
Parameterisation		<ul style="list-style-type: none"> • Module monitoring • Behaviour after short circuit • Switch-on debounce time • Signal stretching time 			
Protection class to EN 60529		Depending on connection block			
Temperature range	Operation	[°C] –5 ... +50			
	Storage/transport	[°C] –20 ... +70			
Materials		Polymer			
Grid dimension		[mm] 50			
Dimensions (incl. interlinking block and connection block) W x L x H		[mm] 50 x 107 x 50			
Weight		[g] 38			

Terminal CPX

Technical data – Input module, digital

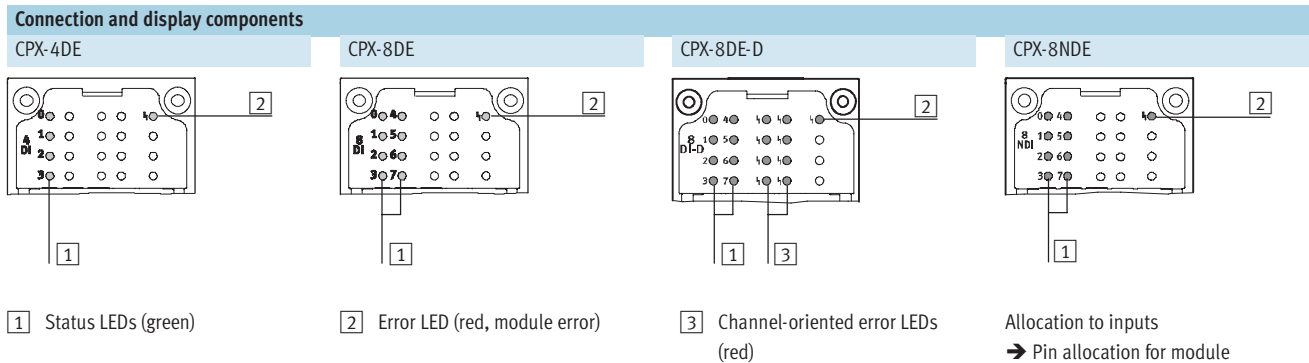

Connection block/digital input module combinations					
Connection blocks	Part No.	Digital input modules			
		CPX-4DE	CPX-8DE	CPX-8DE-D	CPX-8NDE
CPX-AB-8-M8-3POL	195 706	■	■	■	■
CPX-AB-8-M8X2-4POL	541 256	-	-	-	-
CPX-AB-4-M12X2-5POL	195 704	■	■	■	■
CPX-AB-4-M12X2-5POL-R	541 254	■	■	■	■
CPX-AB-4-M12-8POL	526 178	-	-	-	-
CPX-AB-8-KL-4POL	195 708	■	■	■	■
CPX-AB-1-SUB-BU-25POL	525 676	■	■	■	■
CPX-AB-4-HAR-4POL	525 636	■	■	■	■

Pin allocation				
Inputs, connection block	CPX-4DE	CPX-8DE, CPX-8DE-D and CPX-8NDE		
CPX-AB-8-M8-3POL				
	<p>X1.1: 24 V_{SEN} x</p> <p>X1.3: 0 V_{SEN} x</p> <p>X1.4: Input x</p> <p>X2.1: 24 V_{SEN} x</p> <p>X2.3: 0 V_{SEN} x</p> <p>X2.4: Input x+1</p> <p>X3.1: 24 V_{SEN} x+1</p> <p>X3.3: 0 V_{SEN} x+1</p> <p>X3.4: Input x+1</p> <p>X4.1: 24 V_{SEN} x+1</p> <p>X4.3: 0 V_{SEN} x+1</p> <p>X4.4: n.c.</p>	<p>X5.1: 24 V_{SEN} x+2</p> <p>X5.3: 0 V_{SEN} x+2</p> <p>X5.4: Input x+2</p> <p>X6.1: 24 V_{SEN} x+2</p> <p>X6.3: 0 V_{SEN} x+2</p> <p>X6.4: Input x+3</p> <p>X7.1: 24 V_{SEN} x+3</p> <p>X7.3: 0 V_{SEN} x+3</p> <p>X7.4: Input x+3</p> <p>X8.1: 24 V_{SEN} x+3</p> <p>X8.3: 0 V_{SEN} x+3</p> <p>X8.4: n.c.</p>	<p>X1.1: 24 V_{SEN} x</p> <p>X1.3: 0 V_{SEN} x</p> <p>X1.4: Input x</p> <p>X2.1: 24 V_{SEN} x+1</p> <p>X2.3: 0 V_{SEN} x+1</p> <p>X2.4: Input x+1</p> <p>X3.1: 24 V_{SEN} x+2</p> <p>X3.3: 0 V_{SEN} x+2</p> <p>X3.4: Input x+2</p> <p>X4.1: 24 V_{SEN} x+3</p> <p>X4.3: 0 V_{SEN} x+3</p> <p>X4.4: Input x+3</p>	<p>X5.1: 24 V_{SEN} x+4</p> <p>X5.3: 0 V_{SEN} x+4</p> <p>X5.4: Input x+4</p> <p>X6.1: 24 V_{SEN} x+5</p> <p>X6.3: 0 V_{SEN} x+5</p> <p>X6.4: Input x+5</p> <p>X7.1: 24 V_{SEN} x+6</p> <p>X7.3: 0 V_{SEN} x+6</p> <p>X7.4: Input x+6</p> <p>X8.1: 24 V_{SEN} x+7</p> <p>X8.3: 0 V_{SEN} x+7</p> <p>X8.4: Input x+7</p>
CPX-AB-4-M12X2-5POL and CPX-AB-4-M12X2-5POL-R¹⁾				
	<p>X1.1: 24 V_{SEN} x</p> <p>X1.2: Input x+1</p> <p>X1.3: 0 V_{SEN} x</p> <p>X1.4: Input x</p> <p>X1.5: FE (earth)</p> <p>X2.1: 24 V_{SEN} x+1</p> <p>X2.2: n.c.</p> <p>X2.3: 0 V_{SEN} x+1</p> <p>X2.4: Input x+1</p> <p>X2.5: FE (earth)</p>	<p>X3.1: 24 V_{SEN} x+2</p> <p>X3.2: Input x+3</p> <p>X3.3: 0 V_{SEN} x+2</p> <p>X3.4: Input x+2</p> <p>X3.5: FE (earth)</p> <p>X4.1: 24 V_{SEN} x+3</p> <p>X4.2: n.c.</p> <p>X4.3: 0 V_{SEN} x+3</p> <p>X4.4: Input x+3</p> <p>X4.5: FE (earth)</p>	<p>X1.1: 24 V_{SEN}</p> <p>X1.2: Input x+1</p> <p>X1.3: 0 V_{SEN}</p> <p>X1.4: Input x</p> <p>X1.5: FE (earth)</p> <p>X2.1: 24 V_{SEN}</p> <p>X2.2: Input x+3</p> <p>X2.3: 0 V_{SEN}</p> <p>X2.4: Input x+2</p> <p>X2.5: FE (earth)</p>	<p>X3.1: 24 V_{SEN}</p> <p>X3.2: Input x+5</p> <p>X3.3: 0 V_{SEN}</p> <p>X3.4: Input x+4</p> <p>X3.5: FE (earth)</p> <p>X4.1: 24 V_{SEN}</p> <p>X4.2: Input x+7</p> <p>X4.3: 0 V_{SEN}</p> <p>X4.4: Input x+6</p> <p>X4.5: FE (earth)</p>

1) Speedcon quick lock, screen additionally on metal thread










Terminal CPX

Technical data – Input module, digital

Pin allocation		CPX-4DE		CPX-8DE, CPX-8DE-D and CPX-8NDE	
Inputs, connection block		CPX-4DE		CPX-8DE, CPX-8DE-D and CPX-8NDE	
CPX-AB-8-KL-4POL					
	X1.0: 24 V _{SEN}	X5.0: 24 V _{SEN}	X1.0: 24 V _{SEN} x	X5.0: 24 V _{SEN} x+4	
	X1.1: 0 V _{SEN}	X5.1: 0 V _{SEN}	X1.1: 0 V _{SEN}	X5.1: 0 V _{SEN}	
	X1.2: Input x	X5.2: Input x+2	X1.2: Input x	X5.2: Input x+4	
	X1.3: FE (earth)	X5.3: FE (earth)	X1.3: FE (earth)	X5.3: FE (earth)	
	X2.0: 24 V _{SEN}	X6.0: 24 V _{SEN}	X2.0: 24 V _{SEN} x+1	X6.0: 24 V _{SEN} x+5	
	X2.1: 0 V _{SEN}	X6.1: 0 V _{SEN}	X2.1: 0 V _{SEN}	X6.1: 0 V _{SEN}	
	X2.2: Input x+1	X6.2: Input x+3	X2.2: Input x+1	X6.2: Input x+5	
	X2.3: FE (earth)	X6.3: FE (earth)	X2.3: FE (earth)	X6.3: FE (earth)	
	X3.0: 24 V _{SEN}	X7.0: 24 V _{SEN}	X3.0: 24 V _{SEN} x+2	X7.0: 24 V _{SEN} x+6	
	X3.1: 0 V _{SEN}	X7.1: 0 V _{SEN}	X3.1: 0 V _{SEN}	X7.1: 0 V _{SEN}	
	X3.2: Input x+1	X7.2: Input x+3	X3.2: Input x+2	X7.2: Input x+6	
	X3.3: FE (earth)	X7.3: FE (earth)	X3.3: FE (earth)	X7.3: FE (earth)	
	X4.0: 24 V _{SEN}	X8.0: 24 V _{SEN}	X4.0: 24 V _{SEN} x+3	X8.0: 24 V _{SEN} x+7	
	X4.1: 0 V _{SEN}	X8.1: 0 V _{SEN}	X4.1: 0 V _{SEN}	X8.1: 0 V _{SEN}	
	X4.2: n.c.	X8.2: n.c.	X4.2: Input x+3	X8.2: Input x+7	
	X4.3: FE (earth)	X8.3: FE (earth)	X4.3: FE (earth)	X8.3: FE (earth)	
CPX-AB-1-SUB-BU-25POL					
	1: Input x	14: Input x+2	1: Input x	14: Input x+4	
	2: Input x+1	15: Input x+3	2: Input x+1	15: Input x+5	
	3: Input x+1	16: Input x+3	3: Input x+2	16: Input x+6	
	4: n.c.	17: n.c.	4: Input x+3	17: Input x+7	
	5: 24 V _{SEN}	18: 24 V _{SEN}	5: 24 V _{SEN} x+1	18: 24 V _{SEN} x+4	
	6: 0 V _{SEN}	19: 24 V _{SEN}	6: 0 V _{SEN}	19: 24 V _{SEN} x+5	
	7: 24 V _{SEN}	20: 24 V _{SEN}	7: 24 V _{SEN} x+3	20: 24 V _{SEN} x+6	
	8: 0 V _{SEN}	21: 24 V _{SEN}	8: 0 V _{SEN}	21: 24 V _{SEN} x+7	
	9: 24 V _{SEN}	22: 0 V _{SEN}	9: 24 V _{SEN} x	22: 0 V _{SEN}	
	10: 24 V _{SEN}	23: 0 V _{SEN}	10: 24 V _{SEN} x+2	23: 0 V _{SEN}	
	11: 0 V _{SEN}	24: 0 V _{SEN}	11: 0 V _{SEN}	24: 0 V _{SEN}	
	12: 0 V _{SEN}	25: FE (earth)	12: 0 V _{SEN}	25: FE (earth)	
	13: FE (earth)	Socket: FE (earth)	13: FE (earth)	Socket: FE (earth)	
CPX-AB-4-HAR-4POL					
	X1.1: 24 V _{SEN}	X3.1: 24 V _{SEN}	X1.1: 24 V _{SEN} x	X3.1: 24 V _{SEN} x+4	
	X1.2: Input x+1	X3.2: Input x+3	X1.2: Input x+1	X3.2: Input x+5	
	X1.3: 0 V _{SEN}	X3.3: 0 V _{SEN}	X1.3: 0 V _{SEN}	X3.3: 0 V _{SEN}	
	X1.4: Input x	X3.4: Input x+2	X1.4: Input x	X3.4: Input x+4	
	X2.1: 24 V _{SEN}	X4.1: 24 V _{SEN}	X2.1: 24 V _{SEN} x+2	X4.1: 24 V _{SEN} x+6	
	X2.2: n.c.	X4.2: n.c.	X2.2: Input x+3	X4.2: Input x+7	
	X2.3: 0 V _{SEN}	X4.3: 0 V _{SEN}	X2.3: 0 V _{SEN}	X4.3: 0 V _{SEN}	
	X2.4: Input x+1	X4.4: Input x+3	X2.4: Input x+2	X4.4: Input x+6	

Terminal CPX


Accessories – Input module, digital

Ordering data				
Designation			Type	Part No.
Plug				
	Push-in T-connector	2x socket M12, 5-pin 1x plug M12, 4-pin	NEDU-M12D5-M12T4	541 596
		2x socket M8, 3-pin 1x plug M12, 4-pin	NEDU-M8D3-M12T4	541 597
	Plug	M8, solderable	SEA-GS-M8	18 696
		M8, screw-in	SEA-3GS-M8-S	192 009
		M12, PG7	SEA-GS-7	18 666
		M12, PG7, 4-pin for cable Ø 2.5 mm	SEA-4GS-7-2,5	192 008
		M12, PG9	SEA-GS-9	18 778
		M12 for 2 cables	SEA-GS-11-DUO	18 779
		M12 for 2 cables, 5-pin	SEA-5GS-11-DUO	192 010
	HARAX plug, 4-pin	M12, 5-pin	SEA-M12-5GS-PG7	175 487
			SEA-GS-HAR-4POL	525 928
	Sub-D plug, 25-pin		SD-SUB-D-ST25	527 522
Cable				
	Connecting cable M8-M8	0.5 m	KM8-M8-GSGD-0,5	175 488
		1.0 m	KM8-M8-GSGD-1	175 489
		2.5 m	KM8-M8-GSGD-2,5	165 610
		5.0 m	KM8-M8-GSGD-5	165 611
	Connecting cable M8-M12	1.0 m	KM8-M12-GSGD-1	187 859
		2.5 m	KM8-M12-GSGD-2,5	187 860
		5.0 m	KM8-M12-GSGD-5	187 861
	Connecting cable M12-M12	2.5 m	KM12-M12-GSGD-2,5	18 684
5.0 m		KM12-M12-GSGD-5	18 686	
1.0 m		KM12-M12-GSWD-1-4	185 499	
	Modular system for connecting cables		NEBU-... → 4 / 8.3-18	-
	DUO cable M12	2x straight socket	KM12-DUO-M8-GDGD	18 685
		2x straight/angled socket	KM12-DUO-M8-GDWD	18 688
		2x angled socket	KM12-DUO-M8-WDWD	18 687
Cover				
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable feeds M9 – 1 cable feed for multi-pin plug		AK-8KL	538 219
	Fittings kit		VG-K-M9	538 220
Screening plate				
	Screening plate for M12 connections		CPX-AB-S-4-M12	526 184

Terminal CPX

Accessories – Input module, digital



Ordering data				
Designation		Type	Part No.	
User's manual				
	User's manual	German	P.BE-CPX-EA-DE	526 439
		English	P.BE-CPX-EA-EN	526 440
		Spanish	P.BE-CPX-EA-ES	526 441
		French	P.BE-CPX-EA-FR	526 442
		Italian	P.BE-CPX-EA-IT	526 443
		Swedish	P.BE-CPX-EA-SV	526 444

CPX terminal

Technical data – Input module, digital

Function

Digital input modules allow the connection of two-wire and three-wire sensors (proximity sensors, inductive or capacitive sensors, etc.).

Depending on the connection block selected, the module supports various connection concepts with different numbers of sockets (single or double allocation).

Application

- Input modules for 24 V DC sensor voltage supply
- PNP logic
- Supports connection blocks with M8, Sub-D and terminal connection
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnosis through integrated electronic fuse protection




General technical data			
Type		CPX-16DE	
Part No.		543815	
No. of inputs		16	
Max. power supply	Per module	[A]	0.5
	Per channel	[A]	0.5
Fuse protection		Internal electronic fuse protection for each module	
Module current consumption (input logic level OFF)		[mA]	Typically 4
Supply voltage of sensors		[V]	24 DC ±25%
Electrical isolation	Channel – Channel	No	
	Channel – Internal bus	No	
Switching level	Signal 0	[V]	≤ 5 DC
	Signal 1	[V]	≥ 11 DC
Switch-on debounce time		[ms]	3 (0.1 ms, 10, 20 parameterisable)
Input characteristic curve		IEC 1131-2	
Switching logic		Positive logic (PNP)	
LED displays	Group diagnosis	1	
	Channel diagnosis	–	
	Channel status	16	
Diagnosis		Short circuit/overload, sensor supply	
Parameterisation		<ul style="list-style-type: none"> • Module monitoring • Behaviour after short circuit • Switch-on debounce time • Signal stretching time 	
Protection class to EN 60529		Depending on connection block	
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials		Polymer	
Grid dimension		[mm]	50
Dimensions (incl. interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50
Weight		[g]	38

CPX terminal

Technical data – Input module, digital

Connection and display components

CPX-16DE



- 1 Status LEDs (green)
Allocation to inputs
→ Pin allocation for module
- 2 Error LED (red, module error)

Connection block/digital input module combinations


Manifold blocks	Part No.	Digital input modules
		CPX-16DE
CPX-AB-8-M8X2-4POL	541 256	■
CPX-AB-8-KL-4POL	195 708	■
CPX-AB-1-SUB-BU-25POL	525 676	■

Pin allocation

Connection block inputs

CPX-16DE



CPX-AB-8-M8x2-4POL

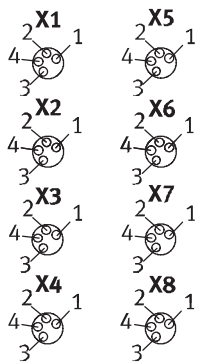

X1.1: 24 V _{SEN}	X5.1: 24 V _{SEN}
X1.2: Input x+1	X5.2: Input x+9
X1.3: 0 V _{SEN}	X5.3: 0 V _{SEN}
X1.4: Input x	X5.4: Input x+8
X2.1: 24 V _{SEN}	X6.1: 24 V _{SEN}
X2.2: Input x+3	X6.2: Input x+11
X2.3: 0 V _{SEN}	X6.3: 0 V _{SEN}
X2.4: Input x+2	X6.4: Input x+10
X3.1: 24 V _{SEN}	X7.1: 24 V _{SEN}
X3.2: Input x+5	X7.2: Input x+13
X3.3: 0 V _{SEN}	X7.3: 0 V _{SEN}
X3.4: Input x+4	X7.4: Input x+12
X4.1: 24 V _{SEN}	X8.1: 24 V _{SEN}
X4.2: Input x+7	X8.1: Input x+15
X4.3: 0 V _{SEN}	X8.3: 0 V _{SEN}
X4.4: Input x+6	X8.4: Input x+14

CPX terminal








Technical data – Input module, digital

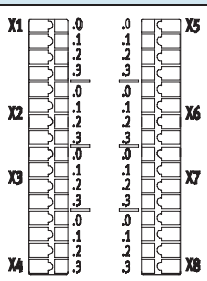Pin allocation		
Connection block inputs		CPX-16DE
CPX-AB-8-KL-4POL		
	<p>X1.0: Input x+8 X1.1: 24 V_{SEN} X1.2: Input x X1.3: FE (earth)</p> <p>X2.0: Input x+9 X2.1: 24 V_{SEN} X2.2: Input x+1 X2.3: FE (earth)</p> <p>X3.0: Input x+10 X3.1: 24 V_{SEN} X3.2: Input x+2 X3.3: FE (earth)</p> <p>X4.0: Input x+11 X4.1: 24 V_{SEN} X4.2: Input x+3 X4.3: FE (earth)</p>	<p>X5.0: Input x+12 X5.1: 0 V_{SEN} X5.2: Input x+4 X5.3: FE (earth)</p> <p>X6.0: Input x+13 X6.1: 0 V_{SEN} X6.2: Input x+5 X6.3: FE (earth)</p> <p>X7.0: Input x+14 X7.1: 0 V_{SEN} X7.2: Input x+6 X7.3: FE (earth)</p> <p>X8.0: Input x+15 X8.1: 0 V_{SEN} X8.2: Input x+7 X8.3: FE (earth)</p>
CPX-AB-1-SUB-BU-25POL		
	<p>1: Input x 2: Input x+1 3: Input x+2 4: Input x+3 5: Input x+9 6: 24 V_{SEN} 7: Input x+11 8: 24 V_{SEN} 9: Input x+8 10: Input x+10 11: 24 V_{SEN} 12: 24 V_{SEN} 13: FE (earth)</p>	<p>14: Input x+4 15: Input x+5 16: Input x+6 17: Input x+7 18: Input x+12 19: Input x+13 20: Input x+14 21: Input x+15 22: 0 V_{SEN} 23: 0 V_{SEN} 24: 0 V_{SEN} 25: FE (earth) Housing: FE (earth)</p>

CPX terminal

Accessories – Input module, digital



Ordering data				
Designation			Type	Part No.
Plug				
	Plug	M8, solderable	SEA-GS-M8	18 696
		M8, screw-in	SEA-3GS-M8-S	192 009
	Plugs/sockets, 4-pin/3-pin, M8x1/M8x1	9.5	NEDU-M8D3-M8T4	544 391
	Sub-D plug, 25-pin		SD-SUB-D-ST25	527 522
Connecting cable				
	Connecting cable M8-M8	0.5 m	KM8-M8-GSGD-0,5	175 488
		1.0 m	KM8-M8-GSGD-1	175 489
		2.5 m	KM8-M8-GSGD-2,5	165 610
		5.0 m	KM8-M8-GSGD-5	165 611
	Connecting cable M8-M12	1.0 m	KM8-M12-GSGD-1	187 859
		2.5 m	KM8-M12-GSGD-2,5	187 860
5.0 m		KM8-M12-GSGD-5	187 861	
	Modular system for connecting cables		NEBU-... → 4 / 8.3-18	–
Cover				
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug		AK-8KL	538 219
	Fittings kit		VG-K-M9	538 220
User documentation				
	User documentation	German	P.BE-CPX-EA-DE	526 439
		English	P.BE-CPX-EA-EN	526 440
		Spanish	P.BE-CPX-EA-ES	526 441
		French	P.BE-CPX-EA-FR	526 442
		Italian	P.BE-CPX-EA-IT	526 443
		Swedish	P.BE-CPX-EA-SV	526 444

Terminal CPX

Technical data – Output module, digital

Function

Digital outputs control actuators such as individual valves, hydraulic valves, heating controllers and many more. Separate circuits are implemented using an additional power supply. Parallel connection of the outputs of a module allows consuming devices to be controlled with up to 4 A.

Applications

- Output module for 24 V DC supply voltage
- PNP logic
- Supports connection blocks with M12, M8, Sub-D, Harax and terminal connection
- Module features can be parameterised
- The output module receives the voltage supply for the electronics and the outputs from the interlinking block
- Module protection and diagnosis through integrated electronic fuse protection in each channel



General technical data			CPX-4DA	CPX-8DA
Type			195 754	541 482
Part No.				
No. of outputs			4	8
Max. power supply	per module	[A]	4	
	per channel	[A]	1 (24 W lamp load, 4 channels can be connected in parallel)	0.5 (12 W lamp load, 8 channels can be connected in parallel)
Protection (short circuit)			Internal electronic fuse protection for each channel	
Module current consumption (voltage supply for electronics)		[mA]	Typ. 16	
Supply voltage		[V]	24 DC ±25%	
Electrical isolation	Channel – Channel		No	
	Channel – Internal bus		Yes, using an intermediate supply	
Output characteristic curve			To IEC 1131-2	
Switching logic			Positive logic (PNP)	
LED displays	Group diagnosis		1	1
	Channel diagnosis		4	8
	Channel status		4	8
Diagnosis			<ul style="list-style-type: none"> • Short circuit/overload, channel x • Load voltage of outputs 	
Parameterisation			<ul style="list-style-type: none"> • Module monitoring • Behaviour after short circuit • Failsafe channel x • Forcing channel x • Idle mode channel x 	
Protection class to EN 60529			Depending on connection block	
Temperature range	Operation	[°C]	-5 ... +50	
	Storage/transport	[°C]	-20 ... +70	
Materials			Polymer	
Grid dimension		[mm]	50	
Dimensions (incl. interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50	
Weight		[g]	38	



Terminal CPX

Technical data – Output module, digital

Connection and display components

CPX-4DA

CPX-8DA



- 1 Status LEDs (yellow)
Allocation to outputs
→ Pin allocation for module
- 2 Channel-oriented error LEDs (red)
- 3 Error LED (red, module error)

Connection block/digital output module combinations

Connection blocks	Part No.	Digital output module	
		CPX-4DA	CPX-8DA
CPX-AB-8-M8-3POL	195 706	■	■
CPX-AB-8-M8X2-4POL	541 256	■	■
CPX-AB-4-M12X2-5POL	195 704	■	■
CPX-AB-4-M12X2-5POL-R	541 254	■	■
CPX-AB-4-M12-8POL	526 178	–	–
CPX-AB-8-KL-4POL	195 708	■	■
CPX-AB-1-SUB-BU-25POL	525 676	■	■
CPX-AB-4-HAR-4POL	525 636	■	■

Pin allocation

Connection block outputs	CPX-4DA	CPX-8DA
CPX-AB-8-M8-3POL		
 	<p>X1.1: n.c. X1.3: 0 V_{OUT} X1.4: Output x</p> <p>X2.1: n.c. X2.3: 0 V_{OUT} X2.4: Output x+1/X3.4</p> <p>X3.1: n.c. X3.3: 0 V_{OUT} X3.4: Output x+1/X2.4</p> <p>X4.1: n.c. X4.3: 0 V_{OUT} X4.4: n.c.</p>	<p>X5.1: n.c. X5.3: 0 V_{OUT} X5.4: Output x+2</p> <p>X6.1: n.c. X6.3: 0 V_{OUT} X6.4: Output x+3/X7.4</p> <p>X7.1: n.c. X7.3: 0 V_{OUT} X7.4: Output x+3/X6.4</p> <p>X8.1: n.c. X8.3: 0 V_{OUT} X8.4: n.c.</p>
		<p>X1.1: n.c. X1.3: 0 V_{OUT} X1.4: Output x</p> <p>X2.1: n.c. X2.3: 0 V_{OUT} X2.4: Output x+1</p> <p>X3.1: n.c. X3.3: 0 V_{OUT} X3.4: Output x+2</p> <p>X4.1: n.c. X4.3: 0 V_{OUT} X4.4: Output x+3</p> <p>X5.1: n.c. X5.3: 0 V_{OUT} X5.4: Output x+4</p> <p>X6.1: n.c. X6.3: 0 V_{OUT} X6.4: Output x+5</p> <p>X7.1: n.c. X7.3: 0 V_{OUT} X7.4: Output x+6</p> <p>X8.1: n.c. X8.3: 0 V_{OUT} X8.4: Output x+7</p>

Terminal CPX

Technical data – Output module, digital

Pin allocation				
Connection block outputs		CPX-4DA	CPX-8DA	
CPX-AB-8-M8X2-4POL				
	<p>X1.1: 0 V_{OUT} X1.2: Output x+1/X2.4 X1.3: 0 V_{OUT} X1.4: Output x</p> <p>X2.1: 0 V_{OUT} X2.2: n.c. X2.3: 0 V_{OUT} X2.4: Output x+1/X1.2</p> <p>X3.1: 0 V_{OUT} X3.2: Output x+3/X4.4 X3.3: 0 V_{OUT} X3.4: Output x+2</p> <p>X4.1: 0 V_{OUT} X4.2: n.c. X4.3: 0 V_{OUT} X4.4: Output x+3/X3.2</p>	<p>X5.1: 0 V_{OUT} X5.2: n.c. X5.3: 0 V_{OUT} X5.4: n.c.</p> <p>X6.1: 0 V_{OUT} X6.2: n.c. X6.3: 0 V_{OUT} X6.4: n.c.</p> <p>X7.1: 0 V_{OUT} X7.2: n.c. X7.3: 0 V_{OUT} X7.4: n.c.</p> <p>X8.1: 0 V_{OUT} X8.2: n.c. X8.3: 0 V_{OUT} X8.4: n.c.</p>	<p>X1.1: 0 V_{OUT} X1.2: Output x+1 X1.3: 0 V_{OUT} X1.4: Output x</p> <p>X2.1: 0 V_{OUT} X2.2: Output x+3 X2.3: 0 V_{OUT} X2.4: Output x+2</p> <p>X3.1: 0 V_{OUT} X3.2: Output x+5 X3.3: 0 V_{OUT} X3.4: Output x+4</p> <p>X4.1: 0 V_{OUT} X4.2: Output x+7 X4.3: 0 V_{OUT} X4.4: Output x+6</p>	<p>X5.1: 0 V_{OUT} X5.2: n.c. X5.3: 0 V_{OUT} X5.4: n.c.</p> <p>X6.1: 0 V_{OUT} X6.2: n.c. X6.3: 0 V_{OUT} X6.4: n.c.</p> <p>X7.1: 0 V_{OUT} X7.2: n.c. X7.3: 0 V_{OUT} X7.4: n.c.</p> <p>X8.1: 0 V_{OUT} X8.2: n.c. X8.3: 0 V_{OUT} X8.4: n.c.</p>
CPX-AB-4-M12X2-5POL and CPX-AB-4-M12X2-5POL-R¹⁾				
	<p>X1.1: n.c. X1.2: Output x+1 X1.3: 0 V_{OUT} X1.4: Output x X1.5: FE (earth)</p> <p>X2.1: n.c. X2.2: n.c. X2.3: 0 V_{OUT} X2.4: Output x+1 X2.5: FE (earth)</p>	<p>X3.1: n.c. X3.2: Output x+3 X3.3: 0 V_{OUT} X3.4: Output x+2 X3.5: FE (earth)</p> <p>X4.1: n.c. X4.2: n.c. X4.3: 0 V_{OUT} X4.4: Output x+3 X4.5: FE (earth)</p>	<p>X1.1: n.c. X1.2: Output x+1 X1.3: 0 V_{OUT} X1.4: Output x X1.5: FE (earth)</p> <p>X2.1: n.c. X2.2: Output x+3 X2.3: 0 V_{OUT} X2.4: Output x+2 X2.5: FE (earth)</p>	<p>X3.1: n.c. X3.2: Output x+5 X3.3: 0 V_{OUT} X3.4: Output x+4 X3.5: FE (earth)</p> <p>X4.1: n.c. X4.2: Output x+7 X4.3: 0 V_{OUT} X4.4: Output x+6 X4.5: FE (earth)</p>
CPX-AB-8-KL-4POL				
	<p>X1.0: n.c. X1.1: 0 V_{OUT} X1.2: Output x X1.3: FE (earth)</p> <p>X2.0: n.c. X2.1: 0 V_{OUT} X2.2: Output x+1 X2.3: FE (earth)</p> <p>X3.0: n.c. X3.1: 0 V_{OUT} X3.2: Output x+1 X3.3: FE (earth)</p> <p>X4.0: n.c. X4.1: 0 V_{OUT} X4.2: n.c. X4.3: FE (earth)</p>	<p>X5.0: n.c. X5.1: 0 V_{OUT} X5.2: Output x+2 X5.3: FE (earth)</p> <p>X6.0: n.c. X6.1: 0 V_{OUT} X6.2: Output x+3 X6.3: FE (earth)</p> <p>X7.0: n.c. X7.1: 0 V_{OUT} X7.2: Output x+3 X7.3: FE (earth)</p> <p>X8.0: n.c. X8.1: 0 V_{OUT} X8.2: n.c. X8.3: FE (earth)</p>	<p>X1.0: n.c. X1.1: 0 V_{OUT} X1.2: Output x X1.3: FE (earth)</p> <p>X2.0: n.c. X2.1: 0 V_{OUT} X2.2: Output x+1 X2.3: FE (earth)</p> <p>X3.0: n.c. X3.1: 0 V_{OUT} X3.2: Output x+2 X3.3: FE (earth)</p> <p>X4.0: n.c. X4.1: 0 V_{OUT} X4.2: Output x+3 X4.3: FE (earth)</p>	<p>X5.0: n.c. X5.1: 0 V_{OUT} X5.2: Output x+4 X5.3: FE (earth)</p> <p>X6.0: n.c. X6.1: 0 V_{OUT} X6.2: Output x+5 X6.3: FE (earth)</p> <p>X7.0: n.c. X7.1: 0 V_{OUT} X7.2: Output x+6 X7.3: FE (earth)</p> <p>X8.0: n.c. X8.1: 0 V_{OUT} X8.2: Output x+7 X8.3: FE (earth)</p>

1) Speedcon quick lock, screen additionally on metal thread

Terminal CPX

Technical data – Output module, digital












Pin allocation				
Connection block outputs	CPX-4DA	CPX-8DA		
CPX-AB-1-SUB-BU-25POL				
	1: Output x 2: Output x+1 3: Output x+1 4: n.c. 5: n.c. 6: 0 V _{OUT} 7: n.c. 8: 0 V _{OUT} 9: n.c. 10: n.c. 11: 0 V _{OUT} 12: 0 V _{OUT} 13: FE (earth)	14: Output x+2 15: Output x+3 16: Output x+3 17: n.c. 18: n.c. 19: n.c. 20: n.c. 21: n.c. 22: 0 V _{OUT} 23: 0 V _{OUT} 24: 0 V _{OUT} 25: FE (earth) Socket: FE (earth)	1: Output x 2: Output x+1 3: Output x+2 4: Output x+3 5: n.c. 6: 0 V _{OUT} 7: n.c. 8: 0 V _{OUT} 9: n.c. 10: n.c. 11: 0 V _{OUT} 12: 0 V _{OUT} 13: FE (earth)	14: Output x+4 15: Output x+5 16: Output x+6 17: Output x+7 18: n.c. 19: n.c. 20: n.c. 21: n.c. 22: 0 V _{OUT} 23: 0 V _{OUT} 24: 0 V _{OUT} 25: FE (earth) Socket: FE (earth)
CPX-AB-4-HAR-4POL				
	X1.1: n.c. X1.2: Output x+1/X2.4 X1.3: 0 V _{OUT} X1.4: Output x X2.1: n.c. X2.2: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1/X1.2	X3.1: n.c. X3.2: Output x+3/X4.4 X3.3: 0 V _{OUT} X3.4: Output x+2 X4.1: n.c. X4.2: n.c. X4.3: 0 V _{OUT} X4.4: Output x+3/X3.2	X1.1: n.c. X1.2: Output x+1 X1.3: 0 V _{OUT} X1.4: Output x X2.1: n.c. X2.2: Output x+3 X2.3: 0 V _{OUT} X2.4: Output x+2	X3.1: n.c. X3.2: Output x+5 X3.3: 0 V _{OUT} X3.4: Output x+4 X4.1: n.c. X4.2: Output x+7 X4.3: 0 V _{OUT} X4.4: Output x+6

Terminal CPX

Accessories – Output module, digital



FESTO

Ordering data				
Designation			Type	Part No.
Plug				
	Push-in T-connector	2x socket M8, 3-pin 1x plug M8, 4-pin	NEDU-M8D3-M8T4	544 391
	Push-in T-connector	2x socket M12, 5-pin 1x plug M12, 4-pin	NEDU-M12D5-M12T4	541 596
		2x socket M8, 3-pin 1x plug M12, 4-pin	NEDU-M8D3-M12T4	541 597
	Plug	M8, solderable	SEA-GS-M8	18 696
		M8, screw-in	SEA-3GS-M8-S	192 009
		M12, PG7	SEA-GS-7	18 666
		M12, PG7, 4-pin for cable Ø 2.5 mm	SEA-4GS-7-2,5	192 008
		M12, PG9	SEA-GS-9	18 778
		M12 for 2 cables	SEA-GS-11-DUO	18 779
		M12 for 2 cables, 5-pin	SEA-5GS-11-DUO	192 010
	HARAX plug, 4-pin	M12, 5-pin	SEA-M12-5GS-PG7	175 487
			SEA-GS-HAR-4POL	525 928
	Sub-D plug, 25-pin		SD-SUB-D-ST25	527 522
Cable				
	Connecting cable M8-M8	0.5 m	KM8-M8-GSGD-0,5	175 488
		1.0 m	KM8-M8-GSGD-1	175 489
		2.5 m	KM8-M8-GSGD-2,5	165 610
		5.0 m	KM8-M8-GSGD-5	165 611
	Connecting cable M8-M12	1.0 m	KM8-M12-GSGD-1	187 859
		2.5 m	KM8-M12-GSGD-2,5	187 860
		5.0 m	KM8-M12-GSGD-5	187 861
	Connecting cable M12-M12	2.5 m	KM12-M12-GSGD-2,5	18 684
5.0 m		KM12-M12-GSGD-5	18 686	
1.0 m		KM12-M12-GSWD-1-4	185 499	
	Modular system for connecting cables		NEBU-... → 4 / 8.3-18	–
	DUO cable M12	2x straight socket	KM12-DUO-M8-GDGD	18 685
		2x straight/angled socket	KM12-DUO-M8-GDWD	18 688
		2x angled socket	KM12-DUO-M8-WDWD	18 687
Cover				
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable feeds M9 – 1 cable feed for multi-pin plug		AK-8KL	538 219
	Fittings kit		VG-K-M9	538 220

Terminal CPX

Accessories – Output module, digital



Ordering data				
Designation	Type	Part No.		
Screening plate				
	Screening plate for M12 connections	CPX-AB-S-4-M12	526 184	
User's manual				
	User's manual	German	P.BE-CPX-EA-DE	526 439
		English	P.BE-CPX-EA-EN	526 440
		Spanish	P.BE-CPX-EA-ES	526 441
		French	P.BE-CPX-EA-FR	526 442
		Italian	P.BE-CPX-EA-IT	526 443
		Swedish	P.BE-CPX-EA-SV	526 444

Terminal CPX


Technical data – Input/output module, digital

Applications

- Digital multi I/O module for 24 V DC supply voltage
- Supports connection blocks with Sub-D, terminal connection and M12 connection (8-pin)
- Module features can be parameterised
- The inputs receive the voltage supply for the electronics and the sensors from the interlinking block
- The outputs receive the voltage supply for the electronics and outputs from the interlinking block
- Module protection and diagnosis through integrated electronic fuse protection for the sensor power supply and integrated electronic fuse protection in each output channel



Function

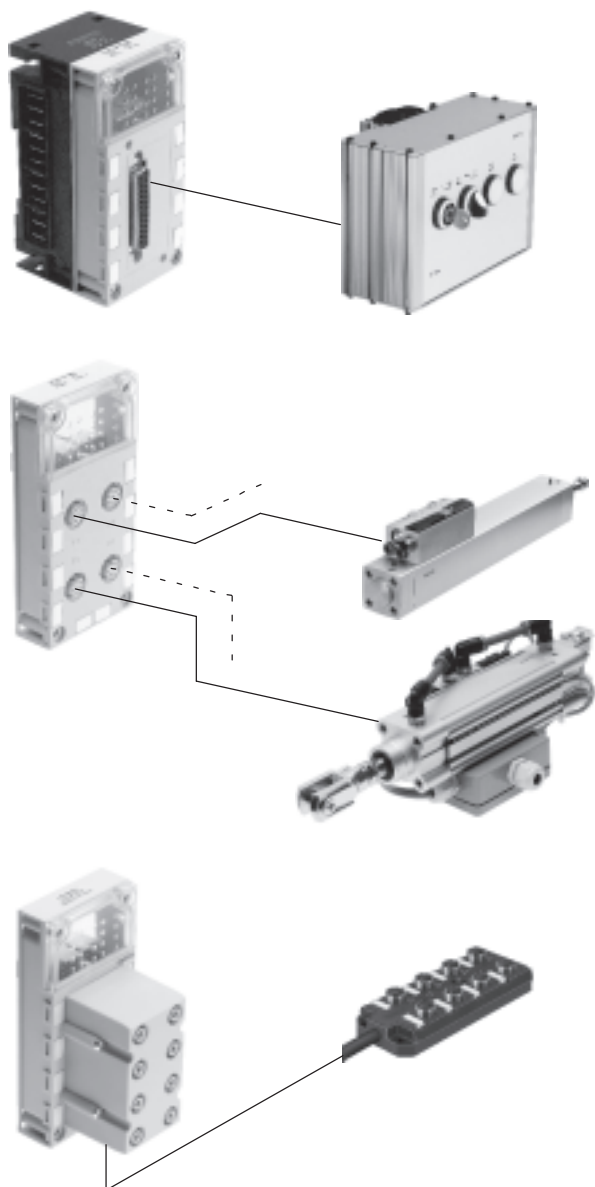

The multi I/O module controls devices with a high number of inputs and outputs per connection point.

Because the module supports Sub-D connection blocks, consoles with pushbuttons and lamps can be connected to the CPX terminal using a minimal amount of installation space.

Up to 8 inputs and outputs can be connected to a connection point with IP65 protection.

Support for the M12 connection block (8-pin) means that up to 4 cylinder-valve combinations with integrated sensors can be connected. 2 inputs and 2 outputs per socket are supported for each cylinder-valve combination. It is therefore possible to control max. 2 solenoid coils and operate 2 sensors with a pre-assembled cable.

Two inputs on two sockets are bridged to provide support for the diagnostic module of the cylinder-valve combination. This effectively means that there are 3 inputs and 2 outputs available on 2 sockets.

As an alternative to the Sub-D and M12 connection block (8-pin) for installation with IP65 protection, the terminal connection block produces an identical result for installation with IP20 protection – or with IP65/67 protection with additional cover.

Subordinate I/O modules with multi-pin plug connection (Sub-D plug or multi-pin cable for self-assembly) support the cost-effective and space-saving integration of critical installation areas such as chain link trunking or upstream functions.

Terminal CPX

Technical data – Input/output module, digital




General technical data			
Type	CPX-8DE-8DA		
Part No.	526 257		
Number	Inputs		8
	Outputs		8
Max. power supply per module	Sensor supply	[A]	0.5
	Outputs	[A]	4
Max. power supply per channel	Sensor supply	[A]	0.5
	Outputs	[A]	0.5
Max. power supply per channel		[A]	0.5 (24 W lamp load, 4 channels can be connected in parallel)
Fuse protection	Sensor supply		Internal electronic fuse protection for sensor supply
	Outputs		Internal electronic fuse protection for each channel
Internal electronics current consumption	Inputs	[mA]	Typically 22
	Outputs	[mA]	Typically 34
Supply voltage	Sensors	[V]	24 DC ±25%
	Outputs	[V]	24 DC ±25%
Electrical isolation, inputs	Channel – Channel		No
	Channel – Internal bus		No
Electrical isolation, outputs	Channel – Channel		No
	Channel – Internal bus		Yes, using an intermediate supply
Characteristic curve	Inputs		IEC 1131-2
	Outputs		To IEC 1131-2
Switching level, inputs	Signal 0	[V]	≤ 5 DC
	Signal 1	[V]	≥ 11 DC
Switch-on debounce time		[ms]	3 (0.1, 10, 20 parameterisable)
Switching logic	Positive logic (PNP)		
LED displays	Group diagnosis		1
	Channel diagnosis		–
	Channel status		16
Diagnosis	Inputs		<ul style="list-style-type: none"> • Short circuit/overload, sensor supply
	Outputs		<ul style="list-style-type: none"> • Short circuit/overload, output channel x • Load voltage of outputs
Parameterisation	Inputs		<ul style="list-style-type: none"> • Module monitoring • Behaviour after short circuit, sensor supply • Switch-on debounce time • Signal stretching time, inputs
	Outputs		<ul style="list-style-type: none"> • Behaviour after short circuit • Failsafe channel x • Forcing channel x • Idle mode channel x
Protection class to EN 60529	Depending on connection block		
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials	Polymer		
Grid dimension		[mm]	50
Dimensions (incl. interlinking block and connection block) W x L x H		[mm]	50 x 107 x 50
Weight		[g]	38

Terminal CPX

Technical data – Input/output module, digital

Connection and display components



- 1 Status LEDs (green)
Allocation to inputs
→ Pin allocation for module
- 2 Status LEDs (yellow)
Allocation to outputs
→ Pin allocation for module
- 3 Error LED (red)
(module error)

Connection block/digital input/output module combinations

Connection blocks	Part No.	Digital I/O module
		CPX-8DE-8DA
CPX-AB-8-M8-3POL	195 706	–
CPX-AB-8-M8X2-4POL	541 256	–
CPX-AB-4-M12X2-5POL	195 704	–
CPX-AB-4-M12X2-5POL-R	541 254	–
CPX-AB-4-M12-8POL	526 178	■
CPX-AB-8-KL-4POL	195 708	■
CPX-AB-1-SUB-BU-25POL	525 676	■
CPX-AB-4-HAR-4POL	525 636	–

Pin allocation

Connection block inputs/outputs	CPX-8DE-8DA
---------------------------------	-------------

CPX-AB-4-M12-8POL		
	<p>X1.1: 24 V_{SEN} X1.2: Input x X1.3: Input x+1 X1.4: 0 V_{SEN} X1.5: Output x X1.6: Output x+1 X1.7: Input x+4 X1.8: 0 V_{OUT}</p> <p>X2.1: 24 V_{SEN} X2.2: Input x+2 X2.3: Input x+3 X2.4: 0 V_{SEN} X2.5: Output x+2 X2.6: Output x+3 X2.7: Input x+6 X2.8: 0 V_{OUT}</p>	<p>X3.1: 24 V_{SEN} X3.2: Input x+4 X3.3: Input x+5 X3.4: 0 V_{SEN} X3.5: Output x+4 X3.6: Output x+5 X3.7: n.c. X3.8: 0 V_{OUT}</p> <p>X4.1: 24 V_{SEN} X4.2: Input x+6 X4.3: Input x+7 X4.4: 0 V_{SEN} X4.5: Output x+6 X4.6: Output x+7 X4.7: n.c. X4.8: 0 V_{OUT}</p>

Terminal CPX






Technical data – Input/output module, digital



Pin allocation																																	
Connection block inputs/outputs	CPX-8DE-8DA																																
CPX-AB-8-KL-4POL																																	
	<table border="0"> <tr> <td>X1.0: 24 V_{SEN}</td> <td>X5.0: Output x+4</td> </tr> <tr> <td>X1.1: 0 V_{SEN}</td> <td>X5.1: 0 V_{OUT}</td> </tr> <tr> <td>X1.2: Input x</td> <td>X5.2: Output x</td> </tr> <tr> <td>X1.3: FE (earth)</td> <td>X5.3: FE (earth)</td> </tr> <tr> <td>X2.0: Input x+4</td> <td>X6.0: Output x+5</td> </tr> <tr> <td>X2.1: Input x+5</td> <td>X6.1: 0 V_{OUT}</td> </tr> <tr> <td>X2.2: Input x+1</td> <td>X6.2: Output x+1</td> </tr> <tr> <td>X2.3: FE (earth)</td> <td>X6.3: FE (earth)</td> </tr> <tr> <td>X3.0: 24 V_{SEN}</td> <td>X7.0: Output x+6</td> </tr> <tr> <td>X3.1: 0 V_{SEN}</td> <td>X7.1: 0 V_{OUT}</td> </tr> <tr> <td>X3.2: Input x+2</td> <td>X7.2: Output x+2</td> </tr> <tr> <td>X3.3: FE (earth)</td> <td>X7.3: FE (earth)</td> </tr> <tr> <td>X4.0: Input x+6</td> <td>X8.0: Output x+7</td> </tr> <tr> <td>X4.1: Input x+7</td> <td>X8.1: 0 V_{OUT}</td> </tr> <tr> <td>X4.2: Input x+3</td> <td>X8.2: Output x+3</td> </tr> <tr> <td>X4.3: FE (earth)</td> <td>X8.3: FE (earth)</td> </tr> </table>	X1.0: 24 V _{SEN}	X5.0: Output x+4	X1.1: 0 V _{SEN}	X5.1: 0 V _{OUT}	X1.2: Input x	X5.2: Output x	X1.3: FE (earth)	X5.3: FE (earth)	X2.0: Input x+4	X6.0: Output x+5	X2.1: Input x+5	X6.1: 0 V _{OUT}	X2.2: Input x+1	X6.2: Output x+1	X2.3: FE (earth)	X6.3: FE (earth)	X3.0: 24 V _{SEN}	X7.0: Output x+6	X3.1: 0 V _{SEN}	X7.1: 0 V _{OUT}	X3.2: Input x+2	X7.2: Output x+2	X3.3: FE (earth)	X7.3: FE (earth)	X4.0: Input x+6	X8.0: Output x+7	X4.1: Input x+7	X8.1: 0 V _{OUT}	X4.2: Input x+3	X8.2: Output x+3	X4.3: FE (earth)	X8.3: FE (earth)
X1.0: 24 V _{SEN}	X5.0: Output x+4																																
X1.1: 0 V _{SEN}	X5.1: 0 V _{OUT}																																
X1.2: Input x	X5.2: Output x																																
X1.3: FE (earth)	X5.3: FE (earth)																																
X2.0: Input x+4	X6.0: Output x+5																																
X2.1: Input x+5	X6.1: 0 V _{OUT}																																
X2.2: Input x+1	X6.2: Output x+1																																
X2.3: FE (earth)	X6.3: FE (earth)																																
X3.0: 24 V _{SEN}	X7.0: Output x+6																																
X3.1: 0 V _{SEN}	X7.1: 0 V _{OUT}																																
X3.2: Input x+2	X7.2: Output x+2																																
X3.3: FE (earth)	X7.3: FE (earth)																																
X4.0: Input x+6	X8.0: Output x+7																																
X4.1: Input x+7	X8.1: 0 V _{OUT}																																
X4.2: Input x+3	X8.2: Output x+3																																
X4.3: FE (earth)	X8.3: FE (earth)																																
CPX-AB-1-SUB-BU-25POL																																	
	<table border="0"> <tr> <td>1: Input x</td> <td>14: Output x</td> </tr> <tr> <td>2: Input x+1</td> <td>15: Output x+1</td> </tr> <tr> <td>3: Input x+2</td> <td>16: Output x+2</td> </tr> <tr> <td>4: Input x+3</td> <td>17: Output x+3</td> </tr> <tr> <td>5: Input x+4</td> <td>18: Output x+4</td> </tr> <tr> <td>6: Input x+5</td> <td>19: Output x+5</td> </tr> <tr> <td>7: Input x+6</td> <td>20: Output x+6</td> </tr> <tr> <td>8: Input x+7</td> <td>21: Output x+7</td> </tr> <tr> <td>9: 24 V_{SEN}</td> <td>22: 0 V_{OUT}</td> </tr> <tr> <td>10: 24 V_{SEN}</td> <td>23: 0 V_{OUT}</td> </tr> <tr> <td>11: 0 V_{SEN}</td> <td>24: 0 V_{OUT}</td> </tr> <tr> <td>12: 0 V_{SEN}</td> <td>25: FE (earth)</td> </tr> <tr> <td>13: FE (earth)</td> <td>Socket: FE (earth)</td> </tr> </table>	1: Input x	14: Output x	2: Input x+1	15: Output x+1	3: Input x+2	16: Output x+2	4: Input x+3	17: Output x+3	5: Input x+4	18: Output x+4	6: Input x+5	19: Output x+5	7: Input x+6	20: Output x+6	8: Input x+7	21: Output x+7	9: 24 V _{SEN}	22: 0 V _{OUT}	10: 24 V _{SEN}	23: 0 V _{OUT}	11: 0 V _{SEN}	24: 0 V _{OUT}	12: 0 V _{SEN}	25: FE (earth)	13: FE (earth)	Socket: FE (earth)						
1: Input x	14: Output x																																
2: Input x+1	15: Output x+1																																
3: Input x+2	16: Output x+2																																
4: Input x+3	17: Output x+3																																
5: Input x+4	18: Output x+4																																
6: Input x+5	19: Output x+5																																
7: Input x+6	20: Output x+6																																
8: Input x+7	21: Output x+7																																
9: 24 V _{SEN}	22: 0 V _{OUT}																																
10: 24 V _{SEN}	23: 0 V _{OUT}																																
11: 0 V _{SEN}	24: 0 V _{OUT}																																
12: 0 V _{SEN}	25: FE (earth)																																
13: FE (earth)	Socket: FE (earth)																																

Terminal CPX

Accessories – Input/output module, digital

Ordering data				
Designation		Type	Part No.	
Plug				
	Sub-D plug, 25-pin	SD-SUB-D-ST25	527 522	
Cable				
	Connecting cable M12	KM12-8GD8GS-2-PU	525 617	
Cover				
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable feeds M9 – 1 cable feed for multi-pin plug	AK-8KL	538 219	
	Fittings kit	VG-K-M9	538 220	
Screening plate				
	Screening plate for M12 connections	CPX-AB-S-4-M12	526 184	
User's manual				
	User's manual	German	P.BE-CPX-EA-DE	526 439
		English	P.BE-CPX-EA-EN	526 440
		Spanish	P.BE-CPX-EA-ES	526 441
		French	P.BE-CPX-EA-FR	526 442
		Italian	P.BE-CPX-EA-IT	526 443
		Swedish	P.BE-CPX-EA-SV	526 444

Terminal CPX

Technical data – Analogue module for inputs

Function

Analogue modules control devices with a standard analogue interface such as pressure switches, temperature, flow rate, filling level, etc. Depending on the connection block selected, the analogue module supports various connection concepts with different numbers of sockets or clamps.

Application

- Analogue module for 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA
- Supports connection blocks with M12, Sub-D and terminal connection
- Analogue module features can be parameterised
- Different data formats available
- Operation with and without electrical isolation possible
- The analogue module receives the voltage supply for the electronics and the sensors from the interlinking block
- Analogue module protection and diagnosis through integrated electronic fuse protection




General technical data			
Type	CPX-2AE-U-I		CPX-4AE-I
Part No.	526 168		541 484
	Voltage input	Current input	Current input
No. of analogue inputs	2		Choice of 2 or 4
Max. power supply per module [A]	0.7		
Fuse protection	Internal electronic fuse protection for sensor supply		
Current consumption from 24 V sensor supply (quiescent current) [mA]	Typically 50		
Current consumption from 24 V sensor supply (at full load) [A]	Max. 0.7		
Supply voltage of sensors [V]	24 DC ±25%		
Signal range (parameterisable for each channel by means of DIL switch or software)	0 ... 10 V DC	0 ... 20 mA 4 ... 20 mA	0 ... 20 mA 4 ... 20 mA
Resolution	12 bit		
No. of units	4096		
Absolute accuracy [%]	±0.5	±0.6	±0.6
Linearity errors (no software scaling) [%]	±0.05	±0.05	±0.05
Repetition accuracy (at 25 °C) [%]	0.15	0.15	0.15
Input resistance	100 kΩ	≤ 100 Ω	≤ 100 Ω
Max. permissible input voltage [V]	30 DC	–	–
Max. permissible input current [mA]	–	40	40
Conversion time per channel [µs]	Typically 150		
Cycle time (module) [ms]	≤ 4		≤ 10

Terminal CPX

Technical data – Analogue module for inputs

General technical data		
Type		CPX-2AE-U-I
Part No.		526 168
		CPX-4AE-I
		541 484
Data format	Prefix + 15 bit, linear scaling Prefix +12 bit right-justified, type 03 compatible Prefix + 15 bit left-aligned, S7 compatible Prefix + 12 bit left-aligned + diagnosis, S5 compatible	
Cable length	Max. 30 m (screened)	
Electrical isolation	Channel – Channel	No
	Channel – Internal bus	Yes, with external sensor supply
	Channel – Sensor supply	Yes, with external sensor supply
LED displays	Group diagnosis	1
	Channel diagnosis	Yes, by means of flashing frequency of group diagnosis
Diagnosis	<ul style="list-style-type: none"> • Short circuit/overload, sensor supply • Parameterisation errors • Value falling below nominal range/full-scale value • Value exceeding nominal range/full-scale value • Wire break (with measuring range 4 ... 20 mA) 	
Parameterisation	<ul style="list-style-type: none"> • Short circuit monitoring, sensor supply • Behaviour after short circuit, sensor supply • Data format • Lower limit value/full-scale value • Upper limit value/full-scale value • Monitoring of value falling below nominal range/full-scale value • Monitoring of value exceeding nominal range/full-scale value • Monitoring of wire break (with measuring range 4 ... 20 mA) • Signal range • Measured value smoothing 	
Protection class to EN 60529	Depending on connection block	
Temperature range	Operation	[°C] -5 ... +50
	Storage/transport	[°C] -20 ... +70
Materials	Polymer	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50
Weight	[g]	38

Internal structure, basic representation

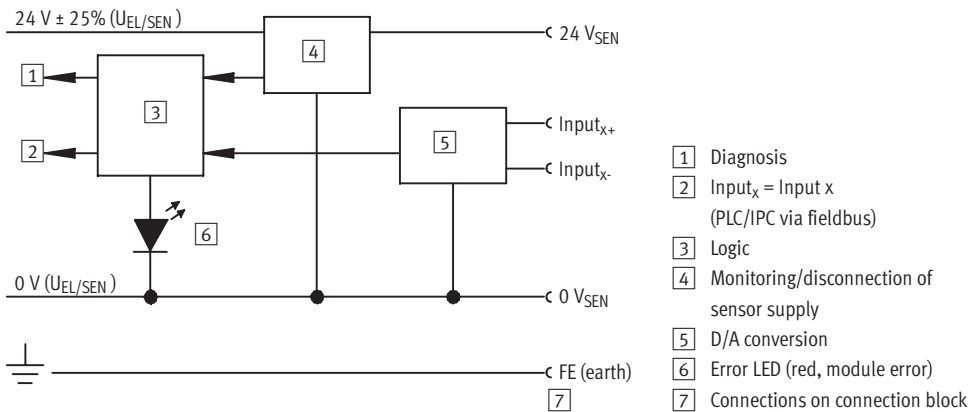


Terminal CPX

Technical data – Analogue module for inputs



Connection and display components

CPX-2AE-U-I and CPX-4AE-I



1 Error LED (red, module error)

Connection block/analogue module combinations

Manifold blocks	Part No.	Analogue module	
		CPX-2AE-U-I	CPX-4AE-I
CPX-AB-8-M8-3POL	195 706	–	–
CPX-AB-8-M8X2-4POL	541 256	–	–
CPX-AB-4-M12X2-5POL	195 704	■	■
CPX-AB-4-M12X2-5POL-R	541 254	■	■
CPX-AB-4-M12-8POL	526 178	–	–
CPX-AB-8-KL-4POL	195 708	■	■
CPX-AB-1-SUB-BU-25POL	525 676	■	■
CPX-AB-4-HAR-4POL	525 636	–	–

Pin allocation


Connection block inputs	CPX-2AE-U-I	CPX-4AE-I		
CPX-AB-4-M12X2-5POL and CPX-AB-4-M12X2-5POL-R ¹⁾				
	X1.1: 24 V _{SEN} X1.2: Input U0+ X1.3: 0 V _{SEN} X1.4: Input U0– X1.5: FE (earth) ²⁾	X3.1: 24 V _{SEN} X3.2: Input U1+ X3.3: 0 V _{SEN} X3.4: Input U1– X3.5: FE (earth) ²⁾	X1.1: 24 V _{SEN} X1.2: Input I0+ X1.3: 0 V _{SEN} X1.4: Input I0– X1.5: FE (earth) ²⁾	X3.1: 24 V _{SEN} X3.2: Input I2+ X3.3: 0 V _{SEN} X3.4: Input I2– X3.5: FE (earth) ²⁾
	X2.1: 24 V _{SEN} X2.2: Input I0+ X2.3: 0 V _{SEN} X2.4: Input I0– X2.5: FE (earth) ²⁾	X4.1: 24 V _{SEN} X4.2: Input I1+ X4.3: 0 V _{SEN} X4.4: Input I1– X4.5: FE (earth) ²⁾	X2.1: 24 V _{SEN} X2.2: Input I1+ X2.3: 0 V _{SEN} X2.4: Input I1– X2.5: FE (earth) ²⁾	X4.1: 24 V _{SEN} X4.2: Input I3+ X4.3: 0 V _{SEN} X4.4: Input I3– X4.5: FE (earth) ²⁾
CPX-AB-8-KL-4POL				
	X1.0: 24 V _{SEN} X1.1: 0 V _{SEN} X1.2: Input U0– X1.3: FE (earth)	X5.0: 24 V _{SEN} X5.1: 0 V _{SEN} X5.2: Input U1– X5.3: FE (earth)	X1.0: 24 V _{SEN} X1.1: 0 V _{SEN} X1.2: Input I0– X1.3: FE (earth)	X5.0: 24 V _{SEN} X5.1: 0 V _{SEN} X5.2: Input I2– X5.3: FE (earth)
	X2.0: n.c. X2.1: n.c. X2.2: Input U0+ X2.3: FE (earth)	X6.0: n.c. X6.1: n.c. X6.2: Input U1+ X6.3: FE (earth)	X2.0: n.c. X2.1: n.c. X2.2: Input I0+ X2.3: FE (earth)	X6.0: n.c. X6.1: n.c. X6.2: Input I2+ X6.3: FE (earth)
	X3.0: 24 V _{SEN} X3.1: 0 V _{SEN} X3.2: Input I0– X3.3: FE (earth)	X7.0: 24 V _{SEN} X7.1: 0 V _{SEN} X7.2: Input I1– X7.3: FE (earth)	X3.0: 24 V _{SEN} X3.1: 0 V _{SEN} X3.2: Input I1– X3.3: FE (earth)	X7.0: 24 V _{SEN} X7.1: 0 V _{SEN} X7.2: Input I3– X7.3: FE (earth)
	X4.0: n.c. X4.1: n.c. X4.2: Input I0+ X4.3: FE (earth)	X8.0: n.c. X8.1: n.c. X8.2: Input I1+ X8.3: FE (earth)	X4.0: n.c. X4.1: n.c. X4.2: Input I1+ X4.3: FE (earth)	X8.0: n.c. X8.1: n.c. X8.2: Input I3+ X8.3: FE (earth)

1) Speedcon quick lock, screen additionally on metal thread






2) FE/screen additionally on metal thread

Terminal CPX

Technical data – Analogue module for inputs

Pin allocation					
Connection block inputs		CPX-2AE-U-I	CPX-4AE-I		
CPX-AB-1-SUB-BU-25POL					
	1:	Input U0-	14:	Input U1-	
	2:	Input U0+	15:	Input U1+	
	3:	Input I0-	16:	Input I1-	
	4:	Input I1+	17:	Input I1+	
	5:	n.c.	18:	24 V _{SEN}	
	6:	n.c.	19:	n.c.	
	7:	n.c.	20:	24 V _{SEN}	
	8:	n.c.	21:	n.c.	
	9:	24 V _{SEN}	22:	0 V _{SEN}	
	10:	24 V _{SEN}	23:	0 V _{SEN}	
	11:	0 V _{SEN}	24:	0 V _{SEN}	
	12:	0 V _{SEN}	25:	FE (earth)	
	13:	Screen ¹⁾	Socket:	FE (earth)	
		1:	Input I0-	14:	Input I2-
		2:	Input I0+	15:	Input I2+
		3:	Input I1-	16:	Input I3-
		4:	Input I1+	17:	Input I3+
		5:	n.c.	18:	24 V _{SEN}
		6:	n.c.	19:	n.c.
		7:	n.c.	20:	24 V _{SEN}
		8:	n.c.	21:	n.c.
		9:	24 V _{SEN}	22:	0 V _{SEN}
		10:	24 V _{SEN}	23:	0 V _{SEN}
		11:	0 V _{SEN}	24:	0 V _{SEN}
		12:	0 V _{SEN}	25:	FE (earth)
		13:	Screen ¹⁾	Socket:	FE (earth)

1) Connect screening to functional earth FE

Ordering data			
Designation		Type	Part No.
Plug			
	M12 plug, 5-pin	SEA-M12-5GS-PG7	175 487
	Sub-D plug, 25-pin	SD-SUB-D-ST25	527 522
Cover			
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug	AK-8KL	538 219
	Fittings kit	VG-K-M9	538 220
Screening plate			
	Screening plate for M12 connections	CPX-AB-S-4-M12	526 184
User documentation			
	User documentation	German	P.BE-CPX-AX-DE 526 415
		English	P.BE-CPX-AX-EN 526 416
		Spanish	P.BE-CPX-AX-ES 526 417
		French	P.BE-CPX-AX-FR 526 418
		Italian	P.BE-CPX-AX-IT 526 419
		Swedish	P.BE-CPX-AX-SV 526 420

Terminal CPX

Technical data – Analogue module for temperature inputs

Function

The CPX-PT100 analogue input module with 4 channels for temperature measurement allows the connection of up to 4 temperature sensors of type PT100-PT1000, Ni100-Ni1000 etc. Depending on the connection block selected, the temperature module supports various connection concepts with different numbers of sockets or clamps.

Applications

- Temperature module for temperature sensors PT100, PT200, PT500, PT1000, Ni100, Ni120, Ni500, Ni1000
- Supports connection blocks with M12, Harax and terminal connection
- Temperature module features can be parameterised
- 2-wire, 3-wire and 4-wire connection
- The temperature module receives the voltage supply for the electronics and the sensors from the interlinking block
- Temperature module protection and diagnosis through integrated electronic fuse protection



General technical data			
Type	CPX-4AE-T		
Part No.	541 486		
	Temperature input		
No. of analogue inputs	Choice of 2 or 4		
Max. power supply per module	[A]	0.7	
Fuse protection	Internal electronic fuse protection for sensor supply		
Current consumption from 24 V sensor supply (quiescent current)	[mA]	Typically 50	
Supply voltage of sensors	[V]	24 DC ±25%	
Sensor type (parameterisable for each channel by means of DIL switch)	PT100, PT200, PT500, PT1000 Ni100, Ni120, Ni500, Ni1000		
Temperature range	Pt standard	[°C]	-200 ... +850
	Pt climatic	[°C]	-120 ... +130
	Ni	[°C]	-60 ... +180
Sensor connection technology	2-wire, 3-wire and 4-wire technology		
Resolution	15 bit + prefix		
Operating error limit relative to input range	[%]	±0.06	
Basic error limit (25°C)	Standard	[K]	±0.6
	Pt climatic	[K]	±0.2
Temperature errors relative to input range	[%]	±0.001	
Linearity errors (no software scaling)	[%]	±0.02	
Repetition accuracy (at 25 °C)	[%]	±0.05	
Max. line resistance per conductor	[Ω]	10	
Max. permissible input voltage	[V]	±30	
Cycle time (module)	[ms]	≤ 250	


Terminal CPX

Technical data – Analogue module for temperature inputs

General technical data		
Type	CPX-4AE-T	
Part No.	541 486	
Data format	15 bit + prefix, complement of two, binary notation in tenths of a degree	
Line length	Max. 200 m (screened)	
Electrical isolation	Channel – Channel	No
	Channel – Internal bus	Yes
LED displays	Group diagnosis	1
	Channel diagnosis	4
Diagnosis	<ul style="list-style-type: none"> • Short circuit/overload channel • Parameterisation errors • Value falling below nominal range/full-scale value • Value exceeding nominal range/full-scale value • Wire break 	
Parameterisation	<ul style="list-style-type: none"> • Unit of measurement and interference frequency suppression • Diagnostic message in the event of a wire break or short circuit • Limit monitoring per channel • Sensor connection technology • Sensor type/temperature coefficient, temperature range • Limit value per channel • Measured value smoothing 	
Protection class to EN 60529	Depending on connection block	
Temperature range	Operation	[°C] –5 ... +50
	Storage/transport	[°C] –20 ... +70
Materials	Polymer	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50
Weight	[g]	38

Connection and display components




CPX-4AE-T

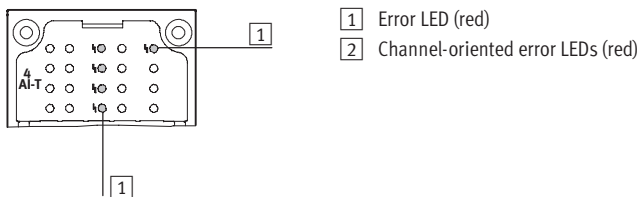

Connection block/analogue module combinations		
Connection blocks	Part No.	Temperature module
		CPX-4AE-T
CPX-AB-8-M8-3POL	195 706	–
CPX-AB-8-M8X2-4POL	541 256	–
CPX-AB-4-M12X2-5POL	195 704	■
CPX-AB-4-M12X2-5POL-R	541 254	■
CPX-AB-4-M12-8POL	526 178	–
CPX-AB-8-KL-4POL	195 708	■
CPX-AB-1-SUB-BU-25POL	525 676	–
CPX-AB-4-HAR-4POL	525 636	■

Terminal CPX

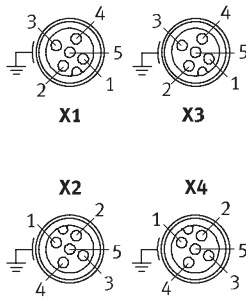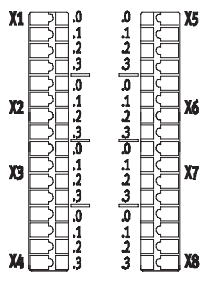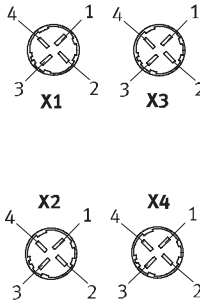




Technical data – Analogue module for temperature inputs

Pin allocation		
Inputs, connection block	CPX-4AE-I	
CPX-AB-4-M1 2X2-5POL and CPX-AB-4-M1 2X2-5POL-R ¹⁾		
 <p>X1 X3</p> <p>X2 X4</p>	<p>X1.1: Input I0+</p> <p>X1.2: Input U0+</p> <p>X1.3: Input I0-</p> <p>X1.4: Input U0-</p> <p>X1.5: FE (earth)²⁾</p> <p>X2.1: Input I1+</p> <p>X2.2: Input U1+</p> <p>X2.3: Input I1-</p> <p>X2.4: Input U1-</p> <p>X2.5: FE (earth)²⁾</p>	<p>X3.1: Input I2+</p> <p>X3.2: Input U2+</p> <p>X3.3: Input I2-</p> <p>X3.4: Input U2-</p> <p>X3.5: FE (earth)²⁾</p> <p>X4.1: Input I3+</p> <p>X4.2: Input U3+</p> <p>X4.3: Input I3-</p> <p>X4.4: Input U3-</p> <p>X4.5: FE (earth)²⁾</p>
CPX-AB-8-KL-4POL		
 <p>X1 X5</p> <p>X2 X6</p> <p>X3 X7</p> <p>X4 X8</p>	<p>X1.0: Input I0+</p> <p>X1.1: Input I0-</p> <p>X1.2: Input U0-</p> <p>X1.3: FE (earth)</p> <p>X2.0: n.c.</p> <p>X2.1: n.c.</p> <p>X2.2: Input U0+</p> <p>X2.3: FE (earth)</p> <p>X3.0: Input I1+</p> <p>X3.1: Input I1-</p> <p>X3.2: Input U1-</p> <p>X3.3: FE (earth)</p> <p>X4.0: n.c.</p> <p>X4.1: n.c.</p> <p>X4.2: Input U1+</p> <p>X4.3: FE (earth)</p>	<p>X5.0: Input I2+</p> <p>X5.1: Input I2-</p> <p>X5.2: Input U2-</p> <p>X5.3: FE (earth)</p> <p>X6.0: n.c.</p> <p>X6.1: n.c.</p> <p>X6.2: Input U2+</p> <p>X6.3: FE (earth)</p> <p>X7.0: Input I3+</p> <p>X7.1: Input I3-</p> <p>X7.2: Input U3-</p> <p>X7.3: FE (earth)</p> <p>X8.0: n.c.</p> <p>X8.1: n.c.</p> <p>X8.2: Input U3+</p> <p>X8.3: FE (earth)</p>
CPX-AB-4-HAR-4POL		
 <p>X1 X3</p> <p>X2 X4</p>	<p>X1.1: Input I0+</p> <p>X1.2: Input U0+</p> <p>X1.3: Input I0-</p> <p>X1.4: Input U0-</p> <p>X2.1: Input I1+</p> <p>X2.2: Input U1+</p> <p>X2.3: Input I1-</p> <p>X2.4: Input U1-</p>	<p>X3.1: Input I2+</p> <p>X3.2: Input U2+</p> <p>X3.3: Input I2-</p> <p>X3.4: Input U2-</p> <p>X4.1: Input I3+</p> <p>X4.2: Input U3+</p> <p>X4.3: Input I3-</p> <p>X4.4: Input U3-</p>

1) Speedcon quick lock, screen additionally on metal thread
 2) FE/screen additionally on metal thread

Terminal CPX

Accessories – Analogue module for temperature inputs

Ordering data				
Designation		Type	Part No.	
Plug				
	M12 plug, 5-pin	SEA-M12-5GS-PG7	175 487	
	HARAX plug, 4-pin	SEA-GS-HAR-4POL	525 928	
Cover				
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable feeds M9 – 1 cable feed for multi-pin plug	AK-8KL	538 219	
	Fittings kit	VG-K-M9	538 220	
Screening plate				
	Screening plate for M12 connections	CPX-AB-S-4-M12	526 184	
User's manual				
	User's manual	German	P.BE-CPX-AX-DE	526 415
		English	P.BE-CPX-AX-EN	526 416
		Spanish	P.BE-CPX-AX-ES	526 417
		French	P.BE-CPX-AX-FR	526 418
		Italian	P.BE-CPX-AX-IT	526 419
		Swedish	P.BE-CPX-AX-SV	526 420

Terminal CPX

Technical data – Analogue module for outputs

Function

Analogue modules control devices with a standard analogue interface such as proportional valves, etc. Depending on the connection block selected, the analogue module supports various connection concepts with different numbers of sockets or clamps.

Applications

- Analogue module for 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA
- Supports connection blocks with M12, Sub-D and terminal connection
- Analogue module features can be parameterised
- Different data formats available
- Operation with and without electrical isolation possible
- The analogue module receives the voltage supply for the electronics and the actuators from the inter-linking block
- Analogue module protection and diagnosis through integrated electronic fuse protection



General technical data				
Type	CPX-2AA-U-I			
Part No.	526 170			
		Voltage output	Current output	
No. of analogue outputs		2		
Max. actuator supply per module	[A]	2.8		
Fuse protection		Internal electronic fuse protection for actuator supply		
Current consumption from 24 V sensor supply (at full load)	[mA]	Max. 150		
Current consumption from 24 V actuator supply (at full load)	[A]	4 ... 10		
Supply voltage for actuators	[V DC]	24 ±25%		
Signal range (parameterisable for each channel by means of DIL switch or software)		0 ... 10 V DC	0 ... 20 mA 4 ... 2 mA	
Resolution		12 bit		
No. of units		4096		
Absolute accuracy	[%]	±0.6		
Linearity errors (no software scaling)	[%]	±0.1		
Repetition accuracy (at 25 °C)	[%]	0.05		
Encoder selection	Load resistance for ohmic load	[kΩ]	Min. 1	Max. 0.5
	Load resistance for capacitive load	[µF]	Max. 1	–
	Load resistance for inductive load	[mH]	–	Max. 1
	Short circuit protection analogue output		Yes	–
	Short circuit current analogue output	[mA]	Approx. 20	–
	Open circuit voltage	[V DC]	–	18
	Destruction limit against externally applied voltage	[V DC]	15	
	Actuator connection		2 wires	
Cycle time (module)	[ms]	≤ 4		


Terminal CPX

Technical data – Analogue module for outputs

General technical data			
Type	CPX-2AA-U-I		
Part No.	526 170		
	Voltage output	Current output	
Response time	for ohmic load	[ms]	0.1
	for capacitive load	[ms]	0.7
	for inductive load	[ms]	–
Data format	15 bit + prefix, linear scaling 12 bit right-justified, type 03 compatible 12 bit left-aligned, S7 compatible 12 bit left-aligned, S5 compatible		
Line length	[m]	Max. 30 (screened)	
LED displays	Group diagnosis	1	
	Channel diagnosis	Yes, by means of flashing frequency of group diagnosis	
Diagnosis	<ul style="list-style-type: none"> • Short circuit/overload, actuator supply • Parameterisation errors • Value falling below nominal range/full-scale value • Value exceeding nominal range/full-scale value • Wire break 		
Parameterisation	<ul style="list-style-type: none"> • Short circuit monitoring, actuator supply • Short circuit monitoring, analogue output • Behaviour after short circuit, actuator supply • Data format • Lower limit value/full-scale value • Upper limit value/full-scale value • Monitoring of value falling below nominal range/full-scale value • Monitoring of value exceeding nominal range/full-scale value • Monitoring of wire break • Signal range 		
Protection class to EN 60529	Depending on connection block		
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials	Polymer		
Grid dimension	[mm]	50	
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50	
Weight	[g]	38	

Connection and display components

CPX-2AA-U-I



1 Error LED (red; module error)

Connection block/analogue module combinations		
Connection blocks	Part No.	Analogue module
		CPX-2AA-U-I
CPX-AB-8-M8-3POL	195 706	–
CPX-AB-8-M8X2-4POL	541 256	–
CPX-AB-4-M1 2X2-5POL	195 704	■
CPX-AB-4-M1 2X2-5POL-R	541 254	■
CPX-AB-4-M1 2-8POL	526 178	–
CPX-AB-8-KL-4POL	195 708	■
CPX-AB-1-SUB-BU-25POL	525 676	■
CPX-AB-4-HAR-4POL	525 636	–

Terminal CPX

Technical data – Analogue module for outputs









Pin allocation		
Connection block outputs		CPX-2AA-U-I
CPX-AB-4-M12X2-5POL and CPX-AB-4-M12X2-5POL-R ¹⁾		
	<p>X1</p> <p>X1.1: 24 V_{OUT} X1.2: Output U0+ X1.3: 0 V_{OUT} X1.4: Output GND X1.5: FE (earth)²⁾</p> <p>X2</p> <p>X2.1: 24 V_{OUT} X2.2: Output I0+ X2.3: 0 V_{OUT} X2.4: Output GND X2.5: FE (earth)²⁾</p> <p>X3</p> <p>X3.1: 24 V_{OUT} X3.2: Output U1+ X3.3: 0 V_{OUT} X3.4: Output GND X3.5: FE (earth)²⁾</p> <p>X4</p> <p>X4.1: 24 V_{OUT} X4.2: Output I1+ X4.3: 0 V_{OUT} X4.4: Output GND X4.5: FE (earth)²⁾</p>	
CPX-AB-8-KL-4POL		
	<p>X1</p> <p>X1.0: 24 V_{OUT} X1.1: 0 V_{OUT} X1.2: Output GND X1.3: FE (earth)</p> <p>X2</p> <p>X2.0: n.c. X2.1: n.c. X2.2: Output U0+ X2.3: FE (earth)</p> <p>X3</p> <p>X3.0: 24 V_{OUT} X3.1: 0 V_{OUT} X3.2: Output GND X3.3: FE (earth)</p> <p>X4</p> <p>X4.0: n.c. X4.1: n.c. X4.2: Output I0+ X4.3: FE (earth)</p> <p>X5</p> <p>X5.0: 24 V_{OUT} X5.1: 0 V_{OUT} X5.2: Output GND X5.3: FE (earth)</p> <p>X6</p> <p>X6.0: n.c. X6.1: n.c. X6.2: Output U1+ X6.3: FE (earth)</p> <p>X7</p> <p>X7.0: 24 V_{OUT} X7.1: 0 V_{OUT} X7.2: Output GND X7.3: FE (earth)</p> <p>X8</p> <p>X8.0: n.c. X8.1: n.c. X8.2: Output I1+ X8.3: FE (earth)</p>	
CPX-AB-1-SUB-BU-25POL		
	<p>1: Output GND 2: Output U0+ 3: Output GND 4: Output I0+ 5: n.c. 6: n.c. 7: n.c. 8: n.c. 9: 24 V_{OUT} 10: 24 V_{OUT} 11: 0 V_{OUT} 12: 0 V_{OUT} 13: Screen³⁾</p>	<p>14: Output GND 15: Output U1+ 16: Output GND 17: Output I1+ 18: 24 V_{OUT} 19: n.c. 20: 24 V_{OUT} 21: n.c. 22: 0 V_{OUT} 23: 0 V_{OUT} 24: 0 V_{OUT} 25: FE (earth) Socket: FE (earth)</p>

1) Speedcon quick lock, screen additionally on metal thread
2) FE/screen additionally on metal thread
3) Connect screening to functional earth FE

Terminal CPX

Accessories – Analogue module for outputs



Ordering data				
Designation		Type	Part No.	
Plug				
	M12 plug, 5-pin	SEA-M12-5GS-PG7	175 487	
	Sub-D plug, 25-pin	SD-SUB-D-ST25	527 522	
Connecting cable				
	Modular system for connecting cables	NEBU-... → 4 / 8.3-18	–	
Cover				
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable feeds M9 – 1 cable feed for multi-pin plug	AK-8KL	538 219	
	Fittings kit	VG-K-M9	538 220	
Screening plate				
	Screening plate for M12 connections	CPX-AB-S-4-M12	526 184	
User's manual				
	User's manual	German	P.BE-CPX-AX-DE	526 415
		English	P.BE-CPX-AX-EN	526 416
		Spanish	P.BE-CPX-AX-ES	526 417
		French	P.BE-CPX-AX-FR	526 418
		Italian	P.BE-CPX-AX-IT	526 419
		Swedish	P.BE-CPX-AX-SV	526 420

Terminal CPX

Technical data – Interlinking block with system supply

Function

Interlinking blocks ensure the electrical supply of all other CPX modules. They have contact rails, from which the other CPX components using the interlinking modules are supplied with current.

Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Application

- 24 V DC supply voltage for electronics of the CPX terminal
- 24 V DC supply voltage for inputs
- 24 V DC supply voltage for valves
- 24 V DC supply voltage for outputs








General technical data			
Type		CPX-GE-EV-S	CPX-GE-EV-S-7/8-4POL
Part No.		195 746	541 248
Electrical connection		M18	7/8", 4-pin
Nominal operating voltage	[V DC]	24	
Current supply	Sensors and electronics	[A]	Max. 16
	Valves and outputs	[A]	Max. 12
Protection class to EN 60529		Depending on connection block	
Ambient temperature	[°C]	-5 ... +50	
Corrosion resistance class CRC ¹⁾		2	
Material declaration		Conforms to RoHS	
Materials		Polymer	
Grid dimension	[mm]	50	
Dimensions W x L x H	[mm]	50 x 107 x 35	
Weight	[g]	100	185
			192

¹⁾ Corrosion resistance class 2 to Festo standard 940 070
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Terminal CPX





Technical data – Interlinking block with system supply

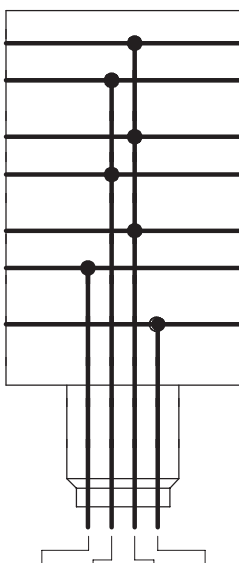Pin allocation		Pin	Allocation																						
Wiring allocation																									
 <p> 0V Valves 24V Valves 0V Output 24V Output 0V EL./Sen. 24V EL./Sen. FE </p> <table border="1" data-bbox="156 996 422 1108"> <tr> <td>M18</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>7/8"</td> <td>A</td> <td>B</td> <td>D</td> <td>C</td> </tr> <tr> <td></td> <td>24V</td> <td>24V</td> <td>0V</td> <td>FE</td> </tr> </table>	M18	1	2	3	4	7/8"	A	B	D	C		24V	24V	0V	FE	M18 – 4-pin  <table border="1" data-bbox="941 459 1452 627"> <tr> <td>1</td> <td>24 V DC supply voltage for electronics and sensors</td> </tr> <tr> <td>2</td> <td>24 V DC load voltage supply for valves and outputs</td> </tr> <tr> <td>3</td> <td>0 V</td> </tr> <tr> <td>4</td> <td>FE (earth)</td> </tr> </table>		1	24 V DC supply voltage for electronics and sensors	2	24 V DC load voltage supply for valves and outputs	3	0 V	4	FE (earth)
	M18	1	2	3	4																				
7/8"	A	B	D	C																					
	24V	24V	0V	FE																					
1	24 V DC supply voltage for electronics and sensors																								
2	24 V DC load voltage supply for valves and outputs																								
3	0 V																								
4	FE (earth)																								
		7/8" – 4-pin  <table border="1" data-bbox="941 705 1452 873"> <tr> <td>A</td> <td>24 V DC supply voltage for electronics and sensors</td> </tr> <tr> <td>B</td> <td>24 V DC load voltage supply for valves and outputs</td> </tr> <tr> <td>C</td> <td>FE (earth)</td> </tr> <tr> <td>D</td> <td>0V</td> </tr> </table>		A	24 V DC supply voltage for electronics and sensors	B	24 V DC load voltage supply for valves and outputs	C	FE (earth)	D	0V														
A	24 V DC supply voltage for electronics and sensors																								
B	24 V DC load voltage supply for valves and outputs																								
C	FE (earth)																								
D	0V																								

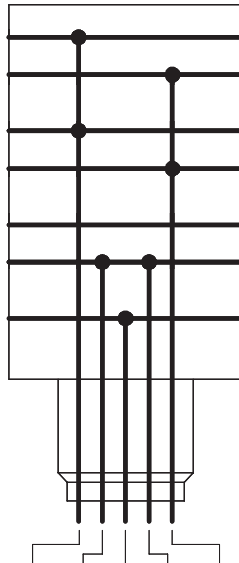Pin allocation		Pin	Allocation																					
Wiring allocation																								
 <p> 0V Valves 24V Valves 0V Output 24V Output 0V EL./Sen. 24V EL./Sen. FE </p> <table border="1" data-bbox="156 1836 470 1904"> <tr> <td>7/8"</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> </tr> <tr> <td></td> <td>0V</td> <td>0V</td> <td>FE</td> <td>24V</td> <td>24V</td> </tr> </table>	7/8"	1	2	3	4	5		0V	0V	FE	24V	24V	7/8" – 5-pin  <table border="1" data-bbox="941 1299 1452 1534"> <tr> <td>1</td> <td>0 V valves and outputs</td> </tr> <tr> <td>2</td> <td>0 V electronics and sensors</td> </tr> <tr> <td>3</td> <td>FE (earth)</td> </tr> <tr> <td>4</td> <td>24 V DC supply voltage for electronics and sensors</td> </tr> <tr> <td>5</td> <td>24 V DC load voltage supply for valves and outputs</td> </tr> </table>		1	0 V valves and outputs	2	0 V electronics and sensors	3	FE (earth)	4	24 V DC supply voltage for electronics and sensors	5	24 V DC load voltage supply for valves and outputs
	7/8"	1	2	3	4	5																		
	0V	0V	FE	24V	24V																			
1	0 V valves and outputs																							
2	0 V electronics and sensors																							
3	FE (earth)																							
4	24 V DC supply voltage for electronics and sensors																							
5	24 V DC load voltage supply for valves and outputs																							

Terminal CPX

Technical data – Interlinking block with system supply

Ordering data – Connection sockets				
Designation		Type	Part No.	
7/8"				
	Power supply socket	5-pin	NECU-G78G5-C2	543 107
		4-pin	NECU-G78G4-C2	543 108
M18				
	Straight socket, screw terminal	PG9	NTSD-GD-9	18 493
		PG13.5	NTSD-GD-13,5	18 526
	Angled socket, screw terminal	PG9	NTSD-WD-9	18 527
	Angled socket, screw terminal	PG11	NTSD-WD-11	533 119

Terminal CPX

Technical data – Interlinking block

Function

Interlinking blocks ensure the electrical supply of all other CPX modules. They have contact rails, from which the other CPX components using the interlinking modules are supplied with current.

Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Application

- All voltages are fed through to the next module by means of system linking.
- The connected electronics module for inputs/outputs or bus nodes taps off the required voltage.



General technical data		
Type		CPX-GE-EV
Part No.		195 742
Electrical connection		–
Nominal operating voltage	[V DC]	24
Acceptable current load (per contact/contact rail)	[A]	16
Protection class to EN 60529		Depending on connection block
Ambient temperature	[°C]	–5 ... +50
Corrosion resistance class CRC ¹⁾		2
Material declaration		Conforms to RoHS
Materials		Polymer
Grid dimension	[mm]	50
Dimensions W x L x H	[mm]	50 x 107 x 35
Weight	[g]	170

¹⁾ Corrosion resistance class 2 to Festo standard 940 070
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Pin allocation			
Wiring allocation		Pin	Allocation
		–	–
	0V Valves	–	–
	24V Valves	–	–
	0V Output	–	–
	24V Output	–	–
	0V EL./Sen.		
	24V EL./Sen.		
	FE		

Terminal CPX

Technical data – Interlinking block with additional power supply for outputs

Function

Interlinking blocks ensure the electrical supply of all other CPX modules. They have contact rails, from which the other CPX components using the interlinking modules are supplied with current. Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Application

- 24 V DC supply voltage for outputs






General technical data			
Type	CPX-GE-EV-Z	CPX-GE-EV-Z-7/8-4POL	CPX-GE-EV-Z-7/8-5POL
Part No.	195 744	541 250	541 246
Electrical connection	M18	7/8", 4-pin	7/8", 5-pin
Nominal operating voltage	[V DC]	24	
Current supply	Outputs	[A]	Max. 16
Protection class to EN 60529	Depending on connection block		
Ambient temperature	[°C]	-5 ... +50	
Corrosion resistance class CRC ¹⁾	2		
Material declaration	Conforms to RoHS		
Materials	Polymer		
Grid dimension	[mm]	50	
Dimensions W x L x H	[mm]	50 x 107 x 35	
Weight	[g]	170	180



¹⁾ Corrosion resistance class 2 to Festo standard 940 070
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Terminal CPX

FESTO





Technical data – Interlinking block with additional power supply for outputs

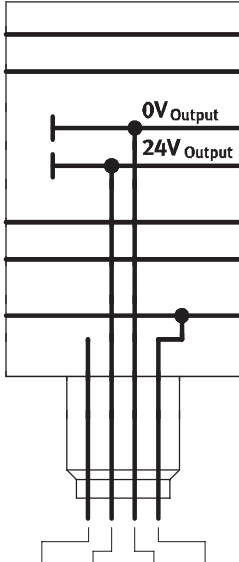Pin allocation		Pin	Allocation															
Wiring allocation																		
		M18 – 4-pin																
			<table border="1"> <tr> <td>1</td> <td>24 V DC supply voltage for electronics and sensors</td> </tr> <tr> <td>2</td> <td>24 V DC load voltage supply for valves and outputs</td> </tr> <tr> <td>3</td> <td>0 V</td> </tr> <tr> <td>4</td> <td>FE (earth)</td> </tr> </table>	1	24 V DC supply voltage for electronics and sensors	2	24 V DC load voltage supply for valves and outputs	3	0 V	4	FE (earth)							
1	24 V DC supply voltage for electronics and sensors																	
2	24 V DC load voltage supply for valves and outputs																	
3	0 V																	
4	FE (earth)																	
		7/8" – 4-pin																
			<table border="1"> <tr> <td>A</td> <td>24 V DC supply voltage for electronics and sensors</td> </tr> <tr> <td>B</td> <td>24 V DC load voltage supply for valves and outputs</td> </tr> <tr> <td>C</td> <td>FE (earth)</td> </tr> <tr> <td>D</td> <td>0V</td> </tr> </table>	A	24 V DC supply voltage for electronics and sensors	B	24 V DC load voltage supply for valves and outputs	C	FE (earth)	D	0V							
A	24 V DC supply voltage for electronics and sensors																	
B	24 V DC load voltage supply for valves and outputs																	
C	FE (earth)																	
D	0V																	
		<table border="1"> <tr> <td>M18</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>7/8"</td> <td>A</td> <td>B</td> <td>D</td> <td>C</td> </tr> <tr> <td></td> <td>n.c.</td> <td>24V</td> <td>0V</td> <td>FE</td> </tr> </table>		M18	1	2	3	4	7/8"	A	B	D	C		n.c.	24V	0V	FE
M18	1	2	3	4														
7/8"	A	B	D	C														
	n.c.	24V	0V	FE														

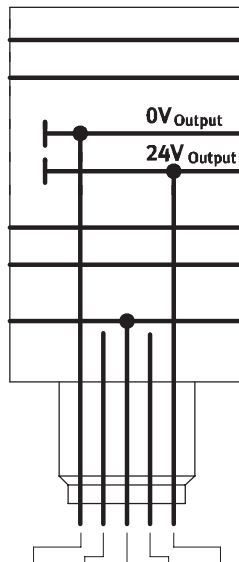Pin allocation		Pin	Allocation												
Wiring allocation															
		7/8" – 5-pin													
			<table border="1"> <tr> <td>1</td> <td>0 V outputs</td> </tr> <tr> <td>2</td> <td>n.c.</td> </tr> <tr> <td>3</td> <td>FE (earth)</td> </tr> <tr> <td>4</td> <td>n.c.</td> </tr> <tr> <td>5</td> <td>24 V DC load voltage supply for outputs</td> </tr> </table>	1	0 V outputs	2	n.c.	3	FE (earth)	4	n.c.	5	24 V DC load voltage supply for outputs		
1	0 V outputs														
2	n.c.														
3	FE (earth)														
4	n.c.														
5	24 V DC load voltage supply for outputs														
		<table border="1"> <tr> <td>7/8"</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> </tr> <tr> <td></td> <td>0V</td> <td>n.c.</td> <td>FE</td> <td>n.c.</td> <td>24V</td> </tr> </table>		7/8"	1	2	3	4	5		0V	n.c.	FE	n.c.	24V
7/8"	1	2	3	4	5										
	0V	n.c.	FE	n.c.	24V										

Terminal CPX

Technical data – Interlinking block with additional power supply for outputs

Ordering data – Connection sockets				
Designation		Type	Part No.	
7/8"				
	Power supply socket	5-pin	NECU-G78G5-C2	543 107
		4-pin	NECU-G78G4-C2	543 108
M18				
	Straight socket, screw terminal	PG9	NTSD-GD-9	18 493
		PG13.5	NTSD-GD-13,5	18 526
	Angled socket, screw terminal	PG9	NTSD-WD-9	18 527
	Angled socket, screw terminal	PG11	NTSD-WD-11	533 119

Terminal CPX

Technical data – Interlinking block with additional power supply for valves

Function

Interlinking blocks ensure the electrical supply of all other CPX modules. They have contact rails, from which the other CPX components using the interlinking modules are supplied with current. Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Application

- 24 V DC supply voltage for valves










General technical data			
Type		CPX-GE-EV-V	CPX-GE-EV-V-7/8-4POL
Part No.		533 577	541 252
Electrical connection		M18	7/8", 4-pin
Nominal operating voltage	[V DC]	24	
Acceptable current load (per contact/contact rail)	[A]	16	
Protection class to EN 60529		Depending on connection block	
Ambient temperature	[°C]	-5 ... +50	
Corrosion resistance class CRC ¹⁾		2	
Material declaration		Conforms to RoHS	
Materials		Polymer	
Grid dimension	[mm]	50	
Dimensions W x L x H	[mm]	50 x 107 x 35	
Weight	[g]	143	181

1) Corrosion resistance class 2 to Festo standard 940 070
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Terminal CPX

Technical data – Interlinking block with additional power supply for valves

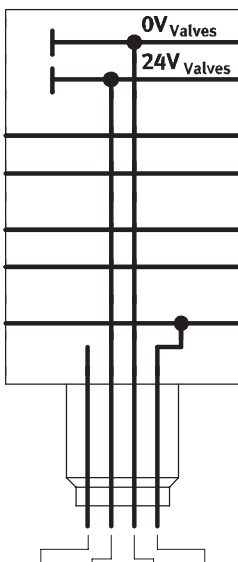Pin allocation		Pin	Allocation															
Wiring allocation																		
	M18 – 4-pin																	
		1	n.c.															
		2	24 V DC load voltage supply for valves															
		3	0 V															
		4	FE (earth)															
	7/8" – 4-pin																	
		A	n.c.															
		B	24 V DC load voltage supply for valves															
		C	FE (earth)															
		D	0V															
<table border="1"> <tr> <td>M18</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>7/8"</td> <td>A</td> <td>B</td> <td>D</td> <td>C</td> </tr> <tr> <td></td> <td>n.c.</td> <td>24V</td> <td>0V</td> <td>FE</td> </tr> </table>	M18	1	2	3	4	7/8"	A	B	D	C		n.c.	24V	0V	FE			
M18	1	2	3	4														
7/8"	A	B	D	C														
	n.c.	24V	0V	FE														

Ordering data – Connection sockets				
Designation			Type	Part No.
7/8"				
	Power supply socket	4-pin	NECU-G78G4-C2	543 108
M18				
	Straight socket, screw terminal	PG9	NTSD-GD-9	18 493
		PG13.5	NTSD-GD-13,5	18 526
	Angled socket, screw terminal	PG9	NTSD-WD-9	18 527
		PG11	NTSD-WD-11	533 119

Terminal CPX

Technical data – Pneumatic interface MPA

Function

The pneumatic interface MPA establishes the electromechanical connection between the terminal CPX and the valve terminal MPA.

The signals from the bus node are forwarded to the control electronics in the electrical modules of the valve terminal MPA via the integrated CPX bus. The bus signal for activation of the solenoid coils is converted in the electronics module for 4 valves (max. 8 coils).


From a technical point of view, the individual MPA pneumatic modules each represent a separate electrical module with digital outputs. Valves, which are electrically isolated, can be supplied with power via the interlinking block CPX-GE-EV-V.

Applications

- Interface to the valve terminal MPA
- Max. 128 solenoid coils
- Max. 16 electronic modules
- Features of the electronics module of the valve terminal MPA can be parameterised, e.g. status of the solenoid coils in the event of field-bus communication being interrupted (fail-safe), individual channel diagnosis can be activated, condition monitoring can be activated individually for each valve
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block and feeds them through to the electronics modules of the valve terminal MPA
- Electronics modules of the valve terminal MPA:
 - Undervoltage of valves
 - Short circuit of valves
 - Open Load of valves
 - Counter preset reached in condition monitoring



Overview of pneumatic interface MPA and valve terminal MPA

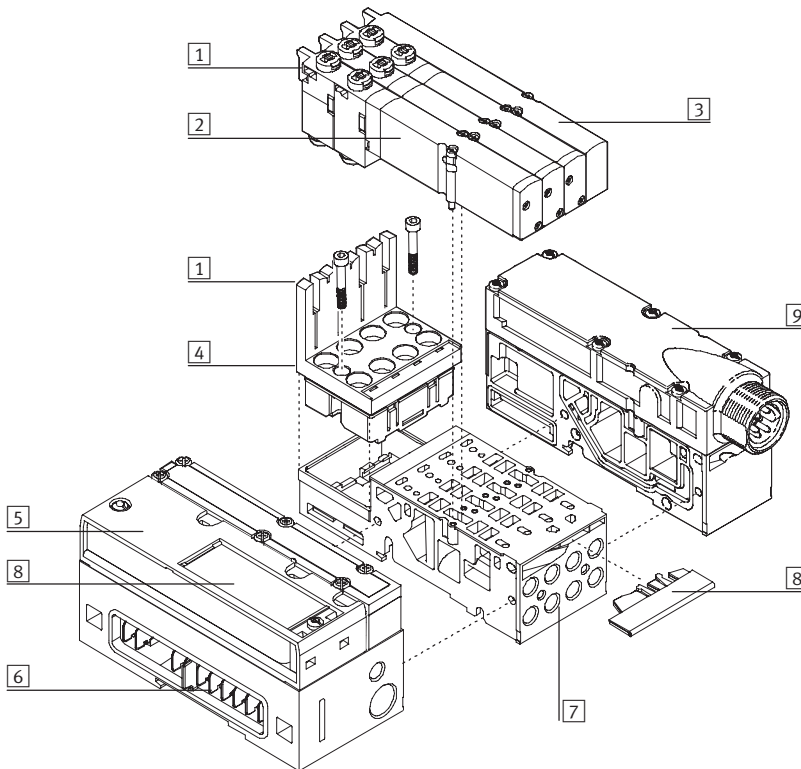

- 1 LEDs
 - Outputs (yellow)
 - Error (red)
 - Module error (all LEDs red)
- 2 Valves
- 3 Blanking plate
- 4 Electronics module
- 5 Pneumatic interface MPA
- 6 Power supply and bus connection
- 7 Manifold sub-base
- 8 Inscription areas
- 9 Valve power supply (creation of zones with power supply that can be activated separately)

Terminal CPX

Technical data – Pneumatic interface VTSA



Function

The pneumatic interface VTSA establishes the electromechanical connection between the terminal CPX and the valve terminal type 44 VTSA.

A complete pneumatic control loop system (FB-valve-drive-sensor-FB) can therefore be connected on the fieldbus using the input modules of the CPX terminal.

Different circuits for valves and electrical outputs are implemented using an additional power supply. The integrated valve diagnostic functions enable the causes of errors to be found quickly, therefore increasing system availability.

Applications

- Interface to valve terminal VTSA
- Max. 32 solenoid coils
- Address space allocation (configuration) of valve terminals can be set using integrated DIL switches
- Pneumatic interface features can be parameterised, e.g. status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe)
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block
- Detection of missing solenoid coils and short circuit monitoring for the valves



Overview of pneumatic interface VTSA and valve terminal VTSA

Reduced downtimes:
LED diagnosis on the spot

Width 18 mm (02) and 26 mm (01) can be combined on a single terminal without adapter


Pneumatic interface to CPX

- Straightforward electrical connections
- Fieldbus connection via CPX
 - Multi-pin plug connection with pre-assembled cable or terminal strip (Cage Clamp)
 - Control block via CPX

CPX diagnostic interface for handheld devices (channel-oriented diagnosis down to the individual valve)

Quick mounting:
Directly using screws or H-rail

Safe:
Valves, outputs and logic voltage can be switched off separately

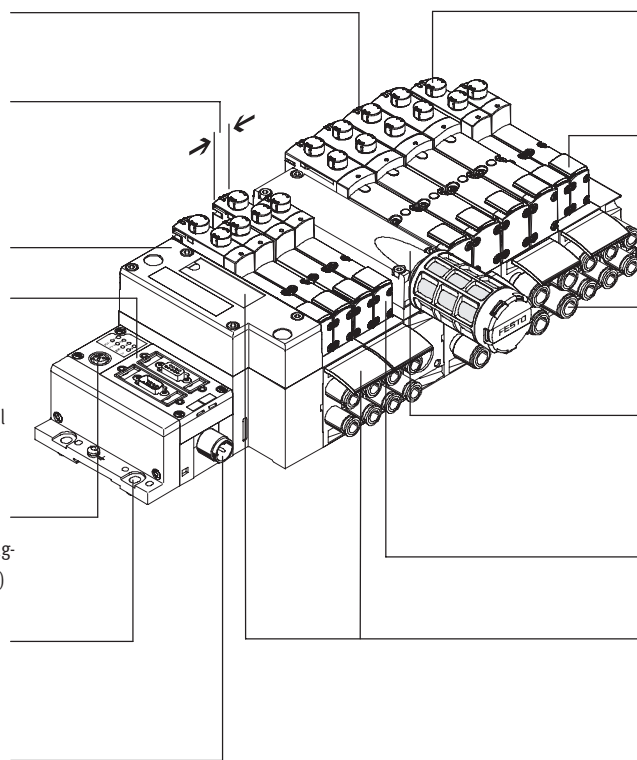

Reliable operation:
Manual override pushing/detenting or covered

Flexible:
– 32 valve positions/32 solenoid coils

Functional:
Robust metal thread or pre-assembled QS connections

Modular:
Supply plates facilitate the creation of multiple pressure zones as well as numerous additional exhaust and supply ports

Comprehensive valve functions

Practical:
Large inscription labels

Terminal CPX

Technical data – Pneumatic interface MIDI/MAXI

Function

The pneumatic interface MIDI/MAXI connects the valve terminal MIDI/MAXI to the supported fieldbus protocols of the terminal CPX. A complete pneumatic control loop system (FB-valve-drive-sensor-FB) can therefore be connected on the fieldbus using the input modules of the terminal CPX.

Different circuits for valves and electrical outputs are implemented using an additional power supply. The integrated valve diagnostic functions enable the causes of errors to be found quickly, therefore increasing system availability.

Applications

- Interface to valve terminals MIDI/MAXI
- Max. 26 solenoid coils
- Address space allocation (configuration) of valve terminals can be set using integrated DIL switches
- Pneumatic interface features can be parameterised, e.g. status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe)
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block




General technical data			
Type	CPX-GP-03-4,0		
Part No.	195 738		
No. of solenoid coils	26		
Max. power supply	per module	[A]	4
	per channel	[A]	0.2
Fuse protection	Internal electronic fuse protection for each valve output		
Module current consumption from electronics/sensor supply	[mA]	Typ. 15	
Supply voltage for valves	[V]	24 DC +10% -15%	
Electrical isolation	Channel – Channel		No
	Channel – Internal bus		Yes, using an additional power supply for valves (in preparation)
LED displays	Group diagnosis		1
	Channel diagnosis		–
	Channel status		– (on valves)
Diagnosis	<ul style="list-style-type: none"> • Load voltage of valves 		
Parameterisation	<ul style="list-style-type: none"> • Module monitoring • Failsafe behaviour, channel x 		
Protection class to EN 60529	IP65		
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Materials	Die-cast aluminium		
Grid dimension	[mm]	50	
Dimensions W x L x H	[mm]	50 x 132 x 55	
Weight	[g]	390	

Terminal CPX

Accessories – Pneumatic interface MIDI/MAXI



Connection and display components

CPX-GP-03-4,0

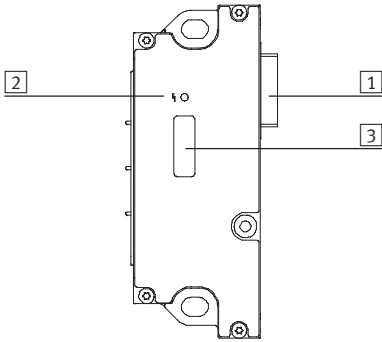

- 1 Connecting plug to valves
- 2 Error LED (red)
- 3 DIL switch under transparent cover

Ordering data

Designation	Type	Part No.
H-rail mounting		
 For mounting CPX terminal and valve terminal MIDI on H-rail	CPX-03-4,0	526 033
 For mounting CPX terminal and valve terminal MAXI on H-rail	CPX-03-7,0	526 034

Terminal CPX

Technical data – Pneumatic interface CPA

Function

The pneumatic interface CPA connects the valve terminal CPA to the supported fieldbus protocols of the CPX terminal. A complete pneumatic control loop system (FB-valve-drive-sensor-FB) can therefore be connected on the fieldbus using the input modules of the CPX terminal. Different circuits for valves and electrical outputs are implemented using an additional power supply. The integrated valve diagnostic functions enable the causes of errors to be found quickly, therefore increasing system availability.

Applications

- Interface to CPA10 and CPA14 valve terminals
- Max. 22 solenoid coils
- Address space allocation (configuration) of valve terminals can be set using integrated DIL switches
- Pneumatic interface features can be parameterised, e.g. status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe)
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block
- Detection of missing solenoid coils and short circuit monitoring for the valves




General technical data			
Type	CPX-GP-CPA-10		CPX-GP-CPA-14
Part No.	195 710		195 712
No. of solenoid coils	22		22
Max. power supply	per module	[A]	4
	per channel	[A]	0.2
Fuse protection	Internal electronic fuse protection for each valve output		
Module current consumption from electronics/sensor supply	[mA]	Typ. 15	
Supply voltage for valves	[V]	24 DC +10% -15%	
Electrical isolation	Channel – Channel	No	
	Channel – Internal bus	Yes, using an additional power supply for valves (in preparation)	
LED displays	Group diagnosis	1	
	Channel diagnosis	–	
	Channel status	– (on valves)	
Diagnosis	<ul style="list-style-type: none"> • Load voltage of valves • Short circuit solenoid coils (channel-oriented) • Wire break solenoid coils (channel-oriented quiescent current detection for valve solenoid coils) 		
Parameterisation	<ul style="list-style-type: none"> • Module monitoring • Wire break monitoring, channel x • Failsafe behaviour, channel x 		
Protection class to EN 60529	IP65		
Temperature range	Operation	[°C]	-5 ... +50
	Storage/transport	[°C]	-20 ... +70
Materials	Polymer		
Grid dimension	[mm]	50	
Dimensions W x L x H	[mm]	50 x 110 x 58	
Weight	[g]	150	

Terminal CPX

Accessories – Pneumatic interface CPA


Connection and display components

CPX-GP-CPA-...

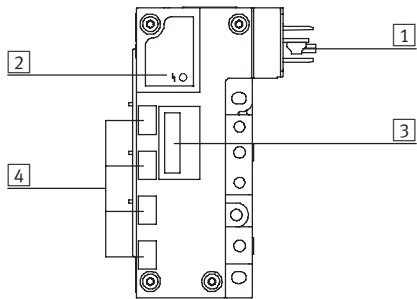

- 1 Connecting plug to valves
- 2 Error LED (red)
- 3 DIL switch under transparent cover
- 4 Inscription areas for addresses


Ordering data

Designation	Type	Part No.
H-rail mounting		
 For mounting CPX terminal and valve terminal CPA on H-rail	CPX-CPA-BG-NRH	526 032

Terminal CPX

Technical data

Dimensions – CPX terminal with bus nodes and connection blocks Download CAD data → www.festo.com/en/engineering

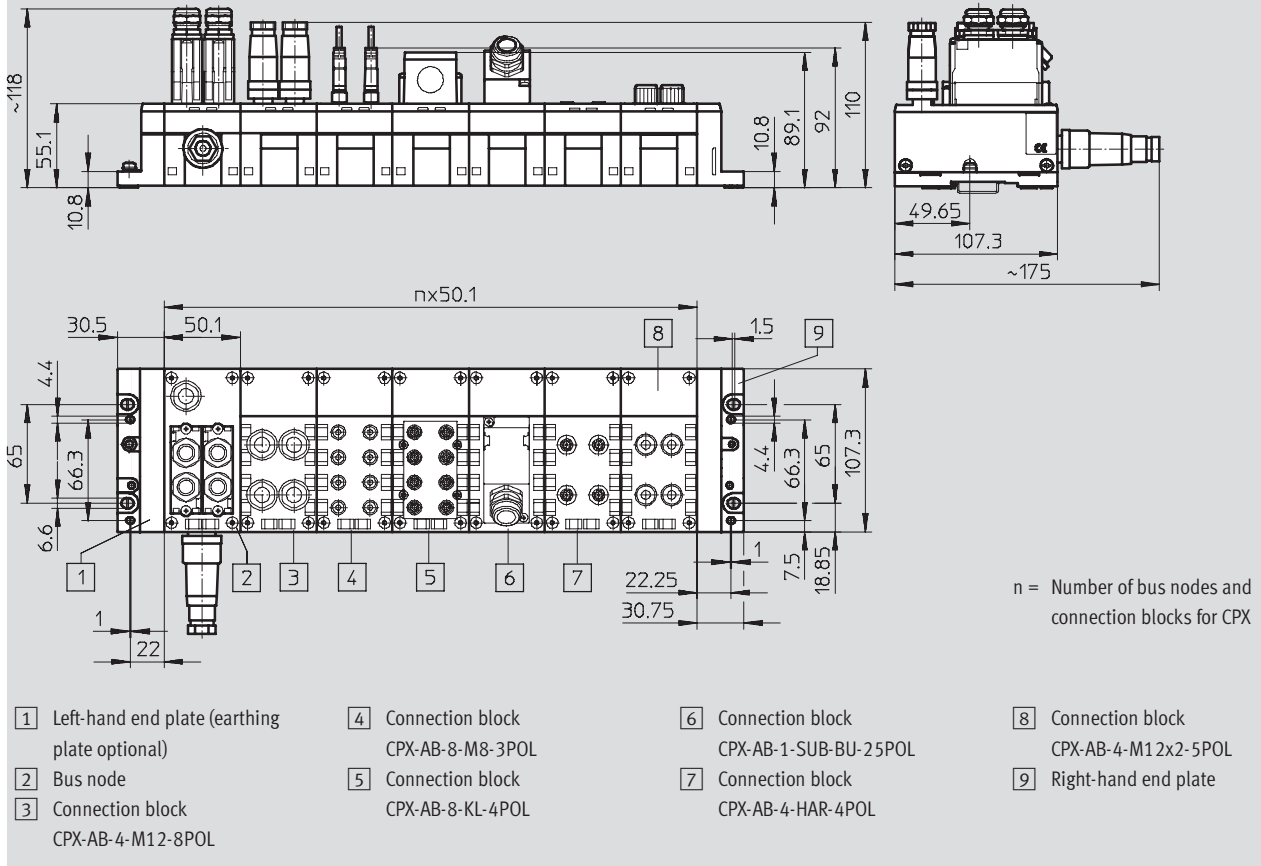

Terminal CPX


Technical data



Dimensions – CPX terminal

Download CAD data → www.festo.com/en/engineering

with bus nodes and valve terminal VTSA

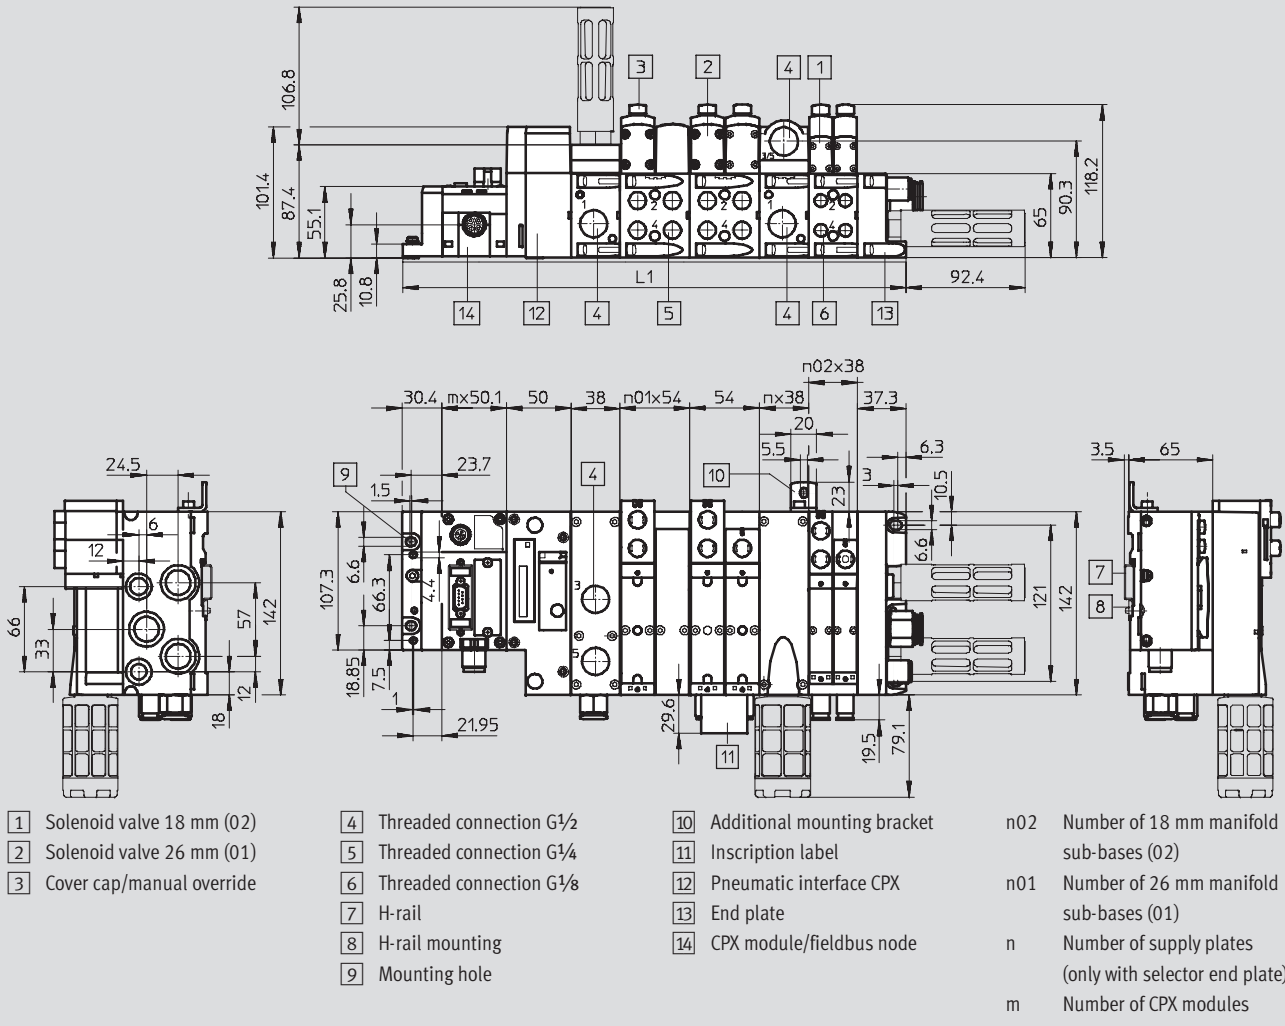

- 1 Solenoid valve 18 mm (02)
 - 2 Solenoid valve 26 mm (01)
 - 3 Cover cap/manual override
 - 4 Threaded connection G $\frac{1}{2}$
 - 5 Threaded connection G $\frac{3}{4}$
 - 6 Threaded connection G $\frac{3}{8}$
 - 7 H-rail
 - 8 H-rail mounting
 - 9 Mounting hole
 - 10 Additional mounting bracket
 - 11 Inscription label
 - 12 Pneumatic interface CPX
 - 13 End plate
 - 14 CPX module/fieldbus node
- n02 Number of 18 mm manifold sub-bases (02)
n01 Number of 26 mm manifold sub-bases (01)
n Number of supply plates (only with selector end plate)
m Number of CPX modules

Width	L1
18 mm (02)	$30.4 + m \times 50.1 + 50 + n02 \times 38 + n \times 38 + 37.3$
26 mm (01)	$30.4 + m \times 50.1 + 50 + n01 \times 54 + n \times 38 + 37.3$
Mixture of 18 mm (02) and 26 mm (01)	$30.4 + m \times 50.1 + 50 + n02 \times 38 + n01 \times 54 + n \times 38 + 37.3$


Fieldbus systems/electrical periphery
Modular electrical terminals

Terminal CPX

Technical data



Dimensions – CPX terminal Download CAD data → www.festo.com/en/engineering
with bus nodes, connection blocks and valve terminal CPA

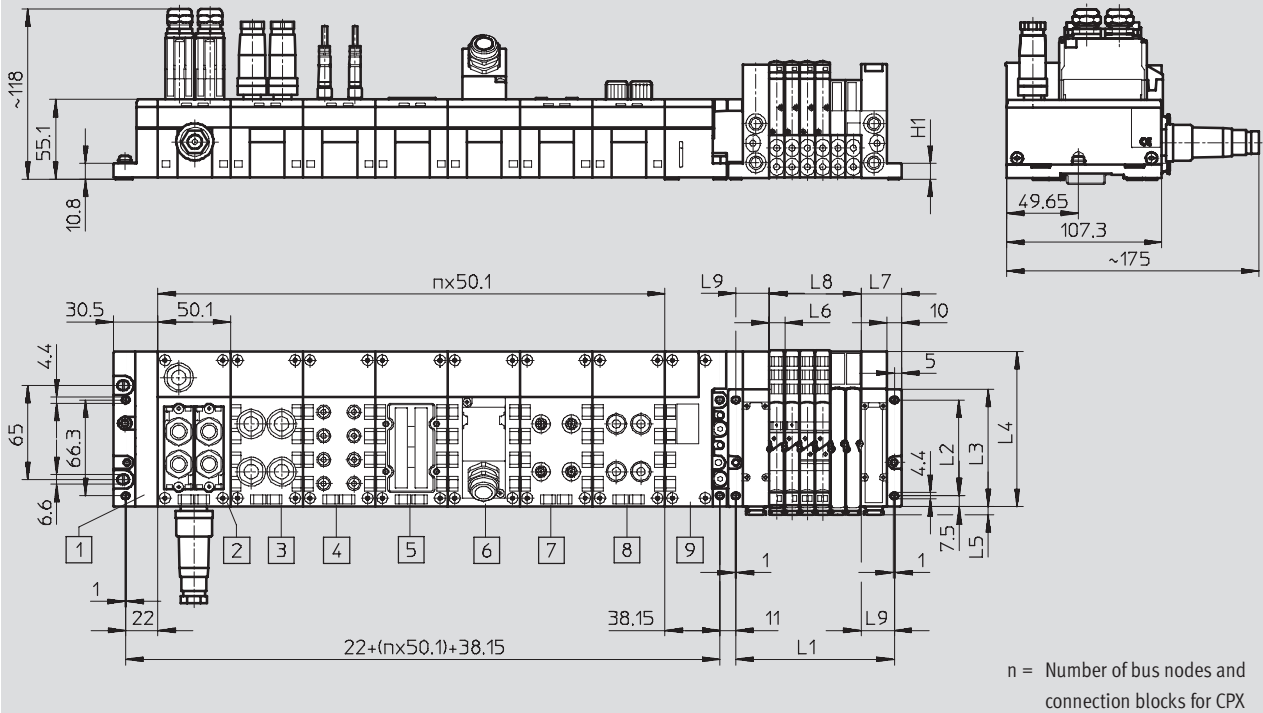

- | | | | |
|---|--|---|---|
| 1 Left-hand end plate | 4 Connection block
CPX-AB-8-M8-3POL | 6 Connection block
CPX-AB-1-SUB-BU-25POL | 8 Connection block
CPX-AB-4-M12x2-5POL |
| 2 Bus node | 5 Connection block
CPX-AB-8-KL-4POL | 7 Connection block
CPX-AB-4-HAR-4POL | 9 Pneumatic interface CPA |
| 3 Connection block
CPX-AB-4-M12-8POL | | | |

Type	L1 ¹⁾	L2 ±0.1	L3	L4	L5	L6	L7	L8 ¹⁾	L9 ±0.1	H1
CPA10	46 + (m x 10.6)	66.3	81.3	108.3	5.5	10.6	28	m x 10.6	23	10.8
CPA14	51 + (m x 14.6)	76.1	91.1	118.1	6.5	14.6	31	m x 14.6	26	13

1) m = Number of valves

Fieldbus systems/electrical periphery
Modular electrical terminals

Terminal CPX


Technical data



Dimensions – CPX terminal

Download CAD data → www.festo.com/en/engineering

with bus nodes and valve terminal MPA

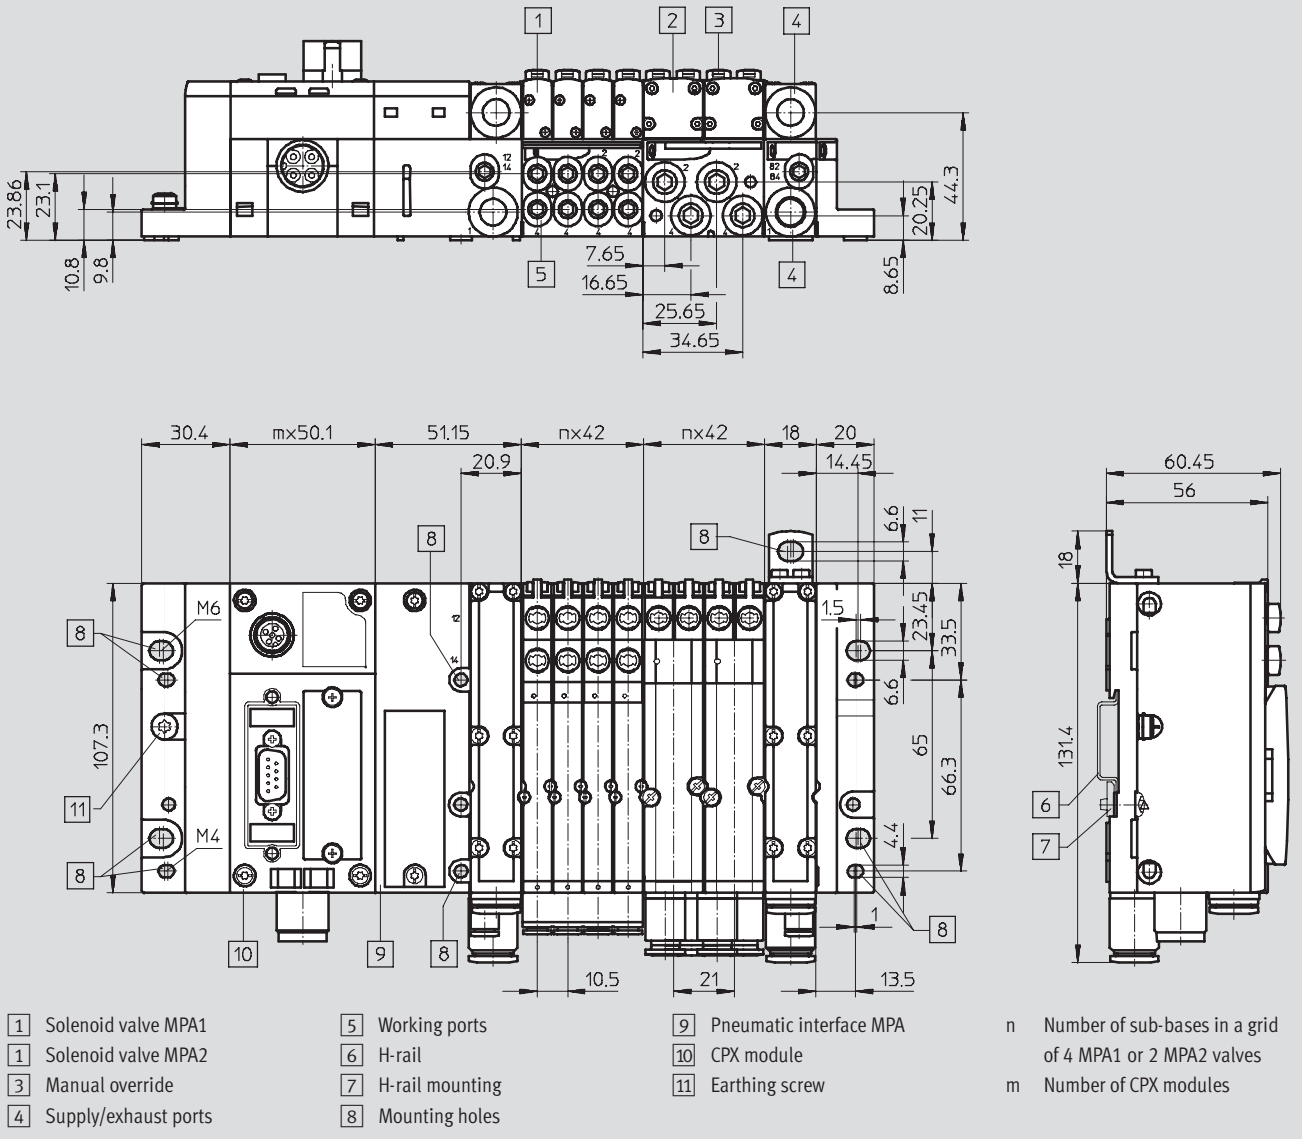


Terminal CPX

Technical data

Dimensions – CPX terminal

with bus nodes, connection blocks and valve terminal MIDI/MAXI

Download CAD data → www.festo.com/en/engineering

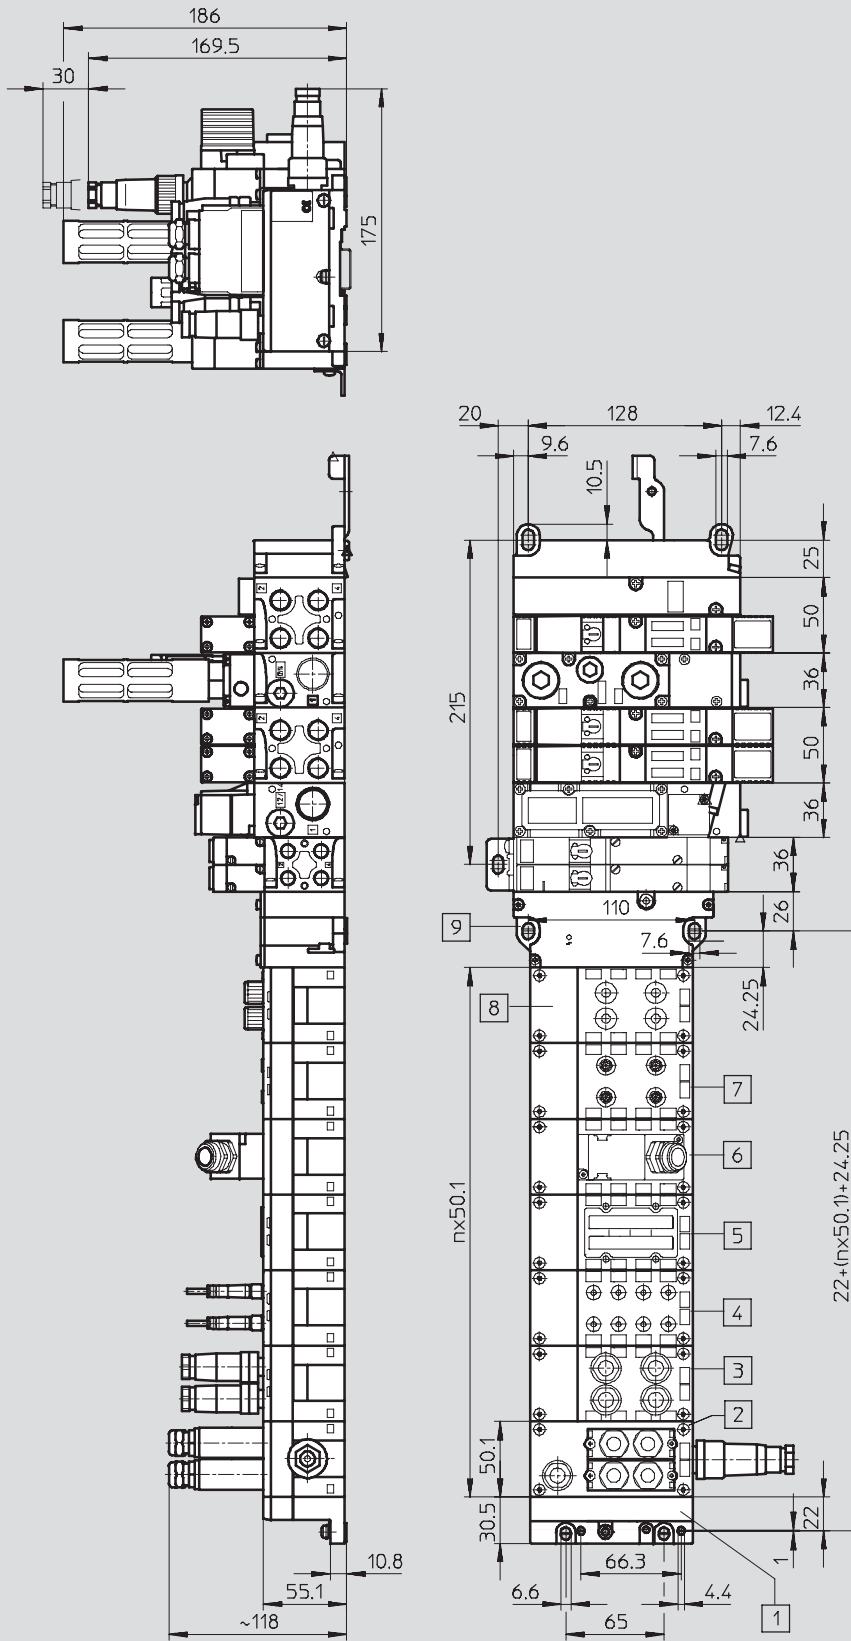

n = Number of bus nodes and connection blocks for CPX

- | | | | |
|---|---------------------------------------|---|---|
| 1 | Left-hand end plate | 6 | Connection block
CPX-AB-1-SUB-BU-25POL |
| 2 | Bus node | 7 | Connection block
CPX-AB-4-HAR-4POL |
| 3 | Connection block
CPX-AB-4-M12-8POL | 8 | Connection block
CPX-AB-4-M12X2-5POL |
| 4 | Connection block
CPX-AB-8-M8-3POL | 9 | Pneumatic interface
MIDI/MAXI |
| 5 | Connection block
CPX-AB-8-KI-4POL | | |

Terminal CPX

Ordering information

Ordering information

Selection of CPX terminal and valve terminal pneumatic components using module numbers

The module number defines the CPX terminal-valve terminal pneumatic components combination.

The pneumatic part and the electrical part are configured with separate order codes. The order code for the electrical part CPX begins with 50E, while the order code for the pneumatic part depends on the selected valve terminal pneumatic components, e.g. 32P-... for MPA



Note

The following pages contain only the module number with the ordering data for the CPX terminal without pneumatic components.

The ordering data for the valve terminal pneumatic components can be found in the respective valve terminal documentation.

Module No.	Combination	Order code
197 330	Electrical valve terminal CPX without pneumatic components	50E-...
539 217	Pneumatic valve terminal VTSA with threaded connection	44P-...
539 218	Pneumatic valve terminal VTSA with NPT thread	44PN-...
547 965	Pneumatic valve terminal VTSA-F with threaded connection	45P-...
547 966	Pneumatic valve terminal VTSA-F with NPT thread	45PN-...
530 411	Pneumatic valve terminal MPA	32P-...
173 520	Pneumatic valve terminal CPA10	12P-10-CX-...
174 001	Pneumatic valve terminal CPA14	12P-14-CX-...
18 980	Pneumatic valve terminal MIDI/MAXI	03P-...

General basic data and guidelines

The order code 50E allows a large number of different combinations and thus supports the modular construction of the CPX terminal. The following system limits must be observed:

- One bus node
- Max. 9 I/O modules
- Max. one pneumatic interface
- Max. one interlinking block with system supply

Up to 10 module positions for electrical modules can be configured in the order code. For each module position, the electrical module (electronics module) is defined first, followed by the connection technology and then the supply (optional).

Please note the general guidelines, in particular:

- General basic data and guidelines for possible module positions (→ 4 / 4.8-15)
- Supported electronics module-connection technology combinations (→ 4 / 4.8-15)

- Restrictions with regard to the number of modules depending on the selected bus node in borderline cases (→ 4 / 4.8-27)
- General limit values and guidelines with regard to supplies (→ 4 / 4.8-23)

Order code

The order code maps the physical construction of the CPX terminal to a linear order code.

Each optional module has its own unique code letters, e.g. CPX-8DE = E, CPX-AB-4-M12x2-5POL = X

The module sequence defines their physical configuration within the CPX terminal.

This applies both to the bus node and to the I/O modules.

Terminal CPX

Ordering information

Order example

CPX terminal consisting of a bus node with system supply, 8 I/O modules and a pneumatic interface MIDI/MAXI

Step 1 – Defining the electrical modules

- | | | | |
|--|--|---|--|
| <p>Bus node</p> <ul style="list-style-type: none"> One bus node CPX-FB13 with Sub-D plug for Profibus-DP and system supply (module position 0) | <p>I/O modules</p> <ul style="list-style-type: none"> Two digital input modules (8 inputs each), each with one 4xM12 connection block, 5-pin (module position 1 and 2) One digital output module (4 outputs) with one 4xM12 connection block, 5-pin (module position 3) | <ul style="list-style-type: none"> One digital input/output module (8 inputs and 8 outputs) with one Sub-D connection block, 25-pin socket (module position 4) | <ul style="list-style-type: none"> Three analogue modules (2 inputs each), each with one 4xM12 connection block, 5-pin (module position 5, 6 and 7) One analogue module (2 outputs) with one 4xM12 connection block, 5-pin (module position 8) |
|--|--|---|--|

Module position
Electrical module
Connection technology
Supply

0	1	2	3	4	5	6	7	8	9
F13	E	E	A	Y	U	U	U	P	
GE	X	X	X	B	X	X	X	X	
S									

Resulting order code:
50E-F13GESEXEXAXYBUXUXPX

Step 2 – Defining the pneumatic interface/right-hand end plate

<p>An additional code letter is assigned to each pneumatic interface or to the right-hand end plate for using the CPX terminal without pneumatic components. This is appended to the order code</p>	<p>and is separated from the rest of the code by a dash. Example: Pneumatic interface MIDI/MAXI = code letter A</p>	<p>The price for the pneumatic interface or for the right-hand end plate includes complete assembly as well as the testing of all individual and</p>	<p>general functions, comprehensive instructions and any accessories that are required such as the left-hand end plate, for example.</p>
---	---	--	--

Resulting order code:
50E-F13GESEXEXAXYBUXUXPX-A

Step 3 – Defining the required user documentation

<p>The CPX user documentation from the example consists of the following:</p> <ul style="list-style-type: none"> CPX system description Electronics description – Bus node CPX-FB13 Description – I/O modules 	<p>Code letters are also used to select the user documentation language. Example: CPX manual in English = code letter E</p>	<p>If the corresponding code letter for the user's manual is missing, no accompanying documentation is supplied.</p>	<p>All manuals and descriptions are available in PDF format in the Download Area at: → www.festo.com</p>
--	---	--	---

Resulting order code:
50E-F13GESEXEXAXYBUXUXPX-A-E

Terminal CPX

Ordering data – Modular products



M Mandatory data ➔

Module No.	Valve terminal, electrical part	Electrical module for position 0 ... 9			
197 330	50E	3 – Electrical actuator/inputs and outputs for position 0 ... 9: F06, F11, F13, F14, F23, F32, T03, T05, T11, T12, T13, T14, T15, T16, T17, T18, F, E, D, O, M, L, A, Y, I, T, U, P 4 Connection technology for position 0 ... 9: GA, GB, GC, GD, GE, GF, GH, GI, GL, GM, GP, X, GW, W, R, GQ, GO, J, H, B, C			
Order example		Options 5 – Supply for position 0 ... 9: S, Z, V, QS, QZ, QV, QP, QX, QR, QY, QU			
		Module positions			
		0	1	2	3
197 330	50E	F06 GI	J Z	T15 V	FR
1	2	3 + 4 + 5			

Ordering table

			Condi- tions	Code	Enter code
M	1	Module No.		197 330	
	2	Valve terminal, electrical part		CPX modular electrical terminal	50E
		Electrical module for position 0 ... 9		-	-
	3	Electrical actuator/inputs and outputs Position 0 ... 9			
		Fieldbus node for Interbus	[1]	F06	
		Fieldbus node for DeviceNet	[1] [2]	F11	
		Fieldbus node for Profibus DP	[1]	F13	
		Fieldbus node for CANopen	[1]	F14	
		Fieldbus node for CC-Link	[1]	F23	
		Fieldbus nodes for Ethernet/IP	[1]	F32	
		Front End Controller Remote	[1]	T03	
		Front End Controller Remote I/O	[1]	T05	
		CP interface, 16 digital inputs/outputs	[1]	T11	
		CP interface, 32 digital inputs/outputs	[1]	T12	
		CP interface, 48 digital inputs/outputs	[1]	T13	
		CP interface, 64 digital inputs/outputs	[1]	T14	
		CP interface, 80 digital inputs/outputs	[1]	T15	
		CP interface, 96 digital inputs/outputs	[1]	T16	
		CP interface, 112 digital inputs/outputs	[1]	T17	
		CP interface, 128 digital inputs/outputs	[1]	T18	
		Input module, 4 digital inputs		F	
		Input module, 8 digital inputs		E	
		Input module, 8 digital inputs (channel diagnosis)		D	
		Input module, 8 digital inputs (NPN)		O	
		Input module, 16 digital inputs		M	
		Output module, 8 digital outputs		L	
		Output module, 4 digital outputs		A	
		Input/output module, 16-fold, 8 digital I/O each		Y	
		Input module, 4 analogue inputs (current)		I	
		Input module, 4 analogue inputs (temperature)		T	
		Input module, 2 analogue inputs		U	
		Output module, 2 analogue outputs		P	

[1] **F...**, **T...** Observe maximum number of inputs/outputs; ➔ Tables 4 / 4.8-27
 [2] **F11** Only permissible in first module position

Terminal CPX

Ordering data – Modular products



M Mandatory data

Electrical module for position 0 ... 9

3 Electrical actuator/inputs and outputs for position 0 ... 9: F06, F11, F13, F14, F23, F32, T03, T05, T11, T12, T13, T14, T15, T16, T17, T18, F, E, D, O, M, L, A, Y, I, T, U, P

4 – Connection technology for position 0 ... 9: GA, GB, GC, GD, GE, GF, GH, GI, GL, GM, GP, X, GW, W, R, GQ, GO, J, H, B, C

O Options

5 – Supply for position 0 ... 9: S, Z, V, QS, QZ, QV, QP, QX, QR, QY, QU

Module positions

4	5	6	7	8	9
FBZ					
3 + 4 + 5					

Ordering table

			Condi- tions	Code	Enter code
M	4	Connection technology for position 0 ... 9	Adapter, 2xM12, 5-pin, for DeviceNet/CANopen	GA	
			Connection set, 5-pin screw terminal, for DeviceNet/CANopen	GB	
			Without node-specific connection technology	GC	
			Straight plug, IP65 Sub-D, 9-pin, for DeviceNet/CANopen	GD	
			Straight plug, IP65 Sub-D, 9-pin, for Profibus DP	GE	
			Adapter, 2xM12 B-coded, for Profibus DP	GF	
			Connection set, IP65 RJ45, for Ethernet	GH	
			Connection set, IP65 2xSub-D, 9-pin, for Interbus	[3] GI	
			Adapter, 5-pin screw terminal, for CC-Link	GL	
			Straight plug, IP65 Sub-D, 9-pin, for CC-Link	GM	
			Connection block 2xM12 for Interbus	[3] GP	
			Connection block 4xM12, 5-pin, double	X	
			Connection block 4xM12, 5-pin, double, metal thread	GW	
			Connection block 4xM12, 5-pin, double, screened	W	
			Connection block 8xM8, 3-pin	R	
			Connection block 8xM8, 4-pin, double	GQ	
			Connection block 2xM12, B-coded, 5-pin for Profibus DP	[4] GO	
			Connection block 8x CageClamp clamps, 4-pin	J	
			Connection block, 4x Harax, 4-pin	H	
			Connection block Sub-D, 25-pin, socket	B	
Connection block, 4xM12, 8-pin (DNCV)	C				

- [3] **GI, GP** Only with electrical actuation/inputs and outputs F06 (fieldbus node for Interbus)
- [4] **GO** Only with electrical actuation/inputs and outputs F13 (fieldbus node for Profibus DP)

Terminal CPX

Ordering data – Modular products



→ **M** Mandatory data →

Pneumatic interface

Z, B, C, A, D, S

- **Z**
6

Ordering table			Condi- tions	Code	Enter code	
0	5	Feed for position 0 ... 9	Interlinking block with system supply	5	S	
			Interlinking block with additional power supply	6	Z	
			Interlinking block with valve supply	6 7	V	
			Interlinking block with system supply, M18, 4-pin	5	QS	
			Interlinking block with additional power supply, M18, 4-pin	8	QZ	
			Interlinking block with valve supply, M18, 4-pin	7 8	QV	
			Interlinking block with system supply, 7/8", 5-pin	5 7	QP	
			Interlinking block with additional power supply, 7/8", 5-pin	9	QX	
			Interlinking block with system supply, 7/8", 4-pin	5	QR	
			Interlinking block with additional power supply, 7/8", 4-pin	10	QY	
			Interlinking block with valve supply, 7/8", 4-pin	7 10	QU	
M	6	Pneumatic interface	CPX end plate, right-hand	11	-Z	
			CPX pneumatic interface to CPA10	12	-B	
			CPX pneumatic interface to CPA14	13	-C	
			CPX pneumatic interface to Midi/Maxi	14	-A	
			CPX pneumatic interface to MPA	15	-D	
			CPX pneumatic interface to terminal type 44 (ISO)		-S	

- | | |
|--|--|
| <p>5 S, QS, QP, QR
Always select to the left of the supply V, QV, QU (valve supply) or Z, QZ, QX, QY (additional power supply).</p> <p>6 Z, V
Only with supply S (system supply).
Only at position 1 ... 9</p> <p>7 V, QV, QP, QU
All manifold sub-bases with "electrical module, electrically isolated" H must be selected in the pneumatics of the MPA</p> <p>8 QZ, QV
Only with supply QS (system supply, M18, 4-pin)</p> | <p>9 QX
Only with supply QP (system supply, 7/8", 5-pin)</p> <p>10 QY, QU
Only with supply QR (system supply, 7/8", 4-pin)</p> <p>11 Z
Only for CPX without pneumatics (module system no. 197 330), but essential in this case</p> <p>12 B
Only for CPX with CPA-10 (module system no. 173 520), but essential in this case</p> <p>13 C
Only for CPX with CPA-14 (module system no. 174 001), but essential in this case</p> <p>14 A
Only for CPX with Midi/Maxi (module system no. 18 980), but essential in this case</p> <p>15 D
Only for CPX with MPA (module system no. 530 411), but essential in this case</p> |
|--|--|

Terminal CPX

Ordering data – Modular products

Options									
User documentation	Electrical accessories	Socket, M18	Plug, M12	Plug for 2 cables	Plug, M8	Plug for connection block	Socket, 7/8"	H-rail mounting	Additional attachment
D, E, F, I, J, S, V		...N, ...M, ...I, ...J	...S, ...T, ...W, ...P, ...GZ	...X, ...K	...C, ...R	...A, ...E	...GT, ...GS	H	U
- E	+	2N 10M						H	U
7	8								















Ordering table						
Module No.		197 330	Condi-tions	Code	Enter code	
0 7	User documentation	German		-D		
		English		-E		
		French		-F		
		Italian		-I		
		Japanese	16	-J		
		Spanish		-S		
		Swedish		-V		
8	Electrical accessories			+	+	
		Straight socket, M18, 4-pin, for operating voltage	Pg9 (1.5 mm ²)	1 ... 99 (NTSD-GD-9)	...N	
			Pg13.5 (2.5 mm ²)	1 ... 99 (NTSD-GD-13,5)	...M	
		Angled socket, M18, 4-pin, for operating voltage	Pg9 (1.5 mm ²)	1 ... 99 (NTSD-WD-9)	...I	
			Pg11 (2.5 mm ²)	1 ... 99 (NTSD-WD-11)	...J	
		Straight plug, M12, for sensors/actuators	4-pin, Pg7	1 ... 99 (SEA-GS-7)	...S	
			4-pin, Pg9	1 ... 99 (SEA-GS-9)	...T	
			4-pin, Pg7 (2.5 mm ² cable Ø)	1 ... 99 (SEA-4GS-7-2,5)	...W	
			5-pin, Pg7	1 ... 99 (SEA-M12-5GS-PG7)	...P	
		Straight plug, M12, for Ethernet	D-coded	1 ... 99	...GZ	
		Straight plug, M12, for 2 cables (DUO)	4-pin, Pg11	1 ... 99 (SEA-GS-11-DUO)	...X	
			5-pin, Pg11	1 ... 99 (SEA-5GS-11-DUO)	...K	
		Straight plug, M8, 3-pin, for sensors/actuators	Screw-in	1 ... 99 (SEA-3GS-M8-S)	...C	
			Solderable	1 ... 99 (SEA-GS-M8)	...R	
		Straight plug, for sensors/actuators	Harax 4-pin	1 ... 99 (SEA-GS-HAR-4POL)	...A	
			IP65, Sub-D, 25-pin	1 ... 99 (SD-SUB-D-ST25)	...E	
		Straight socket, 7/8", for operating voltage	4-pin	1 ... 99	...GT	
5-pin	1 ... 99		...GS			
H-rail mounting		1 (CPA-BG-NRH)	H			
Additional attachments for wall mounting		1	17	U		

16 J Only with electrical actuation/inputs and outputs F23 (fieldbus node for CC-Link)
 17 U An additional attachment is recommended for more than 4 module positions

Terminal CPX

Accessories











FESTO

Ordering data – Accessories				
Designation		Type	Part No.	
Inscription labels				
	Inscription labels, 6x10, 64 pieces, in frames	IBS-6x10	18 576	
	Inscription label holder for connection block	CPX-ST-1	536 593	
Module retainer				
	Attachment for wall mounting (for long valve terminals, 10 pieces)	CPX-BG-RW-10x	529 040	
Plug connector and accessories				
	Sub-D plug for INTERBUS	Incoming	FBS-SUB-9-BU-IB-B	532 218
		Outgoing	FBS-SUB-9-GS-IB-B	532 217
	Sub-D plug for DeviceNet/CANopen		FBS-SUB-9-BU-2x5POL-B	532 219
	Sub-D plug for Profibus DP		FBS-SUB-9-GS-DP-B	532 216
	Sub-D plug for CC-Link		FBS-SUB-9-GS-2x4POL-B	532 220
	Sub-D plug		FBS-SUB-9-GS-1x9POL-B	534 497
	Bus connection M12 adapter plug (B-coded) for Profibus DP		FBA-2-M12-5POL-RK	533 118
	Bus connection Micro Style 2xM12 for DeviceNet/CANopen		FBA-2-M12-5POL	525 632
	Socket for Micro Style connection, M12		FBSD-GD-9-5POL	18 324
	Plug for Micro Style connection, M12		FBS-M12-5GS-PG9	175 380
	Bus connection M12x1, 4-pin (D-coded) for Ethernet		NECU-M-S-D12G4-C2-ET	543 109
	Connection block M12 adapter (B-coded) for Profibus DP		CPX-AB-2-M12-RK-DP	541 519
	Connection block M12 adapter (B-coded) for INTERBUS		CPX-AB-2-M12-RK-IB	534 505
	Bus connection Open Style for 5-pin terminal strip for DeviceNet/CANopen		FBA-1-SL-5POL	525 634
	Bus connection 5-pin terminal strip for DeviceNet/CANopen		FBSD-KL-2x5POL	525 635
	Bus connection screw terminal for CC-Link		FBA-1-KL-5POL	197 962
	RJ45/plug		FBS-RJ45-8-GS	534 494
	Threaded sleeve, 4 pieces		UNC4-40/M3x6	533 000

Terminal CPX

Accessories

FESTO

Ordering data – Accessories				
Designation			Type	Part No.
Connecting cables				
	DUO cable M12-2xM8, 4-pin/2x3-pin	2x straight socket	KM12-DUO-M8-GDGD	18 685
		2x straight/angled socket	KM12-DUO-M8-GDWD	18 688
		2x angled socket	KM12-DUO-M8-WDWD	18 687
	Push-in T-connector	2x socket M8, 3-pin 1x plug M8, 4-pin	NEDU-M8D3-M8T4	544 391
		Push-in T-connector	2x socket M12, 5-pin 1x plug M12, 4-pin	NEDU-M12D5-M12T4
	Push-in T-connector		2x socket M8, 3-pin 1x plug M12, 4-pin	NEDU-M8D3-M12T4
			Connecting cable, M8-M8, straight plug-straight socket	0.5 m
1.0 m	KM8-M8-GSGD-1			175 489
2.5 m	KM8-M8-GSGD-2,5			165 610
5.0 m	KM8-M8-GSGD-5			165 611
Connecting cable M8-M12	1.0 m		KM8-M12-GSGD-1	187 859
	2.5 m		KM8-M12-GSGD-2,5	187 860
	5.0 m		KM8-M12-GSGD-5	187 861
Extension cable M12-M12, 5-pin, straight plug-straight socket	1.5 m		KV-M12-M12-1,5	529 044
	3.5 m		KV-M12-M12-3,5	530 901
Connecting cable M12-M12, 4-pin, straight plug-straight socket	2.5 m		KM12-M12-GSGD-2,5	18 684
	5.0 m	KM12-M12-GSGD-5	18 686	
Connecting cable, M12-M12, 8-pin, straight plug-straight socket	2.0 m	KM12-8GD8GS-2-PU	525 617	
		1.0 m	KM12-M12-GSWD-1-4	185 499
Connecting cable with angled plug and angled socket		0.25 m	KVI-CP-3-WS-WD-0,25	540 327
	0.5 m	KVI-CP-3-WS-WD-0,5	540 328	
	2 m	KVI-CP-3-WS-WD-2	540 329	
	5 m	KVI-CP-3-WS-WD-5	540 330	
	8 m	KVI-CP-3-WS-WD-8	540 331	
	Connecting cable with straight plug-straight socket	2 m	KVI-CP-3-GS-GD-2	540 332
		5 m	KVI-CP-3-GS-GD-5	540 333
		8 m	KVI-CP-3-GS-GD-8	540 334
	Modular system for connecting cables		NEBU-...	-
			→ 4 / 8.3-18	
	Programming cable		KDI-PPA-3-BU9	151 915
		Connecting cable FED		FEC-KBG7
	Connecting cable FED			FEC-KBG8
			Connecting cable FED	










Fieldbus systems/electrical periphery
Modular electrical terminals

4.8

Terminal CPX

Accessories

FESTO

Ordering data – Accessories				
Designation			Type	Part No.
Plug connector and accessories – Power supply				
	Plug socket for mains connection M18, straight	for 1.5 mm ²	NTSD-GD-9	18 493
		for 2.5 mm ²	NTSD-GD-13,5	18 526
	Plug socket for mains connection M18, angled	for 1.5 mm ²	NTSD-WD-9	18 527
		for 2.5 mm ²	NTSD-WD-11	533 119
	Power supply socket	7/8" connection, 5-pin	NECU-G78G5-C2	543 107
		7/8" connection, 4-pin	NECU-G78G4-C2	543 108
Covers and attachments				
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug		AK-8KL	538 219
	Fittings kit		VG-K-M9	538 220
	Screening plate for M12 connections		CPX-AB-S-4-M12	526 184
	Earthing element for right-hand/left-hand end plates (5 pieces)		CPX-EPFE-EV	538 892
	Inspection cover, transparent		AK-SUB-9/15-B	533 334
	Cover for RJ45 connection		AK-Rj45	534 496
	Protective cap for sealing unused sockets (10 pieces)	for M8 connections	ISK-M8	177 672
		M9	FLANSCHDOSE SER.712	356 684
		for M12 connections	ISK-M12	165 592
Software				
	CPX remote diagnosis and process visualisation		CPX-WEB-MONITOR	545 413
	Programming software	German	FST4.1DE	537 927
		English	FST4.1GB	537 928
	ePlan macro library		GSWC-TE-EP-LA	537 041