


Axis controllers SPC200

FESTO

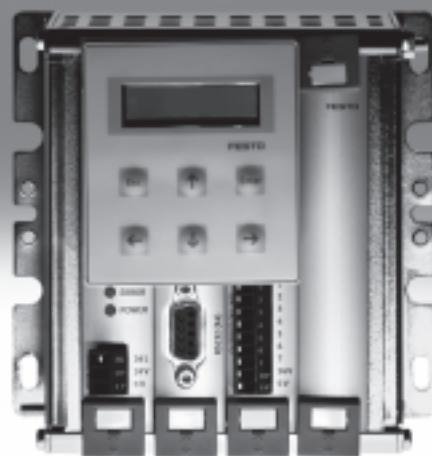


Axis controllers SPC200

Key features

FESTO

At a glance

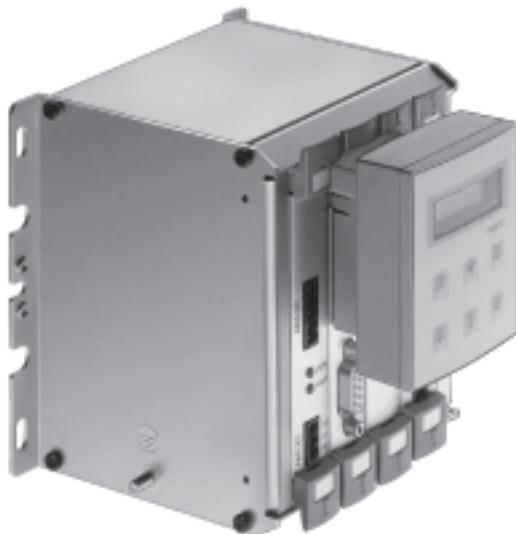

SPC200 – the most unique positioning controller in the world for pneumatic and electrical positioning technology

Strength in variety

- 1 to 4 positioning axes
- 3 different pneumatic drive families
- Stepper motor axes
- Technology mix

Strength in modularity

- Two housing sizes
- 9 different plug-in cards
- Combinable as required

Multi-purpose

- Set selection for simple applications
- Start/stop operation for demanding automation tasks
- Up to 100 programs
- Subprogram technology
- Register operations and much more

Strength in flexibility

- Digital inputs/outputs
- Analogue inputs
- Profibus, Device Net, Interbus
- CPV valve terminals for pneumatic switching functions

Strength in installation

- One axis string controls
- 2 pneumatic axes
- CPV valve terminals can be connected directly to the axis string
- Pre-assembled cables
- Plugs fit only in the correct sockets

Software WINPISA

- Project archiving
- Simple commissioning
- User-friendly programming
- Comprehensive diagnostics with graphics functions


Axis controllers SPC200

FESTO

Key features

In combination with the drive DNCI

The SPC200 is a position controller and positioning control in one. Together with the drive, the displacement encoder and the proportional directional control valve, it forms a closed control loop.

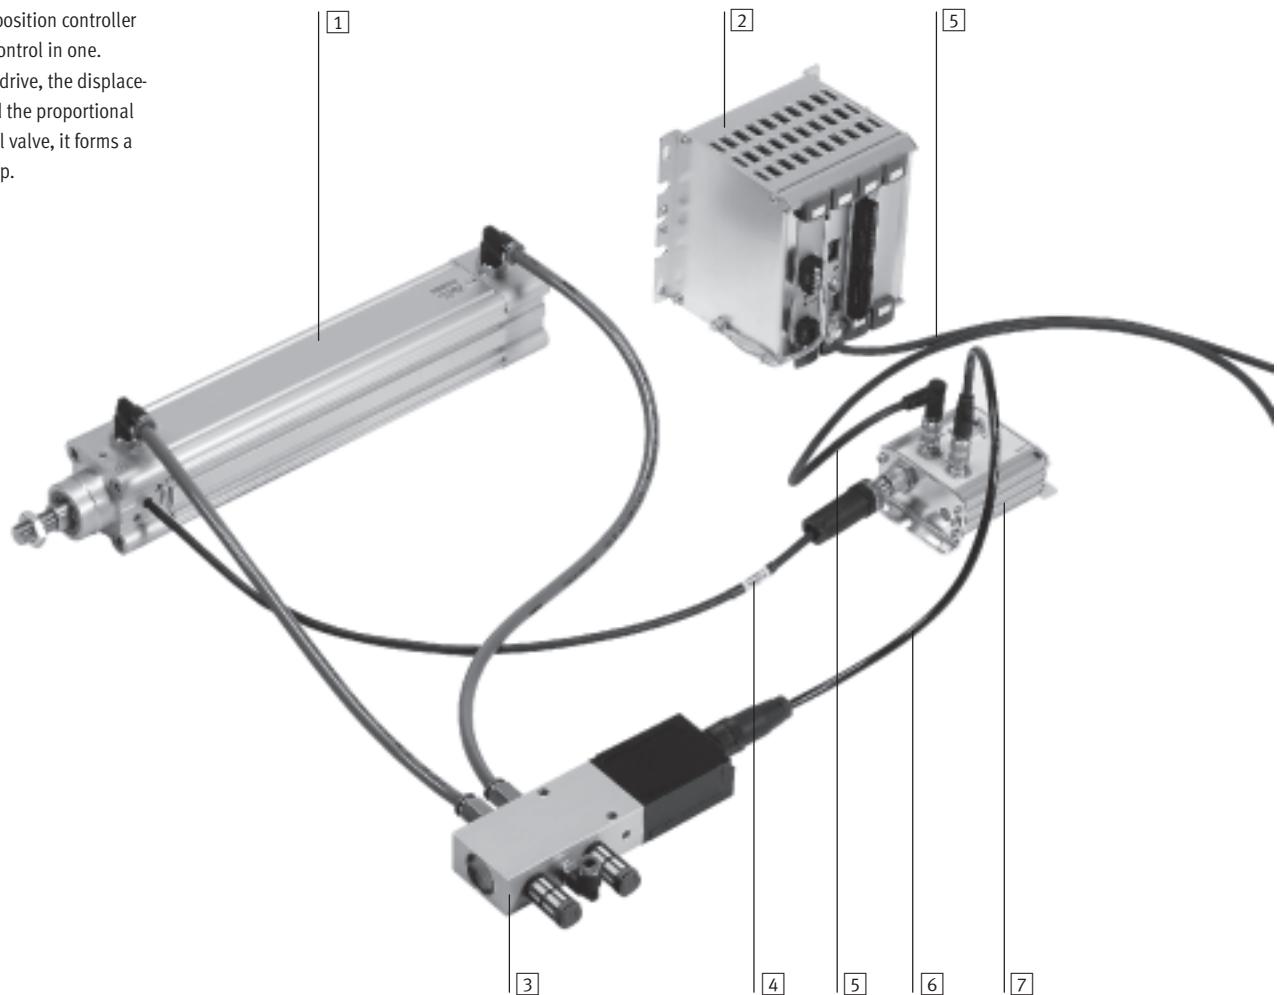

Individual components


| Type | Brief description |
|------------------|---|
| [1] DNCI-... | The pneumatic drive, in this case DNCI with integrated displacement encoder, generates the movement. It is controlled by the SPC200. |
| [2] SPC200-... | The axis controller with operating unit, in this case designed for a pneumatic drive, is an open and closed loop controller in one. |
| [3] MPYE-... | The proportional directional control valve is the final control element in the control loop and controls the movement of the drive in accordance with the specification of the closed loop controller in the SPC200. |
| [4] - | Connecting cable that connects the displacement encoder with the axis interface. The cable is permanently attached to the drive. |
| [5] KSPC-AIF... | Connecting cable that connects the controller SPC200 with the axis interface. |
| [6] KMPYE-AIF... | Connecting cable that connects the proportional directional control valve with the axis interface. |
| [7] SPC-AIF... | The axis interface forwards the measured values from the displacement encoder to the closed loop controller in the SPC200 and the control signal from the closed loop controller to the proportional directional control valve. |

 **New**
SPC-AIF-MTS-2

Axis controllers SPC200

Product range overview

FESTO

| Individual components for SPC200 | | | |
|---|--------------------------------|--|-----------------|
| | Type | Brief description | ➔ Page/Internet |
| Basic units | | | |
|  | SPC200-CPU-4 | Basic unit with 4 card locations | 6 |
| | SPC200-CPU-6 | Basic unit with 6 card locations | 6 |
| Plug-in cards | | | |
|  | SPC200-BP | Blanking plate | 7 |
| | SPC200-PWR-AIF | Power supply unit and axis interface connection | 10 |
| | SPC200-MMI-DIAG | Diagnostics and control unit connection | 11 |
| | SPC200-DIO | Digital inputs/outputs (10I/8O) | 12 |
| | SPC200-2AI-U | Analogue setpoint specification, 2 channels, 0 ... 10 V | 14 |
| | SPC200-SCU-AIF | Sub-controller for 3rd and 4th pneumatic axes | 15 |
| | SPC200-SMX-1 | Stepper motor interface | 16 |
| | SPC200-COM-PDP | Profibus-DP interface | 18 |
| | SPC200-COM-DN2 | DeviceNet interface | 20 |
| | SPC200-COM-IBS | Interbus interface | 22 |
| Control unit | | | |
|  | SPC200-MMI-1 | Control unit for commissioning, programming and diagnostics. Not all functions of the axis controller SPC200 are supported. Please use WinPISA for commissioning. | 23 |
| Connector modules for SPC200 | | | |
| | Type | Brief description | ➔ Page/Internet |
| Axis interface | | | |
|  | SPC-AIF-POT SPC-AIF-POT-LWG | For analogue displacement encoder (potentiometer) | 24 |
| | SPC-AIF-MTS | - For digital displacement encoder Tempsonics/AIF - For linear drive DGPI...-AIF | 24 |
| | SPC-AIF-INC | For standard cylinder DNCI | 26 |
| | SPC-AIF-MTS-2 | For linear drive DGCI | 28 |
| Power supply module | | | |
|  | SPC-AIF-SUP-24V | Additional power supply for the load voltage at the axis interface for cable lengths over 16 m | 30 |

Axis controllers SPC200

FESTO

Product range overview

| Basic configuration of controller packages | | Basic configuration | | | | | | | | ➔ Page/Internet | |
|--|--|---------------------|----------------|-----------------|------------|--------------|----------------|----------------|----------------|-----------------|---|
| Version | Brief description | SPC200-MMI-1 | SPC200-PWR-AIF | SPC200-MMI-DIAG | SPC200-DIO | SPC200-2AI-U | SPC200-SCU-AIF | SPC200-COM-PDP | SPC200-COM-IBS | SPC200-SMX-1 | |
| |  | | | | | | | | | | |
| SPC200/P01 | For 1 or 2 pneumatic axes with control unit | ■ | ■ | ■ | ■ | - | - | - | - | - | 9 |
| SPC200/P02 | For 1 or 2 pneumatic axes with control unit and 2 analogue inputs for positioning specifications | ■ | ■ | ■ | ■ | ■ | - | - | - | - | 9 |
| SPC200/P03 | With sub-controller for 3 or 4 pneumatic axes, with control unit | ■ | ■ | ■ | ■ | - | ■ | - | - | - | 9 |
| SPC200/P04 | With Profibus-DP interface for 1 or 2 pneumatic axes | - | ■ | ■ | - | - | - | ■ | - | - | 9 |
| SPC200/P05 | With Profibus-DP interface for up to 4 pneumatic axes | - | ■ | ■ | - | - | ■ | ■ | - | - | 9 |
| SPC200/P06 | With Interbus interface for 1 or 2 pneumatic axes | - | ■ | ■ | - | - | - | - | ■ | - | 9 |
| SPC200/P07 | With Interbus interface for up to 4 pneumatic axes | - | ■ | ■ | - | - | ■ | - | ■ | - | 9 |
| SPC200/P08 | With stepper motor interface for 1 axis and up to 2 pneumatic axes, with control unit | ■ | ■ | ■ | ■ | - | - | - | - | ■ | 9 |

| Expansion options for controller packages | | expandable using ... | | | | | | | |
|---|--|----------------------|------------|--------------|----------------|----------------|----------------|----------------|--------------|
| Version | Brief description | SPC200-MMI-1 | SPC200-DIO | SPC200-2AI-U | SPC200-SCU-AIF | SPC200-COM-PDP | SPC200-COM-IBS | SPC200-COM-CAN | SPC200-SMX-1 |
| |  | | | | | | | | |
| SPC200/P01 | For 1 or 2 pneumatic axes with control unit | - | 1) | 1) | 1) | 1) | 1) | 1) | 1) |
| SPC200/P02 | For 1 or 2 pneumatic axes with control unit and 2 analogue inputs for positioning specifications | - | - | - | - | - | - | - | - |
| SPC200/P03 | With sub-controller for 3 or 4 pneumatic axes, with control unit | - | - | - | - | - | - | - | - |
| SPC200/P04 | With Profibus-DP interface for 1 or 2 pneumatic axes | 2) | 1) | 1) | - | - | - | - | 1) |
| SPC200/P05 | With Profibus-DP interface for up to 4 pneumatic axes | 2) | - | - | - | - | - | - | - |
| SPC200/P06 | With Interbus interface for 1 or 2 pneumatic axes | 2) | 1) | 1) | - | - | - | - | 1) |
| SPC200/P07 | With Interbus interface for up to 4 pneumatic axes | 2) | - | - | - | - | - | - | - |
| SPC200/P08 | With stepper motor interface for 1 axis and up to 2 pneumatic axes, with control unit | - | - | - | - | - | - | - | - |

1) One free card location, therefore expandable with max. one card. This must be ordered separately.
Other configurations can be produced from the individual components

2) Optional

Axis controllers SPC200

Technical data

FESTO

Axis controller basic unit

SPC200-CPU-4

SPC200-CPU-6

Function

Basic unit for 4 or 6 function cards,
contains closed loop position
controller for 2 pneumatic axes and
universal positioning control for
4 axes



| General technical data | | SPC200 |
|---------------------------|--|---|
| Power supply | | →10 (SPC200-PWR-AIF) |
| Current consumption | SPC200-CPU-4/6 incl. SPC200-PWR-AIF | [mA] Typically 100 |
| Processor type | | Digital signal processor |
| Operating system | | Festo OS 4.6x ¹⁾ |
| Controller sampling time | [ms] | Typically 1.5 |
| Control cycle | [ms] | Typically 2 |
| Memory | Available for programs and data | [KB] 20 |
| Data backup | Backup cycles | Flash memory > 100 000 |
| No. of positioning axes | Total | 4 |
| | Pneumatic | Max. 4 |
| | Stepper motor | Max. 3 |
| No. of inputs/outputs | Local | Max. 40 inputs, 32 outputs ²⁾ |
| | Per AIF string | Max. 16 inputs and 16 outputs ³⁾ |
| | Via fieldbus | Max. 64 inputs and 64 outputs |
| No. of start programs | | 2 ⁴⁾ |
| No. of position registers | | 100 per axis |
| Operating modes | Set selection | No. of motion sets Max. 32 via local I/O per start program Max. 1,000 via fieldbus interface per start program |
| | Start/stop | Control signals ENABLE, READY, STOP, RESET, RECBIT1..5, CLK_A/B, RC_A/B, ACK_A/B |
| | | No. of programs Max. 100 |
| | | Control signals ENABLE, READY, START/RESET, STOP, MC_A/B, SYNC_IA/B, SYNC_OA/B |
| | | Programming NC programming to DIN 66025 |
| | | Instruction classes Positioning instructions I/O instructions Register instructions Sequence instructions |
| | | No. of NC sets Max. 2,000 |
| | | No. of NC sets per program Max. 1,000 |
| | | Nesting depth for subprograms Max. 4 |

1) Status: April 2003

2) Less the used control signals of the first card

3) Either as 1 input device and 1 output device of the CP fieldbus modules or 1 input/output module SPC-FIO ...

4) At least 1 start program must be active

Axis controllers SPC200

FESTO

Technical data

General technical data

| SPC200 | | |
|--|------------------------|--|
| CE marking symbol (see conformity declaration) | | As per EU EMC directive |
| Vibrations/shock | Vibrations | Tested to DIN/IEC 68, parts 2-6, severity level 1 |
| | Shock | Tested to DIN/IEC 68, parts 2-27, severity level 2 |
| Ambient conditions | Temperature range [°C] | -5 ... +50 |
| | Protection class | IP20 ⁵⁾ |
| | Relative air humidity | 95% non-condensing |
| Weight | SPC200-CPU-4 [kg] | 0.675 |
| | SPC200-CPU-6 [kg] | 0.85 |

5) With fully equipped basic unit

 New

Communication modules for connecting to a fieldbus, like Profibus or DeviceNet, facilitate reading and writing all registers of the axis controller SPC200.

Reading the actual position and writing a digital position setpoint.


Ordering data

| | | Part No. | Type |
|----------------------------|--|----------|---------------------|
| Axis controller basic unit | With 4 mounting locations | 170 173 | SPC200-CPU-4 |
| | With 6 mounting locations | 170 174 | SPC200-CPU-6 |
| Accessories | Blanking plate (plug-in card) | 170 229 | SPC200-BP |
| | Clip for H-rail assembly for SPC200 | 170 169 | CP-TS-HS-35 |
| User documentation | For axis controller basic unit, German | 170 245 | P.BE-SPC200-DE |
| | For axis controller basic unit, English | 170 246 | P.BE-SPC200-EN |
| Programming software | For Windows 95, 98, 2000, NT and XP, German | 170 095 | P.SW-WIN-PISA-CD-DE |
| WinPISA on CD-ROM | For Windows 95, 98, 2000, NT and XP, English | 170 096 | P.SW-WIN-PISA-CD-EN |
| | For Windows 95, 98, 2000, NT and XP, French | 194 508 | P.SW-WIN-PISA-CD-FR |

Function modules

Function modules that support communication between third-party controllers and the Profibus card of the axis controller SPC200 can be downloaded from the Download Area of the Festo website.

→ www.festo.com

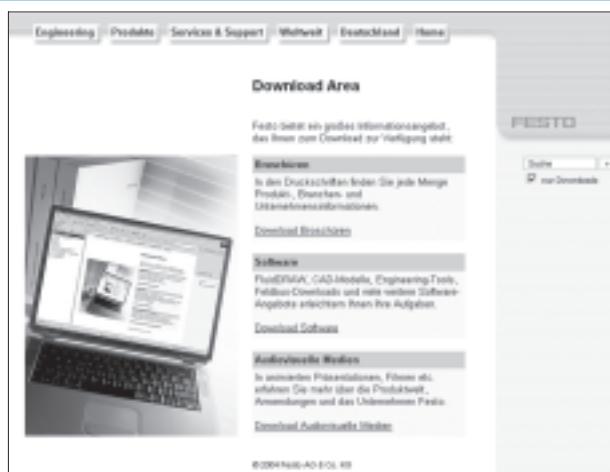

Axis controllers SPC200


Technical data

FESTO


Dimensions

SPC200-CPU-4 (rack for 4 mounting locations) using as an example: SPC200/P02

Download CAD data → www.festo.com

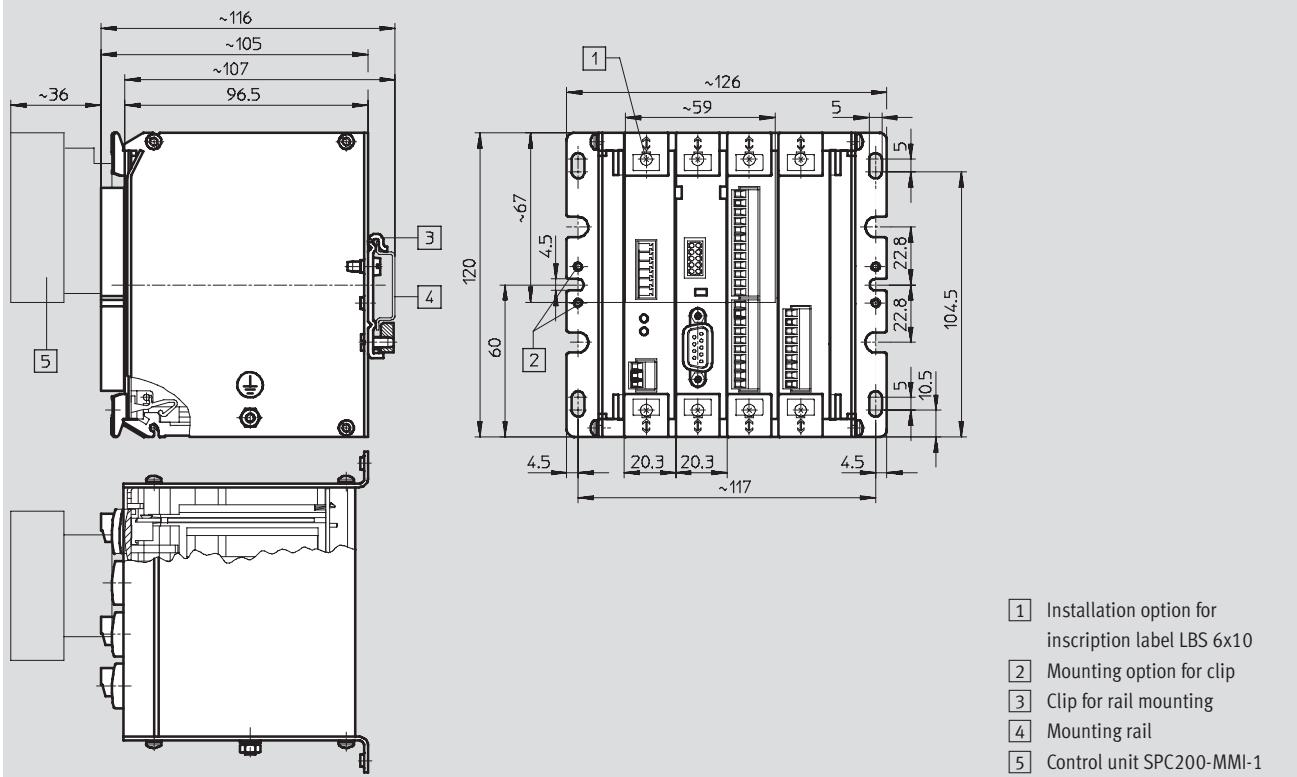

SPC200-CPU-6 (rack for 6 mounting locations)

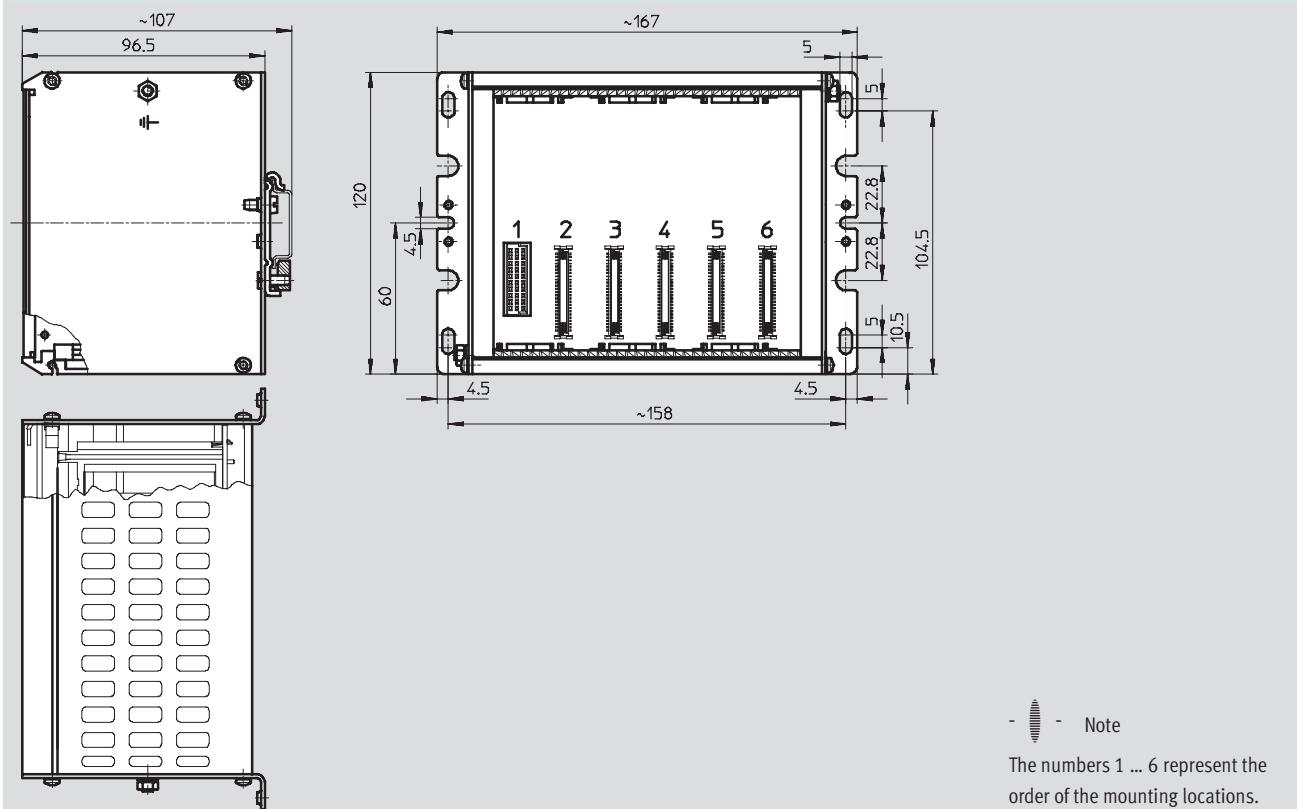


Axis controllers SPC200

FESTO

Technical data

Order of the mounting locations

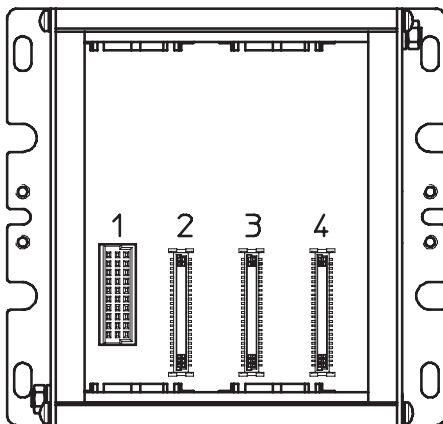

Configured controller packages

| Controller packages | Mounting location 1 | 2 | 3 | 4 | Control unit SPC200-MMI-1 ¹⁾ | Part No. | Type |
|---------------------|---------------------|-----|-----|-----|---|----------|------------|
| P01 | [1] | [2] | [4] | [9] | ■ | 170 521 | SPC200/P01 |
| P02 | [1] | [2] | [4] | [5] | ■ | 170 522 | SPC200/P02 |
| P03 | [1] | [2] | [4] | [3] | ■ | 170 523 | SPC200/P03 |
| P04 | [1] | [2] | [9] | [7] | - | 187 812 | SPC200/P04 |
| P05 | [1] | [2] | [3] | [7] | - | 187 813 | SPC200/P05 |
| P06 | [1] | [2] | [9] | [8] | - | 187 814 | SPC200/P06 |
| P07 | [1] | [2] | [3] | [8] | - | 187 815 | SPC200/P07 |
| P08 | [1] | [2] | [4] | [6] | ■ | 187 816 | SPC200/P08 |

1) Included in the scope of delivery

Legend

| Type | Description | ➔ Page/Internet |
|------|-----------------|-------------------------|
| [1] | SPC200-PWR-AIF | Power supply |
| [2] | SPC200-MMI-DIAG | Serial interface |
| [3] | SPC200-SCU-AIF | Sub-controller |
| [4] | SPC200-DIO | Digital I/O |
| [5] | SPC200-2AI-U | Setpoint module |
| [6] | SPC200-SMX-1 | Stepper motor interface |
| [7] | SPC200-COM-PDP | Profibus-DP interface |
| [8] | SPC200-COM-IBS | Interbus interface |
| [9] | SPC200-PB | Blanking plate |

Axis controllers SPC200

Technical data

FESTO

Power supply

SPC200-PWR-AIF

Function

Power supply and connection of the first axis string




General technical data

| SPC200-PWR-AIF | | |
|--|--|----------------------|
| Current consumption | Plug-in card | [mA] |
| Power supply unit (PWR) | Supply | [V DC] |
| | Residual ripple | [%] |
| | Power failure buffering for logic supply (pin 2) | [ms] |
| | Current consumption | Load, pin 1 [A] |
| | | Logic, pin 2 [A] |
| Feature | – | 2 pneumatic axes |
| Axis connection | Digital inputs | [max] |
| | Digital outputs | [max] |
| Electrical connections | Power supply unit | 3-pin terminal strip |
| | Axis connection | 5-pin terminal strip |
| CE marking symbol (see conformity declaration) | As per EU EMC directive | |
| Weight | [g] | 82 |
| Mounting location → 9 | 1 | |

1) Either as 1 input module and 1 output module of the CP modules or 1 input/output module SPC-FIO-...

Pin allocation

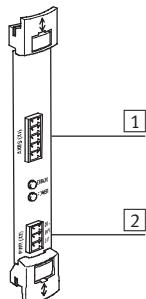

- [1] Terminal strip on cable type KSPC-AIF-WD-... pre-assembled
- [2] 3-pin terminal strip included in the scope of delivery. Connection cross section max. 1.5 mm²

Connecting cable → 32, no. [1]



Note
The valves at the axis interfaces and the outputs of the CP modules are supplied via the 24 V load supply. They can therefore be switched off independently of the logic supply in an emergency stop situation.

| [1] AXES (X1) | |
|---------------|-------------------------|
| Pin | Function |
| 1 | CAN-LOW (brown) |
| 2 | CAN-HIGH (white) |
| 3 | 24 V (yellow) |
| 4 | 0 V (green) |
| 5 | 24 V load supply (grey) |

| [2] PWR (X2) | |
|--------------|-------------------------------|
| Pin | Function |
| 1 | 24 V load supply (switchable) |
| 2 | 24 V supply logic |
| 3 | 0 V |
| | |
| | |

Ordering data

| | | Part No. | Type |
|--------------|---|----------|----------------|
| Plug-in card | Power supply unit and axis interface connection | 170 175 | SPC200-PWR-AIF |

Axis controllers SPC200

FESTO

Technical data

Serial interface

SPC200-MMI-DIAG

Function

Serial interface for diagnostics and programming, connection of the control unit MMI-1




General technical data

| SPC200-MMI-DIAG | | |
|--|----------------------|--|
| Current consumption | Plug-in card | [mA] |
| | | Typically 50 ¹⁾ |
| Serial interface | Version | RS 232 C |
| | Electrical isolation | Yes |
| | Baud rate | [baud] |
| | | 9,600; 19,200; 38,400; 57,600; 115,200 ²⁾ |
| | Data | [bit] |
| | | 8 |
| | Stop bit | [bit] |
| | | 1 |
| | Parity | |
| | | Even parity |
| | Protocol | |
| | | No handshake |
| MMI interface | Version | Similar to RS 232 C |
| | Electrical isolation | No |
| Electrical connections | Serial interface | 9-pin SUB-D, female |
| | MMI-1 | 5 double-pin row |
| CE marking symbol (see conformity declaration) | | As per EU EMC directive |
| Weight | [g] | 68 |
| Mounting location ➔ 9 | | 2 |

1) With control unit SPC200-MMI-1

2) The baud rate is 9,600 baud after each POWER ON

Pin allocation

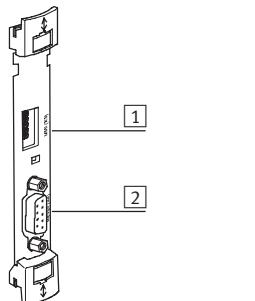

① Interface for control unit

SPC200-MMI-1

② Serial interface

Connecting cable ➔ 32, no. ⑦

② RS232 (X4)

| Pin | Function |
|-----|------------------------|
| 2 | Received Data (RxD) |
| 3 | Transmitted Data (TxD) |
| 5 | Signal Ground (SNGD) |

Ordering data

| | | Part No. | Type |
|--------------|---|----------|-----------------|
| Plug-in card | Diagnostics and control unit connection | 170 176 | SPC200-MMI-DIAG |

Axis controllers SPC200

Technical data

FESTO

Digital I/O module SPC200-DIO

Function

Digital input/output card (local I/O)



| General technical data | | |
|------------------------|---|--------------------------------------|
| | | SPC200-DIO |
| Current consumption | Plug-in card | [mA] |
| Digital inputs | Number | 10 |
| | Sensor supply | [A] |
| | Current consumption | [mA] |
| | Fuse protection for sensor supply | Electronic short-circuit protection |
| | Delay | [ms] |
| Digital outputs | Number | 8 |
| | Supply | [V DC] |
| | Max. current-carrying capacity per output | [mA] |
| | Fuse protection for outputs | Electronic, all outputs |
| | Max. tripping current | [A] |
| | Response time | [ms] |
| Version | Inputs/outputs | To IEC 61131-2, positive logic (PNP) |
| Electrical isolation | Inputs/outputs | No/yes |
| Electrical connections | Inputs | 12-pin terminal strip |
| | Outputs | 10-pin terminal strip |
| Weight | [g] | 62 |
| Mounting location → 9 | From 3 upwards | |

1) Via internal 24 V supply (pin 2 to PWR to plug-in card SPC200-PWR-AIF)


2) Supplied separately, note load data

Axis controllers SPC200

FESTO

Technical data

Pin allocation

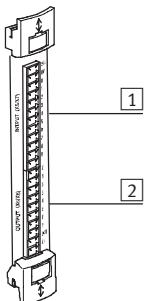

- [1] 12-pin terminal strip included in the scope of delivery.
Connection cross section max. 1.5 mm²
- [2] 10-pin terminal strip included in the scope of delivery.
Connection cross section max. 1.5 mm²



Note

Inputs and outputs on the first card are reserved for necessary functions such as start, stop, etc. Up to 7 inputs and 5 outputs are freely programmable.

On the other cards, all 10 inputs and 8 outputs are freely programmable. Up to 4 I/O cards can be inserted (in 6x rack).

[1] Input (X5/X7)

| Pin | Function | Start/stop operation | Set selection |
|-----|----------|----------------------------|---------------------|
| 1 | 24 V | Supply (for switch/sensor) | |
| 2 | 0 V | | |
| 3 | I0.0 | Freely programmable | RECBIT1 |
| 4 | I0.1 | Freely programmable | RECBIT2 |
| 5 | I0.2 | Freely programmable | RECBIT3 |
| 6 | I0.3 | Freely programmable | RECBIT4 |
| 7 | I0.4 | Freely programmable | RECBIT5 |
| 8 | I0.5 | (SYNC_IN/B) ¹⁾ | CLK_B |
| 9 | I0.6 | (SYNC_IN/B) ¹⁾ | CLK_A |
| 10 | I0.7 | STOP | STOP |
| 11 | I0.8 | START/RESET ²⁾ | RESET ²⁾ |
| 12 | I0.9 | ENABLE | ENABLE |

1) Freely programmable, if not used

2) Reset (program reset) only in combination with 0 signal at stop input

[2] Output (X2)

| Pin | Function | Start/stop operation | Set selection |
|-----|----------|----------------------------------|---------------|
| 1 | Q0.0 | Freely programmable | - |
| 2 | Q0.1 | Freely programmable | - |
| 3 | Q0.2 | Freely programmable | - |
| 4 | Q0.3 | MC_B | RC_B |
| 5 | Q0.4 | MC_A | RC_A |
| 6 | Q0.5 | (SYNC_OUT/B) ¹⁾ | ACK_B |
| 7 | Q0.6 | (SYNC_OUT/A) ¹⁾ | ACK_A |
| 8 | Q0.7 | READY | READY |
| 9 | 24 V | Supply (load supply for outputs) | |
| 10 | 0 V | | |
| | | | |
| | | | |

Ordering data

| | | Part No. | Type |
|--------------|---------------------------------|----------|------------|
| Plug-in card | Digital inputs/outputs (10I/8O) | 170 179 | SPC200-DIO |

Axis controllers SPC200

Technical data

FESTO

Setpoint module
SPC200-2AI-U


Function
Analogue input card



General technical data

| SPC200-2AI-U | | |
|-----------------------|--------------------------|----------------------|
| Current consumption | Plug-in card | [mA] |
| | | Typically 10 |
| Analogue inputs | Number | 2 |
| | Input voltage | [V DC] |
| | 0 ... 10 | |
| | Input filter, low pass | [Hz] |
| | 16 | |
| | Resolution | [bit] |
| | 12 | |
| | Non-linearity | 3 LSB |
| | Max. amplification error | [%] |
| | 0.2 | |
| | Max. offset error | [mV] |
| | 1.5 | |
| | Absolute accuracy | [%] |
| | < 0.3 | |
| | Input resistance | [kΩ] |
| Reference voltage | | [V DC] |
| | | 10 |
| | Absolute accuracy | [%] |
| | 0.4 | |
| | Max. current | [mA] |
| | 8 | |
| Electrical connection | | 9-pin terminal strip |
| Weight | [g] | 55 |
| Mounting location ➔ 9 | | From 3 upwards |

Pin allocation

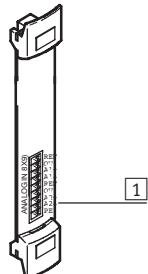

① 9-pin terminal strip included in the scope of delivery.
Connection cross section max. 1.5 mm²

Note

Max. 2 plug-in cards can be used for position specifications for up to 4 axes.
The allocation of the channel to an axis is programmable.

Only one axis can be allocated to each channel.
Offset and scaling of the setpoint specifications are also separately programmable for each channel.

① Analogue IN (X9)

| Pin | Function |
|-----|---------------------------------------|
| 1 | Reference voltage 10 V _{REF} |
| 2 | 0 V |
| 3 | A1+; signal (+) for channel 1 |
| 4 | A1-; signal (-) for channel 1 |
| 5 | Reference voltage 10 V _{REF} |
| 6 | 0 V |
| 7 | A2+; signal (+) for channel 2 |
| 8 | A2-; signal (-) for channel 2 |
| 9 | PE |

Ordering data

| | | Part No. | Type |
|--------------|---|----------|--------------|
| Plug-in card | Analogue setpoint specification, 2 channels, 0 ... 10 V | 170 177 | SPC200-2AI-U |

Axis controllers SPC200

FESTO

Technical data

Sub-controller SPC200-SCU-AIF

Function

Contains the position controllers for 2 further pneumatic axes and connection for the second axis string




General technical data

| SPC200-SCU-AIF | | |
|--|-----------------|-------------------------------|
| Current consumption | Plug-in card | [mA] |
| | | Typically 100 |
| Axis connection | 2nd string | 3rd and 4th pneumatic axes |
| | Digital inputs | [max] |
| | | 16 function I/O ¹⁾ |
| | Digital outputs | [max] |
| | | 16 function I/O ¹⁾ |
| Electrical connection | Axis connection | 5-pin terminal strip |
| CE marking symbol (see conformity declaration) | | As per EU EMC directive |
| Weight | [g] | 80 |
| Mounting location → 9 | | From 3 upwards |

1) Either as 1 input module and 1 output module of the CP modules or 1 input/output module SPC-FI0-...

Pin allocation

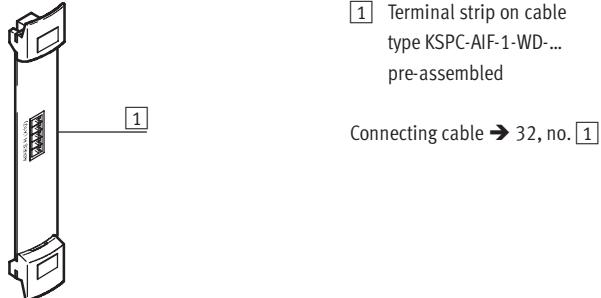

1 AXES B (X10)

| Pin | Function |
|-----|-------------------------|
| 1 | CAN-LOW (brown) |
| 2 | CAN-HIGH (white) |
| 3 | 24 V (yellow) |
| 4 | 0 V (green) |
| 5 | 24 V load supply (grey) |

Ordering data

| | | Part No. | Type |
|--------------|---|----------|----------------|
| Plug-in card | Sub-controller for 3rd and 4th pneumatic axes | 178 311 | SPC200-SCU-AIF |

Axis controllers SPC200

Technical data

FESTO

Stepper motor interface SPC200-SMX-1

Function

Stepper motor interface with clock/
direction interface and all necessary
sensor inputs



General technical data

| General technical data | | | SPC200-SMX-1 |
|--|---------------------|---------------------------------------|--|
| Current consumption | Plug-in card | [mA] | Typically 80 |
| Stepper motor interface | Inputs | + READY | [V DC] |
| | | - READY | Connect via relay contact |
| | | Switching current | [mA] |
| | Outputs | PULSE, DIRECTION, ENABLE, F/H STEP | |
| | | Version | Push-pull to RS 485/RS 422 ²⁾ |
| | | Max. line length | [m] |
| | | Step frequency | [Hz] |
| | | Frequency ramp | [kHz/s] |
| | Programmable travel | [mm] | 0 ... 9,999.99 |
| | | Resolution | [steps/mm] |
| Sensors | Digital inputs | Number | 3 |
| | | Version | To IEC 61131-2, positive logic (PNP) |
| | | Voltage | [V DC] |
| | | Input current | [mA] |
| Electrical connections | Stepper motor | 15-pin SUB-D, female | |
| | Sensors | 5-pin terminal strip | |
| CE marking symbol (see conformity declaration) | | | As per EU EMC directive |
| Weight | [g] | 69 | |
| Mounting location ➔ 9 | | | From 3 upwards |

1) Connected internally with 24 V of the sensor supply (pin 4)

2) As point to point connection


3) Note voltage range of the sensors used

Axis controllers SPC200

FESTO

Technical data

Pin allocation

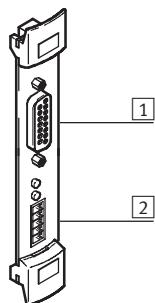

- 1 15-pin SUB-D socket for connection of the stepper motor controller
 - 2 5-pin terminal strip included in the scope of delivery.
Connection cross section max. 1.5 mm²

Connecting cable → 33, no. 8

- Note

With the plug-in card
SPC200-SMX-1 the SPC200 can
control a stepper motor axis.
Max. 3 cards SPC200-SMX-1 can be
used to control stepper motor axes.

| [1] Amplifier (X30) | |
|---------------------|---------------------------------------|
| Pin | Function |
| 1 | + PULSE (pulse) |
| 2 | + DIRECT. (direction) |
| 3 | + ENABLE (gate/enable) |
| 4 | Unused |
| 5 | + F/H STEP switching (full/half step) |
| 6 | - F/H STEP switching (full/half step) |
| 7 | Unused |
| 8 | + READY (readiness) |
| 9 | - PULSE (pulse) |
| 10 | - DIRECT. (direction) |
| 11 | - ENABLE (gate/enable) |
| 12 | Unused |
| 13 | Unused |
| 14 | Unused |
| 15 | - READY (readiness) |

| Ordering data | | Part No. | Type |
|--------------------|--------------------------------------|----------|----------------------|
| Plug-in card | Stepper motor interface | 175 731 | SPC200-SMX-1 |
| User documentation | For stepper motor interface, German | 188 894 | P.BE-SPC200-SMX-1-DE |
| | For stepper motor interface, English | 188 895 | P.BE-SPC200-SMX-1-EN |
| | For stepper motor interface, French | 194 506 | P.BE-SPC200-SMX-1-FR |
| | For stepper motor interface, Italian | 194 507 | P.BE-SPC200-SMX-1-IT |

Axis controllers SPC200

Technical data

FESTO

Profibus-DP interface

SPC200-COM-PDP

Function

Profibus interface of the SPC200 as slave to a Profibus network



General technical data

| General technical data | | | SPC200-COM-PDP |
|--|--|----------------|--|
| Current consumption | Plug-in card | [mA] | Typically 50 |
| Profibus | Version | | RS 485 |
| | Electrical isolation | | Yes |
| | Type of transmission | | Serial asynchronous, half-duplex |
| | Protocols | | Profibus-DP (standard slave), to DIN 19245, 1 – 4, EN 50170 Vol. 2 |
| | Addressing range of the fieldbus interface | | 0 ... 125 |
| | Max. address volume | Outputs [Byte] | 32 |
| | | Inputs [Byte] | 32 |
| | Baud rate | [kBit/s] | 9.6 – 12,000 ¹⁾ |
| | Line length | [km] | 23.8 ²⁾ |
| | Max. load capacity | [mA] | 100 ³⁾ |
| Configuration support for the fieldbus interface | GSD file | | |
| Electrical connection | Profibus | | 9-pin SUB-D, female |
| CE marking symbol (see conformity declaration) | As per EU EMC directive | | |
| Weight | [g] | | 80 |
| Mounting location ➔ 9 | From 3 upwards ⁴⁾ | | |

1) Automatic baud rate detection

2) Line length dependent on baud rate and type of cable

3) Supply voltage positive (PV5), pin 6


4) When using the control unit MMI-1 as of location 4

Axis controllers SPC200

FESTO

Technical data

Pin allocation

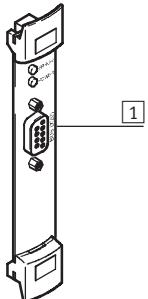

- [1] 9-pin plug usable acc. to
Profibus standard,
type FBS-SUB-9-WS-PB-K
→ Table below

- - - New

Position data can be read and
written directly via Profibus
(as of firmware release 2.0)

[1] Bus (X20)

Pin Function

| | |
|---|-----------|
| 1 | PE |
| 2 | Unused |
| 3 | RxD/TxD-P |
| 4 | CNTR-P |
| 5 | DGND |
| 6 | UP |
| 7 | Unused |
| 8 | RxD/TxD-N |
| 9 | Unused |

Ordering data

| | | Part No. | Type |
|---------------------|------------------------------------|----------|------------------------|
| Plug-in card | Profibus-DP interface | 170 224 | SPC200-COM-PDP |
| Accessories | Connector plug | 533 780 | FBS-SUB-9-WS-PB-K |
| User documentation | For Profibus-DP interface, German | 188 892 | P.BE-SPC200-COM-PDP-DE |
| | For Profibus-DP interface, English | 188 893 | P.BE-SPC200-COM-PDP-EN |
| | For Profibus-DP interface, French | 194 502 | P.BE-SPC200-COM-PDP-FR |
| | For Profibus-DP interface, Italian | 194 503 | P.BE-SPC200-COM-PDP-IT |
| Software and manual | For Simatic S7 controller, German | 540 188 | P.SW-SPC200-S7-PC-DE |
| | For Simatic S7 controller, English | 540 189 | P.SW-SPC200-S7-PC-EN |

Function modules

→ www.festo.com

Function modules that support communication between third-party controllers and the Profibus card of the axis controller SPC200 can be downloaded from the Download Area of the Festo website.

- New
SPC200-COM-DN2

Axis controllers SPC200

Technical data

FESTO

DeviceNet interface SPC200-COM-DN2

Function

DeviceNet interface of the SPC200 as slave to a DeviceNet network.



This function card replaces the following card:
 Part No. 194 017
 Type: SPC200-COM-DN2




General technical data

| SPC200-COM-DN2 | | |
|--|--|---|
| Current consumption | Plug-in card | [mA] |
| Power supply | Fieldbus | [V DC] |
| DeviceNet bus | Version | <ul style="list-style-type: none"> – Physical layer (layer 1) to ISO/DIS 11898 – Standard highspeed to 1Mbit – Data Link layer (layer 2) to CAN specifications V2.0 – DeviceNet, Release 2.0 |
| | Electrical isolation | Yes |
| | Protocols | <ul style="list-style-type: none"> – DeviceNet-IO – DeviceNet-Profil |
| | Addressing range of the fieldbus interface | 0 ... 63 |
| | Baud rate | [kBit/s] |
| Number of outputs | Set selection | [Byte] |
| | Start/Stop | [Byte] |
| Number of inputs | Set selection | [Byte] |
| | Start/Stop | [Byte] |
| Operation characteristic | | Reading an writing inputs and outputs |
| | | Reading and writing all program registers of the SPC200 |
| | | Read out the actual position |
| | | Digital setpoint specification |
| LED display | | Module and network status |
| Device-specific diagnosis | | <ul style="list-style-type: none"> Via status bit Via WinPISA status display |
| Configuration support for the fieldbus interface | | EDS file |
| Electrical connection | Open Style | 5-pin terminal strip |
| CE marking symbol (see conformity declaration) | | As per EU EMC directive |
| Weight | [g] | 80 |
| Mounting location ➔ 9 | | From 3 upwards |

Axis controllers SPC200

Technical data

Pin allocation

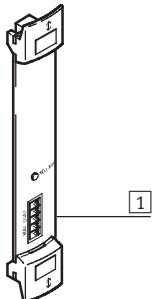

- [1] 5-pin terminal strip included in the scope of delivery.
Connection cross section max. 1.5 mm²

- New

The card SPC200-COM-DN2 facilitates the connection of the SPC200 to DeviceNet. Position data can be read and written directly via Profibus (as of firmware release 4.9).

[1] Bus (X20)

| Pin | Function |
|-----|--------------------------------------|
| 1 | 0 V bus interface/logic (CAN_GND) |
| 2 | Data – (CAN_L) |
| 3 | Screen (CAN_SHLD) |
| 4 | Data + (CAN_H) |
| 5 | 24 V DC bus interface/logic (CAN_V+) |

Ordering data

| | | Part No. | Type |
|--------------------|----------------------------------|----------|--------------------------|
| Plug-in card | DeviceNet interface | 540 305 | SPC200-COM-DN2 |
| User documentation | For DeviceNet interface, German | 196 607 | P.BE-SPC200-COM-CANDN-DE |
| | For DeviceNet interface, English | 196 608 | P.BE-SPC200-COM-CANDN-EN |
| | For DeviceNet interface, French | 196 611 | P.BE-SPC200-COM-CANDN-FR |
| | For DeviceNet interface, Italian | 196 610 | P.BE-SPC200-COM-CANDN-IT |

Axis controllers SPC200

Technical data

FESTO

Interbus interface

SPC200-COM-IBS

Function

Interbus interface of the SPC200 to an
Interbus network




General technical data

| SPC200-COM-IBS | | |
|--|------------------------------|----------------------------------|
| Current consumption | Plug-in card | [mA] |
| | | Typically 70 |
| Interbus | Version | RS 422 |
| | Electrical isolation | Yes |
| | Type of transmission | Serial asynchronous, full-duplex |
| | Protocols | Remote bus |
| Max. no. of process data bits | Outputs | 64 |
| | Inputs | 64 |
| Baud rate | [kBit/s] | 500 |
| Line length, overall system | [km] | 12.8 |
| Between 2 remote bus stations | [m] | 400 |
| Configuration support for the fieldbus interface | Icons for CMD software | |
| Electrical connection | Input | 9-pin SUB-D, male |
| | Output | 9-pin SUB-D, female |
| CE marking symbol (see conformity declaration) | As per EU EMC directive | |
| Weight | [g] | 80 |
| Mounting location ➔ 9 | From 3 upwards ¹⁾ | |

1) When using the control unit MMI-1 as of location 4

Pin allocation

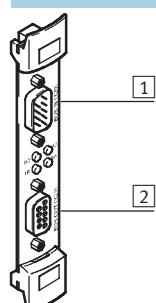

[1] + [2] Cable with plug acc. to
Interbus standard

- - Note

The card SPC200-COM-IBS facilitates the connection of the SPC200 to Interbus.
The operating modes that are available via I/Os are emulated.

| [1] IN (X20) | |
|--------------|----------------|
| Pin | Function |
| - | Housing/screen |
| 1 | D0 |
| 2 | DI |
| 3 | Load |
| 4 | Unused |
| 5 | Unused |
| 6 | /D0 |
| 7 | /DI |
| 8 | Unused |
| 9 | Unused |

| [2] OUT (X21) | |
|---------------|----------------|
| Pin | Function |
| - | Housing/screen |
| 1 | D0 |
| 2 | DI |
| 3 | Load |
| 4 | Unused |
| 5 | VCC |
| 6 | /D0 |
| 7 | /DI |
| 8 | Unused |
| 9 | RBST |

Ordering data

| | | Part No. | Type |
|--------------------|---------------------------------|----------|------------------------|
| Plug-in card | Interbus interface | 170 225 | SPC200-COM-IBS |
| User documentation | For Interbus interface, German | 188 890 | P.BE-SPC200-COM-IBS-DE |
| | For Interbus interface, English | 188 891 | P.BE-SPC200-COM-IBS-EN |
| | For Interbus interface, French | 194 504 | P.BE-SPC200-COM-IBS-FR |
| | For Interbus interface, Italian | 194 505 | P.BE-SPC200-COM-IBS-IT |

Axis controllers SPC200

FESTO

Technical data

Control unit

SPC200-MMI-1

Not all functions of the axis controller SPC200 are supported. Please use WinPISA for commissioning.




General technical data

| | |
|--|---|
| SPC200-MMI-1 | |
| Display | LCD display, 2 x 16 characters |
| Operation | Touch-sensitive keypad with 6 keys |
| Power supply | [V DC] 5 ¹⁾ |
| Current consumption | [mA] 30 ²⁾ |
| Interface | 3) |
| Electrical isolation | No |
| Electrical connections | Interface 10-pin row Power supply 10-pin row |
| CE marking symbol (see conformity declaration) | As per EU EMC directive |
| Ambient conditions | Temperature range [°C] -5 ... +50 Protection class to IEC 60529 IP20 |
| Weight | [g] 90 |

- 1) Is supplied directly via the plug-in card SPC200-MMI-DIAG
2) Referred to 24 V supply of the SPC200-PVR card
3) Similar to RS 232

Pin allocation

1) Plug-in direct

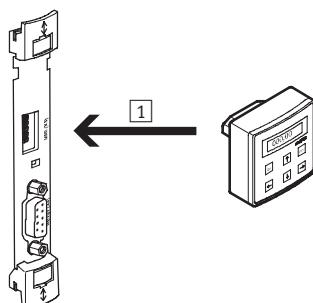

Ordering data

| | | Part No. | Type |
|--------------|--|----------|--------------|
| Control unit | For commissioning, programming and diagnostics | 170 226 | SPC200-MMI-1 |

Axis controllers SPC200

Technical data

FESTO


Axis interface

SPC-AIF-POT
SPC-AIF-POT-LWG
SPC-AIF-MTS

Function

Connection of the proportional valve and the displacement encoder of a pneumatic axis to the SPC200.


Routing of the axis connection to the second axis interface or to a CP module

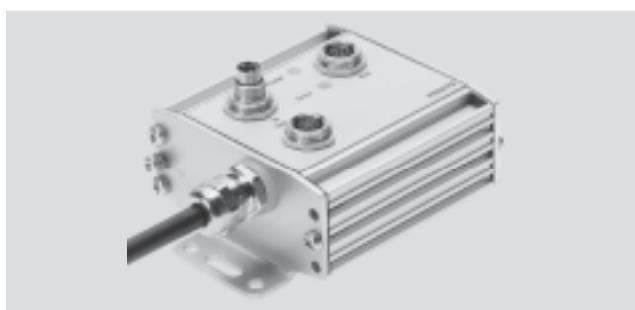

General technical data

| | | SPC-AIF-POT | SPC-AIF-POT-LWG | SPC-AIF-MTS |
|--|---|-------------------------|-------------------|---------------------------------|
| Current consumption | Axis interface [mA] | 100 | 100 | 200 |
| | Prop. directional control valve, max. [A] | 1.1 | | |
| Electrical connections | AIF IN | 5-pin M9, male | | |
| | AIF OUT | 5-pin M9, female | | |
| | Prop. directional control valve | 7-pin M9, male | | |
| | Displ. encoder cable length [m] | 0.3 | | |
| | Plug | Type A DIN 43650 | 4-pin square plug | 6-pin round connector DIN 45322 |
| CE marking symbol (see conformity declaration) | | As per EU EMC directive | | |
| Ambient conditions | Temperature range [°C] | 0 ... +50 | | |
| | Protection class to IEC 60529 | IP65 | | |
| Weight | [g] | 300 | | |

Pin allocation

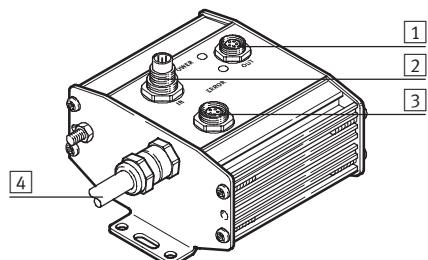

Connecting cable → 32,
no. 2/no. 3/no. 5

| [1] AIF OUT | |
|-------------|-------------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | 24 V load supply (grey) |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |
| | |
| | |

| [2] AIF IN | |
|------------|-------------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | 24 V load supply (grey) |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |
| | |
| | |

| [3] Proportional directional control valve | |
|--|----------------|
| Pin | Function |
| 1 | +24 V |
| 2 | 0 V |
| 3 | 0 V |
| 4 | Setpoint value |
| 5 | GND |
| 6 | Unused |
| 7 | +24 V |
| PE | Screen |
| | |

| [4] Displacement encoder POT | |
|------------------------------|----------------|
| Pin | Function |
| 1 | +10 V (green) |
| 2 | Signal (white) |
| 3 | GND (brown) |
| PE | PE (yellow) |
| | |
| | |
| | |


| [4] Displacement encoder LWG | |
|------------------------------|----------------|
| Pin | Function |
| 1 | +10 V (green) |
| 2 | Signal (white) |
| 3 | GND (brown) |
| PE | PE (yellow) |
| | |
| | |
| | |

| [4] Displacement encoder MTS | |
|------------------------------|-------------------|
| Pin | Function |
| 1 | Can LOW (white) |
| 2 | Can HIGH (yellow) |
| 3 | Unused |
| 4 | Unused |
| 5 | +24 V (green) |
| 6 | 0 V (brown) |
| PE | Screen |
| | |

Axis controllers SPC200

FESTO

Technical data

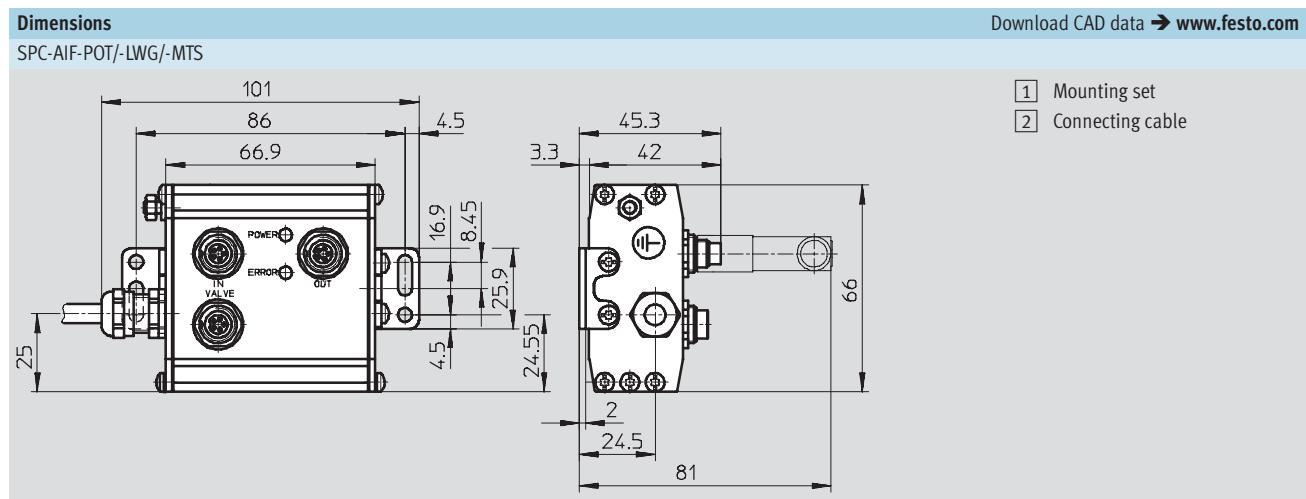

Ordering data

| | | Part No. | Type |
|----------------|-------------------------------------|----------|----------------------------|
| Axis interface | For analogue displacement encoder | 170 228 | SPC-AIF-POT |
| | | 527 496 | SPC-AIF-POT-LWG |
| Accessories | For digital displacement encoder | 170 231 | SPC-AIF-MTS |
| | Terminating resistor for AIF string | 175 403 | KABS-M9-R100 ¹⁾ |
| | Mounting set for vertical fitting | 540 309 | SPC-HBW-SET |

1) One contained in SPC200/POX

Axis controllers SPC200

Technical data

FESTO

Axis interface SPC-AIF-INC

Function

Connection of the proportional valve and the displacement encoder of a pneumatic axis to the SPC200.




SPC-AIF-INC

General technical data

| General technical data | | |
|--|---|-------------------|
| Current consumption | Axis interface [mA] | 60 |
| | Prop. directional control valve, max. [A] | 1.1 |
| Electrical connections | AIF IN | 5-pin M9, male |
| | AIF OUT | 5-pin M9, female |
| | Prop. directional control valve | 7-pin M9, male |
| | Displacement encoder | 8-pin M12, female |
| CE marking symbol (see conformity declaration) | As per EU EMC directive | |
| Ambient conditions | Temperature range [°C] | 0 ... +50 |
| | Protection class to IEC 60529 | IP65 |
| Weight | [g] | 240 |

Pin allocation

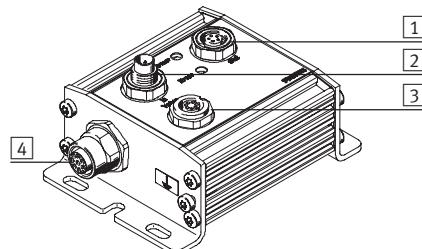

Connecting cable → 32,
no. ②/no. ③/no. ⑤

| ① AIF OUT | |
|-----------|-------------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | 24 V load supply (grey) |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |
| | |
| | |

| ② AIF IN | |
|----------|-------------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | 24 V load supply (grey) |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |
| | |

| ③ Proportional directional control valve | |
|--|----------------|
| Pin | Function |
| 1 | +24 V |
| 2 | 0 V |
| 3 | 0 V |
| 4 | Setpoint value |
| 5 | GND |
| 6 | Unused |
| 7 | +24 V |
| PE | Screen |

| ④ Displacement encoder INC | |
|----------------------------|----------|
| Pin | Function |
| 1 | 5 V |
| 2 | GND |
| 3 | sin+ |
| 4 | sin- |
| 5 | cos- |
| 6 | cos+ |
| 7 | Screen |
| 8 | - |

Axis controllers SPC200


FESTO

Technical data

Dimensions

SPC-AIF-INC

Download CAD data ➔ www.festo.com

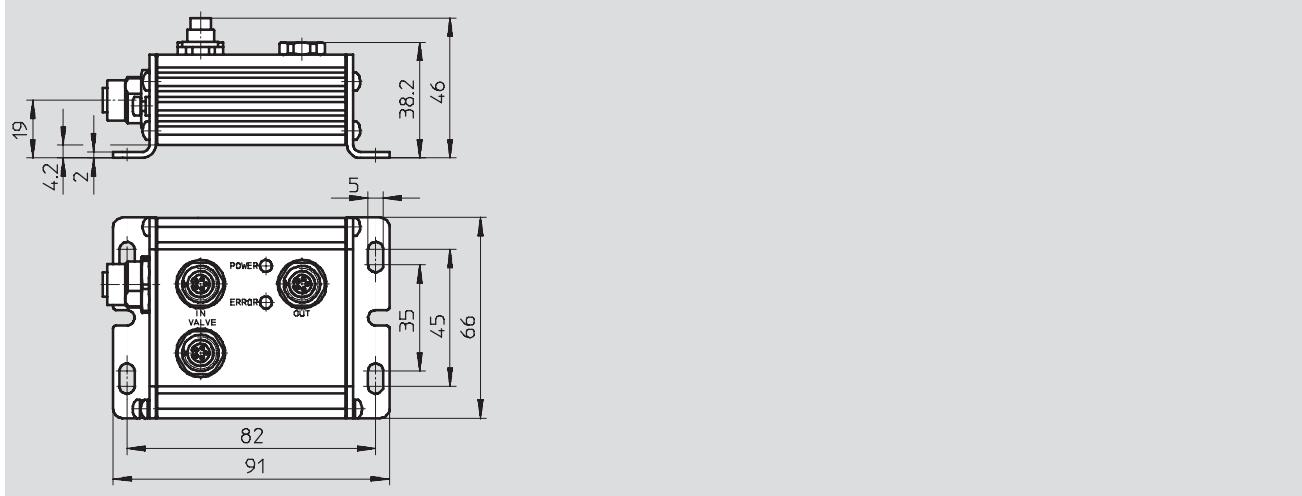

Ordering data

| | | Part No. | Type |
|----------------|-------------------------------------|----------|----------------------------|
| Axis interface | For digital displacement encoder | 537 320 | SPC-AIF-INC |
| Accessories | Terminating resistor for AIF string | 175 403 | KABS-M9-R100 ¹⁾ |

1) One contained in SPC200/POX

- New
SPC-AIF-MTS-2

Axis controllers SPC200


Technical data

Axis interface
SPC-AIF-MTS-2

Function

Connection of the proportional valve and the displacement encoder of a pneumatic axis to the SPC200.


Routing of the axis connection to the second axis interface or to a CP module.

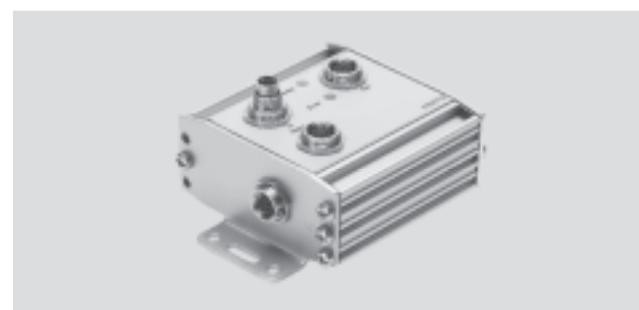

General technical data

| General technical data | | | SPC-AIF-MTS-2 |
|--|---------------------------------------|------|------------------|
| Current consumption | Axis interface | [mA] | 200 |
| | Prop. directional control valve, max. | [A] | 1.1 |
| Electrical connections | AIF IN | | 5-pin M9, male |
| | AIF OUT | | 5-pin M9, female |
| | Prop. directional control valve | | 7-pin M9, male |
| | Displacement encoder | | 5-pin M9, female |
| CE marking symbol (see conformity declaration) | As per EU EMC directive | | |
| Ambient conditions | Temperature range | [°C] | 0 ... +50 |
| | Protection class to IEC 60529 | | IP65 |
| Weight | [g] | | 300 |

Pin allocation

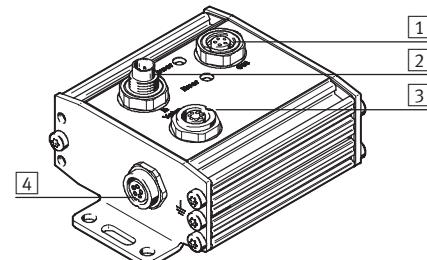

Connecting cable → 32,
no. ②/no. ③/no. ⑤

| ① AIF OUT | |
|-----------|-------------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | 24 V load supply (grey) |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |
| | |
| | |

| ② AIF IN | |
|----------|-------------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | 24 V load supply (grey) |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |
| | |
| | |

| ③ Proportional directional control valve | |
|--|----------------|
| Pin | Function |
| 1 | +24 V |
| 2 | 0 V |
| 3 | 0 V |
| 4 | Setpoint value |
| 5 | GND |
| 6 | Unused |
| 7 | +24 V |
| PE | Screen |
| | |

| ④ Displacement encoder DGCI | |
|-----------------------------|----------|
| Pin | Function |
| 1 | +24 V |
| 2 | Unused |
| 3 | 0 V |
| 4 | CAN-HIGH |
| 5 | CAN-LOW |
| PE | Screen |
| | |

Axis controllers SPC200


Technical data

FESTO

Dimensions

SPC-AIF-MTS-2

Download CAD data ➔ www.festo.com

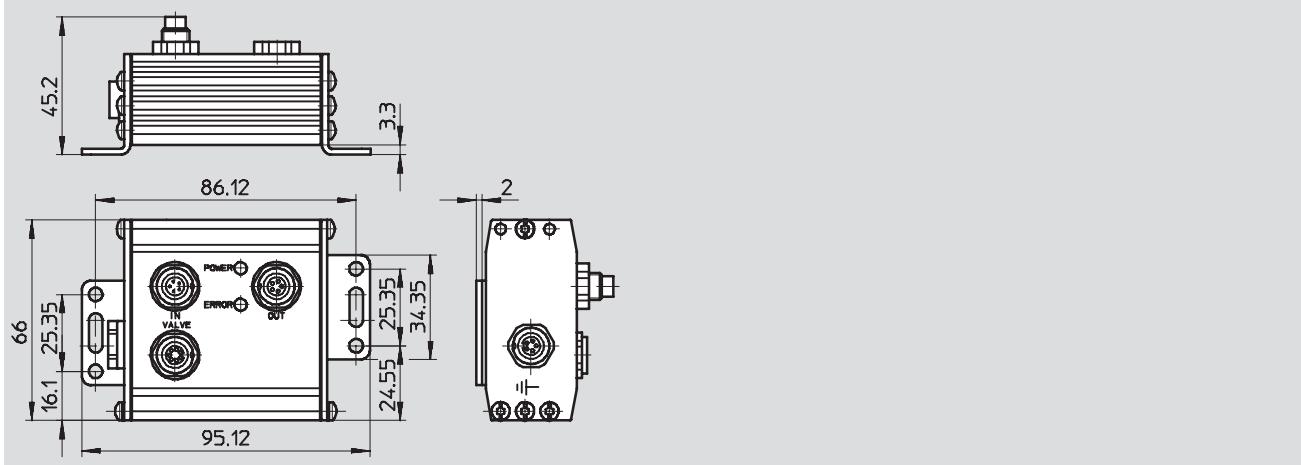

Ordering data

| | | Part No. | Type |
|----------------|-------------------------------------|----------|----------------------------|
| Axis interface | For digital displacement encoder | 548 128 | SPC-AIF-MTS-2 |
| Accessories | Terminating resistor for AIF string | 175 403 | KABS-M9-R100 ¹⁾ |

1) One contained in SPC200/POX

Axis controllers SPC200

Technical data

FESTO

Power supply module

SPC-AIF-SUP-24V

Function


Additional power supply for the load voltage at the axis interface string, for cable lengths over 16 m.



General technical data

| | | SPC-AIF-SUP-24V |
|--|-------------------------------|-------------------------|
| Electrical connections | AIF IN | 5-pin M9, male |
| | AIF OUT | 5-pin M9, female |
| Cable length | [m] | 0.2 |
| For load voltage | | 5-pin M12, male |
| Voltage | [V DC] | 24 –5/+25% |
| Current | [A] | 3 |
| Protection against polarity reversal | | No |
| CE marking symbol (see conformity declaration) | | As per EU EMC directive |
| Ambient conditions | Temperature range | [°C] 0 ... +50 |
| | Protection class to DIN 60529 | IP65 |
| Weight | [g] | 150 |

Pin allocation

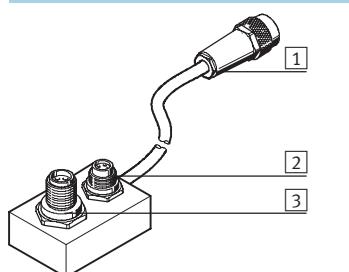

Connecting cable → 32,
no. 3/no. 4

| ① AIF OUT | |
|-----------|-----------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | 24 V load supply of ③ |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |

| ② AIF IN | |
|----------|------------------|
| Pin | Function |
| 1 | 24 V (yellow) |
| 2 | Unused |
| 3 | 0 V (green) |
| 4 | CAN-HIGH (white) |
| 5 | CAN-LOW (brown) |
| PE | Screen |

| ③ Load supply | |
|---------------|-----------|
| Pin | Function |
| 1 | Unused |
| 2 | 24 V load |
| 3 | 0 V |
| 4 | Unused |

Axis controllers SPC200


FESTO

Technical data

Dimensions

SPC-FIO-2E/2A-M8

Download CAD data ➔ www.festo.com

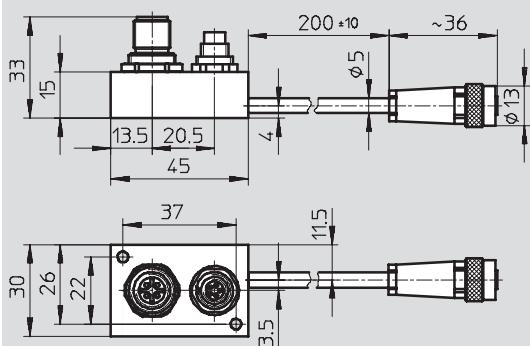

Ordering data


| | | Part No. | Type |
|---------------------|--|----------|-----------------|
| Power supply module | Additional power supply for the load voltage | 171 182 | SPC-AIF-SUP-24V |

Axis controllers SPC200

Accessories

FESTO

Cables – Pneumatic drives

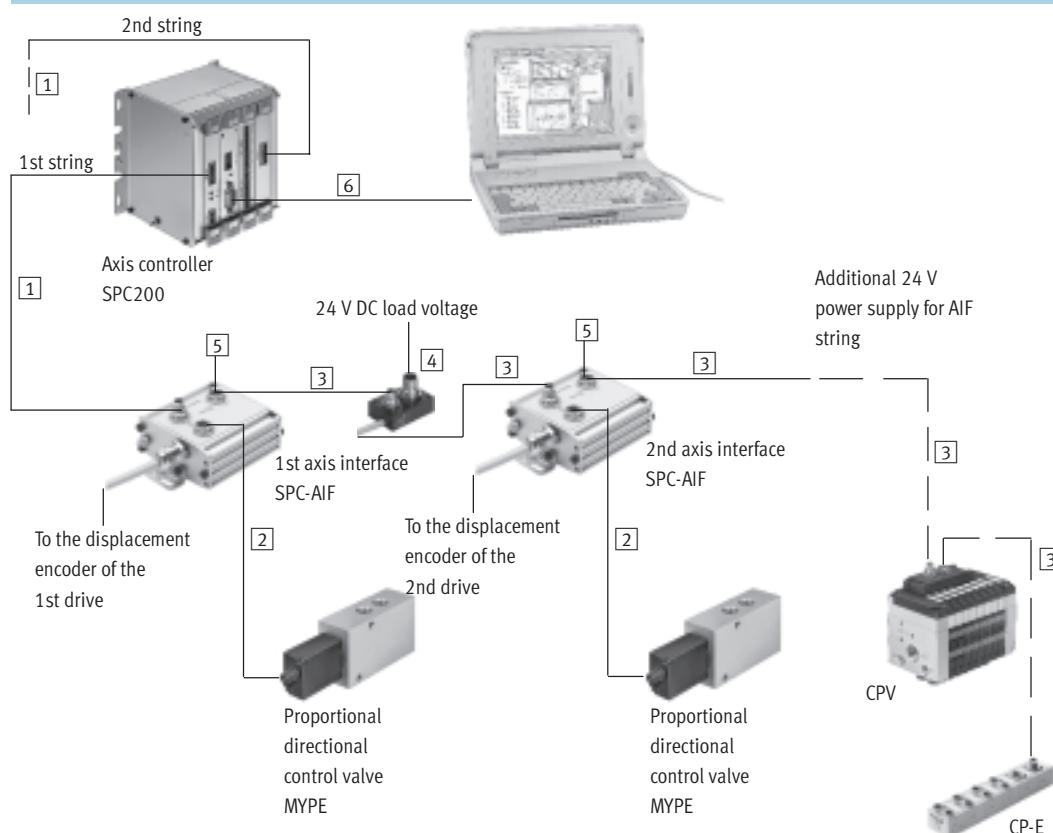

| No. | Brief description | Length [m] | Connection | Suitable for chain link trunking | Part No. | Type |
|-----|--|---------------|------------|--|----------|-----------------------|
| [1] | Connecting cable for axis controller/interface ¹⁾ | 5 | angled | – | 170 236 | KSPC-AIF-1-WD-5 |
| [1] | Connecting cable for axis controller/interface ¹⁾ | 8 | angled | – | 170 237 | KSPC-AIF-1-WD-8 |
| [2] | Connecting cable for axis interface/valve | 0.3 | straight | – | 170 239 | KMPYE-AIF-1-GS-GD-0,3 |
| [2] | Connecting cable for axis interface/valve | 2 | straight | – | 170 238 | KMPYE-AIF-1-GS-GD-2 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 0,25 | angled | ■ | 540 327 | KVI-CP-3-WS-WD-0,25 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 0,5 | angled | ■ | 540 328 | KVI-CP-3-WS-WD-0,5 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 2 | angled | ■ | 540 329 | KVI-CP-3-WS-WD-2 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 5 | angled | ■ | 540 330 | KVI-CP-3-WS-WD-5 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 8 | angled | ■ | 540 331 | KVI-CP-3-WS-WD-8 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 2 | straight | ■ | 540 332 | KVI-CP-3-GS-GD-2 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 5 | straight | ■ | 540 333 | KVI-CP-3-GS-GD-5 |
| [3] | Connecting cable for axis interface/function I/O ¹⁾ | 8 | straight | ■ | 540 334 | KVI-CP-3-GS-GD-8 |
| [4] | Additional 24 V power supply for AIF string ²⁾ | – | straight | – | 171 182 | SPC-AIF-SUP-24 V |
| [5] | Terminating resistor for AIF string ³⁾ | – | straight | – | 175 403 | KABS-M9-R100 |
| [6] | Programming cable | 3 | straight | – | 151 915 | KDI-PPA-3-BU9 |

1) The total length of the lines must not exceed 30 m

2) Recommended where the total length of connecting cable is over 16 m

3) Must be connected at the last axis interface in the chain


(Contained in the controller package SPC200/PDX)

Axis controllers SPC200

FESTO

Accessories

Cables – Electrical stepper motors

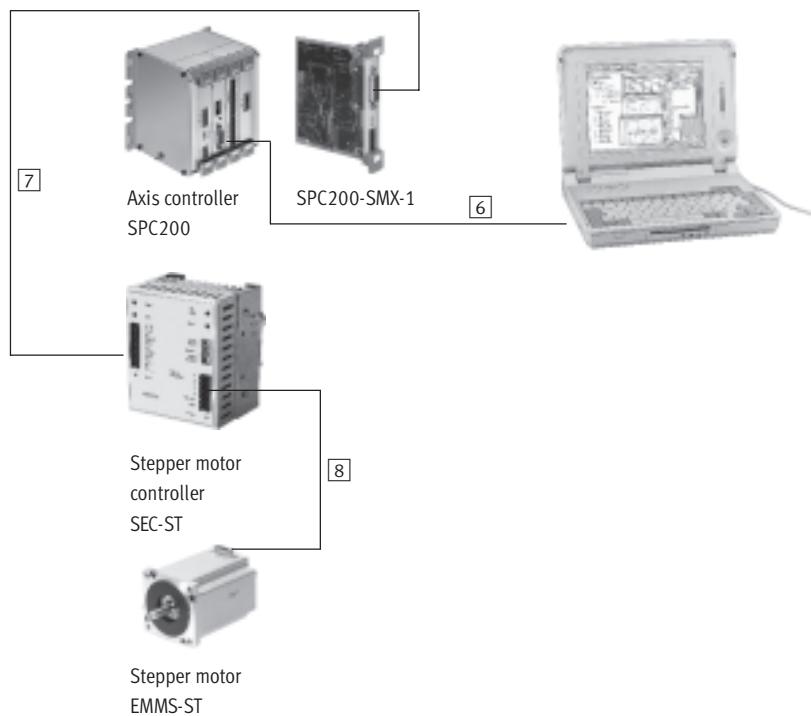

| No. | Length [m] | Suitable for chain link trunking | Brief description | Part No. | Type |
|-----|---------------|-------------------------------------|--|----------|----------------|
| [6] | 3 | – | Programming cable | 151 915 | KDI-PPA-3-BU9 |
| [7] | 1.5 | – | Control cable SPC200-SMX-1/motor controller SEC-ST | 530 077 | KSPC-SECST-1,5 |
| [8] | 5 | ■ | Motor cable | 530 071 | KMTR-ST-5 |