

Motor controllers CMMP-AS, for servo motors

FESTO



Motor controllers CMMP-AS, for servo motors

Key features

Comparison of motor controllers				
Motor controller for motor type	CMMD-AS Servo motor	CMMS-AS Servo motor	CMMP-AS Servo motor	CMMS-ST Stepper motor
Positioning records	2x 63	63	255	63
Measuring system	Incremental/absolute	Incremental/absolute	Incremental	Incremental
Extended I/O interface	4 working modes	Flexibly configurable	4 working modes	4 working modes
Notification of remaining distance	1 for n	Separately for all positions	1 for n	
Torque reduction	No	Separately for all positions	No	
Record linking	Linear	With branching	Linear	
STO/SS1	To EN 61800-5-2	To EN 61800-5-2	To EN 61800-5-2	To EN 61800-5-2

Features

Compactness

- Small dimensions
- Full integration of all components for controller and power section, including RS232 and CANopen interface
- Integrated brake chopper
- Integrated EMC filters
- Automatic actuation for a holding brake integrated in the motor
- Complies with the current CE and EN standards without additional external measures (motor cable length of up to 25 m)

Motion control

- Digital absolute shaft encoder in single-turn and multi-turn versions
- Can be operated as a torque, speed or position controller
- Integrated position controller
- Time-optimised (trapezoidal) or jerk-free (S-shaped) positioning
- Absolute and relative movements
- Point-to-point positioning with and without motion path smoothing
- Position synchronisation
- Electronic gear unit
- 255 positioning records
- Wide range of homing methods

Fieldbus interfaces

Integrated:



Optional:



Input/output

- Freely programmable I/Os
- High-resolution 16-bit analogue input
- Jog/teach mode
- Simple linking to a higher-level controller via I/O or fieldbus
- Synchronous operation
- Master/slave mode
- Additional I/Os with the plug-in card CAMC-D-8E8A → 13


Integrated sequence control

- Automatic sequence of positioning records without a higher-level controller
- Linear and cyclical position sequences
- Adjustable delay times
- Branches and wait positions
- Overlapping restart possible during the movement

Motor controllers CMMMP-AS, for servo motors

Key features

Features	Integrated safety functions	Interpolating multi-axis movement
<p>Travel program</p> <ul style="list-style-type: none"> Linking of any number of positioning records into a travel program Step criteria for the travel program possible via digital inputs, for example <p>MC – motion complete I/O – digital inputs</p>	<ul style="list-style-type: none"> The motor controller CMMMP-AS supports the "Safe Torque off (STO)" and "Safe Stop 1 (SS1)" safety functions with protection against unexpected start-up in accordance with EN 61800-5-2 Protection against unexpected start-up Two-channel disconnection of the output stage Less external circuitry Shorter response times in the event of an error Faster restart, intermediate circuit remains charged 	<ul style="list-style-type: none"> With a suitable controller, the CMMMP-AS can perform path movements with interpolation via CANopen or Sercos. The controller specifies setpoint position values in a fixed time pattern to this end. In between, the servo position controller independently interpolates the data values between two data points.

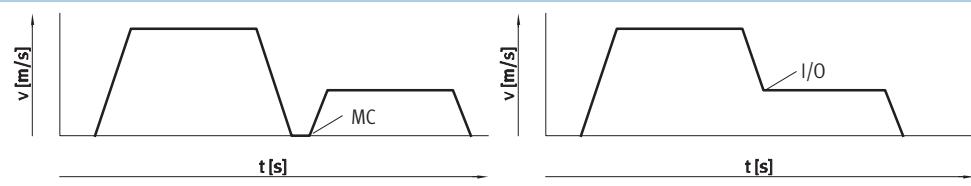

Library for EPLAN	→ 15
<p>EPLAN macros for fast and reliable planning of electrical projects in combination with motor controllers,</p>	<p>motors and cables. This enables a high level of planning reliability, standardisation of documentation, no need to create symbols, graphics and master data.</p>


Cam disc functionality	→ 15
<p>The "electronic cam disc" application type creates optimised motion profiles that generate less vibration and acceleration force at the machine. In addition, the motion of the motor is always synchronous in position with a master axis, which enables easy definition of overlapping, time-optimised motion sequences.</p> <p>To be able to use the cam disc function, you will need the Festo Configuration Tool (FCT) and also the curve editor → 15.</p>	<p>Key features:</p> <ul style="list-style-type: none"> High flexibility of the system. The mechanism does not need to be modified if the requirements for the curve shapes change. User-friendly motion plan editor. All limits for position, speed and acceleration are immediately displayed in the editor. Up to 16 cam discs with a total of up to 2,048 data points can be managed. The data points can be randomly distributed along the cam discs. There are four digital trip cams coupled with each cam disc. Each cam disc can be offset by a certain amount from the master axis.

Motor controllers CMMP-AS, for servo motors

Key features

FCT software – Festo Configuration Tool

Software platform for electric drives from Festo

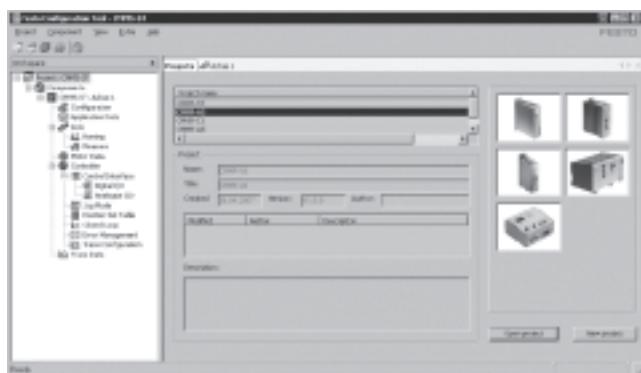

- All drives in a system can be managed and saved in a common project
- Project and data management for all supported device types
- Simple to use thanks to graphically supported parameter entry
- Universal mode of operation for all drives
- Working offline at your desk or online at the machine

FHPP – Festo Handling and Positioning Profile


Optimised data profile

Festo has developed an optimised data profile, the "Festo Handling and Positioning Profile (FHPP)", that is tailored to handling and positioning applications.

The FHPP data profile permits the actuation of Festo motor controllers, using a fieldbus interface, via standardised control and status bytes.

The following are defined, among others:

- Operating modes
- I/O data structure
- Parameter objects
- Sequence control

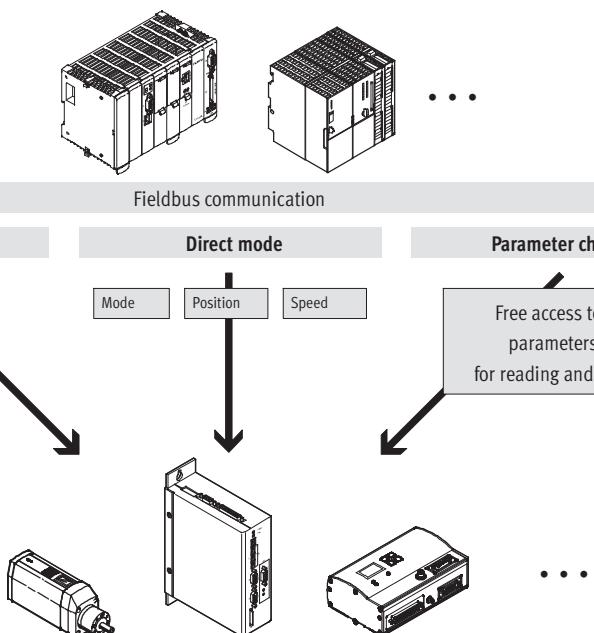

Motor controllers CMMMP-AS, for servo motors

Type codes

CMMMP	AS	C5	11A	P3
Type				
CMMMP Motor controller, premium				
Motor technology				
AS AC synchronous				
Nominal current				
C2	2.5 A			
C5	5 A			
C10	10 A			
C20	20 A			
Input voltage				
3A	100 ... 230 V AC			
11A	3x 230 ... 480 V AC			
Number of phases				
P3	3-phase			

Motor controllers CMMMP-AS, for servo motors

Technical data

Fieldbus interfaces

CANopen



DeviceNet

SERCOS
interface

EtherCAT

Certification for:
CMMMP-AS-C2/-C5/-C10

UL LISTED



General technical data

CMMMP-AS-	C2-3A	C5-3A	C5-11A-P3	C10-11A-P3	C20-11A-P3
Type of mounting	Screwed onto mounting plate				
Display	7-segment display				
Parameterisation interface	RS232 (9,600 ... 115,000 bits/s)				
Encoder interface input	As speed/position specification for the slave drive in synchronous mode Setpoint speed value as encoder signal EnDat RS422 HIPERFACE SINCOS				EnDat 2.2
Encoder interface output	Actual value feedback via encoder signals in speed control mode Setpoint specification for downstream slave drive Resolution 16,384 ppr				
Braking resistor, integrated [Ω]	165	110	68		47
Pulse power of braking resistor [kVA]	1.1	1.6	8.5		12
Braking resistor, external [Ω]	≥ 100	≥ 80	≥ 60		30 ≤ R ≤ 100
Impedance of setpoint input [kΩ]	20				
Number of analogue outputs	2				
Operating range of analogue outputs [V]	±10				
Resolution of analogue outputs	9 bits				
Characteristics of analogue outputs	Short circuit proof				
Number of analogue inputs	3				
Operating range of analogue inputs [V]	±10				
Characteristics of analogue inputs	Differential inputs Configurable for speed Configurable for current				
Mains filter	Integrated				
Max. motor cable length [m]	25 (without external mains filter)				
Product weight [g]	2,000	2,100	3,700		8,000

Technical data – Fieldbus interface

Interfaces	I/O	CANopen	EtherCat	Profibus DP	DeviceNet
Number of digital logic outputs	5	–			
Characteristics of digital logic outputs	Freely configurable	–			
Number of digital logic inputs	10	–			
Operating range of logic inputs [V]	8 ... 30	–			
Characteristics of logic inputs	Freely configurable	–			
Process coupling	16 positioning records 255 positioning records ¹⁾	– 255 positioning records ²⁾			
Communication profile	– –	DS301, FHPP DS301, DSP402	DS301, FHPP DS301, DSP402	DP-V0/FHPP –	FHPP
Max. fieldbus transmission rate [Mbps]	–	1	100	12	0.5
Interface	Integrated Optional	■ –	■ –	– → 13	– → 13

1) With additional I/O plug-in card CAMC-D8E8A → 13.

2) Max. 250 positioning records in combination with the FHPP communication profile.

Motor controllers CMMMP-AS, for servo motors



Technical data

Function blocks for PLC programming					
Programming software	Controller manufacturer	Interfaces			
		CANopen	EtherCat	Profibus DP	DeviceNet
CoDeSys	Festo	■	■	■	■
	Beckhoff		■		
	Other manufacturers				
RSLogix5000	Rockwell Automation	—	—	—	■
Step 7	Siemens	—	—	■	—

Electrical data					
CMMMP-AS-		C2-3A	C5-3A	C5-11A-P3	C10-11A-P3
Output data					
Output voltage range	[V AC]	0 ... 270	0 ... 360		
Nominal current per phase, effective	[A]	2.5	5	5	10
Peak current per phase, effective	[A]	5	10	15	20
Max. peak current duration	[s]	5			2
Max. intermediate circuit voltage	[V DC]	380	560		
Output frequency	[Hz]	0 ... 1,000			
Load supply					
Nominal voltage phases		1	3		
Input voltage range	[V AC]	100 ... 230	3x 230 ... 480		
Max. nominal input current	[A]	3	6	5.5	11
Rated output	[VA]	500	1,000	3,000	6,000
Peak output	[VA]	1,000	2,000	6,000	12,000
Mains frequency	[Hz]	50 ... 60			25,000
Logic supply					
Nominal voltage	[V DC]	24 ±20%			
Nominal current	[A]	0.55/2.55 ¹⁾	0.65/2.65 ¹⁾	1/3 ¹⁾	
Max. current of digital logic outputs	[mA]	100			

1) Max. current with brake

Operating and environmental conditions					
CMMMP-AS-		C2-3A	C5-3A	C5-11A-P3	C10-11A-P3
Digital logic outputs		Galvanically isolated			
Logic inputs		Galvanically isolated			
Protection class		IP20			
Ambient temperature		0 ... +50			
Storage temperature		−25 ... +70			
Relative air humidity		0 ... 90 (non-condensing)			
CE marking (see declaration of conformity)		To EU Low Voltage Directive			
		To EU EMC Directive ¹⁾			
		To EU Machinery Directive			
Certification		UL listed (OL)			—
		—			C-Tick
Certificate issuing authority		BG MFS 10006			DGUV MFS 10027
Safety function		Safe Torque off (STO)			
Safety Integrity Level (SIL)		Safe Torque off (STO)/SIL 2			
Performance Level (PL)		Safe Torque off (STO)/Category 3, Performance Level d			

 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.



Motor controllers CMMP-AS, for servo motors

Technical data

View of motor controller


CMMP-AS-C2-3A,
CMMP-AS-C5-3A

CMMP-AS-C5-11A-P3,
CMMP-AS-C10-11A-P3

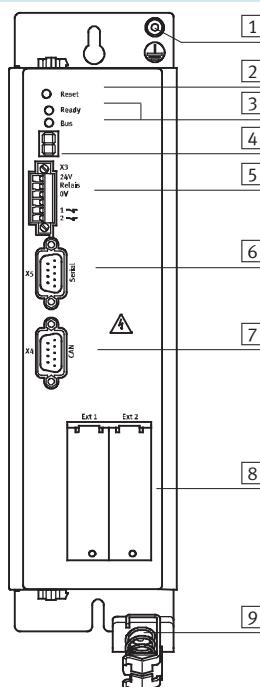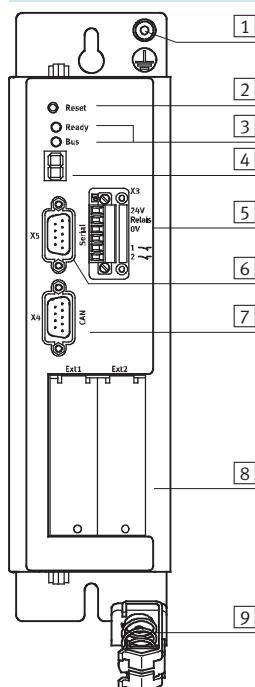


- [1] Earthing
- [2] Reset button
- [3] Ready/Bus LED
- [4] Status display
- [5] Control connection for relay driver supply
- [6] Interface: RS232
- [7] Interface: CAN bus
- [8] Technology module slot
- [9] Screened connection

From above

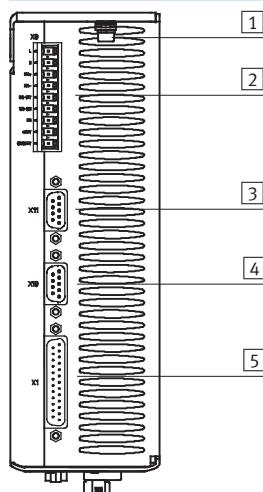

- [1] Earthing screw
- [2] Power supply
- [3] Incremental encoder interface (output)
- [4] Incremental encoder interface (input)
- [5] I/O interface

From underneath

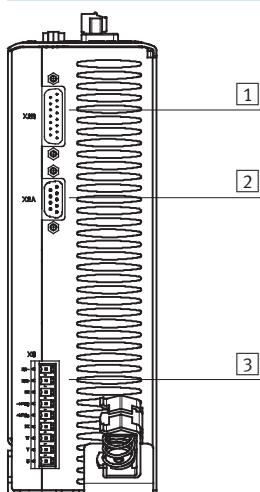


- [1] Encoder connection
- [2] Resolver connection
- [3] Motor connection

Motor controllers CMMMP-AS, for servo motors

Technical data


View of motor controller

CMMMP-AS-C20-11A-P3

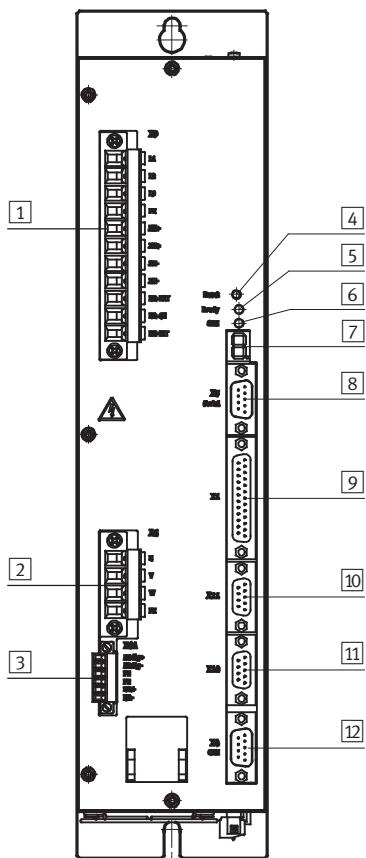


- [1] Power supply
- [2] Motor connection
- [3] Motor connection
- [4] Reset button
- [5] Ready/Bus LED
- [6] Bus switched on
- [7] Status display
- [8] Interface: RS232
- [9] I/O interface
- [10] Incremental encoder interface (output)
- [11] Incremental encoder interface (input)
- [12] Interface: CAN bus

From above

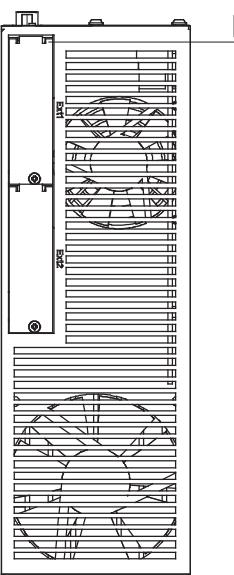

[1] Technology module slots

From underneath

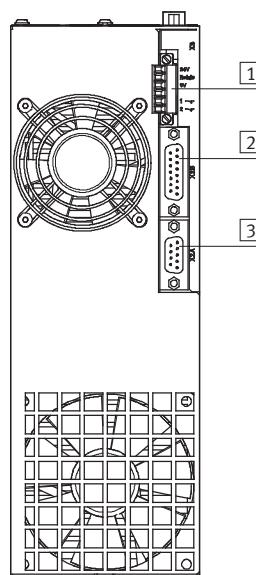


[1] Control connection for relay driver supply
[2] Encoder connection
[3] Resolver connection

Motor controllers CMMP-AS, for servo motors

Technical data

Installation clearance for motor controller

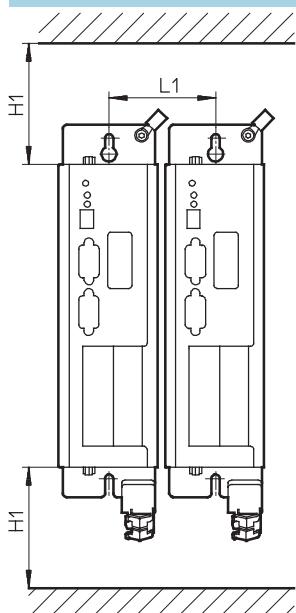


Type	H1	L1
CMMP-AS-C2-3A CMMP-AS-C5-3A	100	71
CMMP-AS-C5-11A-P3 CMMP-AS-C10-11A-P3	100	87
CMMP-AS-C20-11A-P3	100	95

Dimensions

CMMP-AS-C2-3A, CMMP-AS-C5-3A

Download CAD data → www.festo.com

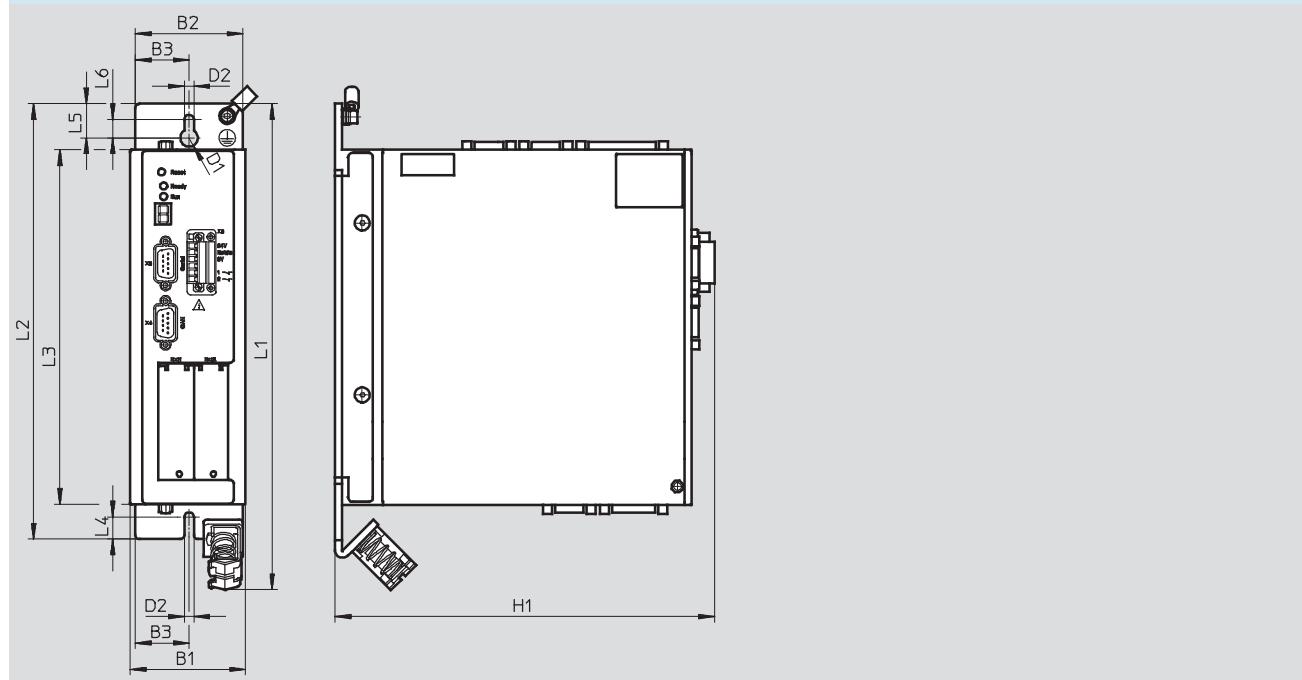

Type	B1	B2	B3	D1 ∅	D2 ∅	H1	L1	L2	L3	L4	L5	L6
CMMP-AS-C2-3A	66	61	30.7	10	5.5	216	277	248	202	12.5	19.5	10.5
CMMP-AS-C5-3A												

Motor controllers CMMMP-AS, for servo motors


Technical data

FESTO

Dimensions


CMMMP-AS-C5-11A-P3, CMMMP-AS-C10-11A-P3

Download CAD data ➔ www.festo.com

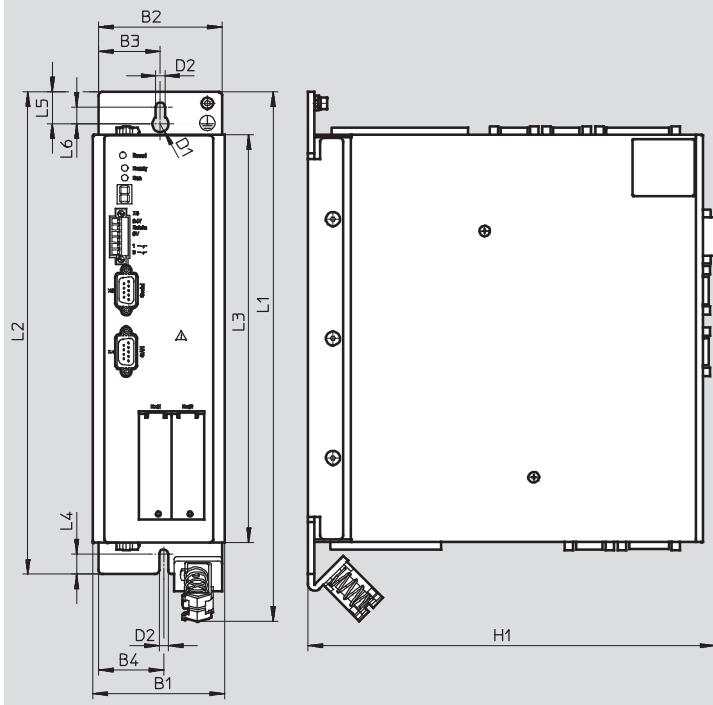

Type	B1	B2	B3	B4	D1 Ø	D2 Ø	H1	L1	L2	L3	L4	L5	L6
CMMMP-AS-C5-11A-P3	81	76	38.1	40.1	10	5.5	251	326	297	251	12.5	19.75	10.5
CMMMP-AS-C10-11A-P3													

CMMMP-AS-C20-11A-P3

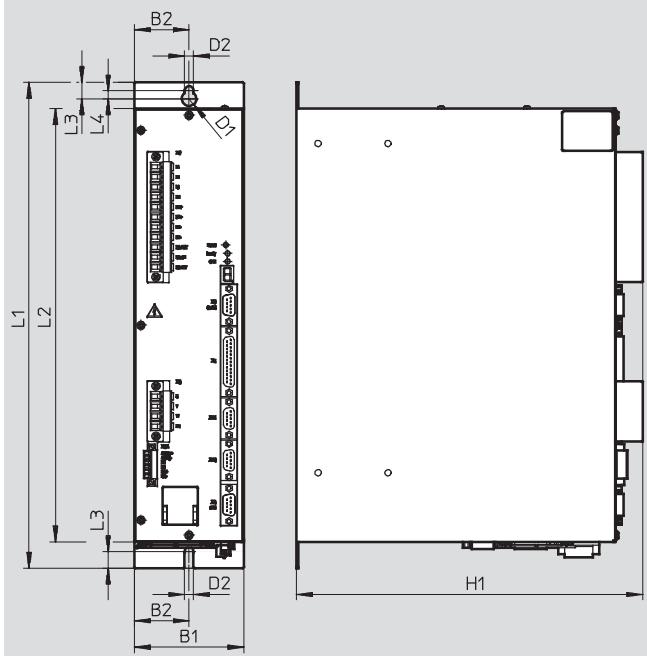


Type	B1	B2	D1 Ø	D2 Ø	H1	L1	L2	L3	L4
CMMMP-AS-C20-11A-P3	83	41.5	11	7	263	369	329	12.5	6

Motor controllers CMMP-AS, for servo motors

Technical data

FESTO

Ordering data		Brief description	Part No.	Type
		The plug assortment NEKM (→ 14) and the operator package (→ 15) are included in the scope of delivery.	550041	CMMP-AS-C2-3A
			550042	CMMP-AS-C5-3A
			551023	CMMP-AS-C5-11A-P3
			551024	CMMP-AS-C10-11A-P3
			1366842	CMMP-AS-C20-11A-P3

Motor controllers CMMMP-AS, for servo motors

Accessories

FESTO

Interface CAMC-D-8E8A

The interface is used to extend the digital I/Os.

Up to two interfaces are supported simultaneously.



Technical data

General

Max. cable cross section	[mm ²]	0.5
--------------------------	--------------------	-----

Digital inputs

Number	8
Nominal voltage	[V DC]
Voltage range	[V]
Nominal value for True	[V]
Nominal value for False	[V]
Input impedance	[kΩ]

Digital outputs

Number	8
Nominal voltage	[V DC]
Voltage range	[V]
Output current	[mA]
Short circuit, overcurrent protection	[mA]

Ordering data – Plug-in card

	Brief description	Part No.	Type
	For additional I/Os (The plugs are included in the scope of delivery. Plug NEKM for reorder ➔ 14.)	567855	CAMC-D-8E8A






Ordering data – Plug-in cards for fieldbus interface

	Brief description	Part No.	Type
	For Profibus interface	547450	CAMC-PB
	For DeviceNet interface	547451	CAMC-DN
	For Sercos interface	552258	CAMC-SC
	For EtherCat interface	567856	CAMC-EC

Motor controllers CMMMP-AS, for servo motors



Accessories

Ordering data – Cables and plugs

	Brief description	Cable length [m]	Part No.	Type
	Control cable, for I/O interface to any controller	2.5	552254	NEBC-S1G25-K-2.5N-LE26
	Programming cable	1.5	160786	PS1-ZK11-NULMODEM-1,5M
	Encoder plug, for incremental encoder interface	–	564264	NECC-A-S-S1G9-C2M
	Plug assortment for CMMMP-AS-C2-3A, CMMMP-AS-C5-3A	–	552255	NEKM-C-2 ¹⁾
	Plug assortment for CMMMP-AS-C5-11A-P3, CMMMP-AS-C10-11A-P3	–	552256	NEKM-C-3 ¹⁾
	Plug assortment for CMMMP-AS-C20-11A-P3	–	1425453	NEKM-C-6 ¹⁾
	Plug assortment interface CAMC-D-8E8A	–	569959	NEKM-C-5 ²⁾
	Plug for Profibus interface	–	533780	FBS-SUB-9-WS-PB-K
	Plug for CANopen interface	–	533783	FBS-SUB-9-WS-CO-K
	Plug for DeviceNet interface	–	525635	FBSD-KL-2X5POL

- 1) Comprising plug for power supply and plug for motor connection. The plug assortment is included in the scope of delivery of the motor controller.
 2) Plugs are included in the scope of delivery of the plug-in card CAMC-D-8E8A.

Ordering data – Braking resistors

	For type	Resistance value [Ω]	Rated output [W]	Part No.	Type
CACR-LE2-...					
	CMMMP-AS-C2-3A	100	500	1336615	CACR-LE2-100-W500
	CMMMP-AS-C5-3A	100	500	1336615	CACR-LE2-100-W500
CACR-KL2-...					
	CMMMP-AS-C5-11A-P3	67	1,800	1336617	CACR-KL2-67-W1800
	CMMMP-AS-C10-11A-P3	67	1,800	1336617	CACR-KL2-67-W1800
	CMMMP-AS-C20-11A-P3	33	3,600	1336619	CACR-KL2-33-W2400

Motor controllers CMMMP-AS, for servo motors

FESTO

Accessories

Ordering data – Software and documentation

	Brief description	Part No.	Type
	<p>Operator package contains:</p> <ul style="list-style-type: none">– CD-ROM– with manual for CMMMP-AS, in de, en, es, fr, it, sv– with FCT (Festo Configuration Tool) configuration software, in de, en– Brief description <p>The package is included in the scope of delivery</p>	573687	GSIB-CMMMP-AS-C20-ML

Ordering data – Software for EPLAN

	Brief description	Part No.	Type
	<p>EPLAN macros for fast and reliable planning of electrical projects in combination with motor controllers, motors and cables.</p> <p>The CD-ROM is not included in the scope of delivery.</p>	572327	GSWC-CD-EP-MC-1-ML


Ordering data – Software and documentation for curve editor

	Brief description	Part No.	Type
	<p>Software package contains:</p> <ul style="list-style-type: none">– CD-ROM– with manual in de– with additional functions for the cam disc functionality <p>The software package is not included in the scope of delivery</p>	570903	GSPF-CAM-MC-ML

Motor controllers CMMP-AS, for servo motors

Accessories

Ordering data – Documentation¹⁾

Language	Part No.	Type	Part No.	Type
		For motor controller CMMP-AS-C2-3A, CMMP-AS-C5-3A		For motor controller CMMP-AS-C5-11A-P3, CMMP-AS-C10-11A-P3
DE	557325	P.BE-CMMP-AS-3A-HW-DE	557331	P.BE-CMMP-AS-11A-HW-DE
EN	557326	P.BE-CMMP-AS-3A-HW-EN	557332	P.BE-CMMP-AS-11A-HW-EN
ES	557327	P.BE-CMMP-AS-3A-HW-ES	557333	P.BE-CMMP-AS-11A-HW-ES
FR	557328	P.BE-CMMP-AS-3A-HW-FR	557334	P.BE-CMMP-AS-11A-HW-FR
IT	557329	P.BE-CMMP-AS-3A-HW-IT	557335	P.BE-CMMP-AS-11A-HW-IT
SV	557330	P.BE-CMMP-AS-3A-HW-SV	557336	P.BE-CMMP-AS-11A-HW-SV
		For motor controller CMMP-AS-C20-11A-P3		
DE	572594	P.BE-CMMP-AS-C20-11A-DE		
EN	572595	P.BE-CMMP-AS-C20-11A-EN		
ES	572596	P.BE-CMMP-AS-C20-11A-ES		
FR	572597	P.BE-CMMP-AS-C20-11A-FR		
IT	572598	P.BE-CMMP-AS-C20-11A-IT		
SV	572599	P.BE-CMMP-AS-C20-11A-SV		
		Festo Handling and Positioning Profile (FHPP) for the motor controller range CMM...		
DE	555695	P.BE-CMM-FHPP-SW-DE		
EN	555696	P.BE-CMM-FHPP-SW-EN		
ES	555697	P.BE-CMM-FHPP-SW-ES		
FR	555698	P.BE-CMM-FHPP-SW-FR		
IT	555699	P.BE-CMM-FHPP-SW-IT		
SV	555700	P.BE-CMM-FHPP-SW-SV		
		For Profibus interface		For DeviceNet interface
DE	557337	P.BE-CMMP-FHPP-PB-SW-DE	557349	P.BE-CMMP-FHPP-DN-SW-DE
EN	557338	P.BE-CMMP-FHPP-PB-SW-EN	557350	P.BE-CMMP-FHPP-DN-SW-EN
ES	557339	P.BE-CMMP-FHPP-PB-SW-ES	557351	P.BE-CMMP-FHPP-DN-SW-ES
FR	557340	P.BE-CMMP-FHPP-PB-SW-FR	557352	P.BE-CMMP-FHPP-DN-SW-FR
IT	557341	P.BE-CMMP-FHPP-PB-SW-IT	557353	P.BE-CMMP-FHPP-DN-SW-IT
SV	557342	P.BE-CMMP-FHPP-PB-SW-SV	557354	P.BE-CMMP-FHPP-DN-SW-SV
		For CANopen interface		For EtherCat interface
DE	557343	P.BE-CMMP-CO-SW-DE	570923	P.BE-CMMX-EC-SW-DE
EN	557344	P.BE-CMMP-CO-SW-EN	570924	P.BE-CMMX-EC-SW-EN
ES	557345	P.BE-CMMP-CO-SW-ES	570925	P.BE-CMMX-EC-SW-ES
FR	557346	P.BE-CMMP-CO-SW-FR	570926	P.BE-CMMX-EC-SW-FR
IT	557347	P.BE-CMMP-CO-SW-IT	570927	P.BE-CMMX-EC-SW-IT
SV	557348	P.BE-CMMP-CO-SW-SV	570928	P.BE-CMMX-EC-SW-SV
		For Sercos interface		
DE	557361	P.BE-CMMP-SC-SW-DE		
EN	557362	P.BE-CMMP-SC-SW-EN		
ES	557363	P.BE-CMMP-SC-SW-ES		
FR	557364	P.BE-CMMP-SC-SW-FR		
IT	557365	P.BE-CMMP-SC-SW-IT		
SV	557366	P.BE-CMMP-SC-SW-SV		

1) A manual in paper form is not included in the scope of delivery