

Motor controllers CMMS-AS, for servo motors

FESTO



Motor controllers CMMS-AS, for servo motors

Key features

Comparison of motor controllers				
Motor controller for motor type	CMMD-AS Servo motor	CMMS-AS Servo motor	CMM-AS Servo motor	CMMS-ST Stepper motor
Positioning records	2x 63	63	255	63
Measuring system	Incremental/absolute	Incremental/absolute	Incremental	Incremental
Extended I/O interface	4 working modes	Flexibly configurable	4 working modes	4 working modes
Notification of remaining distance	1 for n	Separately for all positions	1 for n	1 for n
Torque reduction	No	Separately for all positions	No	No
Set linking	Linear	With branching	Linear	Linear
STO/SS1	To EN 61800-5-2	To EN 61800-5-2	To EN 61800-5-2	To EN 61800-5-2

Performance characteristics

Compactness

- Small dimensions
- Full integration of all components for controller and power section, including RS232 and CANopen interface
- Integrated brake chopper
- Integrated EMC filters

- Automatic actuation for a holding brake integrated in the motor
- Adheres to the current CE and EN standards without additional external measures (motor cable length of up to 15 m)

Motion control

- Digital absolute shaft encoder in single-turn and multi-turn versions
- Can be operated as a torque, speed or position controller
- Integrated positioning controller
- Time-optimised (trapezoidal) or jerk-free (S-shaped) positioning
- Absolute and relative movements

- Point-to-point positioning with and without approximate positioning
- Position synchronisation
- Electronic gear unit
- 63 position sets
- 8 travel profiles
- Wide range of homing methods

Fieldbus interfaces

Integrated:



Optional:



Input/output

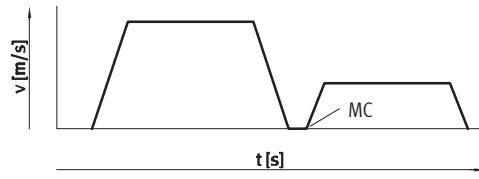
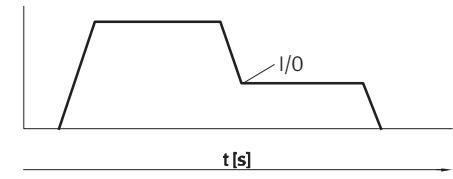
- Freely programmable I/Os
- High-resolution 12-bit analogue input
- Jog/teach mode
- Simple linking to a higher-level controller via I/O or fieldbus
- Synchronous operation
- Master/slave mode

Integrated sequence control

- Automatic sequence of position sets without a higher-level controller
- Linear and cyclic position sequences
- Adjustable delay times

Motor controllers CMMS-AS, for servo motors

Key features

Performance characteristics	
Integrated safety functions	Interpolating multi-axis movement
<ul style="list-style-type: none"> The motor controller CMMS-AS support "Safe Torque off (STO)" and "Safe Stop 1 (SS1)" functions with protection against unexpected startup in accordance with EN 61800-5-2 Protection against unexpected start-up 	<ul style="list-style-type: none"> Two-channel disconnection of the output stage Less external circuitry Shorter response times in the event of an error Faster restart, intermediate circuit remains charged
Travel program	
<ul style="list-style-type: none"> Linking of any number of position sets into a travel program Further switching conditions for the travel program possible via digital inputs, for example MC – motion complete I/O – digital inputs 	 

Library for EPLAN



EPLAN macros for fast and reliable planning of electrical projects in combination with motor controllers,

motors and cables. This enables a high level of planning reliability, standardisation of documentation,

no need to create symbols, graphics and master data.

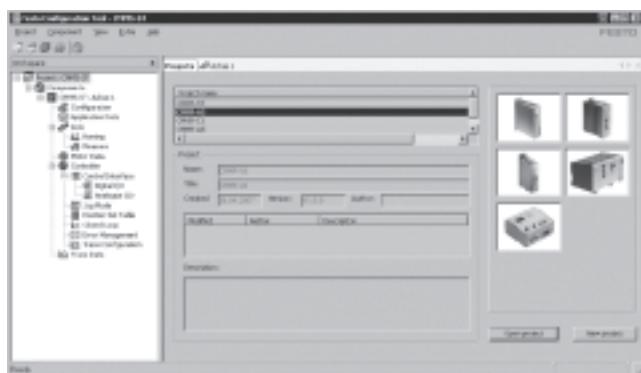
→ 11

Motor controllers CMMS-AS, for servo motors

Key features

FCT software – Festo Configuration Tool

Software platform for electric drives from Festo



- All drives in a system can be managed and archived in a common project
- Project and data management for all supported device types
- Simple to use thanks to graphically-supported parameter entry
- Universal mode of operation for all drives
- Working offline at your desk or online at the machine

FHPP – Festo Handling and Positioning Profile

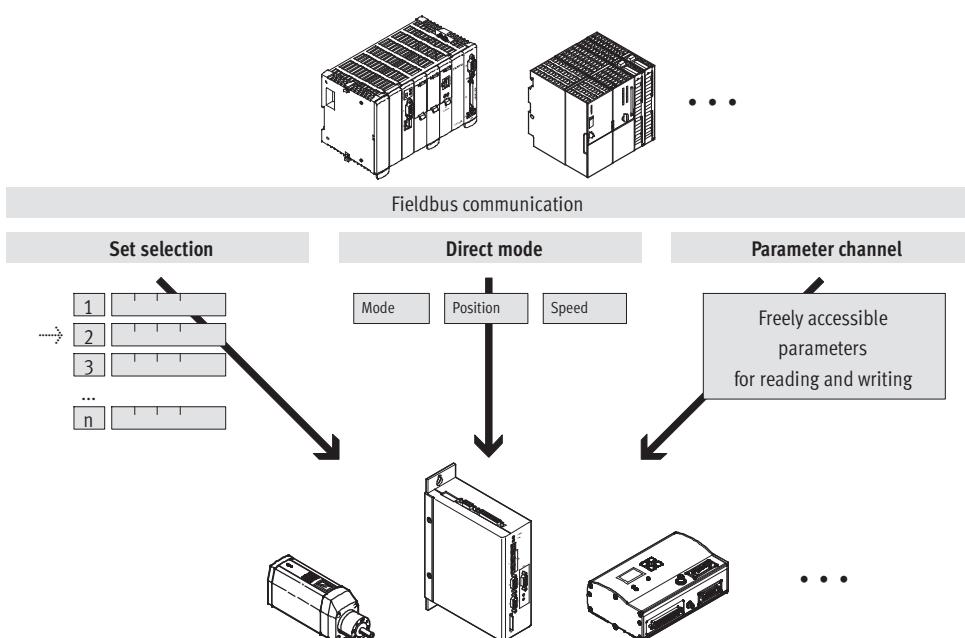
Optimised data profile

Festo has developed an optimised data profile, the “Festo Handling and Positioning Profile (FHPP)”, that is tailored to handling and positioning applications.

The FHPP data profile permits the actuation of Festo motor controllers, using a fieldbus interface, via standardised control and status bytes.


The following are defined, among others:

- Operating modes
- I/O data structure
- Parameter objects
- Sequence control



Motor controllers CMMS-AS, for servo motors

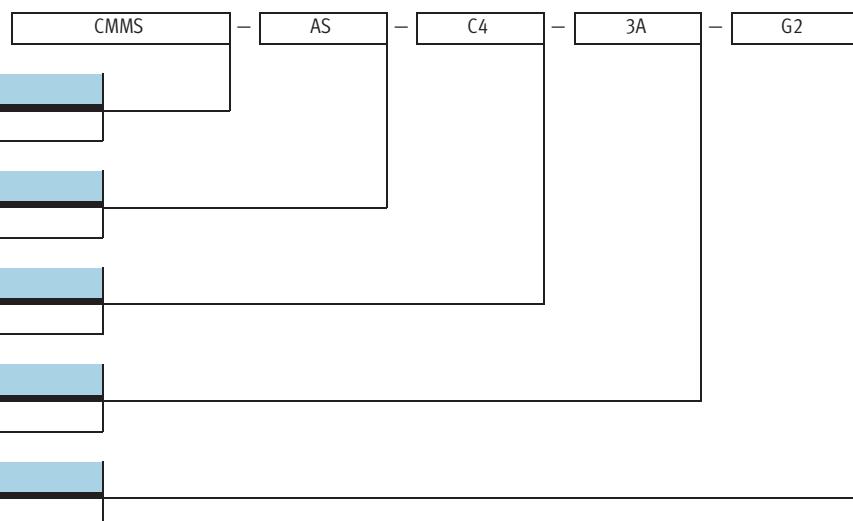Type codes



Motor controllers CMMS-AS, for servo motors

Technical data

Fieldbus interfaces

CANopen



DeviceNet



General technical data

Type of mounting	Screwed to a mounting plate
Display	7-segment display
Parameterisation interface	RS232 (9,600 ... 115,000 bits/s)
Encoder interface input	Setpoint position value as encoder signal EnDat V2.2
Encoder interface output	Actual value feedback via encoder signals in speed control mode Setpoint specification for downstream slave drive Resolution 4,096 ppr
Braking resistor, integrated [Ω]	230
Pulse power of braking resistor [kVA]	0.7
Braking resistor, external [Ω]	≥ 100
Impedance of setpoint input [kΩ]	20
Number of analogue outputs	1
Operating range of analogue outputs [V]	0 ... 10
Resolution of analogue outputs [Bit]	8
Characteristics of analogue outputs	Short circuit-proof
Number of analogue inputs	1
Operating range of analogue inputs [V]	±10
Characteristics of analogue inputs	Differential inputs Configurable for speed Configurable for torque
Mains filter	Integrated
Max. length of motor cable [m]	15 (without external mains filter)
Product weight [g]	1,400

Technical data – Fieldbus interface

Interfaces	I/O	CANopen	Profibus DP	DeviceNet
Number of digital logic outputs	5			
Characteristics of digital logic outputs	Freely configurable in some cases			
Number of digital logic inputs	14	–		
Operating range of logic inputs [V]	12 ... 30	–		
Characteristics of logic inputs	Freely configurable	–		
Process coupling	For 63 position sets	For 63 position sets		
Communication profile	– –	DS301, FHPP DS301, DSP402	DP-V0 / FHPP –	FHPP
Max. fieldbus transmission rate [Mbit/s]	–	1	12	0.5
Interface	Integrated Optional	■ –	– ■ → 10	– ■ → 10

Motor controllers CMMS-AS, for servo motors

Technical data

Function blocks for PLC programming				
Programming software	Controller manufacturer	Interfaces		
		CANopen	Profibus DP	DeviceNet
CoDeSys	Festo	■	■	■
	Beckhoff			
	Other manufacturers			
RSLogix5000	Rockwell Automation	-	-	■
Step 7	Siemens	-	■	-

Electrical data		
Output connection data		
Output voltage range	[V AC]	0 ... 210
Nominal output current	[A]	4
Peak current	[A]	10
Max. peak current duration	[s]	2
Max. intermediate circuit voltage	[V DC]	380
Output frequency	[Hz]	0 ... 1,000
Load supply		
Nominal voltage phases		1
Input voltage range	[V AC]	95 ... 255
Max. nominal input current	[A]	4
Rated output	[VA]	600
Peak output	[VA]	1,200
Mains frequency	[Hz]	50 ... 60
Logic supply		
Nominal voltage	[V DC]	24 ±20%
Nominal current	[A]	0.35
Max. current (incl. holding brake)	[A]	1.7
Max. current of digital logic outputs	[mA]	100

Operating and environmental conditions	
Digital logic outputs	Not electrically isolated
Logic inputs	Galvanically connected to logic potential
Protection class	IP20
Protective function	I ² t monitoring Intermediate circuit over-/undervoltage Short circuit in output stage Standstill monitoring Temperature monitoring
Ambient temperature	0 ... +50
Storage temperature	-25 ... +70
Relative air humidity	0 ... 90 (non-condensing)
CE mark (see declaration of conformity)	To EU Low Voltage Directive To EU EMC Directive ¹⁾ To EU Machinery Directive
Certification	c UL - Recognized (OL) UL - Listed (OL) C-Tick BIA
Certificate issuing authority	BG MFS 09030
Safety function	Safe Torque off (STO)
Safety Integrity Level (SIL)	Safe Torque off (STO) / SIL 2
Performance Level (PL)	Safe Torque off (STO) / category 3, performance level d
Note on materials	RoHS-compliant

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

CoDeSys®, Rockwell Automation® is a registered trademark of its respective trademark holder in certain countries.

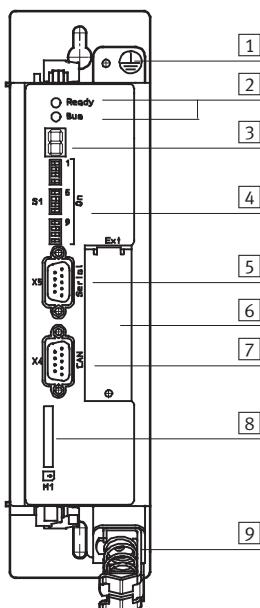
Motor controllers CMMS-AS, for servo motors

Technical data

FESTO


View of motor controller

From the front




- [1] Earthing
- [2] Ready/bus LED
- [3] Status display
- [4] Fieldbus settings and boot loader
- [5] Interface: RS232/RS485
- [6] Technology module (optional)
- [7] Interface: CAN bus
- [8] SD memory card
- [9] Screened connection

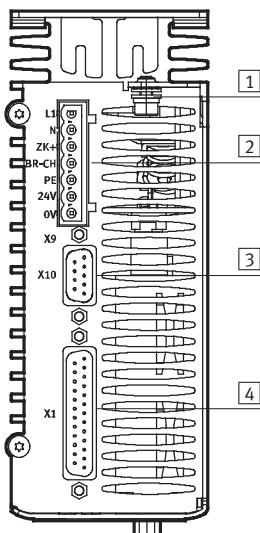From above



- [1] Earthing screw
- [2] Power supply
- [3] Incremental encoder interface (bidirectional)
- [4] I/O interface

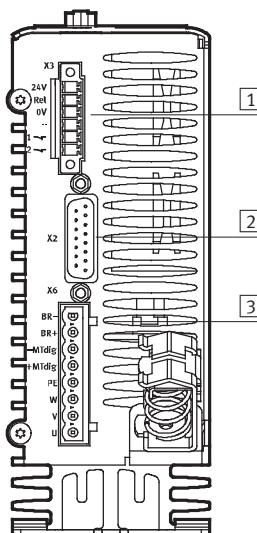From underneath




- [1] Safe stop
- [2] Encoder connection
- [3] Motor connection

Motor controllers CMMS-AS, for servo motors

Technical data

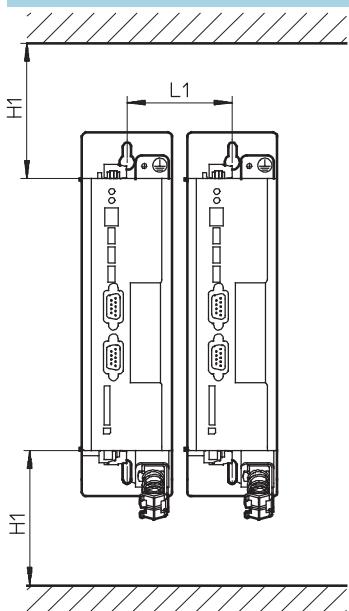
Installation clearance for motor controller



H1	L1
100	70

Dimensions

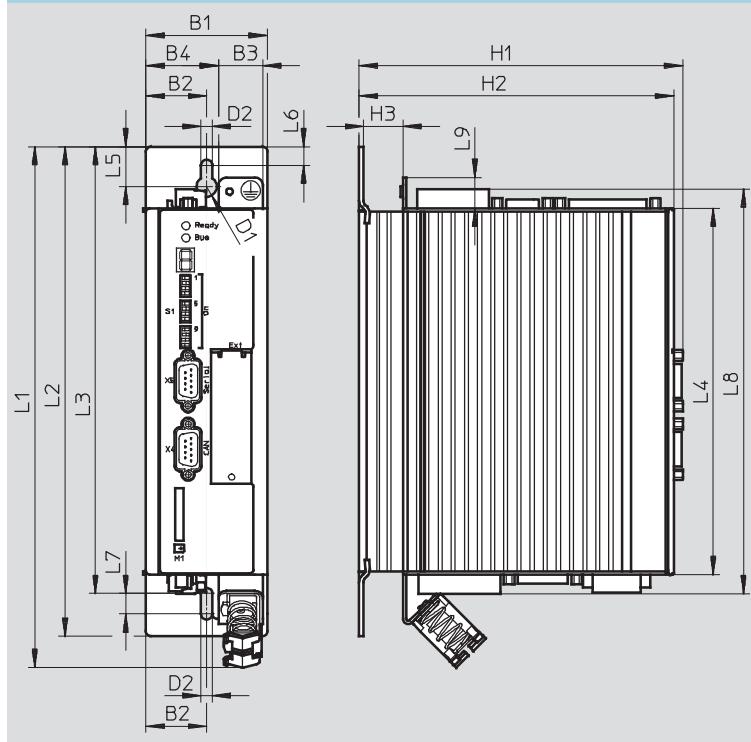Download CAD data ➔ www.festo.com




Type	B1	B2	B3	B4	D1 ∅	D2 ∅	H1	H2	H3
CMMS-AS	60	30	22	35.8	10	5.5	160	155.5	19.7


Type	L1	L2	L3	L4	L5	L6	L7	L8	L9
CMMS-AS	257.6	242.1	221.15	181	19.75	9.25	10	200	15.3


Motor controllers CMMS-AS, for servo motors

Technical data and accessories



Ordering data		Part No.	Type
	Brief description The plug assortment NEKM (→ 11) and the operator package (→ 11) are included in the scope of delivery.	572986	CMMS-AS-C4-3A-G2







Accessories			
Ordering data – Plug-in cards		Part No.	Type
	Interface, for Profibus interface	547450	CAMC-PB
	Interface, for DeviceNet interface	547451	CAMC-DN
	Memory card, for data backup and firmware downloads	562211	CAMC-M-S-F2-V1

Ordering data – Braking resistances				
	Resistance value [Ω]	Nominal power [W]	Part No.	Type
	100	500	1336615	CACR-LE2-100-W500

Motor controllers CMMS-AS, for servo motors

Accessories

Ordering data – Cables and plugs

	Brief description	Cable length [m]	Part No.	Type
	Control cable, for I/O interface to any controller	2.5	552254	NEBC-S1G25-K-2.5N-LE26
	Programming cable	1.5	160786	PS1-ZK11-NULMODEM-1,5M
	Encoder plug, for incremental encoder interface	–	564264	NECC-A-S-S1G9-C2M
	Plug assortment, comprising plug for power supply and plug for motor connection. The plug assortment is included in the scope of delivery	–	560504	NEKM-C-4
	Plug for Profibus interface	–	533780	FBS-SUB-9-WS-PB-K
	Plug for CANopen interface	–	533783	FBS-SUB-9-WS-CO-K
	Plug for DeviceNet interface	–	525635	FBSD-KL-2X5POL

Ordering data – Software and documentation

	Brief description	Part No.	Type
	Operator package contains: – CD-ROM – with manual for CMMS-AS, in de, en, es, fr, it, sv – with FCT (Festo Configuration Tool) configuration software, in de, en – Brief description This package is included in the scope of delivery	573740	GSIB-CMMS-AS-G2-ML


Ordering data – Software for EPLAN

	Brief description	Part No.	Type
	EPLAN macros for fast and reliable planning of electrical projects in combination with motor controllers, motors and cables. The CD-ROM is not included in the scope of delivery	572327	GSWC-CD-EP-MC-1-ML

Motor controllers CMMS-AS, for servo motors

Accessories

FESTO

Ordering data – Documentation ¹⁾		
	Language	Part No. Type
		for motor controller
		Festo Handling and Positioning Profile (FHPP) for the motor controller family CMM...
	DE	564227 P.BE-CMMS-AS-3A-HW-DE
	EN	564228 P.BE-CMMS-AS-3A-HW-EN
	ES	564229 P.BE-CMMS-AS-3A-HW-ES
	FR	564230 P.BE-CMMS-AS-3A-HW-FR
	IT	564231 P.BE-CMMS-AS-3A-HW-IT
	SV	564232 P.BE-CMMS-AS-3A-HW-SV
		for CANopen interface
	DE	554351 P.BE-CMMS-FHPP-CO-SW-DE
	EN	554352 P.BE-CMMS-FHPP-CO-SW-EN
	ES	554353 P.BE-CMMS-FHPP-CO-SW-ES
	FR	554354 P.BE-CMMS-FHPP-CO-SW-FR
	IT	554355 P.BE-CMMS-FHPP-CO-SW-IT
	SV	554356 P.BE-CMMS-FHPP-CO-SW-SV
		for Profibus interface
	DE	554345 P.BE-CMMS-FHPP-PB-SW-DE
	EN	554346 P.BE-CMMS-FHPP-PB-SW-EN
	ES	554347 P.BE-CMMS-FHPP-PB-SW-ES
	FR	554348 P.BE-CMMS-FHPP-PB-SW-FR
	IT	554349 P.BE-CMMS-FHPP-PB-SW-IT
	SV	554350 P.BE-CMMS-FHPP-PB-SW-SV
		for DeviceNet interface
	DE	554357 P.BE-CMMS-FHPP-DN-SW-DE
	EN	554358 P.BE-CMMS-FHPP-DN-SW-EN
	ES	554359 P.BE-CMMS-FHPP-DN-SW-ES
	FR	554360 P.BE-CMMS-FHPP-DN-SW-FR
	IT	554361 P.BE-CMMS-FHPP-DN-SW-IT
	SV	554362 P.BE-CMMS-FHPP-DN-SW-SV

1) Manual in paper form is not included in the scope of delivery