



CPI installation system

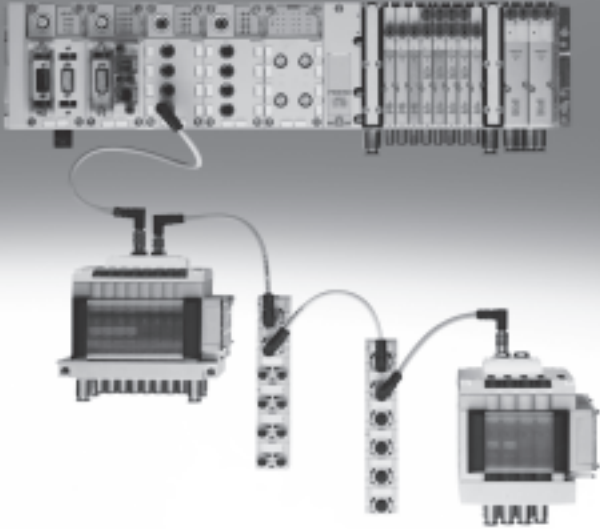

CPI installation system

Key features

FESTO

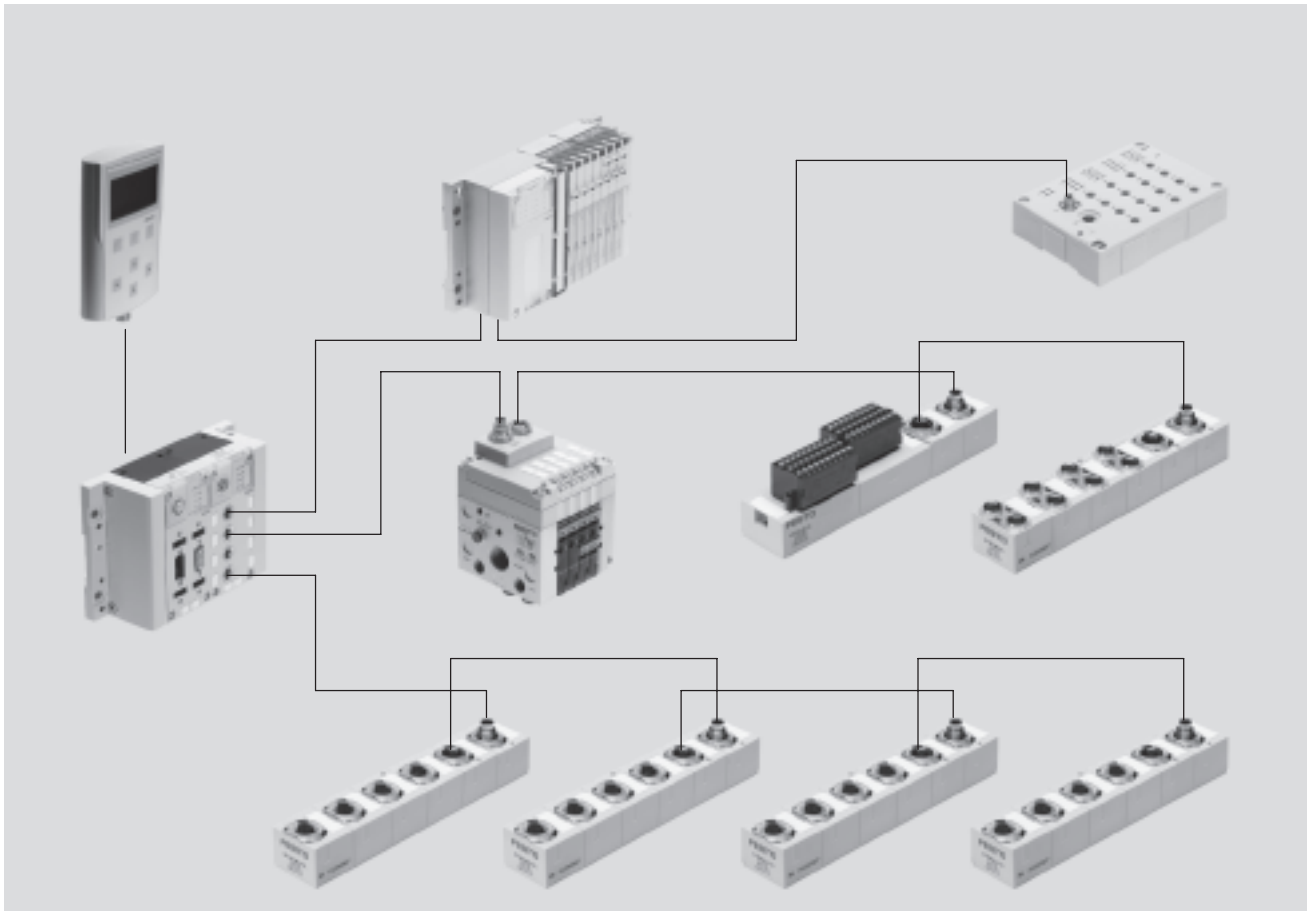

Innovative

- Complete concept for decentralised machine and system structure; centralised and decentralised installation can be combined with the CPX terminal
- Decentralised pneumatics and sensors for fast processes
- Centralised electrics for fieldbus and common power supply
- Flexible configuration of the individual CP strings
- Selectable valve terminal sizes for optimum pneumatic control loop systems
- Performance data as for the CP system with the addition of the comprehensive diagnostic capabilities of the CPX terminal

Sturdy

- Electrical accessories to IP65
- Proven valve terminals CPV (compact), MPA (sturdy, modular), CPV-SC (small, compact) and CPA (modular manifold sub-bases)
- Electrical input and output modules in metal housing or compact in encapsulated plastic housing
- Sturdy connection technology M12, alternatively M8
- IP20 modules for control cabinet installation with spring-loaded terminals or screw terminals

Versatile

- A number of CP interfaces can be combined under one fieldbus node
- Four CP strings up to 10 m in length (radius) facilitate optimum decentralisation
- Max. 32 inputs and 32 outputs/valves per string
- Available valves:
 - Valve terminal type 32 MPA, flow rate max. 700 l/min
 - Valve terminal type 10 CPV, flow rate max. 1,600 l/min
 - Valve terminal type 80 CPV-SC, flow rate max. 170 l/min
 - Valve terminal type 12 CPA, flow rate max. 650 l/min
- Input modules with 8 ... 32 inputs and output modules with 4 ... 8 outputs, each with or without additional power supply
- Universal electrical outputs

Reliable

- Sturdy modules and accessories
- Ready to install system including CP cable (hybrid cable for data and power)
- Polarity-safe and short circuit proof connections
- Valves with separate load voltage supply
- All modules equipped with local diagnostics and status LEDs
- Diagnostics of each CP string via controller/fieldbus
- Intelligent system (save button) "learns" current configuration
- Easy replacement of modules at any time

CPI installation system

Key features

CPI installation system

The CPI system is capable of meeting two completely different requirements and resolves the conflict between extensive decentralised modularisation and electrical installation.

High-speed machines require short cycle times and short pneumatic tubing. The valves must be mounted close to the cylinders. The CPI system was developed to meet these requirements without having to wire each valve individually.

The system integrates the modular valve terminals CPV, the manifold sub-base valve terminal CPA and various input/output modules in a single installation concept.


All CP valve terminals and CP modules are connected using a ready to install CP cable, and are attached to the CP interface. Four modules, for example one CPV valve terminal and one to three CP input modules, make up an installation string that ends at the CP interface.

Scope of features:

- Max. 4 installation strings per CP interface
- Max. 10 metre line length per string (radius)
- Max. 4 CP modules per string
- Max. 32 inputs and max. 32 outputs per string

The number of CP modules that can be connected and the number of inputs/outputs is dependent on the type of CP module and CP interface.

The maximum configuration (4 modules per string, 32 inputs/outputs) is only possible in combination with the CPX terminal and CP modules with CPI functionality. The CP interface is the central connection point for the valve power supply and the sensor supply. The power supply for the sensors is separate from the load voltage of the valves.

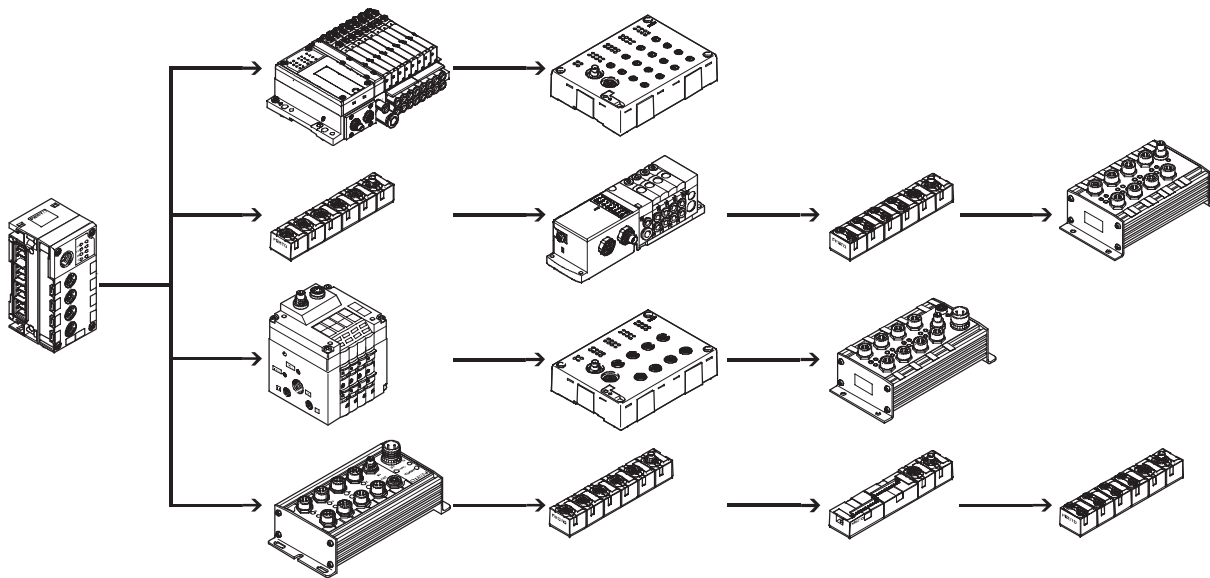


CPI installation system

Key features


FESTO

Node types:

Fieldbus/control block
CPX with CP interface
CPX-...




Fieldbus
Type 03/04 with CP interface
CP-FB-...




CP fieldbus node

CP-E



Valve terminal
with CP string extension
CPV, CPA-SC, CPV-SC, CDVI-DN, MPA



CPI installation system

Ordering system

FESTO

Configurator

Online via: → www.festo.com/us/engineering

Selecting a CPI system using the online catalogue is quick and easy thanks to the convenient configurator provided. This makes it much easier to find the right product.

Components from the CPI system series, type CTEC, are ordered using the order code.

Ordering system for type 55E
→ Internet:ctec


CPI installation system

Peripherals overview

FESTO

Integration of the CPI installation system in various connection concepts

Centralised pneumatic connection (valve terminal)




Advantages

- Pneumatic multiple connector plate
- Less tubing required than with individual valves
- Common valve air supply
- Central positioning
- Material, weight and cost savings

Disadvantages

- Only effective with a large number of closely spaced actuators
- Heavier than an individual valve (lower overall weight than the same number of individual valves), which may make assembly on moving systems or in very cramped installation spaces difficult
- Longer tube lengths are occasionally required, ruling out the possibility of optimum pneumatic performance

Decentralised pneumatic connection (individual valve/valve on individual sub-base)

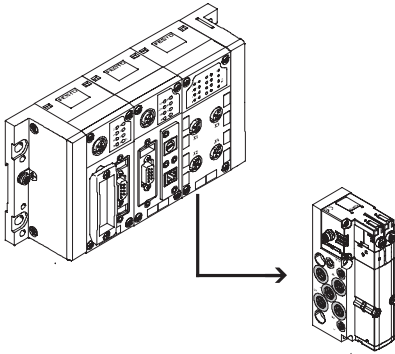

Advantages

- Can be positioned directly at the actuator, can even be integrated
- Short tubing length to the actuator enables short switching times
- Optimum pneumatic timing and performance possible

Disadvantages

- Air supply per valve requires more tubing
- Serial electrical interlinking not advisable/possible
- More complex electrical installation


CPI installation system

Peripherals overview

FESTO

Integration of the CPI installation system in various connection concepts

Centralised electrical connection (multi-pin plug/fieldbus connection/standalone minicontroller)

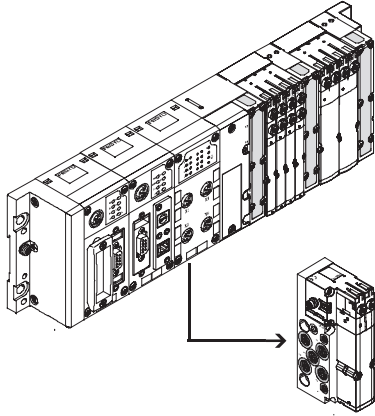


Advantages

- Internal electrical interlinking requires less cabling
- Increased transparency
- Material, weight and cost savings
- Ideal for connecting a large number of closely spaced valves

Disadvantages

- Not suitable for individual, more widely separated applications due to the more complex cabling
- More complex individual components (cables, fieldbus modules)

Decentralised electrical connection (CPI system/individual valve/valve on individual sub-base/valve manifold)

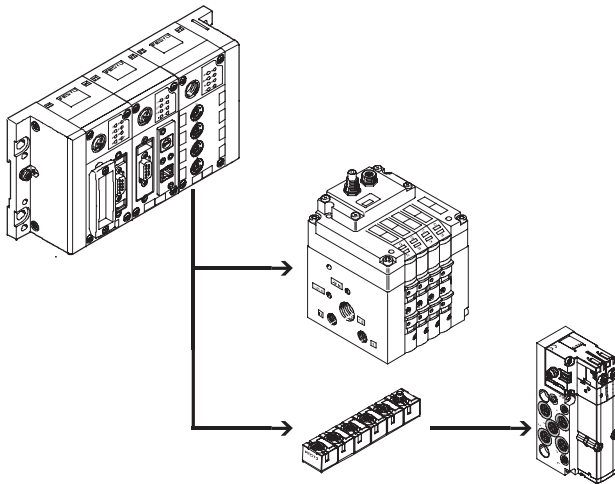

Advantages

- CPI system with reduced installation complexity for groups of actuators/sensors
- Different levels of complexity with widely separated individual components
- Easy replacement of components during servicing
- Optimum pneumatic timing and performance possible

Disadvantages

- Limited spatial expansion possible (CPI system up to 10 m, AS-interface up to 100 m)
- High installation costs


CPI installation system

Peripherals overview

FESTO

Integration of the CPI installation system in various connection concepts

Combined centralised and decentralised connection (valve terminal with CP interface/output module)

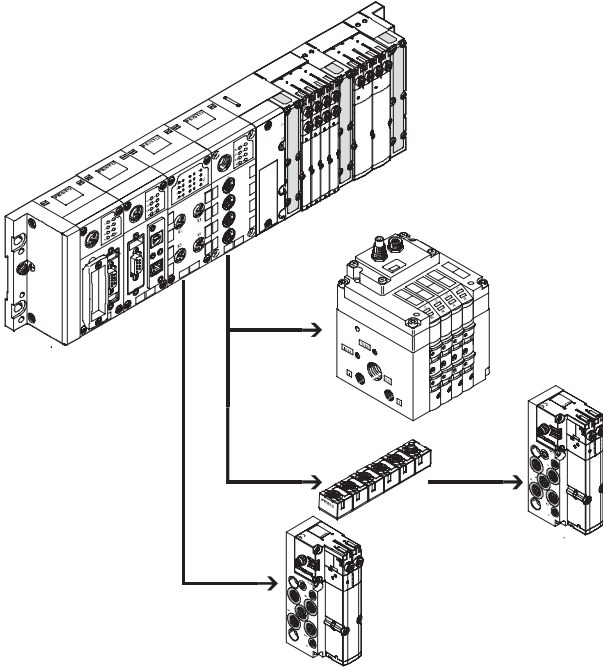

Advantages

- Can be scaled to different requirements within a system
- One control interface in the system, reduces installation complexity with closely and widely spaced actuators
- Enables an optimum electrical and pneumatic control chain

Disadvantages

- Application must at least partially meet the requirements of a centralised connection

Connection of the CPI installation system to a higher-level controller

Fieldbus node/Industrial Ethernet

Different bus nodes are used for integration in the control systems of various manufacturers.

The CPI system can therefore be operated via more than 90% of the most commonly used fieldbus systems.

- Profibus DP
- Profinet
- Interbus
- DeviceNet
- Ethernet IP
- CANopen
- CC-Link

Control block

The optional Front End Controller CPX-FEC enables simultaneous access via Ethernet and an integrated web server, as well as autonomous pre-processing.

- Ethernet
- TCP/IP
- Web

CPI installation system


Peripherals overview

FESTO

Connection of the CPI installation system to a higher-level controller

Overview

FB6




FB11


FB13

FB14


FB23




FB32




FB33



CPX-FEC



CPX CP interface



Bus protocol/fieldbus node

Interbus

FB6

Special features

- Up to 96 digital inputs/outputs
- 6 analogue inputs/outputs

DeviceNet

FB11

- Up to 512 digital inputs/outputs
- 18 analogue inputs/outputs

Profibus DP

FB13

- Up to 512 digital inputs/outputs
- 18 analogue inputs/outputs

CANopen

FB14

- Up to 64 digital inputs and 64 digital outputs
- 8 analogue inputs and 8 analogue outputs

CC-Link

FB23

- Up to 64 digital inputs/outputs
- 16 analogue inputs/outputs

Ethernet/IP

FB32

- Up to 128 digital inputs/outputs
- 8 analogue inputs/outputs

PROFINET RT

FB33

- Up to 512 digital inputs/outputs
- 32 analogue inputs/outputs

EtherCAT

FB38

- Up to 512 digital inputs/outputs
- 32 analogue inputs/outputs

Control block FEC

- Modbus TCP
- Easy-IP
- Interbus, DeviceNet, Profibus DP, CANopen and CC-Link via combination with CPX fieldbus node
- TCP/IP and web connection via Ethernet interface
- Up to 512 inputs/outputs
- Several CP interfaces can be connected
- Ethernet fieldbus slave in remote I/O operating mode (T05)
- Autonomous control of the CPI system as a remote controller (T03)

CPI installation system

Peripherals overview

Connection of modules in the CPI installation system

CP interface within the context of the CPX terminal

Using the CP interface as a module of the CPX terminal facilitates the progression from the CP system to the CPI system.


All CP modules are both downwards and upwards compatible and can therefore be used in the CP system and in the CPI system.

This extension has doubled the scalability and range of CP modules that can be used:

- 4 CP strings
- Up to 4 modules per string
- Up to 32 inputs and outputs per CP string

An added advantage of the CPI system is its extremely user-friendly access possibilities via the CPX fieldbus node and the CPX-FEC:

- Data pre-processing
- Diagnostics via software
- Reading out of status information
- Display via permanently installed or mobile unit
- Remote maintenance with CPX-FEC and Ethernet connection

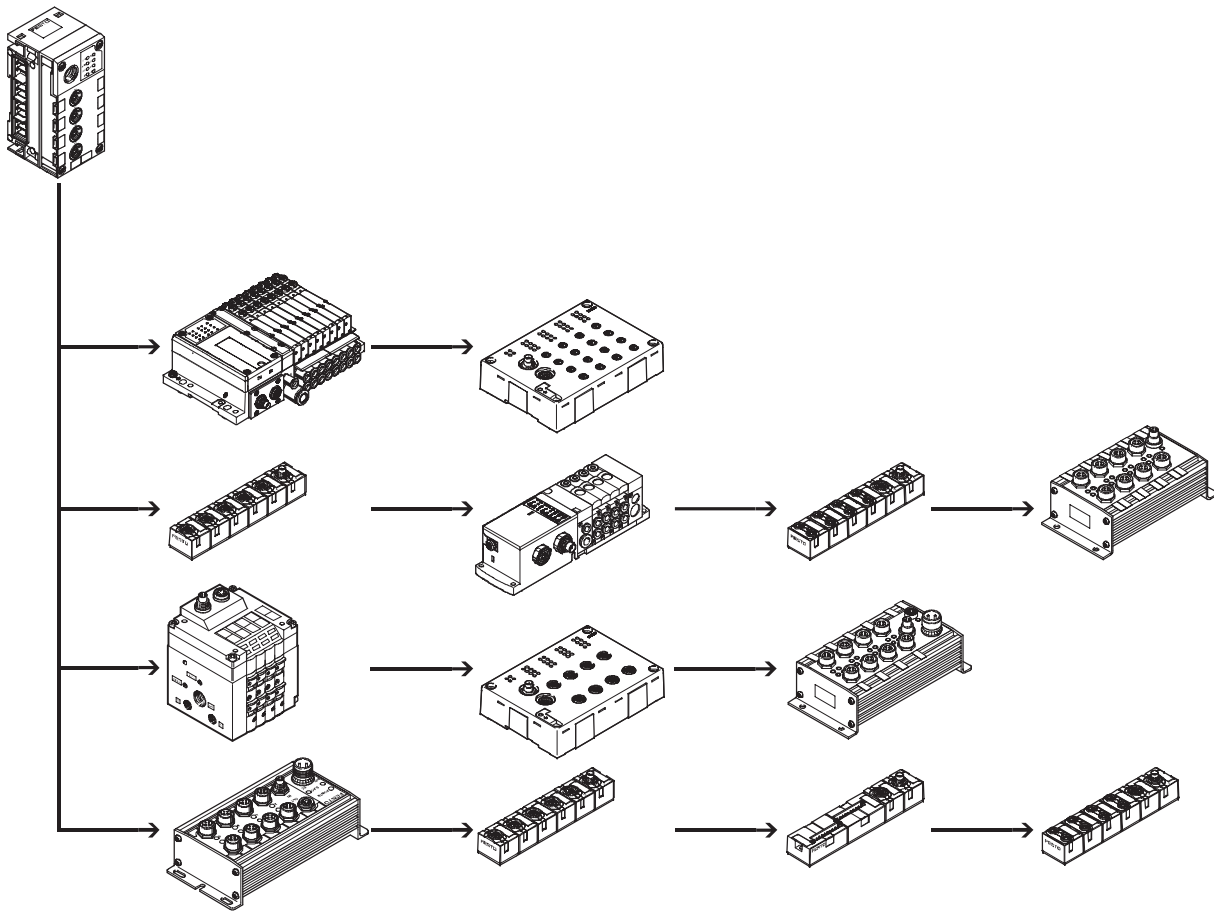

CPI installation system

Connection options

| Fieldbus Direct | | | |
|--|--|---|--|
| Special feature | Application | Characteristics of Fieldbus Direct | Note |
| <p>The Fieldbus Direct product range is the most compact way of connecting valves to a fieldbus. The fieldbus node is directly integrated in the electrical actuation of the valve terminal and therefore takes up only a minimal amount of space.</p> | <p>Fieldbus Direct is a system for the compact connection of a valve terminal to nine different fieldbus standards. The most important fieldbus protocols including Profibus, Interbus, DeviceNet and CANopen are supported. The CP string extension option allows the functions and components of the CPI installation system to be used.</p> | <ul style="list-style-type: none"> • Extremely compact and space-saving design • Low-cost solution for the connection of a small number of valves to the fieldbus • Direct front-end integration with a high degree of protection (IP65) • Comprehensive diagnostics and condition monitoring | <p>The range of functions and combination options of CPV, CPV-SC, CPA-SC, CDVI and MPA valves are described in detail in</p> <ul style="list-style-type: none"> ➔ Internet: type 80 (Valve terminal CPV-SC) ➔ Internet: cpasc (Valve terminal CPA-SC) ➔ Internet: type 15 (Valve terminal CDVI) ➔ Internet: type 10 (Valve terminal CPV) ➔ Internet: type 32 (Valve terminal MPA) |

| Fieldbus Direct and CP string extension | | | |
|---|---|--|--|
| <p>The optional string extension allows a further valve terminal and I/O modules to be connected to the Fieldbus Direct fieldbus node.</p> <ul style="list-style-type: none"> • A CP string of the CP system is integrated in the fieldbus node as an extension • Different input and output modules as well as CPV, CPA and MPA valve terminals can be connected | <p>The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All of the required electrical signals including load current supply are transmitted via the CP cable, which in turn means that no further installation is needed on the expansion module.</p> | <p>The CP string interface offers:</p> <ul style="list-style-type: none"> • Max. 32 input signals • Max. 32 output signals for output modules 24 V DC or solenoid coils • Logic and sensor supply for the input modules | <ul style="list-style-type: none"> • Load voltage supply for the valve terminals • Logic supply for the output modules |


CPI installation system

Connection options

FESTO

Fieldbus Direct with CP string extension


CPV valve terminal

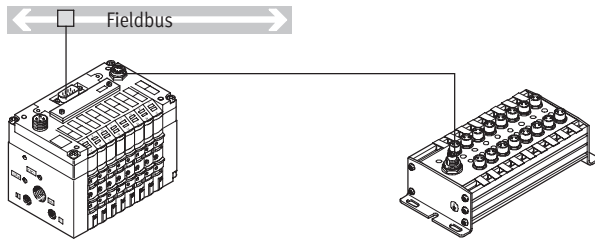

- 4 to 8 valve positions
- DeviceNet
- CANopen
- Profibus DP
- ABB CS31
- Interbus
- Moeller Suconet
- Festo fieldbus
- Beckhoff
- CC-Link
- 4 to 16 solenoid coils

Further information
 → Internet: type 10


CPA-SC

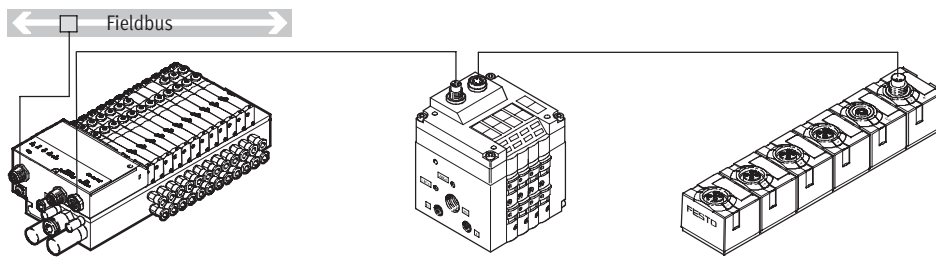

- 4 to 24 valve positions
- DeviceNet connection
- Profibus DP
- 4 to 32 solenoid coils

Further information
 → Internet: cpasc


CPV-SC

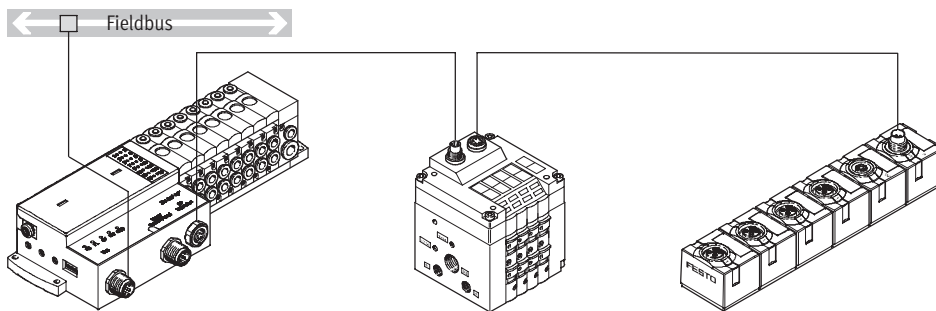

- 4 to 16 valve positions
- DeviceNet connection
- Profibus DP
- 4 to 16 solenoid coils

Further information
 → Internet: type 80

CDVI-DN

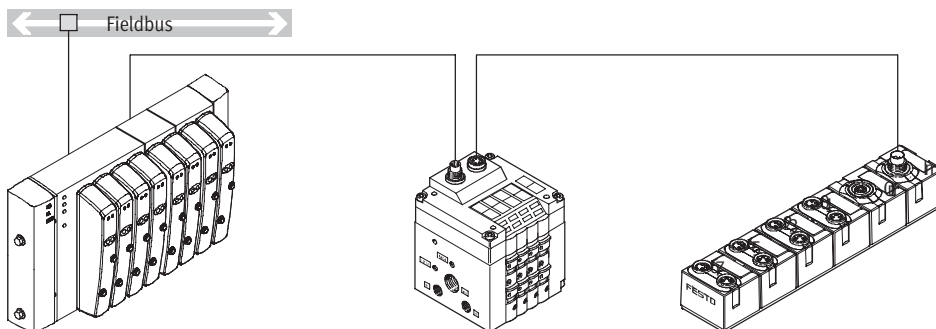

- 4 to 16 valve positions
- DeviceNet connection
- 4 to 24 solenoid coils

Further information
 → Internet: type 15

CPI installation system

Connection options

Positioning systems

Application

The SPC200 is a position controller (closed loop) and positioning control (open loop) in one. Together with the drive, the displacement encoder and the proportional directional control valve, it forms a closed control loop.

The CP interface option enables the functions and components of the CP installation system to be used.

Properties

- Modular with 9 different plug-in cards
- Wide variety with up to 4 positioning axes, stepper motor axes and the option of operating pneumatic and electrical systems
- Flexible with set selection for positioning tasks with fixed trajectories and program mode with up to 100 programs
- Quick commissioning using the WINPISA diagnostic and programming tool

Positioning systems and CP interface

The plug-in cards for connecting the axis strings facilitate the connection of further input/output modules:

- One CP string of the CP system is possible as an extension
- Various input and output modules as well as CPV valve terminals can be connected

The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All of the required electrical signals including load current supply are transmitted via the CP cable, which in turn means that no further installation is needed on the extension module.


The CP string interface offers:

- 16 input signals
- 16 output signals for output modules 24 V DC or solenoid coils
- Logic and sensor supply for the input modules
- Load voltage supply for the valve terminals
- Logic supply for the output modules

Note

CP input modules can only be connected via a terminating resistor (KZW-M9-R100).


Axis controller SPC200 with CP interface

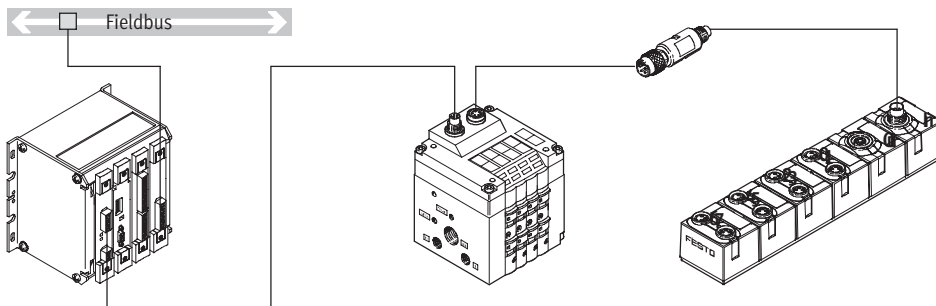

- Max. 64 inputs and 64 outputs via fieldbus
- DeviceNet, Interbus or Profibus connection

Further information
 → Internet: spc200

Compact vision system SBOC-Q/SBOI-Q with CP interface

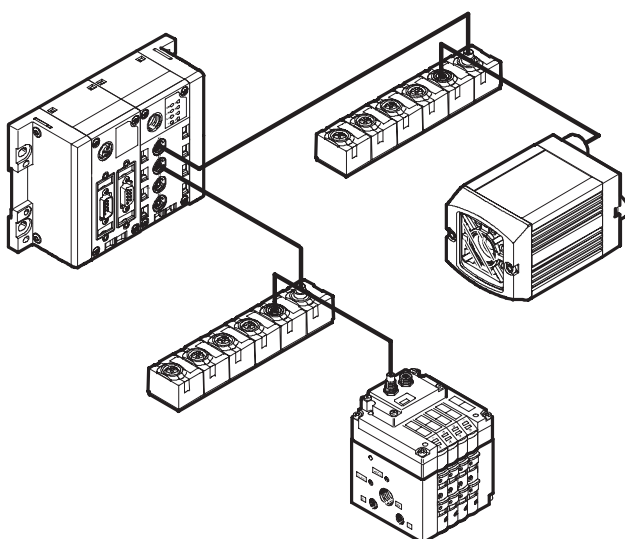

The compact vision system SBOx-Q can be integrated into a Festo CPI network. In this case it functions like a binary module with 16 inputs and outputs.

In combination with a CPX-CPI module and a CPX fieldbus, for example, the camera can be accessed via Profibus DP, Interbus, DeviceNet, CANopen and CC-Link.

- Address requirement: 16 digital inputs/outputs
- CPI connection

Further information
 → Internet: sbo


CPI installation system

Connection options

FESTO

Connection of input and output modules in the CPI installation system

CP connecting cable



KVI-CP-3-...

Note

The total length of all CP cables in a CP string must not exceed 10 m.

- Pre-assembled cables for connecting the CP modules
- Lengths from 0.25 to 8 metres
- M9 plug/socket, 5-pin
- Straight/angled version in any combination

Further information
➔ Internet: kvi-cp

CP input/output modules in sturdy, universal and compact design or as a valve terminal

The connection technology for the sensors and additional actuators offers a wide range of digital and analogue input and output modules and is freely selectable – depending on your standard or application:


- M12-5PIN
- M8-3PIN
- M8-4PIN
- Spring-loaded terminal or screw terminal technology

The maximum number of inputs/outputs that can be connected to the individual modules can vary depending on the application. The following module sizes are available:

- Input modules with 8, 16 or 32 channels
- Output modules with 4 or 8 channels
- CPV with 4, 6 or 8 valve slices (max. 16 valves)
- MPA with 2 ... 32 valves
- CPV-SC with 4 ... 16 valves
- CPA with 2 ... 16 valves

Valve terminals with CP interface

CPV valve terminal




CPV10
CPV14
CPV18

- Max. 16 valves in 8 valve slices
- Highly compact and space-saving
- Width 10, 14, 18 mm
- Nominal flow rate 400/800/1600 l/min
- CPV10 and CPV14 with CPI functionality
- CPV18 with CP functionality

Further information
➔ Internet: type 10
(Valve terminal CPV)

MPA valve terminal




MPA1
MPA2

- Max. 32 valves
- Modular and versatile
- Width 10, 20 mm
- Nominal flow rate 360/700 l/min
- CPI functionality

Further information
➔ Internet: type 32
(Valve terminal MPA)

CPV-SC valve terminal




CPV-SC

- Max. 16 valves
- Extremely compact
- Width 10 mm
- Nominal flow rate 170 l/min
- CPI functionality

Further information
➔ Internet: type 80
(Valve terminal CPV-SC)

CPA valve terminal



CPA10
CPA14

- Max. 16 valves
- Width 10, 14 mm
- Nominal flow rate 300/600 l/min
- CP functionality

Further information
➔ Internet: type 12
(Valve terminal CPA)

CPI installation system

Key features – Input/output modules

Connection of input and output modules in the CPI installation system

Special features of the CP input/output modules of sturdy design


The sturdy CP input/output modules have a highly resistant aluminium housing and its internal electronic components can be repaired or replaced.

As a CP-E...Z or output modules they have a separate load voltage supply, which means less load on the CP interface and CP cable and more

power for the connected consuming devices. This also facilitates separate disconnection of the consuming devices.

High degree of protection (IP65), surpassed only by the compact CP modules with IP65/67 protection. The only exception is the IP20 protection offered by the module with clamped terminal connection for installation in control cabinets.


CP input modules of sturdy design



CP-E16-M12x2-5POL
CP-E16N-M12x2

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- CP functionality


- M12 plug, double allocation
- 1x M9 CP connection
- PNP/NPN, IP65



CP-E16-M8
CP-E16N-M8

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- CP functionality

- M8 plug, single allocation
- 1x M9 CP connection
- PNP/NPN, IP65




CP-E16-M8-Z

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- CP functionality

- Galvanic isolation through additional power supply
- M8 plug, single allocation
- 1x M9 CP connection
- Separate sensor supply
- PNP/NPN, IP65

CP output modules of sturdy design



CP-A08-M12-5POL
CP-A08N-M12

- 8 outputs 24 V DC
- Output signal display via 8 LEDs
- Operating status display
- M12 plug, single allocation
- CP functionality

- 2x M9 CP connection
- Separate load voltage
- Outputs resistant to overloads and short circuits
- PNP/NPN, IP65

CPI installation system

Key features – Input/output modules

Connection of input and output modules in the CPI installation system

Special features of the CP input/output modules of economical design

In addition to the sturdy CP input/output modules and the compact CP input/output modules, there are also the economical modules with the design features of the compact modules, but with a greater number of inputs/outputs.


The economical CP modules feature a compact design, coupled with a large number of inputs/outputs. The modules can be used in connection with the following valve terminals:
– CPV, MPA, CPV-SC, CPA-SC, CDVI, CPA

Application:

- Same function, configuration and commissioning as sturdy or compact CP modules
- Integrated H-rail mounting and earthing plate
- Centrally placed status and diagnostic LEDs
- The economical CP modules and the other CP modules can be operated together on a string

- The maximum number of modules per CP string is as follows:
 - CPI system: max. 4 modules or max. 32 inputs and 32 outputs
 - CP system: one valve terminal/output module and one input module


CP input modules of economical design



CP-E16-M12-EL

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display (per module and per group of four inputs)
- CPI functionality


- 8x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- PNP, IP65



CP-E16-M8-EL

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display (per module and per group of four inputs)
- CPI functionality

- 16x M8 plug, 3-pin, single allocation
- 2x M9 CP connection
- PNP, IP65




CP-E32-M8-EL

- 32 inputs 24 V DC
- Signal status display via 32 LEDs
- Operating status display (per module)
- CPI functionality

- 16x M8 plug, 4-pin, double allocation
- 2x M9 CP connection
- PNP, IP65

CP output modules of economical design



CP-A08-M12-EL-Z

- 8 outputs 24 V DC
- Signal status display via 4 LEDs
- Operating status display (per module and per channel/output)
- CPI functionality

- 8x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- Outputs resistant to overloads and short circuits
- PNP, IP65

CPI installation system

Key features – Input/output modules

Connection of input and output modules in the CPI installation system

Special features of the CP input/output modules of compact design

In addition to the sturdy and economical CP input/output modules, there is also the compact series of CP input/output modules. These have an optimised, compact design, are made from plastic and are very light. They are, of course, available with the high degree of protection IP65/67 (exception: terminal modules in IP20 for installation in a protected fitting space).

The compact CP modules are designed for use in handling and assembly wherever space requirements and product weight play a role.


The modules can be used in connection with the following valve terminals:

- CPV, MPA, CPV-SC, CPA-SC, CDVI, CPA

Application:

- The modules can be positioned closer to the actuators thanks to the smaller dimensions
- Same function, configuration and commissioning as sturdy or economical CP modules
- The compact CP modules and the other CP modules can be operated together on a string
- The maximum number of modules per CP string is as follows:
 - CPI system: max. 4 modules or max. 32 inputs and 32 outputs
 - CP system: one valve terminal/output module and one input module


CP input modules of compact design



CP-E08-M12x2-CL

- 8 inputs 24 V DC
- Signal status display via 8 LEDs
- Operating status display
- CPI functionality


- 4x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- PNP, IP65/67



CP-E08-M8-CL

- 8 inputs 24 V DC
- Signal status display via 8 LEDs
- Operating status display
- CPI functionality

- 8x M8 plug, 3-pin, single allocation
- 2x M9 CP connection
- PNP, IP65/67




CP-E16-KL-CL

- 16 inputs 24 V DC
- Indirect signal status display via LEDs in the connection set of the tension-spring socket
- Operating status display
- CPI functionality

- Screw terminal or tension-spring sockets
- 2x M9 CP connection
- PNP, IP20

CP output modules of compact design



CP-A04-M12x2-CL

- 4 outputs 24 V DC
- Signal status display via 4 LEDs
- Operating status display
- CPI functionality

- 4x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- Outputs resistant to overloads and short circuits
- PNP, IP65/67


CPI installation system

Key features – Mounting options

FESTO

H-rail mounting

CP interface




The H-rail mounting is formed in the reverse profile of the CPX interlinking blocks. The CPX terminal can be attached to the H-rail using the H-rail mounting.

The CPX terminal is attached to the H-rail as follows (see arrow A). It is first swivelled on the H-rail and then secured in place with the clamping component (see arrow B).

The following mounting kit is required for H-rail mounting (plus mounting kit for optionally mounted valves):

- CPA-BG-NRH
- This enables mounting on H-rails to EN 60715.

Economical CP modules




The H-rail mounting is impressed in the reverse profile of the economical CP modules. The modules can be attached to the H-rail using the H-rail mounting.

The module is attached to the H-rail as follows (see arrow A). It is first swivelled on the H-rail and then secured in place with the clamping component (see arrow B).

The scope of delivery includes the following mounting kit for H-rail mounting:

- CP-EL-HS
- This enables mounting on H-rails to EN 60715.

Compact and sturdy CP modules

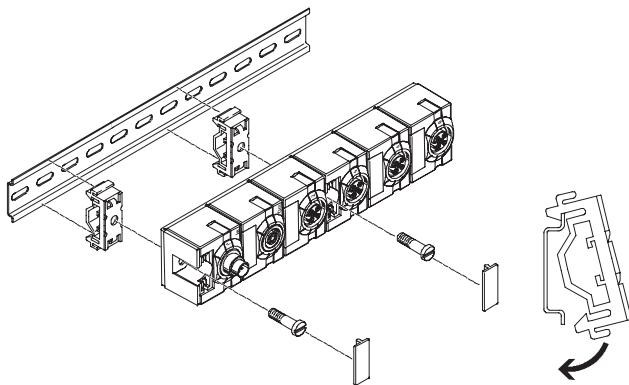

For the CP modules there is a mounting kit that can be used on an H-rail. On the compact CP modules, the mounting holes are covered by inscription labels.

The following mounting kit is required for H-rail mounting:

- CP-TS-HS35
- This enables mounting on H-rails to EN 60715.


CPI installation system

Key features – Mounting options

FESTO

Wall mounting

CP modules

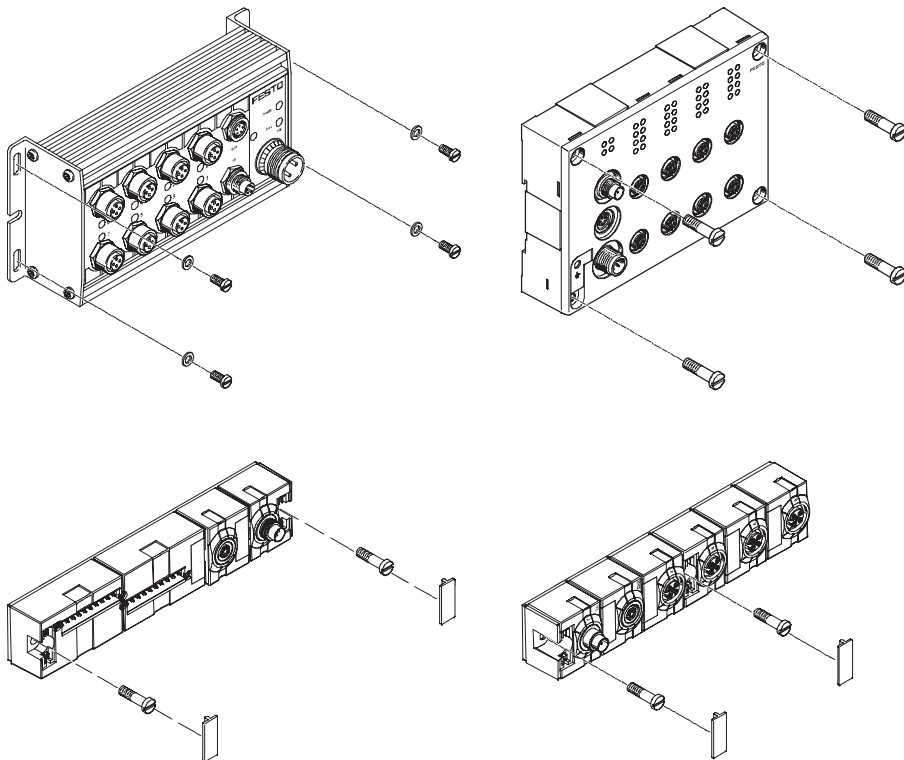

The CP modules (with screws up to 4 mm in diameter) can be mounted on even surfaces in almost any position using the mounting holes.

Note

The mounting holes on the compact CP modules are covered by inscription labels.

CPI installation system

Key features – Inscription system

FESTO


Inscription system

All CP modules have holders for inscription labels.

Inscription labels/holders are not included in the scope of delivery and can be ordered separately.

The labels can be pre-assembled on request.


Robust CP modules

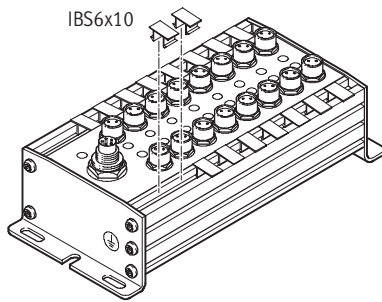

The sturdy CP modules have two slots in which the inscription labels IBS6x10 (Part No. 18576) can be fitted. At least one inscription label can be fitted per connection.

The IBS6x10 are plastic clips that can be printed on, written on or affixed with labels.

Economical CP modules

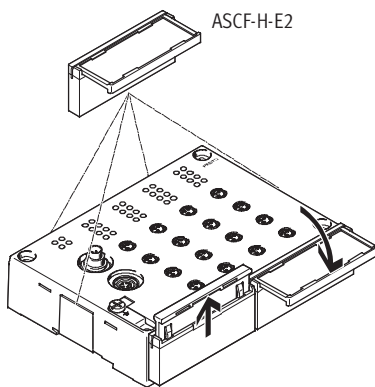


The economical CP modules have six lateral fixtures for one inscription label holder ASCF-H-E2 each (Part No. 547473).

The ASCF-H-E2 are transparent hinged label holders for holding pre-assembled paper inscription labels.

The label can be read when the label holder is opened out.

Compact CP modules



The compact CP modules have a holder for an inscription label IBS8x20 (Part No. 539388) for each connection.

The IBS8x20 are plastic clips that can be printed on, written on or affixed with labels.

CPI installation system

Key features – Power supply

Operating voltage and load current supply

The following functions are made available to the connected modules through the CP cable:

- Connection for data exchange
- Operating voltage for internal electronics
- Load current supply for the connected inputs/sensors and/or outputs/actuators

CP-E...Z or output modules from the sturdy and the economical series have a separate load voltage supply:

- Less load on the CP interface and CP cable
- 0.5 A per output (max. 4 A supply per output module)
- 1 A per 8 inputs
- Separate disconnection of the consuming devices possible


Every module in the CPI system is protected separately against overload with electronic fuses.

The input modules without additional supply provide a maximum sensor supply of 500 mA in the sturdy design, 800 mA in the compact design and

700 mA in the economical design with 16 inputs and 1400 mA with 32 inputs.

The input modules with additional supply provide up to 2 A residual current for the connected sensors.

Example of circuits for additional power supply

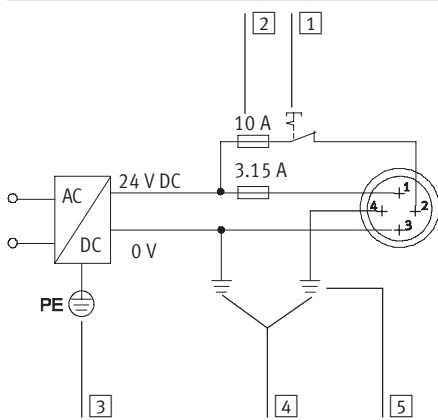

- 1 Load voltage supply (can be disconnected separately)
- 2 External fuses
- 3 Protective earth
- 4 Equipotential bonding
- 5 Earth terminal on pin 4, rated for 12 A

Pin allocation of plug for additional power supply


| Pin allocation | Pin | Signal | Designation |
|----------------|-----|---------|--|
| | 1 | 24 V DC | Supply for electronics and inputs |
| | 2 | 24 V DC | Load supply for valves/outputs |
| | 3 | 0 V | Equipotential bonding |
| | 4 | 0 V | Earth terminal and equipotential bonding, rated for 12 A |

CPI installation system

Key features – Power supply

Power supply concept of the CPX terminal

Circuit diagram for M18 power supply/system supply (example)

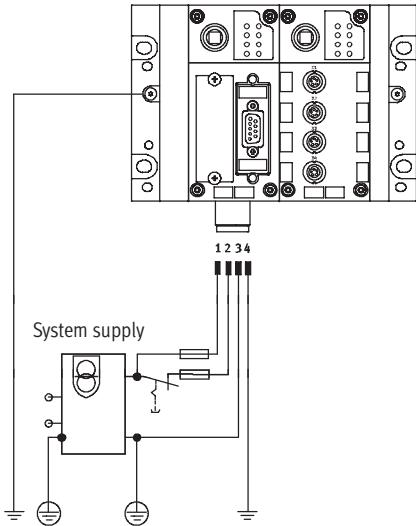

The use of decentralised devices on the fieldbus – particularly with high protection for direct machine mounting – demands a flexible power supply concept.

The CPX terminal facilitates the connection of all voltages via one socket.

A distinction is made between supply for

- electronics and sensors/inputs
- valves
- actuators/outputs

Selectable connecting thread:

- M18
- 7/8"
- AIDA push-pull

Note

The CP interface connects the 0 V of the power supply for the electronics/inputs and the valves. To prevent overloads, the power must

therefore be supplied using just one power supply module or using power supply units with a common earthed conductor.

Interlinking blocks

Many applications require segmenting of the voltage into zones. This is true in particular of the separate disconnection of connected actuators (solenoid coils/outputs). The separation of voltages for valves and the realisation of different voltage segments for electrical outputs and sensors are supported by the different

interlinking blocks of the CPX terminal:

- With system supply
- Without power supply
- With additional power supply for electrical outputs
- With additional power supply for valves

The supply voltages are supplied using a

- 4-pin M18 plug
- 4-pin 7/8" plug
- 5-pin 7/8" plug
- AIDA push-pull, 5-pin

Note

The max. current is limited to 12 A with the 7/8" system supply. When using a conventional pre-assembled cable, the max. current is limited to 8 A.

CPI installation system

Key features – Diagnostics

General limits

System supply

The system supply provides the internal voltage for the entire CPX system with

- max. 16 A for electronics and sensors/inputs
- max. 16 A for actuators/outputs and valves

CP interface

The CP interface and the CP modules connected to the CP interface get their operating voltage from the connection for electronics and sensors/inputs.

The operating voltage for the sensors/actuators connected to the CP modules is supplied from the voltage for valving. The CP interface supplies

the connected CP modules with
The CP interface supplies the connected CP modules with

- max. 1.6 A per CP string

Diagnostics

General information

A comprehensive diagnostic function is available for each string.

The diagnostic information can either be detected via the LEDs on the module and then read out and evaluated via the controller software (non-fieldbus-specific) or displayed directly on the CPX terminal via the CPX-MMI and then evaluated and edited.

Diagnostics via LED

- Error in bus communication
- POWER, power supply display for internal electronics
- POWER V, load voltage display for valves
- 0 ... 3, CP string allocation changed or interrupted


There are also bus-specific LED displays.

Diagnostics via control program/CPX-MMI

- Configuration error
- Bus error
- Operating voltage failure
- Falling below voltage tolerance (valves)
- Short circuit in sensor voltage supply

- Operating voltage failure at the output modules
- Short circuit/overload at the output modules
- Connection to one or more CP modules interrupted (valve terminal, input/output modules)

Diagnostics via CPX terminal

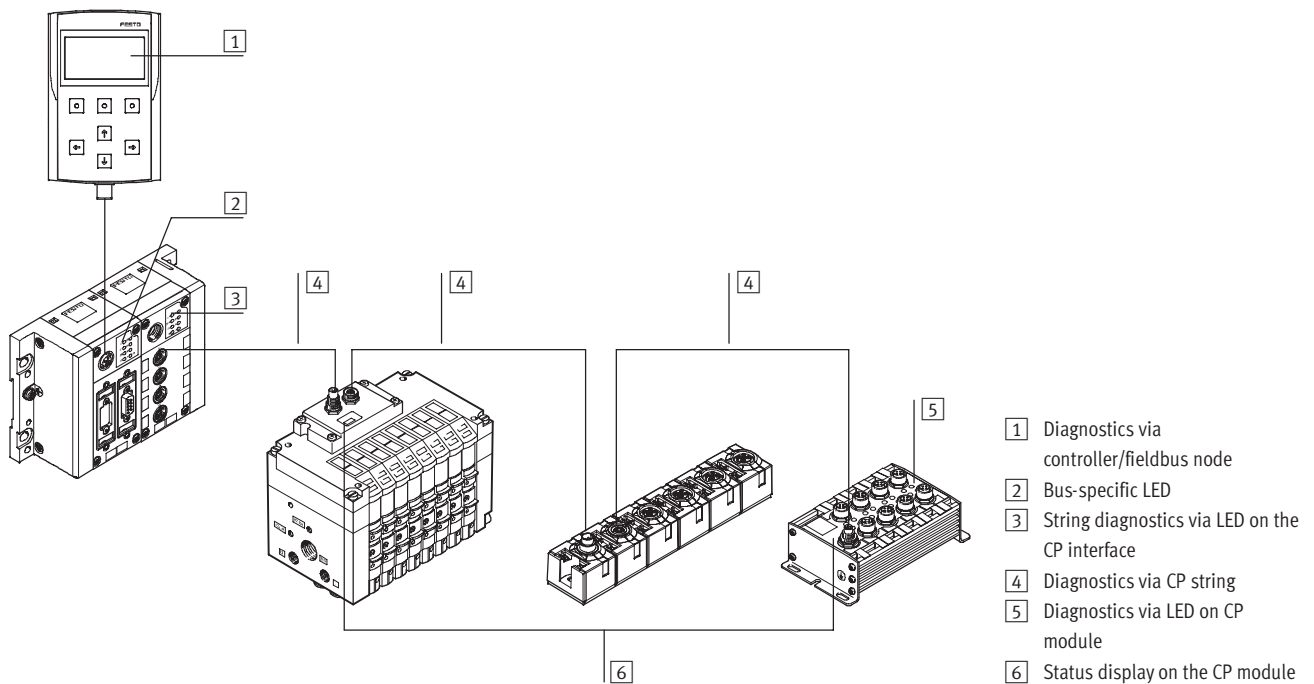


CPI installation system

Key features – CP interface


FESTO

Diagnostics

Diagnostics via CP fieldbus node

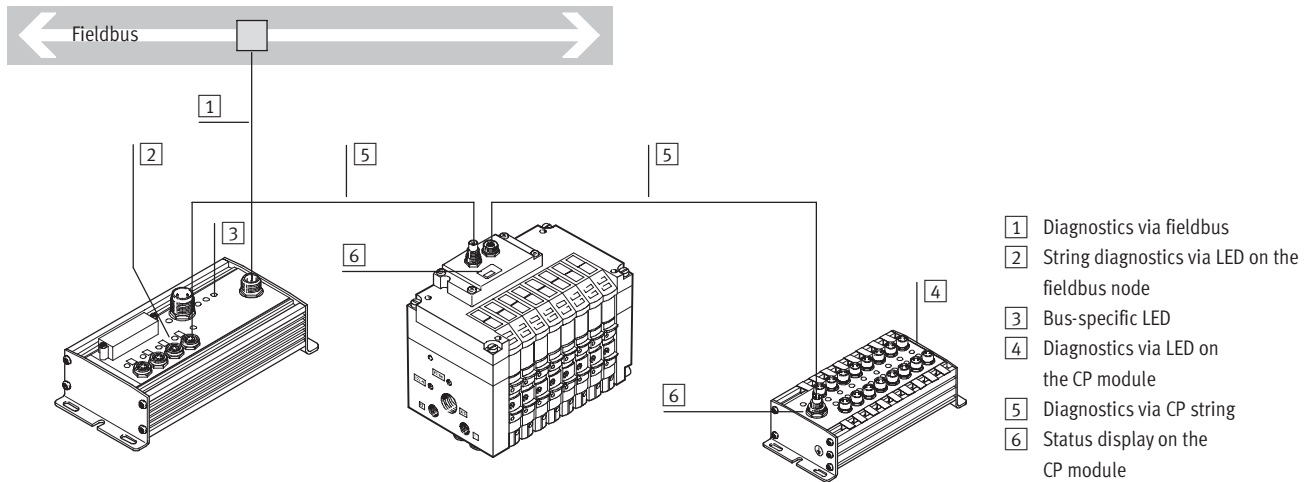

Diagnostic LEDs on the CP modules

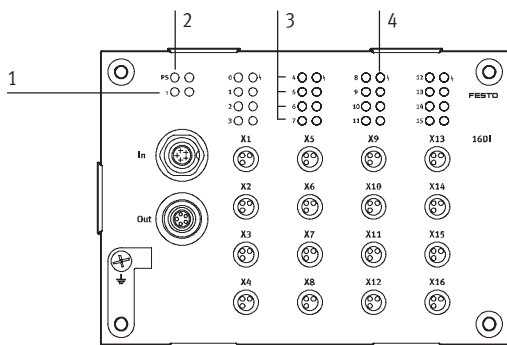

- 1 Status LED for CP communication (PS, green)
- 2 Status LED (module) for short circuit/overload of sensor supply (red)
- 3 Status LEDs for inputs (status display, green)
- 4 Status LED (group, only with CP-E16-...-EL) for short circuit/overload of sensor supply (red)

In addition to the status display per module and per individual channel/input, the economical modules with 16 inputs additionally have a status display for a group of four inputs. The following inputs are combined into groups of four:

- 0 ... 3
- 4 ... 7
- 8 ... 11
- 12 ... 15

Parameterisation

Allocation of the addresses to the individual actuators/outputs or sensors/inputs connected to the CP modules is performed in accordance with the fieldbus node or CPX-FEC used (exception: Interbus node). Address allocation is performed in accordance with the following rules:

- One CP interface provides four strings with a total of 128 inputs and 128 output addresses.
- A used string occupies 32 inputs and 32 output addresses.
- The addresses are permanently allocated to the strings and CP modules in ascending order.
- Unused address space remains reserved for future extensions.

The CP interface checks the configuration of the connected modules each time the system is switched on and during operation. If a deviation from the saved configuration is detected, an appropriate message is output via the controller software and displayed via LED. The configuration detected is stored by pressing the Save button (after the operating voltage is switched on at the CP interface).

The configuration is stored each time the CP interface is switched off and back on. The option is provided of replacing a connected CP module with a module of identical design during operation. Removal of more than one module from the current configuration will be detected as an error; the address spaces of these modules will no longer be actuated.

CPI installation system

Selection aid

| System selection aid | | | | | |
|----------------------|--------------------|---------------------------|---|---|-------------------|
| | Modules per string | Outputs/inputs per string | Modules with CP functionality | Modules with CPI functionality | String length [m] |
| CP system | 2 | 16/16 | 0 ... 1 input module 0 ... 1 output module | 0 ... 1 input module 0 ... 1 output module | 0 ... 10 |
| CPI system | 4 | 32/32 | 0 ... 1 input module 0 ... 1 output module | 0 ... 4 input modules 0 ... 4 output modules | 0 ... 10 |

| Module selection aid | | | | | | | |
|--------------------------|---------------|-----|-------------------------|---------------------|---------|------------------------------|-----------------|
| | Functionality | | Additional power supply | Address requirement | | Max. current consumption [A] | → Page/Internet |
| | CP | CPI | | Inputs | Outputs | | |
| Input modules | | | | | | | |
| CP-E16-M8 | ■ | - | - | 16 | - | 0.54 | 47 |
| CP-E16N-M8 | ■ | - | - | 16 | - | 0.59 | 47 |
| CP-E16-M12x2-5POL | ■ | - | - | 16 | - | 0.59 | 47 |
| CP-E16N-M12x2 | ■ | - | - | 16 | - | 0.59 | 47 |
| CP-E16-M8-Z | ■ | - | ■ | 16 | - | 1.04 | 47 |
| CP-E32-M8-EL | - | ■ | - | 32 | - | 1.4 | 53 |
| CP-E16-M8-EL | ■ | ■ | - | 16 | - | 0.7 | 53 |
| CP-E16-M12-EL | ■ | ■ | - | 16 | - | 0.7 | 53 |
| CP-E08-M12-CL | ■ | ■ | - | 8 | - | 0.835 | 59 |
| CP-E08-M8-CL | ■ | ■ | - | 8 | - | 0.835 | 59 |
| CP-E16-KL-CL | ■ | ■ | - | 16 | - | 0.835 | 59 |
| Output modules | | | | | | | |
| CP-A08-M12-5POL | ■ | - | ■ | - | 8 | 2.09 | 65 |
| CP-A08N-M12 | ■ | - | ■ | - | 8 | 2.09 | 65 |
| CP-A08-M12-EL-Z | ■ | ■ | ■ | - | 8 | 4 | 69 |
| CP-A04-M12-CL | ■ | ■ | - | - | 4 | 1.035 | 73 |
| Connecting cables | | | | | | | |
| KVI-CP-3-... | ■ | ■ | - | - | - | 1.6 | kvi-cp |
| Valve terminals | | | | | | | |
| CPV10-FB-4 | ■ | ■ | - | - | 16 | 0.327 | type 10 |
| CPV10-FB-6 | ■ | ■ | - | - | 16 | 0.465 | type 10 |
| CPV10-FB-8 | ■ | ■ | - | - | 16 | 0.604 | type 10 |
| CPV14-FB-4 | ■ | ■ | - | - | 16 | 0.419 | type 10 |
| CPV14-FB-6 | ■ | ■ | - | - | 16 | 0.603 | type 10 |
| CPV14-FB-8 | ■ | ■ | - | - | 16 | 0.788 | type 10 |
| CPV18-FB-4 | ■ | ■ | - | - | 16 | 0.624 | type 10 |
| CPV18-FB-6 | ■ | ■ | - | - | 16 | 0.911 | type 10 |
| CPV18-FB-8 | ■ | ■ | - | - | 16 | 1.197 | type 10 |
| CPA10 | ■ | - | - | - | 16 | 0.31 | type 12 |
| CPA14 | ■ | - | - | - | 16 | 0.5 | type 12 |
| MPA | - | ■ | ■ | - | 32 | 3.25 | type 32 |
| CPV-SC | - | ■ | - | - | 16 | 0.875 | type 80 |


CPI installation system

Selection aid

FESTO

Accessory selection aid

Connection M8, 3-pin

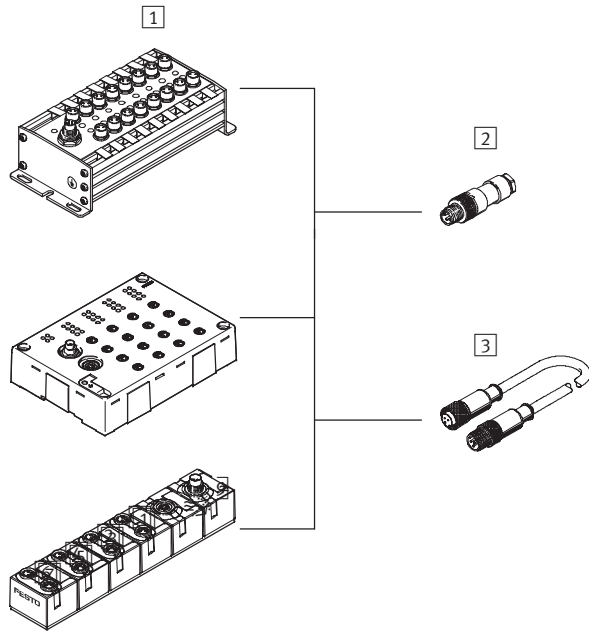

Note

Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on customer request:

- application tailored
- perfectly fitting
- installation saving

| 1 Input modules |
|-----------------|
| Type |
| CP-E16-M8 |
| CP-E16N-M8 |
| CP-E16-M8-Z |
| CP-E16-M8-EL |
| CP-E08-M8-CL |


| Plug connector/connecting cable | |
|---------------------------------|-----------------------|
| Type | Connection technology |
| 2 Plug connector | |
| SEA-GS-M8 | Solder lug |
| SEA-3GS-M8-S | Screw terminal |
| 3 Connecting cable | |
| KM8-M8-GSGD-... | Socket M8, 3-pin |
| NEBU-...-M8G3 | Socket M5, 3-pin |
| | Socket M8, 3-pin |
| | Socket M8, 4-pin |
| | Socket M12, 5-pin |
| | Open cable end |

CPI installation system

Selection aid

Accessory selection aid

Connection for inputs M8, 4-pin

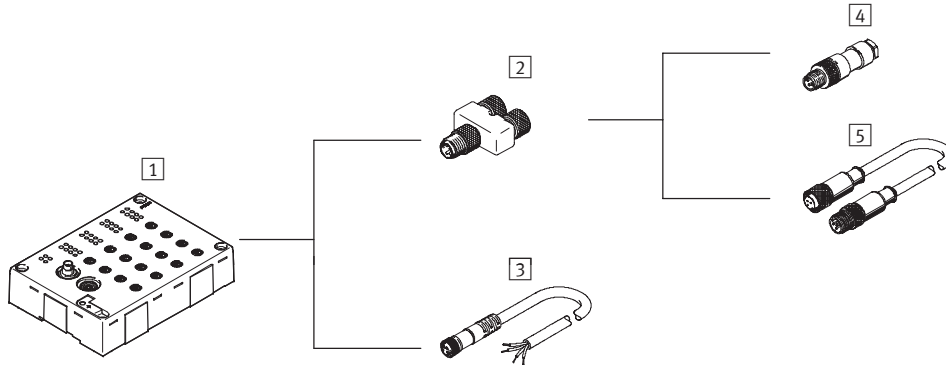

Note

Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on customer request:

- application tailored
- perfectly fitting
- installation saving

| 1 | Input modules |
|--------------|---------------|
| Type | |
| CP-E32-M8-EL | |

| Plug connector/connecting cable | |
|---------------------------------|-----------------------|
| Type | Connection technology |
| 2 T-adapter | |
| NEDU-M8D3-M8T4 | 2x socket M8, 3-pin |
| 3 Connecting cable | |
| NEBU-...-M8G4 | Socket M5, 3-pin |
| | Socket M8, 3-pin |
| | Socket M8, 4-pin |
| | Socket M12, 5-pin |
| | Open cable end |

| Plug connector/connecting cable | | |
|---------------------------------|-----------------|-----------------------|
| Connection technology | Type | Connection technology |
| 4 Plug connector | | |
| Plug M8, 3-pin | SEA-GS-M8 | Solder lug |
| Plug M8, 3-pin | SEA-3GS-M8-S | Screw terminal |
| 5 Connecting cable | | |
| Plug M8, 3-pin | KM8-M8-GSGD-... | Socket M8, 3-pin |
| Plug M8, 3-pin | NEBU-...-M8G3 | Socket M5, 3-pin |
| | | Socket M8, 3-pin |
| | | Socket M8, 4-pin |
| | | Socket M12, 5-pin |
| | | Open cable end |


CPI installation system

Selection aid

FESTO

Accessory selection aid

Connection for inputs M12, 4-pin

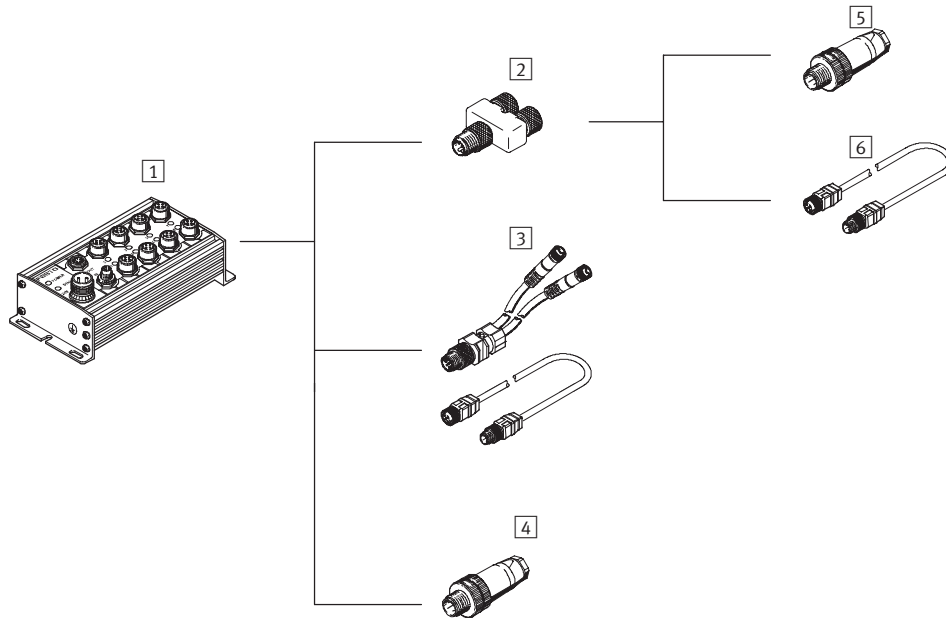

Note

Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on customer request:

- application tailored
- perfectly fitting
- installation saving

| 1 | Input modules |
|---------------|---------------|
| Type | |
| CP-E16N-M12x2 | |

| 2 | | Plug connector/connecting cable |
|-----------------------|-----------------------|---------------------------------|
| Type | Connection technology | |
| 2 | | T-adaptor |
| NEDU-M12D5-M12T 4M | 2x socket M12, 4-pin | |
| 3 | | Connecting cable |
| KM12-DUO-M8-... | 2x socket M8, 3-pin | |
| KM12-M12-... | Socket M12, 4-pin | |
| 4 | | Plug connector |
| SEA-GS-7 | Screw terminal | |
| SEA-4GS-7-2,5 | Screw terminal | |
| SEA-GS-11-DUO | Screw terminal | |


| 5 | | | Plug connector/connecting cable |
|-----------------------|---------------|-----------------------|---------------------------------|
| Connection technology | Type | Connection technology | |
| 5 | | | Plug connector |
| Plug M12, 4-pin | SEA-GS-7 | Screw terminal | |
| Plug M12, 4-pin | SEA-4GS-7-2,5 | Screw terminal | |
| 6 | | | Connecting cable |
| Plug M12, 4-pin | KM12-M12-... | Socket M12, 4-pin | |

CPI installation system

Selection aid

Accessory selection aid


Connection for inputs M12, 5-pin

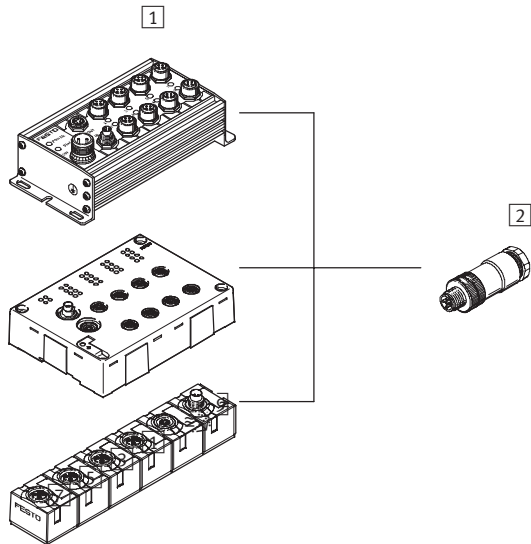

| 1 Input modules |
|-------------------|
| Type |
| CP-E16-M12x2-5POL |
| CP-E16N-M12-EL |
| CP-E08-M12-CL |

| 2 Plug connector | | |
|------------------|-----------------------|--|
| Type | Connection technology | |
| SEA-M12-5GS-PG7 | Screw terminal | |
| SEA-5GS-11-DUO | Screw terminal | |

Connection for inputs, tension-spring socket

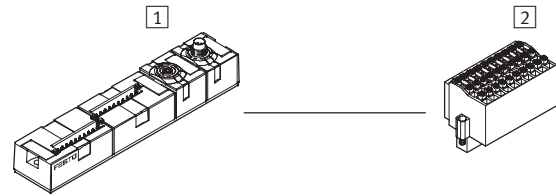

| 1 Input modules |
|-----------------|
| Type |
| CP-E16-KL-CL |

| 2 Plug connector | | |
|----------------------|--------------------------------|--|
| Type | Connection technology | |
| PS1-SAC31-30POL+L ED | Screw-in tension-spring socket | |


CPI installation system

Selection aid


FESTO

Accessory selection aid

Connection for outputs M12, 4-pin

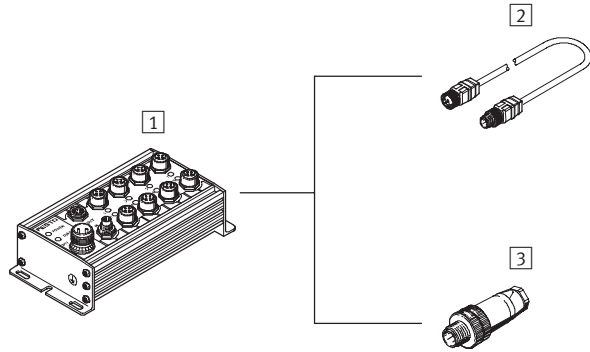

Connection for outputs M12, 5-pin

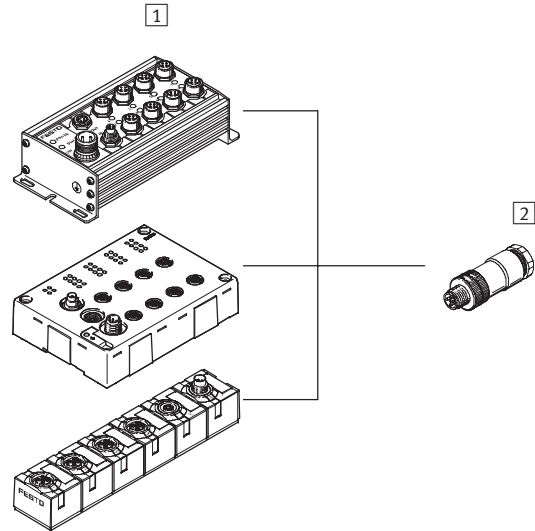

| 1 Output modules |
|------------------|
| Type |
| CP-A08N-M12 |

| Plug connector/connecting cable | |
|---------------------------------|-----------------------|
| Type | Connection technology |
| 2 Connecting cable | |
| KM12-M12-... | Socket M12, 4-pin |
| 3 Plug connector | |
| SEA-GS-7 | Screw terminal |
| SEA-4GS-7-2,5 | Screw terminal |

| 1 Output modules |
|------------------|
| Type |
| CP-A08-M12-5POL |
| CP-A08-M12-EL-Z |
| CP-A04-M12-CL |

| 2 Plug connector | |
|------------------|-----------------------|
| Type | Connection technology |
| SEA-M12-5GS-PG7 | Screw terminal |
| SEA-5GS-11-DUO | Screw terminal |

CPI installation system

Technical data – Fieldbus node CP-FB05-E

FESTO

FESTO

MOELLER 

ABB

This fieldbus node handles communication between the decentralised CP system and a higher-order master. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

The FB5 fieldbus node supports three different company-specific fieldbus protocols, based on a floating RS485 connection. The required protocol is selected by means of switch settings.

- Festo fieldbus
- ABB CS31
- Moeller SUCONET K



Application

Bus connection

The bus connection on the FB5 is established by means of a 9-pin Sub-D plug. In the case of operation on the fieldbus, the incoming control signals from the node via the fieldbus are permanently forwarded to the

connected CP modules. The CP modules ensure that the programmed output signals are present or switch the relevant valves.

Note

Alternatively the bus connection can be established via a 2x M12 adapter plug (B-coded).

Implementation

The FB5 supports the digital input and output modules and the solenoid coils. It can service a total of 64 digital

outputs, of which max. 4x 16 can include solenoid coils, and 64 digital inputs.

Note

Please observe the general guidelines on I/O addressing when assigning the outputs.

CPI installation system

Technical data – Fieldbus node CP-FB05-E

FESTO


| General technical data | | |
|---|--|---|
| Type | CP-FB05-E | |
| Baud rates | Festo fieldbus | Set using HW switch |
| | [kbps] | <ul style="list-style-type: none"> • 31.25 • 62.50 • 187.50 • 375 |
| | ABB CS31 | 187.50 |
| Addressing range | Moeller SUCONET K | Baud rate set automatically |
| | [kbps] | <ul style="list-style-type: none"> • 187.50 • 375 |
| Type of communication | Festo fieldbus | Cyclic polling |
| | ABB CS31 | 116, 016 or I/O16 |
| | Moeller SUCONET K | Up to 32 I/O: SIS-K-06/07 Up to 64 I/O: SIS-K-10/10 |
| Max. no. of solenoid coils | | 64 |
| Max. no. of outputs incl. solenoid coils | | 64 |
| Max. no. of inputs | | 64 |
| LED diagnostic indicators | Power | Power supply indicator for internal electronics |
| | Power V | Power supply indicator for valves |
| | 0...3 | CP string LED |
| | Bus | Bus error status |
| Device-specific diagnostics transmitted to the controller | | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply |
| Operating voltage | Nominal value | [V DC] 24 polarity-safe |
| | Permissible range | [V DC] 20.4 ... 26.4 |
| | Power failure buffering | [ms] 20 |
| Current consumption pin 1 | Fieldbus node | [mA] 250 |
| | CP modules | [mA] 560 (internal electronics) + total current consumption of inputs |
| Current limiting | Electronics of fieldbus node and CP connection | [A] Max. 1.25, short circuit proof |
| Load voltage pin 2 | Solenoid valves | Total of all valves switched simultaneously, see technical data on CP valves ➔ Internet: type 10 and Internet: type 12 Compact Performance valve terminals CPV and CPA |
| Current limiting | Supply for solenoid valves | [A] Max. 2.5, fused |
| Approval | | CE |
| Protection class to EN 60529 | | IP65 |
| Temperature range | Operation | [°C] -5 ... +50 |
| | Storage | [°C] -20 ... +70 |
| Materials | Housing | Die-cast aluminium |
| Dimensions (LxWxD) | | [mm] 196.4 x 88 x 61.5 |
| Weight | | [g] 925 |

CPI installation system

Technical data – Fieldbus node CP-FB05-E

| Certifications | |
|--|---|
| This product is certified for operation in the EX range as per EU-ATEX guideline | |
| ATEX category gas | II 3G |
| Ex-ignition protection type gas | Ex na II T5 X |
| ATEX category dust | II 3D |
| EX-ignition protection type dust | Ex tD A22 IP65 T80° C X |
| ATEX ambient temperature | [°C] $-5 \leq T_a \leq +50$ |
| Certification | c UL us recognized (OL) |
| CE mark (see declaration of conformity) | In accordance with EU explosion protection directive (ATEX) |

Connection and display components

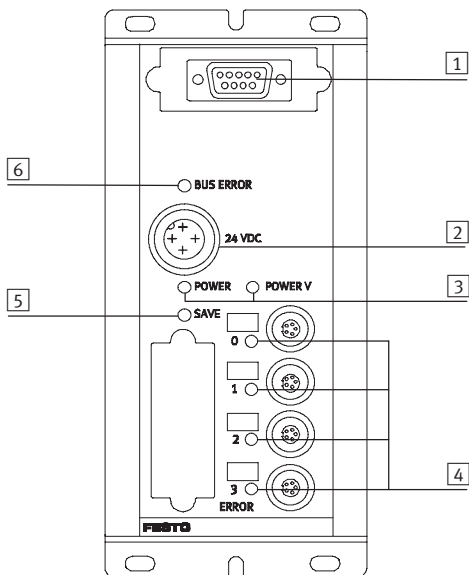












- 1 Plug for fieldbus cable
- 2 Operating voltage connection for CP and valves
- 3 Operating voltage LEDs
- 4 String LEDs
- 5 Save key
- 6 Bus-specific LED

| Pin allocation for fieldbus interface (plug view) | | | | | | | | |
|---|---------|-----------|-------------------------|--|----------|-------------------------------------|-------------------------------------|-----------------------------|
| Plug view | Pin | Signal | Festo Sub-D plug (IP65) | Manufacturer-specific signal designation | | | Designation | |
| | | | | Festo fieldbus interface | ABB CS31 | Moeller SUCONET K | | |
| | | | | | | Sub-D, 9-pin | DIN (round), 5-pin | |
| | 1 | n.c. | | | | | | Not connected |
| | 2 | n.c. | | | | | | Not connected |
| | 3 | RxD/TxD-P | B | S+ | Bus1 | 3 (T _A /R _A) | 4 (T _A /R _A) | Received/transmitted data P |
| | 4 | CNTR-P | | | | | | Repeater control signal |
| | 5 | DGND | | | | | | Data reference potential |
| | 6 | VP | | | | | | Supply voltage |
| | 7 | n.c. | | | | | | Not connected |
| | 8 | RxD/TxD-N | A | S- | Bus2 | 7 (T _B /R _B) | 1 (T _B /R _B) | Received/transmitted data N |
| | 9 | n.c. | | | | | | Not connected |
| | Housing | | | Cable clip | Screen | Screen | 4 (screen) | Housing |

CPI installation system

Accessories – Fieldbus node CP-FB05-E

FESTO

| Ordering data | | | | |
|---|---|-------------------------|----------------|-----------------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | Fieldbus node for Festo fieldbus, ABB CS31, Moeller SUCONET K | | 18238 | CP-FB05-E |
| Power supply | | | | |
|  | Power supply socket, straight M18x1, 4-pin | for 1.5 mm ² | 18493 | NTSD-GD-9 |
| | | for 2.5 mm ² | 18526 | NTSD-GD-13,5 |
|  | Power supply socket, angled M18x1, 4-pin | for 1.5 mm ² | 18527 | NTSD-WD-9 |
| | | for 2.5 mm ² | 533119 | NTSD-WD-11 |
| Fieldbus connection | | | | |
|  | Fieldbus socket, Sub-D connection | | 532216 | FBS-Sub-9-GS-DP-B |
|  | M12 adapter | | 533118 | FBA-2-M12-5POL-RK |
|  | Socket M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK | | 1067905 | NECU-M-B12G5-C2-PB |
|  | Plug M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK | | 1066354 | NECU-M-S-B12G5-C2-PB |
| Valve terminal connection | | | | |
|  | Connecting cable WS-WD | 0,25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0,5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable GS-GD | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| Mounting | | | | |
|  | Mounting for H-rail | | 170169 | CP-TS-HS35 |
| User documentation | | | | |
|  | User documentation – Bus node CP-FB5-E | German | 165105 | P.BE-CP-FB5-E-DE |
| | | English | 165205 | P.BE-CP-FB5-E-EN |
| | | French | 165135 | P.BE-CP-FB5-E-FR |
| | | Italian | 165165 | P.BE-CP-FB5-E-IT |

CPI installation system

Technical data – Fieldbus node CP-FB06-E


FESTO



This fieldbus node handles communication between the decentralised CP system and a higher-order master. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

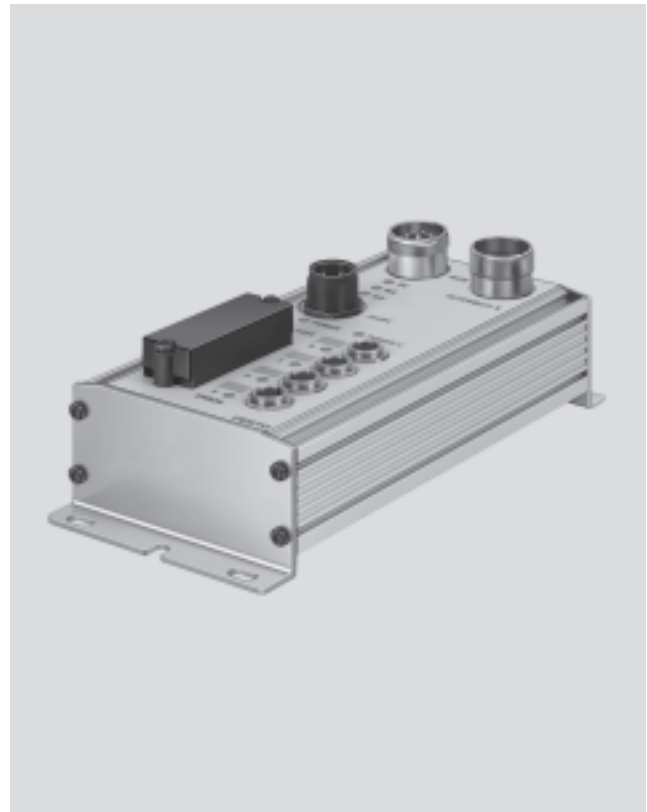

Application

Bus connection

The bus connection is established via two 9-pin M23 connections with a typical Interbus pin allocation. The plug and socket are labelled with Remote IN and Remote OUT in

accordance with the definition for the Interbus remote bus. Both bus cables are always routed to the fieldbus node and looped through in accordance with the ring structure of the Interbus.

The CP fieldbus node receives the data from the higher-order controller and forwards it to the connected CP valve terminals or electrical output modules. The signal status of the

inputs is requested from the input modules and forwarded to the CP fieldbus nodes.

Implementation

The FB6 supports the digital input and output modules and the solenoid coils. It can service a total of 64 digital

outputs, of which max. 64 can include solenoid coils, and 64 digital inputs.

Note

Please observe the general guidelines regarding addressing when assigning outputs.

CPI installation system

Technical data – Fieldbus node CP-FB06-E

FESTO


| General technical data | | | |
|--|--|---|--|
| Type | CP-FB06-E | | |
| Baud rates | [kbps] | 500 | |
| ID code | | 3 | |
| No. of process data bits | | 16, 32, 48 or 64 depending on expansion | |
| PCP channel | | No | |
| Configuration support | | Icon file for CMD software Station description file with CMD software | |
| Max. no. of solenoid coils | | 64 | |
| Max. no. of outputs incl. solenoid coils | | 64 | |
| Max. no. of inputs | | 64 | |
| LED diagnostic indicators | Power | Power supply indicator for internal electronics | |
| | Power V | Power supply indicator for valves | |
| | 0...3 | CP string LED | |
| | RC | Remotebus check | |
| | BA | Bus active | |
| | RD | Remotebus disable | |
| Device-specific diagnostics transmitted to the controller as common message (peripherals errors) | | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply | |
| Additional functions | | Test routine for checking the valves and outputs without bus communication | |
| Operating voltage | Nominal value | [V DC] | 24 polarity-safe |
| | Permissible range | [V DC] | 20.4 ... 26.4 |
| | Power failure buffering | [ms] | 20 |
| Current consumption pin 1 | Fieldbus node | [mA] | 250 |
| | CP modules | [mA] | 560 (internal electronics) + total current consumption of inputs |
| Current limiting | Electronics of fieldbus node and CP connection | [A] | Max. 1.25, short circuit proof |
| Load voltage pin 2 | Solenoid valves | | Total of all valves switched simultaneously, see technical data on CP valves → Internet: type 10 and Internet: type 12 (Compact Performance valve terminals CPV and CPA) |
| Current limiting | Supply for solenoid valves | [A] | Max. 2.5, fused |
| Protection class to EN 60529 | | | IP65 |
| Temperature range | Operation | [°C] | -5 ... +50 |
| | Storage | [°C] | -20 ... +70 |
| Materials | Housing | | Die-cast aluminium |
| Dimensions (LxWxD) | | [mm] | 196.4 x 88 x 61.5 |
| Weight | | [g] | 915 |

| Certifications | | | |
|--|--|------|---|
| This product is certified for operation in the EX range as per EU-ATEX guideline | | | |
| ATEX category gas | | | II 3G |
| Ex-ignition protection type gas | | | Ex na II T5 X |
| ATEX category dust | | | II 3D |
| EX-ignition protection type dust | | | Ex tD A22 IP65 T80° C X |
| ATEX ambient temperature | | [°C] | -5 ≤ Ta ≤ +50 |
| Certification | | | c UL us recognized (OL) |
| CE mark (see declaration of conformity) | | | In accordance with EU explosion protection directive (ATEX) |

CPI installation system

Technical data – Fieldbus node CP-FB06-E

Connection and display components

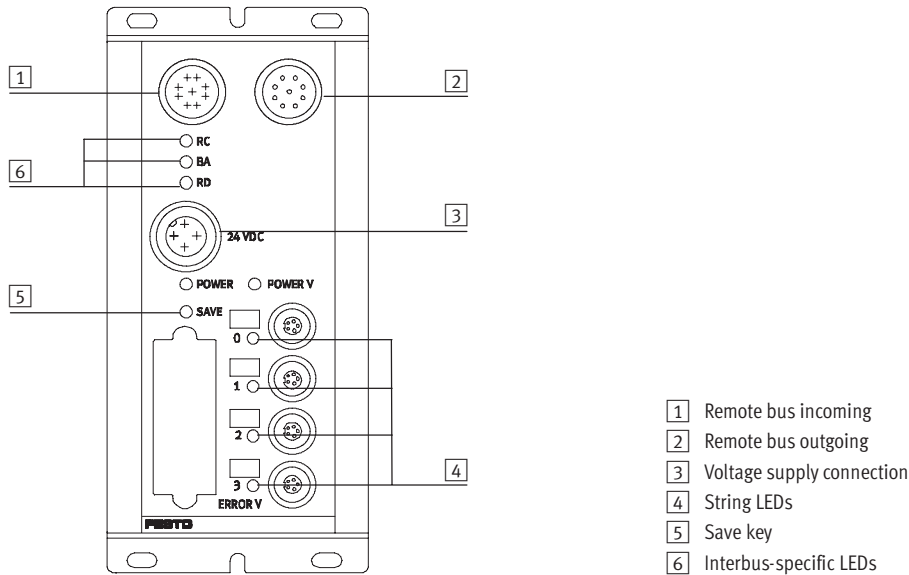

- 1 Remote bus incoming
- 2 Remote bus outgoing
- 3 Voltage supply connection
- 4 String LEDs
- 5 Save key
- 6 Interbus-specific LEDs








| Pin allocation for the INTERBUS interface, non-floating installation remote bus | | | |
|---|-----------------------|-----------|---|
| Pin allocation | Pin No. ¹⁾ | Signal | Designation |
| Incoming | | | |
| Plug view | 1 | DO | Data out |
| | 2 | /DO | Data out inverse |
| | 3 | DI | Data in |
| | 4 | /DI | Data in inverse |
| | 5 | Load | Reference conductor |
| | 6 | FE | Functional earthing for installation remote bus |
| | 7 | +24 V | Installation remote bus supply |
| | 8 | +0 V | Installation remote bus supply |
| | Sleeve | Screen | Screening |
| Outgoing | | | |
| Socket view | 1 | DO | Data out |
| | 2 | /DO | Data out inverse |
| | 3 | DI | Data in |
| | 4 | /DI | Data in inverse |
| | 5 | Load | Reference conductor |
| | 6 | FE | Functional earthing for installation remote bus |
| | 7 | +24 V | Installation remote bus supply |
| | 8 | +0 V | Installation remote bus supply |
| | 9 | RBST | Establish bridge to pin 5 |
| Sleeve | Screen | Screening | |

1) Pins not listed here must not be connected.

CPI installation system

Accessories – Fieldbus node CP-FB06-E

FESTO

| Ordering data | | | |
|---|--|-------------------------|----------------------------|
| Designation | | Part No. | Type |
| Fieldbus node | | | |
|  | Fieldbus node INTERBUS | 18225 | CP-FB06-E |
| Power supply | | | |
|  | Power supply socket, straight M18x1, 4-pin | for 1.5 mm ² | 18493 NTSD-GD-9 |
| | | for 2.5 mm ² | 18526 NTSD-GD-13,5 |
|  | Power supply socket, angled M18x1, 4-pin | for 1.5 mm ² | 18527 NTSD-WD-9 |
| | | for 2.5 mm ² | 533119 NTSD-WD-11 |
| Valve terminal connection | | | |
|  | Connecting cable WS-WD | 0,25 m | 540327 KVI-CP-3-WS-WD-0,25 |
| | | 0,5 m | 540328 KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 KVI-CP-3-WS-WD-8 |
|  | Connecting cable GS-GD | 2 m | 540332 KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 KVI-CP-3-GS-GD-8 |
| Mounting | | | |
|  | Mounting for H-rail | 170169 | CP-TS-HS35 |
| User documentation | | | |
|  | User documentation – Bus node CP-FB06-E | German | 165106 P.BE-CP-FB6-E-DE |
| | | English | 165206 P.BE-CP-FB6-E-EN |
| | | French | 165136 P.BE-CP-FB6-E-FR |
| | | Italian | 165166 P.BE-CP-FB6-E-IT |
| | | Spanish | 165236 P.BE-CP-FB6-E-ES |
| | | Swedish | 165266 P.BE-CP-FB6-E-SV |

CPI installation system

Technical data – Fieldbus node CP-FB11-E

FESTO



This fieldbus node handles communication between the decentralised CP system and a higher-order master. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

The FB11 fieldbus node supports the CAN-based fieldbus protocol DeviceNet.

- DeviceNet



Application

Bus connection

The DeviceNet connection is established via a 5-pin M12 plug with pins that corresponds to the specific mini connector. A DeviceNet installation with a higher degree of

protection is typically installed using main and branch lines that are connected via T-pieces. Various manufacturers such as Turck, Lumberg and Rockwell offer finished

cables and terminating resistors. The terminating resistors are attached to the two outermost T-pieces. This installation technique keeps the

bus closed while a bus station is being removed. Provides detailed diagnostic information about status bits for the master controller.

Implementation

The FB11 supports the digital input and output modules. It can service a total of 64 digital

inputs and 64 digital outputs, of which max. 64 can include solenoid coils.

Note

Please observe the general guidelines on I/O addressing when assigning the outputs.

CPI installation system

Technical data – Fieldbus node CP-FB11-E

FESTO


| General technical data | | | |
|---|--|---|--|
| Type | CP-FB11-E | | |
| Baud rates | [kbps] | Set using HW switch | |
| | | <ul style="list-style-type: none"> • 125 • 250 • 500 | |
| Addressing range | | Set using 2 rotary switches 0 ... 63 | |
| Product type | | Communication converter (12 dec.) | |
| Product code | | 2282 hex./35050 dec. | |
| Type of communication | | Polling/Cos/Bit Strobe | |
| Configuration support | | EDS file and graphics symbol | |
| Max. no. of solenoid coils | | 64 | |
| Max. no. of outputs and solenoid coils | | 64 | |
| Max. no. of inputs | | 64 | |
| LED diagnostic indicators | Bus/Power | Operating voltage of bus | |
| | Module status | Operating status | |
| | I/O Error | Internal error | |
| Device-specific diagnosis via DeviceNet | | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply • Interrupt point on CP string | |
| Operating voltage | Nominal value | [V DC] | 24 polarity-safe |
| | Permissible range | [V DC] | 20.4 ... 26.4 |
| | Power failure buffering | [ms] | 20 |
| Current consumption pin 1 | Fieldbus node | [mA] | 250 |
| | CP module | [mA] | 560 (internal electronics) + total current consumption of inputs, internal |
| Current limiting | Electronics of fieldbus node and CP connection | [A] | Max. 1.25, short circuit proof |
| Current consumption pin 2 | Solenoid valves | | Total of all valves switched simultaneously, see technical data on CP valves → Internet: type 10 and Internet: type 12 (Compact Performance valve terminals CPV and CPA) |
| Protection class to EN 60529 | | | IP65 |
| Temperature range | Operation | [°C] | -5 ... +50 |
| | Storage/transport | [°C] | -20 ... +70 |
| Materials | Housing | | Die-cast aluminium |
| Dimensions (HxWxD) | | [mm] | 196.4 x 88 x 61.5 |
| Grid dimension | | [mm] | 72 |
| Weight | | [g] | 950 |

CPI installation system

Technical data – Fieldbus node CP-FB11-E

| Certifications | |
|--|---|
| This product is certified for operation in the EX range as per EU-ATEX guideline | |
| ATEX category gas | II 3G |
| Ex-ignition protection type gas | Ex na II T5 X |
| ATEX category dust | II 3D |
| EX-ignition protection type dust | Ex tD A22 IP65 T80° C X |
| ATEX ambient temperature | [°C] $-5 \leq T_a \leq +50$ |
| Certification | c UL us recognized (OL) |
| CE mark (see declaration of conformity) | In accordance with EU explosion protection directive (ATEX) |

Connection and display components

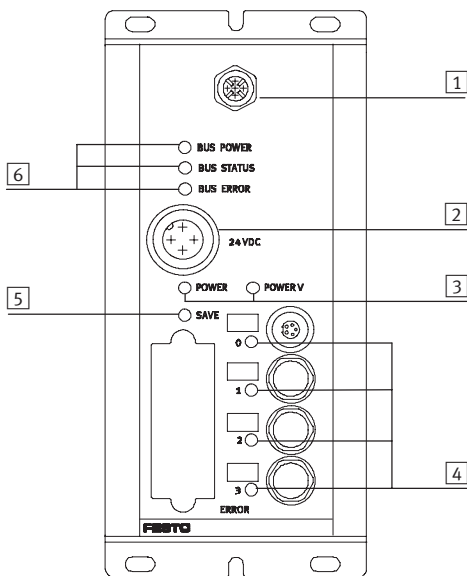









- 1 Plug for fieldbus cable
- 2 Operating voltage connection for CP and valves
- 3 Operating voltage LEDs
- 4 String LEDs
- 5 Save key
- 6 Bus status LEDs

| Pin allocation for fieldbus interface | | |
|---------------------------------------|---|-----------|
| Pin allocation | Pin No. | Signal |
| | 1 | Screen |
| | 2 | +24 V bus |
| | 3 | GND Bus |
| | 4 | Data+ |
| | 5 | Data- |
| 2 | Housing of the fieldbus connection module PE | |
| 3 | Internal screening connection in the valve terminal | |

CPI installation system

FESTO

Accessories – Fieldbus node CP-FB11-E

| Ordering data | | | |
|---|--|-------------------------|----------------------------|
| Designation | | Part No. | Type |
| Fieldbus node | | | |
|  | Fieldbus node DeviceNet | 18227 | CP-FB11-E |
| Power supply | | | |
|  | Power supply socket, straight M18x1, 4-pin | for 1.5 mm ² | 18493 NTSD-GD-9 |
| | | for 2.5 mm ² | 18526 NTSD-GD-13,5 |
|  | Power supply socket, angled M18x1, 4-pin | for 1.5 mm ² | 18527 NTSD-WD-9 |
| | | for 2.5 mm ² | 533119 NTSD-WD-11 |
| Fieldbus connection | | | |
|  | Bus connection, straight, PG9, 5-pin | 18324 | FBSD-GD-9-5POL |
| Valve terminal connection | | | |
|  | Connecting cable WS-WD | 0,25 m | 540327 KVI-CP-3-WS-WD-0,25 |
| | | 0,5 m | 540328 KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 KVI-CP-3-WS-WD-8 |
|  | Connecting cable GS-GD | 2 m | 540332 KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 KVI-CP-3-GS-GD-8 |
| Mounting | | | |
|  | Mounting, for H-rail | 170169 | CP-TS-HS35 |
| User documentation | | | |
|  | User documentation – Bus node CP-FB11-E | German | 165111 P.BE-CP-FB11-E-DE |
| | | English | 165211 P.BE-CP-FB11-E-EN |
| | | French | 165141 P.BE-CP-FB11-E-FR |
| | | Italian | 165171 P.BE-CP-FB11-E-IT |
| | | Spanish | 165241 P.BE-CP-FB11-E-ES |
| | | Swedish | 165271 P.BE-CP-FB11-E-SV |

CPI installation system

Technical data – Fieldbus node CP-FB13-E

FESTO



This fieldbus node handles communication between the decentralised CP system and a higher-order master via Profibus DP. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

The status of the voltage supplies and the bus communication is indicated via the LEDs Power, Power Valves, String Error and Bus Error.

- Profibus-DP



Application

Bus connection

The bus connection is established via a 9-pin Sub-D socket with a typical Profibus allocation (to EN 50 170). The bus connector plug (with protection class IP65 from Festo or IP20 from other manufacturers)

facilitates the connection of an incoming and an outgoing bus cable. An active bus terminal can be connected using the integrated DIL switch. The Sub-D interface is

designed for the control of network components via a fibre optic cable connection and provides detailed diagnostic information for master detection.

Note

Alternatively the bus connection can be established via a 2x M12 adapter plug (B-coded).

Implementation

The FB13 supports digital input and output modules and solenoid coils. 64 digital outputs in total, of which max. 64 solenoid coils. Max. 64 digital inputs for recording sensor signals.

Note

When assigning the electrical modules, please observe the configuration guidelines for valve terminals in relation to address allocation and the number of occupied module positions.

CPI installation system

Technical data – Fieldbus node CP-FB13-E

FESTO


| General technical data | | | |
|---|--|---------|--|
| Type | CP-FB13-E | | |
| Baud rates | | | Automatic detection 0.0096 ... 12 |
| | | [MBaud] | |
| Addressing range | | | Set using 2 DIL switches 1 ... 125 |
| Product family | | | 4: Valves |
| Ident. number | | | 0xFB13 |
| Type of communication | | | Cyclic communication |
| Configuration support | | | GSD file and bitmaps |
| Max. no. of solenoid coils | | | 64 |
| Max. no. of outputs and solenoid coils | | | 64 |
| Max. no. of inputs | | | 64 |
| LED diagnostic indicators | Power | | Operating voltage of electronics |
| | Power V | | Operating voltage of valves and outputs |
| | Bus Error | | Communication error |
| | 0...3 | | CP string |
| Device-specific diagnostics via Profibus-DP | | | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply • Interrupt points on CP string |
| Additional functions | | | <ul style="list-style-type: none"> • Test routine for checking the valves and outputs without bus communication |
| Operating voltage | Nominal value | [V DC] | 24 polarity-safe |
| | Permissible range | [V DC] | 20.4 ... 26.4 |
| | Power failure buffering | [ms] | 20 |
| Current consumption pin 1 | Fieldbus node | [mA] | 250 |
| | CP module | [mA] | 560 (internal electronics) + total current consumption of inputs, internal |
| Current limiting | Electronics of fieldbus node and CP connection | [A] | Max. 1.25, short circuit proof |
| Current consumption pin 2 | Solenoid valves | | Total of all valves switched simultaneously, see technical data on CP valves → Internet: type 10 and Internet: type 12 (Compact Performance valve terminals CPV and CPA) |
| Current limiting | Supply for solenoid valves | [A] | Max. 2.5, fused |
| Protection class to EN 60529 | | | IP65 |
| Temperature range | Operation | [°C] | -5 ... +50 |
| | Storage/transport | [°C] | -20 ... +70 |
| Materials | Housing | | Die-cast aluminium |
| Dimensions (LxWxD) | | [mm] | 196.4 x 88 x 61.5 |
| Grid dimension | | [mm] | 72 |
| Weight | | [g] | 925 |

| Certifications | |
|--|---|
| This product is certified for operation in the EX range as per EU-ATEX guideline | |
| ATEX category gas | II 3G |
| Ex-ignition protection type gas | Ex na II T5 X |
| ATEX category dust | II 3D |
| EX-ignition protection type dust | Ex tD A22 IP65 T80° C X |
| ATEX ambient temperature | [°C] -5 ≤ Ta ≤ +50 |
| Certification | c UL us recognized (OL) |
| CE mark (see declaration of conformity) | In accordance with EU explosion protection directive (ATEX) |

CPI installation system

Technical data – Fieldbus node CP-FB13-E

Connection and display components

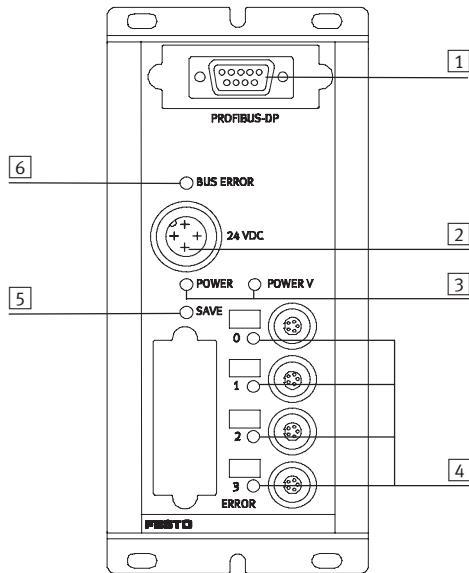

- 1 Plug for fieldbus cable
- 2 Operating voltage connection for CP and valves
- 3 Operating voltage LEDs
- 4 String LEDs
- 5 Save key
- 6 Bus-specific LED

Pin allocation for Profibus DP interface












| Pin allocation | Pin | Signal | Designation |
|--|-----------|----------------------|--------------------------------|
| Plug, Sub-D | | | |
| | 1 | n.c. | Not connected |
| | 2 | n.c. | Not connected |
| | 3 | RxD/TxD-P | Received/transmitted data P |
| | 4 | CNTR-P ¹⁾ | Repeater control signal |
| | 5 | DGND | Data reference potential (M5V) |
| | 6 | VP | Supply voltage (P5V) |
| | 7 | n.c. | Not connected |
| | 8 | RxD/TxD-N | Received/transmitted data N |
| | 9 | n.c. | Not connected |
| | Housing | Screen | Connection to housing |
| Bus connection M12 adapter plug (B-coded) | | | |
| Incoming | | | |
| | 1 | n.c. | Not connected |
| | 2 | RxD/TxD-N | Received/transmitted data N |
| | 3 | n.c. | Not connected |
| | 4 | RxD/TxD-P | Received/transmitted data P |
| | 5 and M12 | Screen | Connection to functional earth |
| Outgoing | | | |
| | 1 | VP | Supply voltage (P5V) |
| | 2 | RxD/TxD-N | Received/transmitted data N |
| | 3 | DGND | Data reference potential (M5V) |
| | 4 | RxD/TxD-P | Received/transmitted data P |
| | 5 and M12 | Screen | Connection to functional earth |

1) The repeater control signal CNTR-P is realised as a TTL signal.

CPI installation system

Accessories – Fieldbus node CP-FB13-E

FESTO

| Ordering data | | | |
|---|---|-------------------------|--|
| Designation | | Part No. | Type |
| Fieldbus node | | | |
|  | Fieldbus node for PROFIBUS-DP | 174337 | CP-FB13-E |
| Power supply | | | |
|  | Power supply socket, straight M18x1, 4-pin | for 1.5 mm ² | 18493 NTSD-GD-9 |
| | | for 2.5 mm ² | 18526 NTSD-GD-13,5 |
|  | Power supply socket, angled M18x1, 4-pin | for 1.5 mm ² | 18527 NTSD-WD-9 |
| | | for 2.5 mm ² | 533119 NTSD-WD-11 |
| Fieldbus connection | | | |
|  | Plug Sub-D, for Profibus DP | 532216 | FBS-SUB-9-GS-DP-B |
|  | Bus connection 2x M12 adapter plug (B-coded) for Profibus DP | 533118 | FBA-2-M12-5POL-RK |
|  | Socket M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK | 1067905 | NECU-M-B12G5-C2-PB |
|  | Plug M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK | 1066354 | NECU-M-S-B12G5-C2-PB |
| Valve terminal connection | | | |
|  | Connecting cable WS-WD | 0,25 m | 540327 KVI-CP-3-WS-WD-0,25 |
| | | 0,5 m | 540328 KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 KVI-CP-3-WS-WD-8 |
|  | Connecting cable GS-GD | 2 m | 540332 KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 KVI-CP-3-GS-GD-8 |
| Mounting | | | |
|  | Mounting for H-rail | 170169 | CP-TS-HS35 |
| User documentation | | | |
|  | User documentation – Bus node CP-FB13-E | German | 165113 P.BE-CP-FB13-E-DE |
| | | English | 165213 P.BE-CP-FB13-E-EN |
| | | French | 165143 P.BE-CP-FB13-E-FR |
| | | Italian | 165173 P.BE-CP-FB13-E-IT |
| | | Swedish | 165273 P.BE-CP-FB13-E-SV |
| | | Spanish | 165243 P.BE-CP-FB13-E-ES |

CPI installation system

Technical data – Input modules CP-E16


Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.).

M12 plugs with double allocation are separated using a DUO plug or DUO cable.

Application

- Input modules for 24 V DC sensor signals
- M8 and M12 plugs, single allocation connection technology with 16 connections, double allocation connection technology with 8 connections
- M12 plug, 5-pin
- The input statuses are indicated for each input signal on an assigned LED
- 24 V DC supply provided for all connected sensors
- Diagnostic LED for short circuit/undervoltage of sensor supply
- Diagnostic LED for short circuit/interruption of external sensor supply with CP-E-16-M8-Z

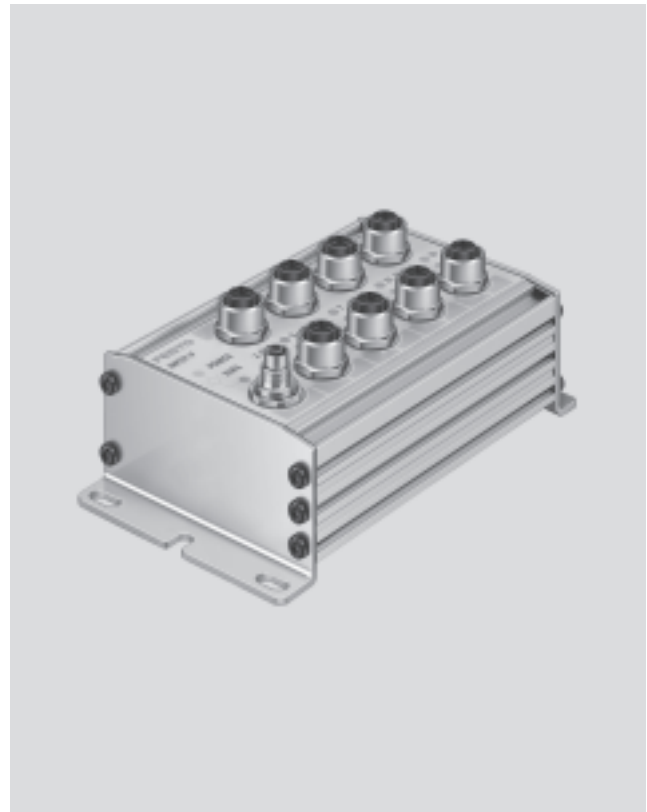

| General technical data | | | | | |
|---|-----------|--|----------------------------------|---|-------------------|
| Type | | CP-E16-M8 positive switching | CP-E16N-M8 negative switching | CP-E16-M12x2-5POL positive switching | |
| No. of inputs | | 16 | | | |
| Allocation of inputs | | Single allocation | | Double allocation | |
| Sensor connection type | | 16x M8, 3-pin | | 8x M12, 5-pin | |
| Power supply 24 V DC | | Coming from bus node | | | |
| Intrinsic current consumption of electronics | [mA] | 40 | 90 | | |
| Input current at 24 V DC (from sensor) | [mA] | Typically 8 | | Typically 6 | |
| Fuse protection for sensors and electronic module | | Internal electronic short circuit protection | | | |
| Max. current consumption of sensor supply, residual current | [A] | Max. 0.5 | | | |
| Supply voltage of sensors | [V] | 24 DC ±25% | | | |
| Protection against polarity reversal | | For logic and sensor voltage | | | |
| Galvanic isolation | | None | | | |
| Switching level | Signal 0 | [V] | ≤5 | ≥-11 | ≤6 |
| | Signal 1 | [V] | ≥11 | ≤-5 | ≥8.6 |
| Input delay | | [ms] | Typically 5 | | Typically 3 |
| Switching logic | | | PNP | NPN | PNP |
| Input characteristic curve | | To IEC 11 31-2 | | | |
| Connection to bus node | | Via pre-assembled cables | | | |
| Protection class to EN 60529 | | IP65 (when fully plugged in or fitted with protective cover) | | | |
| Temperature range | Operation | [°C] | -5 ... +50 | | |
| | Storage | [°C] | -20 ... +70 | | |
| Material | | Die-cast aluminium | | | |
| Dimensions | | [mm] | 148.9 x 66 x 47.9 | | 140.9 x 78 x 55.2 |
| Weight | | [g] | 400 | | 500 |

CPI installation system

Technical data – Input modules CP-E16

| General technical data | | | | |
|---|-----------|--|---|------------|
| Type | | CP-E16N-M12x2 negative switching | CP-E16-M8-Z positive and negative switching | |
| No. of inputs | | 16 | | |
| Allocation of inputs | | Double allocation | Single allocation | |
| Sensor connection type | | 8x M12, 4-pin | 16x M8, 3-pin | |
| Power supply 24 V DC | | Coming from bus node | Coming from bus node, connection for additional sensor supply | |
| Intrinsic current consumption of electronics | [mA] | 90 | 40 | |
| Input current at 24 V DC (from sensor) | [mA] | Typically 8 | | |
| Fuse protection for sensors and electronic module | | Internal electronic short circuit protection | Electronic short circuit protection per group | |
| Max. current consumption of sensor supply, residual current | [A] | Max. 0.5 | Max. 1 per 8-fold input group | |
| Supply voltage of sensors | [V] | 24 DC $\pm 25\%$ | | |
| Protection against polarity reversal | | For logic and sensor voltage | | |
| Galvanic isolation | | None | | |
| Switching level | | | PNP | NPN |
| | Signal 0 | [V] | ≥ 11 | ≤ 6 |
| | Signal 1 | [V] | ≤ 5 | ≥ 8.6 |
| Input delay | [ms] | Typically 5 | Typically 3 | |
| Switching logic | | NPN | PNP/NPN | |
| Input characteristic curve | | To IEC 1131-2 | | |
| Connection to bus node | | Via pre-assembled cables | | |
| Protection class to EN 60529 | | IP65 (when fully plugged in or fitted with protective cover) | | |
| Temperature range | Operation | [°C] | -5 ... +50 | |
| | Storage | [°C] | -20 ... +70 | |
| Material | | Die-cast aluminium | | |
| Material note | | Conforms to RoHS | | |
| Dimensions | [mm] | 140.9 x 78 x 55.2 | 216.9 x 66 x 50.6 | |
| Weight | [g] | 500 | 420 | |

| Certifications | |
|--|------------------------------|
| This product is certified for operation in the EX range as per EU-ATEX guideline | |
| ATEX category gas | II 3G |
| Ex-ignition protection type gas | Ex na II T5 X |
| ATEX category dust | II 3D |
| EX-ignition protection type dust | Ex tD A22 IP65 T80° C X |
| ATEX ambient temperature | [°C] -5 \leq Ta \leq +50 |
| Certification | c UL us recognized (OL) |
| CE mark ¹⁾ (see declaration of conformity) | To EU-Ex-RL (ATEX) |
| | To EU-EMV-RL |


1) Certification not valid for: CP-E16N-M8 and CP-E16N-M12

CPI installation system

Technical data – Input modules CP-E16

Connection and display components

CP-E16-M12x2-5POL and CP-E16N-M12x2

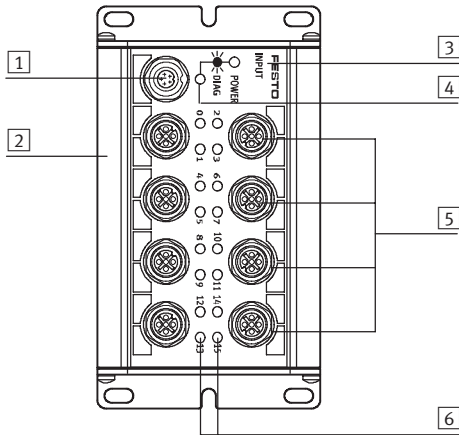

- 1 CP connection
- 2 Slot for inscription labels (ISB 6x10)
- 3 Identification of input type:
-INPUT-P for PNP inputs
-INPUT-N for NPN inputs
- 4 Status LED (green)
- 5 Sensor connections
- 6 Green LED for status display (one LED per input)

Pin allocation for sensor connections CP-E16-M12x2-5POL

| Pin allocation | Pin | Signal | Description | Pin | Signal |
|----------------|-----|--------|------------------------|-----|--------|
| | 1 | 24 V | Operating voltage 24 V | 1 | 24 V |
| | 2 | Ix+1* | Sensor signal | 2 | Ix+3* |
| | 3 | 0 V | Operating voltage 0 V | 3 | 0 V |
| | 4 | Ix* | Sensor signal | 4 | Ix+2* |
| | 5 | Ground | Earth terminal | 5 | Ground |

Pin allocation for sensor connections CP-E16...-M12x2

| Pin allocation | Pin | Signal | Description | Pin | Signal |
|----------------|-----|--------|------------------------|-----|--------|
| | 1 | 24 V | Operating voltage 24 V | 1 | 24 V |
| | 2 | Ix+1* | Sensor signal | 2 | Ix+3* |
| | 3 | 0 V | Operating voltage 0 V | 3 | 0 V |
| | 4 | Ix* | Sensor signal | 4 | Ix+2* |


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E16

Connection and display components

CP-E16-M8-Z

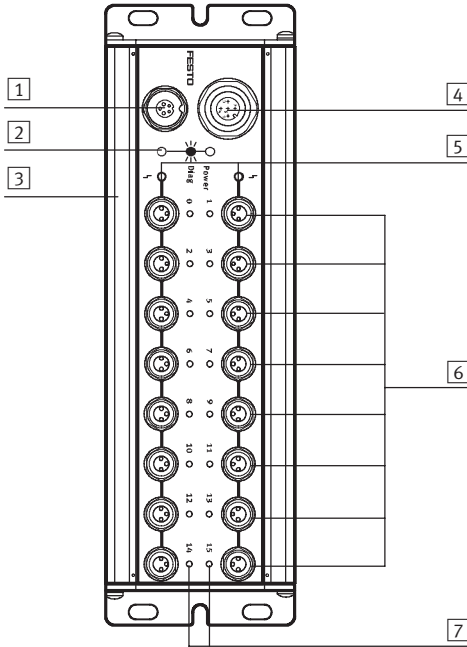

- 1 CP connection
- 2 Status LED (green)
- 3 Slot for inscription labels (ISB 6x10)
- 4 Connection for sensor supply
- 5 Red LED for short circuit display or sensor voltage failure (one LED per input group)
- 6 Sensor connections
- 7 Green LED for status display (one LED per input)

Pin allocation for external sensor supply CP-E16-M8-Z

| Pin allocation | Pin | Signal | Description | |
|----------------|-----|--------------|--|---|
| | 1 | 24 V DC ±25% | Operating voltage | Note External sensor supply for CP-E16-M8-Z: Specified for PNP or NPN operation (type CP-E16-M8-Z). The input module provides PNP or NPN inputs. The setting for PNP or NPN operation is made by installing a bridge in the socket of the sensor supply connection. |
| | 2 | PNP/NPN | Coding with negative/positive switching: – PNP operation (pin 2 and 3 bridged) – NPN operation (pin 2 and 1 bridged) | |
| | 3 | 0 V | Operating voltage 0 V | |
| | 4 | n.c. | Not connected | |
| | 5 | Ground | Earth terminal | |

Pin allocation for sensor connections CP-E16...-M8 and CP-E16-M8-Z

| Pin allocation | Pin | Signal | Description | Pin | Signal |
|----------------|-----|--------|------------------------|-----|--------|
| | 1 | 24 V | Operating voltage 24 V | 1 | 24 V |
| | 3 | 0 V | Operating voltage 0 V | 3 | 0 V |
| | 4 | Ix* | Sensor signal | 4 | Ix+1* |


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E16

Connection and display components

CP-E16-M8 and CP-E16N-M8

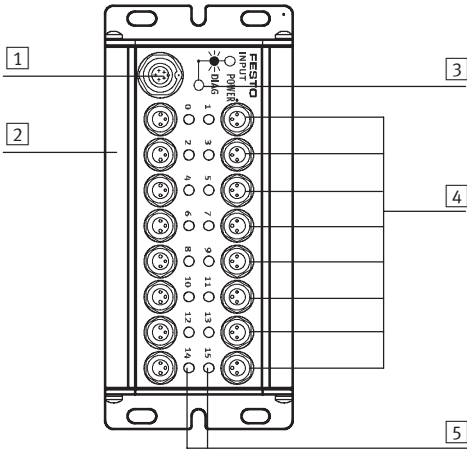

- 1 CP connection
- 2 Slot for inscription labels (ISB 6x10)
- 3 Status LED (green)
- 4 Sensor connections
- 5 Green LED for status display (one LED per input)

Pin allocation for sensor connections CP-E16...-M8 and CP-E16-M8-Z








| Pin allocation | Pin | Signal | Description | Pin | Signal |
|----------------|-----|--------|------------------------|-----|--------|
| | 1 | 24 V | Operating voltage 24 V | 1 | 24 V |
| | 3 | 0 V | Operating voltage 0 V | 3 | 0 V |
| | 4 | Ix* | Sensor signal | 4 | Ix+1* |

* Ix = Input x

CPI installation system

Accessories – Input modules CP-E16

FESTO

| Ordering data | | | | |
|---|---|---|--------------|-------------------|
| Designation | | | Part No. | Type |
| Input modules | | | | |
|  | positive switching | | 18205 | CP-E16-M8 |
| | negative switching | | 18243 | CP-E16N-M8 |
| | positive switching | | 175561 | CP-E16-M12x2-5POL |
| | negative switching | | 18244 | CP-E16N-M12x2 |
| | positive and negative switching | | 189670 | CP-E16-M8-Z |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 5-pin | | 18324 | FBSD-GD-9-5POL |
| Sensor plugs | | | | |
|  | Plug, straight socket, M12 | 5-pin, PG7 | 175487 | SEA-M12-5GS-PG7 |
| | | 4-pin, PG7 | 18666 | SEA-GS-7 |
| | | 4-pin, 2.5 mm ² O.D. | 192008 | SEA-4GS-7-2,5 |
| | Plug, straight, M8 | 3-pin, solderable | 18696 | SEA-GS-M8 |
| 3-pin, screw-in | | 192009 | SEA-3GS-M8-S | |
|  | Plug for 2 sensor cables, M12, PG11 | 4-pin | 18779 | SEA-GS-11-DUO |
| | | 5-pin | 192010 | SEA-5GS-11-DUO |
| Sensor cables | | | | |
|  | Connecting cable, M12, 4-pin, straight plug-straight socket | 2.5 m | 18684 | KM12-M12-GSGD-2,5 |
| | | 5.0 m | 18686 | KM12-M12-GSGD-5 |
| | Connecting cable, M12, 4-pin, straight plug-angled socket | 1.0 m | 185499 | KM12 M12-GSWD-1-4 |
| | | Connecting cable, M8, straight plug-straight socket | 0.5 m | 175488 |
| | | 1.0 m | 175489 | KM8-M8-GSGD-1 |
| | | 2.5 m | 165610 | KM8-M8-GSGD-2,5 |
| | | 5.0 m | 165611 | KM8-M8-GSGD-5 |
| | Mounting | | | |
|  | Mounting for H-rail | | 170169 | CP-TS-HS35 |
| User documentation | | | | |
|  | User documentation for input/output modules | German | 165125 | P.BE.-CPEA-DE |
| | | English | 165225 | P.BE.-CPEA-EN |
| | | French | 165127 | P.BE.-CPEA-FR |
| | | Italian | 165157 | P.BE.-CPEA-IT |
| | | Spanish | 165227 | P.BE.-CPEA-ES |
| | | Swedish | 165257 | P.BE.-CPEA-SV |

CPI installation system

Technical data – Input modules CP-E...-EL


Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.).

Plugs with double allocation are separated using a DUO plug or DUO cable.

Application

- Input modules for 24 V DC sensor signals
- M8 and M12 connection technology
- Display of the input statuses for each input signal via an assigned LED
- Operating voltage supply 24 V DC for all connected sensors
- Diagnostic LED for short circuit/overload of sensor supply
- Circumferential labelling with large, hinged inscription label
- Earthing plate and H-rail mounting already integrated

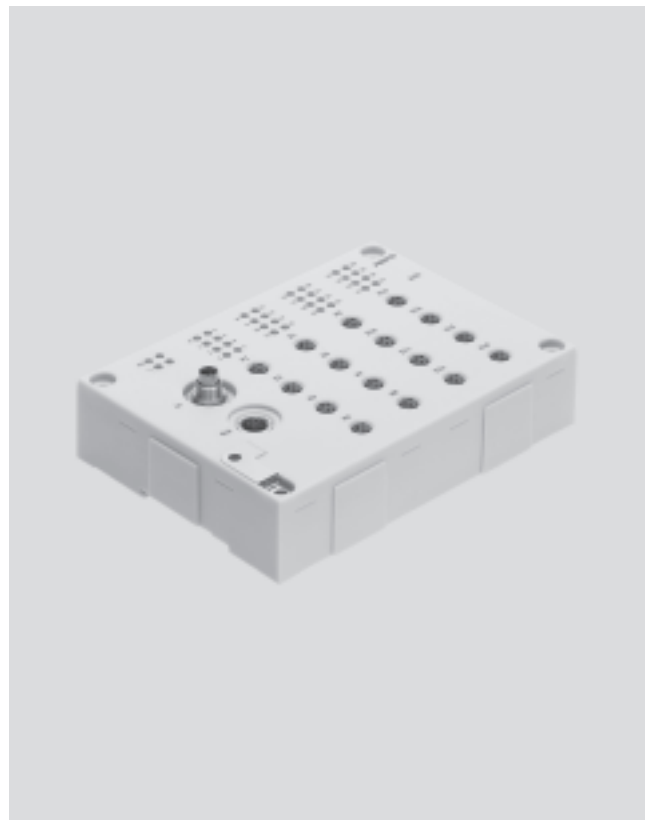

| General technical data | | | |
|---|--|------------------------------------|---|
| Type | CP-E16-M12-EL positive switching | CP-E16-M8-EL positive switching | CP-E32-M8-EL positive switching |
| No. of inputs | 16 | | 32 |
| Allocation of inputs | Double allocation | Single allocation | Double allocation |
| Sensor connection type | 8x M12, 5-pin | 16x M8, 3-pin | 16x M8, 4-pin |
| Power supply 24 V DC | Via CP connection | | |
| Intrinsic current consumption at operating voltage [mA] | Typically 75 mA | | |
| Fuse (short circuit) | Internal electronic fuse protection for each group | | Internal electronic fuse |
| Max. residual current per module [A] | 0.7 | | 1.4 |
| Nominal operating voltage for sensors | 24 | | |
| Operating voltage range for sensors [V] | 18 ... 30 DC | | |
| Galvanic isolation | None | | |
| Switching level | Signal 0 [V] | ≤ 6 | |
| | Signal 1 [V] | ≥ 8.6 | |
| Debounce time at inputs [ms] | 3 ms (0.5 ms, 10 ms, 20 ms, parameterisable) | | |
| Signal extension | 0.5 ms (15 ms, 50 ms, 100 ms, parameterisable) | | |
| Switching logic | PNP | | |
| Input characteristic curve | To IEC 11 31-2 | | |
| Connection to bus node | Via pre-assembled cables | | |
| Diagnostics | CP communication | | |
| | Short circuit/overload | | |
| | Undervoltage | | |
| LEDs | 2 Module diagnostics | | 2 Module diagnostics 32 Channel status |
| | 4 Group diagnostics | | |
| | 16 Channel status | | |

CPI installation system

Technical data – Input modules CP-E...-EL

FESTO

| General technical data | | | | |
|------------------------|------|-------------------------------------|------------------------------------|------------------------------------|
| Type | | CP-E16-M12-EL positive switching | CP-E16-M8-EL positive switching | CP-E32-M8-EL positive switching |
| Dimensions (LxWxH) | [mm] | 143 x 104 x 30 | | |
| Weight | [g] | 260 | | |

| Operating conditions | | | | |
|--|-----------|--|--------------|--------------|
| Type | | CP-E16-M12-EL | CP-E16-M8-EL | CP-E32-M8-EL |
| Protection class to EN 60529 | | IP65 (when fully plugged in or fitted with protective cover) | | |
| Ambient temperature | Operation | [°C] | –5 ... +50 | |
| | Storage | [°C] | –20 ... +70 | |
| Corrosion resistance class CRC ¹⁾ | | 1 | | |
| Certification | | cULus listed (OL) | | |
| Certification C-Tick | | C-Tick Declaration of Conformity CT 19823 | | |
| CE mark (see declaration of conformity) | | In accordance with EU EMC directive | | |


- 1) Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

CPI installation system

Technical data – Input modules CP-E...-EL

Connection and display components

CP-E16-M12-EL

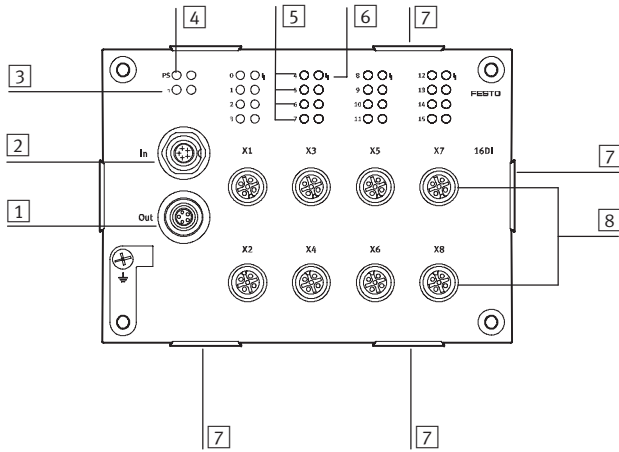

- 1 CP connection, outgoing
- 2 CP connection, incoming
- 3 Status LED (module) for short circuit/overload of sensor supply (red)
- 4 Status LED for CP communication (green)
- 5 Status LEDs for inputs (status display, green)
- 6 Status LED (group) for short circuit/overload of sensor supply (red)
- 7 Fixture for inscription label holder ASCF-H-E2
- 8 Sensor connections (2 inputs per socket)

Pin allocation for sensor connections CP-E16-M12-EL

| Pin allocation | Pin | Signal | Description |
|----------------|-----|--------|------------------------|
| | 1 | 24 V | Operating voltage 24 V |
| | 2 | Ix+1* | Sensor signal |
| | 3 | 0 V | Operating voltage 0 V |
| | 4 | Ix* | Sensor signal |
| | 5 | Ground | Earth terminal |


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E...-EL

Connection and display components

CP-E16-M8-EL

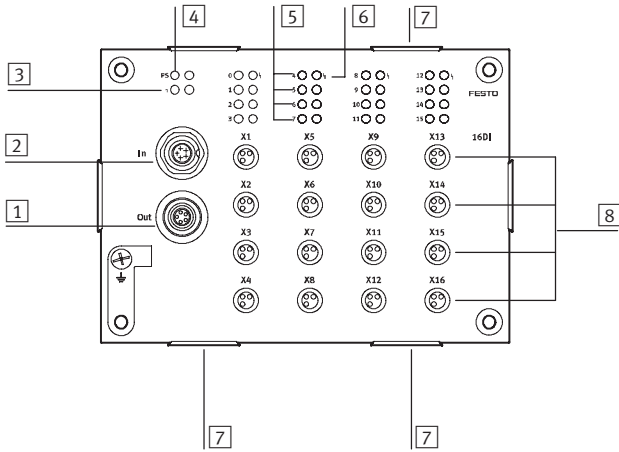

- 1 CP connection, outgoing
- 2 CP connection, incoming
- 3 Status LED (module) for short circuit/overload of sensor supply (red)
- 4 Status LED for CP communication (green)
- 5 Status LEDs for inputs (status display, green)
- 6 Status LED (group) for short circuit/overload of sensor supply (red)
- 7 Fixture for inscription label holder ASCF-H-E2
- 8 Sensor connections (1 input per socket)

Pin allocation for sensor connections CP-E16-M8-EL

| Pin allocation | Pin | Signal | Description |
|----------------|-----|--------|------------------------|
| | 1 | 24 V | Operating voltage 24 V |
| | 3 | 0 V | Operating voltage 0 V |
| | 4 | Ix* | Sensor signal |


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E...-EL

Connection and display components

CP-E32-M8-EL

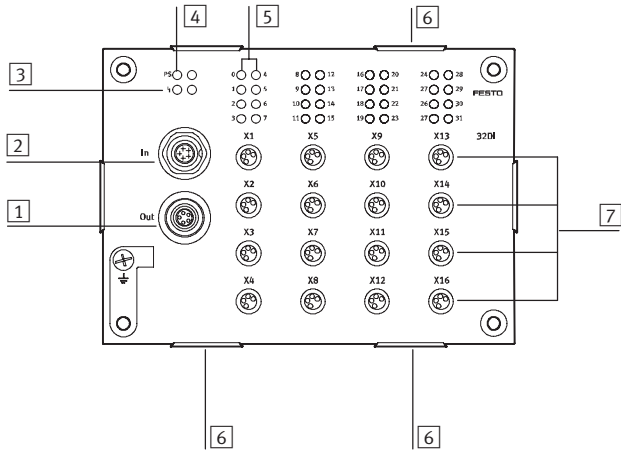

- 1 CP connection, outgoing
- 2 CP connection, incoming
- 3 Status LED (module) for short circuit/overload of sensor supply (red)
- 4 Status LED for CP communication (green)
- 5 Status LEDs for inputs (status display, green)
- 6 Fixture for inscription label holder ASCF-H-E2
- 7 Sensor connections (2 inputs per socket)

Pin allocation for sensor connections CP-E32-M8-EL










| Pin allocation | Pin | Signal | Description |
|----------------|-----|--------|------------------------|
| | 1 | 24 V | Operating voltage 24 V |
| | 2 | Ix+1* | Sensor signal |
| | 3 | 0 V | Operating voltage 0 V |
| | 4 | Ix* | Sensor signal |

* Ix = Input x

CPI installation system

Accessories – Input modules CP-E...-EL

FESTO

| Ordering data | | | | |
|---|---|--|----------|--------------------------------------|
| Designation | | | Part No. | Type |
| Input modules | | | | |
|  | positive switching | | 546923 | CP-E16-M12-EL |
| | positive switching | | 546922 | CP-E16-M8-EL |
| | positive switching | | 546921 | CP-E32-M8-EL |
| Plug connectors | | | | |
|  | Straight plug, M12 | 5-pin, PG7 | 175487 | SEA-M12-5GS-PG7 |
| | | 4-pin, PG7 | 18666 | SEA-GS-7 |
| | | 4-pin, 2.5 mm ² O.D. | 192008 | SEA-4GS-7-2,5 |
| | Straight plug, M8 | 3-pin, solderable | 18696 | SEA-GS-M8 |
| | | 3-pin, screw-in | 192009 | SEA-3GS-M8-S |
|  | Plug for 2 cables, M12, PG11 | 4-pin | 18779 | SEA-GS-11-DUO |
| | | 5-pin | 192010 | SEA-5GS-11-DUO |
|  | Push-in T-connector | 2x socket M8, 3-pin 1x plug M8, 4-pin | 544391 | NEDU-M8D3-M8T4 |
|  | Push-in T-connector | 2x socket M12, 5-pin 1x plug M12, 4-pin | 541596 | NEDU-M12D5-M12T4 |
| Connecting cables | | | | |
|  | DUO cable, 1x straight plug M12 | 2x straight socket M8 | 18685 | KM12-DUO-M8-GDGD |
| | | 1x straight socket M8 and 1x angled socket M8 | 18688 | KM12-DUO-M8-GDWD |
| | | 2x angled socket M8 | 18687 | KM12-DUO-M8-WDWD |
|  | Connecting cable, M12, 4-pin, straight plug-straight socket | 2.5 m | 539052 | NEBU-M12G4-K-2.5-M12G4 ¹⁾ |
| | | 5.0 m | 539052 | NEBU-M12G4-K-5-M12G4 ¹⁾ |
| | Connecting cable, M8, 3-pin, straight plug-straight socket | 0.5 m | 539052 | NEBU-M8G3-K-0.5-M8G3 ¹⁾ |
| | | 1 m | 539052 | NEBU-M8G3-K-1-M8G3 ¹⁾ |
| | | 2.5 m | 539052 | NEBU-M8G3-K-2.5-M8G3 ¹⁾ |
| | | 5 m | 539052 | NEBU-M8G3-K-5-M8G3 ¹⁾ |
| Inscription label holders | | | | |
|  | Inscription label holders for EL modules, bag of 10 | | 547473 | ASCF-H-E2 |
| User documentation | | | | |
|  | User documentation for input/output modules | German | 539299 | P.BE.-CPEA-CL-DE |
| | | English | 539300 | P.BE.-CPEA-CL-EN |
| | | French | 539302 | P.BE.-CPEA-CL-FR |
| | | Italian | 539303 | P.BE.-CPEA-CL-IT |
| | | Spanish | 539301 | P.BE.-CPEA-CL-ES |
| | | Swedish | 539304 | P.BE.-CPEA-CL-SV |

1) Modular product, further information → Internet: nebu

CPI installation system

Technical data – Input modules CP-E...-CL

Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.).

Plugs with double allocation are separated using a DUO plug or DUO cable.

Application

- Input modules for 24 V DC sensor signals
- M8 and M12 plug connection technology
- M12 input module, inputs with double allocation. M8 inputs with single allocation
- M12 plug, 5-pin
- The input statuses are indicated for each input signal on an assigned LED
- 24 V DC supply provided for all connected sensors
- Diagnostic LED for short circuit/undervoltage of sensor supply
- Modules support the CPI functionality (only in combination with the CPX CP interface)



| General technical data | | | |
|---|---|------------------------------------|--|
| Type | CP-E08-M12-CL positive switching | CP-E08-M8-CL positive switching | CP-E16-KL-CL positive switching |
| No. of inputs | 8 | | 16 |
| Allocation of inputs | Double allocation | Single allocation | |
| Sensor connection type | 4x M12, 5-pin | 8x M8, 3-pin | Spring-loaded terminals or screw terminals |
| Power supply 24 V DC | From the bus node, basic unit, CP interface, etc. | | |
| Intrinsic current consumption of electronics [mA] | Typically 35 (inputs not connected) | | |
| Input current at 24 V DC (from sensor) [mA] | Typically 6 | | |
| Fuse protection for sensors and electronic module | Internal electronic short circuit protection | | |
| Max. current consumption of sensor supply, residual current [A] | Max. 0.8 | | |
| Nominal operating voltage for sensors | 24 | | |
| Operating voltage range for sensors [V DC] | 18 ... 30 | | |
| Protection against polarity reversal | For logic and sensor supply | | |
| Galvanic isolation | None | | |
| Switching level | Signal 0 [V] | ≤5 | |
| | Signal 1 [V] | ≥-11 | |
| Input delay [ms] | Typically 3 | | |
| Switching logic | PNP | | |
| Input characteristic curve | To IEC 1131-2 | | |
| Connection to bus node | Via pre-assembled cables | | |
| Diagnostics | Undervoltage | | |
| | Short circuit/overload of sensor supply | | |

CPI installation system

Technical data – Input modules CP-E...-CL

FESTO

| General technical data | | | | |
|------------------------|-------------------------------------|------------------------------------|------------------------------------|-----|
| Type | CP-E08-M12-CL positive switching | CP-E08-M8-CL positive switching | CP-E16-KL-CL positive switching | |
| Material | Polybutylene terephthalate | | | |
| Material note | Conforms to RoHS | | | |
| Dimensions (WxLxH) | [mm] | 151 x 30 x 25 | | |
| Weight | [g] | 165 | 190 | 145 |

| Operating conditions | | | |
|--|---|--------------|--------------|
| Type | CP-E08-M12-CL | CP-E08-M8-CL | CP-E16-KL-CL |
| Protection class to EN 60529 | IP65/IP67 (when fully plugged in or fitted with protective cap) | | IP20 |
| Ambient temperature | Operation | [°C] | -5 ... +50 |
| | Storage | [°C] | -20 ... +70 |
| Corrosion resistance class CRC ¹⁾ | 1 | | |

¹⁾ Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

| Certifications | | | |
|---|---|---------------|--------------|
| Type | CP-E08-M12-CL | CP-E08-M8-CL | CP-E16-KL-CL |
| ATEX category gas | II 3G | | – |
| Ex-ignition protection type gas | Ex na II T5 X | | – |
| ATEX category dust | II 3D | | – |
| EX-ignition protection type dust | Ex tD A22 IP65 T80° C X | | – |
| ATEX ambient temperature | [°C] | -5 ≤ Ta ≤ +50 | |
| Certification | c UL us recognized (OL) | | |
| CE mark (see declaration of conformity) | In accordance with EU explosion protection directive (ATEX) | | |

Note


If device combinations are operated in potentially explosive areas, the lowest common zone, the temperature class as well as the ambient temperature of the individual devices determine the possible use of the complete module.

CPI installation system

Technical data – Input modules CP-E...-CL

Connection and display components

CP-E08-M12-CL

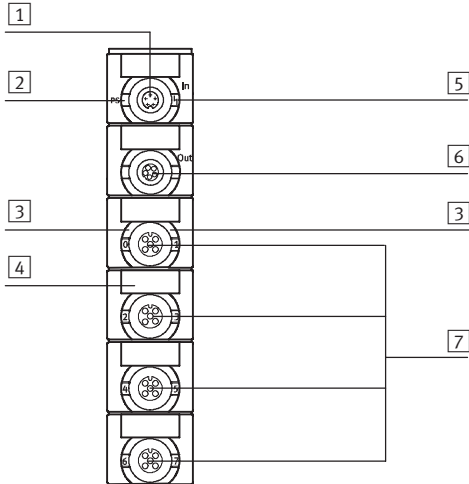

- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Green LED for status display (one LED per input)
- 4 Holder for inscription label (IBS 8x20)
- 5 Red LED for short circuit/overload indication
- 6 CP connection, outgoing
- 7 Sensor connections

Pin allocation for sensor connections CP-E08-M12-CL

| Pin allocation | Pin | Signal | Description |
|----------------|-----|--------------------|------------------------|
| | 1 | 24 V | Operating voltage 24 V |
| | 2 | I _{x+1} * | Sensor signal |
| | 3 | 0 V | Operating voltage 0 V |
| | 4 | I _x * | Sensor signal |
| | 5 | Ground | Earth terminal |


* I_x = Input x

CPI installation system

Technical data – Input modules CP-E...-CL




Connection and display components

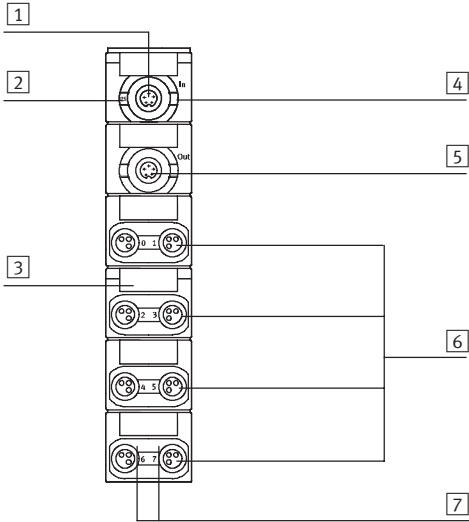
CP-E08-M8-CL



- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Holder for inscription label (IBS 8x20)
- 4 Red LED for short circuit/overload indication
- 5 CP connection, outgoing
- 6 Sensor connections
- 7 Green LED for status display (one LED per input)

Pin allocation for sensor connections CP-E08-M8-CL

| Pin allocation | Pin | Signal | Description | Pin | Signal |
|---|-----|--------|------------------------|-----|--------|
|  | 1 | 24 V | Operating voltage 24 V | 1 | 24 V |
|  | 3 | 0 V | Operating voltage 0 V | 3 | 0 V |
|  | 4 | Ix* | Sensor signal | 4 | Ix+1* |




* Ix = Input x

CPI installation system

Technical data – Input modules CP-E...-CL

Connection and display components

CP-E16-KL-CL

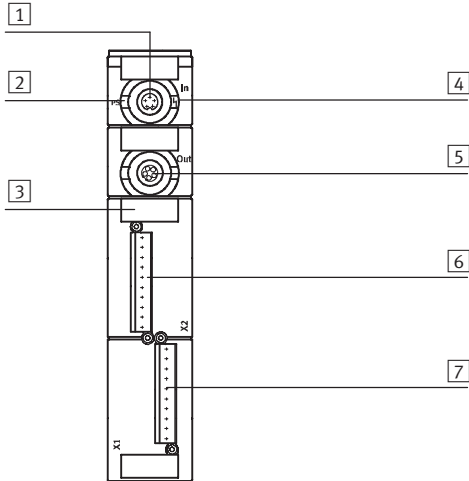

- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Holder for inscription label (IBS 8x20)
- 4 Red LED for short circuit/overload indication
- 5 CP connection, outgoing
- 6 Sensor connections, plug X2
- 7 Sensor connections, plug X1

Pin allocation for sensor supply CP-E16-KL-CL

| Pin allocation | Pin | Signal | Description | Pin | Signal | |
|----------------|---------|---------|-------------------------|---------|---------|---|
| | Plug X1 | | | Plug X2 | | Note 8 sensors can be connected to each of the connections X1 and X2. When using the three-row plug PS1-SAC30 or PS1-SAC31-30POL+LED, it is possible to use the second and third contact bank for the sensor power supply via a bridge. |
| | + | 24 V DC | Operating voltage | + | 24 V DC | |
| | 0 | I 0 | Connections for sensors | 0 | I 8 | |
| | 1 | I 1 | | 1 | I 9 | |
| | 2 | I 2 | | 2 | I 10 | |
| | 3 | I 3 | | 3 | I 11 | |
| | 4 | I 4 | | 4 | I 12 | |
| | 5 | I 5 | | 5 | I 13 | |
| | 6 | I 6 | | 6 | I 14 | |
| | 7 | I 7 | | 7 | I 15 | |
| - | 0 V DC | | - | 0 V DC | | |









Plug connection for power supply for sensors (PS1-SAC31-30POL+LED)

| | Connection row 0 | | Connection row 1 | | Connection row 2 | |
|---|------------------|-------------------------|-------------------|---------|------------------|--------|
| | - | 0 V DC | Operating voltage | - | n.c. | - |
| 7 | I x+7 | Connections for sensors | 7 | 24 V DC | 7 | 0 V DC |
| 6 | I x+6 | | 6 | | | |
| 5 | I x+5 | | 5 | | | |
| 4 | I x+4 | | 4 | | | |
| 3 | I x+3 | | 3 | | | |
| 2 | I x+2 | | 2 | | | |
| 1 | I x+1 | | 1 | | | |
| 0 | I x | | 0 | | | |
| + | 24 V DC | Operating voltage | + | Jumper | + | n.c. |

CPI installation system

Accessories – Input modules CP-E...-CL

FESTO

| Ordering data | | | | |
|---|---|---------------------------------|--------------|---------------------|
| Designation | | | Part No. | Type |
| Input modules | | | | |
|  | positive switching | | 538787 | CP-E08-M12-CL |
| | positive switching | | 538788 | CP-E08-M8-CL |
| | positive switching | | 538789 | CP-E16-KL-CL |
| Sensor plugs | | | | |
|  | Plug, straight socket, M12 | 5-pin, PG7 | 175487 | SEA-M12-5GS-PG7 |
| | | 4-pin, PG7 | 18666 | SEA-GS-7 |
| | | 4-pin, 2.5 mm ² O.D. | 192008 | SEA-4GS-7-2,5 |
| | Straight plug, M8 | 3-pin, solderable | 18696 | SEA-GS-M8 |
| 3-pin, screw-in | | 192009 | SEA-3GS-M8-S | |
|  | Plug for 2 sensor cables, M12, PG11 | 4-pin | 18779 | SEA-GS-11-DUO |
| | | 5-pin | 192010 | SEA-5GS-11-DUO |
| Connection sets for sensors | | | | |
|  | Plug, screw-in tension-spring socket with LED | 3-row, 30-pin | 197162 | PS1-SAC31-30POL+LED |
| Cables | | | | |
|  | DUO cable | 2x straight socket | 18685 | KM12-DUO-M8-GDGD |
| | | 2x straight/angled socket | 18688 | KM12-DUO-M8-GDWD |
| | | 2x angled socket | 18687 | KM12-DUO-M8-WDWD |
|  | Connecting cable, M12, 4-pin, straight plug-straight socket | 2.5 m | 18684 | KM12-M12-GSGD-2,5 |
| | | 5.0 m | 18686 | KM12-M12-GSGD-5 |
| Inscription labels | | | | |
|  | Inscription labels 8x20 mm in frames (20 pieces) | | 539388 | IBS-8x20 |
| User documentation | | | | |
|  | User documentation for input/output modules | German | 539299 | P.BE.-CPEA-CL-DE |
| | | English | 539300 | P.BE.-CPEA-CL-EN |
| | | French | 539302 | P.BE.-CPEA-CL-FR |
| | | Italian | 539303 | P.BE.-CPEA-CL-IT |
| | | Spanish | 539301 | P.BE.-CPEA-CL-ES |
| | | Swedish | 539304 | P.BE.-CPEA-CL-SV |

CPI installation system

Technical data – Output modules CP-A08

Function

The electrical outputs activate actuators such as individual valves, lamps, signal equipment and many more.

Note

Optimum actuation of valves with M12 central plug.

Application

- Output module with 8 outputs 24 V DC
- M12 connection technology, with 4- or 5-pin sockets
- LED display of the switching status per channel
- Short circuit and overload detection
- Malfunction display by means of green LED



| General technical data | | | CP-A08-M12-5POL positive switching | CP-A08N-M12 negative switching |
|--|-----------|------|--|-----------------------------------|
| Type | | | | |
| No. of outputs | | | 8 | |
| Allocation of outputs | | | Single allocation | |
| Output connection type | | | 8x M12, 5-pin | 8x M12, 4-pin |
| Load voltage connection | | | M18, 4-pin | |
| Bus connection | | | 2 plugs M9, 5-pin, via prefabricated cables | |
| Max. output current per channel | [A] | | 0.5 | |
| Operating voltage | [V DC] | | 24 ±25% | |
| Load voltage connection | [V DC] | | 24 ±25%, protected against incorrect polarity | |
| Fuse protection for power output | [A] | | Electronic fuse per output 0.5 | |
| Intrinsic current consumption, electronics | [mA] | | Max. 90 | |
| Overload/short circuit protection | | | Per channel | |
| Switching logic | | | PNP to IEC 1131-2 | NPN to IEC 1131-2 |
| Protection class to EN 60529 | | | IP65 (when fully plugged-in or fitted with protective cover) | |
| Temperature range | Operation | [°C] | -5 ... +50 | |
| | Storage | [°C] | -20 ... +70 | |
| Material | | | Die-cast aluminium | |
| Dimensions (L x W x D) | | [mm] | 172.9 x 78 x 57.1 | |
| Weight | | [g] | 500 | |

CPI installation system


Technical data – Output modules CP-A08

FESTO

| Certifications | |
|--|---|
| This product is certified for operation in the EX range as per EU-ATEX guideline | |
| ATEX category gas | II 3G |
| Ex-ignition protection type gas | Ex na II T5 X |
| ATEX category dust | II 3D |
| EX-ignition protection type dust | Ex tD A22 IP65 T80° C X |
| ATEX ambient temperature | [°C] $-5 \leq T_a \leq +50$ |
| Certification | c UL us recognized (OL) |
| CE mark (see declaration of conformity) | In accordance with EU explosion protection directive (ATEX) |

Connection and display components

CP-A08-M12...

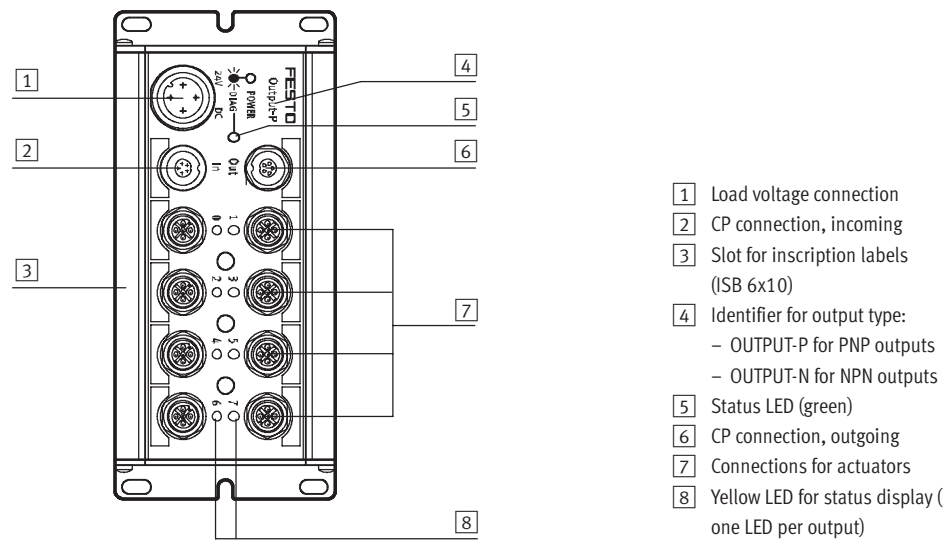

| Pin allocation for load voltage connection CP-A08-M12... | | | |
|--|-----|--------------------|-----------------------|
| Connection allocation | Pin | Signal | Designation |
| | 1 | n.c. | Not connected |
| | 2 | 24 V DC $\pm 25\%$ | Operating voltage |
| | 3 | 0 V | Operating voltage 0 V |
| | 4 | FE (earth) | Protective earth |

CPI installation system

Technical data – Output modules CP-A08










| Pin allocation for outputs | | | | | | |
|-------------------------------|-----|------------|--|-----|------------|--|
| Terminal allocation | Pin | Signal | Designation | Pin | Signal | |
| CP-A08-M12-5POL (PNP outputs) | | | | | | |
| | 1 | n.c. | Not connected | 1 | n.c. | Note Two outputs can be connected to output sockets 0, 2, 4 and 6 of the CP output module by means of internal connection between pin 2 of the even numbered output and pin 4 of the opposite odd numbered output. |
| | 2 | Ox+1 | Connected with pin 4 of plug 2/ not connected | 2 | n.c. | |
| | 3 | 0 V | Reference potential | 3 | 0 V | |
| | 4 | Ox | Output/connected with pin 2 of plug 1 | 4 | Ox+1 | |
| | 5 | Load | Earth terminal | 5 | Load | |
| CP-A08-M12 (NPN outputs) | | | | | | |
| | 1 | 24 V DC | Operating voltage | 1 | 24 V DC | Note The consuming devices/load must be supplied with a 24 V operating voltage via pin 1. |
| | 2 | FE (earth) | Earth terminal | 2 | FE (earth) | |
| | 3 | n.c. | Not connected | 3 | n.c. | |
| | 4 | Ox | Output | 4 | Ox+1 | |

* Ox = Output x

CPI installation system

Accessories – Output modules CP-A08

FESTO

| Ordering data | | | | |
|---|---|-------------------------------|----------|-------------------|
| Designation | | | Part No. | Type |
| Output modules | | | | |
|  | positive switching | | 175640 | CP-A08-M125POL |
| | negative switching | | 18234 | CP-A08N-M12 |
| Power supply | | | | |
|  | Power supply socket, straight, M18x1, 4-pin | for 1.5 mm ² | 18493 | NTSD-GD-9 |
| | | for 2.5 mm ² | 18526 | NTSD-GD-13,5 |
|  | Power supply socket, angled, M18x1, 4-pin | for 1.5 mm ² | 18527 | NTSD-WD-9 |
| | | for 2.5 mm ² | 533119 | NTSD-WD-11 |
| Sensor plugs | | | | |
|  | Plug, straight socket, M12 | 5-pin, PG7 | 175487 | SEA-M12-5GS-PG7 |
| | | 4-pin, PG7 | 18666 | SEA-GS-7 |
| | | 4-pin, 2.5 mm ² OD | 192008 | SEA-4GS-7-2,5 |
|  | Plug for 2 sensor cables, M12, PG11 | 4-pin | 18779 | SEA-GS-11-DUO |
| | | 5-pin | 192010 | SEA-5GS-11-DUO |
| Cables | | | | |
|  | DUO cable | 2x straight socket | 18685 | KM12-DUO-M8-GDGD |
| | | 2x straight/angled socket | 18688 | KM12-DUO-M8-GDWD |
| | | 2x angled socket | 18687 | KM12-DUO-M8-WDWD |
|  | Connecting cable, M12, 4-pin, straight plug-straight socket | 2.5 m | 18684 | KM12-M12-GSGD-2,5 |
| | | 5.0 m | 18686 | KM12-M12-GSGD-5 |
| Mounting | | | | |
|  | Mounting for H-rail | | 170169 | CP-TS-HS35 |
| User documentation | | | | |
|  | User documentation for input/output modules | German | 165125 | P.BE.-CPEA-DE |
| | | English | 165225 | P.BE.-CPEA-EN |
| | | French | 165127 | P.BE.-CPEA-FR |
| | | Italian | 165157 | P.BE.-CPEA-IT |
| | | Spanish | 165227 | P.BE.-CPEA-ES |
| | | Swedish | 165257 | P.BE.-CPEA-SV |

CPI installation system

Technical data – Output modules CP-A08-EL

Function

The electrical outputs actuate actuators such as individual valves, lamps, signal equipment and many more.

Note

The output module is ideal for actuation of valves with M12 central plug.

Application

- Output module with 8 outputs 24 V DC
- M12, 5-pin connection technology
- Display of the switching status per channel via LED
- Short circuit and overload detection
- Malfunction display by means of red LED
- Module supports the CPI functionality (only in combination with the CPX CP interface)
- Circumferential labelling with large, hinged inscription label
- Earthing plate and H-rail mounting already integrated



| General technical data | | |
|--|--|---|
| Type | CP-A08-M12-EL-Z positive switching | |
| No. of outputs | 8 | |
| Allocation of outputs | Socket 1, 3, 5 and 7 with double allocation, socket 2, 4, 6 and 8 with single allocation | |
| Sensor connection type | 8x M12, 5-pin | |
| Power supply 24 V DC | M12, 5-pin | |
| Intrinsic current consumption at operating voltage | [mA] | Typically 35 |
| Max. residual current per module | [A] | 4 |
| Max. output current per channel | [A] | Max. 0.5, max. 2 outputs can be connected in parallel |
| Nominal operating voltage | [V DC] | 24 |
| Operating voltage range | [V DC] | 18 ... 30 |
| Fuse (short circuit) | Internal electronic fuse protection for each channel | |
| Switching logic | PNP | |
| Output characteristic curve | To ICE 11 31-2 | |
| Galvanic isolation | None | |
| Connection to bus node | Via pre-assembled cables | |
| Diagnostics | CP communication | |
| | Short circuit/overload per channel | |
| | Undervoltage | |
| Dimensions (LxWxH) | [mm] | 143 x 104 x 30 |
| Weight | [g] | 260 |

CPI installation system

Technical data – Output modules CP-A08-EL




| Operating conditions | | | CP-A08-M12-EL-Z |
|--|-----------|--|-----------------|
| Type | | CP-A08-M12-EL-Z | |
| Protection class to EN 60529 | | IP65 (when fully plugged in or fitted with protective cover) | |
| Ambient temperature | Operation | [°C] | -5 ... +50 |
| | Storage | [°C] | -20 ... +70 |
| Corrosion resistance class CRC ¹⁾ | | 1 | |
| CE mark (see declaration of conformity) | | In accordance with EU EMC directive | |
| Certification | | cULus listed (OL) | |
| Certification C-Tick | | C-Tick Declaration of Conformity CT 19823 | |

1) Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Connection and display components

CP-A08-M12-EL-Z

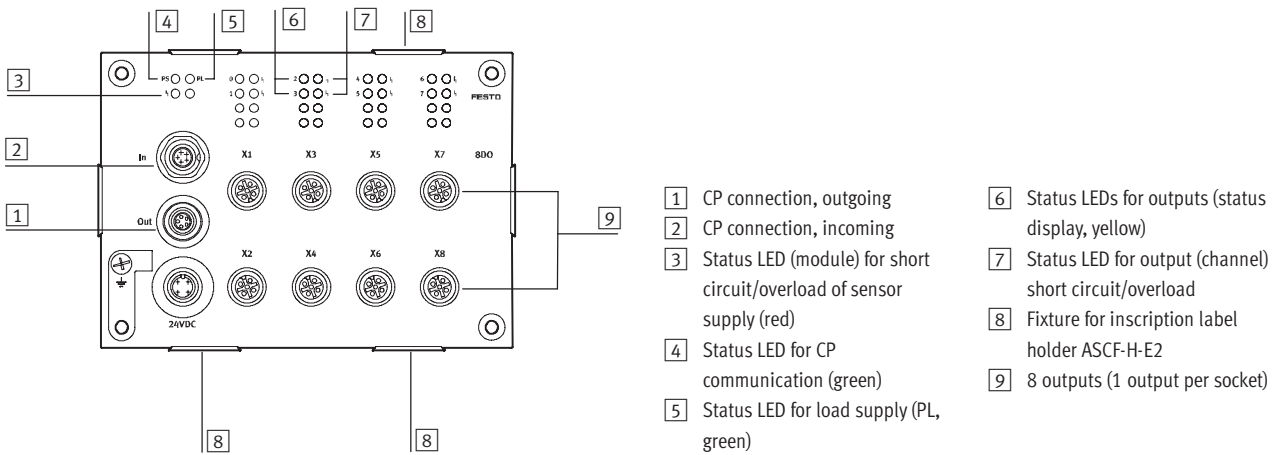

| Pin allocation for load voltage connection CP-A08-M12-EL-Z | | | |
|--|-----|--------------|-----------------------|
| Pin allocation | Pin | Signal | Description |
| | 1 | n.c. | Not connected |
| | 2 | 24 V DC ±25% | Operating voltage |
| | 3 | 0 V | Operating voltage 0 V |
| | 4 | FE | Protective earth |

CPI installation system

Technical data – Output modules CP-A08-EL

| Pin allocation for outputs | | | | |
|---|----------------------|--------|----------------------------------|--|
| Pin allocation | Output 1, 3, 5 and 7 | | Description | |
| | Pin | Signal | | |
| CP-A08-M12-EL-Z (odd number of PNP outputs) | | | | |
| | 1 | n.c. | Not connected | Note Two outputs can be connected to output sockets 1, 3, 5 and 7 of the CP output module by means of internal connection between pin 2 of the odd numbered output and pin 4 of the underlying even numbered output. |
| | 2 | Ox+1 | Connected with pin 4 of output 2 | |
| | 3 | 0 V | Reference potential | |
| | 4 | Ox | Output | |
| | 5 | FE | Earth terminal | |

* Ox = Output x








| Pin allocation for outputs | | | | |
|--|----------------------|--------|----------------------------------|--|
| Pin allocation | Output 2, 4, 6 and 8 | | Description | |
| | Pin | Signal | | |
| CP-A08-M12-EL-Z (even number of PNP outputs) | | | | |
| | 1 | n.c. | Not connected | |
| | 2 | n.c. | Not connected | |
| | 3 | 0 V | Reference potential | |
| | 4 | Ox+1 | Connected with pin 2 of output 1 | |
| | 5 | FE | Earth terminal | |

* Ox = Output x

CPI installation system

Accessories – Output modules CP-A08-EL

FESTO

| Ordering data | | | | |
|---|---|---|----------|--------------------------------------|
| Designation | | | Part No. | Type |
| Output modules | | | | |
|  | positive switching | | 546924 | CP-A08-M12-EL-Z |
| Plug connectors | | | | |
|  | Straight plug, M12 | 5-pin, PG7 | 175487 | SEA-M12-5GS-PG7 |
| | | 4-pin, PG7 | 18666 | SEA-GS-7 |
| | | 4-pin, 2.5 mm ² O.D. | 192008 | SEA-4GS-7-2,5 |
|  | Plug for 2 cables, M12, PG11 | 4-pin | 18779 | SEA-GS-11-DUO |
| | | 5-pin | 192010 | SEA-5GS-11-DUO |
| Connecting cables | | | | |
|  | DUO cable, 1x straight plug M12 | 2x straight socket M8 | 18685 | KM12-DUO-M8-GDGD |
| | | 1x straight socket M8 and 1x angled socket M8 | 18688 | KM12-DUO-M8-GDWD |
| | | 2x angled socket M8 | 18687 | KM12-DUO-M8-WDWD |
|  | Connecting cable, M12, 4-pin, straight plug-straight socket | 2.5 m | 539052 | NEBU-M12G4-K-2.5-M12G4 ¹⁾ |
| | | 5.0 m | 539052 | NEBU-M12G4-K-5-M12G4 ¹⁾ |
| Inscription label holders | | | | |
|  | Inscription label holders for EL modules, bag of 10 | | 547473 | ASCF-H-E2 |
| User documentation | | | | |
|  | User documentation for input/output modules | German | 539299 | P.BE.-CPEA-CL-DE |
| | | English | 539300 | P.BE.-CPEA-CL-EN |
| | | French | 539302 | P.BE.-CPEA-CL-FR |
| | | Italian | 539303 | P.BE.-CPEA-CL-IT |
| | | Spanish | 539301 | P.BE.-CPEA-CL-ES |
| | | Swedish | 539304 | P.BE.-CPEA-CL-SV |

1) Modular product, further information → Internet: nebu

CPI installation system

Technical data – Output modules CP-A04

Function

The electrical outputs actuate actuators such as individual valves, lamps, signal equipment and many more.

Note

Optimum actuation for valves with M12 central plug.

Application

- Output module with 4 outputs 24 V DC
- M12 connection technology, with 5-pin sockets
- LED display of the switching status per channel
- Short circuit and overload detection
- Malfunction display by means of red LED
- Module supports the CPI functionality (only in combination with the CPX CP interface)



| General technical data | | CP-A04-M12-CL positive switching |
|--|--------|--|
| Type | | CP-A04-M12-CL positive switching |
| No. of outputs | | 4 |
| Allocation of outputs | | Socket 1 and 3 with double allocation, socket 2 and 4 with single allocation |
| Sensor connection type | | 4x M12, 5-pin |
| Power supply 24 V DC | | From the bus node, basic unit, CP interface, etc. |
| Intrinsic current consumption of electronics | [mA] | Typically 35 |
| Max. output current per channel | [A] | Max. 0.5, max. 2 outputs can be connected in parallel |
| Operating voltage | [V DC] | 24 ±25% |
| Fuse protection for power output | | Internal electronic short-circuit protection per output |
| Switching logic | | PNP |
| Output characteristic curve | | To ICE 11 31-2 |
| Galvanic isolation | | None |
| Connection to bus node | | Via pre-assembled cables |
| Diagnostics | | Undervoltage Short circuit at actuator output (per channel) |
| Material | | Polybutylene terephthalate |
| Dimensions (LxWxD) | [mm] | 151 x 30 x 25 |
| Weight | [g] | 165 |

CPI installation system

Technical data – Output modules CP-A04

FESTO

| Operating conditions | | |
|--|-----------|---|
| Protection class to EN 60529 | | IP65/IP67 (when fully plugged in or fitted with protective cap) |
| Ambient temperature | Operation | [°C] –5 ... +50 |
| | Storage | [°C] –20 ... +70 |
| Corrosion resistance class CRC ¹⁾ | | 1 |

¹⁾ Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

| Certifications | |
|--|-------------------------|
| This product is certified for operation in the EX range as per EU-ATEX guideline | |
| ATEX category gas | II 3G |
| Ex-ignition protection type gas | Ex na II T5 X |
| ATEX category dust | II 3D |
| EX-ignition protection type dust | Ex tD A22 IP65 T80° C X |
| ATEX ambient temperature | [°C] –5 ≤ Ta ≤ +50 |
| Certification | c UL us recognized (OL) |

Note


If device combinations are operated in potentially explosive areas, the lowest common zone, the temperature class as well as the ambient temperature of the individual devices determine the possible use of the complete module.

CPI installation system

Technical data – Output modules CP-A04

Connection and display components

CP-A04-M12-CL

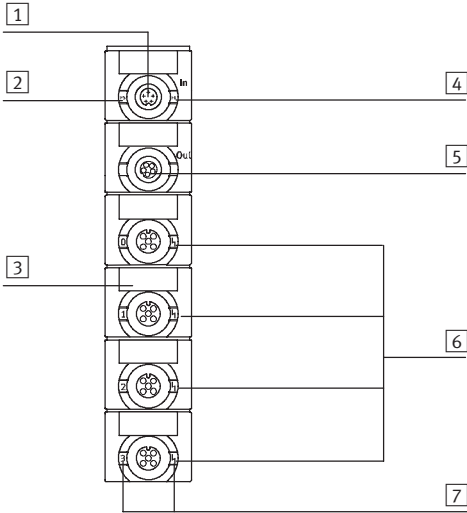

- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Holder for inscription label (IBS 8x20)
- 4 Red LED for short circuit/overload indication
- 5 CP connection, outgoing
- 6 Output
- 7 Green LED for status display (one LED per output)

Pin allocation for outputs








| Pin allocation | Output 1 and 3 | | Description | Output 2 and 4 | | |
|-------------------------------|----------------|--------|--|----------------|--------|--|
| | Pin | Signal | | Pin | Signal | |
| CP-A08-M12-5POL (PNP outputs) | | | | | | |
| | 1 | n.c. | Not connected | 1 | n.c. | Note Two outputs can be connected to output sockets 1 and 3 of the CP output module by means of internal connection between pin 2 of the odd numbered output and pin 4 of the underlying even numbered output. |
| | 2 | Ox+1 | Connected with pin 4 of plug 2/ not connected | 2 | n.c. | |
| | 3 | 0 V | Reference potential | 3 | 0 V | |
| | 4 | Ox | Output/connected with pin 2 of plug 1 | 4 | Ox+1 | |
| | 5 | FE | Earth terminal | 5 | FE | |

* Ox = Output x

CPI installation system

Accessories – Output modules CP-A04

FESTO

| Ordering data | | | | |
|---|---|---------------------------------|---------------|--------------------------|
| Designation | | | Part No. | Type |
| Output modul | | | | |
|  | Positive switching | | 538790 | CP-A04_M12_CL |
| Sensor plugs | | | | |
|  | Plug, straight socket, M12 | 5-pin, PG7 | 175487 | SEA-M12-5GS-PG7 |
| | | 4-pin, PG7 | 18666 | SEA-GS-7 |
| | | 4-pin, 2.5 mm ² O.D. | 192008 | SEA-4GS-7-2,5 |
|  | Plug for 2 sensor cables, M12, PG11 | 4-pin | 18779 | SEA-GS-11-DUO |
| | | 5-pin | 192010 | SEA-5GS-11-DUO |
| Cables | | | | |
|  | DUO cable | 2x straight socket | 18685 | KM12-DUO-M8-GDGD |
| | | 2x straight/angled socket | 18688 | KM12-DUO-M8-GDWD |
| | | 2x angled socket | 18687 | KM12-DUO-M8-WDWD |
|  | Connecting cable, M12, 4-pin, straight plug-straight socket | 2.5 m | 18684 | KM12-M12-GSGD-2,5 |
| | | 5.0 m | 18686 | KM12-M12-GSGD-5 |
| Inscription labels | | | | |
|  | Inscription labels 8x20 mm in frames (20 pieces) | | 539388 | IBS-8x20 |
| User documentation | | | | |
|  | User documentation for input/output modules | German | 539299 | P.BE.-CPEA-CL-DE |
| | | English | 539300 | P.BE.-CPEA-CL-EN |
| | | French | 539302 | P.BE.-CPEA-CL-FR |
| | | Italian | 539303 | P.BE.-CPEA-CL-IT |
| | | Spanish | 539301 | P.BE.-CPEA-CL-ES |
| | | Swedish | 539304 | P.BE.-CPEA-CL-SV |

CPI installation system

Technical data – MPA valve terminals

Flow rate

MPA1: Up to 360 l/min
MPA2: Up to 700 l/min



Valve width
MPA1: 10 mm
MPA2: 21 mm

Voltage

24 V DC

CPI interface for communication between an MPA valve terminal and a CPI master. It activates an MPA valve terminal with up to 32 solenoid coils on max. 32 valve positions.



Note

With more than 16 MPA2 solenoid coils an additional electrical supply is absolutely necessary (after 4 electronic modules).
Note that without an additional electrical supply maximum 24

solenoid coils may be switched. If more than 24 MPA1 or 12 MPA2 solenoid coils are to be switched simultaneously, an additional supply must be inserted after the third electronic module.

| General technical data | | | MPA-CPI-VI |
|--|-----------------|--------|---|
| Type | | | |
| CP interface, incoming | | | Plug M9, 5-pin |
| CP interface, outgoing | | | Socket M9, 5-pin |
| Max. no. of solenoid coils | | | 32 |
| LED display (product-specific) | PS | | Common message regarding power supply |
| | PL | | Power supply for valves |
| | Symbol | | Module fault |
| Nominal operating voltage | | [V DC] | 24 |
| Operating voltage range | | [V DC] | 24 ± 2.5% |
| Power failure bridging | Logic side only | [ms] | 10 |
| Current consumption at nominal operating voltage | Load | [mA] | Dependent on valve type and number of valves |
| | Electronics | [mA] | Approx. 50 (plus current consumption of electronic modules) |
| Residual ripple | | [Vss] | 4 |
| Materials | | | Die-cast aluminium, polyamide |
| Dimensions | | | → Internet: type 32 |
| Weight | | [g] | 200 |
| Technical data on valves | | | → Internet: type 32 |

CPI installation system


Technical data – MPA valve terminals

FESTO

| Operating conditions | | | |
|------------------------------|-----------|--|------------|
| Protection class to EN 60529 | | IP65 (when fully plugged in or fitted with protective cover) | |
| Ambient temperature | Operation | [°C] | -5 ... +50 |




| Certifications | | | |
|----------------------------------|--|------------------------|---------------|
| ATEX category gas | | II 3G | |
| Ex-ignition protection type gas | | Ex nA II T5 X | |
| ATEX category dust | | II 3D | |
| EX-ignition protection type dust | | Ex tD A22 IP54 T90°C X | |
| ATEX ambient temperature | | [°C] | -5 ≤ Ta ≤ +50 |

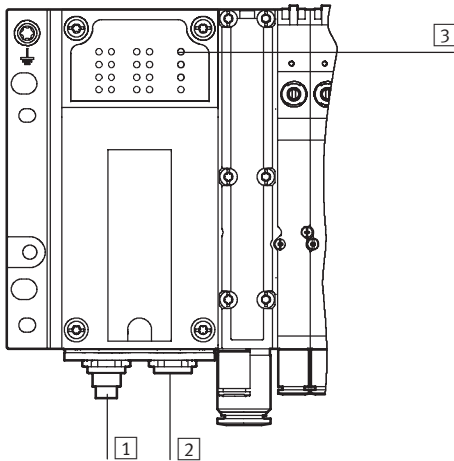Connection and display components



- 1 CP connection, incoming
- 2 CP connection, outgoing
- 3 Status LEDs
CP system supply (green)
Load supply (green)
Module fault (red)

Ordering data – Accessories

| Designation | | Part No. | Type |
|---|------------------------|----------|----------------------------|
| MPA valve terminal | | | |
|  | With CPI interface | 546280 | MPA-CP-VI |
| Valve terminal connection | | | |
|  | Connecting cable WS-WD | 0.25 m | 540327 KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 KVI-CP-3-WS-WD-8 |
|  | Connecting cable GS-GD | 2 m | 540332 KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 KVI-CP-3-GS-GD-8 |

CPI installation system

Technical data – CPV-SC valve terminals

Flow rate

170 l/min



Valve width
10 mm

Voltage

24 V DC

CPI interface for communication between a CPV-SC valve terminal and a CPI master. It activates a CPV-SC valve terminal with up to 16 solenoid coils.



| General technical data | | |
|--|-------------------------------|---|
| Type | | CPVSC1-AE16-CPI |
| CP interface, incoming | | Plug M9, 5-pin |
| CP interface, outgoing | | Socket M9, 5-pin |
| Max. no. of solenoid coils | | 16 |
| LED display (product-specific) | | Status LED for CP communication Status LEDs for valves |
| Nominal operating voltage | [V DC] | 24 |
| Operating voltage range | [V DC] | 20.4 ... 26.4 |
| Power failure bridging | Logic side only [ms] | 10 |
| Current consumption at nominal operating voltage | Load [mA] Electronics [mA] | Dependent on valve type and number of valves Max. 100 |
| Materials | | Polymer |
| Dimensions | | ➔ Internet: type 80 |
| Weight | [g] | 150 |
| Technical data on valves | | ➔ Internet: type 80 |

CPI installation system


Technical data – CPV-SC valve terminals

FESTO

| Operating conditions | | | |
|--|-----------|--|-------------|
| Protection class to EN 60529 | | IP40 (when fully plugged in or fitted with protective cover) | |
| Ambient temperature | Operation | [°C] | -5 ... +50 |
| | Storage | [°C] | -20 ... +40 |
| Corrosion resistance class CRC ¹⁾ | | 1 | |
| CE mark (see declaration of conformity) | | In accordance with EU EMC directive | |
| Certification | | c UL us Recognized (OL) | |




¹⁾ Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

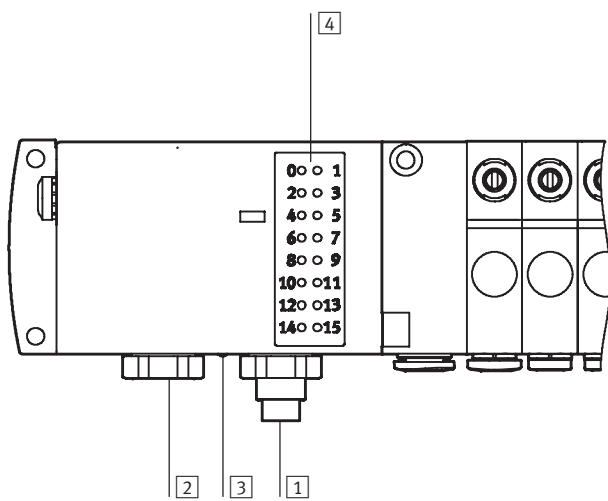Connection and display components



- 1 CP connection, incoming
- 2 CP connection, outgoing
- 3 Status LED for CP communication
- 4 Status LEDs for valves

Ordering data – Accessories

| Designation | Part No. | Type | |
|--|------------------------|-----------------|----------------------------|
| CPV-SC valve terminals | | | |
|  with CPI interface | 541975 | CPVSC1-AE16-CPI | |
| Valve terminal connection | | | |
|  | Connecting cable WS-WD | 0.25 m | 540327 KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 KVI-CP-3-WS-WD-8 |
|  | Connecting cable GS-GD | 2 m | 540332 KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 KVI-CP-3-GS-GD-8 |


CPI installation system

Technical data

Dimensions – Fieldbus node/control block

Download CAD Data → www.festo.com/us/cad

CPX-FB... /CPX-FEC and CPX-CP-4-FB

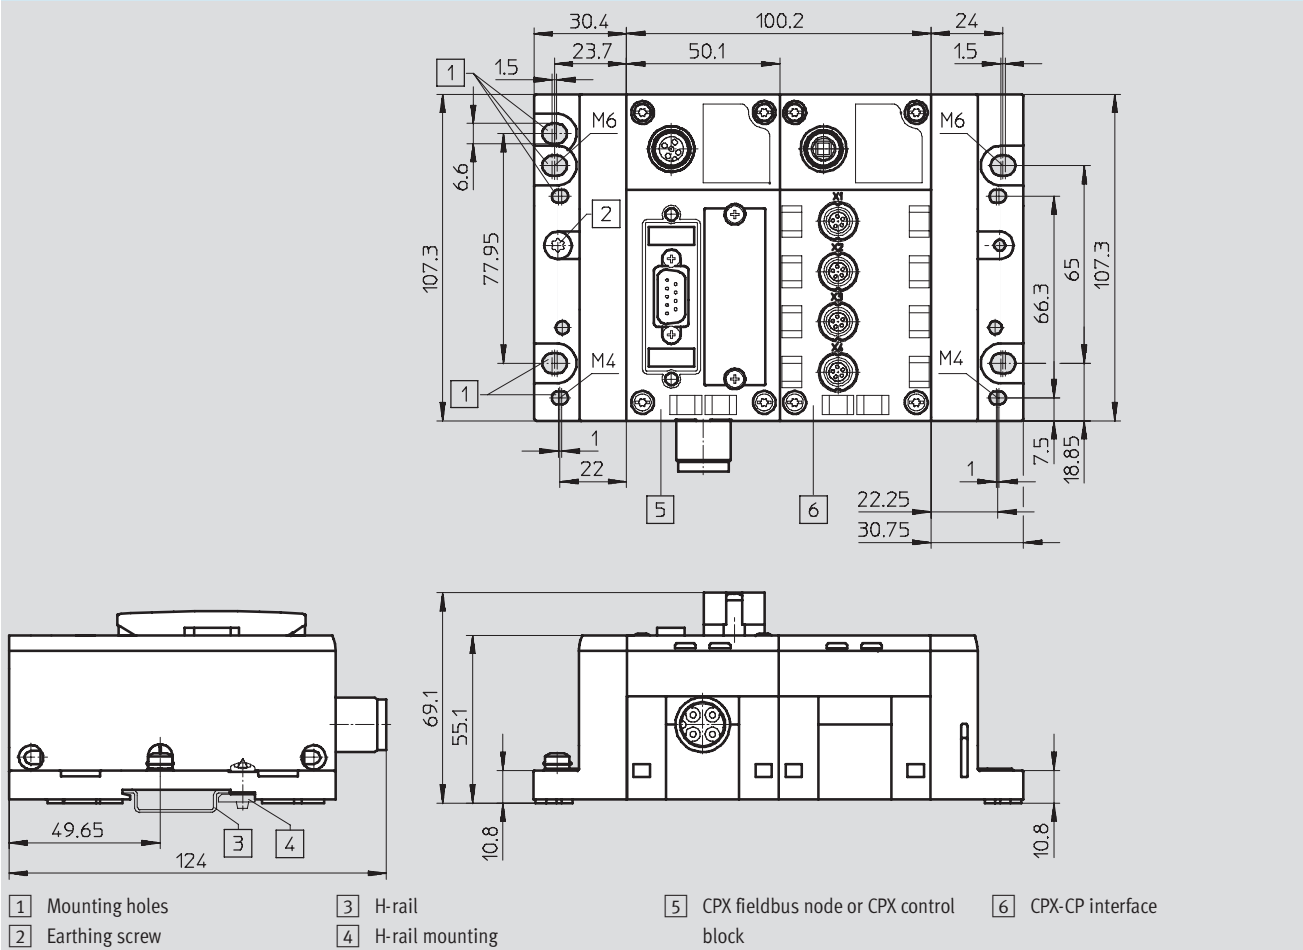

CPI installation system


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Fieldbus node

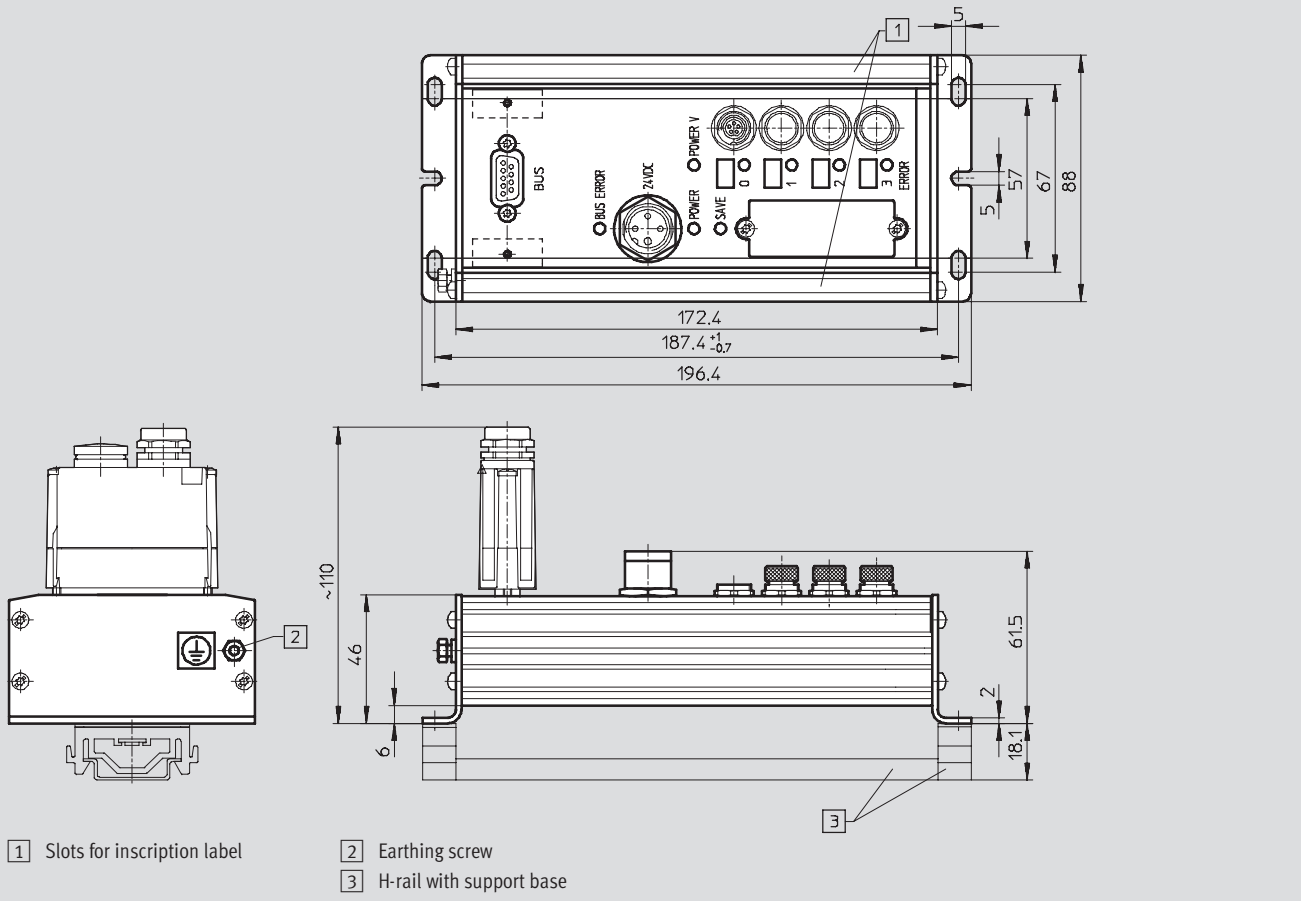

Note

The dimensions are valid for the fieldbus node types:

- CP-FB05-E
- CP-FB06-E
- CP-FB11-E
- CP-FB13-E

Different height ~110 (incl. fieldbus plug) for

- CP-FB06-E with M23
- CP-FB11-E with M12
- CP-FB13-E with 2x M12


CPI installation system

Technical data


Dimensions – Sturdy input modules

Download CAD Data → www.festo.com/us/cad

CP-E16-M8

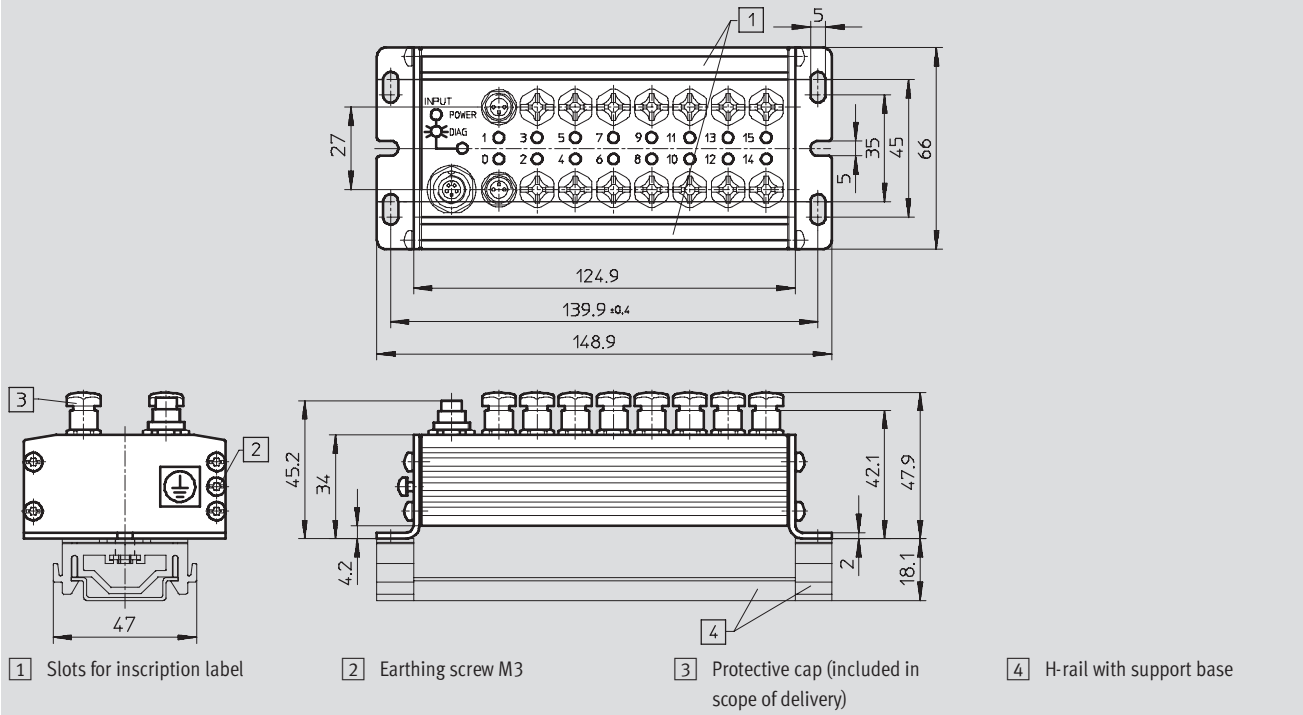

CP-E16-M8-Z

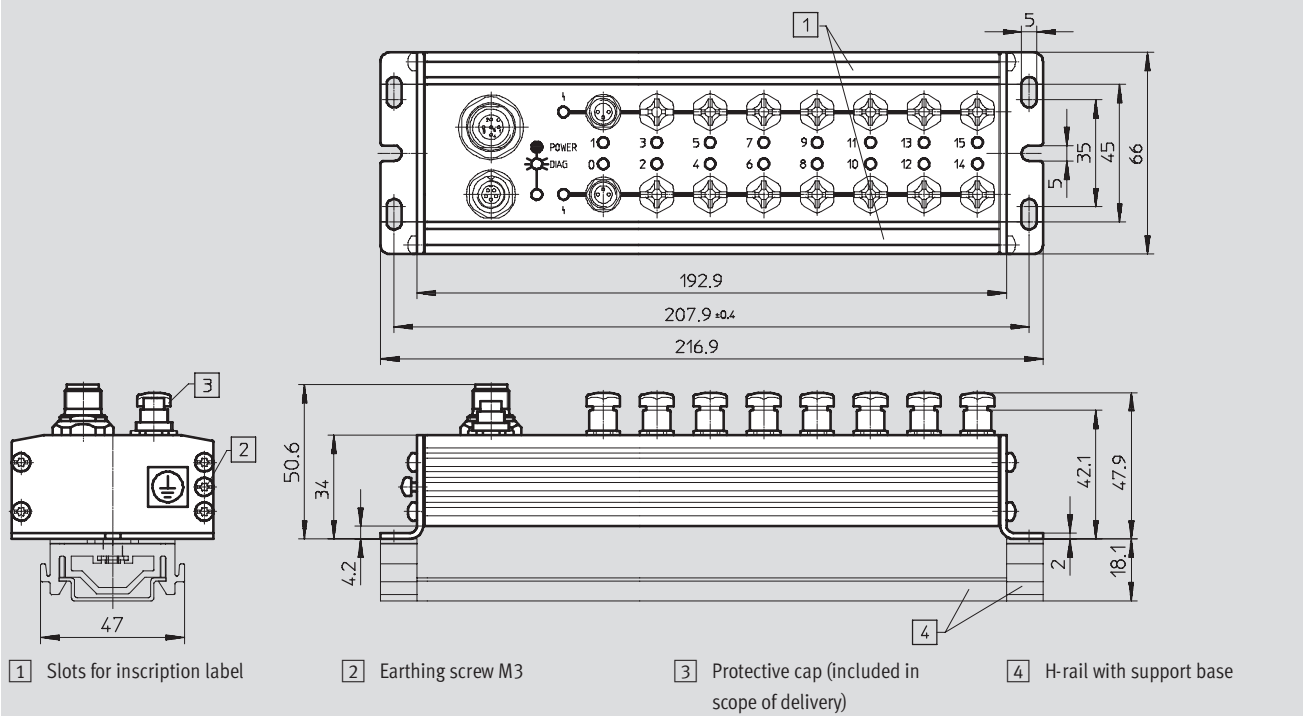

CPI installation system


Technical data

FESTO

Dimensions – Sturdy input modules

Download CAD Data → www.festo.com/us/cad

CP-E16-M12x2-5POL/CP-E16N-M12x2

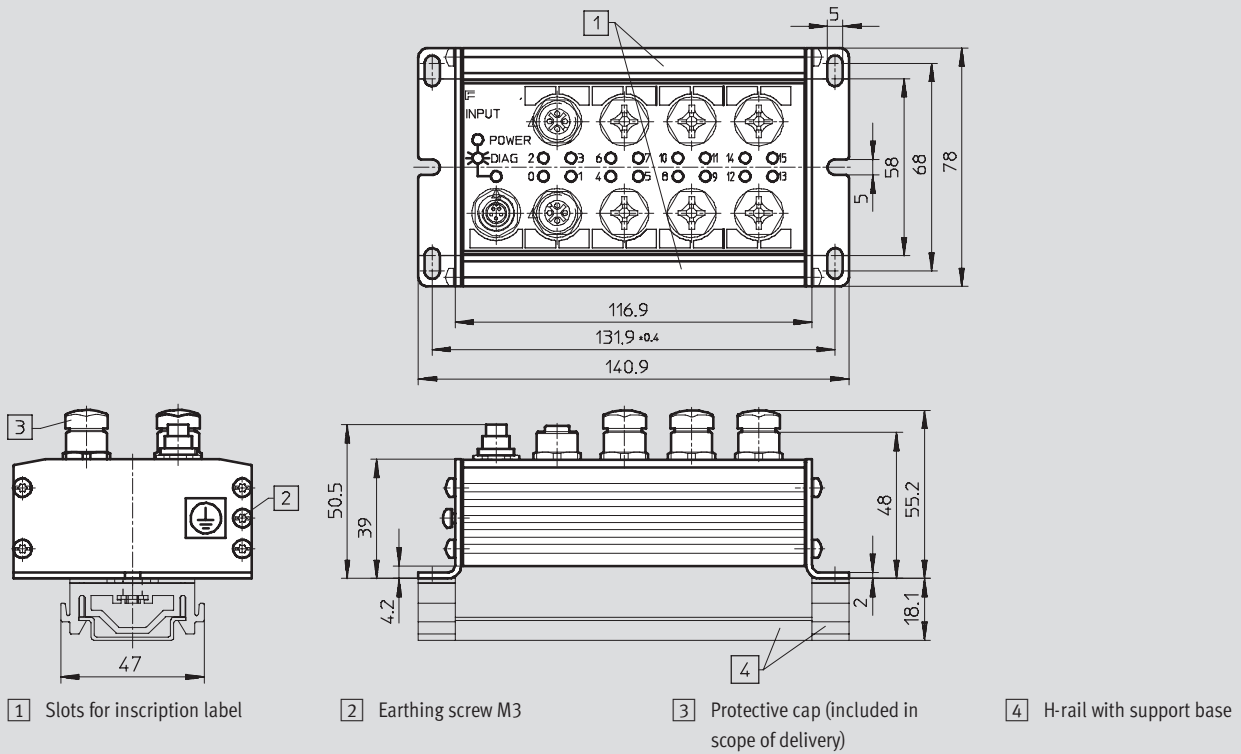


CPI installation system

Technical data

Dimensions – Economical input modules


Download CAD Data → www.festo.com/us/cad

CP-E16-M8-EL

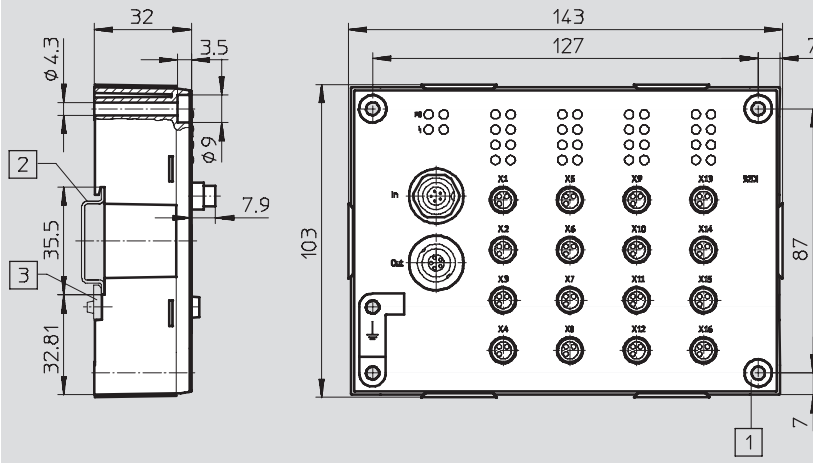


- 1 Through-hole for surface mounting
- 2 H-rail
- 3 Mounting kit for H-rail (included in the scope of delivery)

CP-E16-M12-EL

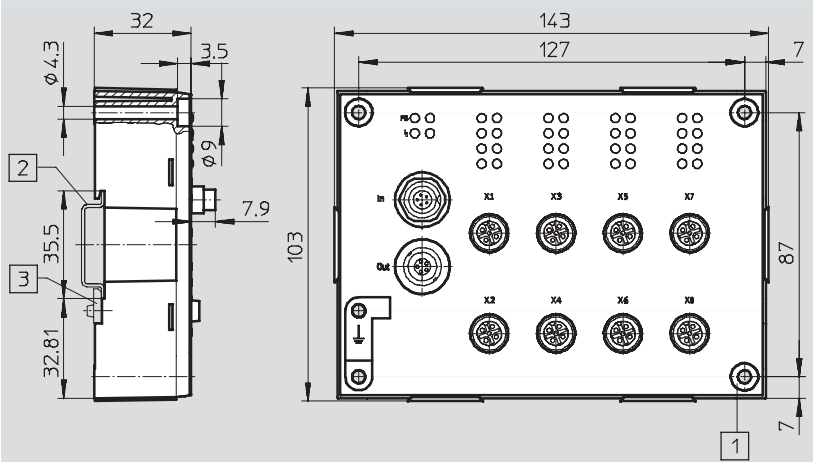

- 1 Through-hole for surface mounting
- 2 H-rail
- 3 Mounting kit for H-rail (included in the scope of delivery)

CP-E32-M8-EL

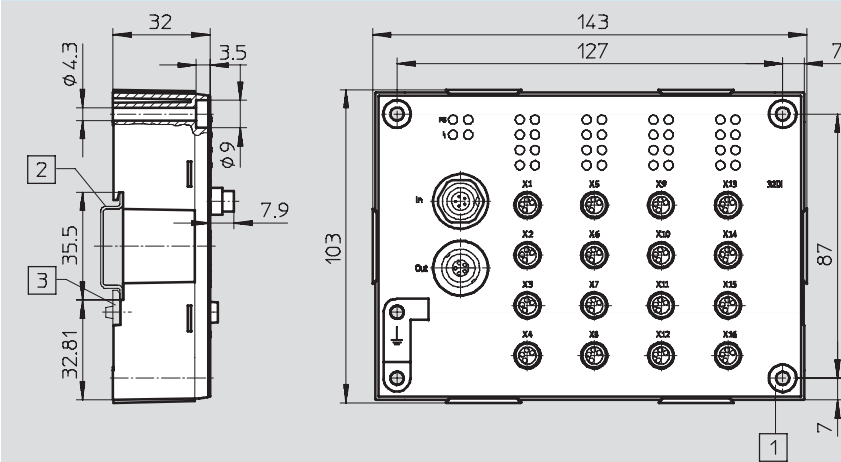

- 1 Through-hole for surface mounting
- 2 H-rail
- 3 Mounting kit for H-rail (included in the scope of delivery)

CPI installation system


Technical data

FESTO

Dimensions – Sturdy output modules

Download CAD Data → www.festo.com/us/cad


CP-A08-M12-5/CP-A08N-M12

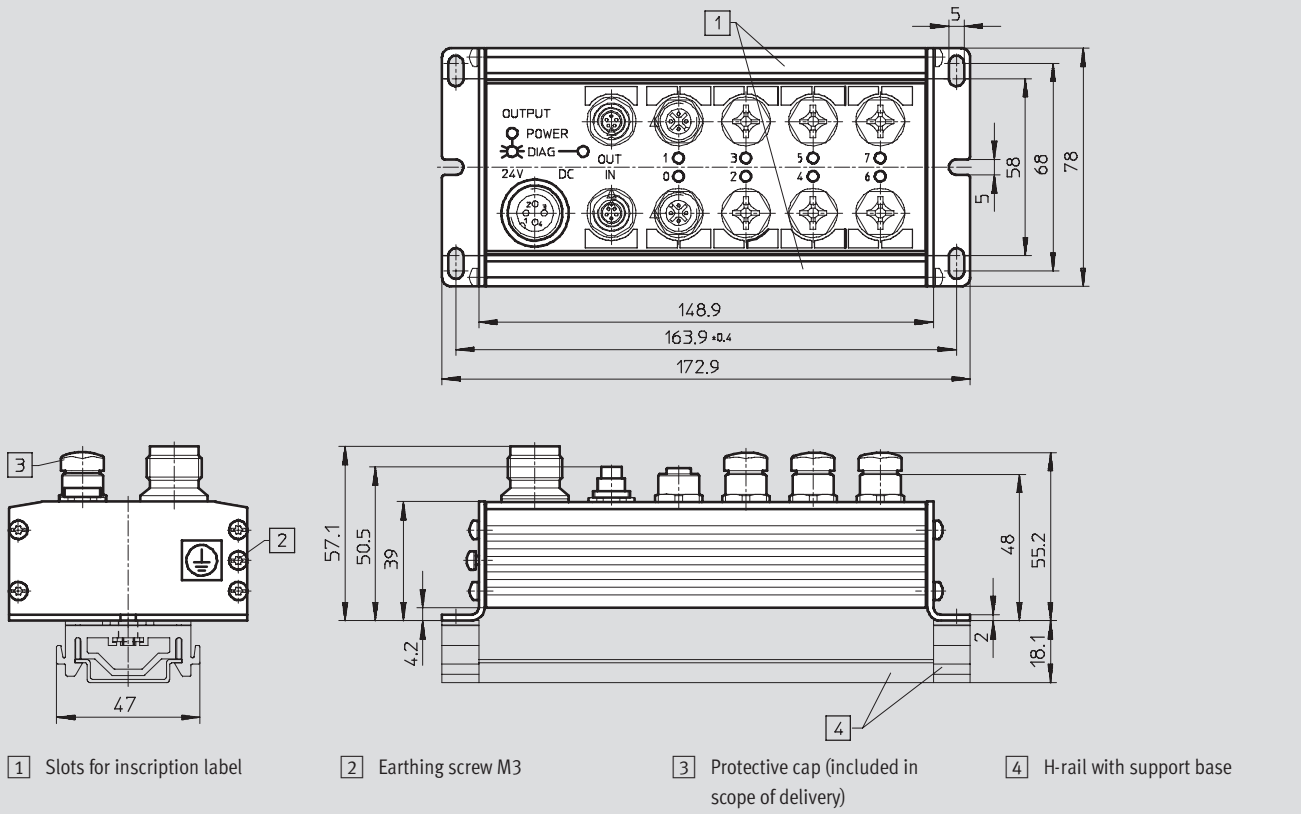

Dimensions – Economical output module

Download CAD Data → www.festo.com/us/cad

CP-A08-M12-EL-Z

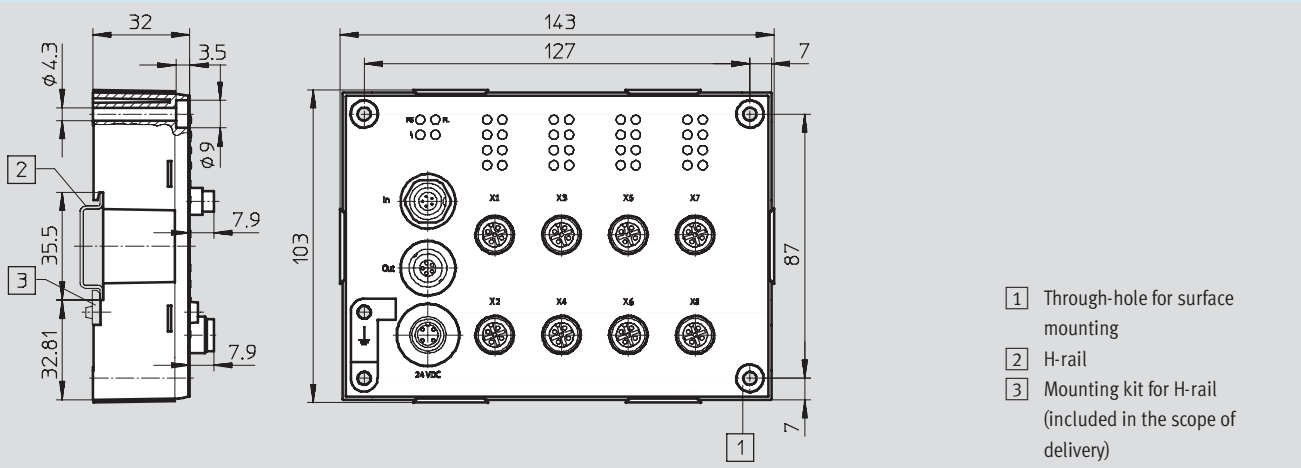


CPI installation system

Technical data


Dimensions – Compact CP modules

Download CAD Data → www.festo.com/us/cad


CP-E08-M12-CL/CP-A04-M12-CL

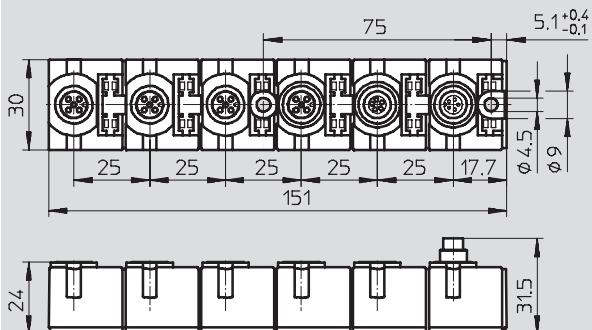

CP-E08-M8-CL

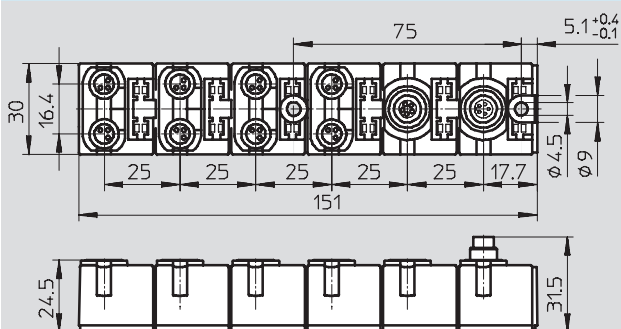

CP-E16-KL-CL

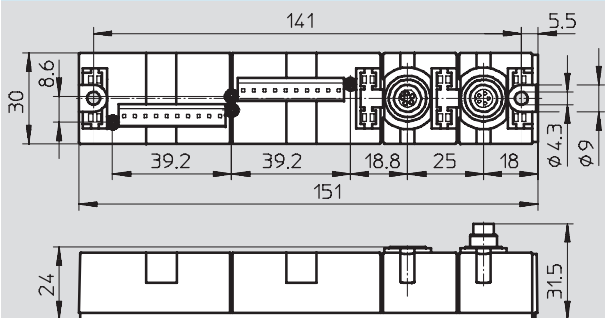

CPI installation system

Order processing information

Configuration guidelines

The CPI system supports a certain number of modules per CP string depending on the type of the CP

master and the CP modules connected.

CP masters and CP modules can be split into two different groups:

- With CPI functionality
- Without CPI functionality

CP modules with CPI functionality

CP modules with CPI functionality offer the following features:

- Incoming and outgoing CP interface
- Any arrangement of the modules within a CP string

- Max. 4 modules per CP string
- Max. 32 inputs and outputs can be connected to each string depending on the version

CP modules without CPI functionality

Sturdy CP modules offer the following features:

- CP valve terminals and CP output modules have an incoming and outgoing CP interface
- CP input modules only have an incoming CP interface and therefore

can only be positioned at the end of a CP string

- All CP modules with CPI functionality can also be connected to CP masters without extended functionality

Information on using CP modules with and without CPI functionality

A mixture of CP modules with and without CPI functionality is possible. The following must be noted in this regard:

- Only one input module without CPI functionality is possible per CP string (at the end of a CP string)

- Only one CP valve terminal or output module without CPI functionality is possible per CP string (any point in the CP string)

- Free positions in the CP string can be filled by CP modules with CPI functionality (max. 4 modules)

Note

The cable length for any given string may not exceed 10 m.

Connecting cables are available in lengths of 0.25 m, 0.5 m, 2 m, 5 m and 8 m

→ 91

The maximum number of inputs and outputs that can be connected is 32 each (sum of all CP modules on a CP string), regardless of the type of CP module (with or without CPI functionality).

Order processing

There is one way of placing an order for the electrical CPI installation system:

- Digitally using the valve terminal configurator

Please note that the CP strings must be allocated in ascending numerical order, i.e. starting with string 1, followed by string 2, etc. without omitting any numbers.

To correctly allocate a CP string, proceed as follows:

- First select a connecting cable of appropriate length.
- Then select an input/output module.
- Continue in this way until the string is fully allocated (max. 4 strings for CP modules with extended functionality).










The valve terminals are configured separately:

- CPV valve terminal CPV10/14/18-VI-FB-....
→ Internet: type 10
- MPA valve terminals MPA-CPI-VI
→ Internet: type 32
- CPV-SC valve terminals CPVSC1-AE16-CPI
→ Internet: type 80
- CPA valve terminals CPA10/14-IFB-CP-....
→ Internet: type 12

CPI installation system

Accessories















FESTO

| Ordering data | | | | |
|---|---|--|---------------|----------------------------|
| Designation | | | Part No. | Type |
| Plug connectors – Power supply | | | | |
|  | Power supply socket, straight, M18x1, 4-pin | for 1.5 mm ² | 18493 | NTSD-GD-9 |
| | | for 2.5 mm ² | 18526 | NTSD-GD-13,5 |
|  | Power supply socket, angled, M18x1, 4-pin | for 1.5 mm ² | 18527 | NTSD-WD-9 |
| | | for 2.5 mm ² | 533119 | NTSD-WD-11 |
|  | Power supply socket for CPX system supply | 7/8" connection, 5-pin | 543107 | NECU-G78G5-C2 |
| | | 7/8" connection, 4-pin | 543108 | NECU-G78G4-C2 |
| Connection sets for power supply and sensors | | | | |
|  | Plug, screw-in tension-spring socket | 3-row, 30-pin | 197161 | PS1 SAC30 |
| | Plug, screw-in tension-spring socket with LED | 3-row, 30-pin | 197162 | PS1-SAC31-30POL+LED |
| Sensor plugs | | | | |
|  | Plug M12, straight socket | 5-pin, PG7 | 175487 | SEA-M12-5GS-PG7 |
| | | 4-pin, PG7 | 18666 | SEA-GS-7 |
| | | 4-pin, 2.5 mm ² O.D. | 192008 | SEA-4GS-7-2,5 |
|  | Plug M8, straight | 3-pin, solderable | 18696 | SEA-GS-M8 |
| | | 3-pin, screw-in | 192009 | SEA-3GS-M8-S |
|  | Plug M12 for 2 sensor cables, PG11 | 4-pin | 18779 | SEA-GS-11-DUO |
| | | 5-pin | 192010 | SEA-5GS-11-DUO |
|  | Push-in T-connector | 2x socket M8, 3-pin 1x plug M8, 4-pin | 544391 | NEDU-M8D3-M8T4 |
|  | Push-in T-connector | 2x socket M12, 5-pin 1x plug M12, 4-pin | 541596 | NEDU-M12D5-M12T4 |

CPI installation system

Accessories











FESTO

| Ordering data | | | | |
|---|---|----------|----------|-----------------------|
| Designation | | | Part No. | Type |
| Plug connectors – Fieldbus connection | | | | |
|  | Sub-D plug for INTERBUS | Incoming | 532218 | FBS-SUB-9-BU-IB-B |
| | | Outgoing | 532217 | FBS-SUB-9-GS-IB-B |
| | Sub-D plug for DeviceNet/CANopen | | 532219 | FBS-SUB-9-BU-2x5POL-B |
| | Sub-D plug for Profibus DP | | 532216 | FBS-SUB-9-GS-DP-B |
| | Sub-D plug for CC-Link | | 532220 | FBS-SUB-9-GS-2x4POL-B |
| | Sub-D plug | | 534497 | FBS-SUB-9-GS-1x9POL-B |
|  | Bus connection M12, 5-pin, adapter (B-coded) for Profibus DP | | 533118 | FBA-2-M12-5POL-RK |
| | Bus connection Micro Style 2xM12, 5-pin, for DeviceNet/CANopen | | 525632 | FBA-2-M12-5POL |
|  | Socket M12, 5-pin, for Micro Style connection | | 18324 | FBSD-GD-9-5POL |
| | Plug M12, 5-pin, for Micro Style connection | | 175380 | FBS-M12-5GS-PG9 |
|  | Bus connection M12x1, 4-pin (D-coded) for Ethernet | | 543109 | NECU-M-S-D12G4-C2-ET |
|  | Connection block M12 adapter (B-coded) for Profibus DP | | 541519 | CPX-AB-2-M12-RK-DP |
| | Connection block M12 adapter (B-coded) for INTERBUS | | 534505 | CPX-AB-2-M12-RK-IB |
|  | Socket M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP | | 1067905 | NECU-M-B12G5-C2-PB |
|  | Plug M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP | | 1066354 | NECU-M-S-B12G5-C2-PB |
|  | Bus connection Open Style for 5-pin terminal strip for DeviceNet/CANopen | | 525634 | FBA-1-SL-5POL |
|  | Bus connection 5-pin terminal strip for DeviceNet/CANopen | | 525635 | FBSD-KL-2x5POL |
|  | Bus connection screw terminal for CC-Link | | 197962 | FBA-1-KL-5POL |
|  | RJ45/plug | | 534494 | FBS-RJ45-8-GS |
| Accessories – Fieldbus connection | | | | |
|  | Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug | | 538219 | AK-8KL |
|  | Screening plate for M12 connections | | 526184 | CPX-AB-S-4-M12 |
|  | Earthing element for right-hand/left-hand end plates (5 pieces) | | 538892 | CPX-EPFE-EV |

CPI installation system

Accessories











FESTO

| Ordering data | | | | |
|---|---|---------------------------|--------------------------|------------------------------------|
| Designation | | | Part No. | Type |
| Connecting cables | | | | |
|  | DUO cable M12-2xM8, 4-pin/2x3-pin | 2x straight socket | 18685 | KM12-DUO-M8-GDGD |
| | | 2x straight/angled socket | 18688 | KM12-DUO-M8-GDWD |
| | | 2x angled socket | 18687 | KM12-DUO-M8-WDWD |
|  | Connecting cable M8-M8, straight plug-straight socket | 0.5 m | 175488 | KM8-M8-GSGD-0,5 |
| | | 1.0 m | 175489 | KM8-M8-GSGD-1 |
| | | 2.5 m | 165610 | KM8-M8-GSGD-2,5 |
| | | 5.0 m | 165611 | KM8-M8-GSGD-5 |
| | Extension cable M12-M12, 5-pin, straight plug-straight socket | 1.5 m | 529044 | KV-M12-M12-1,5 |
| | | 3.5 m | 530901 | KV-M12-M12-3,5 |
| Connecting cable M12-M12, 4-pin, straight plug-straight socket | 2.5 m | 18684 | KM12-M12-GSGD-2,5 | |
| | 5.0 m | 18686 | KM12-M12-GSGD-5 | |
|  | Connecting cable M12-M12, 4-pin, straight plug-angled socket | 1.0 m | 185499 | KM12-M12-GSWD-1-4 |
|  | Modular system for connecting cables | | – | NEBU... → Internet: nebu |
|  | Programming cable | | 151915 | KDI-PPA-3-BU9 |
|  | Connecting cable FED, pre-assembled at one end | | 539642 | FEC-KBG7 |
|  | Connecting cable FED, pre-assembled at both ends | | 539643 | FEC-KBG8 |
| Connecting cable – CP modules | | | | |
|  | Connecting cable WS-WD, angled plug-angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable GS-GD, straight plug-straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
|  | Connector plug for CP cable (control cabinet implementation) | | 543252 | KVI-CP-3-SSD |

CPI installation system

Accessories


FESTO

| Ordering data | | | |
|---|--|---------------------|----------------------------|
| Designation | | Part No. | Type |
| Protective caps | | | |
|  | Inspection cover, transparent | 533334 | AK-SUB-9/15-B |
|  | Cover for RJ45 connection | 534496 | AK-Rj45 |
|  | Protective cap for sealing unused sockets (10 pieces) | for M8 connections | 177672 ISK-M8 |
| | | M9 | 356684 FLANSCHDOSE SER.712 |
| | | for M12 connections | 165592 ISK-M12 |
| Mounting attachments | | | |
|  | Retainer CPX-MMI | 534705 | CPX-MMI-1-H |
|  | Mounting for H-rail, CPX-MMI | 536689 | CPX-MMI-1-NRH |
|  | Mounting for H-rail, CP modules | 170169 | CP-TS-HS35 |
|  | Mounting for H-rail | 18649 | IBGH-03-4,0 |
| Inscription labels | | | |
|  | Inscription labels 6x10 mm in frames (64 pieces) | 18576 | IBS-6x10 |
|  | Inscription labels 8x20 mm in frames (20 pieces) for compact modules (CP-...-CL) | 539388 | IBS-8x20 |
|  | Inscription label holders for EL modules, bag of 10 | 547473 | ASCF-H-E2 |

CPI installation system

Accessories



FESTO

| Ordering data – Documentation | | | | |
|---|--|---------|------------------|------------------|
| Designation | Part No. | Type | | |
|  | User documentation for bus node CPX-FB6 | German | 526433 | P.BE-CPX-FB6-DE |
| | | English | 526434 | P.BE-CPX-FB6-EN |
| | | Spanish | 526435 | P.BE-CPX-FB6-ES |
| | | French | 526436 | P.BE-CPX-FB6-FR |
| | | Italian | 526437 | P.BE-CPX-FB6-IT |
| | | Swedish | 526438 | P.BE-CPX-FB6-SV |
| | User documentation for bus node CPX-FB11 | German | 526421 | P.BE-CPX-FB11-DE |
| | | English | 526422 | P.BE-CPX-FB11-EN |
| | | Spanish | 526423 | P.BE-CPX-FB11-ES |
| | | French | 526424 | P.BE-CPX-FB11-FR |
| | | Italian | 526425 | P.BE-CPX-FB11-IT |
| | | Swedish | 526426 | P.BE-CPX-FB11-SV |
| | User documentation for bus node CPX-FB13 | German | 526427 | P.BE-CPX-FB13-DE |
| | | English | 526428 | P.BE-CPX-FB13-EN |
| | | Spanish | 526429 | P.BE-CPX-FB13-ES |
| | | French | 526430 | P.BE-CPX-FB13-FR |
| | | Italian | 526431 | P.BE-CPX-FB13-IT |
| | | Swedish | 526432 | P.BE-CPX-FB13-SV |
| | User documentation for bus node CPX-FB14 | German | 526409 | P.BE-CPX-FB14-DE |
| | | English | 526410 | P.BE-CPX-FB14-EN |
| | | Spanish | 526411 | P.BE-CPX-FB14-ES |
| | | French | 526412 | P.BE-CPX-FB14-FR |
| | | Italian | 526413 | P.BE-CPX-FB14-IT |
| | | Swedish | 526414 | P.BE-CPX-FB14-SV |
| | User documentation for bus node CPX-FB23 | German | 526403 | P.BE-CPX-FB23-DE |
| | | English | 526404 | P.BE-CPX-FB23-EN |
| | User documentation for bus node CPX-FB32 | German | 693134 | P.BE-CPX-FB32-DE |
| | English | 693135 | P.BE-CPX-FB32-EN | |
| | Spanish | 693136 | P.BE-CPX-FB32-ES | |
| | French | 693137 | P.BE-CPX-FB32-FR | |
| | Italian | 693138 | P.BE-CPX-FB32-IT | |
| | Swedish | 693139 | P.BE-CPX-FB32-SV | |
| User documentation for bus node CPX-FB33 | German | 548759 | P.BE-CPX-PNIO-DE | |
| | English | 548760 | P.BE-CPX-PNIO-EN | |
| | Spanish | 548761 | P.BE-CPX-PNIO-ES | |
| | French | 548762 | P.BE-CPX-PNIO-FR | |
| | Italian | 548763 | P.BE-CPX-PNIO-IT | |
| | Swedish | 548764 | P.BE-CPX-PNIO-SV | |
| User documentation for control block CPX-FEC | German | 538474 | P.BE-CPX-FEC-DE | |
| | English | 538475 | P.BE-CPX-FEC-EN | |
| | Spanish | 538476 | P.BE-CPX-FEC-ES | |
| | French | 538477 | P.BE-CPX-FEC-FR | |
| | Italian | 538478 | P.BE-CPX-FEC-IT | |
| | Swedish | 538479 | P.BE-CPX-FEC-SV | |

CPI installation system

Accessories

FESTO

| Ordering data – Documentation | | | | |
|---|---|---------|---------------|-------------------|
| Designation | | | Part No. | Type |
|  | User documentation for CPX CP interface | German | 539293 | P.BE-CPX-CP-DE |
| | | English | 539294 | P.BE-CPX-CP-EN |
| | | Spanish | 539295 | P.BE-CPX-CP-ES |
| | | French | 539296 | P.BE-CPX-CP-FR |
| | | Italian | 539297 | P.BE-CPX-CP-IT |
| | | Swedish | 539298 | P.BE-CPX-CP-SV |
| | User manual for operator unit CPX-MMI-1 | German | 534824 | P.BE-CPX-MMI-1-DE |
| | | English | 534825 | P.BE-CPX-MMI-1-EN |
| | | French | 534827 | P.BE-CPX-MMI-1-FR |
| | | Italian | 534828 | P.BE-CPX-MMI-1-IT |
| | | Swedish | 534829 | P.BE-CPX-MMI-1-SV |
| | | Spanish | 534826 | P.BE-CPX-MMI-1-ES |
| | User documentation for sturdy input/output modules | German | 165125 | P.BE.-CPEA-DE |
| | | English | 165225 | P.BE.-CPEA-EN |
| | | French | 165127 | P.BE.-CPEA-FR |
| | | Italian | 165157 | P.BE.-CPEA-IT |
| | | Spanish | 165227 | P.BE.-CPEA-ES |
| | | Swedish | 165257 | P.BE.-CPEA-SV |
| | User documentation for compact input/output modules | German | 539299 | P.BE.-CPEA-CL-DE |
| | | English | 539300 | P.BE.-CPEA-CL-EN |
| | | French | 539302 | P.BE.-CPEA-CL-FR |
| | | Italian | 539303 | P.BE.-CPEA-CL-IT |
| | | Spanish | 539301 | P.BE.-CPEA-CL-ES |
| | | Swedish | 539304 | P.BE.-CPEA-CL-SV |
| | System description | German | 165126 | P.BE-CPSYS-DE |
| | | English | 165226 | P.BE-CPSYS-EN |
| | | French | 165128 | P.BE-CPSYS-FR |
| | | Italian | 165158 | P.BE-CPSYS-IT |
| Spanish | | 165228 | P.BE-CPSYS-ES | |
| Swedish | | 165258 | P.BE-CPSYS-SV | |
| Software | | | | |
|  | Programming software | German | 537927 | FST4.1DE |
| | | English | 537928 | FST4.1GB |

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com