


Axis controllers SPC200

FESTO

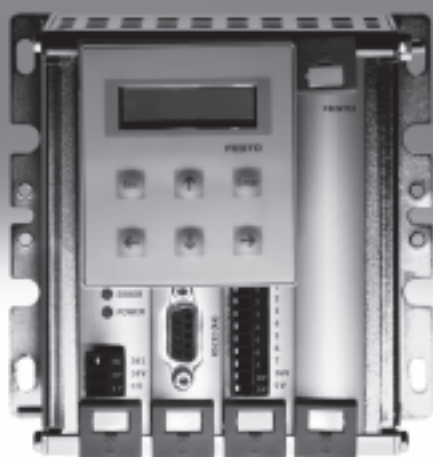


Axis controllers SPC200

Key features

FESTO

At a glance

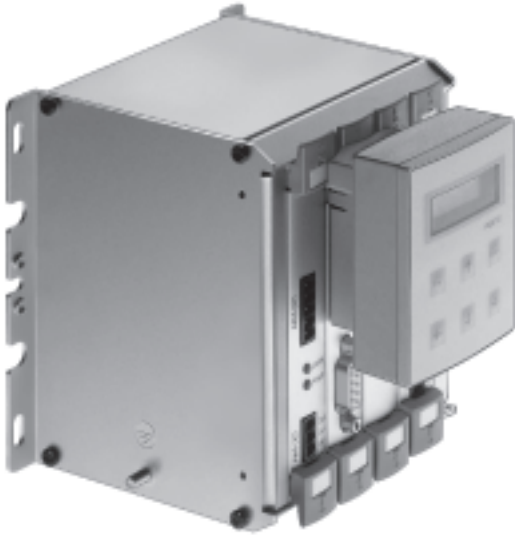

SPC200 – the most unique positioning controller in the world for pneumatic and electrical positioning technology

Strength in variety

- 1 to 4 positioning axes
- 3 different pneumatic drive families
- Stepper motor axes
- Technology mix

Strength in modularity

- Two housing sizes
- 9 different plug-in cards
- Combinable as required

Multi-purpose

- Set selection for simple applications
- Start/stop operation for demanding automation tasks
- Up to 100 programs
- Subprogram technology
- Register operations and much more

Strength in flexibility

- Digital inputs/outputs
- Analogue inputs
- Profibus, DeviceNet, Interbus
- CPV valve terminals for pneumatic switching functions

Strength in installation

- One axis string controls
- 2 pneumatic axes
- CPV valve terminals can be connected directly to the axis string
- Pre-assembled cables
- Plugs fit only in the correct sockets

Software WINPISA

- Project archiving
- Simple commissioning
- User-friendly programming
- Comprehensive diagnostics with graphics functions


Axis controllers SPC200

Key features

FESTO

In combination with the drive DNCI

The SPC200 is a position controller and positioning control in one. Together with the drive, the displacement encoder and the proportional directional control valve, it forms a closed control loop.

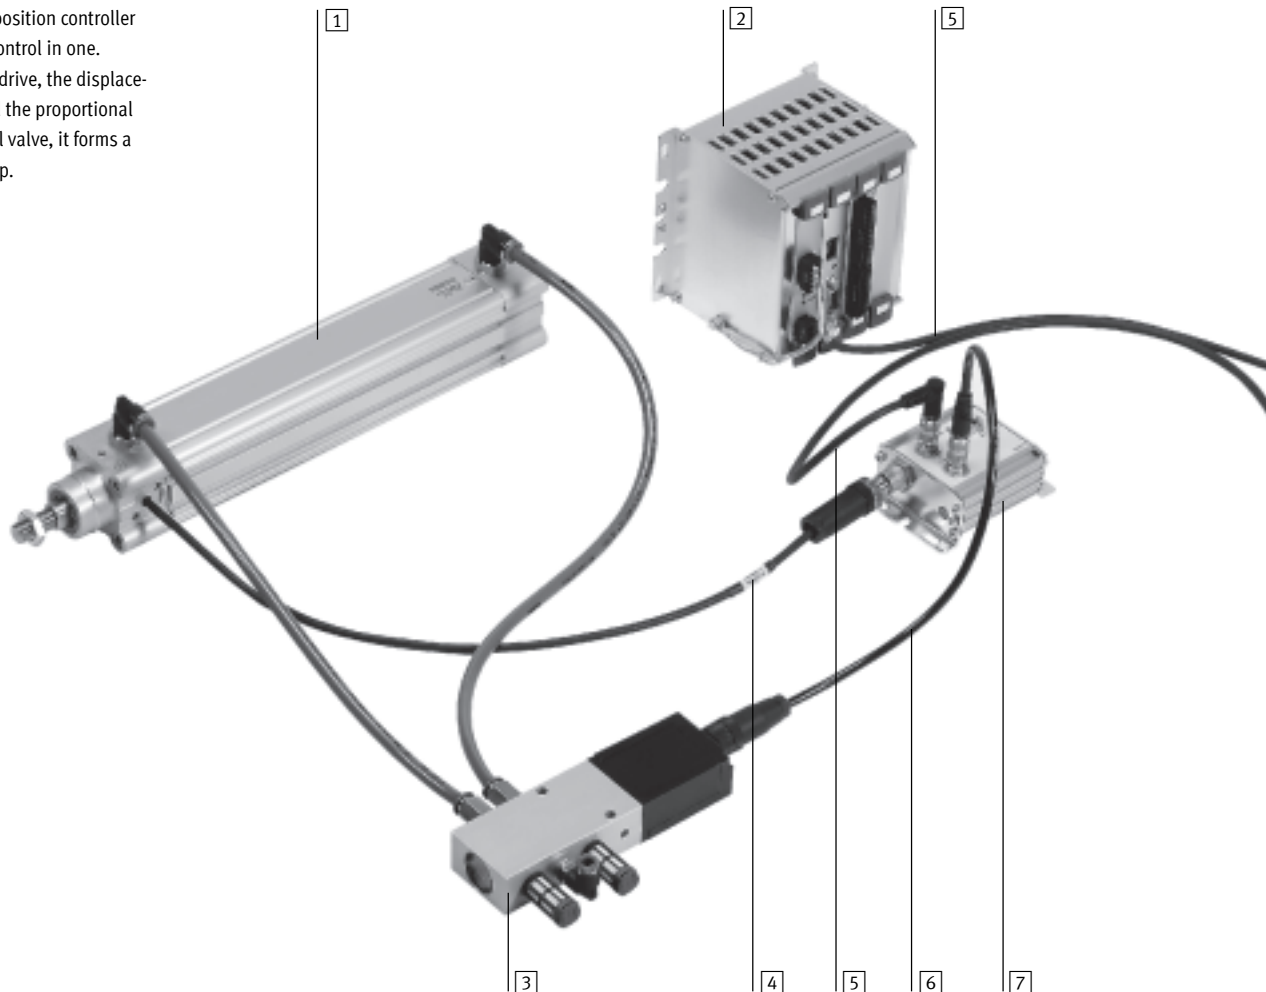

Individual components		
Type	Brief description	
1 DNCI-...	The pneumatic drive, in this case DNCI with integrated displacement encoder, generates the movement. It is controlled by the SPC200.	
2 SPC200-...	The axis controller with operating unit, in this case designed for a pneumatic drive, is an open and closed loop controller in one.	
3 MPYE-...	The proportional directional control valve is the final control element in the control loop and controls the movement of the drive in accordance with the specification of the closed loop controller in the SPC200.	
4 –	Connecting cable that connects the displacement encoder with the axis interface. The cable is permanently attached to the drive.	
5 KSPC-AIF-...	Connecting cable that connects the controller SPC200 with the axis interface.	
6 KMPYE-AIF-...	Connecting cable that connects the proportional directional control valve with the axis interface.	
7 SPC-AIF-...	The axis interface forwards the measured values from the displacement encoder to the closed loop controller in the SPC200 and the control signal from the closed loop controller to the proportional directional control valve.	

Axis controllers SPC200

Product range overview

FESTO

Individual components for SPC200			
	Type	Brief description	→ Page/Internet
Basic units			
	SPC200-CPU-4	Basic unit with 4 card locations	6
	SPC200-CPU-6	Basic unit with 6 card locations	6
Plug-in cards			
	SPC200-BP	Blanking plate	7
	SPC200-PWR-AIF	Power supply unit and axis interface connection	10
	SPC200-MMI-DIAG	Diagnostics and control unit connection	11
	SPC200-DIO	Digital inputs/outputs (10I/8O)	12
	SPC200-2AI-U	Analogue setpoint specification, 2 channels, 0 ... 10 V	14
	SPC200-SCU-AIF	Sub-controller for 3rd and 4th pneumatic axes	15
	SPC200-COM-PDP	Profibus-DP interface	16
	SPC200-COM-DN2	DeviceNet interface	18
Control unit			
	SPC200-MMI-1	Control unit for commissioning, programming and diagnostics. Not all functions of the axis controller SPC200 are supported. Please use WinPISA for commissioning.	28
Connector modules for SPC200			
	Type	Brief description	→ Page/Internet
Axis interface			
	SPC-AIF-POT	For analogue displacement encoder (potentiometer)	20
	SPC-AIF-POT-LWG		
	SPC-AIF-MTS	– For digital displacement encoder Temposonics/AIF – For linear drive DGPI...-AIF	20
	SPC-AIF-INC	For standard cylinder DNCI	22
	SPC-AIF-MTS-2	For linear drive DGCI	24
Power supply module			
	SPC-AIF-SUP-24V	Additional power supply for the load voltage at the axis interface for cable lengths over 16 m	26

Axis controllers SPC200

Product range overview

FESTO

Basic configuration of controller packages								
Version	Brief description	Basic configuration						➔ Page/Internet
		SPC200-MMI-1	SPC200-PWR-AIF	SPC200-MMI-DIAG	SPC200-DIO	SPC200-2AI-U	SPC200-SCU-AIF	SPC200-COM-PDP
SPC200/P01	For 1 or 2 pneumatic axes with control unit	■	■	■	■	-	-	9
SPC200/P02	For 1 or 2 pneumatic axes with control unit and 2 analogue inputs for positioning specifications	■	■	■	■	■	-	9
SPC200/P04	With Profibus-DP interface for 1 or 2 pneumatic axes	-	■	■	-	-	-	9
SPC200/P05	With Profibus-DP interface for up to 4 pneumatic axes	-	■	■	-	-	■	9

Expansion options for controller packages								
Version	Brief description	Expandable using ...						
		SPC200-MMI-1	SPC200-DIO	SPC200-2AI-U	SPC200-SCU-AIF	SPC200-COM-PDP	SPC200-COM-DN2	
	SPC200/P01	For 1 or 2 pneumatic axes with control unit	-	1)	1)	1)	1)	1)
	SPC200/P02	For 1 or 2 pneumatic axes with control unit and 2 analogue inputs for positioning specifications	-	-	-	-	-	-
	SPC200/P04	With Profibus-DP interface for 1 or 2 pneumatic axes	2)	1)	1)	-	-	-
	SPC200/P05	With Profibus-DP interface for up to 4 pneumatic axes	2)	-	-	-	-	-

- 1) One free card location, therefore expandable with max. one card. This must be ordered separately.
Other configurations can be produced from the individual components
- 2) Optional

Axis controllers SPC200

Technical data

FESTO

Axis controller basic unit

SPC200-CPU-4

SPC200-CPU-6

Function

Basic unit for 4 or 6 function cards,
contains closed loop position
controller for 2 pneumatic axes and
universal positioning control for
4 axes



General technical data				SPC200
Power supply				→ 10 (SPC200-PWR-AIF)
Current consumption		SPC200-CPU-4/6 incl. SPC200-PWR-AIF	[mA]	Typically 100
Processor type				Digital signal processor
Operating system				Festo OS 4.6x ¹⁾
Controller sampling time			[ms]	Typically 1.5
Control cycle			[ms]	Typically 2
Memory		Available for programs and data	[KB]	20
Data backup				Flash memory
			Backup cycles	> 100 000
No. of positioning axes		Total		4
		Pneumatic		Max. 4
		Stepper motor		Max. 3
No. of inputs/outputs		Local		Max. 40 inputs, 32 outputs ²⁾
		Per AIF string		Max. 16 inputs and 16 outputs ³⁾
		Via fieldbus		Max. 64 inputs and 64 outputs
No. of start programs				2 ⁴⁾
No. of position registers				100 per axis
Operating modes	Set selection	No. of motion sets		Max. 32 via local I/O per start program Max. 1,000 via fieldbus interface per start program
		Control signals		ENABLE, READY, STOP, RESET, RECBIT1..5, CLK_A/B, RC_A/B, ACK_A/B
	Start/stop	No. of programs		Max. 100
		Control signals		ENABLE, READY, START/RESET, STOP, MC_A/B, SYNC_IA/B, SYNC_OA/B
		Programming		NC programming to DIN 66025
		Instruction classes		Positioning instructions I/O instructions Register instructions Sequence instructions
		No. of NC sets		Max. 2,000
		No. of NC sets per program		Max. 1,000
		Nesting depth for subprograms		Max. 4

1) Status: April 2003

2) Less the used control signals of the first card

3) Either as 1 input device and 1 output device of the CP fieldbus modules or 1 input/output module SPC-FIO ...

4) At least 1 start program must be active

Axis controllers SPC200

Technical data

FESTO

General technical data			
			SPC200
CE marking symbol (see conformity declaration)			As per EU EMC directive
Vibrations/shock	Vibrations		Tested to DIN/IEC 68, parts 2-6, severity level 1
	Shock		Tested to DIN/IEC 68, parts 2-27, severity level 2
Ambient conditions	Temperature range	[°C]	-5 ... +50
	Protection class		IP20 ⁵⁾
	Relative air humidity		95% non-condensing
Weight	SPC200-CPU-4	[kg]	0.675
	SPC200-CPU-6	[kg]	0.85

5) With fully equipped basic unit



New

Communication modules for connecting to a fieldbus, like Profibus or DeviceNet, facilitate reading and writing all registers of the axis controller SPC200.


Reading the actual position and writing a digital position setpoint.

Ordering data			
		Part No.	Type
Axis controller basic unit	With 4 mounting locations	170 173	SPC200-CPU-4
	With 6 mounting locations	170 174	SPC200-CPU-6
Accessories	Blanking plate (plug-in card)	170 229	SPC200-BP
	Clip for H-rail assembly for SPC200	170 169	CP-TS-HS-35
User documentation	For axis controller basic unit, German	170 245	P.BE-SPC200-DE
	For axis controller basic unit, English	170 246	P.BE-SPC200-EN

Function modules

→ www.festo.com

Function modules that support communication between third-party controllers and the Profibus card of the axis controller SPC200 can be downloaded from the Download Area of the Festo website.

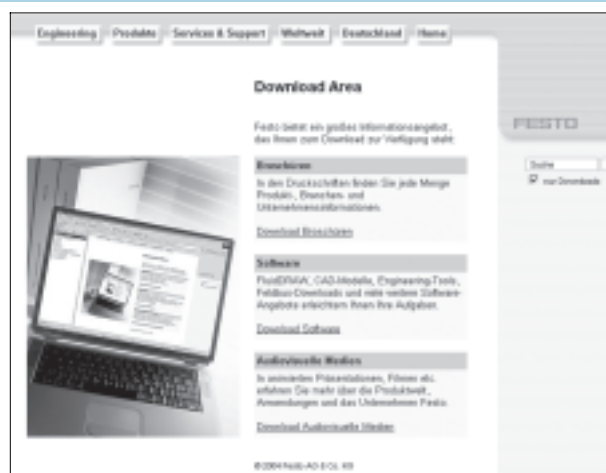

Axis controllers SPC200


Technical data

FESTO


Dimensions

Download CAD data → www.festo.com

SPC200-CPU-4 (rack for 4 mounting locations) using as an example: SPC200/P02

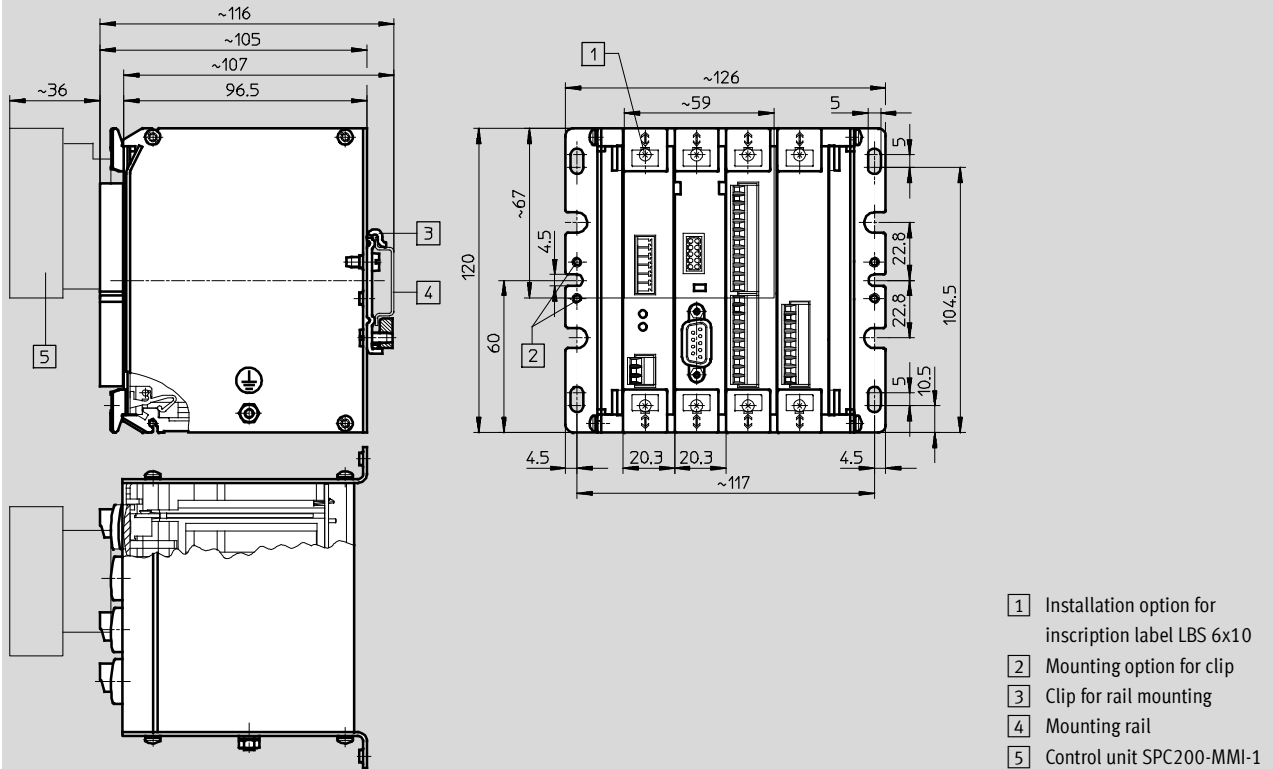

SPC200-CPU-6 (rack for 6 mounting locations)

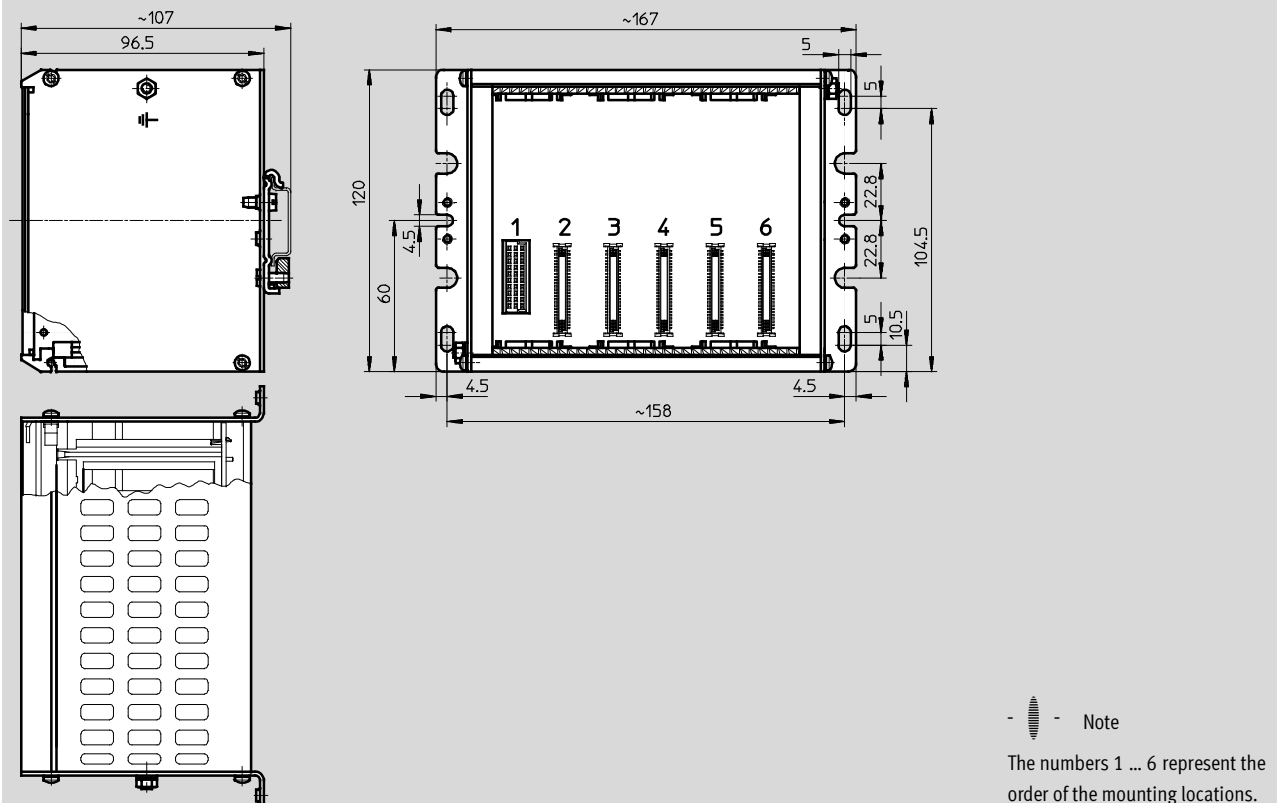


Axis controllers SPC200

Technical data

FESTO

Order of the mounting locations

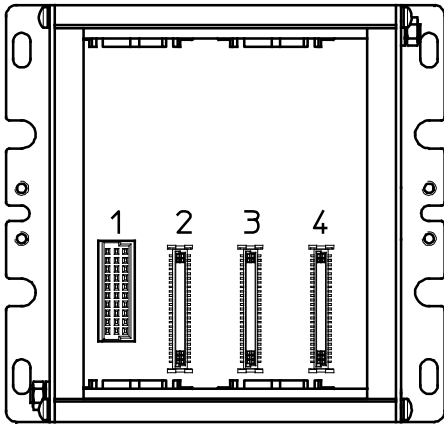

Configured controller packages						
Controller packages	Mounting location				Control unit SPC200-MMI-1 ¹⁾	Part No. Type
	1	2	3	4		
P01	1	2	4	9	■	170 521 SPC200/P01
P02	1	2	4	5	■	170 522 SPC200/P02
P04	1	2	9	7	–	187 812 SPC200/P04
P05	1	2	3	7	–	187 813 SPC200/P05

1) Included in the scope of delivery

Legend			
	Type	Description	→ Page/Internet
1	SPC200-PWR-AIF	Power supply	10
2	SPC200-MMI-DIAG	Serial interface	11
3	SPC200-SCU-AIF	Sub-controller	15
4	SPC200-DIO	Digital I/O	12
5	SPC200-2AI-U	Setpoint module	14
7	SPC200-COM-PDP	Profibus-DP interface	16
9	SPC200-PB	Blanking plate	7

Axis controllers SPC200

Technical data

FESTO

Power supply SPC200-PWR-AIF

Function
Power supply and connection of the
first axis string



General technical data				SPC200-PWR-AIF
Current consumption	Plug-in card	[mA]	See basic unit	
Power supply unit (PWR)	Supply	[V DC]	24 –5/+25%	
	Residual ripple	[%]	2	
	Power failure buffering for logic supply (pin 2)	[ms]	10	
	Current consumption	Load, pin 1 [A]	Max. 5.0	
		Logic, pin 2 [A]	Max. 4.0	
Feature	–		2 pneumatic axes	
Axis connection	Digital inputs	[max]	16 function inputs ¹⁾	
	Digital outputs	[max]	16 function outputs ¹⁾	
Electrical connections	Power supply unit		3-pin terminal strip	
	Axis connection		5-pin terminal strip	
CE marking symbol (see conformity declaration)			As per EU EMC directive	
Weight		[g]	82	
Mounting location → 9			1	

1) Either as 1 input module and 1 output module of the CP modules or 1 input/output module SPC-FIO-...

Pin allocation

1 Terminal strip on cable type KSPC-AIF-WD-... pre-assembled

2 3-pin terminal strip included in the scope of delivery. Connection cross section max. 1.5 mm²

Connecting cable → 29, no. 1

Note

The valves at the axis interfaces and the outputs of the CP modules are supplied via the 24 V load supply. They can therefore be switched off independently of the logic supply in an emergency stop situation.

1 AXES (X1)		2 PWR (X2)	
Pin	Function	Pin	Function
1	CAN-LOW (brown)	1	24 V load supply (switchable)
2	CAN-HIGH (white)	2	24 V supply logic
3	24 V (yellow)	3	0 V
4	0 V (green)		
5	24 V load supply (grey)		

Ordering data			
		Part No.	Type
Plug-in card	Power supply unit and axis interface connection	170 175	SPC200-PWR-AIF

Axis controllers SPC200

Technical data

FESTO

Serial interface

SPC200-MMI-DIAG

Function

Serial interface for diagnostics and programming, connection of the control unit MMI-1




General technical data			SPC200-MMI-DIAG
Current consumption	Plug-in card	[mA]	Typically 50 ¹⁾
Serial interface	Version		RS 232 C
	Electrical isolation		Yes
	Baud rate	[baud]	9,600; 19,200; 38,400; 57,600; 115,200 ²⁾
	Data	[bit]	8
	Stop bit	[bit]	1
	Parity		Even parity
	Protocol		No handshake
MMI interface	Version		Similar to RS 232 C
	Electrical isolation		No
Electrical connections	Serial interface		9-pin SUB-D, female
	MMI-1		5 double-pin row
CE marking symbol (see conformity declaration)			As per EU EMC directive
Weight		[g]	68
Mounting location → 9			2

1) With control unit SPC200-MMI-1

2) The baud rate is 9,600 baud after each POWER ON

Pin allocation



1 Interface for control unit
SPC200-MMI-1

2 Serial interface

Connecting cable → 29, no. 7

2 RS232 (X4)	
Pin	Function
2	Received Data (RxD)
3	Transmitted Data (TxD)
5	Signal Ground (SNGD)

Ordering data		
		Part No. Type
Plug-in card	Diagnostics and control unit connection	170 176 SPC200-MMI-DIAG

Axis controllers SPC200

Technical data

FESTO

Digital I/O module

SPC200-DIO

Function

Digital input/output card (local I/O)



General technical data			SPC200-DIO
Current consumption	Plug-in card	[mA]	Typically 50
Digital inputs	Number		10
	Sensor supply	[A]	0.5 ¹⁾
	Current consumption	[mA]	8 (at 24 V DC/"logic 1")
	Fuse protection for sensor supply		Electronic short-circuit protection
	Delay	[ms]	5
Digital outputs	Number		8
	Supply	[V DC]	24 ±25% ²⁾
	Max. current-carrying capacity per output	[mA]	250
	Fuse protection for outputs		Electronic, all outputs
	Max. tripping current	[A]	2
	Response time	[ms]	1.5
Version	Inputs/outputs		To IEC 61131-2, positive logic (PNP)
Electrical isolation	Inputs/outputs		No/yes
Electrical connections	Inputs		12-pin terminal strip
	Outputs		10-pin terminal strip
Weight		[g]	62
Mounting location → 9			From 3 upwards

1) Via internal 24 V supply (pin 2 to PWR to plug-in card SPC200-PWR-AIF)


2) Supplied separately, note load data

Axis controllers SPC200

Technical data

FESTO

Pin allocation



- 1 12-pin terminal strip included in the scope of delivery. Connection cross section max. 1.5 mm²
- 2 10-pin terminal strip included in the scope of delivery. Connection cross section max. 1.5 mm²



Note

Inputs and outputs on the first card are reserved for necessary functions such as start, stop, etc. Up to 7 inputs and 5 outputs are freely programmable.

On the other cards, all 10 inputs and 8 outputs are freely programmable. Up to 4 I/O cards can be inserted (in 6x rack).

1 Input (X5/X7)			
Pin	Function	Start/stop operation	Set selection
1	24 V	Supply (for switch/sensor)	
2	0 V		
3	I0.0	Freely programmable	RECBIT1
4	I0.1	Freely programmable	RECBIT2
5	I0.2	Freely programmable	RECBIT3
6	I0.3	Freely programmable	RECBIT4
7	I0.4	Freely programmable	RECBIT5
8	I0.5	(SYNC_IN/B) ¹⁾	CLK_B
9	I0.6	(SYNC_IN/B) ¹⁾	CLK_A
10	I0.7	STOP	STOP
11	I0.8	START/RESET ²⁾	RESET ²⁾
12	I0.9	ENABLE	ENABLE

2 Output (X2)			
Pin	Function	Start/stop operation	Set selection
1	Q0.0	Freely programmable	–
2	Q0.1	Freely programmable	–
3	Q0.2	Freely programmable	–
4	Q0.3	MC_B	RC_B
5	Q0.4	MC_A	RC_A
6	Q0.5	(SYNC_OUT/B) ¹⁾	ACK_B
7	Q0.6	(SYNC_OUT/A) ¹⁾	ACK_A
8	Q0.7	READY	READY
9	24 V	Supply (load supply for outputs)	
10	0 V		

1) Freely programmable, if not used

2) Reset (program reset) only in combination with 0 signal at stop input

Ordering data

		Part No.	Type
Plug-in card	Digital inputs/outputs (10I/8O)	170 179	SPC200-DIO

Axis controllers SPC200

Technical data

FESTO

Setpoint module


SPC200-2AI-U

Function

Analogue input card



General technical data			SPC200-2AI-U
Current consumption	Plug-in card	[mA]	Typically 10
Analogue inputs	Number		2
	Input voltage	[V DC]	0 ... 10
	Input filter, low pass	[Hz]	16
	Resolution	[bit]	12
	Non-linearity		3 LSB
	Max. amplification error	[%]	0.2
	Max. offset error	[mV]	1.5
	Absolute accuracy	[%]	< 0.3
	Input resistance	[kΩ]	> 200
Reference voltage		[V DC]	10
	Absolute accuracy	[%]	0.4
	Max. current	[mA]	8
Electrical connection			9-pin terminal strip
Weight			55
Mounting location → 9			From 3 upwards

Pin allocation	
	1 9-pin terminal strip included in the scope of delivery. Connection cross section max. 1.5 mm²
	Note Max. 2 plug-in cards can be used for position specifications for up to 4 axes. The allocation of the channel to an axis is programmable. Only one axis can be allocated to each channel. Offset and scaling of the setpoint specifications are also separately programmable for each channel.

1 Analogue IN (X9)	
Pin	Function
1	Reference voltage 10 V _{REF}
2	0 V
3	A1+; signal (+) for channel 1
4	A1-; signal (-) for channel 1
5	Reference voltage 10 V _{REF}
6	0 V
7	A2+; signal (+) for channel 2
8	A2-; signal (-) for channel 2
9	PE

Ordering data		Part No.	Type
Plug-in card	Analogue setpoint specification, 2 channels, 0 ... 10 V	170 177	SPC200-2AI-U

Axis controllers SPC200

Technical data

FESTO

Sub-controller SPC200-SCU-AIF

Function


Contains the position controllers for 2 further pneumatic axes and connection for the second axis string



General technical data			SPC200-SCU-AIF
Current consumption	Plug-in card	[mA]	Typically 100
Axis connection	2nd string		3rd and 4th pneumatic axes
	Digital inputs	[max]	16 function I/O ¹⁾
	Digital outputs	[max]	16 function I/O ¹⁾
Electrical connection	Axis connection		5-pin terminal strip
CE marking symbol (see conformity declaration)			As per EU EMC directive
Weight		[g]	80
Mounting location → 9			From 3 upwards

1) Either as 1 input module and 1 output module of the CP modules or 1 input/output module SPC-FIO-...

Pin allocation



1 Terminal strip on cable
type KSPC-AIF-1-WD-...
pre-assembled

Connecting cable → 29, no. 1

1 AXES B (X10)	
Pin	Function
1	CAN-LOW (brown)
2	CAN-HIGH (white)
3	24 V (yellow)
4	0 V (green)
5	24 V load supply (grey)

Ordering data		
		Part No. Type
Plug-in card	Sub-controller for 3rd and 4th pneumatic axes	178 311 SPC200-SCU-AIF

Axis controllers SPC200

Technical data

FESTO

Profibus-DP interface

SPC200-COM-PDP

Function

Profibus interface of the SPC200 as

slave to a Profibus network



General technical data				SPC200-COM-PDP
Current consumption	Plug-in card	[mA]	Typically 50	
Profibus	Version		RS 485	
	Electrical isolation		Yes	
	Type of transmission		Serial asynchronous, half-duplex	
	Protocols		Profibus-DP (standard slave), to DIN 19245, 1 – 4, EN 50170 Vol. 2	
	Addressing range of the fieldbus interface		0 ... 125	
	Max. address volume	Outputs	[Byte]	32
		Inputs	[Byte]	32
	Baud rate		[kBit/s]	9.6 – 12,000 ¹⁾
	Line length		[km]	23.8 ²⁾
	Max. load capacity		[mA]	100 ³⁾
Configuration support for the fieldbus interface				GSD file
Electrical connection	Profibus		9-pin SUB-D, female	
CE marking symbol (see conformity declaration)				As per EU EMC directive
Weight			[g]	80
Mounting location → 9				From 3 upwards ⁴⁾

1) Automatic baud rate detection

2) Line length dependent on baud rate and type of cable

3) Supply voltage positive (PV5), pin 6


4) When using the control unit MMI-1 as of location 4

Axis controllers SPC200

Technical data

FESTO

Pin allocation



- 1 9-pin plug usable acc. to Profibus standard, type FBS-SUB-9-WS-PB-K
→ Table below



New

Position data can be read and written directly via Profibus (as of firmware release 2.0)

1 Bus (X20)

Pin	Function
1	PE
2	Unused
3	RxD/TxD-P
4	CNTR-P
5	DGND
6	UP
7	Unused
8	RxD/TxD-N
9	Unused


Ordering data

		Part No.	Type
Plug-in card	Profibus-DP interface	170 224	SPC200-COM-PDP
Accessories	Connector plug	533 780	FBS-SUB-9-WS-PB-K
User documentation	For Profibus-DP interface, German	188 892	PBE-SPC200-COM-PDP-DE
	For Profibus-DP interface, English	188 893	PBE-SPC200-COM-PDP-EN
Software and manual	For Simatic S7 controller, German	540 188	PSW-SPC200-S7-PC-DE
	For Simatic S7 controller, English	540 189	PSW-SPC200-S7-PC-EN

Function modules

→ www.festo.com

Function modules that support communication between third-party controllers and the Profibus card of the axis controller SPC200 can be downloaded from the Download Area of the Festo website.

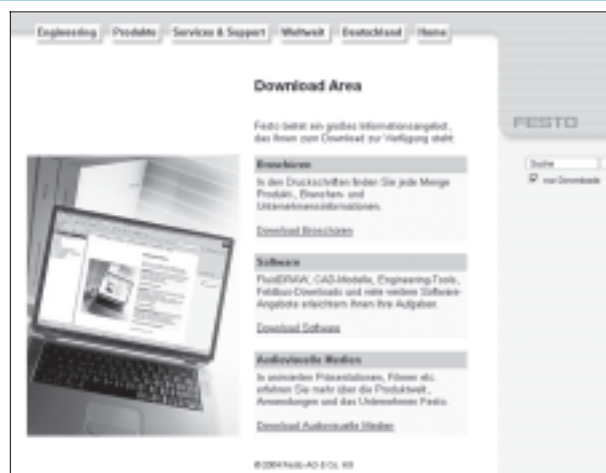

Axis controllers SPC200

Technical data

FESTO

DeviceNet interface SPC200-COM-DN2

Function

DeviceNet interface of the SPC200 as slave to a DeviceNet network.




General technical data			
			SPC200-COM-DN2
Current consumption	Plug-in card	[mA]	Typically 50
Power supply	Fieldbus	[V DC]	11 ... 30
DeviceNet bus	Version		– Physical layer (layer 1) to ISO/DIS 11898 – Standard highspeed to 1Mbit – Data Link layer (layer 2) to CAN specifications V2.0 – DeviceNet, Release 2.0
	Electrical isolation		Yes
	Protocols		– DeviceNet-IO – DeviceNet-Profil
	Addressing range of the fieldbus interface		0 ... 63
	Baud rate	[kBit/s]	125, 250, 500
Number of outputs	Set selection	[Byte]	2
	Start/Stop	[Byte]	2 ... 8
Number of inputs	Set selection	[Byte]	4
	Start/Stop	[Byte]	2 ... 8
Operation characteristic			Reading an writing inputs and outputs
			Reading and writing all program registers of the SPC200
			Read out the actual position
			Digital setpoint specification
LED display			Module and network status
Device-specific diagnosis			Via status bit
			Via WinPISA status display
Configuration support for the fieldbus interface			EDS file
Electrical connection	Open Style		5-pin terminal strip
CE marking symbol (see conformity declaration)			As per EU EMC directive
Weight		[g]	80
Mounting location → 9			From 3 upwards

Axis controllers SPC200

Technical data

FESTO

Pin allocation



- 1 5-pin terminal strip included in the scope of delivery.
Connection cross section max. 1.5 mm²



New

The card SPC200-COM-DN2 facilitates the connection of the SPC200 to DeviceNet.

Position data can be read and written directly via Profibus (as of firmware release 4.9).

1 Bus (X20)

Pin	Function
1	0 V bus interface/logic (CAN_GND)
2	Data – (CAN_L)
3	Screen (CAN_SHLD)
4	Data + (CAN_H)
5	24 V DC bus interface/logic (CAN_V+)

Ordering data

		Part No.	Type
Plug-in card	DeviceNet interface	540 305	SPC200-COM-DN2
User documentation	For DeviceNet interface, German	196 607	P.BE-SPC200-COM-CANDN-DE
	For DeviceNet interface, English	196 608	P.BE-SPC200-COM-CANDN-EN
	For DeviceNet interface, French	196 611	P.BE-SPC200-COM-CANDN-FR
	For DeviceNet interface, Italian	196 610	P.BE-SPC200-COM-CANDN-IT

Axis controllers SPC200

Technical data

FESTO

Axis interface

SPC-AIF-POT


SPC-AIF-POT-LWG

SPC-AIF-MTS

Function


Connection of the proportional valve and the displacement encoder of a pneumatic axis to the SPC200.

Routing of the axis connection to the second axis interface or to a CP module

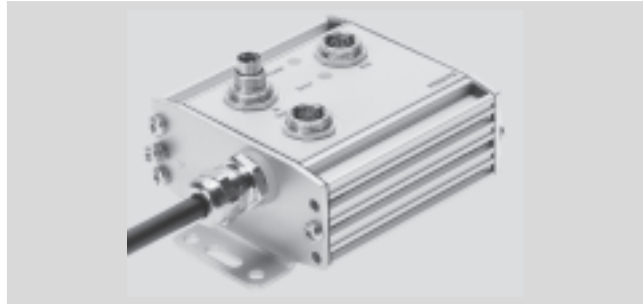

General technical data		SPC-AIF-POT	SPC-AIF-POT-LWG	SPC-AIF-MTS
Current consumption	Axis interface [mA]	100	100	200
	Prop. directional control valve, max. [A]	1.1		
Electrical connections	AIF IN	5-pin M9, male		
	AIF OUT	5-pin M9, female		
	Prop. directional control valve	7-pin M9, male		
	Displ. encoder cable length [m]	0.3		
	Plug	Type A DIN 43650	4-pin square plug	6-pin round connector DIN 45322
CE marking symbol (see conformity declaration)		As per EU EMC directive		
Ambient conditions	Temperature range [°C]	0 ... +50		
	Protection class to IEC 60529	IP65		
Weight	[g]	300		

Pin allocation

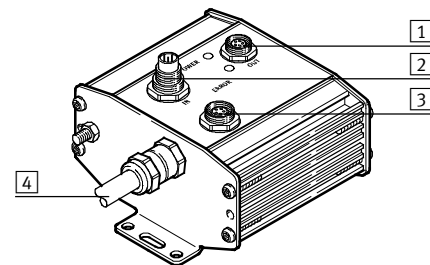


Connecting cable → 29,
no. 2/no. 3/no. 5

1 AIF OUT		2 AIF IN		3 Proportional directional control valve	
Pin	Function	Pin	Function	Pin	Function
1	24 V (yellow)	1	24 V (yellow)	1	+24 V
2	24 V load supply (grey)	2	24 V load supply (grey)	2	0 V
3	0 V (green)	3	0 V (green)	3	0 V
4	CAN-HIGH (white)	4	CAN-HIGH (white)	4	Setpoint value
5	CAN-LOW (brown)	5	CAN-LOW (brown)	5	GND
PE	Screen	PE	Screen	6	Unused
				7	+24 V
				PE	Screen

4 Displacement encoder POT		4 Displacement encoder LWG		4 Displacement encoder MTS	
Pin	Function	Pin	Function	Pin	Function
1	+10 V (green)	1	+10 V (green)	1	Can LOW (white)
2	Signal (white)	2	Signal (white)	2	Can HIGH (yellow)
3	GND (brown)	3	GND (brown)	3	Unused
PE	PE (yellow)	PE	PE (yellow)	4	Unused
				5	+24 V (green)
				6	0 V (brown)
				PE	Screen

Technical data

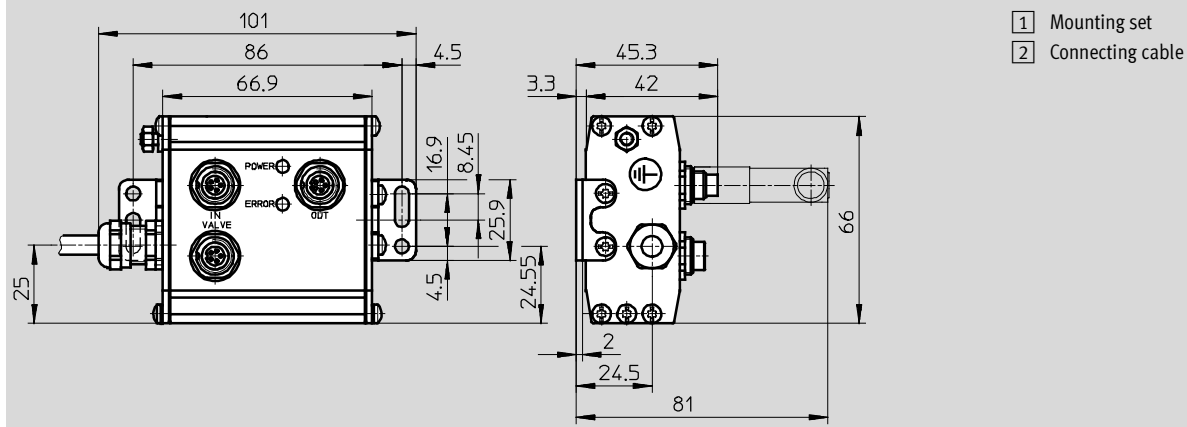

Ordering data			
		Part No.	Type
Axis interface	For analogue displacement encoder	170 228	SPC-AIF-POT
		527 496	SPC-AIF-POT-LWG
	For digital displacement encoder	170 231	SPC-AIF-MTS
Accessories	Terminating resistor for AIF string	175 403	KABS-M9-R100 ¹⁾
	Mounting set for vertical fitting	540 309	SPC-HBW-SET

1) One contained in SPC200/POX

Axis controllers SPC200

Technical data

FESTO

Axis interface

SPC-AIF-INC

Function


Connection of the proportional valve and the displacement encoder of a pneumatic axis to the SPC200.

Routing of the axis connection to the second axis interface or to a CP module.



General technical data			SPC-AIF-INC
Current consumption	Axis interface	[mA]	60
	Prop. directional control valve, max.	[A]	1.1
Electrical connections	AIF IN		5-pin M9, male
	AIF OUT		5-pin M9, female
	Prop. directional control valve		7-pin M9, female
	Displacement encoder		8-pin M12, female
CE marking symbol (see conformity declaration)			As per EU EMC directive
Ambient conditions	Temperature range	[°C]	0 ... +50
	Protection class to IEC 60529		IP65
Weight			[g] 240

Pin allocation

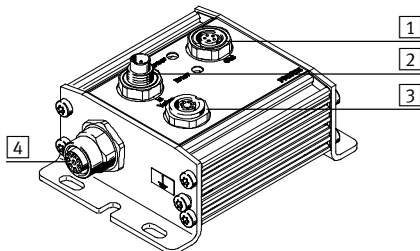

Connecting cable → 29,
no. [2]/no. [3]/no. [5]


[1] AIF OUT		[2] AIF IN		[3] Proportional directional control valve	
Pin	Function	Pin	Function	Pin	Function
1	24 V (yellow)	1	24 V (yellow)	1	+24 V
2	24 V load supply (grey)	2	24 V load supply (grey)	2	0 V
3	0 V (green)	3	0 V (green)	3	0 V
4	CAN-HIGH (white)	4	CAN-HIGH (white)	4	Setpoint value
5	CAN-LOW (brown)	5	CAN-LOW (brown)	5	GND
PE	Screen	PE	Screen	6	Unused
				7	+24 V
				PE	Screen

[4] Displacement encoder INC	
Pin	Function
1	5 V
2	GND
3	sin+
4	sin-
5	cos-
6	cos+
7	Screen
8	-

FESTO

Dimensions

SPC-AIF-INC



1) One contained in SPC200/P0X

Axis controllers SPC200

Technical data


FESTO

Axis interface SPC-AIF-MTS-2

Function


Connection of the proportional valve and the displacement encoder of a pneumatic axis to the SPC200.

Routing of the axis connection to the second axis interface or to a CP module.

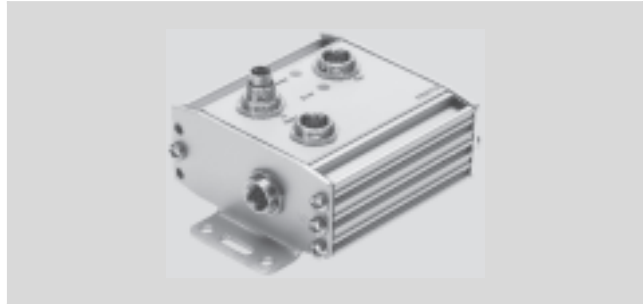

General technical data			SPC-AIF-MTS-2
Current consumption	Axis interface	[mA]	200
	Prop. directional control valve, max.	[A]	1.1
Electrical connections	AIF IN		5-pin M9, male
	AIF OUT		5-pin M9, female
	Prop. directional control valve		7-pin M9, male
	Displacement encoder		5-pin M9, female
CE marking symbol (see conformity declaration)			As per EU EMC directive
Ambient conditions	Temperature range	[°C]	0 ... +50
	Protection class to IEC 60529		IP65
Weight		[g]	300

Pin allocation

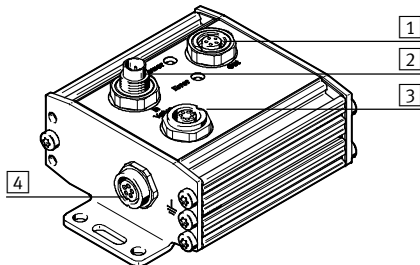

Connecting cable → 29,
no. [2]/no. [3]/no. [5]

[1] AIF OUT	
Pin	Function
1	24 V (yellow)
2	24 V load supply (grey)
3	0 V (green)
4	CAN-HIGH (white)
5	CAN-LOW (brown)
PE	Screen

[2] AIF IN	
Pin	Function
1	24 V (yellow)
2	24 V load supply (grey)
3	0 V (green)
4	CAN-HIGH (white)
5	CAN-LOW (brown)
PE	Screen

[3] Proportional directional control valve	
Pin	Function
1	+24 V
2	0 V
3	0 V
4	Setpoint value
5	GND
6	Unused
7	+24 V
PE	Screen

[4] Displacement encoder DGCI	
Pin	Function
1	+24 V
2	Unused
3	0 V
4	CAN-HIGH
5	CAN-LOW
PE	Screen

Axis controllers SPC200


Technical data



Dimensions

Download CAD data → www.festo.com

SPC-AIF-MTS-2

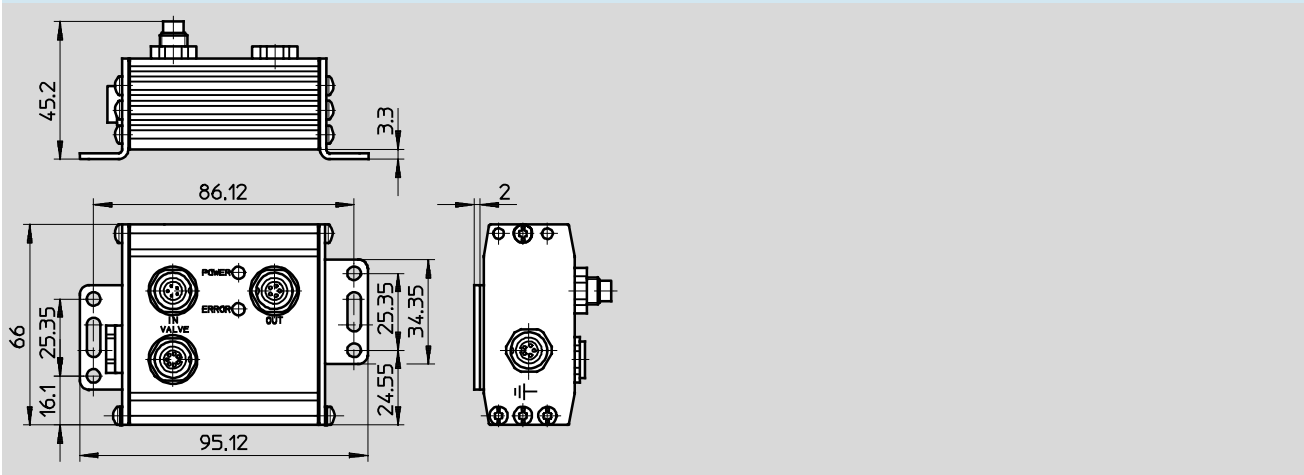

Ordering data		Part No.	Type
Axis interface	For digital displacement encoder	548 128	SPC-AIF-MTS-2
Accessories	Terminating resistor for AIF string	175 403	KABS-M9-R100 ¹⁾

1) One contained in SPC200/POX

Axis controllers SPC200

Technical data

FESTO

Power supply module

SPC-AIF-SUP-24V


Function

Additional power supply for the load voltage at the axis interface string, for cable lengths over 16 m.



General technical data			SPC-AIF-SUP-24V
Electrical connections	AIF IN		5-pin M9, male
	AIF OUT		5-pin M9, female
	Cable length	[m]	0.2
	For load voltage		5-pin M12, male
	Voltage	[V DC]	24 – 5/+25%
	Current	[A]	3
Protection against polarity reversal			No
CE marking symbol (see conformity declaration)			As per EU EMC directive
Ambient conditions	Temperature range	[°C]	0 ... +50
	Protection class to DIN 60529		IP65
Weight			[g] 150

Pin allocation



Connecting cable → 29,
no. [3]/no. [4]

[1] AIF OUT		[2] AIF IN	
Pin	Function	Pin	Function
1	24 V (yellow)	1	24 V (yellow)
2	24 V load supply of [3]	2	Unused
3	0 V (green)	3	0 V (green)
4	CAN-HIGH (white)	4	CAN-HIGH (white)
5	CAN-LOW (brown)	5	CAN-LOW (brown)
PE	Screen	PE	Screen


[3] Load supply	
Pin	Function
1	Unused
2	24 V load
3	0 V
4	Unused

Axis controllers SPC200

Technical data



Dimensions Download CAD data → www.festo.com

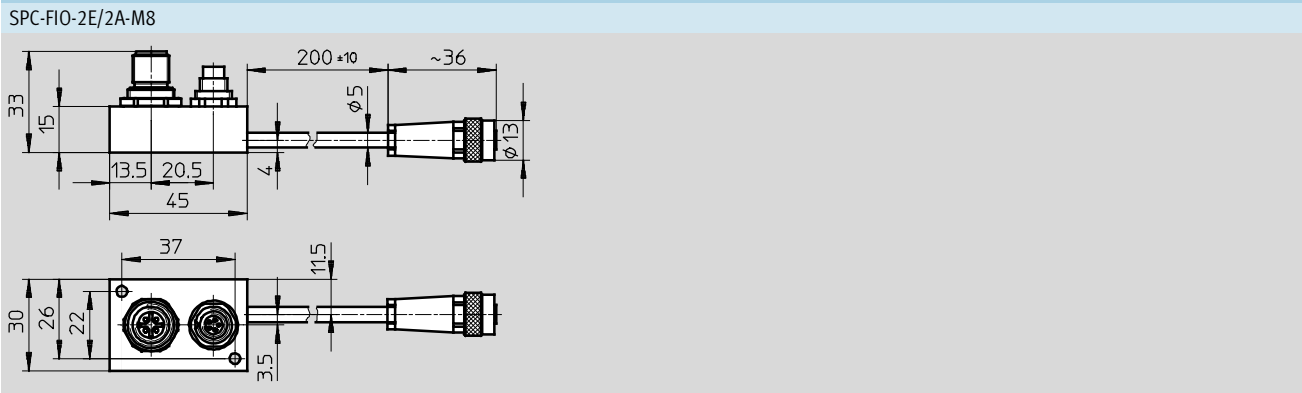

Ordering data		Part No.	Type
Power supply module	Additional power supply for the load voltage	171 182	SPC-AIF-SUP-24V

Axis controllers SPC200

Technical data

FESTO

Control unit

SPC200-MMI-1

Not all functions of the axis controller SPC200 are supported. Please use WinPISA for commissioning.




General technical data			SPC200-MMI-1
Display			LCD display, 2 x 16 characters
Operation			Touch-sensitive keypad with 6 keys
Power supply	[V DC]		5 ¹⁾
Current consumption	[mA]		30 ²⁾
Interface			3 ³⁾
Electrical isolation			No
Electrical connections	Interface		10-pin row
	Power supply		10-pin row
CE marking symbol (see conformity declaration)			As per EU EMC directive
Ambient conditions	Temperature range	[°C]	-5 ... +50
	Protection class to IEC 60529		IP20
Weight		[g]	90

1) Is supplied directly via the plug-in card SPC200-MMI-DIAG

2) Referred to 24 V supply of the SPC200-PVR card

3) Similar to RS 232

Pin allocation



1 Plug-in direct


Ordering data		
		Part No. Type
Control unit	For commissioning, programming and diagnostics	170 226 SPC200-MMI-1

Axis controllers SPC200

Accessories

FESTO

Cables – Pneumatic drives

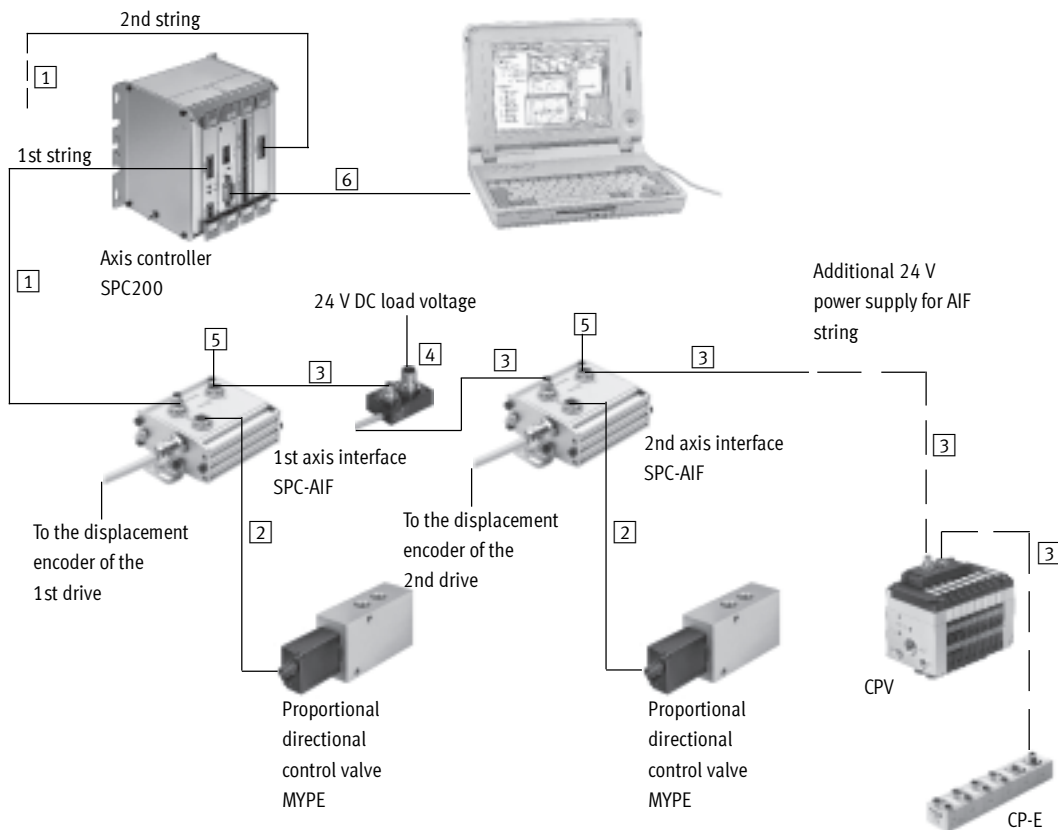

No.	Brief description	Length [m]	Connection	Suitable for chain link trunking	Part No.	Type
1	Connecting cable for axis controller/interface ¹⁾	5	angled	–	170 236	KSPC-AIF-1-WD-5
1	Connecting cable for axis controller/interface ¹⁾	8	angled	–	170 237	KSPC-AIF-1-WD-8
2	Connecting cable for axis interface/valve	0.3	straight	–	170 239	KMPYE-AIF-1-GS-GD-0,3
2	Connecting cable for axis interface/valve	2	straight	–	170 238	KMPYE-AIF-1-GS-GD-2
3	Connecting cable for axis interface/function I/O ¹⁾	0,25	angled	■	540 327	KVI-CP-3-WS-WD-0,25
3	Connecting cable for axis interface/function I/O ¹⁾	0,5	angled	■	540 328	KVI-CP-3-WS-WD-0,5
3	Connecting cable for axis interface/function I/O ¹⁾	2	angled	■	540 329	KVI-CP-3-WS-WD-2
3	Connecting cable for axis interface/function I/O ¹⁾	5	angled	■	540 330	KVI-CP-3-WS-WD-5
3	Connecting cable for axis interface/function I/O ¹⁾	8	angled	■	540 331	KVI-CP-3-WS-WD-8
3	Connecting cable for axis interface/function I/O ¹⁾	2	straight	■	540 332	KVI-CP-3-GS-GD-2
3	Connecting cable for axis interface/function I/O ¹⁾	5	straight	■	540 333	KVI-CP-3-GS-GD-5
3	Connecting cable for axis interface/function I/O ¹⁾	8	straight	■	540 334	KVI-CP-3-GS-GD-8
4	Additional 24 V power supply for AIF string ²⁾	–	straight	–	171 182	SPC-AIF-SUP-24 V
5	Terminating resistor for AIF string ³⁾	–	straight	–	175 403	KABS-M9-R100
6	Programming cable	3	straight	–	151 915	KDI-PPA-3-BU9

- 1) The total length of the lines must not exceed 30 m
2) Recommended where the total length of connecting cable is over 16 m
3) Must be connected at the last axis interface in the chain
(Contained in the controller package SPC200/POX)