

Motor controllers SFC-DC



Motor controllers SFC-DC

Key features



Hardware

- The motor controller SFC-DC serves as a positioning controller and closed loop position controller
- Available with or without control panel
- Thanks to IP54 protection, the motor controller can be mounted close to the drive

Parameter assignment via:

- Control panel:
 - suitable for simple position sequences
- FCT (Festo Configuration Tool) configuration package:
 - with RS 232 interface
 - Windows-based PC user interface, Festo Configuration Tool

- Easy actuation via:
 - I/O interface (only in combination with mini slide SLTE)
 - Profibus
 - CANopen
 - DeviceNet



For controlling

Mini slide SLTE

Parallel gripper HGPLE



FHPP – Festo Handling and Positioning Profile

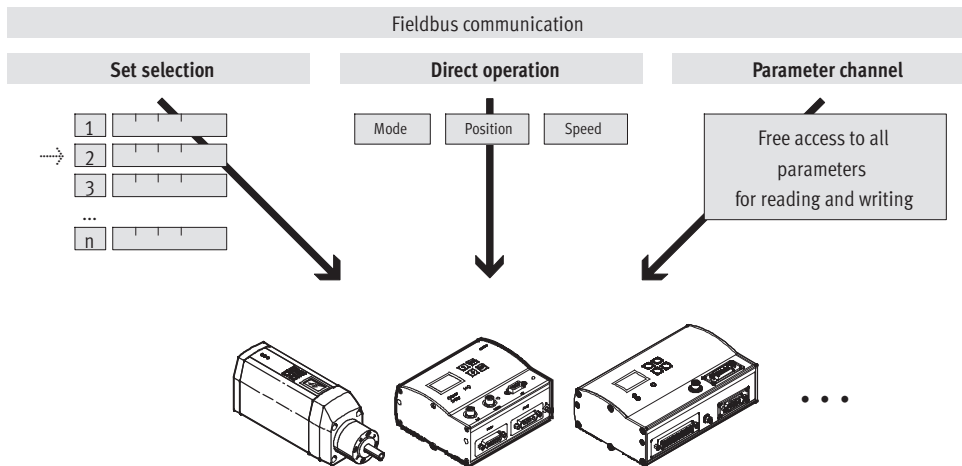
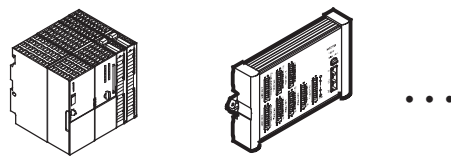
Optimised data profile

Festo has developed an optimised data profile, the “Festo Handling and Positioning Profile (FHPP)”, that is tailored to the target applications for handling and positioning tasks.

The FHPP data profile permits the actuation of Festo motor controllers, using a fieldbus interface, via standardised control and status bytes.

The following are defined, among others:

- Operating modes
- I/O data structure
- Parameter objects
- Sequence control



PROFIBUS®, DeviceNet®, CANopen® is a registered trademark of its respective trademark holder in certain countries.

Motor controllers SFC-DC

Key features



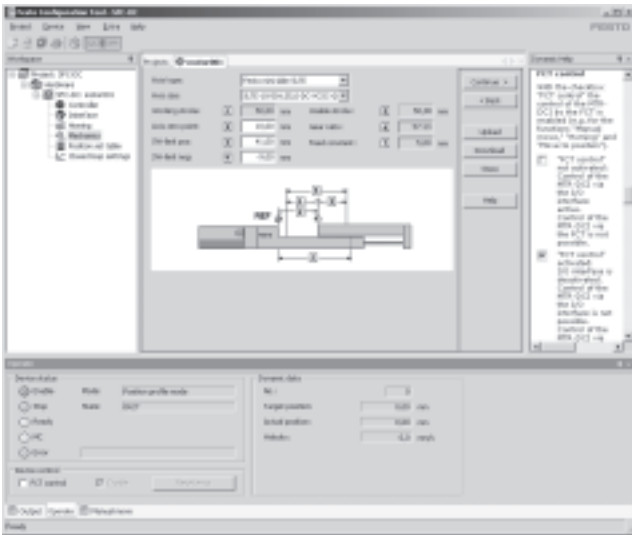
FCT software – Festo Configuration Tool

Software platform for electrical drives from Festo



- All the drives in a system can be managed and archived in a common project
- Project and data management for all supported device types
- Simple to use thanks to graphically supported parameter entry
- Universal mode of operation for all drives
- Working offline at your desk or online at the machine

Mechanical reference positions and limit positions



- Reference positions can be either edited or taught in
- Flexible adaptation to installation conditions
- Settings are displayed clearly

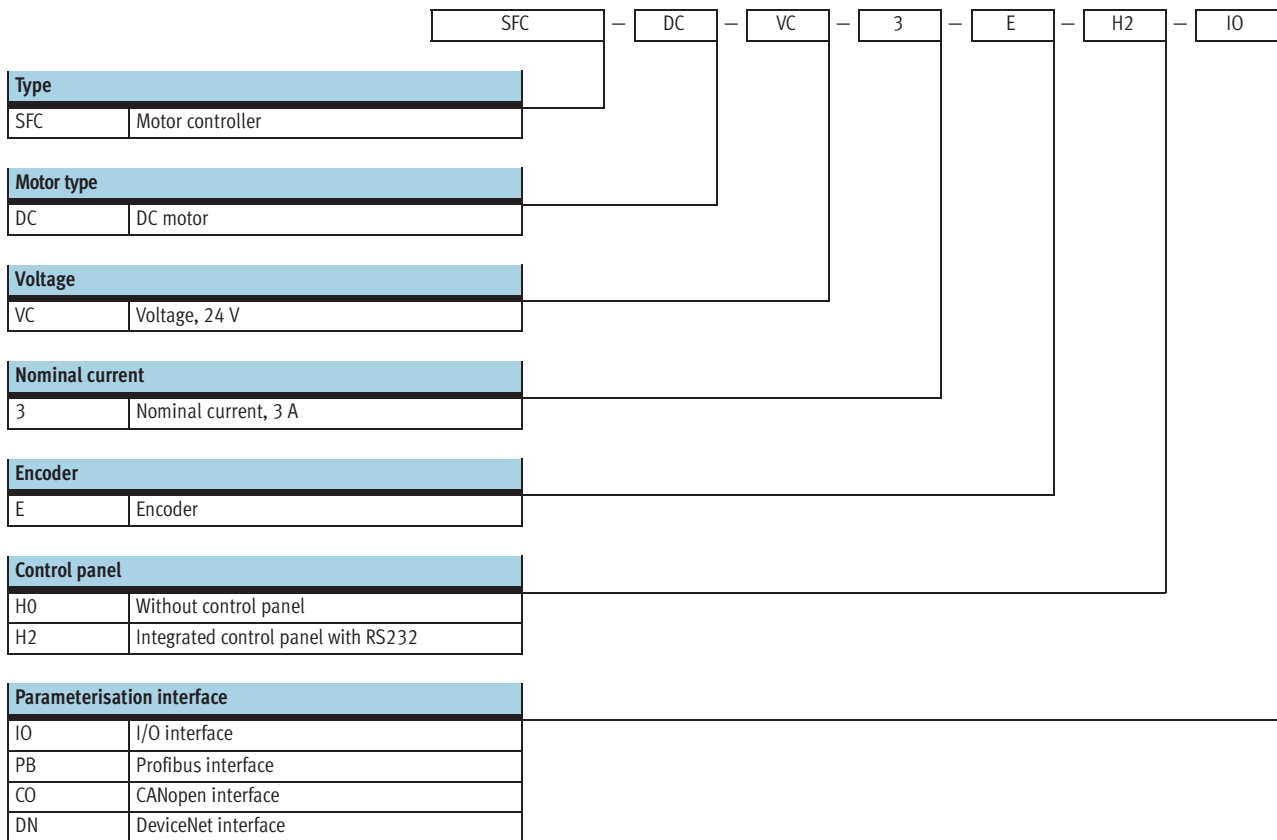
Position set table



- 31 position sets ensure flexibility in positioning
- Absolute or relative positioning values can be used
- The following parameters can be set flexibly for each application:
 - Position
 - Speed
 - Acceleration
 - Braking ramps
- Complete function test

Motor controllers SFC-DC

Type codes



Motor controllers SFC-DC

Technical data

Fieldbus interfaces



General technical data				
Type	SFC-...-IO	SFC-...-PB	SFC-...-CO	SFC-...-DN
Operating mode	Cascade closed-loop controller with – P current regulator		– PI closed-loop speed controller – P position regulator	
Position sensor	Encoder			
Encoder input	RS485/RS422, A/B signal with index pulse			
Display (optional)	Four-key interface with full-text display via graphic LCD display (128 x 64 pixels)			
Control elements (optional)	4 keys			
Interface	I/O interface for 31 position sets and homing	Profibus DP	CANopen	DeviceNet
Number of digital logic inputs	8	–	–	–
Number of digital logic outputs	4	–	–	–
Bus terminating resistor ¹⁾	–	Not integrated in the device		
Communication profile	–	DP-V0/V1 / FHPP	DS301; / FHPP	FHPP
	–	Step7 functional modules	DS301; DSP402	Device Type 0C _h
Max. fieldbus baud rate	[Mbit/s]	–	12	1
Type of mounting	H-rail, wall or surface bracket			
Product weight	[g]	600		

1) Details of bus terminating resistor → 9

Electrical data		
General		
Rated output	[W]	75
Parameterisation interface	RS232; 9600 baud	
Load supply		
Nominal voltage	[V DC]	24 ±10%
Nominal current	[A]	3
Peak current	[A]	5
Logic supply		
Nominal voltage	[V DC]	24 ±10%
Nominal current	[A]	0.1
Peak current	[A]	0.8
Max. current per output (digital logic outputs)	[A]	0.5


Motor controllers SFC-DC

Technical data



Operating and environmental conditions				
Type	SFC-...-IO	SFC-...-PB	SFC-...-CO	SFC-...-DN
Digital logic outputs	Electrically isolated	-	-	-
Logic inputs	Electrically isolated	-	-	-
Specification, logic input	IEC 61131	-	-	-
Protection class	IP54			
Vibration resistance	To DIN EN 60068-2-6			
Shock resistance	To DIN EN 60068-2-27			
Protective function	I ² t monitoring			
	Current monitoring			
	Voltage failure detection			
	Lag error monitoring			
	Software end position detection			
CE mark (see declaration of conformity)	In accordance with EU EMC directive			
Ambient temperature	[°C]	0 ... +40		
Storage temperature	[°C]	-25 ... +60		
Relative air humidity	[%]	0 ... 95 (non-condensing)		
Certification	C-Tick			

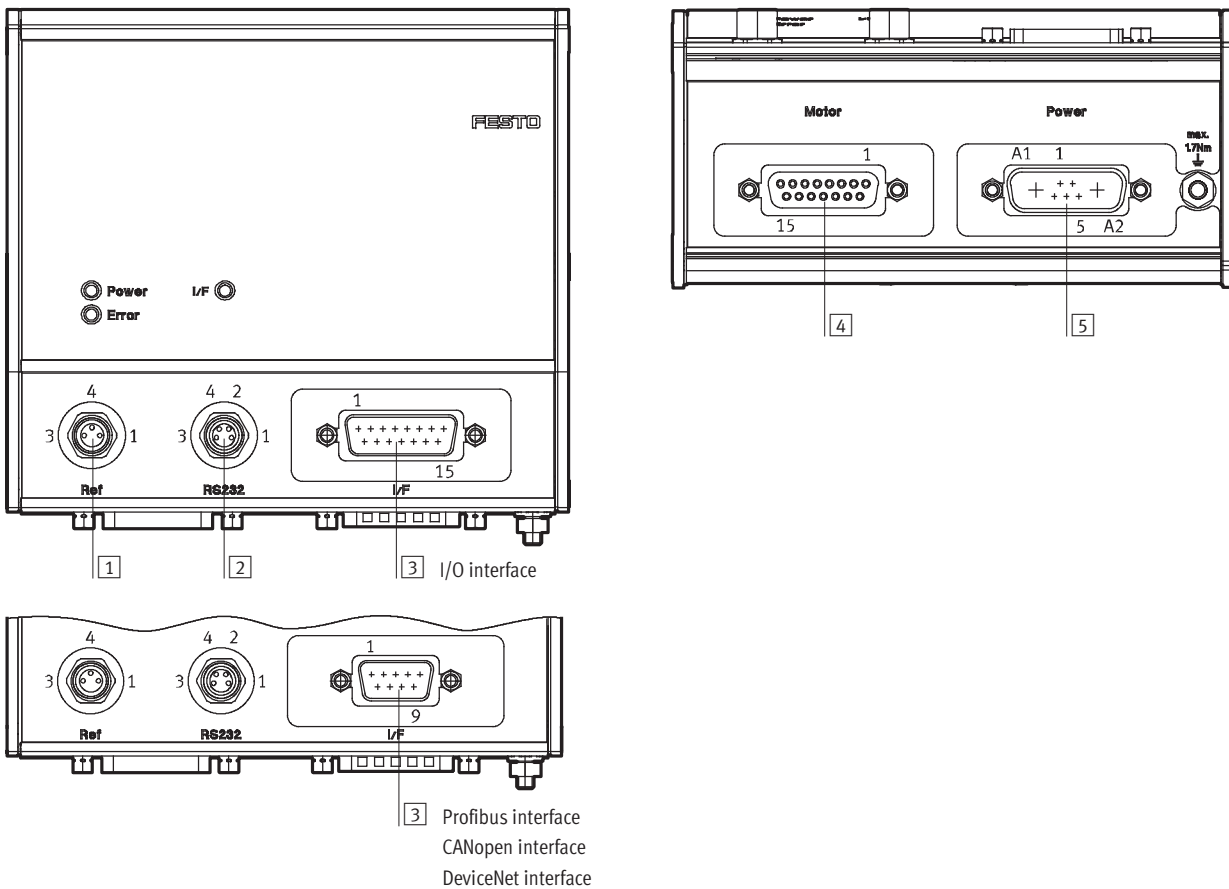Pin allocation



1 Reference switch, 3-pin M8 socket	
Pin	Function
1	24 V
4	Reference input
3	0 V
-	-

2 RS 232 interface, 4-pin M8 socket	
Pin	Function
1	0 V
2	Transmitted Data (TxD)
3	Received Data (RxD)
4	-

Motor controllers SFC-DC

Technical data

3 I/O interface, 15-pin Sub-D plug	
Pin	Function
1	24 V (supply for output)
2	Position set coding, bit 1
3	Position set coding, bit 2
4	Position set coding, bit 3
5	Position set coding, bit 4
6	Position set coding, bit 5
7	Stop bit
8	0 V
9	Enable bit
10	Start bit
11	MC
12	Ready
13	Acknowledge
14	Error
15	0 V

3 Profibus interface, 9-pin Sub-D socket	
Pin	Function
1	–
2	–
3	RxD/TxD-P
4	CNTR-P
5	DGND
6	VP
7	–
8	RxD/TxD-N
9	–

3 CANopen interface, 9-pin Sub-D plug	
Pin	Function
1	–
2	CAN_L
3	CAN_GND
4	–
5	CAN_SHLD
6	CAN_V–
7	CAN_H
8	–
9	CAN_V+

3 DeviceNet interface, 9-pin Sub-D plug	
Pin	Function
1	–
2	CAN_L
3	CAN_GND
4	–
5	CAN_SHLD
6	CAN_V–
7	CAN_H
8	–
9	CAN_V+

4 Motor interface, 15-pin Sub-D socket	
Pin	Function
1	VCC logic
2	Encoder channel A
3	Encoder channel A/
4	Encoder channel B
5	Encoder channel B/
6	Encoder channel C
7	Encoder channel C/
8	Logic 0 V
9	0 V
10	0 V
11	0 V
12	Motor +
13	Motor–
14	0 V
15	0 V

5 Power supply, 7-pin plug	
Pin	Function
A1	24 V (load)
A2	0 V (load)
1	24 V (logic)
2	0 V (logic)
3	–
4	PE
5	–

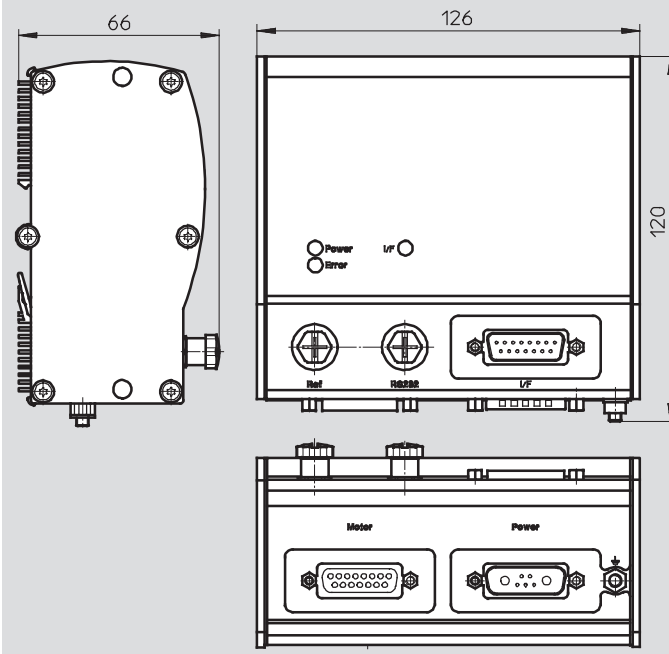
Motor controllers SFC-DC

Technical data


FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad



Ordering data













Brief description	Part No.	Type
Motor controller with I/O interface		
Without control panel	538 912	SFC-DC-VC-3-E-H0-IO
With control panel	538 913	SFC-DC-VC-3-E-H2-IO
Motor controller with Profibus interface		
Without control panel	540 366	SFC-DC-VC-3-E-H0-PB
With control panel	540 367	SFC-DC-VC-3-E-H2-PB
Motor controller with CANopen interface		
Without control panel	540 364	SFC-DC-VC-3-E-H0-CO
With control panel	540 365	SFC-DC-VC-3-E-H2-CO
Motor controller with DeviceNet interface		
Without control panel	540 368	SFC-DC-VC-3-E-H0-DN
With control panel	540 369	SFC-DC-VC-3-E-H2-DN

Motor controllers SFC-DC

Accessories

FESTO


Ordering data – Cables				
	Brief description	Cable length [m]	Part No.	Type
	Supply cable, for connecting load and logic supply	2.5	538 914	KPWR-MC-1-SUB-15HC-2,5
		5	538 915	KPWR-MC-1-SUB-15HC-5
		10	538 916	KPWR-MC-1-SUB-15HC-10
	Motor cable, for connecting motor and controller	2.5	538 917	KMTR-DC-SUB-15-M12-2,5
		5	538 918	KMTR-DC-SUB-15-M12-5
		10	539 316	KMTR-DC-SUB-15-M12-10
	Control cable, for I/O interface to any controller	2.5	538 919	KES-MC-1-SUB-15-2,5
		5	538 920	KES-MC-1-SUB-15-5
		10	538 921	KES-MC-1-SUB-15-10
	Programming cable, for parameterisation and commissioning via RS232 interface using FCT software	2.5	537 926	KDI-MC-M8-SUB-9-2,5


Ordering data – Plugs			
	Brief description	Part No.	Type
Plug for Profibus			
	<ul style="list-style-type: none"> – 9-pin Sub-D connection – Bus terminating resistor integrated – Position of DIL switch can be read externally – IP65 	532 216	FBS-SUB-9-GS-DP-B
Bus connection adapter for Profibus			
	<ul style="list-style-type: none"> – 9-pin Sub-D plug to 5-pin round plug/socket M12 – Bus terminating resistor must be connected externally 	533 118	FBA-2-M12-5POL-RK
Plug for CANopen and DeviceNet			
	<ul style="list-style-type: none"> – 9-pin Sub-D connection – Bus terminating resistor integrated – Position of DIL switch can be read externally – IP65 	532 219	FBS-SUB-9-BU-2x5POL-B
Bus connection adapter for CANopen and DeviceNet			
	<ul style="list-style-type: none"> – 9-pin Sub-D plug to 5-pin round plug/socket M12 – Bus terminating resistor must be connected externally 	525 632	FBA-2-M12-5POL
	<ul style="list-style-type: none"> – 9-pin Sub-D plug on 5-pin strip – Bus terminating resistor must be connected externally 	525 634	FBA-1-SL-5POL
	– 5-pin terminal strip for connecting the fieldbus cable to the bus connection adapter FBA-1-SL-5POL	525 635	FBSD-KL-2x5PIN


Motor controllers SFC-DC

Accessories

FESTO

Ordering data – Central supports			
	Brief description	Part No.	Type
	Centre supports for mounting controller	160 909	MUP-8/12

Ordering data – Software			
	Brief description	Part No.	Type
	<p>Operating package contains:</p> <ul style="list-style-type: none"> – CD-ROM – with user documentation for SFC-DC, in the languages de, en, es, fr, it, sv – with configuration software FCT (Festo Configuration Tool) – Brief description <p>This operating package is included in the scope of delivery.</p>	550 140	P.BP-SFC-DC

Ordering data – Documentation ¹⁾						
	Language	Part No.	Type	Part No.	Type	
		For I/O interface		For Profibus interface		
	DE	540 417	P.BE-SFC-DC-IO-DE	540 411	P.BE-SFC-DC-PB-DE	
	EN	540 418	P.BE-SFC-DC-IO-EN	540 412	P.BE-SFC-DC-PB-EN	
	ES	540 419	P.BE-SFC-DC-IO-ES	540 413	P.BE-SFC-DC-PB-ES	
	FR	540 420	P.BE-SFC-DC-IO-FR	540 414	P.BE-SFC-DC-PB-FR	
	IT	540 421	P.BE-SFC-DC-IO-IT	540 415	P.BE-SFC-DC-PB-IT	
	SV	540 422	P.BE-SFC-DC-IO-SV	540 416	P.BE-SFC-DC-PB-SV	
			For CANopen interface		For DeviceNet interface	
	DE	540 423	P.BE-SFC-DC-CO-DE	555 879	P.BE-SFC-DC-DN-DE	
	EN	540 424	P.BE-SFC-DC-CO-EN	555 880	P.BE-SFC-DC-DN-EN	
	ES	540 425	P.BE-SFC-DC-CO-ES	555 881	P.BE-SFC-DC-DN-ES	
	FR	540 426	P.BE-SFC-DC-CO-FR	555 882	P.BE-SFC-DC-DN-FR	
	IT	540 427	P.BE-SFC-DC-CO-IT	555 883	P.BE-SFC-DC-DN-IT	
	SV	540 428	P.BE-SFC-DC-CO-SV	555 884	P.BE-SFC-DC-DN-SV	

1) User documentation in paper form is not included in the scope of delivery

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com