

Fieldbus modules CTEU/Installation system CTCL



# Fieldbus modules CTEU/Installation system CTEL

Key features

FESTO



## The system

- CTEU fieldbus modules for using valve terminals
  - Festo-specific interface (I-Port)
  - Input modules CTSL for detecting sensor signals
  - Direct and easy networking of valve terminals and other devices via a bus connection
  - Wide range of applications thanks to high protection to IP65/67
  - Universal connection technology (Sub-D, M12, terminal strip)
  - Optional decentralised installation of bus node for connecting two valve terminals
  - Basic diagnostics: undervoltage, short circuit
- CTEU for the universal use of valve terminals. The Festo-specific, uniformly defined interface (I-Port) enables the fieldbus modules to be used for different types of valve terminal.
- The following protocols are currently supported:
- CANopen
  - DeviceNet
  - CC-LINK
  - PROFIBUS
  - EtherCAT
  - AS-Interface

## Valve terminal configurator

Online via: → [www.festo.com](http://www.festo.com)

A valve terminal configurator is available online to help you select a suitable valve terminal. Select the valve terminal with I-Port interface and order the associated CTEU bus nodes. The bus nodes then

only need to be placed on the valve terminal. The ident. code for the valve terminals specifies the valve functions, the number of valves and vacant positions, as well as the additional functions and

the type of compressed air supply. As is the case with all Festo products, all valve terminals are supplied:

- Fully preassembled
- Equipped with fittings on request

- Tested for electrical function
- Tested for pneumatic function
- Securely packaged
- Manuals can be downloaded free of charge

# Fieldbus modules CTEU/Installation system CTEL

Key features

## Fieldbus systems with CTEU



### CANopen

CANopen was originally developed for the automotive industry by a joint venture led by Bosch. It has been maintained by the organisation CiA (CAN in Automation) since 1995, and at the end of 2002 it was standardised as European standard EN 50325-4.



### DeviceNet

DeviceNet is an open fieldbus standard that was developed by Rockwell Automation on the basis of the CAN protocol. DeviceNet is standardised in European standard EN 50325.



### CC-Link

“Control and Communications Link” (CC-Link) was developed by Mitsubishi Electric and has been available as an open fieldbus network since 1999.



### PROFIBUS

Process Fieldbus (PROFIBUS) is a fieldbus that was developed by Siemens and has been standardised in the IEC 61158 series of international standards. It enables communication between devices without the need for any specific adaptations to the interface.



### EtherCAT

EtherCAT is a bus with real-time capability; it was developed by Beckhoff and the EtherCAT Technology Group (ETG). EtherCAT is an open technology and has been standardised in international standards IEC 61158 and IEC 61784 and in ISO 15745-4.



### AS-interface

AS-interface is a manufacturer-independent, easy and robust installation system. It was developed and represented by the AS-International Association, a loose association of diverse companies from different sectors. AS-Interface has been standardised by IEC 62026-2 and EN 50295.

# Fieldbus modules CTEU/Installation system CTEL

Key features



## Integration of the I-Port interface/IO-Link

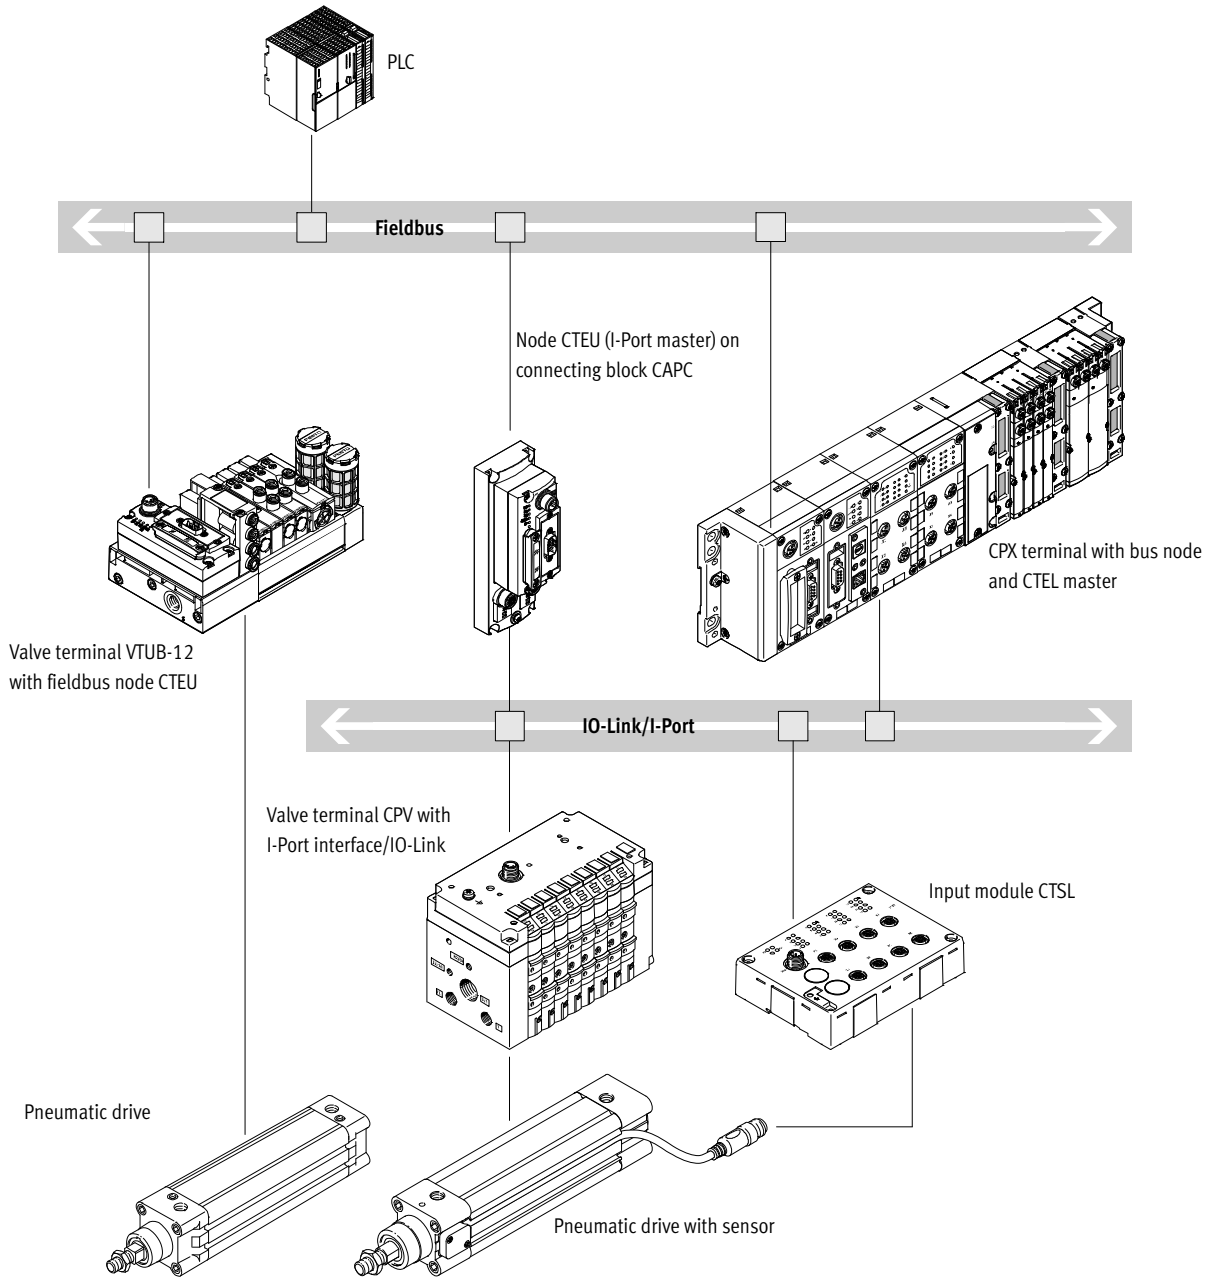
Different bus nodes are used for integration in the control systems of various manufacturers.

The following protocols are supported with the compatible bus node CTEU:

- CANopen
- DeviceNet
- EtherCAT
- CC-LINK
- PROFIBUS
- AS-Interface

A second valve terminal can be connected via an electrical connecting block (decentralised adapter). (→ p.6)

## System overview, example




- Communication with higher-order controller via fieldbus
- Use a fieldbus node CTEU compatible with the fieldbus protocol
- Up to 64 inputs/outputs (solenoid coils), depending on the valve terminal

# Fieldbus modules CTEU/Installation system CTEL

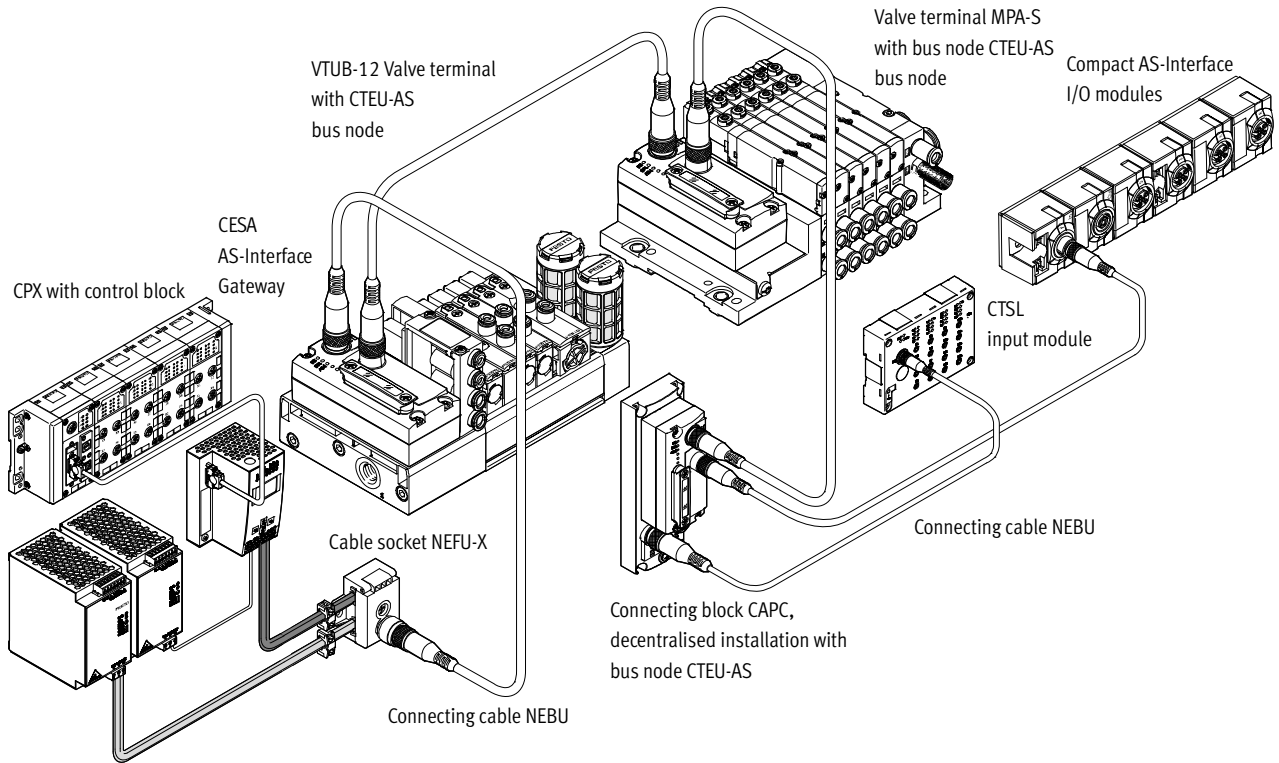Key features

## System overview

Example CTEU-AS interface




Power supply unit SVG for AS-Interface systems

# Fieldbus modules CTEU/Installation system CTSL

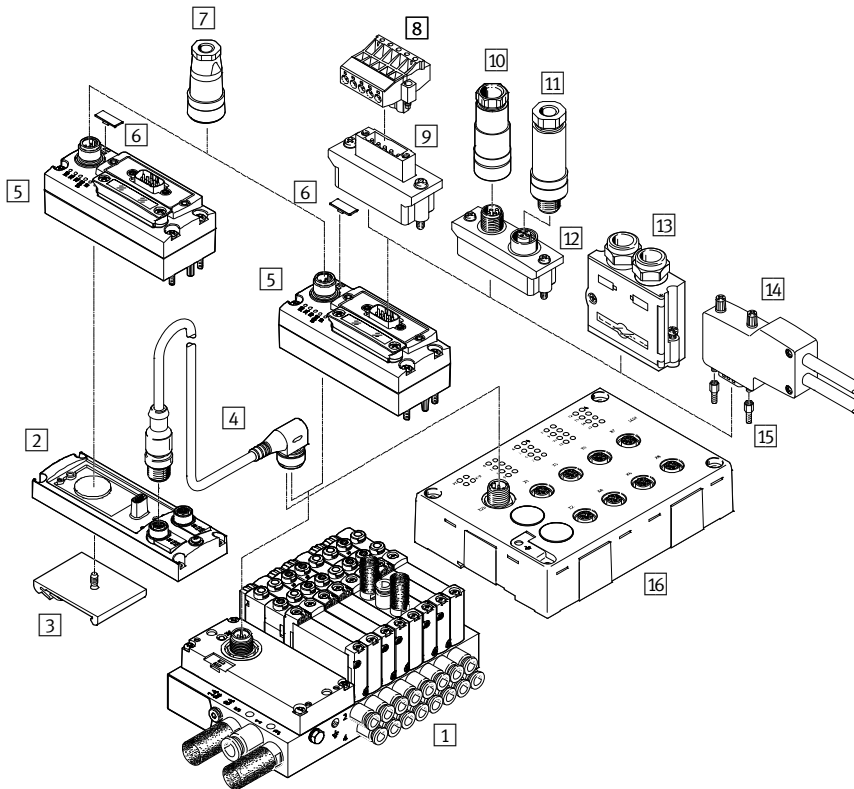Peripherals overview

## Overview of CTEU with valve terminal VTUG



| Accessories |                     |                   |   |                        |
|-------------|---------------------|-------------------|---|------------------------|
|             | Type                | Brief description | → Page/Internet   |                        |
| 1           | Manifold rail       | VABM              | With I-Port interface, for connecting max. 35 valves    | vtug                   |
| 2           | Connecting block    | CAPC              | For connecting a further terminal (2x I-Port interface) | 13                     |
| 3           | H-rail adapter      | CAFM              | For connecting block CAPC                               | 13                     |
| 4           | Connecting cable    | NEBU              | For IO-Link   | 11, 13                 |
| 5           | Bus node            | CTEU              | –   | 15, 19, 25, 29, 35, 38 |
| 6           | Inscription label   | ASLR              | For bus node  | aslr                   |
| 7           | Power supply socket | NTSD              | For power supply  | 18, 23, 28, 33, 37     |
| 8           | Terminal strip      | FBSD-KL           | For Open Style connection                               | 18/23                  |
| 9           | Bus connection      | FBA-1             | Open Style for 5-pin terminal strip                     | 18/23                  |
| 10          | Fieldbus socket     | FBSD-GD, NECU     | For Micro Style connection, M12, 5-pin                  | 18/23, 33              |
| 11          | Plug connector      | FBS, NECU         | For Micro Style connection, M12, 5-pin                  | 18/23, 33              |
| 12          | Bus connection      | FBA-2             | Micro Style, 2xM12, 5-pin                               | 18/23, 33              |
| 13          | Plug connector      | FBS-SUB-9-BU      | Sub-D   | 18/23, 33              |
| 14          | Plug connector      | FBS-SUB-9-WS      | Sub-D, angled   | 18, 33                 |
| 15          | Threaded sleeve     | UNC               | Sub-D mounting bolts                                    | 18, 23, 28, 33         |
| 16          | Input module        | CTSL-D-16E        | –   | 57                     |

# Fieldbus modules CTEU/Installation system CTEL

Key features – Diagnostics

## System diagnostics CTEU

### Diagnostics LED on fieldbus node CTEU

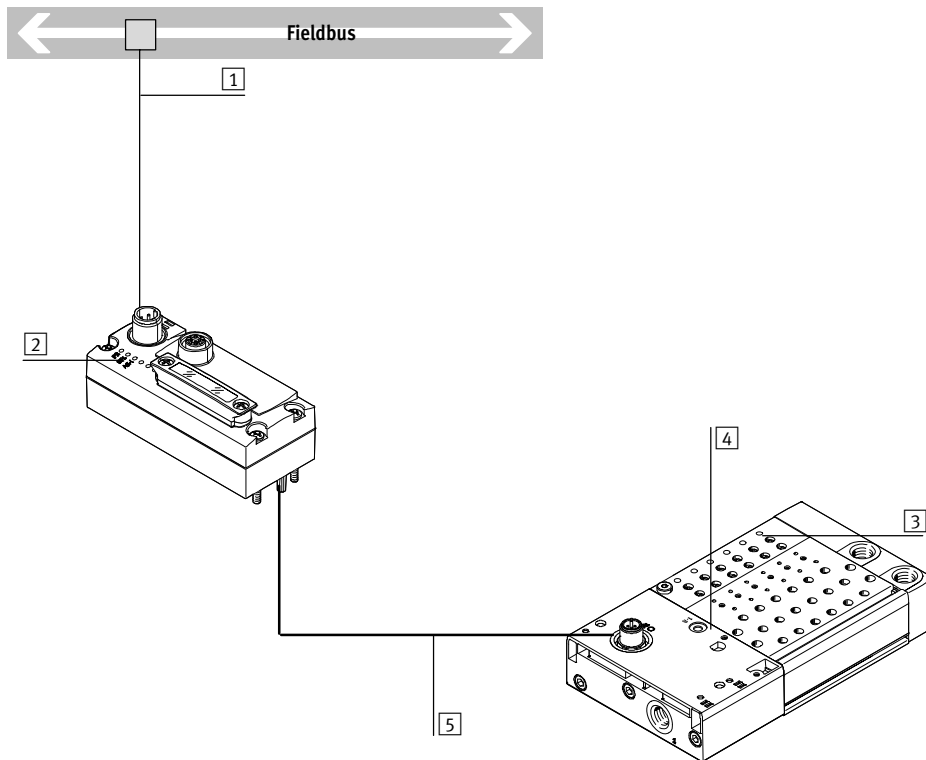
The fieldbus-specific LEDs indicate the communication status and the fieldbus function.

A further LED indicates the status of the power supply:

- Undervoltage/short circuit
- Power supply ensured
- Interruption of voltage

### Diagnostic messages via the fieldbus

- Configuration error
- Short circuit/overload of an output module
- Short circuit/undervoltage
- Undervoltage/load voltage of the valves



- 1 Diagnostics via fieldbus
- 2 Bus-specific LEDs
- 3 Switching status display using one LED per valve (on the manifold rail)
- 4 Additional communication and voltage status LED for decentralised installation
- 5 I-Port interface to the fieldbus module

# Fieldbus modules CTEU/Installation system CTEL

Key features – Power supply

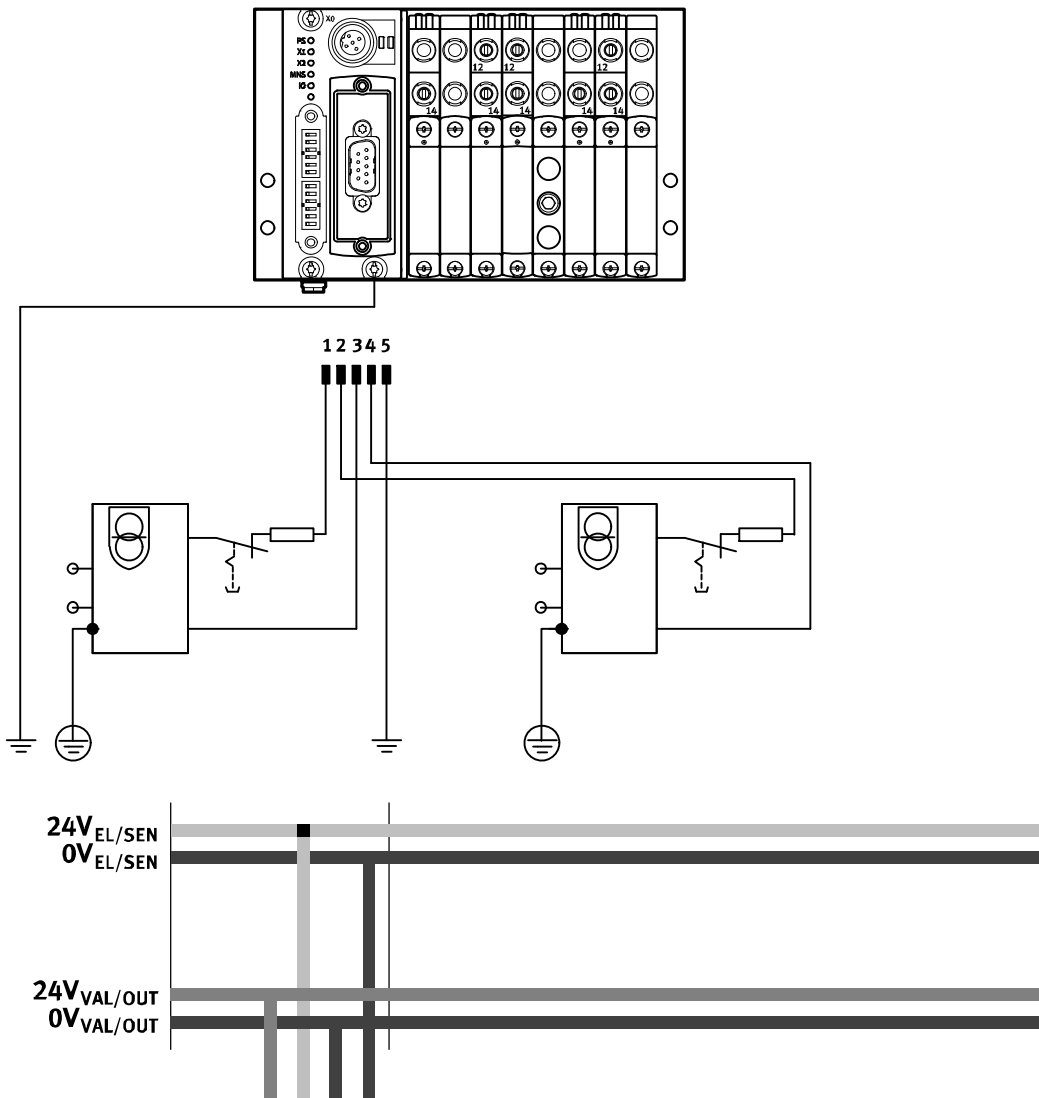
## Operating voltage and load current supply

The operating voltages for the valve manifold with I-Port interface are centrally connected to the bus node via a 5-pin M12 plug connector.

The operating voltages are required for the fieldbus node electronics and the load supply to the valves (supplied separately from the electronics supply).

The power supplies do not have a common 0V line and are thus completely galvanically isolated from one another.

## Example power supply concept CTEU with valve terminal VTUG






# Fieldbus modules CTEU/Installation system CTEL

Key features – Power supply

## Power supply concept

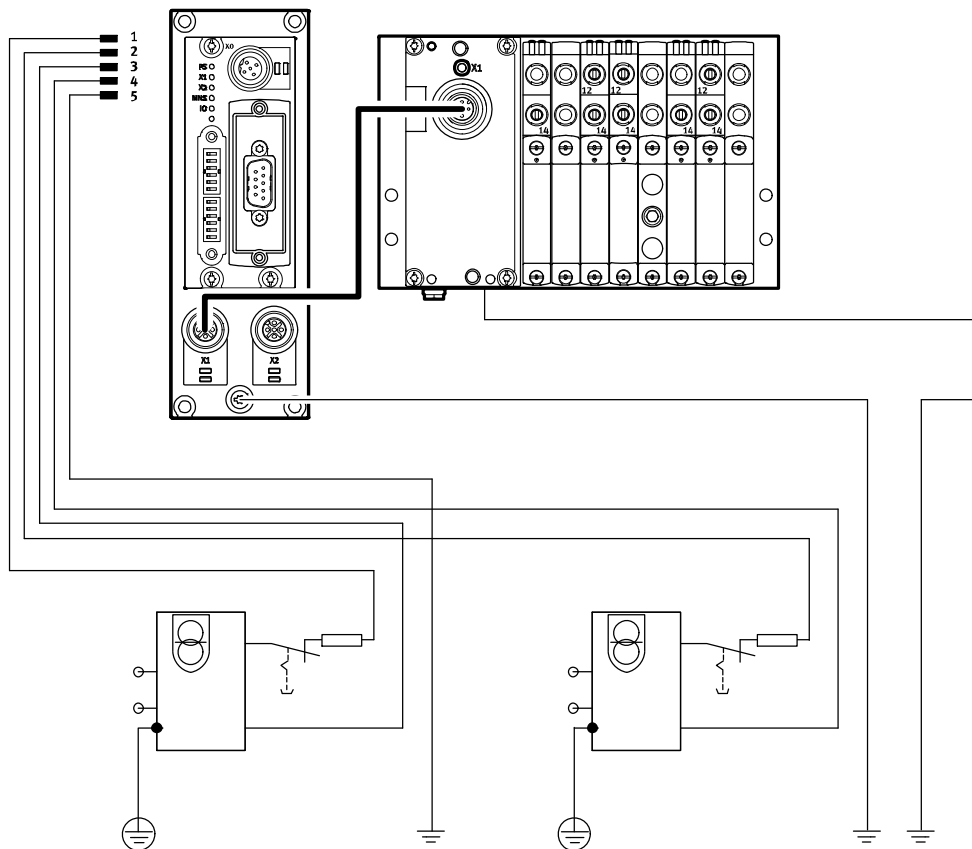
Example power supply concept CTEU with connecting block (decentralised adapter) CAPC and valve terminal VTUG



# Fieldbus modules CTEU/Installation system CTEL

Technical data – I-Port interface/IO-Link for valve terminal VTUG

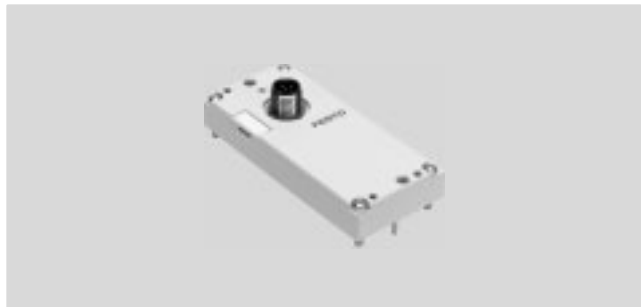Festo-specific, standardised interface for direct connection to the fieldbus by mounting the fieldbus node CTEU or to an IO-Link master via a cable (in IO-Link mode).



## I-Port interface/IO-Link

Versions:

- I-Port interface for fieldbus nodes (CTEU)
- IO-Link mode for direct connection to a higher-order IO-Link master

The electrical supply/transmission of communication data takes place via an M12 plug connector.

The following protocols are supported:

- CANopen
- DeviceNet

- CC-Link
- PROFIBUS
- EtherCAT
- AS-Interface

## General technical data

|  |                 |  |
|--|-----------------|--|
| Communication types                            |                 | IO-Link  |
| Electrical connection                          |                 | <ul style="list-style-type: none"> <li>• M12 plug connector, 5-pin</li> <li>• A-coded</li> <li>• Metal thread for screening</li> </ul> |
| Baud rates                                     | COM3            | [kbps] 230.4   |
|  | COM2            | [kbps] 38.4  |
| Intrinsic current consumption, logic supply PS |                 | [mA] 30  |
| Intrinsic current consumption, valve supply PL |                 | [mA] 30  |
| Max. number of solenoid coils                  | VAEM-L1-S-8-PT  | 16   |
|  | VAEM-L1-S-16-PT | 32   |
|  | VAEM-L1-S-24-PT | 48   |
| Max. number of valve positions                 | VAEM-L1-S-8-PT  | 8  |
|  | VAEM-L1-S-16-PT | 16   |
|  | VAEM-L1-S-24-PT | 24   |
| Ambient temperature                            |                 | [°C] -5 ... +50  |
| Degree of protection to EN 60529               |                 | IP67   |

## LED display

|               | Colour    | Status             | Function  |
|---------------|-----------|--------------------|---|
| Status LED X1 | Red/green | Off                | No 24 V logic   |
|               | 2         | Status green       | Everything OK   |
|               | 3         | Flashing green     | Communication error (in the I-Port or IO-Link protocol) |
|               | 4         | Flashing red/green | Load supply error (undervoltage or no load supply)      |
|               | 5         | Static red         | Load supply error and communication error               |

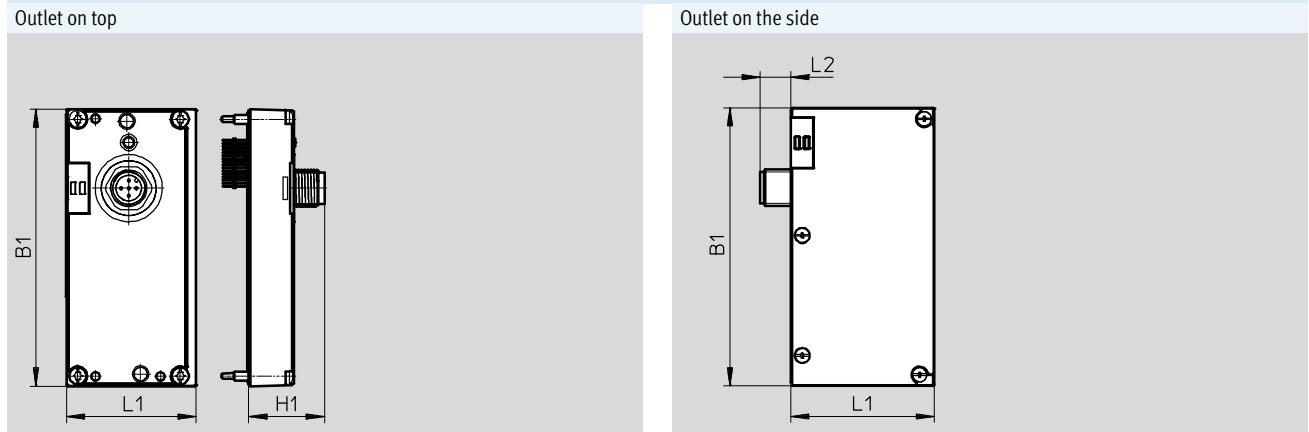
## Pin allocation – I-Port interface/IO-Link

|  | Pin | Allocation              | Description  |
|--|-----|-------------------------|--|
|  | 1   | 24V <sub>EL</sub> /SEN  | Operating voltage supply (electronics, sensors/inputs) |
|  | 2   | 24V <sub>VAL</sub> /OUT | Load voltage supply (valves/outputs)                   |
|  | 3   | 0V <sub>EL</sub> /SEN   | Operating voltage supply (electronics, sensors/inputs) |
|  | 4   | C/Q                     | Data communication                                     |
|  | 5   | 0V <sub>VAL</sub> /OUT  | Load voltage supply (valves/outputs)                   |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – I-Port interface/IO-Link for valve terminal VTUG

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)



| Type          | Outlet on top |      |    | Outlet on the side |      |    |
|---------------|---------------|------|----|--------------------|------|----|
|               | B1            | L1   | H1 | B1                 | L1   | L2 |
| VAEM-L1-S-... | 91            | 47.1 | 25 | 91.5               | 47.1 | 10 |

| Accessories – I-Port interface/IO-Link                                |   |          |                            |
|---|---|----------|----------------------------|
|   | Description   | Part No. | Type                       |
| Electrical interface for I-Port interface/IO-Link, outlet on top      |   |          |                            |
|   | Actuation of up to 8 double solenoid valve positions  | 573384   | VAEM-L1-S-8-PT             |
|   | Actuation of up to 16 double solenoid valve positions   | 573939   | VAEM-L1-S-16-PT            |
|   | Actuation of up to 24 double solenoid valve positions   | 573940   | VAEM-L1-S-24-PT            |
| Electrical interface for I-Port interface/IO-Link, outlet on the side |   |          |                            |
|   | Actuation of up to 8 double solenoid valve positions  | 574207   | VAEM-L1-S-8-PTL            |
|   | Actuation of up to 16 double solenoid valve positions   | 574208   | VAEM-L1-S-16-PTL           |
|   | Actuation of up to 24 double solenoid valve positions   | 574209   | VAEM-L1-S-24-PTL           |
| Connection technology for I/O-Link                                    |   |          |                            |
|   | T-adapter M12, 5-pin for IO-Link and load supply  | 171175   | FB-TA-M12-5POL             |
| Straight Plug connector , for I-Port/IO-Link                          |   |          |                            |
|   | Straight plug connector, M12, 5-pin<br>(in combination with adapter for separate load supply) | 175487   | SEA-M12-5GS-PG7            |
| Inscription label for I-Port/IO-Link                                  |   |          |                            |
|   | 40 pieces in frame  | 565306   | ASLR-C-E4                  |
| Connecting cable  |   |          |                            |
|   |   | 574321   | NEBU-M12G5-E-5-Q8N-M12G5   |
|   |   | 574322   | NEBU-M12G5-E-7.5-Q8N-M12G5 |
|   |   | 574323   | NEBU-M12G5-E-10-Q8N-M12G5  |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Connecting block CAPC

### Function

The connecting block CAPC enables decentralised installation of fieldbus nodes CTEU on a valve terminal or input modules with I-Port interface.

### Application

- M12 connection technology (two interfaces)
- Enables the installation of valve terminals or other devices over a distance of 20 metres
- Accessory CAFM enables the connecting block to be installed on an H-rail



| General technical data    |        |                                |
|---------------------------|--------|--------------------------------|
| Type                      |        | CAPC-F1-E-M12                  |
| Dimensions W x L x H      | [mm]   | 50x148x28                      |
| Fieldbus interface        |        | 2 x M12 socket, 5-pin, A-coded |
| Operating voltage range   | [V DC] | 18 ... 30                      |
| Max. power supply         | [A]    | 2                              |
| Nominal operating voltage | [V DC] | 24                             |
| Product weight            | [g]    | 85                             |
| Cable length              | [m]    | 20                             |

| Materials         |                |
|-------------------|----------------|
| Housing           | PA reinforced  |
| Note on materials | RoHS compliant |

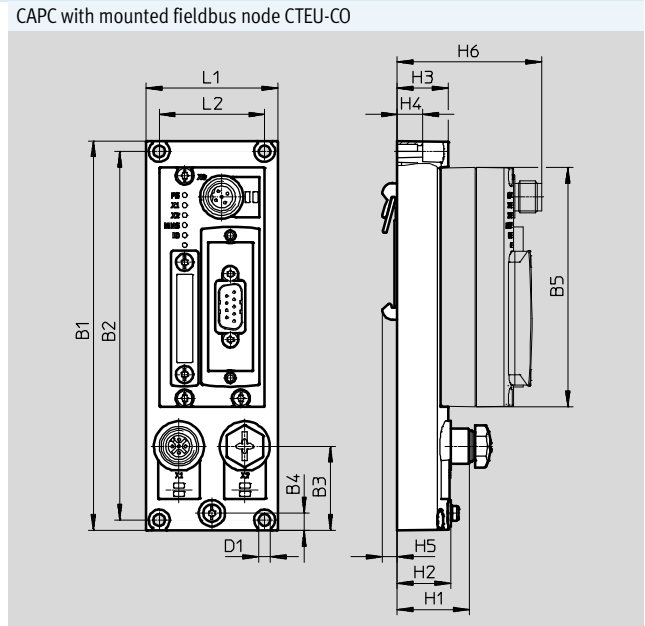
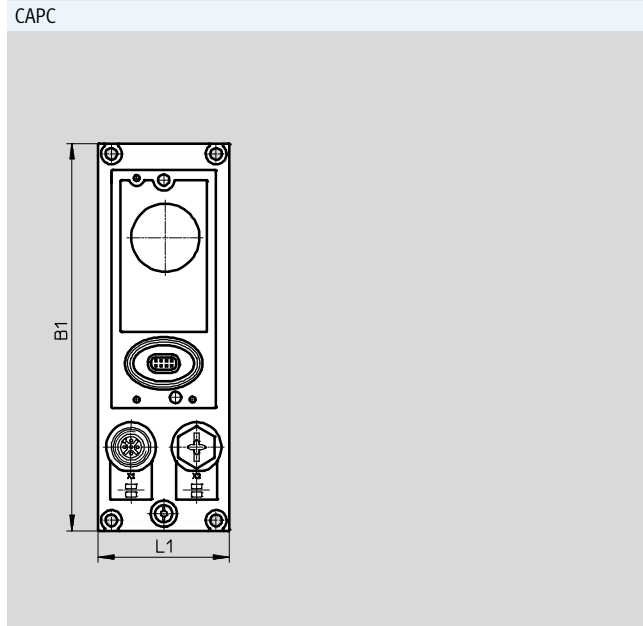
| Operating and environmental conditions     |                                   |
|--|-----------------------------------|
| Degree of protection to EN 60529           | IP65, IP67                        |
| Ambient temperature                        | [°C] -5 ... +50                   |
| Storage temperature                        | [°C] -20 ... +70                  |
| Corrosion resistance class CRC             | 2 <sup>1)</sup>                   |
| CE marking (see declaration of conformity) | To EU EMC Directive <sup>2)</sup> |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Connecting block CAPC

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)



| Type | B1  | B2  | B3 | B4  | B5 | D1-∅ | H1   | H2   | H3   | H4  | H5  | H6   | L1 | L2 |
|------|-----|-----|----|-----|----|------|------|------|------|-----|-----|------|----|----|
| CAPC | 148 | 140 | 32 | 6.6 | 91 | 4.4  | 27.3 | 20.3 | 19.3 | 9.6 | 5.7 | 54.8 | 50 | 40 |

**Pin allocation – I-Port interface/IO-Link**

|  | Pin         | Allocation             | Description  |
|--|-------------|------------------------|--|
|  | 1           | 24V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
|  | 2           | 24V <sub>VAL/OUT</sub> | Load voltage supply (valves/outputs)                   |
|  | 3           | 0V <sub>EL/SEN</sub>   | Operating voltage supply (electronics, sensors/inputs) |
|  | 4           | C/Q                    | Data communication                                     |
|  | 5           | 0V <sub>VAL/OUT</sub>  | Load voltage supply (valves/outputs)                   |
|  | Housing, FE |                        | Functional earth                                       |

**Accessory CAPC**

|                         | Description | Part No. | Type                       |
|-------------------------|-------------|----------|----------------------------|
| <b>Connecting block</b> |             |          |                            |
|                         | -           | 570042   | CAPC-F1-E-M12              |
| <b>H-rail mounting</b>  |             |          |                            |
|                         | -           | 570043   | CAF-M-F1-H                 |
| <b>Connecting cable</b> |             |          |                            |
|                         | -           | 574321   | NEBU-M12G5-E-5-Q8N-M12G5   |
|                         | -           | 574322   | NEBU-M12G5-E-7.5-Q8N-M12G5 |
|                         | -           | 574323   | NEBU-M12G5-E-10-Q8N-M12G5  |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-CO

FESTO



The bus node handles communication between the valve terminal and a higher-order CANopen® master.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.



## Application

### Fieldbus connection

The bus connection is established via a 9-pin Sub-D plug connector (pin) as per the CAN in Automation (CiA) specification DS 102 with additional 24 V CAN transceiver supply (option as per DS 102).

The bus connector plug (with degree of protection IP65/IP67 from Festo or IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

There are 4 contacts each available for the conductors (CAN\_L/CAN\_H and 24 V/0 V optional) of the incoming and outgoing bus cables.

The fieldbus parameters and the basic device parameter settings are set on the bus node via DIL switches.

## Implementation

Protocol chip used:

- CAN transceiver 82C251

Baud rates supported:

- 125 kbps
- 250 kbps
- 500 kbps
- 1 Mbps

Max. CANopen cable length (trunk cable):

- 40 m at 1 Mbps
- 100 m at 500 kbps
- 250 m at 250 kbps
- 500 m at 125 kbps

Max. branch cable length (drop cable):

- 0.30 m at 1 Mbps
- 0.75 m at 500 kbps
- 2.00 m at 250 kbps
- 3.75 m at 125 kbps

The following variants can be realised using an adapter:

- 2 x Micro Style M12, degree of protection IP65, 5-pin, socket and pin
- Open Style plug connector, degree of protection IP20, 5-pin, pin

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-CO

| General technical data                                     |  |                   |   |
|--|--|-------------------|---|
| Fieldbus interface   |  |                   | <ul style="list-style-type: none"> <li>• Sub-D socket, 9-pin</li> <li>• Sub-D plug connector, for self-assembly</li> <li>• 2x M12x1, 5-pin</li> <li>• 5-pin terminal strip</li> </ul>                           |
| Protocol   |  |                   | CANopen   |
| Baud rates   |  | [kbps]            | 125, 250, 500 and 1000  |
| Internal cycle time  |  |                   | 1 ms per 1 byte of user data  |
| Operating voltage  |  | Nominal value     | [V DC] 24   |
|  |  | Permissible range | [V DC] 18 ... 30  |
| Intrinsic current consumption at nominal operating voltage |  | [mA]              | Typically 65  |
| Max. power supply  |  | [A]               | 4   |
| Parameterisation   |  |                   | Diagnostic behaviour<br>Fail state  |
| Max. address capacity, inputs                              |  |                   | 8 byte  |
| Max. address capacity, outputs                             |  |                   | 8 byte  |
| Additional functions                                       |  |                   | <ul style="list-style-type: none"> <li>• Emergency message</li> <li>• Acyclic data access via "SDO"</li> </ul>  |
| Operating elements   |  |                   | DIL switches  |
| Configuration support                                      |  |                   | EDS files   |
| Device-specific diagnostics                                |  |                   | <ul style="list-style-type: none"> <li>• System diagnostics</li> <li>• Undervoltage</li> <li>• Communication errors</li> </ul>  |
| LED display  |  | Fieldbus-specific | <ul style="list-style-type: none"> <li>• MNS: Network status</li> <li>• IO: I/O status</li> </ul>   |
|  |  | Product-specific  | <ul style="list-style-type: none"> <li>• PS: Operating voltage for electronics and load supply</li> <li>• X1: System status of module at I-Port 1</li> <li>• X2: System status of module at I-Port 2</li> </ul> |
| Degree of protection to EN 60529                           |  |                   | IP65/IP67   |
| Note on materials  |  |                   | RoHS compliant  |
| Information on housing materials                           |  |                   | <ul style="list-style-type: none"> <li>• PC</li> <li>• PA reinforced</li> </ul>   |
| Product weight   |  | [g]               | 90  |
| Temperature range  |  | Environment       | [°C] -5 ... +50   |
|  |  | Storage           | [°C] -20 ... +70  |
| Dimensions W x L x H                                       |  | [mm]              | 40 x 91 x 50  |
| Corrosion resistance class CRC                             |  |                   | 2 <sup>1)</sup>   |
| CE marking   |  |                   | To EU EMC Directive <sup>2)</sup>   |
| Certification  |  |                   | C-Tick  |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

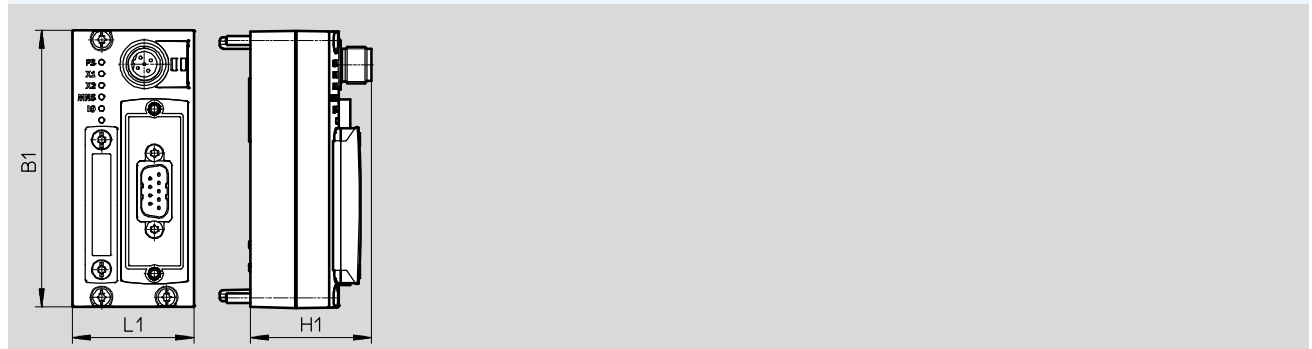
# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-CO

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

CTEU-CO



| Type    | B1 | H1   | L1 |
|---------|----|------|----|
| CTEU-CO | 91 | 39.8 | 40 |

## Pin allocation

|  | Pin     | Allocation             | Description  |
|--|---------|------------------------|--|
| <b>Sub-D, 9-pin, CANopen interface</b> |         |                        |  |
|  | 1       | n.c.                   | Not connected  |
|  | 2       | CAN_L                  | Received/transmitted data low                          |
|  | 3       | CAN_GND                | 0 V CAN interface (connected to pin 6)                 |
|  | 4       | n.c.                   | Not connected  |
|  | 5       | CAN_SHLD               | Optional screened connection                           |
|  | 6       | GND                    | 0 V CAN interface, optional (connected to pin 3)       |
|  | 7       | CAN_H                  | Received/transmitted data high                         |
|  | 8       | n.c.                   | Not connected  |
|  | 9       | CAN_V+                 | 24 V DC supply CAN interface                           |
|  | Housing |                        |  |
| <b>Power supply, M12, B-coded</b>      |         |                        |  |
|  | 1       | 24V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
|  | 2       | 24V <sub>VAL/OUT</sub> | Load voltage supply (valves/outputs)                   |
|  | 3       | 0V <sub>EL/SEN</sub>   | Operating voltage supply (electronics, sensors/inputs) |
|  | 4       | 0V <sub>VAL/OUT</sub>  | Load voltage supply (valves/outputs)                   |
|  | 5       | FE                     | Functional earth                                       |



# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-CO











| Pin allocation of the CANopen interface                  |     |            |                                |
|--|-----|------------|--------------------------------|
| Fieldbus plug connector/adaptor                          | Pin | Allocation | Description                    |
| <b>Bus connection, FBA-2-M12-5POL</b>                    |     |            |                                |
|  | 1   | FE         | Functional earth               |
|  | 2   | CAN_V+     | 24 V DC supply CAN interface   |
|  | 3   | CAN_GND    | 0 V CAN interface              |
|  | 4   | CAN_H      | Received/transmitted data high |
|  | 5   | CAN_L      | Received/transmitted data low  |
| <b>Bus connection, FBA-1-SL-5POL with FBSD-KL-2X5POL</b> |     |            |                                |
|  | 1   | CAN_GND    | 0 V CAN interface              |
|  | 2   | CAN_L      | Received/transmitted data low  |
|  | 3   | FE         | Functional earth               |
|  | 4   | CAN_H      | Received/transmitted data high |
|  | 5   | CAN_V+     | 24 V DC supply CAN interface   |

| Connection and display components |   |
|-----------------------------------|---|
|                                   | <ol style="list-style-type: none"> <li>1 Status LED (operating status/diagnostics)</li> <li>2 DIL switch</li> <li>3 Power supply for bus node and connected devices (valve terminal)</li> <li>4 Fieldbus connection (Sub-D plug connector)</li> </ol> |

# Fieldbus modules CTEU/Installation system CTEL



Accessories – CTEU-CO

| Ordering data   |  | Part No. | Type                            |
|---|--|----------|---------------------------------|
| <b>Bus node</b>   |  |          |                                 |
|    | CANopen bus node   | 570038   | CTEU-CO                         |
| <b>Bus connection</b>   |  |          |                                 |
|    | Sub-D plug connector, straight                                 | 532219   | FBS-SUB-9-BU-2x5POL-B           |
|    | Sub-D plug connector, angled                                   | 533783   | FBS-SUB-9-WS-CO-K               |
|   | Micro Style bus connection, 2xM12, 5-pin, A-coded              | 525632   | FBA-2-M12-5POL                  |
|  | Fieldbus socket for Micro Style connection, A-coded            | 18324    | FBSD-GD-9-5POL                  |
|   | Plug connector for Micro Style connection, M12, 5-pin, A-coded | 175380   | FBS-M12-5GS-PG9                 |
|  | Open Style bus connection                                      | 525634   | FBA-1-SL-5POL                   |
|  | Terminal strip for Open Style connection, 5-pin                | 525635   | FBSD-KL-2x5POL                  |
| <b>Fitting</b>  |  |          |                                 |
|  | Threaded sleeve for Sub-D                                      | 533000   | UNC4-40/M3X8                    |
| <b>Plug socket</b>  |  |          |                                 |
|  | For power supply   | 538999   | NTSD-GD-9-M12-5POL-RK           |
| <b>Manual</b>   |  |          |                                 |
|  | Manual – Bus node CTEU-CO                                      | German   | 573767 P.BE-CTEU-CO-OP+MAINT-DE |
|   |  | English  | 573768 P.BE-CTEU-CO-OP+MAINT-EN |
|   |  | Spanish  | 573769 P.BE-CTEU-CO-OP+MAINT-ES |
|   |  | French   | 573770 P.BE-CTEU-CO-OP+MAINT-FR |
|   |  | Italian  | 573771 P.BE-CTEU-CO-OP+MAINT-IT |
|   |  | Chinese  | 573772 P.BE-CTEU-CO-OP+MAINT-ZH |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-DN



The bus node handles communication between the valve terminal and a higher-order DeviceNet® master.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are typically transmitted in the cyclic process image.



## Application

### Fieldbus connection

The bus connection is established via a 9-pin Sub-D socket with a typical allocation (to EN 50170).

The bus connector plug (with degree of protection IP65/IP67 from Festo or IP20 from other manufacturers) facilitates the connection of an

incoming and an outgoing bus cable. The fieldbus parameters and the basic device parameter settings are

set on the bus node via DIL switches.

## Implementation

Protocol chip used:  
 • CAN transceiver 82C251  
 Baud rates supported:  
 • 125 kbps  
 • 250 kbps  
 • 500 kbps

Max. DeviceNet cable length (trunk cable):  
 • 100 m at 500 kbps  
 • 250 m at 250 kbps  
 • 500 m at 125 kbps

Max. branch cable length (drop cable):  
 • 6 m at 500 kbps  
 • 6 m at 250 kbps  
 • 6 m at 125 kbps

The following variants can be realised using an adapter:  
 • 2 x Micro Style M12, degree of protection IP65, 5-pin, socket and pin  
 • Open Style plug connector, degree of protection IP20, 5-pin, pin

# Fieldbus modules CTEU/Installation system CTCL

Technical data – CTEU-DN

| General technical data                                     |  |                   |   |
|--|--|-------------------|---|
| Fieldbus interface   |  |                   | <ul style="list-style-type: none"> <li>• Sub-D socket, 9-pin</li> <li>• Sub-D plug connector, for self-assembly</li> <li>• 2x M12x1, 5-pin</li> <li>• 5-pin terminal strip</li> </ul>                           |
| Protocol   |  |                   | DeviceNet   |
| Baud rates   |  | [kbps]            | 125, 250, 500   |
| Internal cycle time  |  |                   | 1 ms per 1 byte of user data  |
| Operating voltage  |  | Nominal value     | [V DC] 24   |
|  |  | Permissible range | [V DC] 18 ... 30  |
| Intrinsic current consumption at nominal operating voltage |  | [mA]              | Typically 65  |
| Max. power supply  |  | [A]               | 4   |
| Parameterisation   |  |                   | Diagnostic behaviour<br>Failsafe and idle response  |
| Max. address capacity, inputs                              |  |                   | 8 byte  |
| Max. address capacity, outputs                             |  |                   | 8 byte  |
| Additional functions                                       |  |                   | <ul style="list-style-type: none"> <li>• Acyclic data access via "Explicit Message"</li> <li>• Quick connect</li> <li>• System status can be represented using process data</li> </ul>                          |
| Operating elements   |  |                   | DIL switches  |
| Configuration support                                      |  |                   | EDS files   |
| Device-specific diagnostics                                |  |                   | <ul style="list-style-type: none"> <li>• System diagnostics</li> <li>• Undervoltage</li> <li>• Communication errors</li> </ul>  |
| LED display  |  | Fieldbus-specific | <ul style="list-style-type: none"> <li>• MNS: Network status</li> <li>• IO: I/O status</li> </ul>   |
|  |  | Product-specific  | <ul style="list-style-type: none"> <li>• PS: Operating voltage for electronics and load supply</li> <li>• X1: System status of module at I-Port 1</li> <li>• X2: System status of module at I-Port 2</li> </ul> |
| Degree of protection to EN 60529                           |  |                   | IP 65/IP 67   |
| Note on materials  |  |                   | RoHS compliant  |
| Information on housing materials                           |  |                   | <ul style="list-style-type: none"> <li>• PC</li> <li>• PA reinforced</li> </ul>   |
| Product weight   |  | [g]               | 90  |
| Temperature range  |  | Environment       | [°C] -5 ... +50   |
|  |  | Storage           | [°C] -20 ... +70  |
| Dimensions W x L x H                                       |  | [mm]              | 40 x 91 x 50  |
| Corrosion resistance class CRC                             |  |                   | 2 <sup>1)</sup>   |
| CE marking   |  |                   | To EU EMC Directive <sup>2)</sup>   |
| Certification  |  |                   | C-Tick  |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

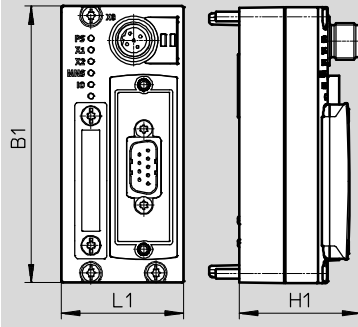
# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-DN

**Dimensions**

Download CAD data → [www.festo.com](http://www.festo.com)

CTEU-DN



| Type    | B1 | H1   | L1 |
|---------|----|------|----|
| CTEU-DN | 40 | 39.8 | 91 |

**Pin allocation**

|  | Pin     | Allocation             | Description  |
|--|---------|------------------------|--|
| <b>Sub-D, 9-pin, DeviceNet interface</b> |         |                        |  |
|  | 1       | n.c.                   | Not connected  |
|  | 2       | CAN_L                  | Received/transmitted data low                          |
|  | 3       | CAN_GND                | 0 V CAN interface (connected to pin 6)                 |
|  | 4       | n.c.                   | Not connected  |
|  | 5       | CAN_SHLD               | Optional screened connection                           |
|  | 6       | GND                    | 0 V CAN interface, optional (connected to pin 3)       |
|  | 7       | CAN_H                  | Received/transmitted data high                         |
|  | 8       | n.c.                   | Not connected  |
|  | 9       | CAN_V+                 | 24 V DC supply CAN interface                           |
|  | Housing |                        | Cable screening, connection to functional earth FE     |
| <b>Power supply, M12, B-coded</b>        |         |                        |  |
|  | 1       | 24V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
|  | 2       | 24V <sub>VAL/OUT</sub> | Load voltage supply (valves/outputs)                   |
|  | 3       | 0V <sub>EL/SEN</sub>   | Operating voltage supply (electronics, sensors/inputs) |
|  | 4       | 0V <sub>VAL/OUT</sub>  | Load voltage supply (valves/outputs)                   |
|  | 5       | FE                     | Functional earth                                       |

# Fieldbus modules CTEU/Installation system CTEL










Technical data – CTEU-DN

| Pin allocation for the DeviceNet interface        |     |            |                                |
|---|-----|------------|--------------------------------|
| Fieldbus plug connector/adaptor                   | Pin | Allocation | Description                    |
| Bus connection, FBA-2-M12-5POL                    |     |            |                                |
|   | 1   | FE         | Functional earth               |
|   | 2   | CAN_V+     | 24 V DC supply CAN interface   |
|   | 3   | CAN_GND    | 0 V CAN interface              |
|   | 4   | CAN_H      | Received/transmitted data high |
|   | 5   | CAN_L      | Received/transmitted data low  |
| Bus connection, FBA-1-SL-5POL with FBSD-KL-2X5POL |     |            |                                |
|   | 1   | CAN_GND    | 0 V CAN interface              |
|   | 2   | CAN_L      | Received/transmitted data low  |
|   | 3   | FE         | Functional earth               |
|   | 4   | CAN_H      | Received/transmitted data high |
|   | 5   | CAN_V+     | 24 V DC supply CAN interface   |

| Connection and display components |   |
|-----------------------------------|---|
|                                   | <ol style="list-style-type: none"> <li>1 Status LED (operating status/diagnostics)</li> <li>2 DIL switch group</li> <li>3 Power supply for bus node and connected devices (valve terminal)</li> <li>4 Fieldbus connection (Sub-D plug connector)</li> </ol> |

# Fieldbus modules CTEU/Installation system CTEL

Accessories – CTEU-DN

| Ordering data   |  | Part No.                        | Type                            |
|---|--|---------------------------------|---------------------------------|
| <b>Bus node</b>   |  |                                 |                                 |
|    | DeviceNet bus node                                     | 570039                          | CTEU-DN                         |
| <b>Bus connection</b>   |  |                                 |                                 |
|    | Sub-D plug connector, straight                         | 532219                          | FBS-SUB-9-BU-2x5POL-B           |
|    | Micro Style bus connection, 2xM12, 5-pin, A-coded      | 525632                          | FBA-2-M12-5POL                  |
|    | Fieldbus socket for Micro Style connection, M12, 5-pin | 18324                           | FBSD-GD-9-5POL                  |
|   | Plug connector for Micro Style connection, M12, 5-pin  | 175380                          | FBS-M12-5GS-PG9                 |
|   | Open Style bus connection                              | 525634                          | FBA-1-SL-5POL                   |
|  | Terminal strip for Open Style connection, 5-pin        | 525635                          | FBSD-KL-2x5POL                  |
| <b>Fitting</b>  |  |                                 |                                 |
|  | Threaded sleeve for Sub-D                              | 533000                          | UNC4-40/M3X8                    |
| <b>Plug socket</b>  |  |                                 |                                 |
|  | For power supply                                       | 538999                          | NTSD-GD-9-M12-5POL-RK           |
| <b>User documentation</b>   |  |                                 |                                 |
|  | Manual – Bus node CTEU-DN                              | German                          | 573744 P.BE-CTEU-DN-OP+MAINT-EN |
|   |  | English                         | 573745 P.BE-CTEU-DN-OP+MAINT-EN |
|   |  | Spanish                         | 573746 P.BE-CTEU-DN-OP+MAINT-ES |
|   |  | French                          | 573747 P.BE-CTEU-DN-OP+MAINT-FR |
|   |  | Italian                         | 573748 P.BE-CTEU-DN-OP+MAINT-IT |
|   | Chinese  | 573779 P.BE-CTEU-DN-OP+MAINT-ZH |                                 |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-CC



The bus node handles communication between the valve terminal and a higher-order master for Control & Communication Link (CC-Link®).

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.



## Application

### Fieldbus connection

The bus connection is established by means of a screw terminal with IP20 degree of protection, a 9-pin Sub-D plug connector with IP65/IP67 degree of protection from Festo or a Sub-D plug connector with IP20 degree of protection from other manufacturers.

The module has a system and load supply, a fieldbus connection and a connection to the valve terminal with serial I-Port interface.

Both connection types have the function of an integrated T-distributor and thus support the connection of an incoming and outgoing bus cable.

The integrated interface with RS485 transmission technology is designed for the typical CC-Link 3-wire connection technology (in accordance with CLPA CC-Link Spec. V1.1).

## Implementation

Protocol chip used:

- MFP3 from Mitsubishi

Maximum CC-Link cable length (minimum 0.2 m between devices):

- 100 m at 10 Mbps
- 150 m at 5 Mbps
- 200 m at 2.5 Mbps
- 600 m at 625 kbps
- 1200 m at 156 kbps

When using branch lines: maximum branch line length 8 m, maximum 6 stations per branch line

Length of main string:

- 100 m at 625 kbps, total length of branch line 50 m
- 500 m at 156 kbps, total length of branch line 200 m

Higher baud rates not permitted with branch line.

The following variants can be realised using an adapter:

- Spring-loaded terminal In/Out with IP65 degree of protection (adapter 532220)
- Screw-in clamping connector with IP20 degree of protection (adapter 197962)



# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-CC

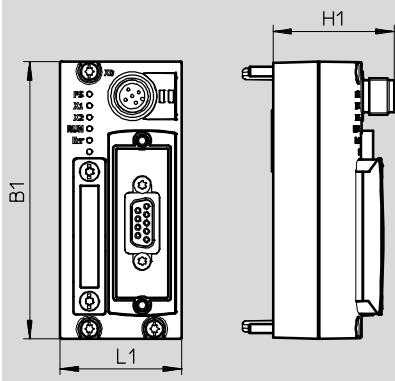
| General technical data                                     |  |                   |   |
|--|--|-------------------|---|
| Fieldbus interface   |  |                   | <ul style="list-style-type: none"> <li>• Sub-D socket, 9-pin</li> <li>• Sub-D plug connector, for self-assembly</li> <li>• Screw terminal strip, IP20</li> </ul>  |
| Protocol   |  |                   | CC-Link   |
| Baud rates   |  | [kpbs]            | 156 ... 10000   |
| Internal cycle time  |  |                   | 1 ms per 1 byte of user data  |
| Operating voltage  |  | Nominal value     | [V DC] 24   |
|  |  | Permissible range | [V DC] 18 ... 30  |
| Intrinsic current consumption at nominal operating voltage |  | [mA]              | Typically 70  |
| Max. power supply  |  | [A]               | 4   |
| Max. address capacity, inputs                              |  |                   | 16 byte   |
| Max. address capacity, outputs                             |  |                   | 16 bytes  |
| Operating elements   |  |                   | DIL switches  |
| Device-specific diagnostics                                |  |                   | <ul style="list-style-type: none"> <li>• System diagnostics</li> <li>• Undervoltage</li> <li>• Communication error</li> </ul>   |
| Additional functions                                       |  |                   | <ul style="list-style-type: none"> <li>• System status can be displayed using process data</li> </ul>   |
| Parameterisation   |  |                   | <ul style="list-style-type: none"> <li>• Activate diagnostics</li> <li>• Fail-safe and idle response</li> </ul>   |
| LED display  |  | Fieldbus-specific | <ul style="list-style-type: none"> <li>• Err: data transmission error</li> <li>• Run: bus active</li> </ul>   |
|  |  | Product-specific  | <ul style="list-style-type: none"> <li>• PS: Operating voltage for electronics and load supply</li> <li>• X1: System status of module at I-Port 1</li> <li>• X2: System status of module at I-Port 2</li> </ul> |
| Degree of protection to EN 60529                           |  |                   | IP65/IP67   |
| Note on materials  |  |                   | RoHS compliant  |
| Information on housing materials                           |  |                   | <ul style="list-style-type: none"> <li>• PC</li> <li>• PA reinforced</li> </ul>   |
| Temperature range  |  | Environment       | [°C] -5 ... +50   |
|  |  | Storage           | [°C] -20 ... +70  |
| Dimensions W x L x H                                       |  | [mm]              | 40 x 91 x 50  |
| Product weight   |  | [g]               | 90  |
| Corrosion resistance class CRC                             |  |                   | 2 <sup>1)</sup>   |
| CE marking   |  |                   | To EU EMC Directive <sup>2)</sup>   |
| Certification  |  |                   | C-Tick  |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-CC

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)  
CTEU-CC







| Type    | B1 | H1   | L1 |
|---------|----|------|----|
| CTEU-CC | 91 | 39.8 | 40 |

| Pin allocation                         |     |                         |  |
|--|-----|-------------------------|--|
|  | Pin | Allocation              | Description  |
| <b>Sub-D, 9-pin, CC-Link interface</b> |     |                         |  |
|  | 1   | n.c.                    | Not connected  |
|  | 2   | DA                      | Data transmission line A                                 |
|  | 3   | DG                      | Data transmission line ground (data reference potential) |
|  | 4   | n.c.                    | Not connected  |
|  | 5   | n.c.                    | Not connected  |
|  | 6   | n.c.                    | Not connected  |
|  | 7   | DB                      | Data transmission line B                                 |
|  | 8   | n.c.                    | Not connected  |
|  | 9   | n.c.                    | Not connected  |
|  |     | Housing                 |  |
| <b>Power supply, M12, AB-coded</b>     |     |                         |  |
|  | 1   | 24V <sub>EL</sub> /SEN  | Operating voltage supply (electronics, sensors/inputs)   |
|  | 2   | 24V <sub>VAL</sub> /OUT | Load voltage supply (valves/outputs)                     |
|  | 3   | 0V <sub>EL</sub> /SEN   | Operating voltage supply (electronics, sensors/inputs)   |
|  | 4   | 0V <sub>VAL</sub> /OUT  | Load voltage supply (valves/outputs)                     |
|  | 5   | FE                      | Functional earth   |

# Fieldbus modules CTEU/Installation system CTEL

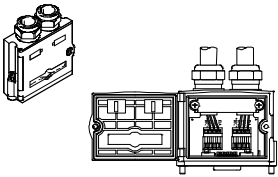Technical data – CTEU-CC-Link






| Pin allocation for the CC-Link interface  |      |  |
|---|------|--|
| Fieldbus plug connector/adapter   | Pin  | Description  |
| Bus connection with terminal strip, FBA-1-KL-5POL   |      |  |
|   | FE   | Functional earth   |
|   | SLD  | Cable screening  |
|   | DG   | Data transmission line ground (data reference potential)                         |
|   | DB   | Data transmission line B   |
|   | DA   | Data transmission line A   |
| Bus connection, FBS-SUB-9-GS-24XPOL-B   |      |  |
|    | DA   | Data transmission line A   |
|   | DB   | Data transmission line B   |
|   | DG   | Data transmission line ground (data reference potential)                         |
|   | n.c. | Not connected  |
|   | FE   | Connected to the housing of the Sub-D plug connector by means of the clamp strap |
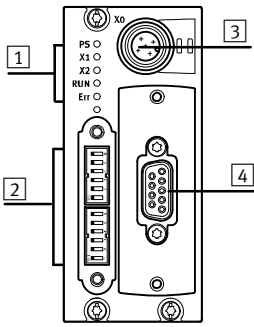
| Connection and display components   |   |
|---|---|
|  | <ol style="list-style-type: none"> <li>1 Status LED (operating status/diagnostics)</li> <li>2 DIL switch</li> <li>3 Power supply for bus node and connected devices (valve terminal)</li> <li>4 Fieldbus connection (Sub-D plug connector)</li> </ol> |

# Fieldbus modules CTEU/Installation system CTEL

FESTO

Accessories – CTEU-CC-Link

| Ordering data   |                                | Part No. | Type                  |
|---|--------------------------------|----------|-----------------------|
| <b>Bus node</b>   |                                |          |                       |
|    | CC-Link bus node               | 1544198  | CTEU-CC               |
| <b>Bus connection</b>   |                                |          |                       |
|    | Sub-D plug connector, straight | 532220   | FBS-SUB-9-GS-2x4POL-B |
|    | Screw terminal bus connection  | 197962   | FBA-1-KL-5POL         |
| <b>Fitting</b>  |                                |          |                       |
|   | Threaded sleeve for Sub-D      | 533000   | UNC4-40/M3X8          |
| <b>Plug socket</b>  |                                |          |                       |
|  | For power supply, M12x1, 5-pin | 18324    | FBSD-GD-9-5POL        |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-PB



The bus node handles communication between the valve terminal and a higher-order master for PROFIBUS DP®.

The module has basic diagnostic functions. It has 4 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.



## Application

### Fieldbus connection

The bus connection is established via a 9-pin Sub-D socket with a typical PROFIBUS allocation (to EN 50170).

The bus connector plug (with IP65/IP67 protection from Festo or IP20 protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

An active bus terminal can be connected using the DIL switch integrated in the plug connector.

The Sub-D interface is designed for controlling network components with a fibre-optic cable connection.

### Baud rates/overview of cable lengths

#### Baud rates supported:

- 9.6 kbps
- 19.2 kbps
- 93.75 kbps
- 187.5 kbps
- 500 kbps
- 1.5 Mbps
- 3 Mbps - 12 Mbps

#### Maximum fieldbus length:

- 1200 m
- 1200 m
- 1200 m
- 1000 m
- 400 m
- 200 m
- 100 m

#### Maximum branch line length:

- 500 m
- 500 m
- 100 m
- 33.3 m
- 20 m
- 6.6 m
- –

- RS 485 transceiver used: Analog Devices ADM 2485
- PROFIBUS Slave Controller used: Profichip VPC+S

# Fieldbus modules CTEU/Installation system CTCL

Technical data – CTEU-PB

| General technical data                                     |  |   |             |
|--|--|---|-------------|
| Fieldbus interface   | <ul style="list-style-type: none"> <li>• Sub-D socket, 9-pin</li> <li>• Sub-D plug connector, for self-assembly</li> <li>• 2x M12x1, 5-pin, B-coded</li> </ul> |   |             |
| Protocol   | PROFIBUS DP  |   |             |
| Baud rates   | [kbps]   | 9.6, 19.2, 93.75, 187.5, 500  |             |
|  | [Mbps]   | 1.5, 12   |             |
| Internal cycle time  | 1 ms per 1 byte of user data   |   |             |
| Operating voltage  | Nominal value  | [V DC]  | 24          |
|  | Permissible range  | [V DC]  | 18 ... 30   |
| Intrinsic current consumption at nominal operating voltage | [mA]   | Typically 100   |             |
| Max. power supply  | [A]  | 2   |             |
| Parameterisation   | Diagnostic behaviour<br>Fail-safe response   |   |             |
| Max. address capacity, inputs                              | 16 byte  |   |             |
| Max. address capacity, outputs                             | 16 byte  |   |             |
| Additional functions                                       | <ul style="list-style-type: none"> <li>• System status using diagnostics program</li> <li>• Emergency message</li> </ul>                                       |   |             |
| Operating elements   | DIL switches   |   |             |
| Configuration support                                      | GSD files  |   |             |
| Device-specific diagnostics                                | <ul style="list-style-type: none"> <li>• System diagnostics</li> <li>• Undervoltage</li> <li>• Communication errors</li> </ul>                                 |   |             |
| LED display  | Fieldbus-specific  | • BF: Bus fault   |             |
|  | Product-specific   | <ul style="list-style-type: none"> <li>• PS: Operating voltage for electronics and load supply</li> <li>• X1: System status of module at I-Port 1</li> <li>• X2: System status of module at I-Port 2</li> </ul> |             |
| Degree of protection to EN 60529                           | IP65/IP67  |   |             |
| Note on materials  | RoHS compliant   |   |             |
| Information on housing materials                           | <ul style="list-style-type: none"> <li>• PC</li> <li>• PA reinforced</li> </ul>  |   |             |
| Product weight   | [g]  | 90  |             |
| Temperature range  | Environment  | [°C]  | -5 ... +50  |
|  | Storage  | [°C]  | -20 ... +70 |
| Dimensions W x L x H                                       | [mm]   | 40 x 91 x 50  |             |
| Corrosion resistance class CRC                             | 2 <sup>1)</sup>  |   |             |
| CE marking   | To EU EMC Directive <sup>2)</sup>  |   |             |
| Certification  | C-Tick   |   |             |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-PB

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

CTEU-PB



| Type    | B1 | H1   | L1 |
|---------|----|------|----|
| CTEU-PB | 91 | 39.8 | 40 |

## Pin allocation

|   | Pin     | Allocation             | Description  |
|---|---------|------------------------|--|
| <b>Sub-D, 9-pin, PROFIBUS interface</b> |         |                        |  |
|   | 1       | Screening              | Functional earth                                       |
|   | 2       | n.c.                   | Not connected  |
|   | 3       | RxD/TxD-P              | Received/transmitted data positive                     |
|   | 4       | CNTR-P                 | Repeater control signal                                |
|   | 5       | DGND                   | Data ground  |
|   | 6       | VP                     | Supply voltage positive (+ 5 V)                        |
|   | 7       | n.c.                   | Not connected  |
|   | 8       | RxD/TxD-N              | Received/transmitted data negative                     |
|   | 9       | n.c.                   | Not connected  |
|   | Housing |                        | Cable screening, connection to functional earth FE     |
| <b>Power supply, M12, A-coded</b>       |         |                        |  |
|   | 1       | 24V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
|   | 2       | 24V <sub>VAL/OUT</sub> | Load voltage supply (valves/outputs)                   |
|   | 3       | 0V <sub>EL/SEN</sub>   | Operating voltage supply (electronics, sensors/inputs) |
|   | 4       | 0V <sub>VAL/OUT</sub>  | Load voltage supply (valves/outputs)                   |
|   | 5       | FE                     | Functional earth                                       |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-PB











| Pin allocation for PROFIBUS interface |     |           |                  |
|---------------------------------------|-----|-----------|------------------|
| Fieldbus adapter                      | Pin | Bus IN    | Bus OUT          |
| Bus connection, FBA-2-M12-5POL-RK     |     |           |                  |
|                                       | 1   | n.c.      | VP               |
|                                       | 2   | RxD/TxD-N | RxD/TxD-N        |
|                                       | 3   | n.c.      | DGND             |
|                                       | 4   | RxD/TxD-P | RxD/TxD-P        |
|                                       | 5   | FE        | Functional earth |

| Connection and display components |   |
|-----------------------------------|---|
|                                   | <ul style="list-style-type: none"> <li>1 Status LED (operating status/diagnostics)</li> <li>2 DIL switch</li> <li>3 Power supply for bus node and connected devices (valve terminal)</li> <li>4 Fieldbus connection (Sub-D plug connector)</li> </ul> |



# Fieldbus modules CTEU/Installation system CTEL

Accessories – CTEU-PB

| Ordering data   |  | Part No. | Type                            |
|---|--|----------|---------------------------------|
| <b>Bus node</b>   |  |          |                                 |
|    | PROFIBUS bus node  | 570040   | CTEU-PB                         |
| <b>Bus connection</b>   |  |          |                                 |
|    | Sub-D plug connector, straight   | 532216   | FFBS-SUB-9-GS-DP-B              |
|    | Sub-D plug connector, angled   | 533780   | FBS-SUB-9-WS-PB-K               |
|    | Bus connection M12 adapter, B-coded  | 533118   | FBA-2-M12-5POL-RK               |
|  | Straight socket, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK         | 1067905  | NECU-M-B12G5-C2-PB              |
|  | Straight plug connector, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK | 1066354  | NECU-M-S-B12G5-C2-PB            |
|  | Terminating resistor, M12, B-coded for PROFIBUS  | 1072128  | CACR-S-B12G5-220-PB             |
| <b>Fitting</b>  |  |          |                                 |
|  | Threaded sleeve for Sub-D  | 533000   | UNC4-40/M3X8                    |
| <b>Plug socket</b>  |  |          |                                 |
|  | For power supply, M12x1, 5-pin   | 18324    | FBSD-GD-9-5POL                  |
| <b>User documentation</b>   |  |          |                                 |
|  | Manual – Bus node CTEU-PB  | German   | 575392 P.BE-CTEU-PB-OP+MAINT-DE |
|   |  | English  | 575393 P.BE-CTEU-PB-OP+MAINT-EN |
|   |  | Spanish  | 575394 P.BE-CTEU-PB-OP+MAINT-ES |
|   |  | French   | 575395 P.BE-CTEU-PB-OP+MAINT-FR |
|   |  | Italian  | 575396 P.BE-CTEU-PB-OP+MAINT-IT |
|   |  | Chinese  | 575397 P.BE-CTEU-PB-OP+MAINT-ZH |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-EC



The bus node handles communication between the valve terminal and a higher-order master for EtherCAT®.

The module has basic diagnostic functions. It has 6 integrated status LEDs for on-site display. A maximum of 16 byte inputs and 16 byte outputs are transmitted in the cyclic process image.



## Application

### Fieldbus connection

The bus connection is established via two M12 sockets, D-coded to IEC61076-2-101 with IP65/67 degree of protection. Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality (cross-over and patch cables can be used)

that are brought together via an internal switch.

The module has a system and load supply, a fieldbus connection and a connection to the valve terminal with serial I-Port interface.

Please observe the applicable specifications such as the cable specifications for Ethernet networks ISO/IEC11801 and ANSI/TIA/EIA-568-B.

- Maximum cable length (between network stations): 100 m
- Transmission rate: 100 Mbps
- EtherCAT communication chip: ASIC ET1100

### EtherCAT bus node

The EtherCAT bus node supports the EtherCAT protocol based on the Ethernet standard and TCP/IP technology to IEEE802.3. This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or process equipment. Furthermore, non

real-time critical information such as diagnostic information, configuration information, etc. can be transferred. The data bandwidth is sufficient to transmit both data types (real-time and non-real-time) in parallel.

The bus node has a system and load supply, EtherCAT input and output

port, LEDs for status and diagnostic messages and DIL switch elements. Diagnostics is possible directly at the bus node and/or via fieldbus. The bus node has separate operating and load voltage supplies. The bus node is mounted on an I-Port compatible device (e.g. valve terminal or connecting block) from Festo.

The bus node supplies voltage to downstream devices connected by means of the I-Port interface.

The following can be set via DIL switch:

- Station addresses
- Diagnostics on/off
- Fail state behaviour

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-EC

| General technical data                                     |                         |   |              |
|--|-------------------------|---|--------------|
| Fieldbus interface   |                         | 2x M12 socket, D-coded, 4-pin   |              |
| Protocol   |                         | EtherCAT  |              |
| Baud rates   | [Mbps]                  | 100   |              |
| Internal cycle time  |                         | 1 ms per 1 byte of user data  |              |
| Operating voltage (PS)                                     | Nominal value           | [V DC]  | 24           |
|  | Permissible range       | [V DC]  | 18 ... 30    |
|  | Power failure buffering | [ms]  | 10           |
| Load voltage (PL)  | Max.                    | [V DC]  | 30           |
|  | Typical tolerance range | [V DC]  | 18 ... 30    |
| Max. power supply  |                         | [A]   | 4            |
| Intrinsic current consumption at nominal operating voltage |                         | [mA]  | Typically 60 |
| Max. address capacity, inputs                              |                         | [byte]  | 16           |
| Max. address capacity, outputs                             |                         | [byte]  | 16           |
| LED display  | Fieldbus-specific       | <ul style="list-style-type: none"> <li>• Run: operating status (communication status)</li> <li>• L/A2: network active (connection status) port 2 (Out)</li> <li>• L/A1: network active (connection status) port 1 (In)</li> </ul> |              |
|  | Product-specific        | <ul style="list-style-type: none"> <li>• PS: Operating voltage for electronics and load supply</li> <li>• X1: System status of module at I-Port 1</li> <li>• X2: System status of module at I-Port 2</li> </ul>                   |              |
| Device-specific diagnostics                                |                         | <ul style="list-style-type: none"> <li>• System diagnostics</li> <li>• Undervoltage</li> <li>• Communication error</li> </ul>   |              |
| Additional functions                                       |                         | <ul style="list-style-type: none"> <li>• Diagnostic object</li> <li>• Acyclic data access via "SDO"</li> <li>• Emergency message</li> <li>• Modular device profile (MDP)</li> </ul>   |              |
| Configuration support                                      |                         | XML file  |              |
| Parameterisation   |                         | <ul style="list-style-type: none"> <li>• Diagnostic behaviour</li> <li>• Fail-safe response</li> </ul>  |              |
| Operating elements   |                         | DIL switches  |              |
| Parameterisation via DIL switches                          |                         | <ul style="list-style-type: none"> <li>• Fail-safe and idle response</li> <li>• Diagnostics on/off</li> </ul>   |              |
| Degree of protection to EN 60529                           |                         | IP65  |              |
| Corrosion resistance class CRC                             |                         | 2 <sup>1)</sup>   |              |
| CE marking (see declaration of conformity)                 |                         | To EU EMC Directive <sup>2)</sup>   |              |
| Certification  |                         | C-Tick  |              |
| Temperature range  | Operation               | [°C]  | - 5 ... +50  |
|  | Storage/transport       | [°C]  | -20 ... +70  |
| Note on materials  |                         | RoHS compliant  |              |
| Information on housing materials                           |                         | <ul style="list-style-type: none"> <li>• PC</li> <li>• PA reinforced</li> </ul>   |              |
| Dimensions W x L x H                                       |                         | [mm]  | 40 x 91 x 50 |
| Product weight   |                         | [g]   | 90           |

1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

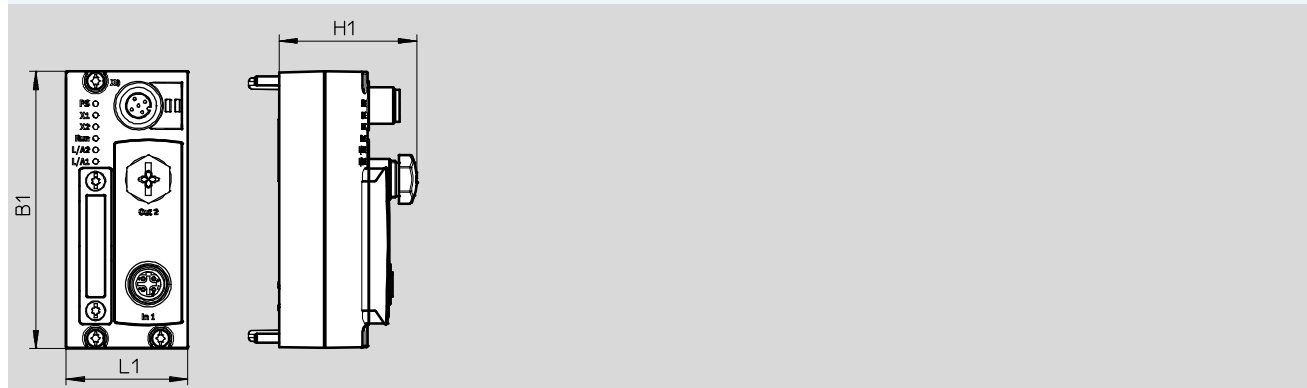
# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-EC

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

CTEU-EC



| Type    | B1 | H1   | L1 |
|---------|----|------|----|
| CTEU-EC | 91 | 45.3 | 40 |

## Pin allocation





|   | Pin     | Allocation              | Description  |
|---|---------|-------------------------|--|
| <b>EtherCAT interface, M12, D-coded</b> |         |                         |  |
|   | 1       | TX+                     | Transmitted data+                                      |
|   | 2       | RX+                     | Received data+   |
|   | 3       | TX-                     | Transmitted data-                                      |
|   | 4       | RX-                     | Received data-   |
|   | Housing |                         |  |
| <b>Power supply, M12, A-coded</b>       |         |                         |  |
|   | 1       | 24V <sub>EL</sub> /SEN  | Operating voltage supply (electronics, sensors/inputs) |
|   | 2       | 24V <sub>VAL</sub> /OUT | Load voltage supply (valves/outputs)                   |
|   | 3       | 0V <sub>EL</sub> /SEN   | Operating voltage supply (electronics, sensors/inputs) |
|   | 4       | 0V <sub>VAL</sub> /OUT  | Load voltage supply (valves/outputs)                   |
|   | 5       | FE                      | Functional earth                                       |

## Connection and display components

|  |   |
|--|---|
|  | <ol style="list-style-type: none"> <li>1 Status LED (operating status/diagnostics)</li> <li>2 DIL switch</li> <li>3 Power supply for bus node and connected devices (valve terminal)</li> <li>4 Fieldbus connection (Sub-D plug connector)</li> </ol> |
|--|---|

# Fieldbus modules CTEU/Installation system CTEL

Accessories – CTEU-EC

| Ordering data  |                                      | Part No. | Type                            |
|--|--------------------------------------|----------|---------------------------------|
| <b>Bus node</b>  |                                      |          |                                 |
|   | EtherCAT bus node                    | 572556   | CTEU-EC                         |
| <b>Bus connection</b>  |                                      |          |                                 |
|   | Plug connector M12x1, 4-pin, D-coded | 543109   | NECU-M-S-D12G4-C2-ET            |
| <b>Plug socket</b>   |                                      |          |                                 |
|   | For power supply, M12x1, 5-pin       | 18324    | FBSD-GD-9-5POL                  |
| <b>User documentation</b>  |                                      |          |                                 |
|  | Manual – Bus node CTEU-EC            | German   | 575400 P.BE-CTEU-EC-OP+MAINT-DE |
|  |                                      | English  | 575401 P.BE-CTEU-EC-OP+MAINT-EN |
|  |                                      | Spanish  | 575402 P.BE-CTEU-EC-OP+MAINT-ES |
|  |                                      | French   | 575403 P.BE-CTEU-EC-OP+MAINT-FR |
|  |                                      | Italian  | 575404 P.BE-CTEU-EC-OP+MAINT-IT |
|  |                                      | Chinese  | 575405 P.BE-CTEU-EC-OP+MAINT-ZH |

# Fieldbus modules CTEU/Installation system CTCL

Technical data – CTEU-AS



The bus node handles communication between the valve terminal and a higher-order AS-Interface® master.

- Activation of up to 16 solenoid coils per valve terminal
- Automatic addressing
- Automatic detection of the number of connected valves



## Properties

The module has a system and load supply, a bus connection and a connection to the valve terminal with serial I-Port interface.

The module has basic diagnostic functions. It has 3 integrated LEDs for on-site display.

A maximum of 2 byte inputs and 2 byte outputs are transmitted in the cyclic process image.

## General technical data

|  |                   |  |
|--|-------------------|--|
| Fieldbus interface   |                   | <ul style="list-style-type: none"> <li>• Plug connector M12x1, 4-pin, A-coded</li> <li>• Socket M12x1, 4-pin, A-coded</li> </ul>                             |
| Protocol   |                   | AS-Interface   |
| Internal cycle time  | [ms]              | 10   |
| Operating voltage  | Nominal value     | [V DC] 30  |
|  | Permissible range | [V DC] 20 ... 31.6   |
| Intrinsic current consumption at nominal operating voltage | [mA]              | Typically 50   |
| Max. power supply  | [A]               | 4  |
| Max. address capacity, inputs                              |                   | 2 byte   |
| Max. address capacity, outputs                             |                   | 2 bytes  |
| Operating elements   |                   | DIL switches   |
| Device-specific diagnostics                                |                   | <ul style="list-style-type: none"> <li>• System diagnostics</li> <li>• Undervoltage</li> <li>• Communication error</li> </ul>                                |
| Parameterisation   |                   | <ul style="list-style-type: none"> <li>• Watchdog enable</li> <li>• Watchdog disable</li> </ul>  |
| LED display  | Bus-specific      | • AS-Interface operation   |
|  | Product-specific  | <ul style="list-style-type: none"> <li>• PS: Operating voltage for electronics and load supply</li> <li>• X1: System status of module at I-Port 1</li> </ul> |
| Degree of protection to EN 60529                           |                   | IP65/IP67  |
| Note on materials  |                   | RoHS compliant   |
| Information on housing materials                           |                   | PA reinforced  |
| Temperature range  | Environment       | [°C] -5 ... +50  |
|  | Storage           | [°C] -20 ... +70   |
| Dimensions W x L x H                                       | [mm]              | 40 x 91 x 50   |
| Product weight   | [g]               | 90   |
| Corrosion resistance class CRC                             |                   | 2 <sup>1)</sup>  |
| CE marking   |                   | To EU EMC Directive <sup>2)</sup>  |

1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

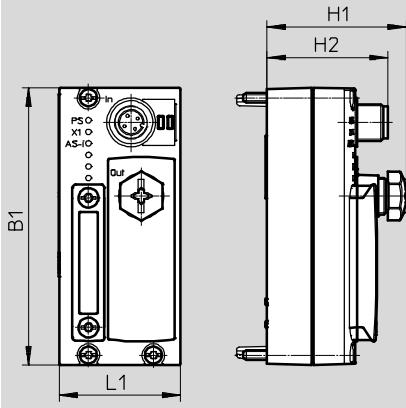
2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

# Fieldbus modules CTEU/Installation system CTEL

Technical data – CTEU-AS

## Dimensions

CTEU-AS



| Type    | B1 | H1   | H2   | L1 |
|---------|----|------|------|----|
| CTEU-AS | 91 | 45.3 | 39.7 | 40 |

## Pin allocation

|  | Pin | Allocation               |
|--|-----|--------------------------|
| <b>M12 plug connector, AS-Interface In</b> |     |                          |
|  | 1   | AS-Interface +           |
|  | 2   | 24 V load voltage supply |
|  | 3   | AS-Interface -           |
|  | 4   | 0 V load voltage supply  |
| <b>M12 socket, AS-Interface Out</b>        |     |                          |
|  | 1   | AS-Interface +           |
|  | 2   | 24 V load voltage supply |
|  | 3   | AS-Interface -           |
|  | 4   | 0 V load voltage supply  |











## Connection and display components

|  |   |   |
|--|---|---|
|  | 1 | Status LED (operating status/diagnostics)   |
|  | 2 | DIL switch  |
|  | 3 | M12 plug connector, AS-Interface bus and auxiliary power supply (AS-Interface In) |
|  | 4 | M12 socket, AS-Interface bus and auxiliary power supply (AS-Interface Out)        |

# Fieldbus modules CTEU/Installation system CTEL



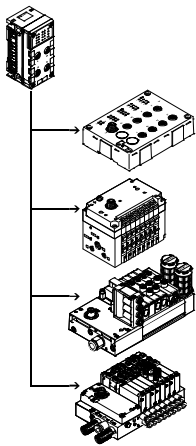
Accessories – CTEU-AS

| Ordering data   |  |                                       |       | Part No.      | Type                     |
|---|--|---------------------------------------|-------|---------------|--------------------------|
| <b>Bus node</b>   |  |                                       |       |               |                          |
|    | AS-Interface bus node                                  |                                       |       | <b>572555</b> | <b>CTEU-AS</b>           |
| <b>Cable socket with load voltage supply</b>  |  |                                       |       |               |                          |
|    | Flat cable   | 4-pin socket, M12x1, A-coded          | –     | <b>572226</b> | <b>NEFU-X24F-M12G4</b>   |
|    | Flat cable   | 4-pin socket, M12x1, A-coded          | 1 m   | <b>572227</b> | <b>NEFU-X24F-1-M12G4</b> |
| <b>Cable socket without load voltage supply</b>                                     |  |                                       |       |               |                          |
|    | Flat cable   | 4-pin socket, M12x1, A-coded          |       | <b>572225</b> | <b>NEFU-X22F-M12G4</b>   |
|   |  | 5-pin socket, M12x1, A-coded          |       | <b>18788</b>  | <b>ASI-SD-FK-M12</b>     |
|   | Flat cable, screw terminal                             | 4-pin straight socket, M12x1, A-coded |       | <b>18789</b>  | <b>ASI-SD-PG-M12</b>     |
| <b>Flat cable</b>   |  |                                       |       |               |                          |
|  | AS-Interface flat cable                                | Yellow                                |       | <b>18940</b>  | <b>KASI-1,5-Y-100</b>    |
|   |  | Black                                 |       | <b>18941</b>  | <b>KASI-1,5-Z-100</b>    |
|  | Cable sleeve for insulating and sealing the flat cable |                                       |       | <b>165593</b> | <b>ASI-KT-FK</b>         |
|  | Cable cap for insulating and sealing the flat cable    |                                       |       | <b>18787</b>  | <b>ASI-KK-FK</b>         |
| <b>Connecting cable</b>   |  |                                       |       |               |                          |
|  | 4-pin straight plug connector, M12x1, A-coded          | 4-pin angled socket, M12x1, A-coded   | 1 m   | <b>185499</b> | <b>KM12-M12-GSWD-1-4</b> |
|  | 4-pin straight plug connector, M12x1, A-coded          | 4-pin straight socket, M12x1, A-coded | 2.5 m | <b>18684</b>  | <b>KM12-M12-GSGD-2,5</b> |
|   |  |                                       | 5.0 m | <b>18686</b>  | <b>KM12-M12-GSGD-5</b>   |



# Fieldbus modules CTEU/Installation system CTEL

Technical data – Interface CPX-CTEL



The electrical interface CPX-CTEL master establishes the connection to modules of the CTEU/CTEU series that have an I-Port interface (device). The I/O data from the connected devices are transmitted to the connected CPX bus node and thus to the higher-order controller via fieldbus. A maximum of 4 devices can be connected to a CPX-CTEL master via appropriate M12 interfaces.



## Application

### I-Port interface

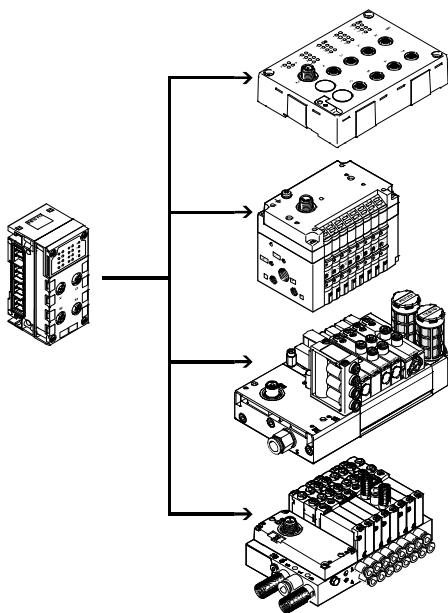
As well as transmitting the communication data, the I-Port interfaces of a CPX-CTEL master also transmit the

power supply to the connected sensors and the load supply to the valves (or outputs). Both circuits are

supplied separately with 24 V, using a separate reference potential. The connecting cables used must meet

the enhanced requirements resulting from the dual function of signal cable and supply cable.

## Configuration example – CPX-CTEL master with CTEU modules



The CPX-CTEL master provides 4 external I-Port interfaces, to each of which a device can be connected. I-Port is an interface for the exchanging of serial data for connecting decentralised modules or valve terminals from Festo. The I-Port interface is based on IO-Link and is compatible with it in certain areas. The connection type corresponds to a star topology. In other words, only one module or valve terminal can be connected to each I-Port.

The restrictions compared to IO-Link include:

- Permanently set baud rate of 230.4 kbps
- SIO mode is not supported
- A maximum of 32 bytes of input data and 32 bytes of output data
- Only one dump of the master commands is used
- Festo plug & work principle, configuration via IO-DD is not supported

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Interface CPX-CTEL



## Implementation

|   |   |   |   |
|---|---|---|---|
| <p>The CPX-CTEL master from Festo enables modules with an I-Port interface to be connected to a CPX system:</p> <ul style="list-style-type: none"> <li>• A maximum of 4 devices with individual electronic fuse protection</li> <li>• A maximum of 64 inputs/64 outputs per I-Port interface</li> <li>• The maximum length of a string is 20 m</li> </ul> | <p>The following device variants are available:</p> <ul style="list-style-type: none"> <li>• Input modules with 16 digital inputs (3-pin M8 and 5-pin M12 connection technology)</li> <li>• Valve terminals with I-Port interface (up to 48 solenoid coils, different valve functions)</li> </ul> | <p>The decentralised arrangement of the modules and valve terminals with I-Port enables them to be mounted close to the cylinders and actuators or sensors to be controlled. This means that the compressed air supply lines and sensor cables used can be shortened, and it may be possible to use smaller valves, thereby saving costs.</p> | <p>Several CPX-CTEL masters can be combined in one CPX terminal, depending on the address capacity of the bus node.</p> <p>Example:</p> <ul style="list-style-type: none"> <li>• CPX-FB13 (512 I/O)</li> <li>• A maximum of 2 CPX-CTEL masters is possible (each with 256 E/A)</li> </ul> |
|---|---|---|---|

## Configuration

| Settings   | Manual configuration   |   | Automatic configuration   |
|--|--|---|---|
| <p>The precise number of the I/O bytes made available depends on the requirements of the connected devices or of the suitable selected operating mode.</p> <p>The operating mode or preset configuration of the CPX-CTEL master can be specified by the user.</p> <p>DIL switches are used for selecting the operating mode and setting the manual configuration. These DIL switches are not required during continuous operation and are only accessible in the disassembled state.</p> | <p>In the case of manual configuration (tool change mode), the volume of inputs and outputs in the process image of the CPX system or of the higher-level fieldbus can be defined manually using the DIL switches.</p> | <p>The process image then always has the same scope, regardless of the connected devices.</p> <p>The I/O length specified always applies to all four I-Ports (max. 8 bytes per I-Port).</p> | <p>In the case of automatic configuration, the I/O length for each I-Port is determined individually and this value is used to select the appropriate or next highest configuration preset.</p> |

## Power supply for I-Port devices

|  |  |   |  |
|--|--|---|--|
| <p>The CPX-CTEL master provides two separate power supplies for the connected devices:</p> <ul style="list-style-type: none"> <li>• For operating of the device and the inputs connected to it</li> <li>• For the outputs and valves that are connected to the device</li> </ul> | <p>The power supply for the devices and the inputs is provided by the power supply for the electronics and sensors of the CPX terminal.</p> <p>The power supply for the outputs and valves is provided by the power supply</p> | <p>for the valves of the CPX terminal.</p> <p>The interlinking block with additional power supply ensures a separate voltage supply for the valves and outputs. This allows the supply voltage to</p> | <p>be disconnected separately.</p> <p>The valves and outputs of the connected I-Port devices can therefore be disconnected separately without disconnecting the devices.</p> |
|--|--|---|--|

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Interface CPX-CTEL

| General technical data                                     |                         |   |                                   |
|--|-------------------------|---|-----------------------------------|
| Type   |                         | CPX-CTEL-4-M12-5POL   |                                   |
| Protocol   |                         | I-Port  |                                   |
| Maximum address capacity                                   | Outputs                 | [bit]   | 256                               |
|  | Inputs                  | [bit]   | 256                               |
| I-Port connection  |                         | 4x socket M12, 5-pin, A-coded   |                                   |
| Number of I-Port interfaces                                |                         | 4   |                                   |
| Max. cable length  |                         | [m]   | 20                                |
| Internal cycle time  |                         | [ms]  | 1 per 8 bits of user data         |
| Electrical isolation                                       | Channel – channel       |   | No                                |
|  | Channel – internal bus  |   | Yes, using an intermediate supply |
| LED displays   |                         | X1 ... 4 = status of the I-Port interface 1 ... 4<br>PS = Electronic supply<br>PL = Load supply<br>· 4 · = Module error   |                                   |
| Diagnostics  |                         | <ul style="list-style-type: none"> <li>• Communication error</li> <li>• Module short circuit</li> <li>• Module-oriented diagnostics</li> <li>• Undervoltage</li> </ul>  |                                   |
| Parameterisation   |                         | <ul style="list-style-type: none"> <li>• Diagnostic behaviour</li> <li>• Fail-safe mode per channel</li> <li>• Forcing per channel</li> <li>• Idle mode per channel</li> <li>• Module parameters</li> <li>• Tool change mode</li> </ul> |                                   |
| Additional functions                                       |                         | Tool change mode  |                                   |
| Operating elements   |                         | DIL switches  |                                   |
| Operating voltage  | Nominal value           |   | [V DC] 24 (polarity-safe)         |
|  | Permissible range       |   | [V DC] 18 ... 30                  |
|  | Power failure buffering |   | [ms] 10                           |
| Intrinsic current consumption at nominal operating voltage |                         | [mA]  | Typically 65                      |
| Max. power supply per channel                              |                         | [A]   | 4x 1.6                            |
| Max. residual current of outputs per channel               |                         | [A]   | 4x 1.6                            |
| Degree of protection to EN 60529                           |                         | IP65/IP67   |                                   |
| Temperature range  | Operation               |   | [°C] –5 ... +50                   |
|  | Storage/transport       |   | [°C] –20 ... +70                  |
| Materials  |                         | PA reinforced, PC   |                                   |
| Note on materials  |                         | RoHS compliant  |                                   |
| Grid dimension   |                         | [mm]  | 50                                |
| Dimensions (incl. interlinking block) W x L x H            |                         | [mm]  | 50 x 107 x 55                     |
| Product weight   |                         | [g]   | 110                               |

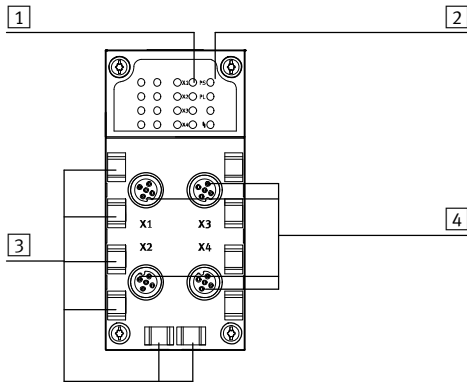
-  - Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Interface CPX-CTEL

## Connection and display components




- 1 Status LEDs for I-Port interfaces
- 2 CPX-specific status LEDs
- 3 Holders for inscription labels (IBS 6x10)
- 4 I-Port interfaces for up to 4 devices

## Pin allocation – I-Port interface/IO-Link
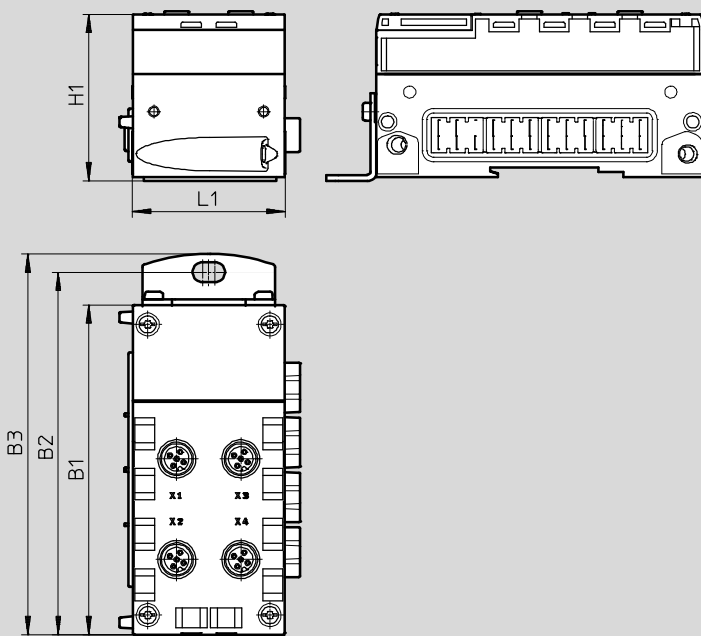
|  | Pin | Allocation              | Description  |
|--|-----|-------------------------|--|
|  | 1   | 24V <sub>EL</sub> /SEN  | Operating voltage supply (electronics, sensors/inputs) |
|  | 2   | 24V <sub>VAL</sub> /OUT | Load voltage supply (valves/outputs)                   |
|  | 3   | 0V <sub>EL</sub> /SEN   | Operating voltage supply (electronics, sensors/inputs) |
|  | 4   | C/Q                     | Data communication                                     |
|  | 5   | 0V <sub>VAL</sub> /OUT  | Load voltage supply (valves/outputs)                   |

## Dimensions






Download CAD data → [www.festo.com](http://www.festo.com)



| Type                | B1    | B2    | B3    | H1   | L1 |
|---------------------|-------|-------|-------|------|----|
| CPX-CTEL-4-M12-5POL | 108.1 | 118.9 | 124.9 | 55.1 | 50 |




# Fieldbus modules CTEU/Installation system CTEL

Accessories – Interface CPX-CTEL

| Ordering data   |  |     |                |                                       |
|---|--|-----|----------------|---------------------------------------|
| Description   |  |     | Part No.       | Type                                  |
| CPX-CTEL master   |  |     |                |                                       |
|    | Interface for a maximum of 4 I/O modules and valve terminals with I-Port interface (devices) |     | <b>1577012</b> | <b>CPX-CTEL-4-M12-5POL</b>            |
| Bus connection  |  |     |                |                                       |
|    | Cover cap  | M12 | <b>165592</b>  | <b>ISK-M12</b>                        |
|    | Inscription label holder for connection block  |     | <b>536593</b>  | <b>CPX-ST-1</b>                       |
| Connecting cable  |  |     |                |                                       |
|    | -  |     | <b>574321</b>  | <b>NEBU-M12G5-E-5-Q8N-M12G5</b>       |
|   |  |     | <b>574322</b>  | <b>NEBU-M12G5-E-7.5-Q8N-M12G5</b>     |
|   |  |     | <b>574323</b>  | <b>NEBU-M12G5-E-10-Q8N-M12G5</b>      |
| User documentation  |  |     |                |                                       |
|  | User documentation for CPX CTEL-Master   |     | German         | <b>574600</b> <b>P.BE-CPX-CTEL-DE</b> |
|   |  |     | English        | <b>574601</b> <b>P.BE-CPX-CTEL-EN</b> |
|   |  |     | Spanish        | <b>574602</b> <b>P.BE-CPX-CTEL-ES</b> |
|   |  |     | French         | <b>574603</b> <b>P.BE-CPX-CTEL-FR</b> |
|   |  |     | Italian        | <b>574604</b> <b>P.BE-CPX-CTEL-IT</b> |
|   |  |     | Swedish        | <b>574605</b> <b>P.BE-CPX-CTEL-SV</b> |

# Fieldbus modules CTEU/Installation system CTCL

Technical data – Valve terminals CPV

-  Flow rate  
CPV10: up to 400 l/min  
CPV14: up to 800 l/min
-  Valve width  
CPV10: 10 mm  
CPV14: 14 mm
-  Voltage  
24 V DC

I-Port interface for communication between a valve terminal CPV and an I-Port master. It activates a valve terminal CPV with up to 16 solenoid coils on max. 8 valve positions. The connection to a higher-order controller can be achieved by:

- Connection to an I-Port master from Festo (CPX-CTEL)
- Direct mounting of a fieldbus node CTEU
- Connection to an IO-Link master (in IO-Link mode)



| General technical data            |                              |                                     |
|-----------------------------------|------------------------------|-------------------------------------|
| Protocol                          |                              | IO-Link/I-Port                      |
| IO-Link                           | Connection technology        | 5-pin                               |
|                                   | Protocol                     | V 1.0                               |
|                                   | Communication mode           | COM2 (38.4 kBaud), COM3 (230 kBaud) |
|                                   | Port type                    | B                                   |
|                                   | Number of ports              | 1                                   |
|                                   | Process data width OUT [bit] | 16                                  |
|                                   | Minimum cycle time [ms]      | 3.2                                 |
| Baud rate                         | [kbps]                       | 38.4/230.4                          |
| Maximum number of valve positions |                              | 8                                   |
| Nominal operating voltage         | [V DC]                       | 24                                  |
| Nominal load voltage              | [V DC]                       | 24                                  |
| Operating voltage range           | Electronics/sensors          | [V DC] 18 ... 30                    |
|                                   | Load voltage                 | [V DC] 21.6 ... 26.4                |
| Intrinsic current consumption     | Operating voltage            | [mA] 35                             |
|                                   | Load voltage                 | [mA] 700                            |
| Reverse polarity protection       |                              | For operating voltage               |
| Diagnostics                       |                              | Undervoltage in load voltage supply |
| LED display                       | Bus-specific                 | 1 communication status              |
|                                   | Product-specific             | 16 valve status                     |

| Materials         |                |
|-------------------|----------------|
| Cover             | PA             |
| Note on materials | RoHS compliant |

| Operating and environmental conditions     |      |  |
|--|------|--|
| Mounting position                          |      | Any  |
| Degree of protection to EN 60529           |      | IP65 (when fully plugged in or fitted with protective cover) |
| Ambient temperature                        | [°C] | -5 ... +50   |
| Storage temperature                        | [°C] | -20 ... +70  |
| Relative air humidity                      | [%]  | 93 (non-condensing)  |
| CE marking (see declaration of conformity) |      | To EU EMC Directive <sup>1)</sup>                            |


1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Valve terminals CPV

## Connection and display components

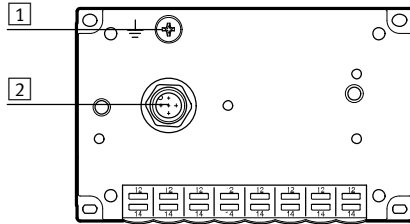
CPV10



1 Earthing screw

2 I-Port interface/IO-Link

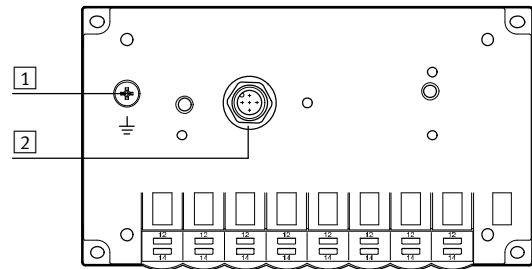
CPV14



1 Earthing screw

2 I-Port interface/IO-Link


## Pin allocation – I-Port interface/IO-Link



| Pin | Allocation             | Description  |
|-----|------------------------|--|
| 1   | 24V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
| 2   | 24V <sub>VAL/OUT</sub> | Load voltage supply (valves/outputs)                   |
| 3   | 0V <sub>EL/SEN</sub>   | Operating voltage supply (electronics, sensors/inputs) |
| 4   | C/Q                    | Data communication                                     |
| 5   | 0V <sub>VAL/OUT</sub>  | Load voltage supply (valves/outputs)                   |

## Dimensions

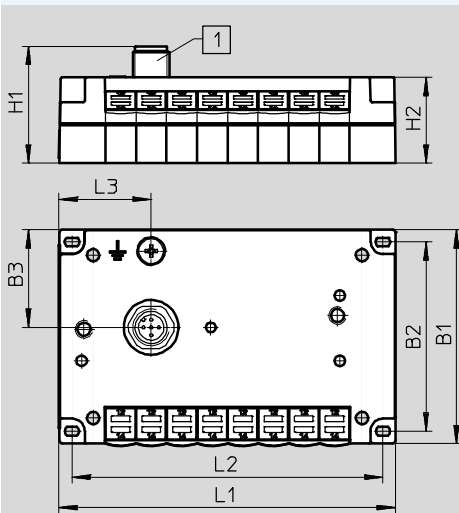Download CAD data → [www.festo.com](http://www.festo.com)



1 I-Port interface/IO-Link

| Type          | B1 | B2 | B3   | H1   | H2   | L1  | L2    | L3   |
|---------------|----|----|------|------|------|-----|-------|------|
| CPV10-GE-PT-8 | 71 | 62 | 32   | 38.3 | 26.2 | 110 | 101.8 | 30.2 |
| CPV14-GE-PT-8 | 89 | 78 | 32.4 | 38.3 | 26.2 | 152 | 142   | 56.5 |

# Fieldbus modules CTEU/Installation system CTEL






Accessories – Valve terminals CPV

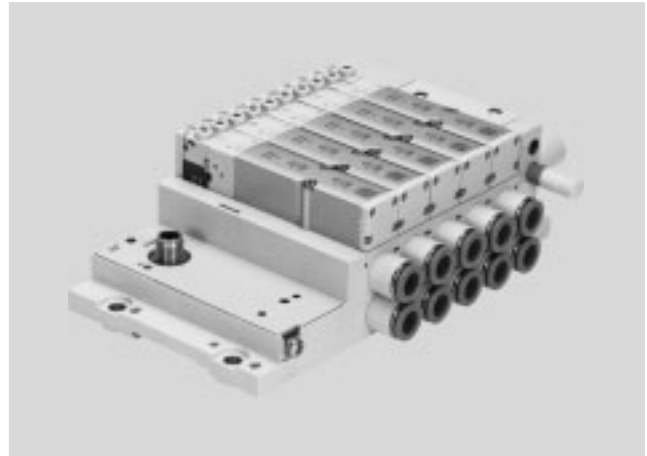
| Ordering data                     |   |       |           |         |                |                                   |
|-----------------------------------|---|-------|-----------|---------|----------------|-----------------------------------|
|                                   |   | Type  | Device ID | Weight  | Part No.       | Type                              |
| I-Port bus node                   |   |       |           |         |                |                                   |
|                                   | Bus node with I-Port interface/IO-Link and 8 valve positions (maximum 8 double solenoid valves) | CPV10 | 0x 000410 | 108.5 g | <b>1565761</b> | <b>CPV10-GE-PT-8</b>              |
|                                   |   | CPV14 | 0x 000510 | 200 g   | <b>1564984</b> | <b>CPV14-GE-PT-8</b>              |
| Connection technology for IO-Link |   |       |           |         |                |                                   |
|                                   | T-adapter M12, 5-pin for IO-Link and load voltage supply  |       |           |         | <b>171175</b>  | <b>FB-TA-M12-5POL</b>             |
|                                   | Straight plug connector M12, 5-pin (for T-adapter)  |       |           |         | <b>175487</b>  | <b>SEA-M12-5GS-PG7</b>            |
| Connecting cable                  |   |       |           |         |                |                                   |
|                                   | -   |       |           |         | <b>574321</b>  | <b>NEBU-M12G5-E-5-Q8N-M12G5</b>   |
|                                   |   |       |           |         | <b>574322</b>  | <b>NEBU-M12G5-E-7.5-Q8N-M12G5</b> |
|                                   |   |       |           |         | <b>574323</b>  | <b>NEBU-M12G5-E-10-Q8N-M12G5</b>  |



# Fieldbus modules CTEU/Installation system CTEL

Technical data – Valve terminals MPA-L

-  Flow rate
    - VMPA1: up to 360 l/min
    - VMPA14: up to 670 l/min
    - VMPA2: up to 700 l/min
  
  -  Valve width
    - VMPA1: 10 mm
    - VMPA14: 14 mm
    - VMPA2: 20 mm
  
  -  Voltage
    - 24 V DC
- I-Port interface for communication between a valve terminal MPA-L and an I-Port master. It activates a valve terminal MPA-L with up to 32 solenoid coils on max. 32 valve positions. The connection to a higher-order controller can be achieved by:
- Connection to an I-Port master from Festo (CPX-CTEL)
  - Direct mounting of a fieldbus node CTEU
  - Connection to an IO-Link master (in IO-Link mode)



| General technical data        |                        |             |                                     |
|-------------------------------|------------------------|-------------|-------------------------------------|
| Protocol                      |                        |             | IO-Link/I-Port                      |
| IO-Link                       | Connection technology  |             | 5-pin                               |
|                               | Protocol               |             | V 1.0                               |
|                               | Communication mode     |             | COM2 (38.4 kBaud), COM3 (230 kBaud) |
|                               | Port type              |             | B                                   |
|                               | Number of ports        |             | 1                                   |
|                               | Process data width OUT | [bit]       | 8 ... 32                            |
|                               | Minimum cycle time     | [ms]        | 3.2                                 |
| Baud rate                     | [kbps]                 | 38.4/230.4  |                                     |
| Operating pressure            | [bar]                  | -0.9 ... 10 |                                     |
| Pilot pressure                | [bar]                  | 3 ... 8     |                                     |
| Nominal operating voltage     | [V DC]                 | 24          |                                     |
| Intrinsic current consumption | Operating voltage      | [mA]        | 30                                  |
|                               | Load voltage           | [mA]        | 30                                  |
| Reverse polarity protection   |                        |             | For operating voltage               |
| Diagnostics                   |                        |             | Undervoltage in load voltage supply |
| LED display                   |                        |             | 1 communication status              |

| Materials         |                |
|-------------------|----------------|
| End plate         | PPA reinforced |
| Note on materials | RoHS compliant |

| Operating and environmental conditions       |                  |
|--|------------------|
| Mounting position                            | Any              |
| Ambient temperature                          | [°C] -5 ... +50  |
| Storage temperature                          | [°C] -20 ... +40 |
| Corrosion resistance class CRC <sup>1)</sup> | 3                |

1) Corrosion resistance class 3 according to Festo standard 940 070  
 Components subject to high corrosion stress. Externally visible parts with primarily functional surface requirements which are in direct contact with the surrounding industrial environment or media such as solvents and cleaning agents.


# Fieldbus modules CTEU/Installation system CTEL

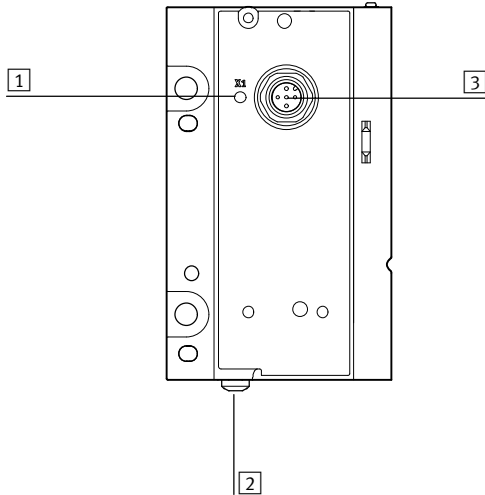Technical data – Valve terminals MPA-L



## Connection and display components

VMPAL-EPL-IPO32



1 Status LED

2 Earthing screw


3 I-Port interface/IO-Link

## Pin allocation – I-Port interface/IO-Link
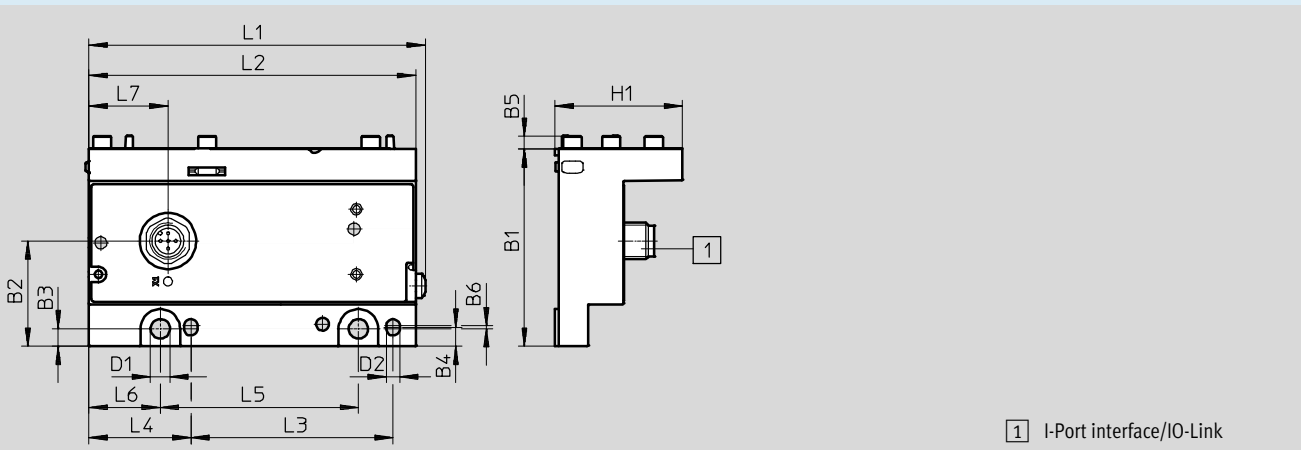
|  | Pin | Allocation             | Description  |
|--|-----|------------------------|--|
|  | 1   | 24V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
|  | 2   | 24V <sub>VAL/OUT</sub> | Load voltage supply (valves/outputs)                   |
|  | 3   | 0V <sub>EL/SEN</sub>   | Operating voltage supply (electronics, sensors/inputs) |
|  | 4   | C/Q                    | Data communication                                     |
|  | 5   | 0V <sub>VAL/OUT</sub>  | Load voltage supply (valves/outputs)                   |

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)







1 I-Port interface/IO-Link

| Type            | B1   | B2   | B3  | B4  | B5 | B6 | D1  | D2  | H1   | L1  | L2  | L3   | L4   | L5 | L6   | L7 |
|-----------------|------|------|-----|-----|----|----|-----|-----|------|-----|-----|------|------|----|------|----|
| VMPAL-EPL-IPO32 | 64.8 | 34.5 | 5.7 | 6.2 | 4  | 1  | 6.4 | 4.5 | 41.8 | 110 | 107 | 66.3 | 33.5 | 65 | 23.5 | 26 |

# Fieldbus modules CTEU/Installation system CTEL

Accessories – Valve terminals MPA-L

| Ordering data   |   | Device ID | Weight | Part No.      | Type                              |
|---|---|-----------|--------|---------------|-----------------------------------|
| <b>I-Port bus node</b>  |   |           |        |               |                                   |
|  | Bus node with I-Port interface/IO-Link and up to 32 valve positions (maximum 16 double solenoid valves) | 0x 000620 | 170 g  | <b>575667</b> | <b>VMPAL-EPL-IPO32</b>            |
| <b>Connection technology for IO-Link</b>  |   |           |        |               |                                   |
|  | T-adapter M12, 5-pin for IO-Link and load voltage supply  |           |        | <b>171175</b> | <b>FB-TA-M12-5POL</b>             |
|  | Straight plug connector M12, 5-pin (for T-adapter)  |           |        | <b>175487</b> | <b>SEA-M12-5GS-PG7</b>            |
| <b>Connecting cable</b>   |   |           |        |               |                                   |
|  | -   |           |        | <b>574321</b> | <b>NEBU-M12G5-E-5-Q8N-M12G5</b>   |
|   |   |           |        | <b>574322</b> | <b>NEBU-M12G5-E-7.5-Q8N-M12G5</b> |
|   |   |           |        | <b>574323</b> | <b>NEBU-M12G5-E-10-Q8N-M12G5</b>  |

# Fieldbus modules CTEU/Installation system CTSL

Technical data – Input modules CTSL

### Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.).

Plug connectors with double allocation are separated using a DUO plug connector or DUO cable.

### Application

- Input modules for 24 V DC sensor signals
- M12 connection technology
- Display of the input statuses for each input signal via an assigned LED
- Operating voltage supply 24 V DC for all connected sensors
- Diagnostic LED for short circuit/overload of sensor supply
- Labelling options on all sides with large, hinged inscription label
- Earthing plate and H-rail mounting already integrated



| General technical data  |                        |  |  |
|---|------------------------|--|--|
| Type  |                        | CTSL-D-16E-M8-3                                    | CTSL-D-16E-M12-5                         |
| Electrical connection   |                        | 16x socket M8, 3-pin                               | 8x socket M12, 5-pin                     |
| Protocol  |                        | IO-Link/I-Port                                     |  |
| IO-Link   | Connection technology  |  | 5-pin                                    |
|   | Protocol               |  | V 1.0                                    |
|   | Communication mode     |  | COM2 (38.4 kBaud), COM3 (230 kBaud)      |
|   | Port type              |  | B  |
|   | Number of ports        |  | 1  |
|   | Process data width OUT | [bit]  | 16                                       |
|   | Minimum cycle time     | [ms]   | 3.2                                      |
|   | Device ID              | [ms]   | 0x 700410                                |
| Baud rate   |                        | [kbps]   | 38.4/230.4                               |
| Max. no. of inputs  |                        | 16   |  |
| Nominal operating voltage   |                        | [V DC]   | 24                                       |
| Operating voltage range   |                        | [V DC]   | 18 ... 30                                |
| Current consumption at nominal operating voltage of logic circuit |                        | [mA]   | Max. 35                                  |
| Max. residual current per module                                  |                        | [mA]   | 1.2                                      |
| Reverse polarity protection                                       |                        | For operating voltage                              |  |
| Fuse protection (short circuit)                                   |                        | Internal electronic fuse protection for each group |  |
| Electrical isolation between channels                             |                        | No   |  |
| Switching level   | Signal 0               | [V]  | ≤5                                       |
|   | Signal 1               | [V]  | ≥11                                      |
| Input debounce time   |                        | [ms]   | 0.5 (3 ms, 10 ms, 20 ms parameterisable) |
| Certification   |                        | IEC1131-T2   |  |
| Switching logic at inputs   |                        | PNP (positive switching)                           |  |
| LED display   | Bus-specific           |  | X20: I-Port/IO-Link                      |
|   | Product-specific       |  | 1 operating voltage                      |
|   |                        |  | 16 channel status                        |
|   |                        |  | 2 group diagnostics                      |

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Input modules CTSL

| Materials         |                  |                |
|-------------------|------------------|----------------|
| Housing           |                  | PA reinforced  |
| Cover             |                  | PA reinforced  |
| Note on materials |                  | RoHS compliant |
| Product weight    | [g]              | 250            |
| Dimensions        | (W x L x H) [mm] | 143 x 103 x 32 |

| Operating and environmental conditions       |      |   |
|--|------|---|
| Type of mounting                             |      | Either via H-rail or via through-hole                           |
| Degree of protection to EN 60529             |      | IP65/IP67 (when fully plugged in or fitted with protective cap) |
| Ambient temperature                          | [°C] | -5 ... +50  |
| Storage temperature                          | [°C] | -20 ... +70   |
| Corrosion resistance class CRC <sup>1)</sup> |      | 2 <sup>1)</sup>   |
| CE marking (see declaration of conformity)   |      | To EU EMC Directive <sup>2)</sup>                               |
| Approval certificate                         |      | C-Tick  |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

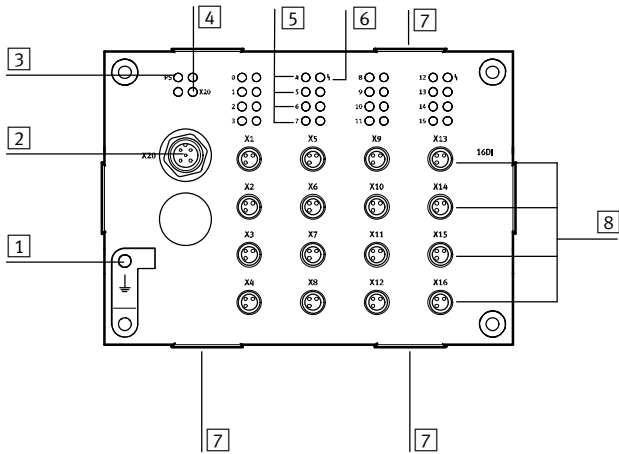
# Fieldbus modules CTEU/Installation system CTEL

Technical data – Input modules CTSL



## Connection and display components

CTSL-D-16E-M8-3



- 1 Earth terminal
- 2 I-Port interface/IO-Link
- 3 Status LED for power supply (PS)
- 4 Status LED for I-Port (X20)
- 5 Status-LEDs for inputs (status display, green)
- 6 Status LED (group) for short circuit/overload of sensor supply (red)
- 7 Fixture for inscription label holder ASCF-H-E2
- 8 Sensor connections (1 input per socket)

## Pin allocation – I-Port interface/IO-Link

|  | Pin | Allocation            | Description  |
|--|-----|-----------------------|--|
|  | 1   | 24V <sub>EL/SEN</sub> | Operating voltage supply (electronics, sensors/inputs) |
|  | 2   | –                     | –  |
|  | 3   | 0V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
|  | 4   | C/Q                   | Data communication                                     |
|  | 5   | –                     | –  |

## Pin allocation – Sensor connections CTSL-D-16E-M8-3

| Pin allocation | Pin | Allocation       | Description            |
|----------------|-----|------------------|------------------------|
|                | 1   | 24V              | Operating voltage 24 V |
|                | 3   | 0V               | Operating voltage 0 V  |
|                | 4   | I <sub>x</sub> * | Sensor signal          |

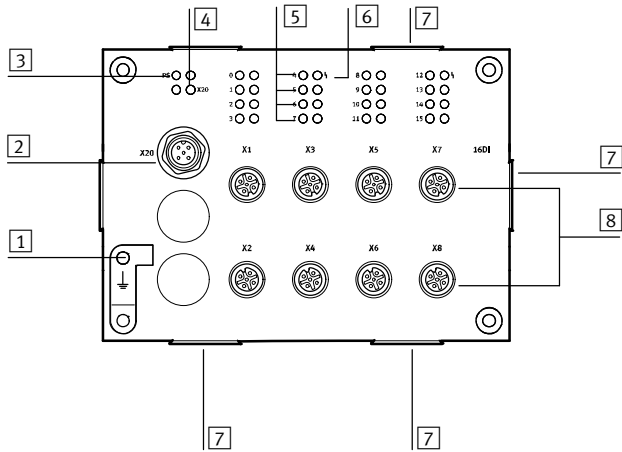
\* I<sub>x</sub> = Input x

# Fieldbus modules CTEU/Installation system CTEL

Technical data – Input modules CTSL

## Connection and display components

CTSL-D-16E-M12-5



- 1 Earth terminal
- 2 I-Port interface/IO-Link
- 3 Status LED for power supply (PS)
- 4 Status LED for I-Port (X20)
- 5 Status-LEDs for inputs (status display, green)
- 6 Status LED (group) for short circuit/overload of sensor supply (red)
- 7 Fixture for inscription label holder ASCF-H-E2
- 8 Sensor connections (2 inputs per socket)

### Pin allocation – I-Port interface/IO-Link

|  | Pin | Allocation            | Description  |
|--|-----|-----------------------|--|
|  | 1   | 24V <sub>EL/SEN</sub> | Operating voltage supply (electronics, sensors/inputs) |
|  | 2   | –                     | –  |
|  | 3   | 0V <sub>EL/SEN</sub>  | Operating voltage supply (electronics, sensors/inputs) |
|  | 4   | C/Q                   | Data communication                                     |
|  | 5   | –                     | –  |

### Pin allocation – Sensor connections CTSL-D-16E-M12-5

| Pin allocation | Pin | Allocation         | Description            |
|----------------|-----|--------------------|------------------------|
|                | 1   | 24V                | Operating voltage 24 V |
|                | 2   | I <sub>x</sub> +1* | Sensor signal          |
|                | 3   | 0V                 | Operating voltage 0 V  |
|                | 4   | I <sub>x</sub> *   | Sensor signal          |
|                | 5   | FE                 | Functional earth       |

\* I<sub>x</sub> = Input x

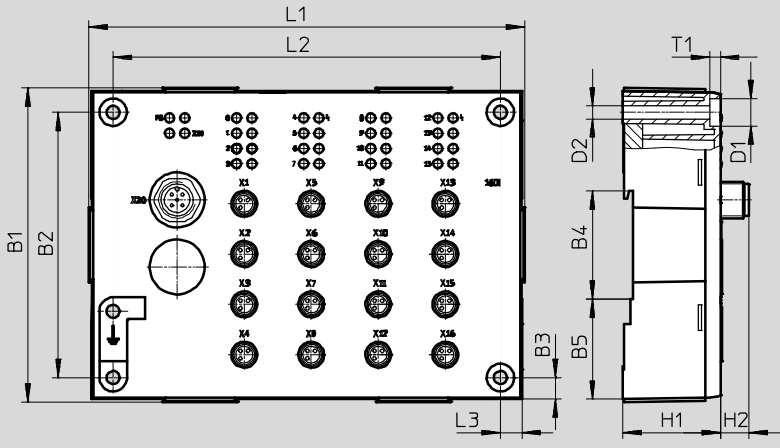
# Fieldbus modules CTEU/Installation system CTSL

Technical data – Input modules CTSL


**Dimensions**

Download CAD data → [www.festo.com](http://www.festo.com)

CTSL-D-16E-M8-3



CTSL-D-16E-M12-5

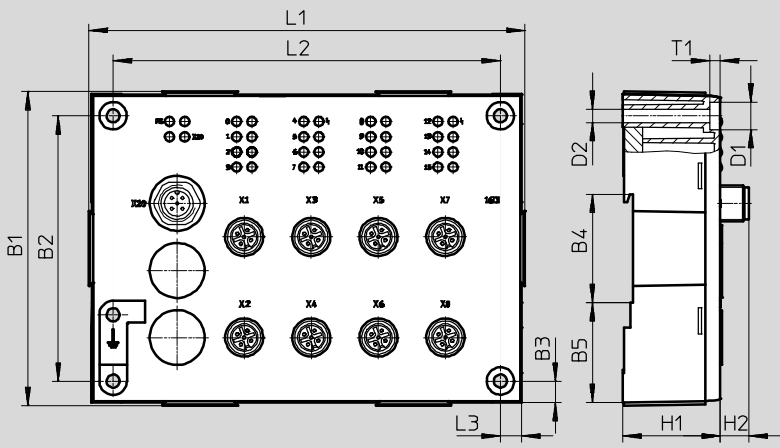









| Type       | B1  | B2 | B3 | B4   | B5   | D1 | D2  | H1 | H2  | L1  | L2  | L3 | T1  |
|------------|-----|----|----|------|------|----|-----|----|-----|-----|-----|----|-----|
| CTSL-D-16E | 103 | 87 | 7  | 35.5 | 32.8 | 9  | 4.3 | 32 | 9.4 | 143 | 127 | 7  | 3.5 |



# Fieldbus modules CTEU/Installation system CTEL

FESTO

Accessories – Input modules CTSL

| Ordering data   |  |  |                     |   |   |
|---|--|--|---------------------|---|---|
| Description   |  |  | Part No.            | Type                                    |   |
| <b>Input modules</b>  |  |  |                     |   |   |
|    | 16 sensor connections M8, 3-pin, single allocation                       |  | <b>1387363</b>      | <b>CTSL-D-16E-M8-3</b>                  |   |
|   | 8 sensor connections M12, 5-pin, double allocation                       |  | <b>1387359</b>      | <b>CTSL-D-16E-M12-5</b>                 |   |
| <b>Plug connector</b>   |  |  |                     |   |   |
|    | Straight plug connector, M12   | 5-pin, PG7   | <b>175487</b>       | <b>SEA-M12-5GS-PG7</b>                  |   |
|   |  | 4-pin, PG7   | <b>18666</b>        | <b>SEA-GS-7</b>                         |   |
|   |  | 4-pin, 2.5 mm <sup>2</sup> O.D.  | <b>192008</b>       | <b>SEA-4GS-7-2,5</b>                    |   |
|   | Straight plug connector, M8  | 3-pin, solderable  | <b>18696</b>        | <b>SEA-GS-M8</b>                        |   |
| 3-pin, screw-in   |  | <b>192009</b>  | <b>SEA-3GS-M8-S</b> |   |   |
|    | Plug connector for 2 cables, M12, PG11                                   | 4-pin  | <b>18779</b>        | <b>SEA-GS-11-DUO</b>                    |   |
|   |  | 5-pin  | <b>192010</b>       | <b>SEA-5GS-11-DUO</b>                   |   |
|    | Push-in T-connector  | 2x socket, M12, 5-pin<br>1x plug connector M12,<br>4-pin                 | <b>541596</b>       | <b>NEDU-M12D5-M12T4</b>                 |   |
| <b>Connecting cables</b>  |  |  |                     |   |   |
|  | DUO cable, 1x straight plug connector M12                                | 2x straight socket M8  | <b>18685</b>        | <b>KM12-DUO-M8-GDGD</b>                 |   |
|   |  | 1x straight socket M8 and<br>1x angled socket M8                         | <b>18688</b>        | <b>KM12-DUO-M8-GDWD</b>                 |   |
|   |  | 2x angled socket M8  | <b>18687</b>        | <b>KM12-DUO-M8-WDWD</b>                 |   |
|   |  | Connecting cable, M12, 4-pin, straight plug<br>connector-straight socket | 2.5 m               | <b>539052</b>                           | <b>NEBU-M12G4-K-2.5-M12G4<sup>1</sup></b> |
|  | Connecting cable, M12, 4-pin, straight plug<br>connector-straight socket | 5.0 m  | <b>539052</b>       | <b>NEBU-M12G4-K-5-M12G4<sup>1</sup></b> |   |
|   |  | Connecting cable, M8, 3-pin, straight plug connector-<br>straight socket | 0.5 m               | <b>539052</b>                           | <b>NEBU-M8G3-K-0.5-M8G3<sup>1</sup></b>   |
|   |  | 1 m  | <b>539052</b>       | <b>NEBU-M8G3-K-1-M8G3<sup>1</sup></b>   |   |
|   |  | 2.5 m  | <b>539052</b>       | <b>NEBU-M8G3-K-2.5-M8G3<sup>1</sup></b> |   |
|   |  | 5 m  | <b>539052</b>       | <b>NEBU-M8G3-K-5-M8G3<sup>1</sup></b>   |   |
|  | -  |  | <b>574321</b>       | <b>NEBU-M12G5-E-5-Q8N-M12G5</b>         |   |
|   |  |  | <b>574322</b>       | <b>NEBU-M12G5-E-7.5-Q8N-M12G5</b>       |   |
|   |  |  | <b>574323</b>       | <b>NEBU-M12G5-E-10-Q8N-M12G5</b>        |   |
| <b>Inscription label holder</b>   |  |  |                     |   |   |
|  | Inscription label holders for EL modules, bag of 10                      |  | <b>547473</b>       | <b>ASCF-H-E2</b>                        |   |


1) Modular product, more information → Internet: nebu

# Fieldbus modules CTEU/Installation system CTEL

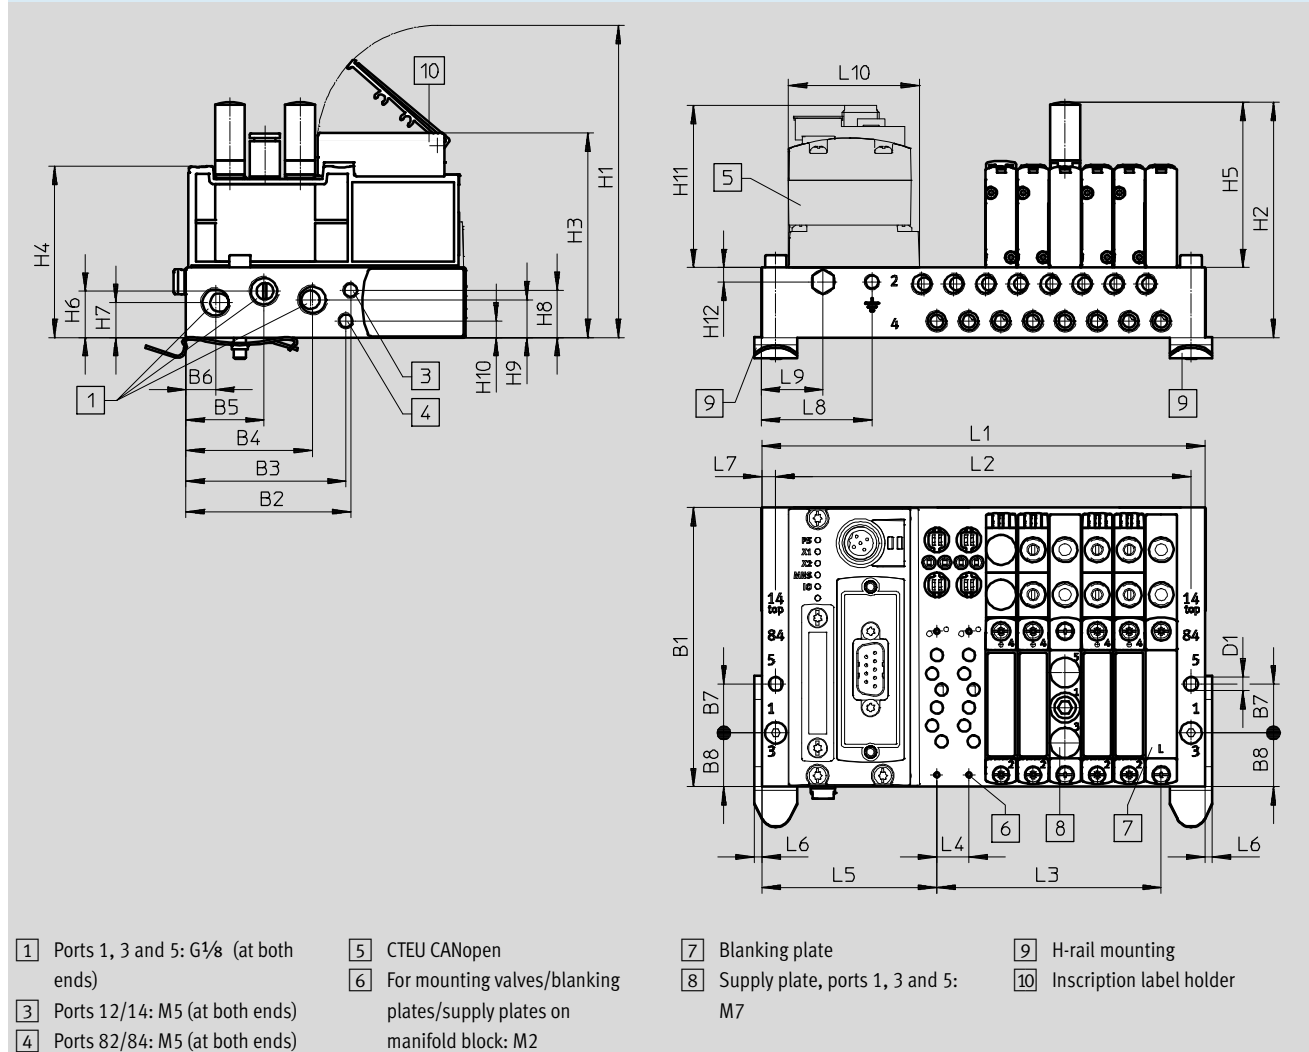Example of a valve terminal VTUG with I-Port interface

Dimensions – Example of a valve terminal with I-Port interface, size 10

Download CAD data → [www.festo.com](http://www.festo.com)



## Fieldbus modules CTEU/Installation system CTEL

Example of a valve terminal VTUG with I-Port interface

| Type | No. of valve positions | Size 10 |    |      |      |      |     |    |      |      |       |      |    |      |      |      |      |      |
|------|------------------------|---------|----|------|------|------|-----|----|------|------|-------|------|----|------|------|------|------|------|
|      |                        | B1      | B2 | B3   | B4   | B5   | B6  | B7 | B8   | D1 Ø | H1    | H2   | H3 | H4   | H5   | H6   | H7   | H8   |
| VABM | 4-24                   | 91.5    | 54 | 52.4 | 41.5 | 25.6 | 9.8 | 16 | 17.7 | 4.5  | 102.3 | 77.1 | 67 | 56.1 | 54.1 | 15.2 | 11.5 | 15.5 |

| Type | No. of valve positions | Size 10 |     |      |     |      |      |     |     |    |    |      |
|------|------------------------|---------|-----|------|-----|------|------|-----|-----|----|----|------|
|      |                        | H9      | H10 | H11  | H12 | L4   | L5   | L6  | L7  | L8 | L9 | L10  |
| VABM | 4-24                   | 12.4    | 5.5 | 54.8 | 4.8 | 10.5 | 57.3 | 2.5 | 4.5 | 36 | 20 | 42.5 |

| Type | No. of valve positions | Size 10 |       |       |
|------|------------------------|---------|-------|-------|
|      |                        | L1      | L2    | L3    |
| VABM | 4                      | 103     | 94    | 31.5  |
|      | 5                      | 113.5   | 104.5 | 42    |
|      | 6                      | 124     | 115   | 52.5  |
|      | 7                      | 134.5   | 125.5 | 63    |
|      | 8                      | 145     | 136   | 73.5  |
|      | 9                      | 155.5   | 146.5 | 84    |
|      | 10                     | 166     | 157   | 94.5  |
|      | 12                     | 187     | 178   | 115.5 |
|      | 24                     | 313     | 304   | 241.5 |