



Fieldbus Direct

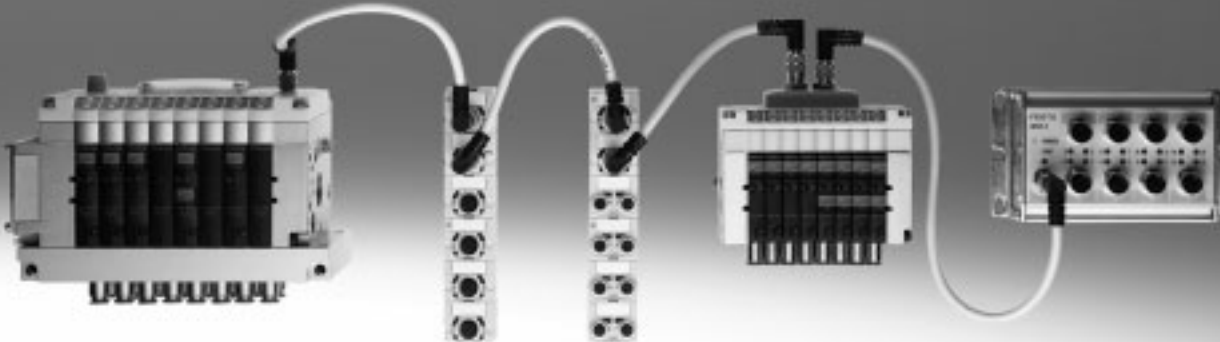

Fieldbus Direct

Key features

FESTO

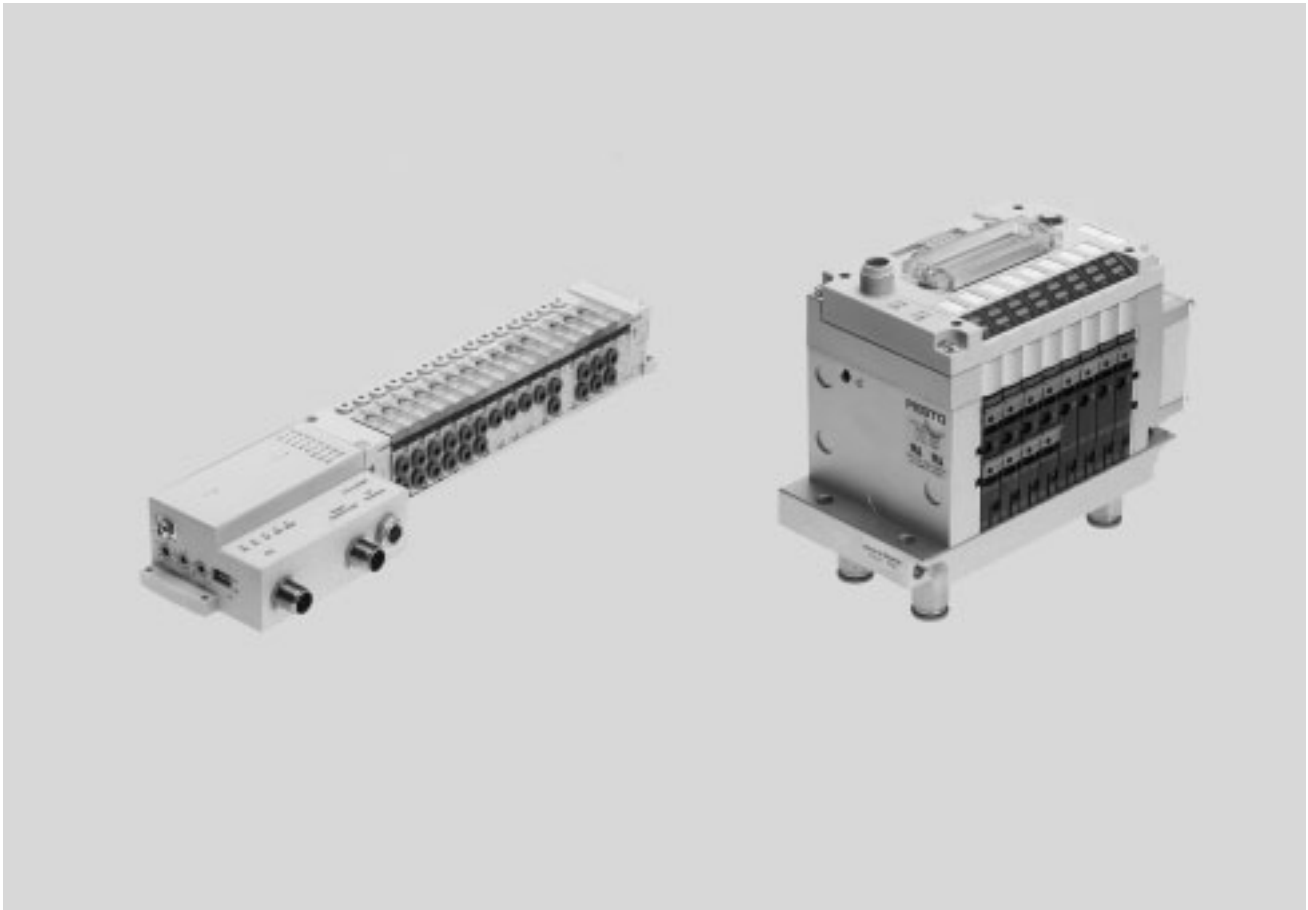

The system

- Extremely compact and space-saving design
- Low-cost solution for the connection of a small number of valves to a fieldbus
- Extremely safe, protection class up to IP65 depending on the series

The Fieldbus Direct system comprises the following valve terminal series:

- CPV
- CPV-SC

The Fieldbus Direct product range is the most compact way of connecting valves to a fieldbus. The fieldbus node is directly integrated in the electrical actuation of the valve terminal and therefore takes up only a minimal amount of space.

Fieldbus Direct is a system for the connection of one valve terminal to nine different fieldbus standards. The most important systems including PROFIBUS, Interbus, DeviceNet and CANopen are supported.

The CP string extension option allows the functions and components of the CPI installation system to be used.

The optional string extension allows additional valve terminals and I/O modules to be connected to the fieldbus node of the Fieldbus Direct system.

The I/O modules and cables for the CP string extension are ordered using the order code for the CPI installation system.

The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All of the required electrical signals are transmitted via the CPI cable, which means that no further installation is needed on the extension module.

Valve terminal configurator

A valve terminal configurator is available online to help you select a suitable Fieldbus Direct valve terminal. Like all valve terminals, Fieldbus Direct is ordered using an ident. code.

This ident. code specifies the valve functions, the number of valves, vacant positions as well as the additional functions and the type of compressed air supply.

As is the case with all Festo products, all Fieldbus Direct valve terminals are supplied:

- fully pre-assembled
- fitted with fittings on request


Online via: → www.festo.com

- tested for electrical function
- tested for pneumatic function
- securely packaged
- manuals can be downloaded free of charge

Fieldbus Direct

Key features

Switch module for CPV Direct

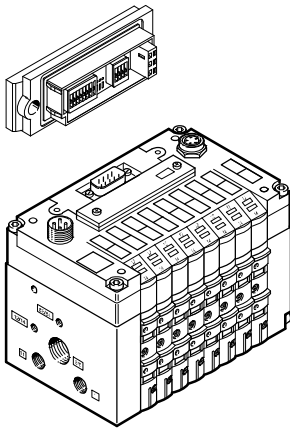

The bus parameters and the device configuration of CPV Direct are set using the removable switch module.

The integrated DIL switches are easy to set and check, even if the mounting position is difficult to access.

In the case of the valve terminals with the CP system according to Specification "B", the DIL switches for parameterisation/configuration are integrated in the basic electrical unit.

CP string extension

The optional string extension allows an additional valve terminal and I/O modules to be connected to the fieldbus nodes of the Fieldbus Direct system. A CP string of the CP installation system is integrated in the fieldbus node as an extension. Different input and output modules as well as CPV, MPA-S and CPV-SC valve terminals can be connected.

The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All of the required electrical signals are transmitted via the CP cable, which in turn means that no further installation is needed on the extension module.

The CP string interface offers:


- 16 input signals
- 16 output signals for output modules 24 V DC or solenoid coils
- Logic and sensor supply for the input modules
- Load voltage supply for the valve terminals
- Logic supply for the output modules

The variant according to Specification "B" supports the connection of

- 32 inputs
- 32 outputs 24 V DC or solenoid coils.


It goes without saying that the CP modules without Specification "B" can also be connected to the CPI string extension of valve terminals.

CPV Direct with fieldbus node



- 8 valve slices
- 16 solenoid coils
- 16 3/2-way valves

CPV Direct with input module 24 V DC for detecting the cylinder end positions

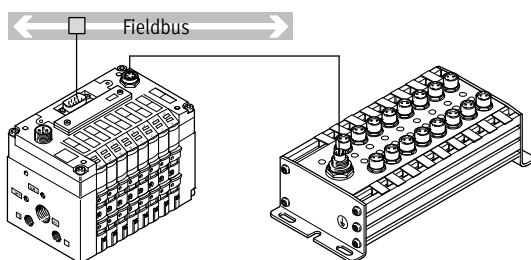

- 8 valve slices with up to 16 solenoid coils
- 16 inputs M8 or M12, each with sensor supply

Variant according to Specification "B"

- 32 input signals
- 32 output signals/solenoid coils

Fieldbus Direct

Key features – Bus connection

Fieldbus Direct system diagnostics

The fieldbus node together with the modules connected to the CP string offer several diagnostic options.

Diagnostic LEDs on the Fieldbus Direct node

The fieldbus-specific LEDs display the communication status and the fieldbus function.

Further LEDs display the power supply status of all connected modules as a common message.

- Undervoltage
- Short circuit
- Interruption of voltage


Diagnostic LEDs on the CP extension modules

LEDs on the individual CP/CPI modules display the current status of the switching signals of the inputs or outputs. Additional LEDs display short circuits or overload of the power supply and communication faults on the CP connection.

Diagnostic messages via the fieldbus

All available diagnostic information is transferred to the fieldbus node by means of the CP connection. This means that the diagnostic information for the entire device can be transferred to the fieldbus master.

- Configuration errors
- Short circuit/overload of an output module
- Short circuit/undervoltage of the sensor supply
- Undervoltage/load voltage of the valves
- Interruption of a CP string to one of the CP modules

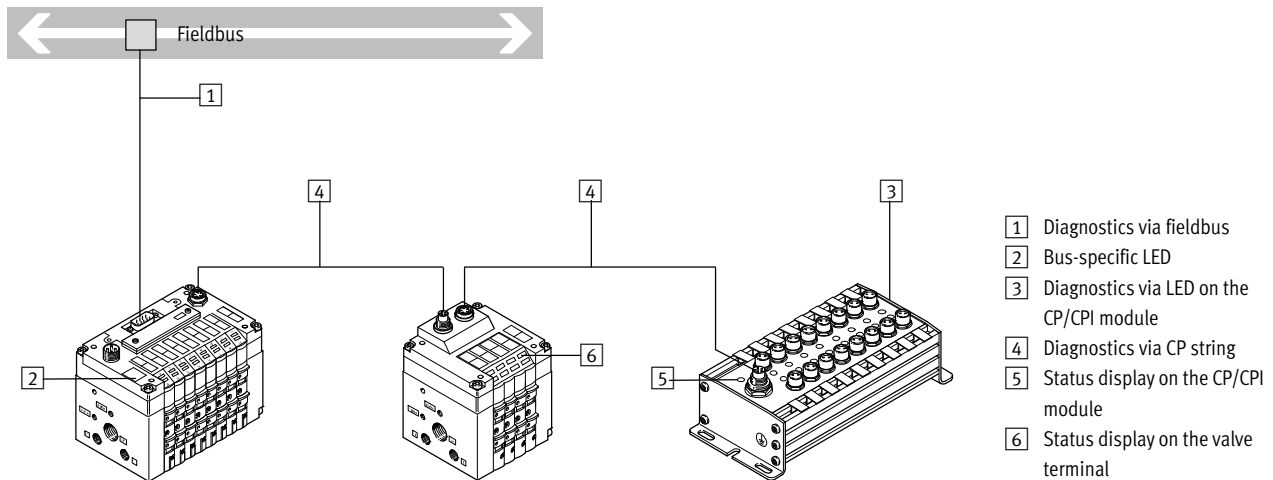


Fieldbus Direct

Overview of examples

Connection options

CPV-SC

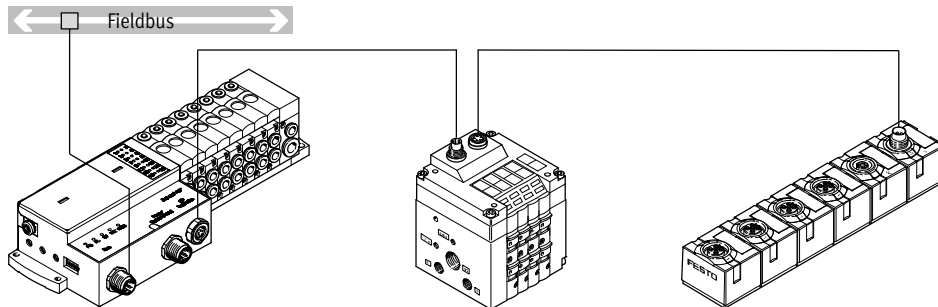


CPVSC1 valve terminals with fieldbus interfaces can be equipped with 4 to 16 valve positions and 4 to 16 solenoid coils.

Designs

- PROFIBUS connection
- 4 to 16 solenoid coils

Valve terminals with CP interface

CPV valve terminal




CPV10
CPV14
CPV18

- Max. 16 valves in 8 valve slices
- Highly compact and space-saving
- Width 10, 14, 18 mm
- Nominal flow rate 400/800/1600 l/min
- CPV10, CPV14 and CPV18 with CPI functionality

Further information

➔ Internet: [cpv](#)

MPA-S valve terminal




MPA1
MPA2

- Max. 32 valves
- Modular and versatile
- Width 10, 20 mm
- Nominal flow rate 360/700 l/min
- CPI functionality

Further information

➔ Internet: [mpa-s](#)

CPV-SC valve terminal




CPV-SC

- Max. 16 valves
- Extremely compact
- Width 10 mm
- Nominal flow rate 170 l/min
- CPI functionality

Further information


➔ Internet: [cpv-sc](#)

CP/CPI installation system input/output modules




CP-E16-M12x2-5POL
CP-E16N-M12x2-5POL

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- M12 socket, double allocation
- 1x M9 CP/CPI connection
- PNP/NPN, IP65




CP-E16-M8
CP-E16N-M8

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- M8 socket, single allocation
- 1x M9 CP connection
- PNP/NPN, IP65



CP-E16-M8-Z

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- Electrical isolation through additional power supply
- M8 socket, single allocation
- 1x M9 CP connection
- Separate sensor supply
- PNP/NPN, IP65




CP-A08-M12-5POL
CP-A08N-M12

- 8 outputs 24 V DC
- Output signal display via 8 LEDs
- Operating status display
- M12 socket, single allocation
- 2x M9 CP connection
- Separate load voltage
- Outputs resistant to overloads and short circuits
- PNP/NPN, IP65

Detailed description of input and output modules


➔ Internet: ctec

CP/CPI Compact Line input/output modules




CP-E08-M12x2-CL

- 8 inputs 24 V DC
- Signal status display via 8 LEDs
- Operating status display
- 4x M12 socket, 5-pin, double allocation
- 2x M9 CP connection
- PNP, IP65/67




CP-E08-M8-CL

- 8 inputs 24 V DC
- Signal status display via 8 LEDs
- Operating status display
- 8x M8 socket, 3-pin, single allocation
- 2x M9 CP connection
- PNP, IP65/67



CP-E16-KL-CL

- 16 inputs 24 V DC
- Indirect signal status display via LEDs in the connection set of the tension-spring socket
- Operating status display
- Screw terminal or tension-spring sockets
- 2x M9 CP connection
- PNP, IP20




CP-A04-M12x2-CL

- 4 outputs 24 V DC
- Signal status display via 4 LEDs
- Operating status display
- 4x M12 socket, 5-pin, double allocation
- 2x M9 CP connection
- Outputs resistant to overloads and short circuits
- PNP, IP65/67

Detailed description of input and output modules


➔ Internet: ctec

CP/CPI Eco Line input/output modules




CP-E16-M8-EL

- 16 inputs 24 V DC
- Signal status display via LEDs
- Operating status display
- 16x M8 socket, 3-pin, double allocation
- 2x M9 CP connection
- PNP




CP-E16-M12-EL

- 16 inputs 24 V DC
- Signal status display via LEDs
- Operating status display
- 8x M8 socket, 5-pin, single allocation
- 2x M9 CP connection
- PNP



CP-E32-M8-EL

- 32 inputs 24 V DC
- Signal status display via LEDs
- Operating status display
- 16x M8 socket, 4-pin
- 2x M9 CP connection
- PNP




CP-A08-M12-EL-Z

- 8 outputs 24 V DC
- Signal status display via LEDs
- Operating status display
- 4x M12 socket, 5-pin, double allocation
- 2x M9 CP connection
- Outputs resistant to overloads and short circuits
- PNP

Detailed description of input and output modules

➔ Internet: ctec

CP connecting cable



The CP string is connected using pre-assembled CP cables, which are supplied in lengths from 0.5 to 8 metres.

Fieldbus systems for CPV Direct

FESTO



Fieldbus variants

Of the more than 20 different fieldbus systems (protocols) available on the market, some have emerged as the most important variants. Festo supports these by means of various fieldbus nodes (FBxx) on its valve terminals. Fieldbus systems require a powerful, central PLC and a master interface adapted to that particular fieldbus.

Fieldbus systems are generally used when several devices with many inputs/outputs, complex functions or high communication levels must be controlled. In this case, the advantages of simple cabling, easy diagnostics and maintenance outweigh the extra outlay for a fieldbus master interface and the necessary know-how.

ABB

MOELLER 

Festo fieldbus

A fieldbus developed by Festo with simple prompting, supported by the controllers of the FPC, SF and IPC series (Festo FB5). A maximum of 98 bus stations can be connected to the Festo fieldbus. The bus can operate with 4 different baud rates (31.25, 62.5, 187.75 and 375 kbps).

INTERBUS

An open fieldbus standard, originally developed by Phoenix Contact and now in worldwide use. Important installation accessories such as bus plugs must be obtained from Phoenix or its partners.

PROFIBUS DP

An open fieldbus standard, originally developed by Siemens and in worldwide use. The bus can operate with baud rates from 9.6 kBaud to 12 MBaud.

CANopen

BECKHOFF

CC-Link

DeviceNet


An open fieldbus system based on CAN technology originally developed for the automotive sector. DeviceNet was originally developed by Rockwell (Allen Bradley) and is now an open standard.

Moeller SUCONET K

A maximum of 98 bus stations can be connected to the SUCONET K fieldbus. The bus operates with a baud rate of 187.5 or 375 kbps, depending on the design, bus length, etc. The bus interface is based on RS 485 with a master/slave structure.

ABB CS31

The fieldbus from ABB connects a maximum of 63 fieldbus stations to the fieldbus master. The data is transferred at a constant baud rate of 187.5 kbps. The protocol is suitable for use in all areas of automation technology.



CC-Link

Fieldbus from Mitsubishi (Control & Communication-Link). The integrated interface with RS 485 transmission technology is designed for the typical CC-Link 3-wire connection technology (in accordance with CLPA CC-Link Spec. V1.11).

CANopen

Another fieldbus system based on CAN. Standardised by the "CAN in Automation" (CiA) user group. CANopen is characterised by its multi-master capability and high protocol efficiency. It is used throughout industrial automation.

Beckhoff Fieldbus Box

A fibre optic cable (FOC) fieldbus developed by Beckhoff. This fieldbus is a ring bus. The baud rate is 2000 kbps. A maximum of 124 stations can be connected. The use of fibre optic cables makes it suitable for use in environments where there is a lot of interference.

Fieldbus Direct

Peripherals overview



| Fieldbus systems | | | | | | |
|-------------------------------|---|--------------------------|----------------------------------|------------------|--|------------------|
| Valve terminal type | Fieldbus protocol | Valve terminal | CP string extension | | Plug type, bus connection | → Page/ Internet |
| | | Number of solenoid coils | Number of solenoid coils/outputs | Number of inputs | | |
| CPV-...-GE-DI01-8 | PROFIBUS DP (12 MBaud) Festo ABB CS31 Moeller SUCONET K | 16 | 16 / 8 | 16 | <ul style="list-style-type: none"> • Sub-D fieldbus plug • 2xM12, 5-pin, B-coded | 13 |
| CPV-...-GE-DI02-8 | PROFIBUS DP (12 MBaud) | 16 | 32 / 32 | 32 | <ul style="list-style-type: none"> • Screw terminal strip, 5-pin • Sub-D socket, 9-pin • Socket and plug, M12x1, 5-pin, B-coded | 17 |
| CPVSC1-AE16-DP | PROFIBUS | 16 | 32 / 32 | 32 | Sub-D socket, 9-pin | 21 |
| CPV-...-GE-DN2-8 | DeviceNet | 16 | 16 / 8 | 16 | <ul style="list-style-type: none"> • 2x M12, 5-pin • Screw terminal strip, 5-pin | 25 |
| CPV-...-DN3-8 | DeviceNet | 16 | 32 / 32 | 32 | <ul style="list-style-type: none"> • Screw terminal strip, 5-pin • Sub-D socket, 9-pin • Socket and plug, M12x1, 5-pin, A-coded | 29 |
| CPV-...-GE-CO2-8 | CANopen | 16 | 16 / 8 | 16 | <ul style="list-style-type: none"> • Sub-D • 2x M12, 5-pin • Screw terminal strip, 5-pin | 33 |
| CPV-...-CO3-8 | CANopen | 16 | 32 / 32 | 32 | <ul style="list-style-type: none"> • Screw terminal strip, 5-pin • Sub-D socket, 9-pin • Socket and plug, M12x1, 5-pin, A-coded | 37 |
| CPV-...-GE-IB-8 | INTERBUS | 16 | 16 / 8 | 16 | Sub-D fieldbus plug | 41 |
| CPV-...-GE-IP-8 ¹⁾ | Beckhoff Fieldbus Box | 16 | – | – | FOC | 45 |
| CPV-...-GE-CC-8 | CC-Link | 16 | – | 16 | <ul style="list-style-type: none"> • Sub-D, 9-pin • Screw terminal strip | 49 |

1) String extension not possible

Fieldbus Direct

Key features – Electrical connection

Operating voltage and load current supply

The operating voltages for the Fieldbus Direct valve terminal and for the extension modules are connected centrally via the 4- or 5-pin M12 plug. It must supply the operating voltages for the electronic unit of the fieldbus node and the modules connected to the CP string.

The load supply for the valves is supplied separately from the supply for the electronic unit.

The valves of the Fieldbus Direct valve terminals and the valves/outputs on the CP string extension are supplied

together via pin 2 of the M12 plug. The power supply for the sensors connected to the input module is normally also supplied by the M12 plug. Up to 500 mA for the sensor supply is made available to the connected input module via the CP string.

A separate, electrically isolated sensor supply is available with the two input modules CP-E16-KL-IP20-Z and CP-E16-M8-Z. In this case, a max. current of 2 A is available for the sensors.

Since the CP string carries the lines for both communication and the entire power supply for the connected modules, it represents a very easily installed extension option.


The following functions are supported via the CP string:

- Connection for data exchange
- Power supply for the connected modules
- Sensor voltage supply of up to 500 mA

- Load voltage supply for the connected valves

The electrical modules are protected against overload by electronic fuses. All diagnostic information for the modules is transferred to the fieldbus node via the CP string and from there forwarded to the PLC according to the relevant protocol.

Example of circuitry for CPV Direct – Connection of load voltage

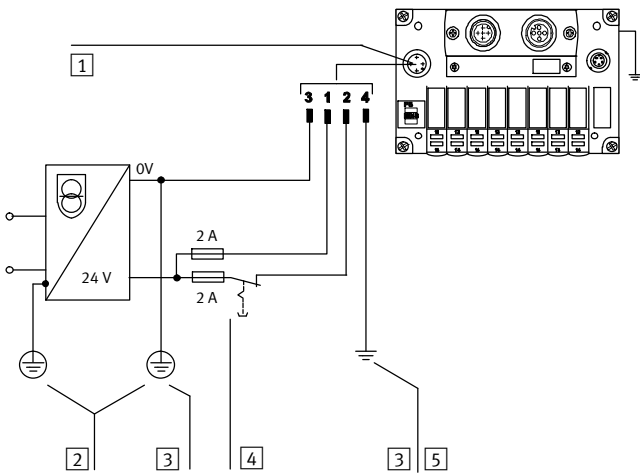

- 1 Connection for power supply on the CPV Direct valve terminal
- 2 Protective earth (PE)
- 3 Equipotential bonding
- 4 Load voltage (can be disconnected separately) and external fuse
- 5 Earth terminal on pin 4, configured for 3 A

Pin allocation – Power supply for CPV Direct

| | Pin | Description | Notes |
|--|-----|---------------------------------|---|
| | 1 | 24 V DC electronics and sensors | The voltage is supplied via a 4-pin M12 plug (A-coded). |
| | 2 | 24 V DC valves and outputs | |
| | 3 | 0 V electronics and sensors | |
| | 4 | Earth terminal | |


Fieldbus Direct

Key features – Electrical connection



Operating voltage and load current supply

Example of circuitry for CPVSC1 – Connection of load voltage

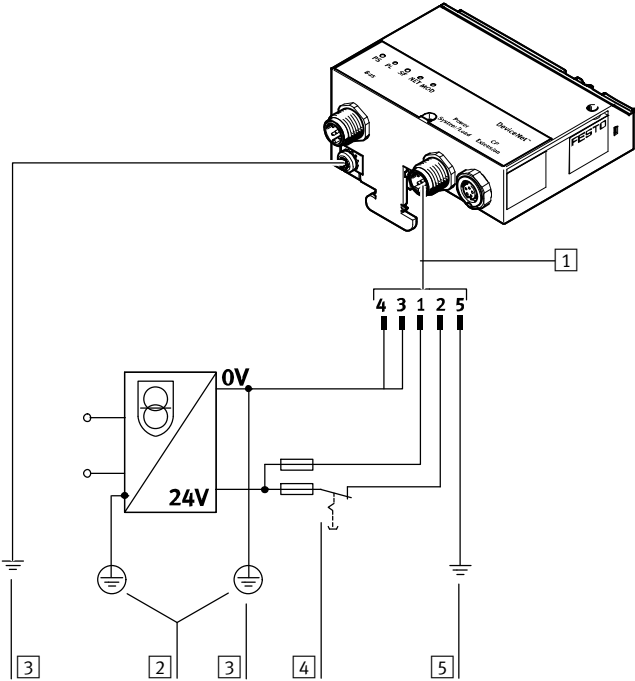

- 1 Connection for power supply
- 2 Protective earth (PE)
- 3 Equipotential bonding
- 4 Load voltage (can be disconnected separately) and external fuse
- 5 Earth terminal at pin 5

Pin allocation – Power supply for CPVSC1

| | Pin | Description | Notes |
|--|-----|---------------------------------|--|
| | 1 | 24 V DC electronics and sensors | The voltage is supplied via a 5-pin M12 plug (B-coded). |
| | 2 | 24 V DC valves and outputs | In case of extension with 1st generation CP valve terminals (without auxiliary power supply), a bridge must be placed between pin 3 and pin 4. |
| | 3 | 0 V electronics and sensors | This cancels the electrical isolation. |
| | 4 | 0 V valves and outputs | |
| | 5 | Protective earth (PE) | |

Fieldbus Direct, CPV-DI01

Technical data – Fieldbus node CPV-DI01



CPV fieldbus node for communication between a CPV valve terminal and a fieldbus master. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED. The CPV... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 16 digital inputs and 8 digital outputs or 16 valves can be connected via a serial CP string extension.

DI01 supports 4 different fieldbus protocols, which are selected by means of DIL switches:

- PROFIBUS DP
- Moeller SUCOnet K
- ABB CS31
- Festo fieldbus

The CPV fieldbus node is available in three sizes, with identical performance characteristics:


- CPV10
- CPV14
- CPV18






Application

Bus connection

Sub-D socket



M12 adapter



Sub-D socket

- 9-pin Sub-D socket
- Installation with IP65 protection

The bus connection is established via a 9-pin Sub-D socket with a typical PROFIBUS allocation (to EN 50 170). The bus connector plug (with protection class IP65 from Festo or IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable. An active bus terminal can be connected using the integrated DIL switch. The Sub-D interface is designed for the activation of network components via a fibre optic cable connection.

M12 adapter

- Plug connector 2xM12
- Installation with IP65 protection

Alternatively the bus connection can be established via a 2x M12 adapter (B-coded).

Fieldbus Direct, CPV-DI01

Technical data – Fieldbus node CPV-DI01

| General technical data | | | | |
|--|---|--|--------------------------------|-----------------|
| Type | | CPV10-GE-DI01-8 | CPV14-GE-DI01-8 | CPV18-GE-DI01-8 |
| Fieldbus interface | | Either <ul style="list-style-type: none"> • Sub-D socket, 9-pin • Socket and plug, M12x1, 5-pin, B-coded | | |
| Electrical isolation of the fieldbus interface | | Via optocoupler | | |
| Baud rates | [kbps] | 9.6 ... 12,000; automatic detection | | |
| Addressing range | PROFIBUS DP (12 MBaud) Festo fieldbus ABB CS31 Moeller SUCONET K | 1 ... 125; Set using a switch module | | |
| CP/CPI string extension | | Yes, 16 inputs and 8 outputs (or 16 valves) | | |
| LED display (bus-specific) | BUS | Communication and configuration errors | | |
| LED display | Product-specific | Valve signal status | | |
| | Power | Operating voltage for electrics and load supply | | |
| Product identification | | Product family 4: Valves | | |
| Ident. number | | 0xC9 | | |
| Type of communication | | Cyclical communication | | |
| Configuration support | | GSD file and bitmaps | | |
| Max. no. of solenoid coils | | 16 | | |
| Max. no. of solenoid coils with string extension | | 32 | | |
| Max. no. of outputs | | 8 (1x16 solenoid coils omitted) | | |
| Max. no. of inputs | | 16 | | |
| Device-specific diagnostics | | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply • Missing module on CP/CPI string extension • Via device-specific diagnostics (DPVO) | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V] | 20.4 ... 26.4 | |
| | Residual ripple | [Vss] | 4 | |
| | Power failure bridging | [ms] | 10 | |
| Current consumption | | [mA] | Max. 100 + sensor supply | |
| Protection class to EN 60529 | | | IP65 | |
| Materials | Housing | | Die-cast aluminium | |
| | Cover | | Reinforced polyamide | |
| | Seal | | Nitrile rubber | |
| Dimensions | | | → Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |


| Operating and environmental conditions | | | |
|---|--|------|-------------------------------------|
| Ambient temperature | | [°C] | -5 ... +50 |
| Storage temperature | | [°C] | -20 ... +70 |
| Fieldbus certification | | | PNO |
| Certification | | | cULus recognized (OL) |
| CE symbol (see declaration of conformity) | | | In accordance with EU EMC directive |

Fieldbus Direct, CPV-DI01

Technical data – Fieldbus node CPV-DI01



Connection and display components

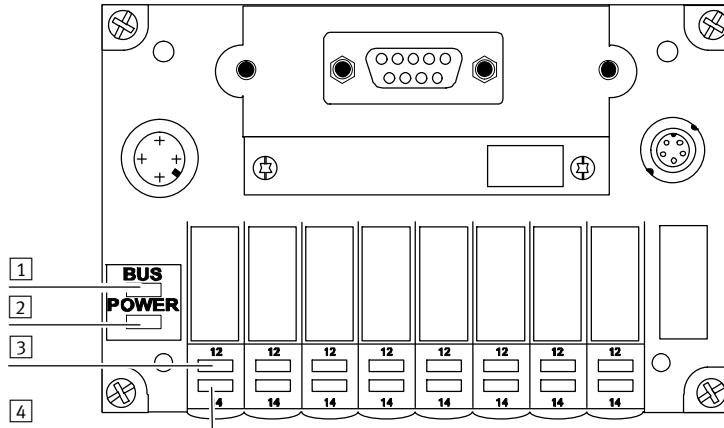

- 1 Red LED: Bus status/error (BUS)
- 2 Green LED: Power supply (POWER)
- 3 Yellow LED row: For pilot solenoid coils 12
- 4 Yellow LED row: For pilot solenoid coils 14

Pin allocation for fieldbus interface (viewed on plug)

| | Pin | Festo Sub-D plug (IP65) | Manufacturer-specific signal designation | | | | |
|--|---------|-------------------------|--|----------|-------------|-------------------------------------|-------------------------------------|
| | | | Festo fieldbus interface | ABB CS31 | PROFIBUS DP | Moeller SUCONET K | |
| | | | | | | Sub-D 9-pin | DIN (round) 5-pin |
| | 1 | – | – | – | n.c. | – | – |
| | 2 | – | – | – | n.c. | – | – |
| | 3 | B | S+ | Bus1 | RxD/TxD-P | 3 (T _A /R _A) | 4 (T _A /R _A) |
| | 4 | – | – | – | CNTR-P | – | – |
| | 5 | – | – | – | DGND | – | – |
| | 6 | – | – | – | VP | – | – |
| | 7 | – | – | – | n.c. | – | – |
| | 8 | A | S- | Bus2 | RxD/TxD-N | 7 (T _B /R _B) | 1 (T _B /R _B) |
| | 9 | – | – | – | n.c. | – | – |
| | Housing | Cable clip | Screened | Screened | Screened | 4 (screened) | Housing |













Pin allocation for M12 adapter

| | Bus In (pin) | Bus Out (socket) | PROFIBUS DP (signal) | Description |
|--|--------------|------------------|----------------------|---|
| | M12 and 5 | M12 and 5 | Screened | Screened or functional earth |
| | 4 | 4 | RxD / TxD-P | Data B |
| | – | 3 | DGND | Reference potential to supply voltage positive (VP) |
| | – | 1 | VP (P5V) | Supply voltage positive |
| | 2 | 2 | RxD / TxD-N | Data A |

Fieldbus Direct, CPV-DI01

FESTO

Accessories – Fieldbus node CPV-DI01

| Ordering data | | | |
|---|---|--------------------------|----------------------------|
| Designation | | Part No. | Type |
| Fieldbus node | | | |
|  | CPV10 | 165809 | CPV10-GE-DI01-8 |
| | CPV14 | 165811 | CPV14-GE-DI01-8 |
| | CPV18 | 165813 | CPV18-GE-DI01-8 |
| Switch module | | | |
|  | For setting bus parameters and device configuration in the case of CPV | 165814 | CPV10/14/18-GE-DI-SM |
| Power supply | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 FBSD-WD-9 |
| Fieldbus connection | | | |
|  | Fieldbus socket, Sub-D connection | 532216 | FBS-SUB-9-GS-DP-B |
| Bus connection Micro Style M12 | | | |
|  | Bus connection Micro Style, 2xM12 | 533118 | FBA-2-M12-5POL-RK |
|  | Socket M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK | 1067905 | NECU-M-B12G5-C2-PB |
|  | Plug M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK | 1066354 | NECU-M-S-B12G5-C2-PB |
|  | Fieldbus socket for Micro Style connection, M12, 5-pin, straight | 18324 | FBSD-GD-9-5POL |
| | Plug for Micro Style connection, M12, 5-pin, straight | 175380 | FBS-M12-5GS-PG9 |
| Valve terminal connection | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 KVI-CP-3-GS-GD-8 |
| User documentation | | | |
|  | User documentation for CPV Direct, CPV fieldbus node DI01 | German | 165816 P.BE-CP-DI01-DE |
| | | English | 165817 P.BE-CP-DI01-EN |
| | | Italian | 165818 P.BE-CP-DI01-IT |
| | | French | 165819 P.BE-CP-DI01-FR |
| | | Spanish | 165820 P.BE-CP-DI01-ES |

Fieldbus Direct, CPV-DI02-8

Technical data – Fieldbus node CPV-DI02-8



CPV fieldbus node according to the CP system with Specification “B” for communication between a CPV valve terminal and a fieldbus master. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED. The CPV... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 32 digital inputs and outputs or 32 solenoid coils can be connected via a serial CP string extension.

The CPV fieldbus node is available in three sizes, with identical performance characteristics:



- CPV10
- CPV14
- CPV18





Application

Bus connection



Screw terminals



Plug connector 2xM12



Sub-D fieldbus plug



Sub-D socket

- 9-pin Sub-D socket
- Installation with IP65 protection

The bus connection is established via a 9 pin Sub-D socket with a typical PROFIBUS allocation (to EN 50170). The bus connector plug (with protection class IP65 from Festo or IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable. An active bus terminal can be connected using the integrated DIL switch. The Sub-D interface is designed for the activation of network components via a fibre optic cable connection.

M12 adapter

- Plug connector 2xM12
- Installation with IP65 protection

Alternatively the bus connection can be established via a 2x M12 adapter (A-coded).

Screw terminals

- 5-pin screw terminal strip for installation in protected environments (IP20). The bus connection is established via a 5-pin row. If the valve terminal is ordered with this bus connection, the 5-pin screw terminal strip will also be supplied. It is designed with double screw terminals for the incoming and the outgoing bus cable. This connection technology provides a T-distributor function.

Fieldbus Direct, CPV-DI02-8

Technical data – Fieldbus node CPV-DI02-8


| General technical data | | | | |
|--|------------------------|--|---|-----------------|
| Type | | CPV10-GE-DI02-8 | CPV14-GE-DI02-8 | CPV18-GE-DI02-8 |
| Fieldbus interface | Either | <ul style="list-style-type: none"> Screw terminal strip, 5-pin Sub-D socket, 9-pin Socket and plug, M12x1, 5-pin, B-coded | | |
| Electrical isolation of the fieldbus interface | | Via optocoupler | | |
| CP string extension | | Yes, 32 inputs and 32 outputs | | |
| Baud rates | [kbps] | 9.6 ... 12,000; Automatic detection | | |
| Addressing range | PROFIBUS DP (12 Mbaud) | 1 ... 125; Set using a switch module | | |
| LED display | Bus-specific | Communication and configuration errors | | |
| | Product-specific | Valve signal status | | |
| | Power | Operating voltage for electrics and load supply | | |
| Ident. number | | 0xC9 | | |
| Type of communication | | Cyclical communication | | |
| Configuration support | | GSD file and bitmaps | | |
| Max. no. of solenoid coils | | 16 | | |
| Max. no. of solenoid coils with string extension | | 48 with string extension | | |
| Max. no. of outputs | | 16 solenoid coils and 32 outputs | | |
| Max. no. of inputs | | 32 | | |
| LED diagnostic displays | POWER | Operating voltage for electronics and load supply | | |
| | BUS | Communication and configuration errors | | |
| Device-specific diagnostics | | <ul style="list-style-type: none"> Short circuit/overload of outputs Undervoltage of valves Undervoltage of outputs Undervoltage of sensor supply Missing module on CP string extension Via device-specific diagnostics (DPVO) | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V] | 20.4 ... 26.4 | |
| | Residual ripple | [Vss] | 4 | |
| | Power failure bridging | [ms] | 10 | |
| Current consumption | | [mA] | Max. 100 + sensor supply | |
| Protection class to EN 60529 | | | <ul style="list-style-type: none"> IP20 with 5-pin screw terminal strip IP65 Sub-D, socket/plug M12x1 | |
| Materials | Housing | | Die-cast aluminium | |
| | Cover | | Reinforced polyamide | |
| | Seals | | Nitrile rubber, polychloroprene rubber | |
| Dimensions | | | → Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |

| Operating and environmental conditions | | |
|---|------|-------------------------------------|
| Ambient temperature | [°C] | -5 ... +50 |
| Storage temperature | [°C] | -20 ... +70 |
| Fieldbus certification | | PNO |
| Certification | | cULus recognized (OL) |
| CE symbol (see declaration of conformity) | | In accordance with EU EMC directive |
| Note on materials | | RoHS-compliant |

Fieldbus Direct, CPV-DI02-8

Technical data – Fieldbus node CPV-DI02-8

Connection and display components

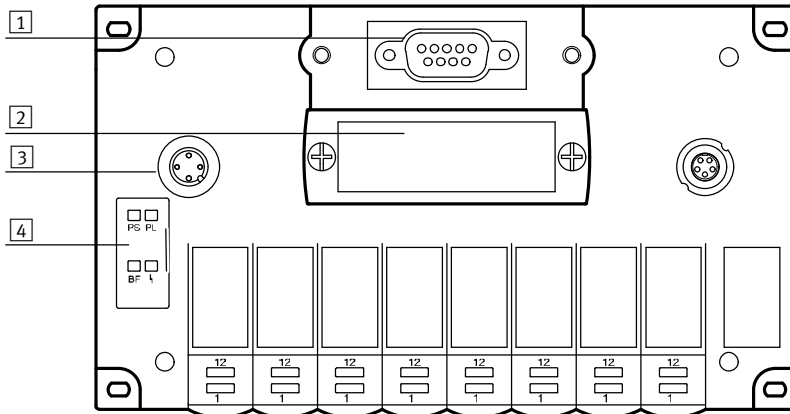

- 1 Fieldbus connection (9-pin Sub-D socket)
- 2 Removable switch cover
- 3 Operating/load voltage connection (4-pin M12 plug)
- 4 Power LEDs (PS, PL) and bus status LEDs (BF)

Pin allocation for PROFIBUS DP interface (viewed on plug)

| | Pin | Signal | Description |
|--|---------|-----------|--------------------------------|
| | 1 | n.c. | Not connected |
| | 2 | n.c. | Not connected |
| | 3 | RxD/TxD-P | Received/transmitted data P |
| | 4 | CNTR-P | Repeater control signal |
| | 5 | DGND | Data reference potential (M5V) |
| | 6 | VP | Supply voltage positive (P5V) |
| | 7 | n.c. | Not connected |
| | 8 | RxD/TxD-N | Received/transmitted data N |
| | 9 | n.c. | Not connected |
| | Housing | Screened | Connection to functional earth |












Pin allocation for M12 adapter

| | Pin | Signal | Description |
|--|-----|-----------|--------------------------------|
| | 1 | VP | Supply voltage positive (P5V) |
| | 2 | RxD/TxD-N | Received/transmitted data N |
| | 3 | DGND | Data reference potential (M5V) |
| | 4 | RxD/TxD-P | Received/transmitted data P |
| | 5 | FE | Functional earth |

Fieldbus Direct, CPV-DI02-8

FESTO

Accessories – Fieldbus node CPV-DI02-8

| Ordering data | | | | |
|---|--|--------------------------|----------|----------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | CPV10 | | 546188 | CPV10-GEDI02-8 |
| | CPV14 | | 546190 | CPV14-GEDI02-8 |
| | CPV18 | | 546192 | CPV18-GEDI02-8 |
| Switch module | | | | |
|  | For setting bus parameters and device configuration in the case of CPV | | 165814 | CPV10/14/18-GE-DI-SM |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 | SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 | FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 | SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 | FBSD-WD-9 |
| Fieldbus connection | | | | |
|  | Fieldbus socket, Sub-D connection | | 532216 | FBS-SUB-9-GS-DP-B |
|  | M12 adapter | | 525632 | FBA-2-M12-5POL |
| Bus connection, 5-pin screw terminal strip | | | | |
|  | Open Style adapter for 5-pin terminal strip | | 525634 | FBA-1-SL-5POL |
|  | 5-pin terminal strip | | 525635 | FBSD-KL-2x5POL |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for CPV Direct, CPV fieldbus node DI02-8 | German | 548731 | P.BE-CPV-DI02-DE |
| | | English | 548732 | P.BE-CPV-DI02-EN |
| | | Spanish | 548733 | P.BE-CPV-DI02-ES |
| | | French | 548734 | P.BE-CPV-DI02-FR |
| | | Italian | 548735 | P.BE-CPV-DI02-IT |

Fieldbus Direct, CPVSC1-AE16-DP

Technical data – Fieldbus node CPVSC1-AE16-DP

FESTO



CPV-SC fieldbus node for communication between a CPV-SC valve terminal and a fieldbus master. The fieldbus node is used for activation of a CPV-SC valve terminal with up to 16 solenoid coils on max. 16 valve positions and for displaying the signal status via LED.

The CPV-SC... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 32 digital inputs and outputs can be connected via a serial CP string extension.



Application

Bus connection

The bus connection is established via a 9 pin Sub-D socket with a typical PROFIBUS allocation (to EN 50170). The bus connector plug facilitates the

connection of an incoming and an outgoing bus cable. There is no internal bus terminating resistor.

Condition monitoring

Condition monitoring supports preventative maintenance which is part of the function chain in automation systems. Each valve is assigned a switching

cycle counter that automatically registers movements of the system components. Once a maximum number of activa-

tions is reached, a message is sent to the controller via PROFIBUS and maintenance can be started. In the same way condition monitoring supports the

determining of service intervals for the function chain. All movements immediately after installation are registered.

Fieldbus Direct, CPVSC1-AE16-DP

Technical data – Fieldbus node CPVSC1-AE16-DP


| General technical data | | | |
|--|--|---------------------------------------|--------------------------------|
| Type | CPVSC1-AE16-DP | | |
| Fieldbus interface | Sub-D socket, 9-pin | | |
| Electrical isolation of fieldbus interface | Via optocoupler | | |
| Baud rate | [kbps] | 9.6 ... 12,000; automatic detection | |
| Addressing range | 0 ... 125 Set using rotary switch | | |
| CP string extension | Yes, 32 inputs and outputs | | |
| LED display (bus-specific) | BF | Bus fault | |
| LED display (product-specific) | PS | Common message regarding power supply | |
| | PL | Power supply for valves | |
| | SF | CP system fault | |
| Type of communication | DPV0: Cyclical communication | | |
| Protocol | PROFIBUS | | |
| Max. no. of solenoid coils | 16 | | |
| Device-specific diagnostics | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Short circuit/overload of inputs • Undervoltage of valve terminal • Undervoltage of valve terminal (extension) • Undervoltage of output module • Undervoltage of sensor supply • Missing module on the CP/CPI string • Condition monitoring | | |
| Parameterisation | Via GSD file | | |
| Additional functions | <ul style="list-style-type: none"> • Condition counter • Tool change function | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected |
| | Permissible range | [V] | 20.4 ... 26.4 |
| | Residual ripple | [Vss] | 4 |
| | Power failure bridging | [ms] | 20 |
| Current consumption | [mA] | Max. 200 + sensor supply | |
| Protection class to EN 60529 | IP40 | | |
| Materials | Polyamide | | |
| Note on materials | RoHS-compliant | | |
| Dimensions (L x W x D) | [mm] | 78 x 113 x 40 | |
| Weight | [g] | 200 | |
| Technical data on valves | → Internet: cpv-sc | | |

| Operating and environmental conditions | | | |
|--|------|-------------|--|
| Ambient temperature | [°C] | -5 ... +50 | |
| Storage temperature | [°C] | -20 ... +50 | |

Fieldbus Direct, CPVSC1-AE16-DP

Technical data – Fieldbus node CPVSC1-AE16-DP

Connection and display components

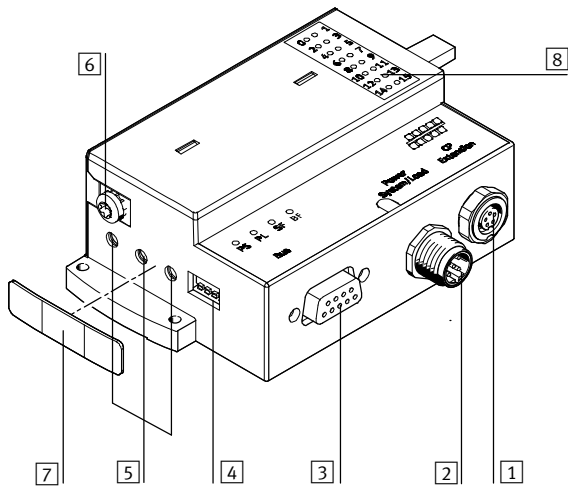

- 1 Connection for CP extension
- 2 Connection for power supply
- 3 Connection for fieldbus
- 4 DIL switch for CP extension
- 5 Rotary switch for station number
- 6 Earth terminal
- 7 Cover (for IP40 protection)
- 8 Signal status display per valve

Pin allocation for PROFIBUS DP interface






| Pin allocation | Pin | Signal | Description |
|---|--------------|----------------------|--------------------------------|
| Sub-D plug socket on the valve terminal | | | |
| | 1 | n.c. | Not connected |
| | 2 | n.c. | Not connected |
| | 3 | RxD/TxD-P | Received/transmitted data P |
| | 4 | CNTR-P ¹⁾ | Repeater control signal |
| | 5 | DGND | Data reference potential (M5V) |
| | 6 | VP | Supply voltage (P5V) |
| | 7 | n.c. | Not connected |
| | 8 | RxD/TxD-N | Received/transmitted data N |
| | 9 | n.c. | Not connected |
| | Hous- ing | Screened | Connection to housing |

1) The repeater control signal CNTR-P is realised as a TTL signal.

Fieldbus Direct, CPVSC1-AE16-DP



Accessories – Fieldbus node CPVSC1-AE16-DP

| Ordering data | | | | |
|---|--|---------|----------|------------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | Fieldbus node | | 541919 | CPVSC1-AE16-DP |
| Power supply Micro Style M12 | | | | |
|  | M12, 5-pin, straight socket (A-coded) | | 18324 | FBSD-GD-9-5POL |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for valve terminal CPV-SC-DP | German | 548725 | P.BE-CPASC-CPVSC-DP-DE |
| | | English | 548726 | P.BE-CPASC-CPVSC-DP-EN |
| | | French | 548728 | P.BE-CPASC-CPVSC-DP-FR |
| | | Italian | 548729 | P.BE-CPASC-CPVSC-DP-IT |
| | | Spanish | 548727 | P.BE-CPASC-CPVSC-DP-ES |

Fieldbus Direct, CPV-DN2

Technical data – Fieldbus node CPV-DN2



CPV fieldbus node for communication between a CPV valve terminal and a fieldbus master. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED.

The CPV... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 16 digital inputs and 8 digital outputs or 16 solenoid coils can be connected via a serial CP string extension.

The CPV fieldbus node supports the DeviceNet protocol and conforms to the device profile of the pneumatic valve.

The CPV fieldbus node is available in three sizes, with identical performance characteristics:



- CPV10
- CPV14
- CPV18





Application

Bus connection



Screw terminals



Plug connector 2xM12



Sub-D fieldbus plug



Sub-D socket

- 9-pin Sub-D socket
- Installation with IP65 protection

The bus connection is established via a 9 pin Sub-D socket with a typical PROFIBUS allocation (to EN 50170). The bus connector plug (with protection class IP65 from Festo or IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable. An active bus terminal can be connected using the integrated DIL switch. The Sub-D interface is designed for the activation of network components via a fibre optic cable connection.

M12 adapter

- Plug connector 2xM12
- Installation with IP65 protection

Alternatively the bus connection can be established via a 2x M12 adapter (A-coded).

Screw terminals

• 5-pin screw terminal strip for installation in protected environments (IP20). The bus connection is established via a 5-pin row. If the valve terminal is ordered with this bus connection, the 5-pin screw terminal strip will also be supplied. It is designed with double screw terminals for the incoming and the outgoing bus cable. This connection technology provides a T-distributor function.

Fieldbus Direct, CPV-DN2

Technical data – Fieldbus node CPV-DN2

| Condition monitoring | | | |
|---|--|---|--|
| Condition monitoring supports preventative maintenance which is part of the function chain in automation systems. Each valve is assigned a switching | cycle counter that automatically registers movements of the system components. Once a maximum number of activa- | tions is reached, a message is sent to the controller via DeviceNet and maintenance can be started. In the same way condition monitoring supports the | determining of service intervals for the function chain. All movements immediately after installation are registered. |


| General technical data | | | | |
|--|------------------------|--|---|----------------|
| Type | | CPV10-GE-DN2-8 | CPV14-GE-DN2-8 | CPV18-GE-DN2-8 |
| Fieldbus interface | | Either <ul style="list-style-type: none"> • Sub-D socket, 9-pin • Screw terminal strip, 5-pin • Socket and plug, M12x1, 5-pin, A-coded | | |
| Electrical isolation of the fieldbus interface | | Via optocoupler | | |
| Baud rates | [kbps] | 125, 250, 500; set using a switch module | | |
| Addressing range | | 0 ... 63; set using a switch module | | |
| CP string extension | | Yes, 16 inputs and 8 outputs (or 16 valves) | | |
| LED diagnostics displays | PS | Common message regarding power supply | | |
| | MNS | DeviceNet status | | |
| Product family | | Pneumatic valve (27 dec.) | | |
| Ident. number | | 8942 dec. | | |
| Type of communication | | Polling, change of state, strobed I/O | | |
| Configuration support | | EDS file and graphics symbol | | |
| Max. no. of solenoid coils | | 16 | | |
| Max. no. of solenoid coils with string extension | | 32 | | |
| Max. no. of outputs | | 8 (1x16 solenoid coils omitted) | | |
| Max. no. of inputs | | 16 | | |
| Device-specific diagnostics | | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Short circuit/overload of inputs • Undervoltage of valve terminal • Undervoltage of valve terminal (extension) • Undervoltage of output module • Undervoltage of sensor supply • Missing module on the CP/CPI string • Condition monitoring | | |
| Additional functions | | Condition counter | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V DC] | 20.4 ... 26.4 | |
| | Residual ripple | [Vss] | 4 | |
| | Power failure bridging | [ms] | 20 | |
| Current consumption | | [mA] | Max. 200 + sensor supply | |
| Protection class to EN 60529 | | | <ul style="list-style-type: none"> • IP20 with 5-pin screw terminal strip • IP65 Sub-D, socket/plug M12x1 | |
| Materials | Housing | | Die-cast aluminium | |
| | Cover | | Polyamide, glass fibre (Ultramide) | |
| | Seal | | Nitrile rubber, Neoprene | |
| Dimensions | | | ➔ Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |

| Operating and environmental conditions | | |
|---|------|-------------------------------------|
| Ambient temperature | [°C] | -5 ... +50 |
| Storage temperature | [°C] | -20 ... +70 |
| Fieldbus certification | | ODVA |
| Certification | | cULus recognized (OL) |
| CE symbol (see declaration of conformity) | | In accordance with EU EMC directive |
| Note on materials | | RoHS-compliant |

Fieldbus Direct, CPV-DN2

Technical data – Fieldbus node CPV-DN2

Connection and display components

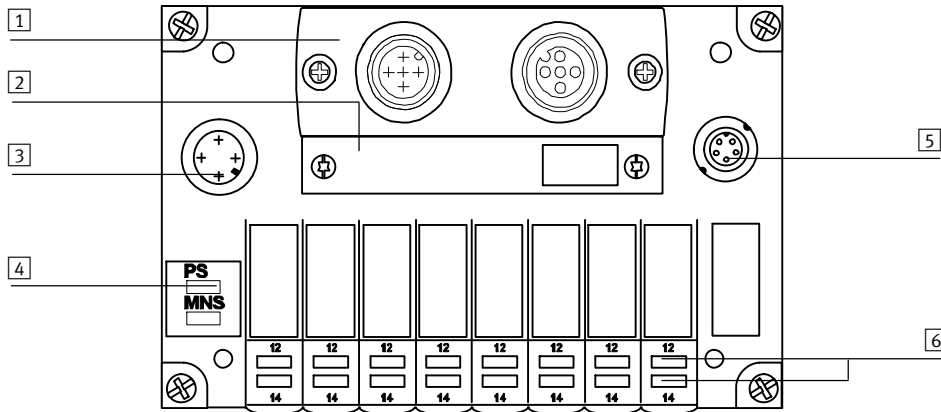

- 1 Interchangeable fieldbus connection:
 - Micro Style connection (2xM12)
 - Open Style connection (terminal strip)
 - 9-pin Sub-D plug
- 2 Switch module (removable)
- 3 Connection for power supply (4-pin M12 plug, operating voltage for electronics, load voltage for CP valves)
- 4 LEDs:
 - Power status (PS)
 - Module/network status (MNS)
- 5 CP extension connection
- 6 Signal status displays of CPV solenoid coils

Pin allocation for DeviceNet interface (viewed on plug)

| | Pin | Signal | Description |
|--|-----|----------|------------------------------|
| | 1 | n.c. | Not connected |
| | 2 | CAN_L | CAN Low |
| | 3 | CAN_GND | 0 V CAN interface |
| | 4 | n.c. | Not connected |
| | 5 | Screened | Optional screened connection |
| | 6 | GND | Ground optional |
| | 7 | CAN_H | CAN high |
| | 8 | n.c. | Not connected |
| | 9 | CAN_V+ | 24 V supply CAN interface |

Pin allocation for M12 adapter

| | Pin | Signal-specific wire colour | Signal | Description |
|--|-----|-----------------------------|-------------|--------------------------------|
| | 1 | blank | Screened | Connection to housing |
| | 2 | red | 24 V DC bus | 24 V supply CAN interface |
| | 3 | black | 0 V bus | 0 V CAN interface |
| | 4 | white | CAN_H | Received/transmitted data high |
| | 5 | blue | CAN_L | Received/transmitted data low |












Pin allocation for Open Style adapter

| | Pin | Signal-specific wire colour | Signal | Description |
|--|-----|-----------------------------|-------------|--------------------------------|
| | 1 | black | 0 V bus | 0 V CAN interface |
| | 2 | blue | CAN_L | Received/transmitted data low |
| | 3 | blank | Screened | Connection to housing |
| | 4 | white | CAN_H | Received/transmitted data high |
| | 5 | red | 24 V DC bus | 24 V supply CAN interface |

Fieldbus Direct, CPV-DN2

FESTO

Accessories – Fieldbus node CPV-DN2

| Ordering data | | | | |
|---|--|--------------------------|----------|----------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | CPV10 | | 525630 | CPV10-GE-DN2-8 |
| | CPV14 | | 525878 | CPV14-GE-DN2-8 |
| | CPV18 | | 525880 | CPV18-GE-DN2-8 |
| Switch module | | | | |
|  | For setting bus parameters and device configuration in the case of CPV | | 165814 | CPV10/14/18-GE-DI-SM |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 | SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 | FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 | SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 | FBSD-WD-9 |
| Bus connection Micro Style M12 | | | | |
|  | Bus connection Micro Style, 2xM12 | | 525632 | FBA-2-M12-5POL |
|  | Fieldbus socket for Micro Style connection, M12, 5-pin, straight | | 18324 | FBSD-GD-9-5POL |
| | Plug for Micro Style connection, M12, 5-pin, straight | | 175380 | FBS-M12-5GS-PG9 |
| Bus connection Open Style, 5-pin screw terminal strip | | | | |
|  | Bus connection Open Style for 5-pin terminal strip | | 525634 | FBA-1-SL-5POL |
|  | Bus connection, 5-pin terminal strip | | 525635 | FBSD-KL-2x5POL |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for CPV Direct, CPV fieldbus node DN2 | German | 526016 | P.BE-CP-DN2-DE |
| | | English | 526017 | P.BE-CP-DN2-EN |
| | | Italian | 526018 | P.BE-CP-DN2-IT |
| | | French | 526019 | P.BE-CP-DN2-FR |
| | | Spanish | 526020 | P.BE-CP-DN2-ES |

Fieldbus Direct, CPV-DN3-8

Technical data – Fieldbus node CPV-DN3-8

FESTO



CPV fieldbus node according to the CP system with Specification “B” for communication between a CPV valve terminal and a fieldbus master. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED. The CPV... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 32 digital inputs and outputs or 32 solenoid coils can be connected via a serial CPI string extension.

The CPV fieldbus node is available in three sizes, with identical performance characteristics:



- CPV10
- CPV14
- CPV18





Application

Bus connection



Screw terminals



Plug connector 2xM12



Sub-D fieldbus plug



Sub-D socket

- 9-pin Sub-D socket
- Installation with IP65 protection

The bus connection is established via a 9-pin Sub-D socket. The bus connector plug (with protection class IP65 from Festo or IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable. An active bus terminal can be connected using the integrated DIL switch. The Sub-D interface is designed for the activation of network components via a fibre optic cable connection.

M12 adapter

- Plug connector 2xM12
- Installation with IP65 protection

Alternatively the bus connection can be established via a 2x M12 adapter (B-coded).

Screw terminals

5-pin screw terminal strip for installation in protected environments (IP20). The bus connection is established via a 5-pin row. If the valve terminal is ordered with this bus connection, the 5-pin screw terminal strip will also be supplied. It is designed with double screw terminals for the incoming and the outgoing bus cable. This connection technology provides a T-distributor function.

Fieldbus Direct, CPV-DN3-8

Technical data – Fieldbus node CPV-DN3-8

| Condition monitoring | | | |
|---|--|---|--|
| Condition monitoring supports preventative maintenance which is part of the function chain in automation systems. | cycle counter that automatically registers movements of the system components. | tions is reached, a message is sent to the controller via DeviceNet and maintenance can be started. In the same way condition monitoring supports the | determining of service intervals for the function chain. |
| Each valve is assigned a switching | Once a maximum number of activa- | | All movements immediately after installation are registered. |


| General technical data | | | | |
|--|------------------------|--|---|----------------|
| Type | | CPV10-GE-DN3-8 | CPV14-GE-DN3-8 | CPV18-GE-DN3-8 |
| Fieldbus interface | Either | <ul style="list-style-type: none"> Screw terminal strip, 5-pin Sub-D socket, 9-pin Socket and plug, M12x1, 5-pin, A-coded | | |
| Electrical isolation of fieldbus interface | | Via optocoupler | | |
| CP string extension | | Yes, 32 inputs and 32 outputs | | |
| Baud rates | [kbps] | 125, 250, 500; set using a switch module | | |
| Addressing range | | 0 ... 63; set using a switch module | | |
| Product identification | Product type | Pneumatic valve (27 dec.) | | |
| Product identification | Product code | 8942 dec. | | |
| Types of communication | | Polling, change of state, strobed I/O | | |
| Configuration support | | EDS file and graphics symbol | | |
| Max. no. of solenoid coils | | 16 | | |
| Max. no. of solenoid coils with string extension | | 48 | | |
| Max. no. of outputs | | 16 solenoid coils and 32 outputs | | |
| Max. no. of inputs | | 32 | | |
| LED diagnostic displays | PS | Common message regarding power supply | | |
| LED display | Bus-specific | MNS: DeviceNet status | | |
| LED display | Product-specific | Valve signal status | | |
| | Power | Operating voltage for electrics and load supply | | |
| Device-specific diagnostics | | <ul style="list-style-type: none"> Short circuit/overload of outputs Short circuit/overload of inputs Undervoltage of valve terminal Undervoltage of valve terminal (extension) Undervoltage of output module Undervoltage of sensor supply Missing module on CP string Condition monitoring | | |
| Additional functions | | Condition counter | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V] | 20.4 ... 26.4 | |
| | Residual ripple | [Vss] | 4 | |
| | Power failure bridging | [ms] | 10 | |
| Current consumption | | [mA] | Max. 200 + sensor supply | |
| Protection class to EN 60529 | | | <ul style="list-style-type: none"> IP20 with 5-pin screw terminal strip IP65 Sub-D, socket/plug M12x1 | |
| Materials | Housing | | Die-cast aluminium | |
| Materials | Cover | | Reinforced polyamide | |
| Materials | Seal | | Nitrile rubber | |
| Dimensions | | | ➔ Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |

| Operating and environmental conditions | | | |
|---|--|------|-------------------------------------|
| Ambient temperature | | [°C] | -5 ... +50 |
| Storage temperature | | [°C] | -20 ... +70 |
| Fieldbus certification | | | ODVA |
| Certification | | | cULus recognized (OL) |
| CE symbol (see declaration of conformity) | | | In accordance with EU EMC directive |
| Note on materials | | | RoHS-compliant |

Fieldbus Direct, CPV-DN3-8

Technical data – Fieldbus node CPV-DN3-8

Connection and display components

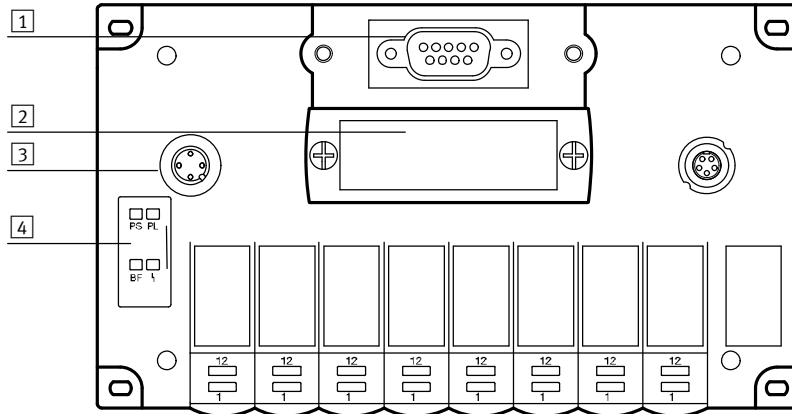

- 1 Fieldbus connection (9-pin Sub-D socket)
- 2 Removable switch cover
- 3 Operating/load voltage connection (4-pin M12 plug)
- 4 Power LEDs (PS, PL) and bus status LEDs (BF)

Pin allocation for DeviceNet interface (viewed on plug)

| | Pin | Signal | Description |
|--|-----|----------|------------------------------|
| | 1 | n.c. | Not connected |
| | 2 | CAN_L | CAN Low |
| | 3 | CAN_GND | 0 V CAN interface |
| | 4 | n.c. | Not connected |
| | 5 | Screened | Optional screened connection |
| | 6 | GND | Ground optional |
| | 7 | CAN_H | CAN high |
| | 8 | n.c. | Not connected |
| | 9 | CAN_V+ | 24 V supply CAN interface |

Pin allocation for M12 Micro Style adapter

| | Pin | Signal-specific wire colour | Signal | Description |
|--|-----|-----------------------------|-------------|--------------------------------|
| | 1 | blank | Screened | Connection to housing |
| | 2 | red | 24 V DC bus | 24 V supply CAN interface |
| | 3 | black | 0 V bus | 0 V CAN interface |
| | 4 | white | CAN_H | Received/transmitted data high |
| | 5 | blue | CAN_L | Received/transmitted data low |












Pin allocation for Open Style adapter

| | Pin | Signal-specific wire colour | Signal | Description |
|--|-----|-----------------------------|-------------|--------------------------------|
| | 1 | black | 0 V bus | 0 V CAN interface |
| | 2 | blue | CAN_L | Received/transmitted data low |
| | 3 | blank | Screened | Connection to housing |
| | 4 | white | CAN_H | Received/transmitted data high |
| | 5 | red | 24 V DC bus | 24 V DC supply CAN interface |

Fieldbus Direct, CPV-DN3-8



Accessories – Fieldbus node CPV-DN3-8

| Ordering data | | | | |
|---|--|--------------------------|----------|----------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | CPV10 | | 546198 | CPV10-GE-DN3-8 |
| | CPV14 | | 546200 | CPV14-GE-DN3-8 |
| | CPV18 | | 546202 | CPV18-GE-DN3-8 |
| Switch module | | | | |
|  | For setting bus parameters and device configuration in the case of CPV | | 165814 | CPV10/14/18-GE-DI-SM |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 | SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 | FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 | SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 | FBSD-WD-9 |
| Bus connection Micro Style M12 | | | | |
|  | Bus connection Micro Style, 2xM12 | | 525632 | FBA-2-M12-5POL |
|  | Fieldbus socket for Micro Style connection, M12, 5-pin, straight | | 18324 | FBSD-GD-9-5POL |
| | Plug for Micro Style connection, M12, 5-pin, straight | | 175380 | FBS-M12-5GS-PG9 |
| Bus connection Open Style, 5-pin screw terminal strip | | | | |
|  | Bus connection Open Style for 5-pin terminal strip | | 525634 | FBA-1-SL-5POL |
|  | Bus connection, 5-pin terminal strip | | 525635 | FBSD-KL-2x5POL |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for CPV Direct, CPV fieldbus node DN3 | German | 548737 | P.BE-CPV-DN3-DE |
| | | English | 548738 | P.BE-CPV-DN3-EN |
| | | Italian | 548741 | P.BE-CPV-DN3-IT |
| | | French | 548740 | P.BE-CPV-DN3-FR |
| | | Spanish | 548739 | P.BE-CPV-DN3-ES |

Fieldbus Direct, CPV-C02

Technical data – Fieldbus node CPV-C02

FESTO

CANopen

CPV fieldbus node for communication between a CPV valve terminal and a fieldbus master. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED.

The CPV-... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 16 digital inputs and 8 digital outputs or 16 solenoid coils can be connected via a serial CP string extension.

The CPV fieldbus node is available in three sizes, with identical performance characteristics:



- CPV10
- CPV14
- CPV18





Application

Bus connection



Screw terminals



Plug connector 2xM12



Sub-D fieldbus plug



The branch line length does not apply to any type of connection used.

Screw terminals

- 5-pin screw terminal strip
- For installations in protected environments (IP20)

The bus connection is established via a 5-pin row.

If the valve terminal is ordered with this bus connection, the 5-pin screw terminal strip will also be supplied. It is designed with double screw terminals for the incoming and the outgoing bus cable. This connection technology provides a T-distributor function.

Plug connector 2xM12

- Plug connector 2xM12
- Installation with IP65 protection

The bus connection is established via an M12 plug and socket.

The bus connection fulfils the requirement of a T-distributor, this means that the CPV valve terminal can be disconnected from the bus without interrupting the bus.

Sub-D fieldbus plug

- 9-pin Sub-D plug
 - Installation with IP65 protection
- The bus connection is established via a 9-pin Sub-D plug as per the CAN in Automation (CiA) specification DS102 with additional 24 V CAN transceiver supply (option as per DS102). The bus connector plug facilitates the connection of an incoming and an outgoing bus cable. There are spring-loaded terminals for the four wires (CAN_L, CAN_H, 24 V, 0 V) of the incoming and outgoing bus cable.

Fieldbus Direct, CPV-C02

Technical data – Fieldbus node CPV-C02



Condition monitoring

Condition monitoring supports preventative maintenance which is part of the function chain in automation systems.

Each valve is assigned a switching

cycle counter that automatically registers movements of the system components.

Once a maximum number of activa-

tions is reached, a message is sent to the controller via CANopen and maintenance can be started. In the same way condition monitoring supports the

determining of service intervals for the function chain.

All movements immediately after installation are registered.


| General technical data | | | | |
|--|------------------------|--|---|----------------|
| Type | | CPV10-GE-C02-8 | CPV14-GE-C02-8 | CPV18-GE-C02-8 |
| Fieldbus interface | Either | <ul style="list-style-type: none"> • Sub-D socket, 9-pin • Socket and plug, M12x1, 5-pin, A-coded • Screw terminal strip, 5-pin | | |
| Baud rates | | [kbps] | 125, 250, 500, 1000; set using a switch module | |
| CP string extension | | | Yes, 16 inputs and 8 outputs (or 16 valves) | |
| Addressing range | | | Node ID 1 ... 127; set using a switch element | |
| LED display (bus-specific) | MNS | | CANopen status | |
| LED display (product-specific) | PS | | Electronics supply and load voltage supply Valve signal status | |
| Type of communication | | | To DS401 | |
| Product identification | | | Product family: Digital I/O DS 401, vendor code: 0xD | |
| Number of PDOs | | | 1 Tx/Rx | |
| Number of SDOs | | | 1 server SDO | |
| Configuration support | | | EDS file and bitmaps | |
| Max. no. of solenoid coils | | | 16 | |
| Max. no. of solenoid coils with string extension | | | 32 | |
| Max. no. of outputs | | | 8 (1x16 solenoid coils omitted) | |
| Max. no. of inputs | | | 16 | |
| Device-specific diagnostics | | | <ul style="list-style-type: none"> • Missing module on the CP string • Short circuit/overload of outputs • Short circuit/overload of inputs • Undervoltage of output module • Undervoltage of sensor supply • Undervoltage of valve terminal • Via emergency message and object 1001/1002/1003 • Condition monitoring | |
| Parameterisation | | | Via SDO | |
| Additional functions | | | Condition counter | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V] | 20.4 ... 26.4 | |
| | Residual ripple | [Vss] | 4 | |
| | Power failure bridging | [ms] | 10 | |
| Current consumption | | [mA] | Max. 200 + sensor supply | |
| Protection class to EN 60529 | | | <ul style="list-style-type: none"> • IP20 with 5-pin screw terminal strip • IP65 Sub-D, socket/plug M12x1 | |
| Materials | Housing | | Die-cast aluminium | |
| | Cover | | Reinforced polyamide | |
| | Seal | | Nitrile rubber | |
| Dimensions | | | ➔ Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |

| Operating and environmental conditions | | |
|---|------|-------------------------------------|
| Ambient temperature | [°C] | -5 ... +50 |
| Storage temperature | [°C] | -20 ... +70 |
| Fieldbus certification | | CIA |
| Certification | | cULus recognized (OL) |
| CE symbol (see declaration of conformity) | | In accordance with EU EMC directive |
| Note on materials | | RoHS-compliant |

Fieldbus Direct, CPV-C02

Technical data – Fieldbus node CPV-C02

Connection and display components

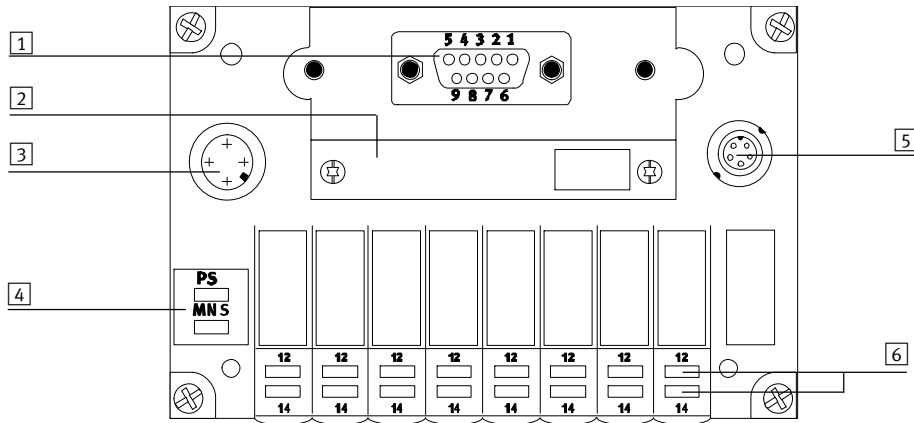

- 1 Fieldbus connection:
– 9-pin Sub-D plug
- 2 Switch module (removable)
- 3 Connection for power supply
(4-pin M12 plug, operating voltage for electronics, load voltage for CP valves)
- 4 LEDs:
– Power status (PS)
– Module/network status (MNS)
- 5 CP extension connection
- 6 Signal status displays of CPV solenoid coils

Pin allocation for CANopen interface (viewed on plug)

| | Pin | Signal | Description |
|--|---------|----------|--------------------------------|
| | 1 | n.c. | Not connected |
| | 2 | CAN_L | Received/transmitted data low |
| | 3 | CAN_GND | 0 V CAN interface |
| | 4 | n.c. | Not connected |
| | 5 | CAN_Shld | Optional screened connection |
| | 6 | GND | Ground |
| | 7 | CAN_H | Received/transmitted data high |
| | 8 | n.c. | Not connected |
| | 9 | CAN_V+ | 24 V supply CAN interface |
| | Housing | Screened | Connection to FE |

Pin allocation for M12 adapter

| | Pin | Signal | Description |
|--|-----|----------|--------------------------------|
| | 1 | Screened | Connection to housing |
| | 2 | CAN_V+ | 24 V supply CAN interface |
| | 3 | CAN_GND | 0 V CAN interface |
| | 4 | CAN_H | Received/transmitted data high |
| | 5 | CAN_L | Received/transmitted data low |













Pin allocation for Open Style adapter

| | Pin | Signal | Description |
|--|-----|----------|--------------------------------|
| | 1 | CAN_GND | 0 V CAN interface |
| | 2 | CAN_L | Received/transmitted data low |
| | 3 | Screened | Connection to housing |
| | 4 | CAN_H | Received/transmitted data high |
| | 5 | CAN_V+ | 24 V supply CAN interface |

Fieldbus Direct, CPV-CO2

FESTO

Accessories – Fieldbus node CPV-CO2

| Ordering data | | | | |
|---|--|--------------------------|----------|-----------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | CPV10 | | 525876 | CPV10-GE-CO2-8 |
| | CPV14 | | 525882 | CPV14-GE-CO2-8 |
| | CPV18 | | 525884 | CPV18-GE-CO2-8 |
| Switch module | | | | |
|  | For setting bus parameters and device configuration in the case of CPV | | 165814 | CPV10/14/18-GE-DI-SM |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 | SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 | FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 | SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 | FBSD-WD-9 |
| Bus connection | | | | |
|  | Sub-D plug for CANopen | | 532219 | FBS-SUB-9-BU-2x5POL-B |
| Bus connection 2xM12 | | | | |
|  | M12 adapter | | 525632 | FBA-2-M12-5POL |
|  | Fieldbus socket, M12, 5-pin, straight | | 18324 | FBSD-GD-9-5POL |
| | Plug, M12, 5-pin, straight | | 175380 | FBS-M12-5GS-PG9 |
| Bus connection, 5-pin screw terminal strip | | | | |
|  | Open Style adapter for 5-pin terminal strip | | 525634 | FBA-1-SL-5POL |
|  | 5-pin terminal strip | | 525635 | FBSD-KL-2x5POL |
| | | | | |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for CPV Direct, CPV fieldbus node CO2 | German | 526009 | P.BE-CP-CO2-DE |
| | | English | 526010 | P.BE-CP-CO2-EN |
| | | Spanish | 526011 | P.BE-CP-CO2-ES |
| | | French | 526012 | P.BE-CP-CO2-FR |
| | | Italian | 526013 | P.BE-CP-CO2-IT |

Fieldbus Direct, CPV-C03-8

Technical data – Fieldbus node CPV-C03-8

FESTO

CANopen

CPV fieldbus node according to the CP system with Specification “B” (enhanced functionality) for communication between a CPV valve terminal and a fieldbus master. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED.

The CPV-... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 32 digital inputs and outputs or 32 solenoid coils can be connected via a serial CPI string extension.

The CPV fieldbus node is available in three sizes, with identical performance characteristics:



- CPV10
- CPV14
- CPV18





Application

Bus connection



Screw terminals



Plug connector 2xM12



Sub-D fieldbus plug



The branch line length does not apply to any type of connection used.

Screw terminals

- 5-pin screw terminal strip
- For installation in protected environments (IP20)

The bus connection is established via a 5-pin row.

If the valve terminal is ordered with this bus connection, the 5-pin screw terminal strip will also be supplied. It is designed with double screw terminals for the incoming and the outgoing bus cable. This connection technology provides a T-distributor function.

Plug connector 2xM12

- Plug connector 2xM12
- Installation with IP65 protection

The bus connection is established via an M12 plug and socket.

The bus connection fulfils the requirement of a T-distributor, which means that the CPV valve terminal can be disconnected from the bus without interrupting the bus.

Sub-D fieldbus plug

- 9-pin Sub-D plug
 - Installation with IP65 protection
- The bus connection is established via a 9-pin Sub-D plug as per the CAN in Automation (CiA) specification DS102 with additional 24 V CAN transceiver supply (option as per DS102). The bus connector plug facilitates the connection of an incoming and an outgoing bus cable. There are spring-loaded terminals for the four wires (CAN_L, CAN_H, 24 V, 0 V) of the incoming and outgoing bus cable.

Fieldbus Direct, CPV-C03-8

Technical data – Fieldbus node CPV-C03-8



Condition monitoring

Condition monitoring supports preventative maintenance which is part of the function chain in automation systems.

Each valve is assigned a switching

cycle counter that automatically registers movements of the system components.

Once a maximum number of activa-

tions is reached, a message is sent to the controller via CANopen and maintenance can be started. In the same way condition monitoring supports the

determining of service intervals for the function chain.

All movements immediately after installation are registered.

| General technical data | | | | |
|--|------------------------|--|---|----------------|
| Type | | CPV10-GE-C03-8 | CPV14-GE-C03-8 | CPV18-GE-C03-8 |
| Fieldbus interface | Either | <ul style="list-style-type: none"> Screw terminal strip, 5-pin Sub-D socket, 9-pin Socket and plug, M12x1, 5-pin, A-coded | | |
| Electrical isolation of the fieldbus interface | | Via optocoupler | | |
| Note on the fieldbus interface | | <ul style="list-style-type: none"> 24 VDC version CAN interface via bus Interface to CiA DS102 | | |
| CP string extension | | Yes, 32 inputs and 32 outputs | | |
| Baud rates | [kbps] | 125, 250, 500 and 1000; set using DIL switch | | |
| Addressing range | | Node ID 1 ... 127; set using DIL switch | | |
| Product identification | | Product family: Digital I/O DS401, vendor code: 0xD | | |
| Number of PDOs | | 1 Tx/Rx | | |
| Number of SDOs | | 1 server SDO | | |
| Configuration support | | EDS file and bitmaps | | |
| Max. address capacity, inputs | [Byte] | 8 | | |
| Max. address capacity, outputs | [Byte] | 8 | | |
| Max. no. of solenoid coils | | 16 | | |
| Max. no. of solenoid coils with string extension | | 48 | | |
| Max. no. of outputs | | 16 solenoid coils and 32 outputs | | |
| Max. no. of inputs | | 32 | | |
| LED displays (bus-specific) | MNS | Bus status (module/network status) | | |
| LED displays (product-specific) | | Valve signal status | | |
| | PS | Operating voltage for electronics and load supply | | |
| Device-specific diagnostics | | <ul style="list-style-type: none"> Short circuit/overload of outputs Condition monitoring Short circuit/overload of inputs Undervoltage of valves Undervoltage of valve terminal Undervoltage of output module Undervoltage of valve terminal extension Undervoltage of sensor supply Missing module on the CP/CPI string Via emergency message and object 1001, 1002 and 1003 | | |
| Parameterisation | | Via SDO | | |
| Additional functions | | Condition counter | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V] | 20.4 ... 26.4 | |
| | Residual ripple | [Vss] | 4 | |
| | Power failure bridging | [ms] | 10 | |
| Current consumption | | [mA] | Max. 200 + sensor supply | |
| Protection class to EN 60529 | | | <ul style="list-style-type: none"> IP20 with 5-pin screw terminal strip IP65 Sub-D, socket/plug M12x1 | |
| Materials | Housing | | Die-cast aluminium | |
| | Cover | | Reinforced polyamide | |
| | Seals | | Nitrile rubber, polychloroprene rubber | |
| Dimensions | | | → Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |


Fieldbus Direct, CPV-C03-8

Technical data – Fieldbus node CPV-C03-8



| Operating and environmental conditions | | |
|---|------|--|
| Ambient temperature | [°C] | -5 ... +50 |
| Storage temperature | [°C] | -20 ... +70 |
| Fieldbus certification | | CiA |
| Certification | | cULus recognized (OL) CE, CiA certification |
| CE symbol (see declaration of conformity) | | In accordance with EU EMC directive |
| Note on materials | | RoHS-compliant |

Connection and display components

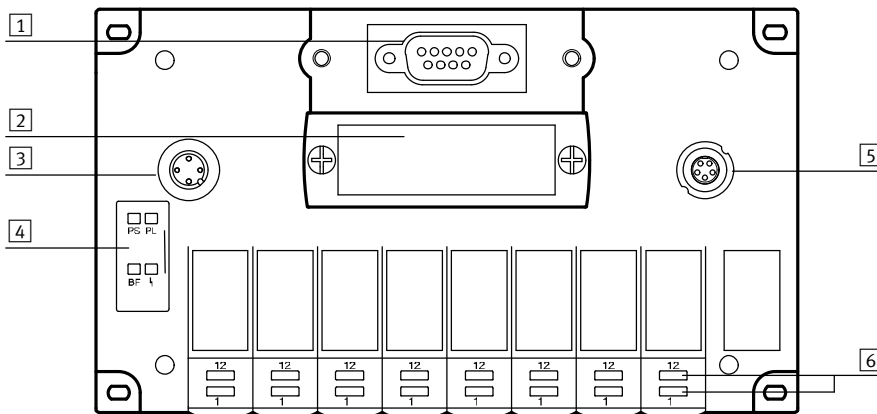

- 1 Fieldbus connection (9-pin Sub-D socket)
- 2 Removable switch cover
- 3 Operating/load voltage connection (4-pin M12 plug)
- 4 Power LEDs (PS, PL) and bus status LEDs (BF)
- 5 CPI extension connection
- 6 Signal status displays of CP solenoid coils

| Pin allocation for CANopen interface (viewed on plug) | | | |
|---|---------|----------|--------------------------------|
| | Pin | Signal | Description |
| | 1 | n.c. | Not connected |
| | 2 | CAN_L | Received/transmitted data low |
| | 3 | CAN_GND | 0 V CAN interface |
| | 4 | n.c. | Not connected |
| | 5 | CAN_Shld | Optional screened connection |
| | 6 | GND | Ground |
| | 7 | CAN_H | Received/transmitted data high |
| | 8 | n.c. | Not connected |
| | 9 | CAN_V+ | 24 V supply CAN interface |
| | Housing | Screened | Connection to FE |












| Pin allocation for M12 adapter | | | |
|--------------------------------|-----|----------|--------------------------------|
| | Pin | Signal | Description |
| | 1 | Screened | Connection to housing |
| | 2 | CAN_V+ | 24 V supply CAN interface |
| | 3 | CAN_GND | 0 V CAN interface |
| | 4 | CAN_H | Received/transmitted data high |
| | 5 | CAN_L | Received/transmitted data low |

| Pin allocation for Open Style adapter | | | |
|---------------------------------------|-----|----------|--------------------------------|
| | Pin | Signal | Description |
| | 1 | CAN_GND | 0 V CAN interface |
| | 2 | CAN_L | Received/transmitted data low |
| | 3 | Screened | Connection to housing |
| | 4 | CAN_H | Received/transmitted data high |
| | 5 | CAN_V+ | 24 V supply CAN interface |

Fieldbus Direct, CPV-CO3-8

FESTO

Accessories – Fieldbus node CPV-CO3-8

| Ordering data | | | | |
|---|--|--------------------------|----------|-----------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | CPV10 | | 546204 | CPV10-GE-CO3-8 |
| | CPV14 | | 546206 | CPV14-GE-CO3-8 |
| | CPV18 | | 546208 | CPV18-GE-CO3-8 |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 | SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 | FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 | SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 | FBSD-WD-9 |
| Bus connection | | | | |
|  | Sub-D plug for CANopen | | 532219 | FBS-SUB-9-BU-2x5POL-B |
| Bus connection 2xM12 | | | | |
|  | M12 adapter | | 525632 | FBA-2-M12-5POL |
|  | Fieldbus socket, M12, 5-pin, straight | | 18324 | FBSD-GD-9-5POL |
| | Plug, M12, 5-pin, straight | | 175380 | FBS-M12-5GS-PG9 |
| Bus connection, 5-pin screw terminal strip | | | | |
|  | Open Style adapter for 5-pin terminal strip | | 525634 | FBA-1-SL-5POL |
|  | 5-pin terminal strip | | 525635 | FBSD-KL-2x5POL |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for CPV Direct, CPV fieldbus node CO3 | German | 548743 | P.BE-CPV-CO3-DE |
| | | English | 548744 | P.BE-CPV-CO3-EN |
| | | Spanish | 548745 | P.BE-CPV-CO3-ES |
| | | French | 548746 | P.BE-CPV-CO3-FR |
| | | Italian | 548747 | P.BE-CPV-CO3-IT |

Fieldbus Direct, CPV-IB

Technical data – Fieldbus node CPV-IB



CPV fieldbus node for communication between a CPV valve terminal and an INTERBUS master. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED.

The CPV-... valves are activated via automatic current reduction, which results in less power consumption and heat emission. 16 digital inputs and 8 digital outputs or 16 solenoid coils can be connected via a serial CP string extension.

The CPV fieldbus node IB supports the INTERBUS fieldbus protocol and represents a remote bus station.

The CPV fieldbus node is available in three sizes, with identical performance characteristics:

- CPV10
- CPV14
- CPV18




Application

Bus connection



Sub-D socket

INTERBUS incoming



Sub-D plug

INTERBUS outgoing

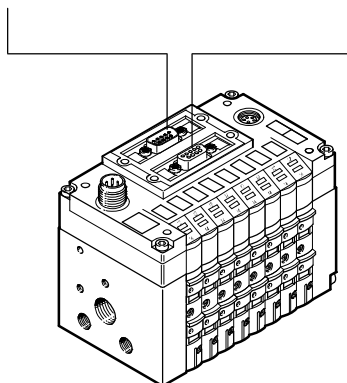

The bus connection is established via a 9-pin Sub-D socket and a 9-pin Sub-D plug with a typical INTERBUS pin allocation.

The bus connector plugs (with protection class IP65 from Festo or IP20 from other manufacturers) facilitate the connection of the incoming and the outgoing bus cable. The outgoing bus plug contains the typical INTERBUS RBST bridge for identification of the outgoing bus connection.

The Sub-D interfaces are designed for the control of network components using a fibre optic cable connection.

Fieldbus Direct, CPV-IB

Technical data – Fieldbus node CPV-IB




| General technical data | | | | |
|--|------------------------|--|--|---------------|
| Type | | CPV10-GE-IB-8 | CPV14-GE-IB-8 | CPV18-GE-IB-8 |
| Fieldbus interface | | Sub-D, 9-pin, socket and pin | | |
| Electrical isolation of the fieldbus interface | | Via optocoupler | | |
| Baud rates | [kbps] | 500, 2000; set using a DIL switch | | |
| CP/CPI string extension | | Yes, 16 inputs and 8 outputs (or 16 valves) | | |
| Bus type | | Remote bus | | |
| Profile | | 12 (digital I/O devices) | | |
| PCP channel | | No | | |
| Configuration support | | Icons for CMD software | | |
| Max. no. of solenoid coils | | 16 | | |
| Max. no. of solenoid coils with string extension | | 32 | | |
| Max. no. of outputs | | 8 (16 solenoid coils omitted) | | |
| Max. no. of inputs | | 16 | | |
| Max. no. of process data bits | Inputs | 32 | | |
| | Outputs | 32 | | |
| LED displays (bus-specific) | BA | Bus active | | |
| | RC | Remotebus check | | |
| | RD | Remotebus disable | | |
| | UL | Operating voltage of INTERBUS interface | | |
| LED display (product-specific) | | Valve signal status | | |
| | Diagnostics | Short circuit, load supply, sensor supply, configuration error | | |
| | Pow | Operating voltage and load supply | | |
| Device-specific diagnostics | | <ul style="list-style-type: none"> • Short circuit/overload of outputs • Short circuit/overload of inputs • Undervoltage of valve terminal • Undervoltage of valve terminal (extension) • Undervoltage of output module • Undervoltage of sensor supply • Missing module on the CP string • Via peripherals errors | | |
| Parameterisation | | No | | |
| Additional functions | | Diagnostics using status bits (inputs) | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V] | 20.4 ... 26.4 | |
| | Residual ripple | [Vss] | 4 | |
| | Power failure bridging | [ms] | 10 | |
| Current consumption | | [mA] | Max. 200 + sensor supply | |
| Protection class to EN 60529 | | | IP65 | |
| Materials | Housing | | Die-cast aluminium | |
| | Cover | | Reinforced polyamide | |
| | Seals | | Nitrile rubber, polychloroprene rubber | |
| Dimensions | | | ➔ Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |

| Operating and environmental conditions | | |
|---|------|-------------------------------------|
| Ambient temperature | [°C] | -5 ... +50 |
| Storage temperature | [°C] | -20 ... +70 |
| Fieldbus certification | | INTERBUS club |
| Certification | | cULus recognized (OL) |
| CE symbol (see declaration of conformity) | | In accordance with EU EMC directive |

Fieldbus Direct, CPV-IB

Technical data – Fieldbus node CPV-IB

Connection and display components

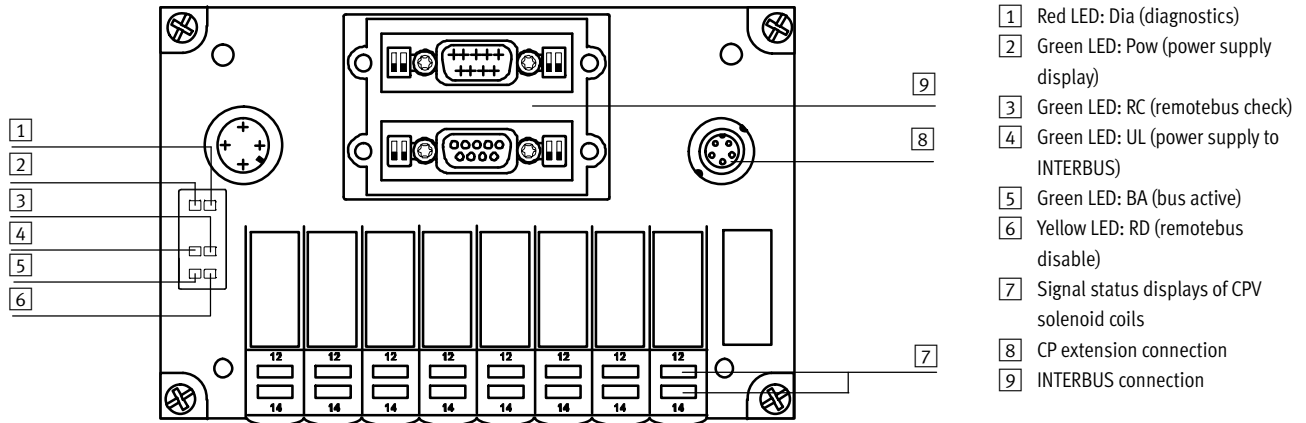

Pin allocation for INTERBUS interface, incoming (viewed on plug)

| | Pin | Signal | Description |
|--|---------|----------|--|
| | 1 | DO1 | Data out |
| | 2 | /DI1 | Data in |
| | 3 | GND | Reference conductor/ground |
| | 4 | n.c. | Not connected |
| | 5 | n.c. | Not connected |
| | 6 | /DO1 | Data out inverse |
| | 7 | /DI1 | Data in inverse |
| | 8 | n.c. | Not connected |
| | 9 | n.c. | Not connected |
| | Housing | Screened | Connection to functional earth via R/C combination |

Pin allocation for INTERBUS interface, outgoing (viewed on socket)








| | Pin | Signal | Description |
|--|---------|----------|--|
| | 1 | DO2 | Data out |
| | 2 | /DI2 | Data in |
| | 3 | GND | Reference conductor/ground |
| | 4 | n.c. | Not connected |
| | 5 | +5 V | Station detection ¹⁾ |
| | 6 | /DO2 | Data out inverse |
| | 7 | /DI2 | Data in inverse |
| | 8 | n.c. | Not connected |
| | 9 | RBST | Station detection ¹⁾ |
| | Housing | Screened | Connection to functional earth via R/C combination |

1) The incoming interface is electrically isolated from the CPX peripherals. The plug housing is connected to the FE of the CPX terminal via an R/C combination. The CPX terminal contains the protocol chip SUPI 3 OPC. This ensures automatic detection of additional connected INTERBUS stations. There is therefore no need for a bridge between pin 5 and pin 9.

Fieldbus Direct, CPV-IB

Accessories – Fieldbus node CPV-IB

FESTO

| Ordering data | | | | |
|---|---|--------------------------|----------|---------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | CPV10 | | 197177 | CPV10-GE-IB-8 |
| | CPV14 | | 197179 | CPV14-GE-IB-8 |
| | CPV18 | | 197181 | CPV18-GE-IB-8 |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 | SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 | FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 | SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 | FBSD-WD-9 |
| Bus connection | | | | |
|  | Fieldbus plug, Sub-D connection for INTERBUS incoming | | 532218 | FBS-SUB-9-BU-IB-B |
| | Fieldbus plug, Sub-D connection for INTERBUS outgoing | | 532217 | FBS-SUB-9-GS-IB-B |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for CPV Direct, CPV fieldbus node IB | German | 527515 | P.BE-CP-IB-DE |
| | | English | 527516 | P.BE-CP-IB-EN |
| | | Spanish | 527517 | P.BE-CP-IB-ES |
| | | French | 527518 | P.BE-CP-IB-FR |
| | | Italian | 527519 | P.BE-CP-IB-IT |

Fieldbus Direct, CPV-IP

Technical data – Fieldbus node CPV-IP

FESTO

BECKHOFF

CPV fieldbus node for communication between a CPV valve terminal and an IP-Link coupler box. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED.

The CPV-... valves are activated via automatic current reduction, which results in less power consumption and heat emission.

The CPV fieldbus node supports the fieldbus protocol IP-Link.

The CPV fieldbus node is available in two sizes, with identical performance characteristics:

- CPV10
- CPV14



Application

Bus connection

The bus connection is established using two IP-Link fibre optic cable connectors.

The bus connector plugs (with protection class IP65) facilitate the connection of the incoming and outgoing fibre optic cable (FOC).

Power supply

The power is supplied via a 4-pin M8 connection (socket). The supply to the internal logic is fully electrically isolated from the supply to the solenoid coils.

The second M8 connection (pin) enables power to be supplied to additional CPV IP-Link valve terminals and other IP-Link modules.

Fieldbus Direct, CPV-IP

Technical data – Fieldbus node CPV-IP


| General technical data | | | |
|--|------------------------|--|--------------------------------|
| Type | | CPV10-GE-IP-8 | CPV14-GE-IP-8 |
| Fieldbus interface | | IP-Link Incoming, outgoing | |
| Electrical isolation of the fieldbus interface | | FOC | |
| CP string extension | | No | |
| Baud rates | [kbps] | 2000 | |
| Data model | Compact | 16 outputs | |
| Configuration support | PROFIBUS | GSD file | |
| | INTERBUS | Not necessary | |
| | CANopen | EDS file | |
| | DeviceNet | EDS file | |
| Max. no. of solenoid coils | | 16 | |
| LED displays (bus-specific) | US | Operating voltage of internal logic | |
| | UP | Operating voltage of valves | |
| | RUN | Bus active | |
| | ERR | Data transmission error | |
| Product identification | | Product family 4: Valves | |
| Device-specific diagnostics | | IE4404 | |
| Parameterisation | | Via register communication: watchdog setting for coils 1 ... 16 | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected |
| | Permissible range | [V] | 20.4 ... 28.8 |
| | Power failure bridging | [ms] | 10 |
| | Residual ripple | [Vss] | 4 |
| Current consumption | Logic | [mA] | Max. 100 |
| | Valves | | Depending on valve type |
| Protection class to EN 60529 | | IP65 | |
| Materials | Housing | Die-cast aluminium | |
| | Cover | Reinforced polyamide | |
| | Seals | Nitrile rubber, polychloroprene rubber | |
| Dimensions | | ➔ Internet: cpv | |
| Weight | | | |
| Technical data on valves | | | |

| Operating and environmental conditions | | | |
|---|------|-------------------------------------|--|
| Ambient temperature | [°C] | -5 ... +50 | |
| Storage temperature | [°C] | -20 ... +70 | |
| Certification | | cULus recognized (OL) | |
| CE symbol (see declaration of conformity) | | In accordance with EU EMC directive | |
| Note on materials | | RoHS-compliant | |

Fieldbus Direct, CPV-IP

Technical data – Fieldbus node CPV-IP

Connection and display components

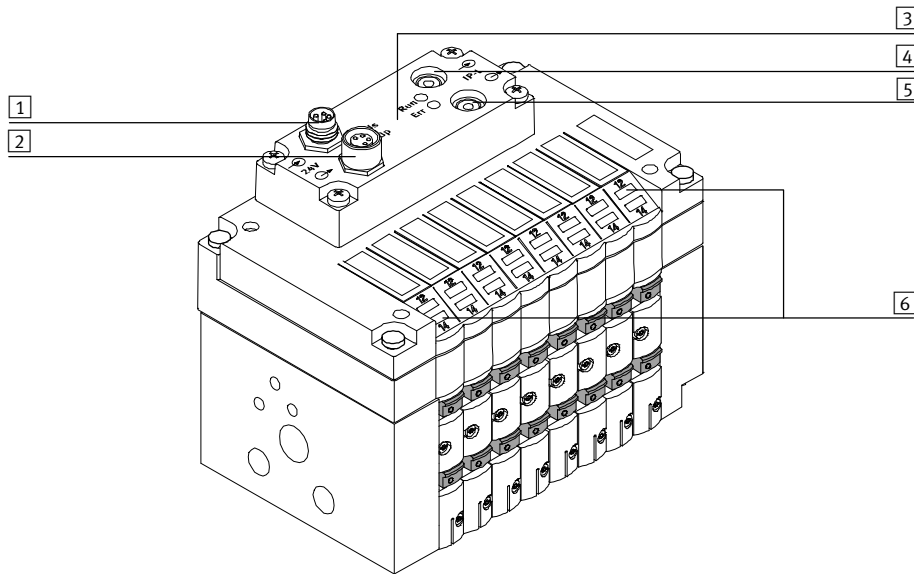

- 1 Connection for power supply, incoming (M8, 4-pin, plug)
- 2 Connection for power supply, outgoing (M8, 4-pin, socket)
- 3 LEDs:
 - US: Operating voltage for electronics (green)
 - UP: Load voltage for valves (green)
 - RUN: Bus active (green)
 - ERR: Error (red)
- 4 Fieldbus connection, incoming (IP-Link fibre optic cable IP65 socket)
- 5 Fieldbus connection, outgoing (IP-Link fibre optic cable IP65 socket)
- 6 LEDs (yellow) for signal status display of CPV solenoid coils

Power supply, incoming

| | Pin | Signal |
|--|-----|--|
| | 1 | 24 V DC operating voltage for electronics (US) |
| | 2 | 24 V DC load voltage for valves (UP) |
| | 3 | 0 V electronics (US) |
| | 4 | 0 V valves (UP) |

Power supply, outgoing


| | Pin | Signal |
|--|-----|--|
| | 1 | 24 V DC operating voltage for electronics (US) |
| | 2 | 24 V DC load voltage for valves (UP) |
| | 3 | 0 V electronics (US) |
| | 4 | 0 V valves (UP) |

Fieldbus Direct, CPV-IP

Technical data – Fieldbus node CPV-IP

Equipotential bonding


Example of connection with electrical isolation of operating and load voltage with 2 PELV power supply units

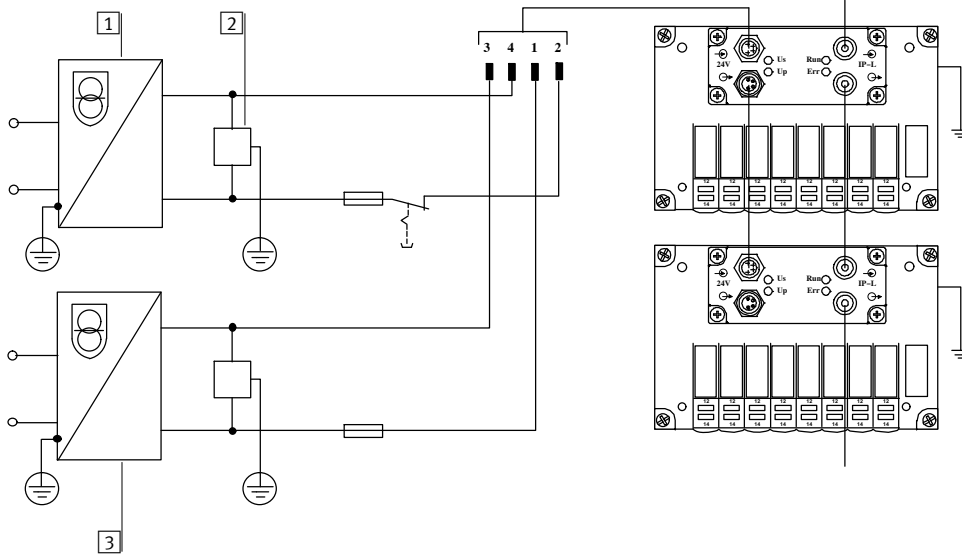

- 1 Power supply unit for load voltage
- 2 Device for isolation monitoring
- 3 Power supply unit for operating voltage

CPV Direct is prepared for the connection with electrical isolation of operating and load voltage.



Example of connection with PELV power supply unit and equipotential bonding

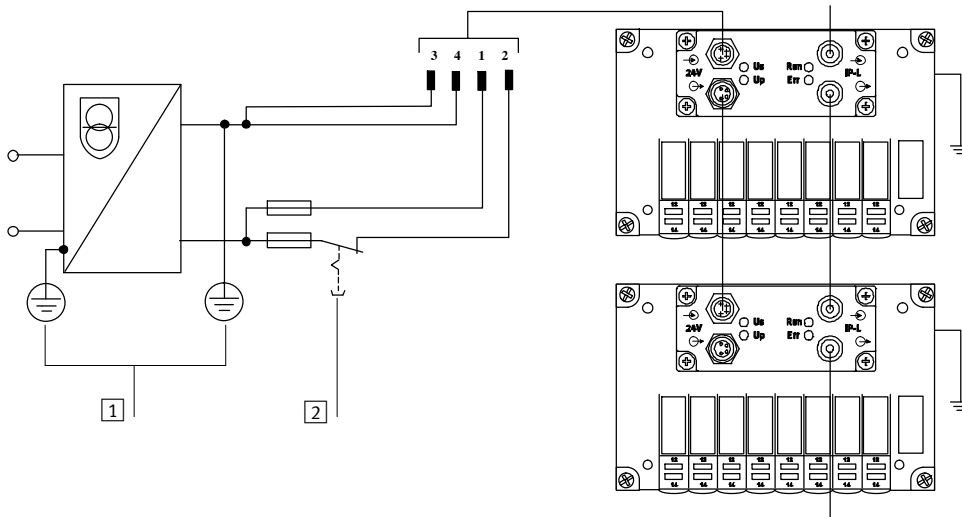

- 1 PE and equipotential bonding
- 2 Load voltage (can be disconnected separately) plus external fuses

The CPV valve terminal has an earth terminal for equipotential bonding on the end plate.

Ordering data

| Designation | | Part No. | Type |
|---|---|----------|--------------------------|
| Fieldbus node | | | |
|  | CPV10 | 534509 | CPV10-GE-IP-8 |
| | CPV14 | 534507 | CPV14-GE-IP-8 |
| User documentation | | | |
|  | User documentation for CPV Direct, CPV fieldbus node IP | German | 534516 P.BE-CPV-DI-IP-DE |
| | | English | 534517 P.BE-CPV-DI-IP-EN |

Fieldbus Direct, CPV-CC-8

Technical data – Fieldbus node CPV-CC-8

FESTO

CC-Link

CPV fieldbus node for communication between a CPV valve terminal and a higher-order master for Control & Communication-Link (CC-Link) from Mitsubishi. The fieldbus node is used for activation of a CPV valve terminal with 8 valve slices and 16 solenoid coils and for displaying the signal status via LED.

The CPV-... valves are activated via automatic current reduction, which results in less power consumption and heat emission. A CP input module with 16 digital inputs can be connected via a serial CP string extension.

The CPV fieldbus node is available in three sizes, with identical performance characteristics:

- CPV10
- CPV14
- CPV18



Application

Bus connection

The bus connection can be selected when ordering and is established by means of:

- a terminal strip with IP20 protection
- a Sub-D plug with IP65 protection

from Festo

- a Sub-D plug with IP20 protection from other manufacturers

All connection types have an integrated T-distributor function and thus support the connection of an incoming

and outgoing bus cable.

The integrated interface with RS 485 transmission technology is designed for the typical CC-Link 3-wire connection technology (in accordance with CLPA CC-Link Spec. V1.11).

CC-Link implementation

The CPV fieldbus node supports one station per slave. Cyclical data transmission for the sole-

noid coils, digital inputs and status information is conducted using the bit and word ranges (Rx/Ry/RWr/RWw).

Fieldbus Direct, CPV-CC-8

Technical data – Fieldbus node CPV-CC-8


| General technical data | | | | |
|---------------------------------|------------------------|---|--|---------------|
| Type | | CPV10-GE-CC-8 | CPV14-GE-CC-8 | CPV18-GE-CC-8 |
| Fieldbus interface | | Either <ul style="list-style-type: none"> • 9-pin Sub-D socket • Screw terminal strip, 5-pin | | |
| CP string extension | | Yes 16 inputs (connection of an additional CP valve terminal or CP output module not possible) | | |
| Baud rates | [kbps] | 156 ... 10,000; set using DIL switch | | |
| Addressing range | | 1 ... 64; set using DIL switch | | |
| No. of stations per slave | | 1 station, Permanent setting | | |
| Vendor code | | 0x0177 | | |
| Product identification | | Machine type 0x3C | | |
| LED displays (bus-specific) | RUN | Communication OK | | |
| LED displays (bus-specific) | Pow/Err | Operating voltage/CRC error or communication error | | |
| LED displays (product-specific) | | Valve signal status | | |
| Type of communication | | Cyclical communication | | |
| Max. no. of solenoid coils | | 16 | | |
| Max. no. of outputs | | 0 | | |
| Max. no. of inputs | | 16 | | |
| Device-specific diagnostics | | <ul style="list-style-type: none"> • Short circuit/overload of inputs • Undervoltage of valve terminal • Undervoltage of sensor supply • Missing module on the CP string • Remote ready • Via status byte | | |
| Parameterisation | | Hold/clear via DIL switch | | |
| Additional functions | | 8-bit system status in the bit range (Rx) | | |
| Operating voltage | Nominal value | [V DC] | 24, reverse polarity protected | |
| | Permissible range | [V] | 20.4 ... 26.4 | |
| | Power failure bridging | [ms] | 20 | |
| Current consumption | | [mA] | Max. 200 + sensor supply | |
| Protection class to EN 60529 | | | IP20, IP65 (Sub-D) | |
| Materials | Housing | | Die-cast aluminium | |
| | Cover | | Reinforced polyamide | |
| | Seals | | Nitrile rubber, polychloroprene rubber | |
| Dimensions | | | ➔ Internet: cpv | |
| Weight | | | | |
| Technical data on valves | | | | |

| Operating and environmental conditions | | | |
|---|--|------|-------------------------------------|
| Ambient temperature | | [°C] | -5 ... +50 |
| Storage temperature | | [°C] | -20 ... +50 |
| Certification | | | cULus recognized (OL) |
| CE symbol (see declaration of conformity) | | | In accordance with EU EMC directive |
| Note on materials | | | RoHS-compliant |

Fieldbus Direct, CPV-CC-8

Technical data – Fieldbus node CPV-CC-8

Connection and display components

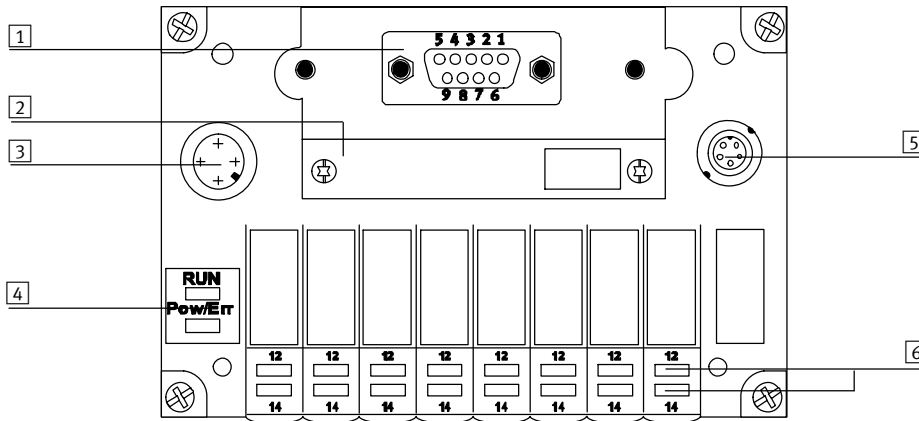

- 1 Fieldbus connection, 9-pin Sub-D socket
- 2 Switch module (removable)
- 3 Connection for power supply (4-pin M12 plug, operating voltage for electronics/sensors, load voltage for CP valves)
- 4 LEDs:
 - Data communication (RUN)
 - Operating voltage/error (Pow/Err)
- 5 CP extension connection
- 6 Signal status displays of CP solenoid coils

Pin allocation for Sub-D interface (socket view)










| | Pin | Signal | Description |
|--|---------|--------|--|
| | 1 | n.c. | Not connected |
| | 2 | DA | Data A |
| | 3 | DG | Data reference potential |
| | 4 | n.c. | Not connected |
| | 5 | n.c. | FE via R/C combination (not used with CC-Link: connection via R/C combination to FE (1 Mohm/220 nF)) |
| | 6 | n.c. | Not connected |
| | 7 | CAN_H | Data B |
| | 8 | n.c. | Not connected |
| | 9 | n.c. | Not connected |
| | Housing | SLD | Screened |

Pin allocation for terminal strip

| | Pin | Signal | Description |
|--|-----|--------|--------------------------|
| | 1 | FG | Functional earth/housing |
| | 2 | SLD | Screened |
| | 3 | DG | Data reference potential |
| | 4 | DB | Data B |
| | 5 | DA | Data A |

Fieldbus Direct, CPV-CC-8

Accessories – Fieldbus node CPV-CC-8

| Ordering data | | | | |
|---|--|--------------------------|----------|-----------------------|
| Designation | | | Part No. | Type |
| Fieldbus node | | | | |
|  | CPV10 | | 197959 | CPV10-GE-CC-8 |
| | CPV14 | | 197967 | CPV14-GE-CC-8 |
| | CPV18 | | 197969 | CPV18-GE-CC-8 |
| Switch module | | | | |
|  | For setting bus parameters and device configuration in the case of CPV | | 165814 | CPV10/14/18-GE-DI-SM |
| Power supply | | | | |
|  | Power supply socket, straight, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 18494 | SIE-GD |
| | | For cable Ø 8 ... 9.5 mm | 18495 | FBSD-GD-9 |
|  | Power supply socket, angled, M12x1, 4-pin | For cable Ø 4 ... 6 mm | 12956 | SIE-WD-TR |
| | | For cable Ø 6 ... 8 mm | 18525 | FBSD-WD-9 |
| Bus connection Open Style, 5-pin screw terminal strip | | | | |
|  | Bus connection, 5-pin terminal strip for CC-Link | | 197962 | FBA-1-KL-5POL |
|  | Fieldbus plug, Sub-D connection | | 532220 | FBS-SUB-9-GS-2x4POL-B |
| Valve terminal connection | | | | |
|  | Connecting cable, angled plug, angled socket | 0.25 m | 540327 | KVI-CP-3-WS-WD-0,25 |
| | | 0.5 m | 540328 | KVI-CP-3-WS-WD-0,5 |
| | | 2 m | 540329 | KVI-CP-3-WS-WD-2 |
| | | 5 m | 540330 | KVI-CP-3-WS-WD-5 |
| | | 8 m | 540331 | KVI-CP-3-WS-WD-8 |
|  | Connecting cable, straight plug, straight socket | 2 m | 540332 | KVI-CP-3-GS-GD-2 |
| | | 5 m | 540333 | KVI-CP-3-GS-GD-5 |
| | | 8 m | 540334 | KVI-CP-3-GS-GD-8 |
| User documentation | | | | |
|  | User documentation for CPV Direct, CPV fieldbus node CC | German | 197963 | P.BE-CP-CC-DE |
| | | English | 197964 | P.BE-CP-CC-EN |
| | | Japanese | 197965 | P.BE-CP-CC-J |