


## Servo motors EMMT-AS

FESTO

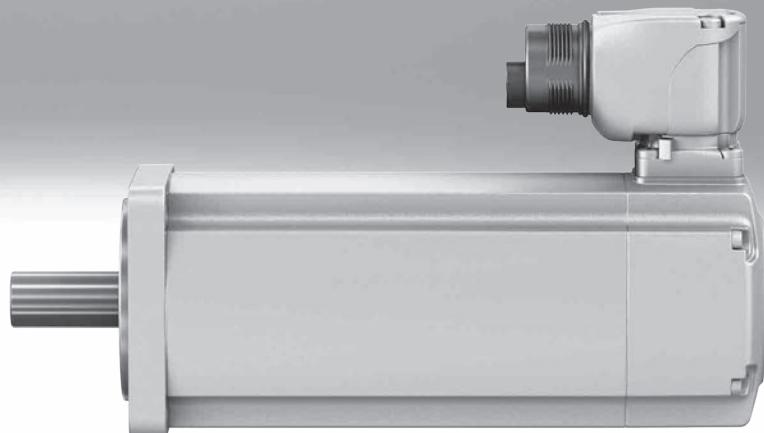

## Key features

### Everything from a single source

Motors EMMT-AS

→ Page 3



- Dynamic, brushless, permanently excited synchronous servo motors
- Extremely low cogging torque – supports high synchronisation even at low rotational speeds
- Digital absolute displacement encoder; choose from:
  - Single-turn
  - Multi-turn, no batteries
- Motor temperature transmission, digital via EnDat 2.2; motor protection via CMMT-AS
- Optimised torque
- Speed-optimised
- Degree of protection:
  - IP40 (motor shaft)
  - IP67 (motor housing with connection technology)
  - IP65 (motor shaft with rotary shaft seal made from PTFE)
- Optional:
  - Holding brake
  - Shaft with featherkey
  - Motor shaft with rotary shaft seal



### Gear unit EMGA-EAS/SAS

→ Page 18



- Low-backlash planetary gear
- Gear ratio  $i = 3$  and 5, available from stock
- Life-time lubrication
- Degree of protection: IP54
- Other gear unit types, ratios, designs and versions on request

### Servo drive CMMT-AS

→ Internet: cmmt-as



- Universal servo drive for synchronous servo motors
- Integrated EMC filters
- Integrated brake chopper
- Integrated braking resistor
- Integrated safety functions
- Position controller
- Speed controller
- Force controller
- Range of control functions
- Interfaces:
  - EtherCAT
  - PROFINET RT/IRT
  - EtherNet/IP
  - Modbus TCP

### Motor cables NEBM

→ Page 19



- Suitable for energy chains
- Connection technology on motor side with degree of protection to IP67
- Can be used in a wide temperature range

### Axial and parallel kits EAMM

→ Internet: eamm



- Specific kits for all electromechanical axes from Festo
- Each kit includes the relevant necessary coupling housing, couplings and motor flange as well as all screws
- Optionally with degree of protection IP65

## Type codes

<b>001</b>	Series	<b>007</b>	Winding
<b>EMMT</b>	Servo motor	<b>LS</b>	Low voltage, standard
<b>002</b>	Motor type	<b>HS</b>	High voltage, standard
<b>AS</b>	AC synchronous	<b>008</b>	Electrical connection
<b>003</b>	Flange size, motors	<b>R</b>	Angled connector, adjustable
<b>60</b>	60	<b>009</b>	Measuring unit
<b>80</b>	80	<b>S</b>	Absolute encoder, single turn
<b>100</b>	100	<b>M</b>	Absolute encoder, multi-turn
<b>004</b>	Length	<b>010</b>	Brake
<b>S</b>	Short		None
<b>M</b>	Centre	<b>B</b>	With brake
<b>L</b>	Long		
<b>H</b>	Very long		
<b>005</b>	Output shaft		
	Smooth shaft		
<b>K</b>	Shaft to DIN 6885		
<b>006</b>	Rotary shaft seal		
	None		
<b>R</b>	With standard shaft sealing ring		

## Data sheet


 Note

Motors and motor controllers from Festo have been specially designed to be used together. Trouble-free operation cannot be guaranteed in combination with third-party controllers.



## Technical data

Flange size	60					
Overall length	S		M		L	
Winding	LS	HS	LS	HS	LS	HS
Nominal operating voltage <sup>1)</sup>	[V DC]	325	565	325	565	325
Nominal current <sup>2)</sup>	[A]	1.6/1.4	1.6/1.4	2.4/2.2	2.4/2.2	3.2/3
Continuous stall current <sup>2)</sup>	[A]	1.7/1.6	1.7/1.6	2.7/2.5	2.7/2.5	3.8/3.5
Peak current	[A]	5.4	5.4	11.0	11.0	18.3
Nominal power <sup>2)</sup>	[W]	200/190	200/190	350/310	350/310	440/410
Nominal torque <sup>2)(3)</sup>	[Nm]	0.64/0.6	0.64/0.6	1.1/1.0	1.1/1.0	1.4/1.3
Peak torque	[Nm]	1.6	1.6	3.4	3.4	5.6
Stall torque <sup>2)</sup>	[Nm]	0.7/0.66	0.7/0.66	1.24/1.15	1.24/1.15	1.66/1.56
Stall torque constant <sup>4)</sup>	[Nm/A]	0.49	0.49	0.53	0.53	0.52
Nominal rotational speed	[rpm]	3000				
Max. rotational speed	[rpm]	7100	12500	6800	11800	6800
Max. mechanical rotational speed	[rpm]	16000				
Max. idling rotational speed with brake	[rpm]	10000				
Motor constant	[Nm/A]	0.41	0.41	0.45	0.45	0.44
Voltage constant (phase-to-phase)	[mVmin]	29.9	29.9	32	32	31.2
Electric time constant	[ms]	2.1	2.1	2.7	2.7	3
Number of pole pairs		5	5	5	5	5
Winding resistance (phase-to-phase)	[Ω]	11.7	11.7	4.85	4.85	2.68
Winding inductance (phase-to-phase)	[mH]	38	38	20	20	12
Winding series inductance Ld (phase)	[mH]	15.5	15.5	8	8	5
Winding shunt inductance Lq (phase)	[mH]	19	19	10	10	6
Total output moment of inertia <sup>2)</sup>	[kgcm <sup>2</sup> ]	0.169/0.257	0.169/0.257	0.286/0.373	0.286/0.373	0.403/0.490
Shaft load at nominal rotational speed						
Radial	[N]	350				
Axial	[N]	65				
Brake						
Operating voltage	[V DC]	24 (+6 ... -10%)				
Current consumption	[A]	0.46				
Power	[W]	11				
Holding torque (static)	[Nm]	2.5				
Separation time	[ms]	≤ 35				
Closing time	[ms]	10				
Response delay	[ms]	≤ 2				
Coil resistance	[Ω]	52.4				
Coil inductance	[mH]	700				
Mass moment of inertia	[kgcm <sup>2</sup> ]	0.074				
Max. friction work	[J]	5600				

1) With 3-phase mains supply to the servo drive, a voltage up to 3x 400 VAC +10% is permitted

2) Without brake/with brake

3) When using the rotary shaft seal, a reduction (derating) of the nominal torque of 10% must be taken into account

4) Inner stall torque constant

## Data sheet

<b>Technical data</b>							
Flange size	80						
Overall length	S	HS	M	HS	L	HS	H
Winding	LS	HS	LS	HS	LS	HS	HS
Nominal operating voltage <sup>1)</sup>	[V DC]	325	565	325	565	325	565
Nominal current	[A]	2.7	1.76	4.1	2.2	5.5	3.5
Continuous stall current	[A]	3.1	2	4.9	2.6	6.7	4.3
Peak current	[A]	8.4	5.4	17.1	9	27.3	17.5
Nominal power	[W]	408	408	690	690	910	910
Nominal torque <sup>3)</sup>	[Nm]	1.3	1.3	2.2	2.2	2.9	2.9
Peak torque	[Nm]	2.8	2.8	6.4	6.4	9.9	9.9
Stall torque	[Nm]	1.46	1.46	2.6	2.6	3.5	3.5
Stall torque constant <sup>4)</sup>	[Nm/A]	0.57	0.89	0.62	1.17	0.6	0.93
Nominal rotational speed	[rpm]	3000					
Max. rotational speed	[rpm]	6700	7440	6150	5650	6400	7100
Max. mechanical rotational speed	[rpm]	14000					
Max. idling rotational speed with brake	[rpm]	10000					
Motor constant	[Nm/A]	0.48	0.74	0.54	1	0.53	0.82
Voltage constant (phase-to-phase)	[mV/min]	34.3	53.6	37.3	70.7	36	56
Electric time constant	[ms]	4.9	4.8	6.5	6.4	6.9	7
Number of pole pairs		5	5	5	5	5	5
Winding resistance (phase-to-phase)	[Ω]	4.93	12.4	2.04	7.43	1.13	2.69
Winding inductance (phase-to-phase)	[mH]	16.3	39.8	8.9	31.8	5.2	12.6
Winding series inductance Ld (phase)	[mH]	10.2	25	5.4	19.4	3.1	7.5
Winding shunt inductance Lq (phase)	[mH]	12.2	29.8	6.6	23.8	3.9	9.45
Total output moment of inertia <sup>2)</sup>	[kgcm <sup>2</sup> ]	1.33/1.64	1.33/1.64	1.77/2.07	1.77/2.07	2.21/2.72	2.21/2.72
Shaft load at nominal rotational speed							
Radial	[N]	620					
Axial	[N]	120					
<b>Brake</b>							
Operating voltage	[V DC]	24 (+6 ... -10%)					
Current consumption	[A]	0.5	0.5	0.5	0.5	0.63	0.63
Power	[W]	12	12	12	12	15	15
Holding torque (static)	[Nm]	4.5	4.5	4.5	4.5	7	7
Separation time	[ms]	≤ 55	≤ 55	≤ 55	≤ 55	≤ 45	≤ 45
Closing time	[ms]	≤ 15	≤ 15	≤ 15	≤ 15	≤ 30	≤ 30
Response delay	[ms]	≤ 3	≤ 3	≤ 3	≤ 3	≤ 4	≤ 4
Coil resistance	[Ω]	48	48	48	48	38.4	38.4
Coil inductance	[mH]	1000	1000	1000	1000	900	900
Mass moment of inertia	[kgcm <sup>2</sup> ]	0.249	0.249	0.249	0.249	0.459	0.459
Max. friction work	[J]	8200	8200	8200	8200	12000	12000

1) With 3-phase mains supply to the servo drive, a voltage up to 3x 400 V AC +10% is permitted

2) Without brake/with brake

3) When using the rotary shaft seal, a reduction (derating) of the nominal torque of 10% must be taken into account

4) Inner stall torque constant

## Data sheet

<b>Technical data</b>			
Flange size	100		
Overall length	S	M	L
Winding	HS	HS	HS
Nominal operating voltage <sup>1)</sup>	[V DC]	565	565
Nominal current	[A]	3.5	4.3
Continuous stall current <sup>2)</sup>	[A]	4.4	5.9
Peak current	[A]	13.7	22.1
Nominal power <sup>2)</sup>	[W]	1450	1770
Nominal torque <sup>2)(3)</sup>	[Nm]	5.1	6.3
Peak torque	[Nm]	13.7	22.4
Stall torque <sup>2)</sup>	[Nm]	6.3	8.6
Stall torque constant <sup>4)</sup>	[Nm/A]	1.67	1.66
Nominal rotational speed	[rpm]	2700	
Max. rotational speed	[rpm]	3970	3980
Max. mechanical rotational speed	[rpm]	13000	
Max. idling rotational speed with brake	[rpm]	10000	
Motor constant	[Nm/A]	1.45	1.46
Voltage constant (phase-to-phase)	[mV/min]	101	100
Electric time constant	[ms]	14.5	16.6
Number of pole pairs		5	5
Winding resistance (phase-to-phase)	[Ω]	3.35	1.84
Winding inductance (phase-to-phase)	[mH]	32.4	20.4
Winding series inductance Ld (phase)	[mH]	17.8	10.2
Winding shunt inductance Lq (phase)	[mH]	24.3	15.3
Total output moment of inertia <sup>2)</sup>	[kgcm <sup>2</sup> ]	3.15/4.04	4.46/5.34
Shaft load at nominal rotational speed			
Radial	[N]	1110	
Axial	[N]	200	
<b>Brake</b>			
Operating voltage	[V DC]	24 (+6 ... -10%)	
Current consumption	[A]	0.75	0.75
Power	[W]	18	18
Holding torque (static)	[Nm]	11	11
Separation time	[ms]	≤ 80	
Closing time	[ms]	≤ 20	≤ 20
Response delay	[ms]	≤ 4	≤ 4
Coil resistance	[Ω]	32	32
Coil inductance	[mH]	900	900
Mass moment of inertia	[kgcm <sup>2</sup> ]	0.74	0.74
Max. friction work	[J]	12000	12000

1) With 3-phase mains supply to the servo drive, a voltage up to 3x 400 VAC +10% is permitted

2) Without brake/with brake

3) When using the rotary shaft seal, a reduction (derating) of the nominal torque of 10% must be taken into account

4) Inner stall torque constant

## Data sheet

Weight [kg]										
Flange size	60			80			100			
Overall length	S	M	L	S	M	L	H	S	M	L
Without brake	1.18	1.53	1.91	2.02	2.64	3.29	3.91	5.5	7.1	8.7
With brake	1.50	1.85	2.23	2.72	3.36	4.12	4.75	6.7	8.2	10.1

Operating and environmental conditions										
Flange size	60			80			100			
Overall length	S	M	L	S	M	L	H	S	M	L
Standard	IEC 60034									
Motor type to EN 60034-7	IM B5/IM V1/IM V3									
Degree of protection										
Motor shaft	IP40									
With rotary shaft seal	IP65									
Motor housing incl. connection technology	IP67									
Ambient temperature										
Temperature [°C]	-15 ... +40									
Up to 80°C with derating of ... per degree Celsius <sup>1)</sup>	-1.5%	-1.5%	-1.5%	-1.5%	-1.5%	-1.5%	-1.5%	-1.5%	-1.75%/-2.25%	
Storage temperature [°C]	-20 ... +70									
Max. winding temperature [°C]	155									
Temperature monitoring	Digital motor temperature transmission via EnDat 2.2									
Rating class to EN 60034-1	S1									
Thermal class to EN 60034-1	F									
Relative humidity [%]	0 ... 90 (non-condensing)									
Thermal time constant <sup>1)</sup> [min]	40/41	41/42	43/44	42	45	48	51	74	73	71
Thermal resistance <sup>1)</sup> [K/W]	1.3/1.5	1.1/1.3	1/1.2	0.95	0.78	0.68	0.65	0.6	0.5	0.46
Concentricity to DIN SPEC 42955	N									
Balance quality	G 2.5									
Pollution degree	2									
Max. setup altitude [m]	4000 (as of 1000 m only with derating of -1.0% per 100 m)									
Storage lifetime under nominal conditions [h]	20000									
Switching cycles of holding brake <sup>2)</sup>	10 million idle actuations									
CE marking (see declaration of conformity)	To EU Low Voltage Directive To EU EMC Directive <sup>3)</sup> To EU RoHS Directive									
Certification	c UL us - Recognized (OL) RCM									
Certificate issuing authority	UL E342973									
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6									
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27									
PWIS conformity	VDMA24364 zone III									
Note on materials	RoHS-compliant									

1) Without brake/with brake

2) Without friction work

3) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.


## Data sheet

Technical data – Encoder		
Measuring unit	Absolute, single-turn	Absolute, multi-turn
Operating voltage	[V DC]	5
Operating voltage range	[V DC]	3.6 ... 14
Protocol	EnDat 2.2, digital channel only, max. cycle rate (CLOCK) ≤ 16 MHz	
Position values per revolution	262144	524288
Measuring principle	Inductive	
Rotor position encoder resolution	18 bits	19 bit
Revolutions	1	4096 revolutions, 12 bits
System accuracy of angle measurement		
Flange size 60	[arcsec]	-120 ... 120
Flange size 80	[arcsec]	-120 ... 120
Flange size 100	[arcsec]	-65 ... 65

### Pin allocation – Motor side

M23x1, pins, 15-pin

PIN	Function
1	BR- Brake
2	-
3	-
4	BR+ Brake
5	Up Encoder power supply
6	0 V Encoder power supply
7	Data + Encoder communication
8	Data - Encoder communication
9	CLK + Encoder communication
10	CLK - Encoder communication
A	U Motor power supply
B	V Motor power supply
C	W Motor power supply
D	-
PE	PE Protective earth conductor

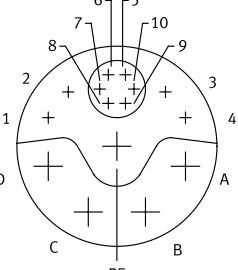


## Data sheet

## Torque M as a function of rotational speed n


Flange size 60

Length S


Winding LS (without brake)

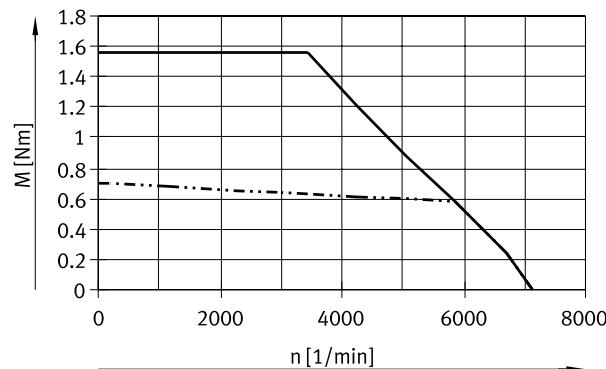


Winding LS-B (with brake)

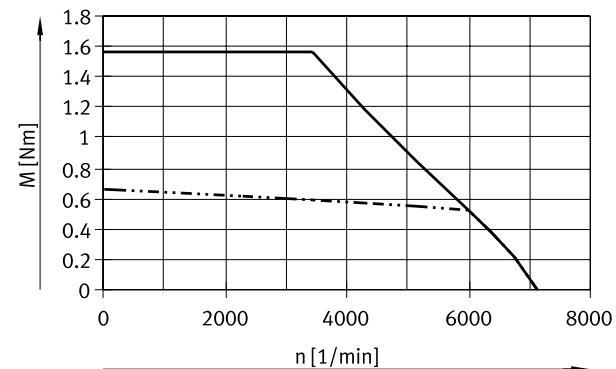

Winding HS (without brake)

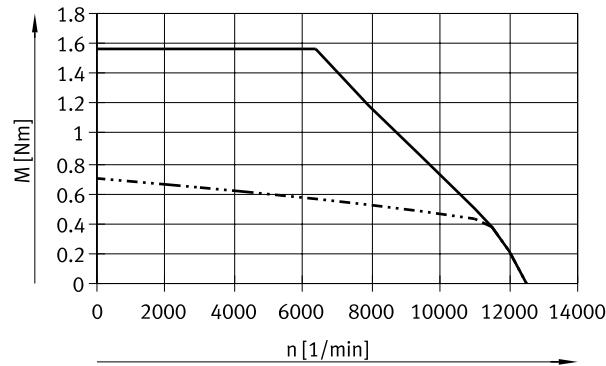


Winding HS-B (with brake)

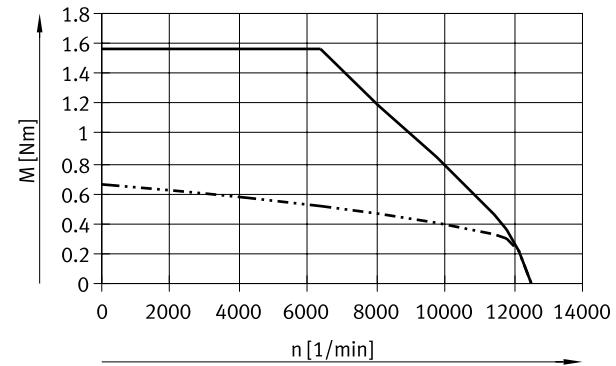


Length M

Winding LS (without brake)

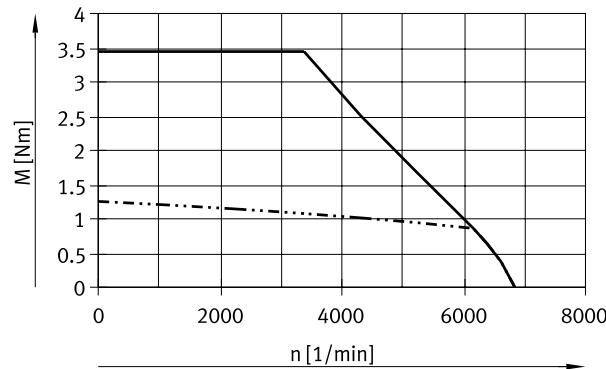

Winding LS-B (with brake)

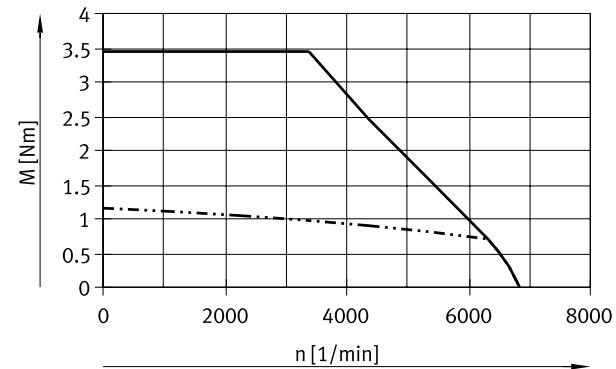

— Peak torque  
- - - Nominal torque

Note

Typical motor characteristic curve with nominal voltage and optimal motor controller.

Observe the maximum permissible rotational speeds of add-on and installation components (such as brake, encoder, etc.).


## Data sheet

## Torque M as a function of rotational speed n


Flange size 60

Length M

Winding HS (without brake)

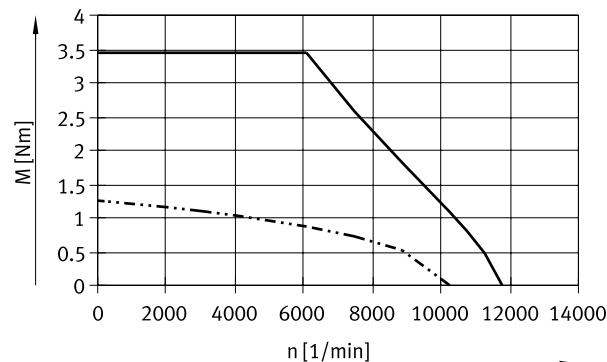


Winding HS-B (with brake)

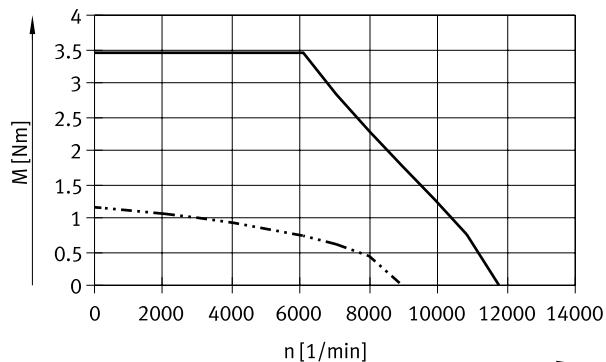


Length L


Winding LS (without brake)

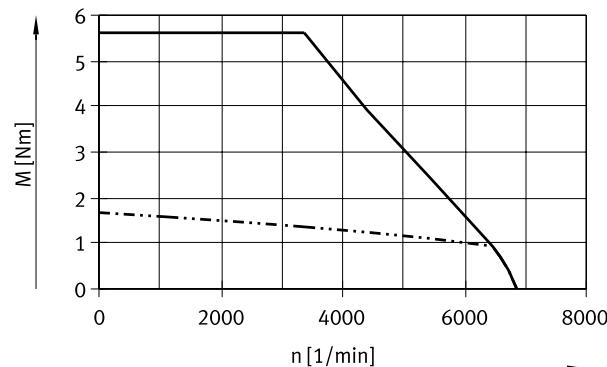


Winding LS-B (with brake)

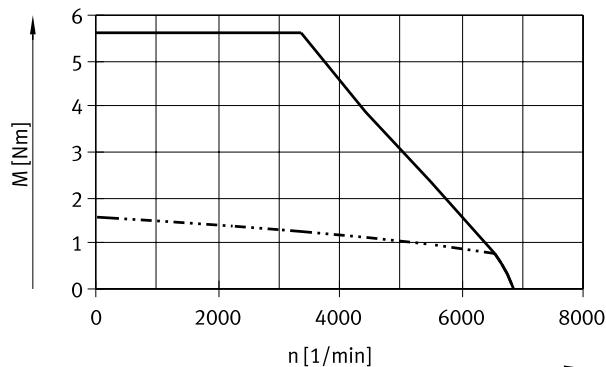

Winding HS (without brake)

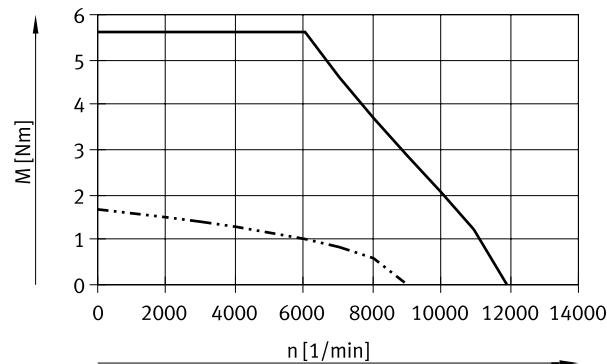

Winding HS-B (with brake)

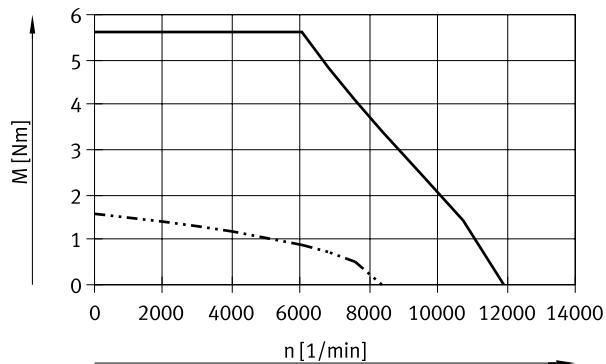

Peak torque

Nominal torque

Note

Typical motor characteristic curve with nominal voltage and optimal motor controller.

Observe the maximum permissible rotational speeds of add-on and installation components (such as brake, encoder, etc.).


## Data sheet

## Torque M as a function of rotational speed n


Flange size 80

Length S

Winding LS (without/with brake)

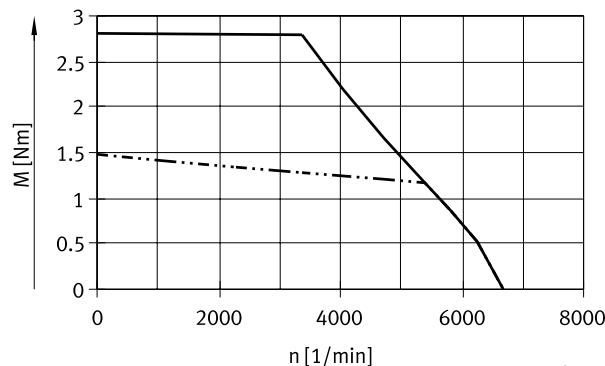


Winding HS (without/with brake)

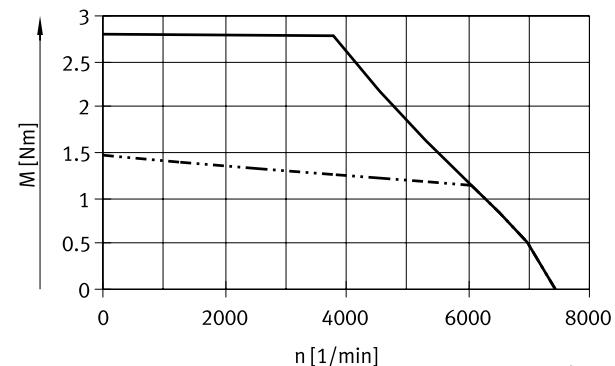


Length M

Winding LS (without/with brake)

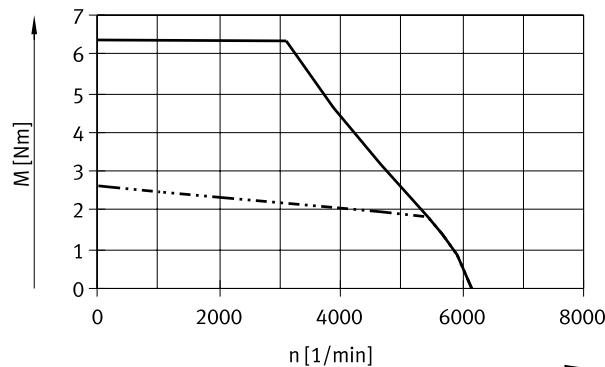


Winding HS (without/with brake)

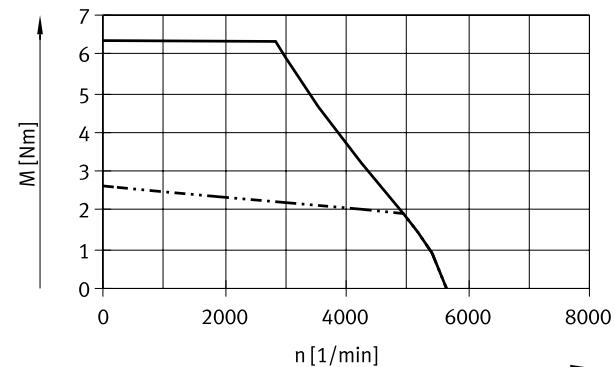


Length L

Winding LS (without/with brake)

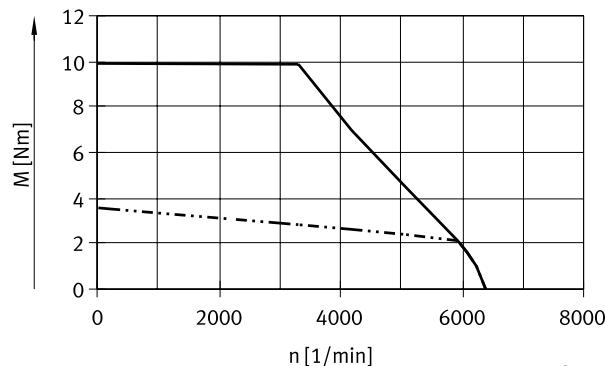

Winding HS (without/with brake)

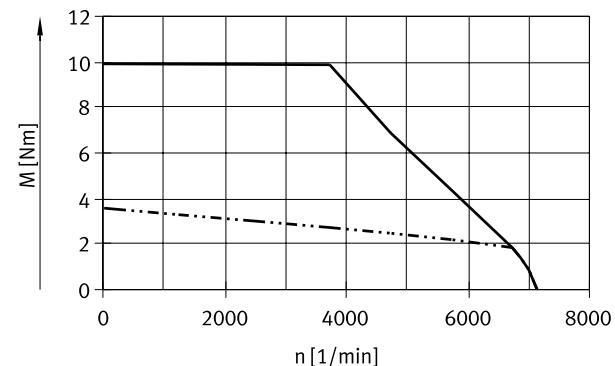

— Peak torque  
- - - Nominal torque

Note

Typical motor characteristic curve with nominal voltage and optimal motor controller.

Observe the maximum permissible rotational speeds of add-on and installation components (such as brake, encoder, etc.).


## Data sheet

## Torque M as a function of rotational speed n

Flange size 80

Length H


Winding HS (without/with brake)

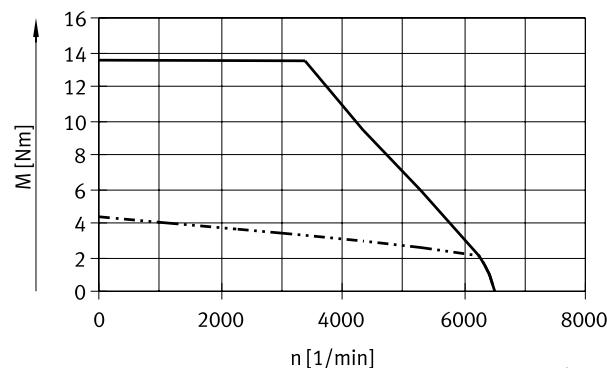

Flange size 100


Length S

Winding HS (without/with brake)

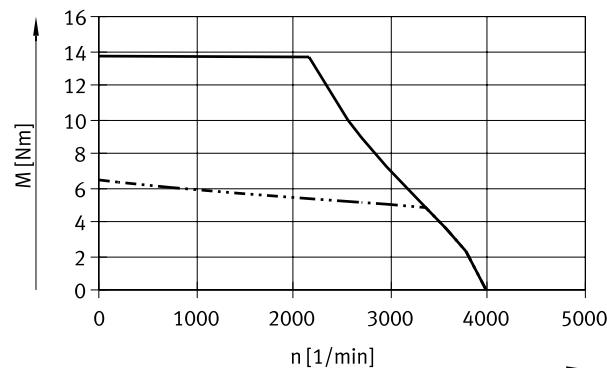


Length M

Winding HS (without/with brake)

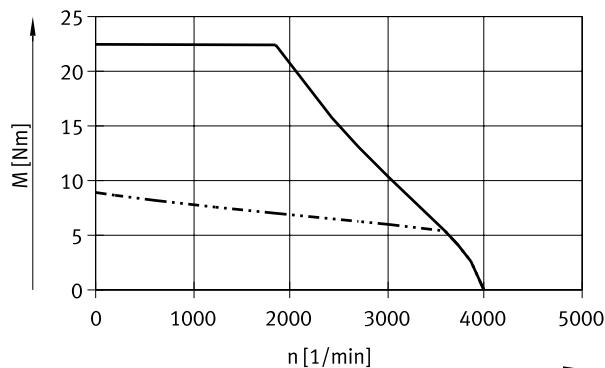


Length L

Winding HS (without brake)

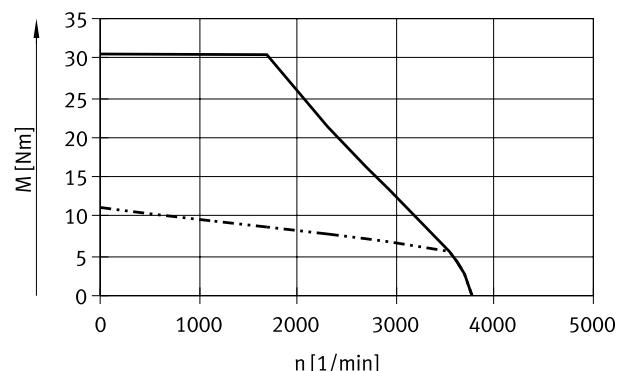


Winding HS-B (with brake)

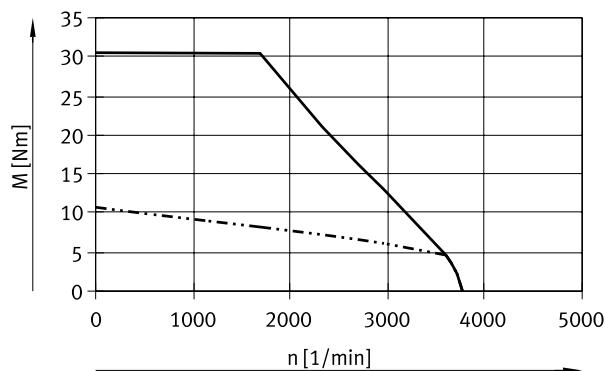

— Peak torque  
- - - Nominal torque

## Data sheet

## Dimensions

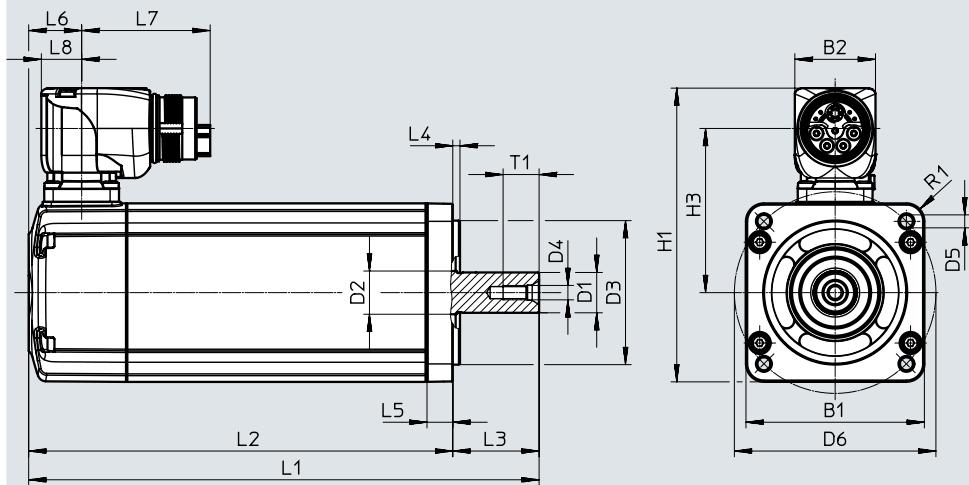Download CAD data → [www.festo.com](http://www.festo.com)

	Overall length	B1	B2	D1 Ø h6	D2 Ø	D3 Ø h7	D4	D5 Ø	D6 Ø ±0.3	H1	H3	L1	
												With brake	Without brake
60	S	62	28	14	15	50	M5	4.3	70	102	57	144.5	177.3
	M											164.5	197.3
	L											184.5	217.3
80	S	82	28	19	20	70	M6	5.3	90	122	67	165.2	209.4
	M											185.2	229.4
	L											205.2	249.4
	H											225.2	269.4
100	S	104	28	19	20	95	M6	9	115	144	78	227.5	271.7
	M											257.5	301.7
	L											287.5	330.7


	Overall length	L2		L3	L4	L5	L6	L7	L8	R1	T1
		±2	With brake ±2								
60	S	114.5	147.3	30 <sub>+0.5/-0.2</sub>	2.5	9	18.4	44.7	14	6	12.5
	M	134.5	167.3								
	L	154.5	187.3								
80	S	130.2	174.4	35 <sub>+0.4/-0.2</sub>	3	10	20.1	44.7	14	8	16
	M	150.2	194.4								
	L	170.2	214.4								
	H	190.2	234.4								
100	S	187.5	231.7	40 <sub>+0.4/-0.2</sub>	3	12	22.7	44.7	14	11	16
	M	217.5	261.7								
	L	247.5	290.7								

- - Note

Only motors without featherkey may be used in combination with parallel and axial kits (EAMM-U/EAMM-A).


## Data sheet

## Dimensions – Featherkey (optional)

Download CAD data → [www.festo.com](http://www.festo.com)

	B3	H4	H5	L9	L10	Featherkey
EMMT-AS-60-...-K	7.5	2	5	22	3	DIN 6885 A 5x5x22
EMMT-AS-80-...-K	8.5	2.5	6	22	3	DIN 6885 A 6x6x22
EMMT-AS-100-...-K	8.5	2.5	6	32	3	DIN 6885 A 6x6x32

## Dimensions – Connection

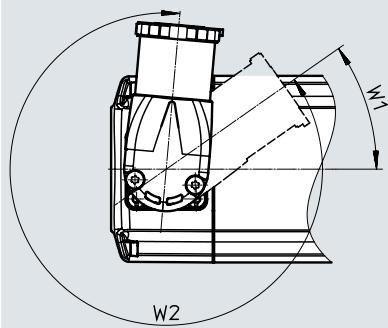Download CAD data → [www.festo.com](http://www.festo.com)

	W1	W2
EMMT-AS-...	-35°	310°

## Data sheet

Ordering data			Winding		Measuring unit		Brake	Part no.	Type
Overall length	Short	Medium	Low voltage, standard	High voltage, standard	Encoder, single-turn	Encoder, multi-turn			
<b>Flange size 60</b>									
■			■		■			5242196	EMMT-AS-60-S-LS-RS
■			■			■		5242197	EMMT-AS-60-S-LS-RM
■			■		■		■	5242198	EMMT-AS-60-S-LS-RSB
■			■			■	■	5242199	EMMT-AS-60-S-LS-RMB
■				■	■			5242200	EMMT-AS-60-S-HS-RS
■				■		■		5242201	EMMT-AS-60-S-HS-RM
■				■	■		■	5242202	EMMT-AS-60-S-HS-RSB
■				■		■	■	5242203	EMMT-AS-60-S-HS-RMB
	■		■		■			5242204	EMMT-AS-60-M-LS-RS
	■		■			■		5242205	EMMT-AS-60-M-LS-RM
	■		■		■		■	5242206	EMMT-AS-60-M-LS-RSB
	■		■			■	■	5242207	EMMT-AS-60-M-LS-RMB
	■			■	■			5242208	EMMT-AS-60-M-HS-RS
	■			■		■		5242209	EMMT-AS-60-M-HS-RM
	■			■	■		■	5242210	EMMT-AS-60-M-HS-RSB
	■			■		■	■	5242211	EMMT-AS-60-M-HS-RMB
		■	■		■			5242212	EMMT-AS-60-L-LS-RS
		■	■			■		5242213	EMMT-AS-60-L-LS-RM
		■	■		■		■	5242214	EMMT-AS-60-L-LS-RSB
		■	■			■	■	5242215	EMMT-AS-60-L-LS-RMB
		■		■	■			5242216	EMMT-AS-60-L-HS-RS
		■		■		■		5242217	EMMT-AS-60-L-HS-RM
		■		■	■		■	5242218	EMMT-AS-60-L-HS-RSB
		■		■		■	■	5242219	EMMT-AS-60-L-HS-RMB
<b>Flange size 80</b>									
■			■		■			5255425	EMMT-AS-80-S-LS-RS
■			■			■		5255426	EMMT-AS-80-S-LS-RM
■			■		■		■	5255427	EMMT-AS-80-S-LS-RSB
■			■			■	■	5255428	EMMT-AS-80-S-LS-RMB
■				■	■			5255429	EMMT-AS-80-S-HS-RS
■				■		■		5255430	EMMT-AS-80-S-HS-RM
■				■	■		■	5255431	EMMT-AS-80-S-HS-RSB
■				■		■	■	5255432	EMMT-AS-80-S-HS-RSM
	■		■		■			5255433	EMMT-AS-80-M-LS-RS
	■		■			■		5255434	EMMT-AS-80-M-LS-RM
	■		■		■		■	5255435	EMMT-AS-80-M-LS-RSB
	■		■			■	■	5255436	EMMT-AS-80-M-LS-RMB
	■			■	■			5255437	EMMT-AS-80-M-HS-RS
	■			■		■		5255438	EMMT-AS-80-M-HS-RM
	■			■	■		■	5255439	EMMT-AS-80-M-HS-RSB
	■			■		■	■	5255440	EMMT-AS-80-M-HS-RMB
		■	■		■			5255441	EMMT-AS-80-L-LS-RS
		■	■			■		5255442	EMMT-AS-80-L-LS-RM
		■	■		■		■	5255443	EMMT-AS-80-L-LS-RSB
		■	■			■	■	5255444	EMMT-AS-80-L-LS-RMB
		■		■	■			5255445	EMMT-AS-80-L-HS-RS
		■		■		■		5255446	EMMT-AS-80-L-HS-RM
		■		■	■		■	5255447	EMMT-AS-80-L-HS-RSB
		■		■		■	■	5255448	EMMT-AS-80-L-HS-RMB

## Data sheet




Ordering data			Winding		Measuring unit		Brake	Part no.	Type
Overall length	Short	Medium	Long	Low voltage, standard	High voltage, standard	Encoder, single-turn	Encoder, multi-turn		
<b>Flange size 100</b>									
■				■	■			5255519	EMMT-AS-100-S-HS-RS
■				■		■		5255521	EMMT-AS-100-S-HS-RM
■				■	■		■	5255528	EMMT-AS-100-S-HS-RSB
■				■		■	■	5255529	EMMT-AS-100-S-HS-RMB
	■			■	■			5255530	EMMT-AS-100-M-HS-RS
	■			■		■		5255531	EMMT-AS-100-M-HS-RM
	■			■	■		■	5255532	EMMT-AS-100-M-HS-RSB
	■			■		■	■	5255533	EMMT-AS-100-M-HS-RMB
		■		■	■	■		5255534	EMMT-AS-100-L-HS-RS
		■		■		■		5255535	EMMT-AS-100-L-HS-RM
		■		■	■		■	5255536	EMMT-AS-100-L-HS-RSB
		■		■		■	■	5255537	EMMT-AS-100-L-HS-RMB

## Ordering data – Modular product system

Ordering table		60	80	100	Conditions	Code	Enter code
Size							
Module no.	<b>4808568</b>	<b>4595815</b>	<b>5185818</b>				
Series	EMMT				<b>EMMT</b>		<b>EMMT</b>
Motor technology	AC synchronous					<b>-AS</b>	<b>-AS</b>
Motor flange size	60 mm	80	100			<b>-</b>	<b>-</b>
Overall length	Short					<b>-S</b>	
	Medium					<b>-M</b>	
	Long					<b>-L</b>	
	Very long					<b>-H</b>	
Output shaft	Smooth shaft						
	Shaft to DIN 6885					<b>K</b>	
Rotary shaft seal	None						
	With standard shaft seal				[1]	<b>R</b>	
Winding	Low voltage, standard				[2]	<b>-LS</b>	
	High voltage, standard					<b>-HS</b>	
Electrical connection	Angled plug, rotatable					<b>-R</b>	<b>-R</b>
Measuring unit	Absolute encoder, single-turn					<b>S</b>	
	Absolute encoder, multi-turn					<b>M</b>	
Brake	None						
	With brake					<b>B</b>	

[1] R When using the rotary shaft seal, a reduction (derating) of the nominal torque of 10% must be taken into account  
 [2] LS Not in combination with length H


## Accessories

Ordering data – Gear unit				Data sheets → Internet: emga
	Motor interface	Gear ratio	Part no.	Type
	60P	3	2297686	EMGA-60-P-G3-EAS-60
		5	2297687	EMGA-60-P-G5-EAS-60
	80P	3	2297690	EMGA-80-P-G3-EAS-80
		5	2297691	EMGA-80-P-G5-EAS-80
	100A	3	552194	EMGA-80-P-G3-SAS-100
		5	552195	EMGA-80-P-G5-SAS-100
		3	552196	EMGA-120-P-G3-SAS-100
		5	552197	EMGA-120-P-G5-SAS-100

Ordering data – Rotary shaft seal			
	For flange size	Description	Part no.
	60	• For the motors EMMT-AS • Protection to IP65 is achieved in combination with the sealing ring	8079786 EASS-RS-T-A-4P-15-30-B7
	80, 100	• Based on the operating conditions, the shaft seal must be replaced after a maximum of 5000 operating hours • When using the rotary shaft seal, a reduction (derating) of the nominal torque of 10% must be taken into account • Information on installation/replacement → <a href="http://www.festo.com/sp">www.festo.com/sp</a>	8079785 EASS-RS-T-A-4P-20-40-B7

## Accessories


**Recommended cable cross section at an ambient temperature of 40°C as a function of cable length and servo drive CMMT-AS**

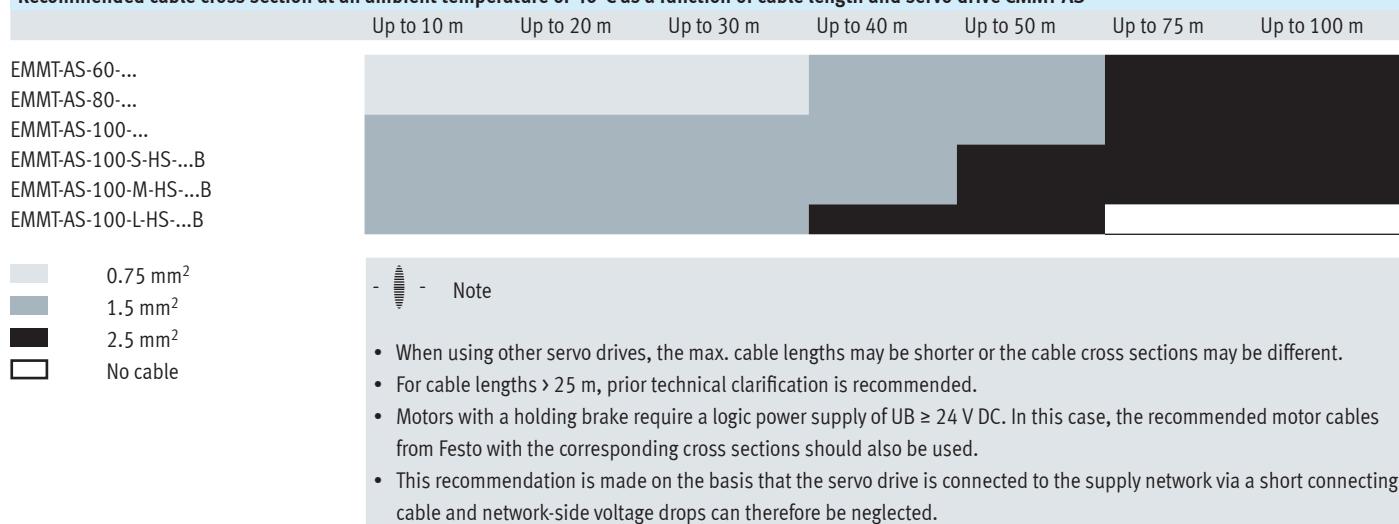

### Technical data – Motor cables

Cable cross section	0.75 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
Type	NEBM-M23G15...Q7N	NEBM-M23G15...Q9N	NEBM-M23G15...Q10N
Cable composition	4x 0.75 mm <sup>2</sup> + 1x (2x 0.75 mm <sup>2</sup> ) + 1x (2x 0.24 mm <sup>2</sup> + 2x 0.15 mm <sup>2</sup> )	4 x 1.5 mm <sup>2</sup> + 1 x (2 x 0.75 mm <sup>2</sup> ) + 1 x (2 x 0.24 mm <sup>2</sup> + 2 x 0.15 mm <sup>2</sup> )	4 x 2.5 mm <sup>2</sup> + 1 x (2 x 1.0 mm <sup>2</sup> ) + 1 x (2 x 0.24 mm <sup>2</sup> + 2 x 2 x 0.15 mm <sup>2</sup> )
	Shielded		
Cable diameter	[mm]	12	12.8
Min. bending radius			13.9
For fixed cable installation	[mm]	≥ 48	≥ 51.2
With flexible cable installation	[mm]	≥ 90	≥ 96
Pollution degree		1	3
Ambient temperature			
For fixed cable installation	[°C]	-40 ... +90	
With flexible cable installation	[°C]	-25 ... +80	
Cable characteristic		Suitable for energy chains	
Degree of protection		IP67 (in assembled state)	
Material		TPE-U (PUR)	
Note on materials		RoHS-compliant	
CE marking (see declaration of conformity)		To EU Low Voltage Directive	

## Accessories

Ordering data – Motor cable				
	Cable cross section	Cable length [m]	Part no.	Type
	0.75 mm <sup>2</sup>	2.5	5251374	NEBM-M23G15-EH-2.5-Q7N-R3LEG14
		5	5251375	NEBM-M23G15-EH-5-Q7N-R3LEG14
		7.5	5251376	NEBM-M23G15-EH-7.5-Q7N-R3LEG14
		10	5251377	NEBM-M23G15-EH-10-Q7N-R3LEG14
		15	5251378	NEBM-M23G15-EH-15-Q7N-R3LEG14
		20	5251379	NEBM-M23G15-EH-20-Q7N-R3LEG14
		X length <sup>1)</sup>	5251373	NEBM-M23G15-EH-...-Q7N-R3LEG14
	1.5 mm <sup>2</sup>	2.5	5251381	NEBM-M23G15-EH-2.5-Q9N-R3LEG14
		5	5251382	NEBM-M23G15-EH-5-Q9N-R3LEG14
		7.5	5251383	NEBM-M23G15-EH-7.5-Q9N-R3LEG14
		10	5251384	NEBM-M23G15-EH-10-Q9N-R3LEG14
		15	5251385	NEBM-M23G15-EH-15-Q9N-R3LEG14
		20	5251386	NEBM-M23G15-EH-20-Q9N-R3LEG14
		X length <sup>1)</sup>	5251380	NEBM-M23G15-EH-...-Q9N-R3LEG14
	2.5 mm <sup>2</sup>	2.5	5251388	NEBM-M23G15-EH-2.5-Q10N-R3LEG14
		5	5251389	NEBM-M23G15-EH-5-Q10N-R3LEG14
		7.5	5251390	NEBM-M23G15-EH-7.5-Q10N-R3LEG14
		10	5251391	NEBM-M23G15-EH-10-Q10N-R3LEG14
		15	5251392	NEBM-M23G15-EH-15-Q10N-R3LEG14
		20	5251393	NEBM-M23G15-EH-20-Q10N-R3LEG14
		X length <sup>1)</sup>	5251387	NEBM-M23G15-EH-...-Q10N-R3LEG14

1) Choice of cable lengths: 0.5 ... 99.9 m, in increments of 0.1 m.

# Festo - Your Partner in Automation



## 1 Festo Inc.

5300 Explorer Drive  
Mississauga, ON L4W 5G4  
Canada

### Festo Customer Interaction Center

Tel: 1 877 463 3786  
Fax: 1 877 393 3786  
Email: [customer.service.ca@festo.com](mailto:customer.service.ca@festo.com)

## 2 Festo Pneumatic

Av. Ceylán 3,  
Col. Tequesquínáhuac  
54020 Tlalnepantla,  
Estado de México

### Multinational Contact Center

01 800 337 8669  
[ventas.mexico@festo.com](mailto:ventas.mexico@festo.com)

## 3 Festo Corporation

1377 Motor Parkway  
Suite 310  
Islandia, NY 11749

### Festo Customer Interaction Center

1 800 993 3786  
1 800 963 3786  
[customer.service.us@festo.com](mailto:customer.service.us@festo.com)

## 4 Regional Service Center

7777 Columbia Road  
Mason, OH 45040

### Connect with us



[www.festo.com/socialmedia](http://www.festo.com/socialmedia)



[www.festo.com](http://www.festo.com)