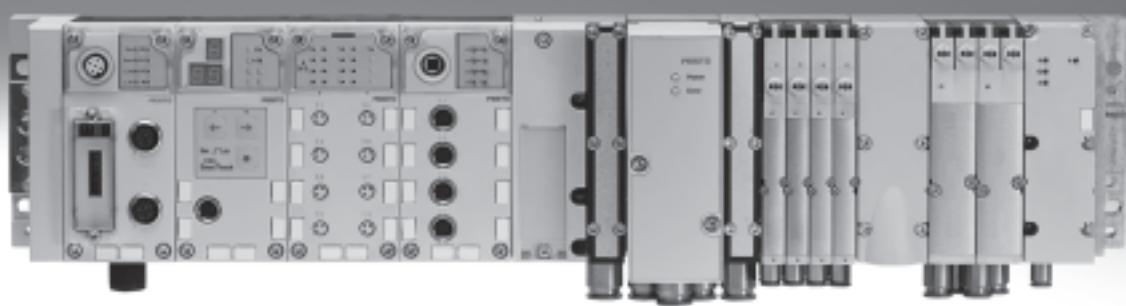


Modular electrical terminal CPX

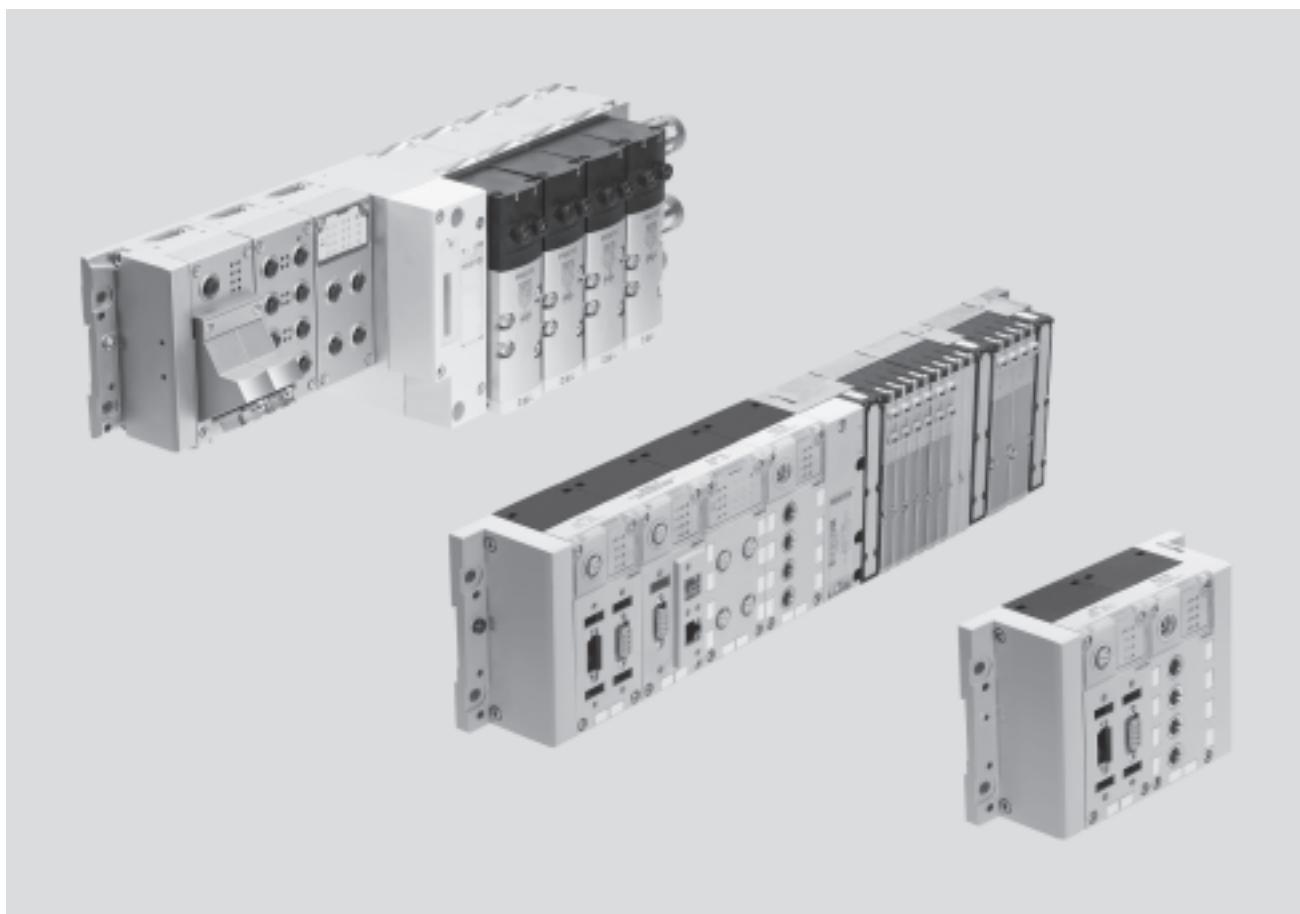
FESTO



Terminal CPX

Key features

FESTO



Key features

Installation concept

- Choice of several valve terminal types for different applications:
 - MIDI/MAXI
 - CPA
 - MPA-S
 - MPA-F
 - MPA-L
- Economical from the smallest configuration up to the maximum number of modules
- Up to 9 electrical input/output modules plus bus nodes and pneumatic interface/electronic modules for valves
- Extensive range of functions and connection options for the electrical modules
- Choice of connection technology for technically and economically optimised connections
- Can be used as a dedicated remote I/O module

Electrical components

- High operating voltage tolerance ($\pm 25\%$)
- Choice of M18, 7/8" or AIDA push-pull connection for power supply
- Open to all fieldbus protocols and Ethernet
- Optional function and technology modules for preprocessing
- IT services and TCP/IP such as remote maintenance, remote diagnostics, web server, text message and e-mail alert
- Digital inputs and outputs, 4-/8-/16-way, optionally available with individual channel diagnostics
- Analogue inputs and outputs, 2-/4-way
- Pressure inputs
- Temperature inputs
- Controllers for pneumatic and electrical axes
- IP65 and IP67 or IP20

Assembly

- Wall or H-rail mounting, also on mobile systems
- Conversions/extensions are possible at any time, individual linking with CPX metal design
- Modular system offering a range of configuration options
- Fully assembled and tested unit
- Lower selection, ordering, assembly and commissioning costs thanks to the central CPX terminal
- Choice of pneumatic components for optimised control loop system design
- Decentralised, subordinate CPI installation system improves cycle times by up to 30%
- Safe and convenient earthing thanks to earthing plate

Operation

- Fast troubleshooting thanks to an extensive selection of LEDs (some of which are multi-coloured) on the bus node and on all I/O modules
- Supports module and channel-oriented diagnostics
- On-the-spot diagnostics in plain text via handheld device
- Fieldbus/Ethernet remote diagnostics
- Innovative diagnostic support with integrated web server/web monitor or maintenance tool with USB adapter for PC
- Optimised commissioning thanks to parameterisable functions
- Reliability of service with connection blocks and modules that are quick to replace without changing the wiring

Terminal CPX

FESTO

Key features

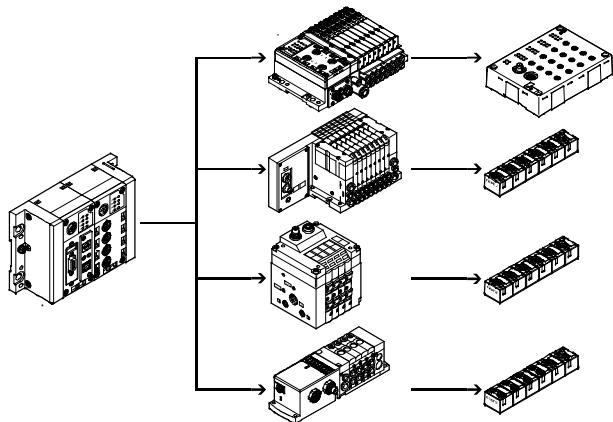
Pneumatic variants of the CPX terminal

The electrical CPX terminal is a modular peripheral system for valve terminals.


The system is specifically designed so that the valve terminal can be adapted to suit different applications.

The modular system design lets you configure the number of valves, inputs and additional outputs to suit the application.


With valve terminal – decentralised




With valve terminal MPA-S – centralised

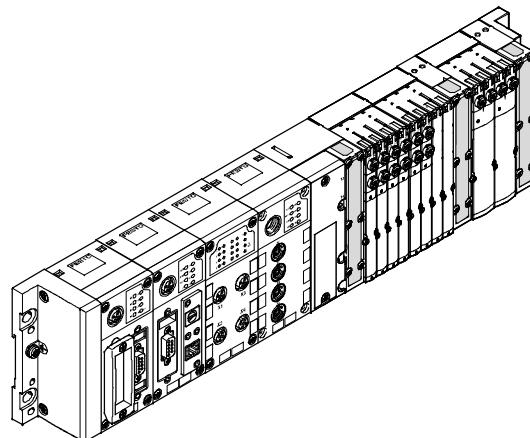


With valve terminal VTSA – centralised

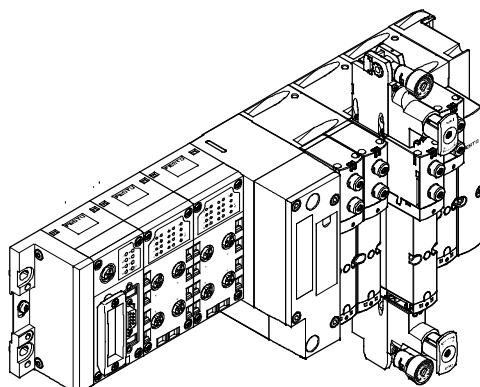

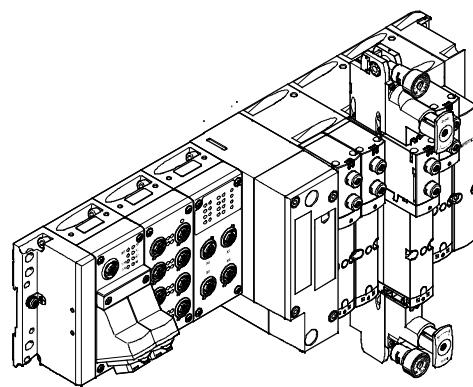
In metal design with valve terminal VTSA – centralised



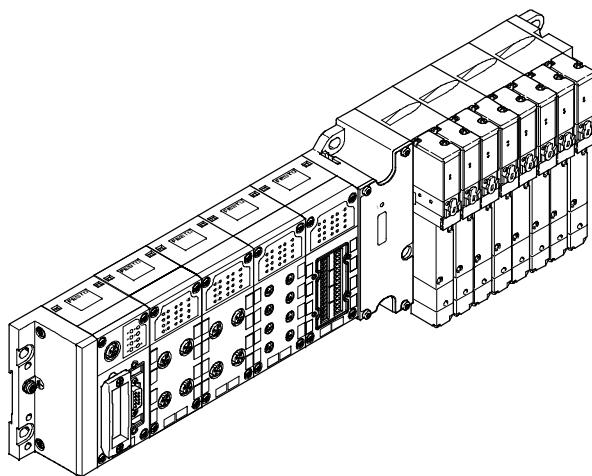With valve terminal MIDI/MAXI – centralised



With valve terminal CPA – centralised

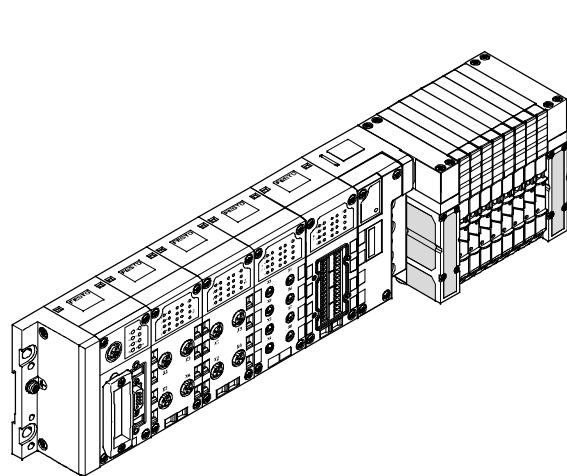

Terminal CPX

Key features

FESTO

Variants of the CPX terminal controller (with bus node, without preprocessing)

Bus node

Different bus nodes are used to integrate the terminal in the control systems of various manufacturers. The CPX terminal can therefore be operated on over 90% of the most commonly used fieldbus systems:

- PROFIBUS DP
- PROFINET
- INTERBUS

- DeviceNet
- CANopen
- CC-Link

Integration in universal networks based on Ethernet opens up new possibilities. Faster data transmission, real-time capability and above all additional IT services such

as file transfer, web server, web monitor as integrated website in the CPX terminal, text message/e-mail alerts, etc. open up a wide range of synergies.

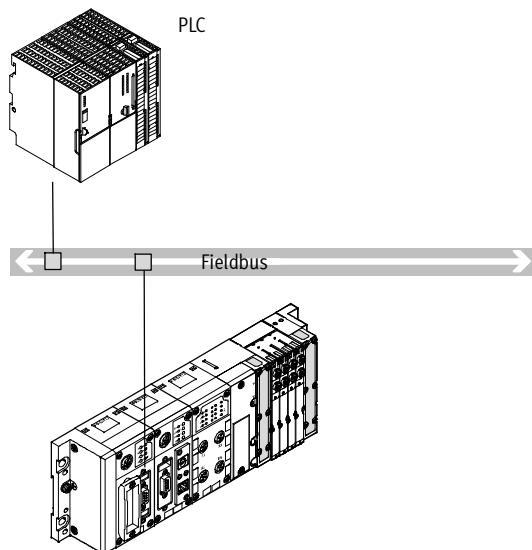
These include standardised and universal communication technology across all areas, including operating

level, management level and field level in the production environment, with protection to IP65/67.

The following protocols are supported:

- EtherNet/IP
- Modbus/TCP
- PROFINET
- EtherCAT


Bus node



- Communication with higher-order controller via fieldbus
- No preprocessing

- Fieldbus protocol dependent on CPX bus node used
- Up to 90 I/Os, depending on the bus node used

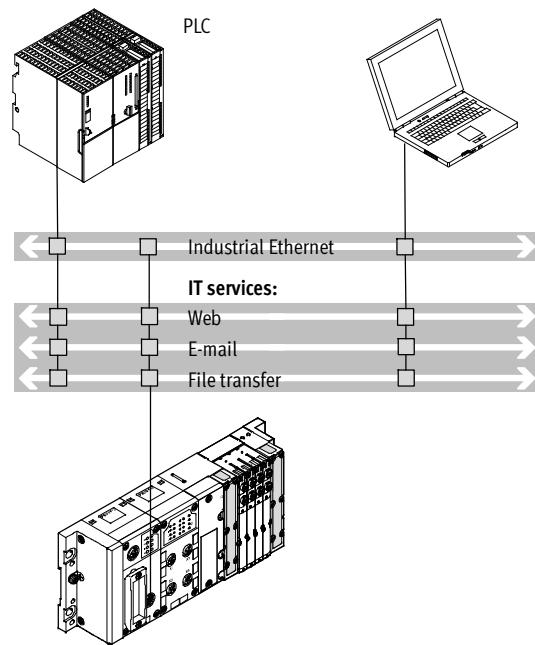Industrial Ethernet bus node



- Connection to a higher-order controller directly via EtherNet/IP, Modbus/TCP or PROFINET
- Monitoring via Ethernet and web applications
- Up to 300 I/Os
- No preprocessing

Note

Every electrical connection can be combined with an appropriate number of I/O modules and/or pneumatic components, depending on its address capacity.

Likewise, every pneumatic variant of the CPX terminal can be operated with every electrical connection variant.

Terminal CPX

FESTO

Key features

Variants of the CPX terminal controller (with preprocessing in the control block)

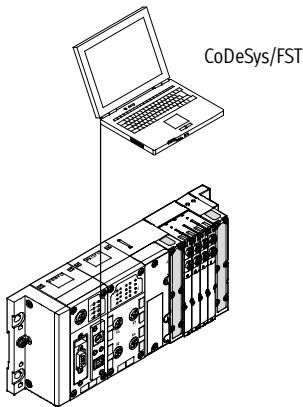
Control block

The optional Front End Controllers CPX-FEC and CPX-CEC enable simultaneous access via Ethernet and an integrated web server (in the case


of CPX-FEC), in parallel with a bus node, as well as autonomous preprocessing. Access via Modbus/TCP and EasylP is also possible.

Commissioning, programming and diagnostics using the Festo software tool FST 4.1 with hardware configurator.

With control block in stand-alone mode



With control block in Festo EasylP mode

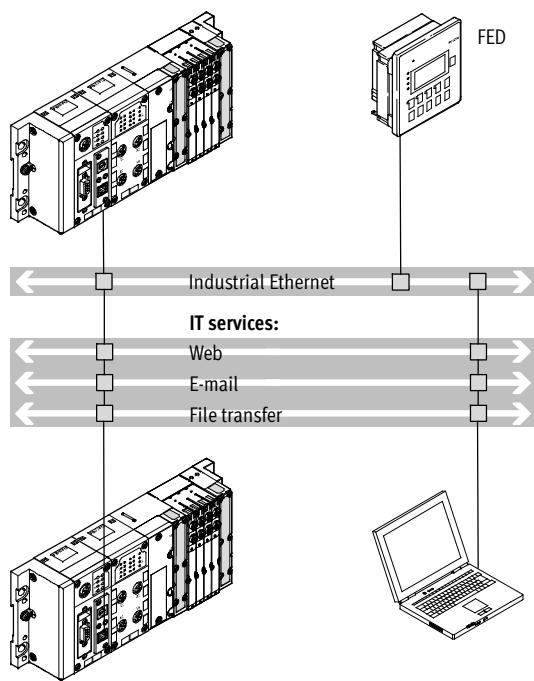

- Decentralised controller with direct machine mounting
- Interaction options via CPX-MMI or Front End Display (FED)
- Downloading of programs via Ethernet (or via the programming interface)
- Supports full expansion of all CPX peripherals
- More than 300 I/Os

- Beneficial application areas:
- Stand-alone individual workstations
 - Interlinked, stand-alone sub-systems
 - Automation using IT technology

- Fast preprocessing of the CPX peripherals in the control block
- Exchange of any data between the control blocks via EasylP
- Operation and monitoring of several control blocks via one FED
- Remote diagnostics

- No higher-order controller is required
- More than 300 I/Os per CPX control block

Terminal CPX

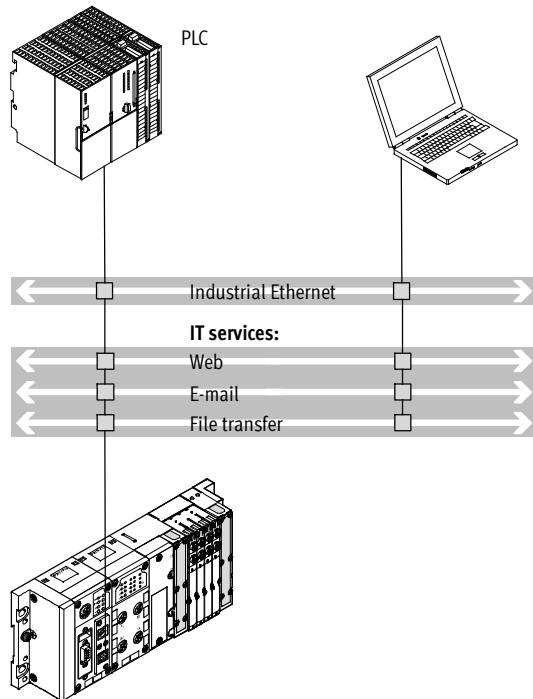
Key features

FESTO

Variants of the CPX terminal controller (with preprocessing in the control block)

With control block as remote controller on Ethernet

Remote controller on Ethernet as the preprocessing unit for decentralised, stand-alone subsystems using IT technology.




- Connection to a higher-order controller via Ethernet, no further bus node is required
- Monitoring via Ethernet and web applications

- Preprocessing of the CPX peripherals by CPX control block
- More than 300 I/Os

With control block as remote controller on the fieldbus

Fieldbus remote controller (combination with bus nodes for Interbus, PROFIBUS DP, PROFINET, CANopen,

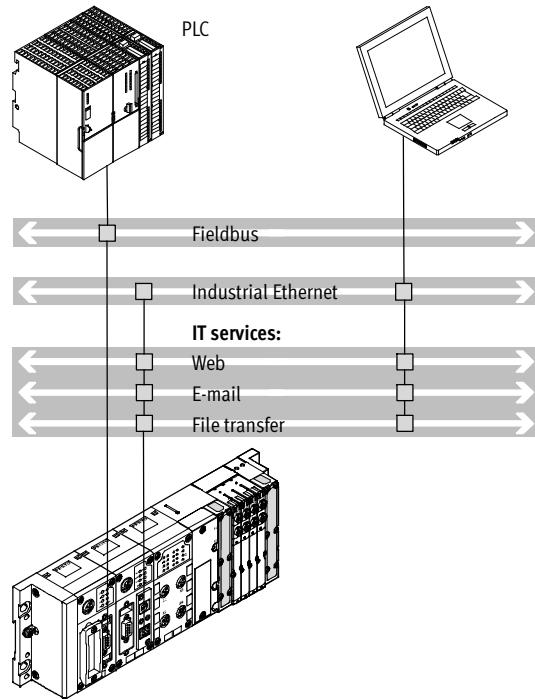DeviceNet, CC-Link or EtherCAT) as the preprocessing unit for decentralised, stand-alone subsystems.



- Fast preprocessing of the CPX peripherals in the control block
- Communication with higher-order controller via fieldbus
- Optional additional monitoring via Ethernet and web applications
- Downloading of programs via programming interface
- More than 300 I/Os, bus node is only used for communication with the higher-order PLC
- Two bus nodes for redundant communication configuration

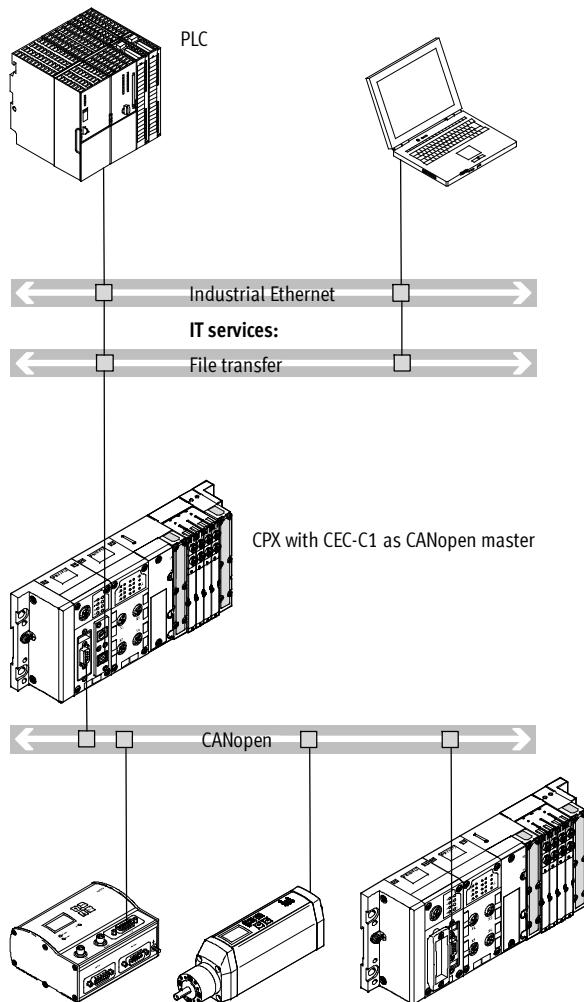
Terminal CPX

FESTO

Key features

Variants of the CPX terminal controller (with preprocessing in the control block)

With control block as CANopen fieldbus master



Properties:

- Connection to a higher-order controller via Ethernet, no further bus node is required
- Monitoring via Ethernet
- Preprocessing of the CPX peripherals by CPX control block
- More than 300 I/Os
- Up to 128 stations with repeater technology on CANopen

Operating modes:

- Remote controller on Ethernet
- Control block in Festo EasylP mode

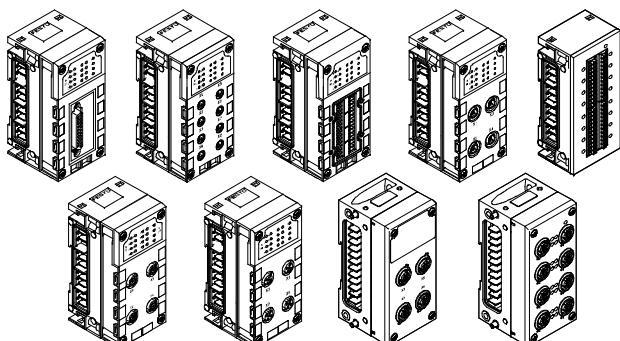
Terminal CPX

Key features

FESTO

Connection of inputs and outputs to the CPX terminal

Digital and analogue CPX I/O modules




Electrical connection

The connection technology for sensors and additional actuators offers a wide range of digital and analogue input and output modules and is freely selectable – as appropriate to your standard or application. Plastic or metal connection blocks can be combined as required:

- Metal design
 - M12-5POL

- Plastic design:
 - M12-5POL with quick lock and metal thread
 - M12-8POL
 - M8-3POL
 - M8-4POL
 - Sub-D
 - Harax®
 - CageClamp®
(with cover also to IP65/67)

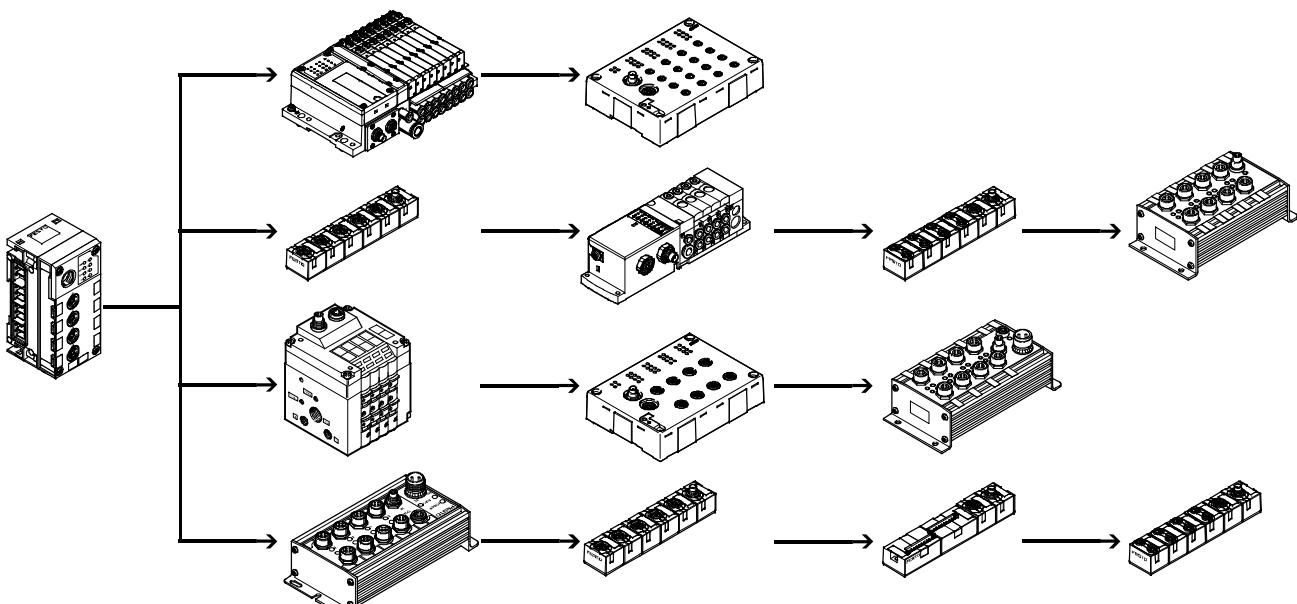With CPX-CP interface




- Up to 4 strings per CP interface possible
- Up to 4 subordinate CP modules can be combined in one string

- Up to 32 I/Os can be connected per string
- Modules with M8, M12 and terminal connection

Several CP interface modules can be combined in one CPX terminal (depending on the controller used).

Combination of centralised CPX I/O modules and decentrally mounted I/O modules of the CPI installation system.

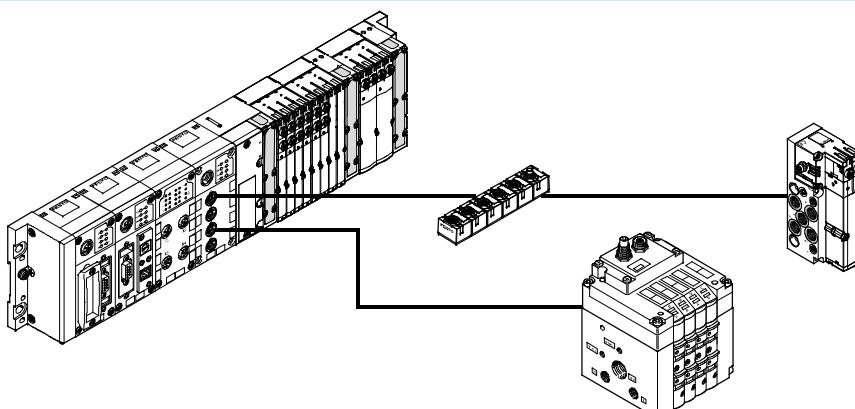Combined centralised and decentralised electrical connection (valve terminal with CP interface/output module)




- Scalable to different requirements within a system
- One control interface in the system, reduces installation complexity with closely and widely spaced actuators
- Enables an optimum electrical and pneumatic control chain

Terminal CPX

FESTO

Key features

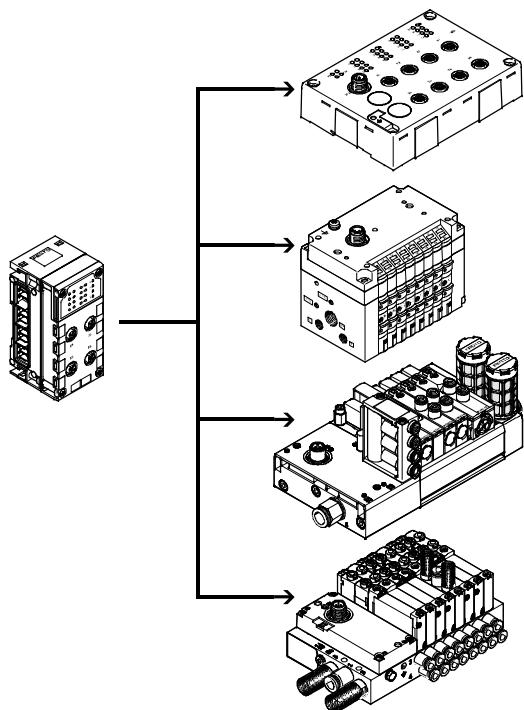Connection of inputs and outputs to the CPX terminal with CPX-CTEL interface



- Up to 4 devices with individual electronic fuse protection per CPX-CTEL master
- Max. 64 inputs/64 outputs per I-Port interface
- The maximum length of a string is 20 m
- Input modules with 16 digital inputs (3-pin M8 and 5-pin M12 connection technology)
- Valve terminals with I-Port interface (up to 48 solenoid coils, different valve functions)

Several CPX-CTEL masters can be combined in one CPX terminal (depending on the controller used). Combination of central CPX I/O modules and decentrally mounted I/O modules with I-Port interface.

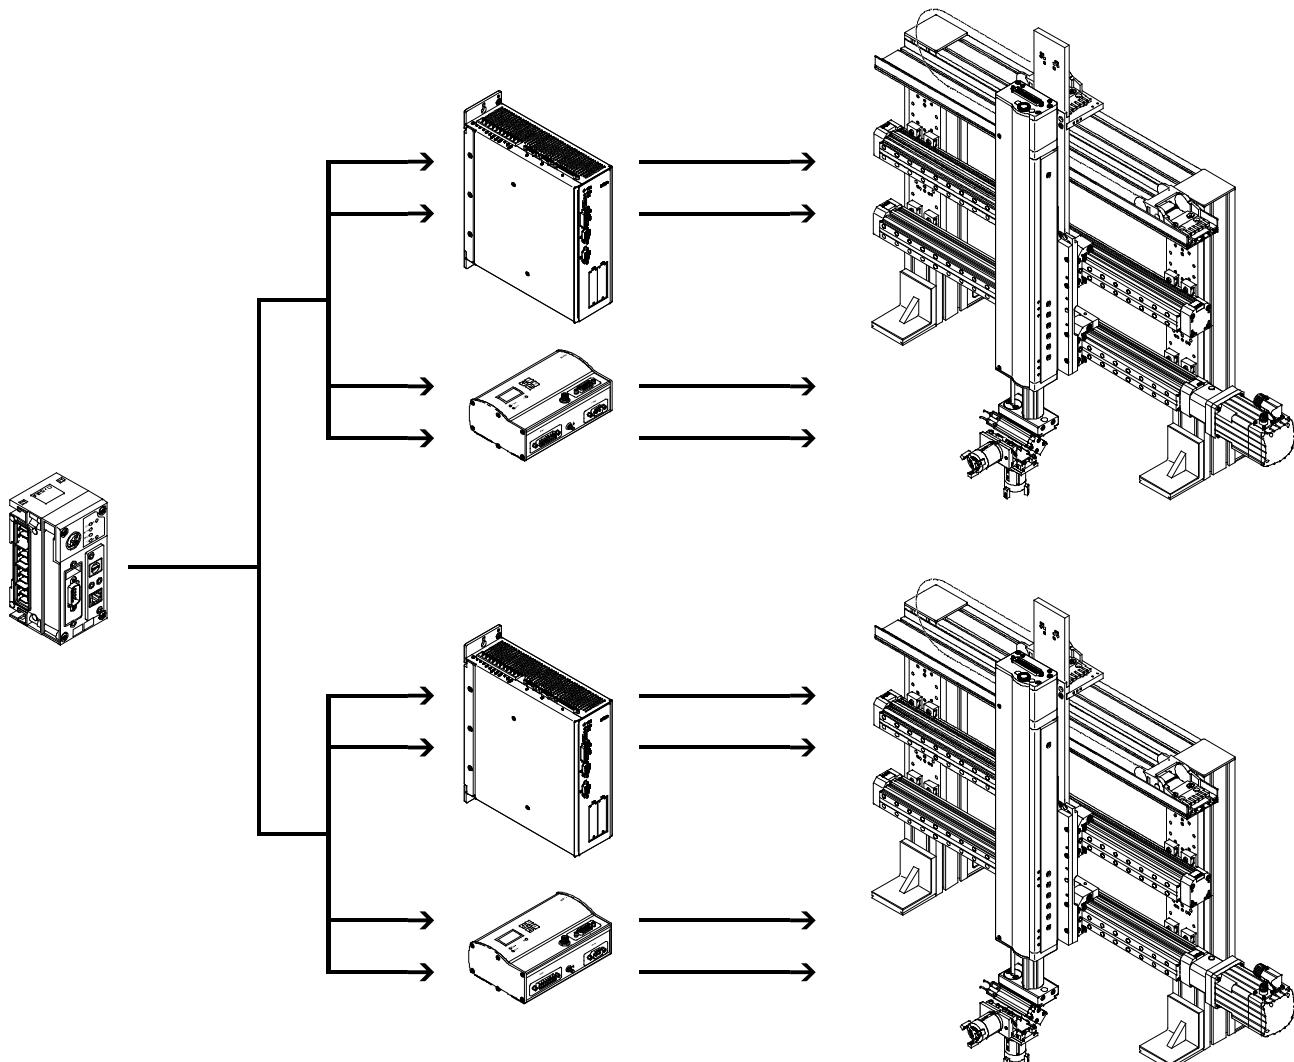
Terminal CPX

Key features

FESTO

Connection of inputs and outputs to the CPX terminal

Electrical drives with CPX-CMXX multi-axis interface




- Two axis groups, each with up to four axes, per CPX-CMXX
- 1,024 positioning records possible per axis group

- 2-axis gantries
- 3-axis gantries

Several CP interface modules can be combined in one CPX terminal (depending on the controller used).

Combination of centralised CPX I/O modules and decentrally mounted I/O modules of the CPI installation system.

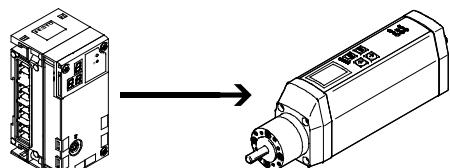Electrical drives with CPX-CM-HPP axis interface



- Max. 4 individual electric axes, per CPX-CM-HPP
- No programming required

- Standardised communication with the drives via the Festo Handling and Positioning Profile (FHPP)

- The control component is independent of the bus node used

- Quick configuration and diagnostics via the operator unit CPX-MMI

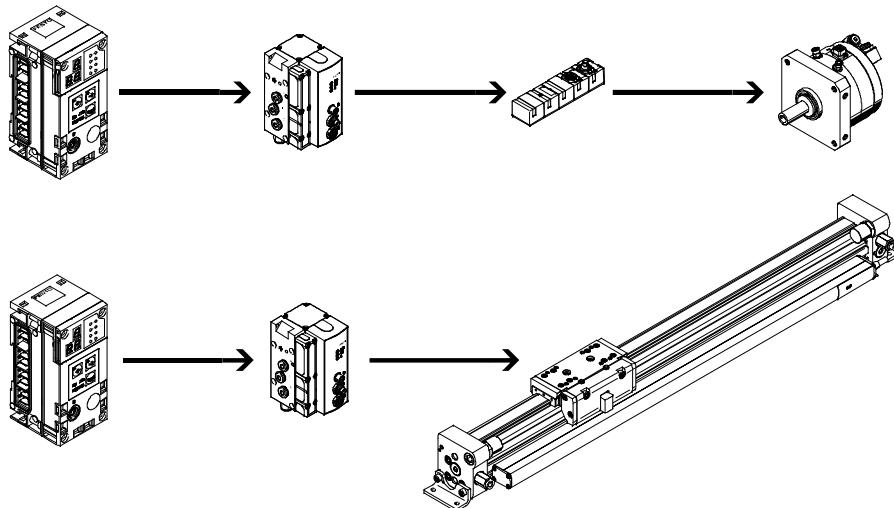
Terminal CPX

FESTO

Key features

Connection of inputs and outputs to the CPX terminal

Pneumatic drives with CPX-CMAX/CMPX



CPX-CMAX

- Position and force control, directly actuated or selected from one of 64 configurable positioning profiles.
- Configurable record continuation enables simple functional sequences to be realised.
- The auto-identification function identifies each station with its device data on the controller.
- Actuation of a brake or clamping unit via the proportional directional control valve VPWP.
- Up to 7 modules (max. 7 axes) can be operated in parallel and independently of each other.
- Commissioning via the Festo configuration software FCT or via fieldbus.

CPX-CMPX

- Fast travel between the mechanical end stops of the cylinder, stopping gently and without impact in the end position.
- Fast commissioning via control panel, fieldbus or handheld unit.
- Improved downtime control.
- Actuation of a brake or clamping unit via the proportional directional control valve VPWP.
- Max. 9 end-position controllers can be actuated depending on the fieldbus.
- All system data can be read and written via the fieldbus, including the mid positions, for example.

Ordering

The CPX terminal with valve terminal is fully assembled according to your order specifications and individually tested. The finished valve terminal consists of the electrical peripherals including the desired actuation and the selected components of the VTSA (ISO), VTSA-F, CPA, MPA-S, MPA-F, MPA-L or MIDI/MAXI modules.

The CPX terminal with valve terminal is ordered using two separate order codes. One order code defines the electrical peripherals type CPX, while the other specifies the pneumatic components of the valve terminal. The electrical peripherals type CPX can also be configured without a valve terminal and can be used on a fieldbus. For this order, only the order code for the electrical peripherals is required.

The order lists for the pneumatic components can be found on

- ➔ Internet: vtsa
(valve terminal VTSA)
- ➔ Internet: vtsa-f
(valve terminal VTSA-F)
- ➔ Internet: cpa10
(valve terminal CPA)
- ➔ Internet: mpa-s
(valve terminal MPA-S)
- ➔ Internet: mpa-f
(valve terminal MPA-F)
- ➔ Internet: mpa-l
(valve terminal MPA-L)
- ➔ Internet: visb
(valve terminal VIMP-/VIFB-03)

The order lists for the CP/CPI components can be found on

- ➔ Internet: ctec
(CPI installation system)

The order lists for the CTEU/CTEL components can be found on

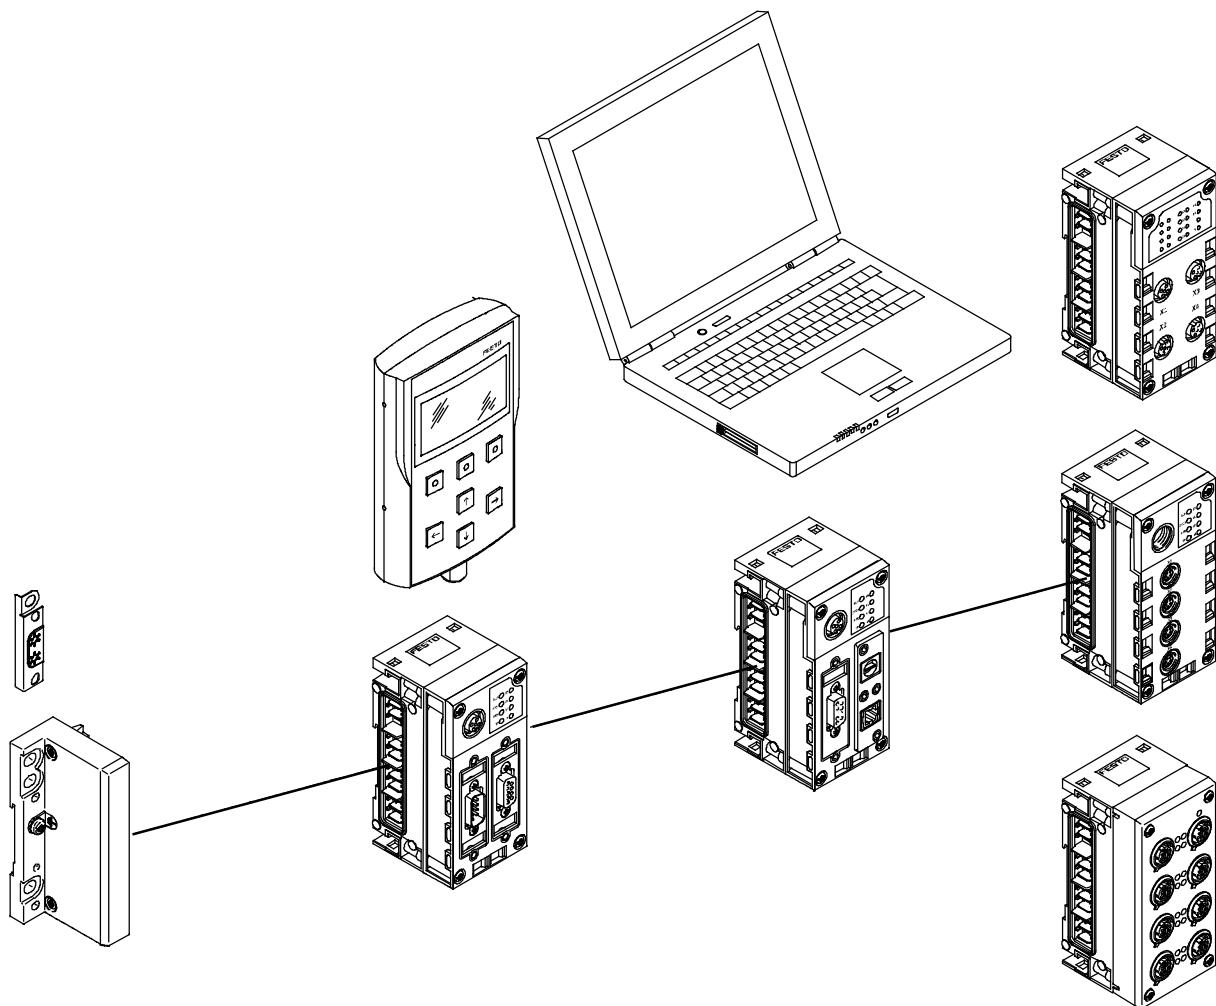
- ➔ Internet: cteu
(I-Port interface/IO-Link)

Terminal CPX

Peripherals overview

FESTO

Complete overview of modules



End plate

- Mounting holes for wall mounting
- Functional earth connection
- Special earthing plate for safe and easy connection to the machine bed or H-rail

Bus node

- Fieldbus/Industrial Ethernet connection using various types of connection technology
- Setting of fieldbus parameters via DIL switch
- Display of fieldbus and peripheral equipment status via LED
- PROFINET to AIDA standard in metal housing, fast start-up

Control block

- Preprocessing, stand-alone controller or remote unit CPX-FEC/CPX-CEC
- Connection via Ethernet TCP/IP or Sub-D programming interface
- Setting of operating modes via DIL switch and program selection via rotary switch
- CPX-CMX products for controlling axes

CP interface/CTEL interface

- Interfaces for decentralised installation systems, thus optimising the pneumatic control chains (short tubes/short cycle times)
- Actuator for I/O modules and valve terminals
- Power supply and bus interface via the same cable

Operator unit

- Connection to bus nodes or control block
- Display and modification of parameter settings
- Plain-text display for texts, messages (e.g. individual channel diagnostics, condition monitoring), menus, etc.

Web monitor

- Website integrated in the CPX terminal
- Dynamic status display
- Online diagnostics
- Text message/e-mail alert

Input/output modules

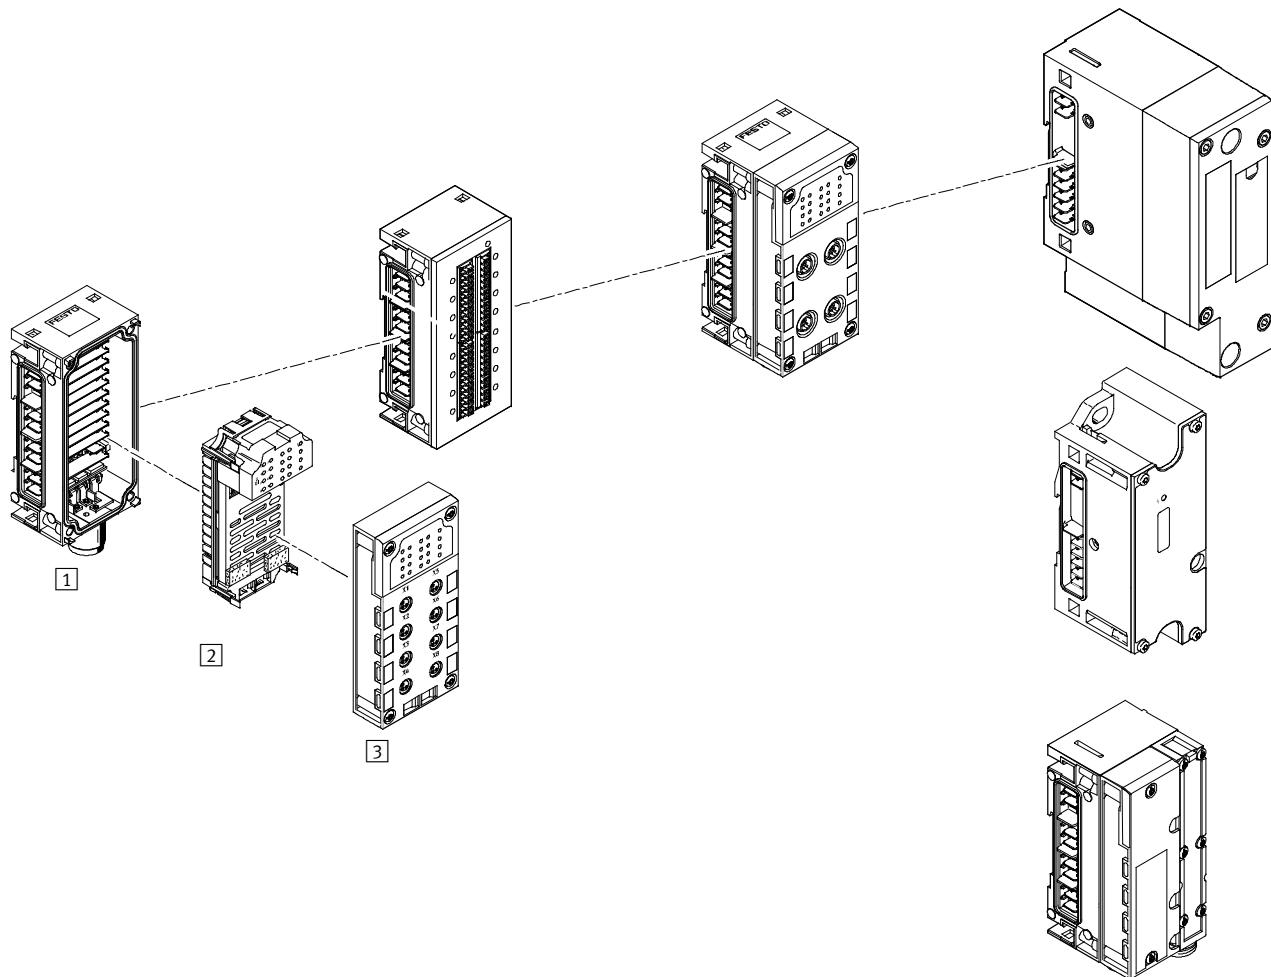
- Combination of
- Interlinking block
 - Electronics module
 - Connection block

Terminal CPX

FESTO

Peripherals overview

Complete overview of modules



Input/output modules

[1] Interlinking block

- Internal linking of the power supply and serial communication
- External power supply for the entire system
- Additional power supply for outputs or valves
- Connection accessories for M18, 7/8" or AIDA push-pull
- Plastic version: linking with tie rods
- Metal version: individual linking with M6 screws, individually expandable

[2] Electronics module

- Digital inputs for connecting the sensors
- Digital outputs for activating additional actuators
- Analogue inputs
- Temperature inputs (analogue)
- Analogue outputs
- PROFIsafe shut-off module with two digital outputs for shutting off the supply voltage for valves

[3] Connection block

- Choice of 8 connection technology variants
- Protection class IP65/IP67 or IP20
- Combinable with the electronics modules
- Connection accessories for M8/M12/Sub-D/quick connector
- M8/M12/Sub-D, etc. connecting cables
- Modular system for M8/M12 connecting cables
- M12 connection technology for the metal design

Pneumatic interface

- MPA-S
- MPA-F
- MPA-L
- VTSA/VTSA-F
- MIDI/MAXI
- CPA10/14


Terminal CPX

Peripherals overview

FESTO

Individual overview of modules

Bus node




Bus node for

- PROFIBUS DP
- INTERBUS
- DeviceNet
- CANopen
- CC-Link
- EtherNet/IP
(integrated web server)
- PROFINET
(integrated web server)
- EtherCAT

→ 63

Control block



CPX-FEC


- Programming with FST
- Ethernet interface
- Modbus/TCP
- EasyIP
- Integrated web server
- Sub-D programming interface

CPX-CEC

- Programming with CoDeSys
- Ethernet interface
- Modbus/TCP
- EasyIP
- CANopen master

→ 53

CP interface




→ 112

CP interface

- 4 CP strings
- Max. 4 modules per string
- 32I/32O per string
- CPI functionality

CTEL interface




→ 117

CPX-CTEL interface

- CTEL master
- Max. 4 devices with individual electronic fuse protection
- Max. 64 inputs/64 outputs per I-Port interface
- The maximum length of a string is 20 m

Modules for actuating electric drive units



CPX-CMXX


- Multi-axis interface
- Ethernet interface
- 2 axis groups
with max. 4 axes per group
- Max. 1,024 positioning records per axis group

CPX-CM-HPP

- Axis interface
- Max. 4 individual electric axes can be controlled via CAN bus

→ 122

Modules for actuating pneumatic drive units



CPX-CMAX

- Axis controller
- Position and force control
- 64 configurable positioning profiles
- Auto identification
- Actuation of a brake or clamping unit via the proportional directional control valve VPWP

CPX-CMPX

- End-position controller
- Fast movement between the mechanical end stops of the cylinder
- Gentle stop in the end position
- Improved downtime control
- Actuation of a brake via the proportional directional control valve VPWP

CPX-CMIX

- Measuring module
- CAN input (Festo specification) for measuring signal
- Sensing of the absolute position values or speed values of the connected drive

→ 129


Terminal CPX

FESTO

Peripherals overview

Individual overview of modules

Plastic connection block




- Direct machine mounting
(protection class IP65/IP67)
- M8-3POL
 - M8-4POL
 - M12-5POL
 - M12-5POL quick lock,
metal thread screened
 - M12-8POL
 - Sub-D
 - Quick connector
 - Spring-loaded terminal with cover

- Protected fitting space
(protection class IP20)
- Spring-loaded terminal


- Screening concept
- Optional screening plate
for connection blocks with M12
connection technology

Metal connection block




- Direct machine mounting
(protection class IP65/IP67)
- M12-5POL

Connection block with electronics module and interlinking block



- Fitting in the control cabinet
(protection class IP20)
- Plastic connection block
 - Spring-loaded terminal
 - Digital input module
with 16 inputs
 - Digital I/O module
with 8 inputs and 8 outputs

Digital electronics module for inputs/outputs




- Digital inputs
- 4 digital inputs
 - 8 digital inputs NPN
 - 8 digital inputs PNP
 - 8 digital inputs PNP with individual
channel diagnostics
 - 16 digital inputs
 - 16 digital inputs with individual
channel diagnostics

- Digital outputs
- 4 digital outputs (1 A per channel,
individual channel diagnostics)
 - 8 digital outputs (0.5 A per chan-
nel, individual channel diagnostics)
 - 8 digital outputs (2.1 A/50 W lamp
load per channel pair, individual
channel diagnostics)

→ 138

- Multi I/O modules
- 8 digital inputs
and 8 digital outputs

Analogue electronics module for inputs/outputs



- Analogue inputs
- 2 analogue inputs (0 ... 10 V DC,
0 ... 20 mA, 4 ... 20 mA)
 - 4 analogue inputs (1 ... 5 V,
0 ... 10 V, -5 ... +5 V, -10 ... +10 V,
0 ... 20 mA, 4 ... 20 mA,
-20 ... +20 mA)


- Analogue temperature inputs
- 4 analogue inputs for temperature
measurement (Pt100, Pt200,
Pt500, Pt1000, Ni100, Ni120,
Ni500, Ni1000)
 - 4 analogue inputs for temperature
measurement (thermocoupler and
PT1000 sensor for cold junction
compensation)

→ 161

- Analogue outputs
- 2 analogue outputs (0 ... 10 V DC,
0 ... 20 mA, 4 ... 20 mA)

PROFIsafe shut-off module


→ 180



- Digital outputs
- 2 digital outputs
 - Supply voltage for valves can be
shut off

Analogue electronics module for pressure inputs

→ 166



- Analogue inputs
- 4 analogue pressure inputs
(0 ... 10 bar, -1 ... +1 bar)

Terminal CPX


Peripherals overview

FESTO

Individual overview of modules

Plastic interlinking block – Linking by means of tie rods

→ 185



System linking

- Different voltage values for supplying the modules
- Serial communication between the modules

System supply

- M18, 4-pin
- 7/8", 4 or 5-pin

In addition to system linking, power supply for the

- electronics plus sensors (16 A)
- valves plus actuators (16 A)

Additional power supply

In addition to system linking, power supply for the

- actuators (16 A per supply)

Power supply for the


- valves (16 A per supply)

Expandability

- Can be expanded by an interlinking block with tie rod CPX-ZA-1-E

Metal interlinking block – Individual linking

→ 185



System linking

- Different voltage values for supplying the modules
- Serial communication between the modules

System supply

- 7/8", 4 or 5-pin
- AIDA push-pull

In addition to system linking, power supply for the

- electronics plus sensors (16 A)
- valves plus actuators (16 A)

Additional power supply

In addition to system linking, power supply for the

- actuators (16 A per supply)

Power supply for the

- valves (16 A per supply)

Expandability

- Can be expanded as required by up to 10 interlinking blocks

- - Note

Plastic interlinking blocks (tie rods) and metal interlinking blocks (individual linking) cannot be combined due to their different linking systems.

- - Note

The 7/8" supply is subject to the following restriction due to the available accessories:

- 5-pin 8 A
- 4-pin 10 A

- - Note

Adapted interlinking blocks (CPX-...-VL) are required for use in ATEX environments as per certification (→ 40). The maximum supply with these modules is restricted to 8 A.

Terminal CPX


Peripherals overview

FESTO

Individual overview of modules

Pneumatic interface MPA


→ 199



- Valve terminal
- MPA1 (360 l/min)
 - MPA2 (700 l/min)
 - Up to 128 solenoid coils
 - Up to 16 modules can be configured
 - For CPX plastic design
 - For CPX metal design

Pneumatic interface MPA-L


→ 201



- Valve terminal
- MPA1 (360 l/min)
 - MPA14 (670 l/min)
 - MPA2 (870 l/min)
 - Up to 32 solenoid coils
 - For CPX plastic design

Pneumatic interface MPA-F

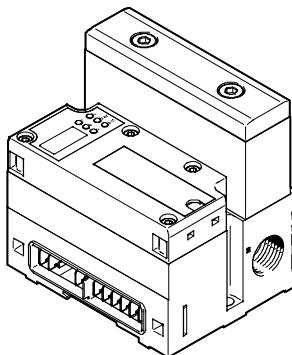
→ 202



- Valve terminal
- MPAF1 (360 l/min)
 - MPAF2 (900 l/min)
 - Up to 128 solenoid coils
 - Up to 16 modules can be configured
 - With integrated pressure sensor for channel 1
 - For CPX plastic design
 - For CPX metal design

Pneumatic interface VTSA/VTSA-F


→ 204



- Valve terminal
- 18 mm (700 l/min)
 - 26 mm (1,350 l/min)
 - 42 mm (1,300 l/min)
 - 52 mm (2,900 l/min)
 - 65 mm (4,000 l/min)
 - Max. 32 valve positions/max. 32 solenoid coils
 - For CPX plastic design
 - For CPX metal design

Pneumatic interface MIDI/MAXI


→ 205



- Valve terminal
- MIDI valves (500 l/min) and/or MAXI valves (1,250 l/min)
 - Up to 26 solenoid coils
 - Setting of the number of valves via DIL switch
 - For CPX plastic design
 - For CPX metal design

Pneumatic interface CPA

→ 207




- Valve terminal
- CPA10 (300 l/min)
 - CPA14 (600 l/min)
 - Up to 22 solenoid coils
 - Setting of the number of valves via DIL switch
 - For CPX plastic design


End plate for plastic/metal design

End plate

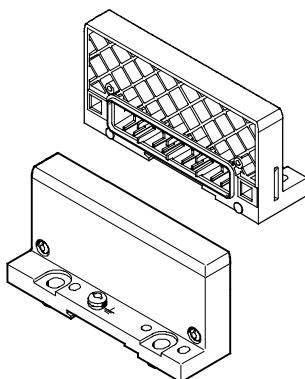- Left-hand
- Right-hand (for use without valves)



Earthing plate (for end plate for plastic design)



Earthing plate

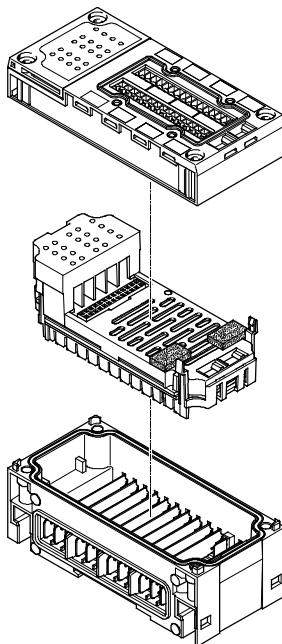
- For safe and easy connection to the machine bed or H-rail, suitable for right-hand and left-hand end plate
- Assembly and earthing in a single processing step, which means:
 - 50% time saving
 - no additional material required

Terminal CPX

Peripherals overview

FESTO

General basic data and guidelines



Max. 11 modules in total:

- One bus node and/or one control block, freely positionable
- Up to 9 additional input/output modules, freely positionable
- In addition a pneumatic interface, always positioned as the last module on the right-hand side
 - For VTSA, VTSA-F, MPA-F, CPA and MIDI/MAXI: fixed operating range, set using DIL switch
 - For MPA-S: 16 MPA modules can be configured
 - For MPA-L: fixed operating range, set using rotary switch
- Address capacity max. 512 inputs and 512 outputs, depending on bus node or control block

- One interlinking block with system supply, freely positionable

- Multiple interlinking blocks with additional power supply, always positioned to the right of the interlinking block with system supply
- The connection blocks can, with just a few exceptions, be freely combined with the electronics modules for inputs/outputs, either in metal or plastic (→ table below)
- All electronics modules for inputs/outputs can be combined with any interlinking block

- Plastic interlinking blocks (tie rods) and metal interlinking blocks (individual linking) cannot be combined due to their different linking systems

Combinations of connection blocks and digital input modules

	Digital electronics modules						
	CPX-4DE	CPX-8DE	CPX-16DE	CPX-L-16DE	CPX-M-16DE-D	CPX-8DE-D	CPX-8NDE
Connection blocks, plastic design							
CPX-AB-8-M8-3POL	■	■	–	–	–	■	■
CPX-AB-8-M8X2-4POL	–	–	■	–	–	–	–
CPX-AB-4-M12x2-5POL	■	■	–	–	–	■	■
CPX-AB-4-M12x2-5POL-R	■	■	–	–	–	■	■
CPX-AB-4-M12-8POL	–	–	–	–	–	–	–
CPX-AB-8-KL-4POL	■	■	■	–	–	■	■
CPX-AB-1-SUB-BU-25POL	■	■	■	–	–	■	■
CPX-AB-4-HAR-4POL	■	■	–	–	–	■	■
Connection blocks, metal design							
CPX-M-AB-4-M12X2-5POL	■	■	–	–	–	■	■
CPX-M-AB-8-M12X2-5POL	–	–	–	–	■	–	–

Terminal CPX

FESTO

Peripherals overview

Combinations of connection blocks and digital output modules/multi I/O modules

	Digital electronics modules						
	CPX-4DA	CPX-8DA	CPX-8DA-H	CPX-8DE-8DA	CPX-L-8DE-8DA	CPX-FVDA-P	CPX-FVDA-P2
Connection blocks, plastic design							
CPX-AB-8-M8-3POL	■	■	-	-	-	-	-
CPX-AB-8-M8X2-4POL	■	■	■	-	-	-	-
CPX-AB-4-M12x2-5POL	■	■	-	-	-	-	-
CPX-AB-4-M12x2-5POL-R	■	■	■	-	-	-	-
CPX-AB-4-M12-8POL	-	-	-	■	-	-	-
CPX-AB-8-KL-4POL	■	■	■	■	-	-	■
CPX-AB-1-SUB-BU-25POL	■	■	■	■	-	-	-
CPX-AB-4-HAR-4POL	■	■	-	-	-	-	-
Connection blocks, metal design							
CPX-M-AB-4-M12X2-5POL	■	■	■	-	-	■	■
CPX-M-AB-8-M12X2-5POL	-	-	-	-	-	-	-

Combinations of connection blocks and analogue electronics modules for inputs/outputs

	Analogue electronics modules						
	CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I	CPX-2AA-U-I	CPX-4AE-P	CPX-4AE-T	CPX-4AE-TC
Connection blocks, plastic design							
CPX-AB-8-M8-3POL	-	-	-	-	-	-	-
CPX-AB-8-M8X2-4POL	-	-	-	-	-	-	-
CPX-AB-4-M12x2-5POL	■	■	■	■	-	■	■
CPX-AB-4-M12x2-5POL-R	■	■	■	■	-	■	■
CPX-AB-4-M12-8POL	-	-	-	-	-	-	-
CPX-AB-8-KL-4POL	■	■	■	■	-	■	■
CPX-AB-1-SUB-BU-25POL	■	■	■	■	-	-	-
CPX-AB-4-HAR-4POL	-	-	-	-	-	■	-
Connection blocks, metal design							
CPX-M-AB-4-M12X2-5POL	■	■	■	■	-	■	■
CPX-M-AB-8-M12X2-5POL	-	-	-	-	-	-	-

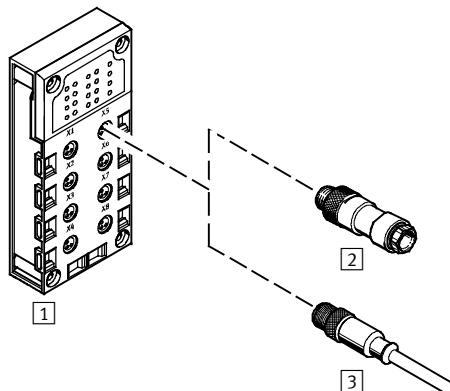
Terminal CPX

Key features – Electrical components

FESTO

Electrical connection – Connection block

CPX-AB-8-M8-3POL with M8-3POL connection



- Compact for pre-assembled individual connection
- 8 sockets
- 3-pin design for connection of 1 channel per socket

- - Note

Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on request:

- Tailored to the application
- Perfect fit
- Saves installation

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
[1] CPX-AB-8-M8-3POL	Socket, M8, 3-pin	[2] SEA-GS-M8 [2] SEA-3GS-M8-S [3] KM8-M8-GSGD-... (pre-assembled connecting cable) [3] NEBU-...-M8G3 (modular system for choice of connecting cables)	Solder lugs Screw terminals Socket, M8, 3-pin Socket, M5, 3-pin Socket, M8, 3-pin Socket, M8, 4-pin Socket, M12, 5-pin Open cable end

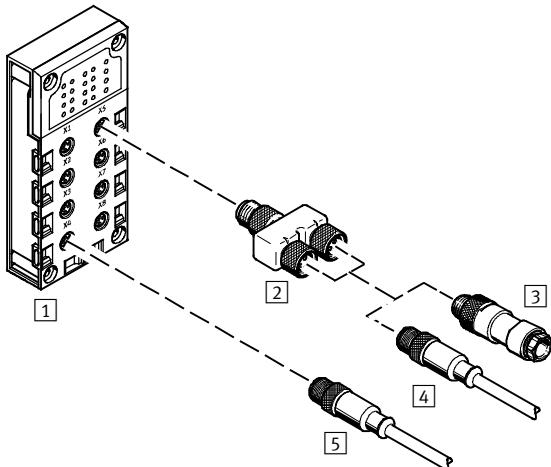
Terminal CPX

FESTO

Key features – Electrical components

Electrical connection – Connection block

CPX-AB-8-M8X2-4POL with M8-4POL connection



- Compact for pre-assembled individual connection
- 8 sockets
- 4-pin design for connection of 2 channels per socket

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/ connecting cable	Selectable connection technology	Plug connector/ connecting cable	Selectable connection technology
[1] CPX-AB-8-M8X2-4POL	Socket, M8, 4-pin	[4] NEBU-...-M8G4 (modular system for choice of connecting cables)	Socket, M5, 3-pin Socket, M8, 3-pin Socket, M8, 4-pin Socket, M12, 5-pin Open cable end	- - - - -	- - - - -
		[2] NEDU-M8D3-M8T4 (T-adapter)	1x plug M8, 4-pin to 2x socket M8, 3-pin	[3] SEA-GS-M8 [3] SEA-3GS-M8-S [4] KM8-M8-GSGD-... (pre-assembled connecting cable)	Solder lugs Screw terminals Socket, M8, 3-pin
				[4] NEBU-...-M8G3 (modular system for choice of connecting cables)	Socket, M5, 3-pin Socket, M8, 3-pin Socket, M8, 4-pin Socket, M12, 5-pin Open cable end

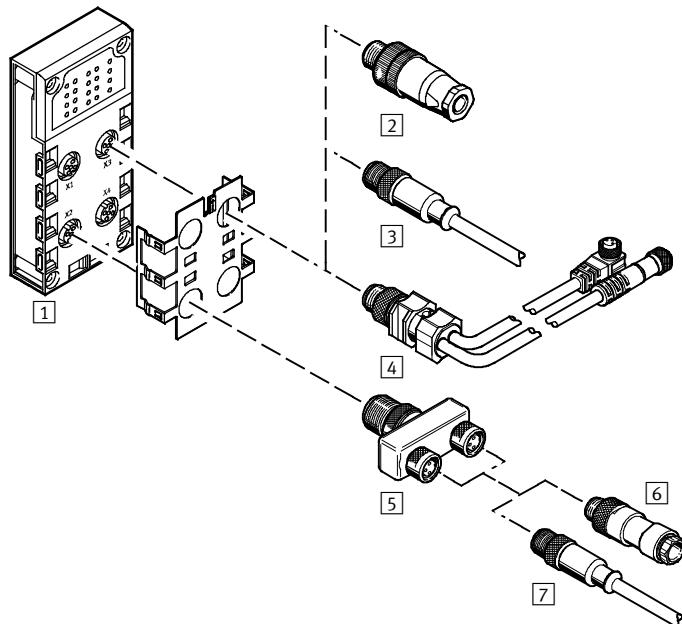
Terminal CPX

Key features – Electrical components

FESTO

Electrical connection – Connection block

CPX-AB-4-M12x2-5POL and CPX-AB-4-M12x2-5PPOL-R with M12-5POL connection



- Pre-assembled and sturdy with 2 channels per socket
- 4 sockets
- 5-pin design per socket
- Version ...-R with quick lock technology and metal thread for screening
- With two channels per socket, the corresponding input signals can be easily connected via a T-adapter and conventional cable with M8 connection

Terminal CPX

FESTO

Key features – Electrical components

Combination of connection block and electrical connection technology					
Connection block	Connection technology	Plug connector/ connecting cable	Connection technology	Plug connector/ connecting cable	Connection technology
[1] CPX-AB-4-M12x2-5POL CPX-AB-4-M12x2-5POL-R	Socket, M12, 5-pin	[2] SEA-GS-7 [2] SEA-4GS-7-2,5 [2] SEA-GS-9 [2] SEA-M12-5GS-PG7 [2] SEA-GS-11-DUO [2] SEA-5GS-11-DUO [3] KM12-M12-... (pre-assembled connecting cable) [3] NEBU-...-M12G4 [3] NEBU-...-M12G5	Screw terminals Screw terminals Screw terminals Screw terminals Screw terminals, for two cables Screw terminals, for two cables Socket, M12, 4-pin Socket, M5, 4-pin Socket, M8, 4-pin Socket, M12, 5-pin Open cable end	- - - - - - - -	- - - - - - - -
	[4] KM12-DUO-M8-... (pre-assembled connecting cable)	Plug M12, 4-pin to 2x socket M8, 3-pin		[6] SEA-GS-M8 [6] SEA-3GS-M8-S [7] KM8-M8-GSGD-... (pre-assembled connecting cable)	Solder lugs Screw terminals Socket, M8, 3-pin
	[5] NEDU-M8D3-M12T4 (T-adapter)			[7] NEBU-...-M8G3 (modular system for choice of connecting cables)	Socket, M5, 3-pin Socket, M8, 3-pin Socket, M8, 4-pin Socket, M12, 5-pin Open cable end
	[5] NEDU-M12D5-M12T4 (T-adapter)	Plug M12, 4-pin to 2x socket M12, 5-pin		[6] SEA-GS-7 [6] SEA-4GS-7-2,5 [6] SEA-GS-9 [6] SEA-M12-5GS-PG7 [6] SEA-GS-11-DUO [6] SEA-5GS-11-DUO [7] KM12-M12-... (pre-assembled connecting cable)	Screw terminals Screw terminals Screw terminals Screw terminals Screw terminals, for two cables Screw terminals, for two cables Socket, M12, 4-pin
				[7] NEBU-...-M12G4 (modular system for choice of connecting cables)	Socket, M5, 4-pin
				[7] NEBU-...-M12G5 (modular system for choice of connecting cables)	Socket, M8, 4-pin Socket, M12, 5-pin Open cable end

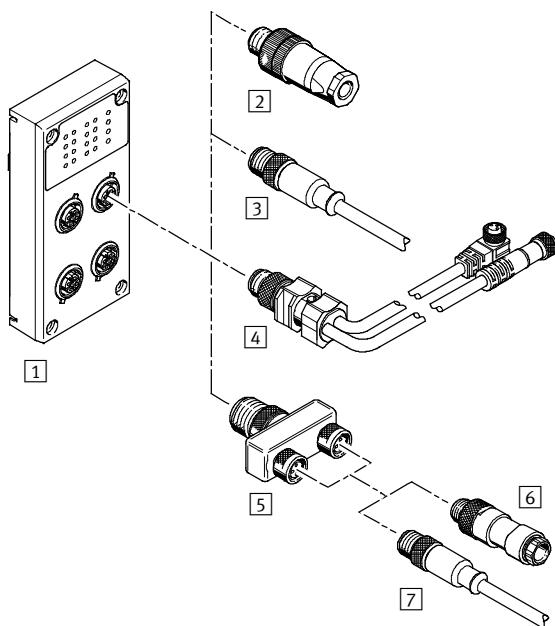
Terminal CPX

Key features – Electrical components

FESTO


Electrical connection – Connection block (metal design)

CPX-M-AB-4-M12x2-5POL with M12-5POL connection



- Pre-assembled and sturdy with 2 channels per socket
- 4 sockets
- 5-pin design per socket
- With two channels per socket, the corresponding input signals can be easily connected via a T-adapter and conventional cable with M8 connection

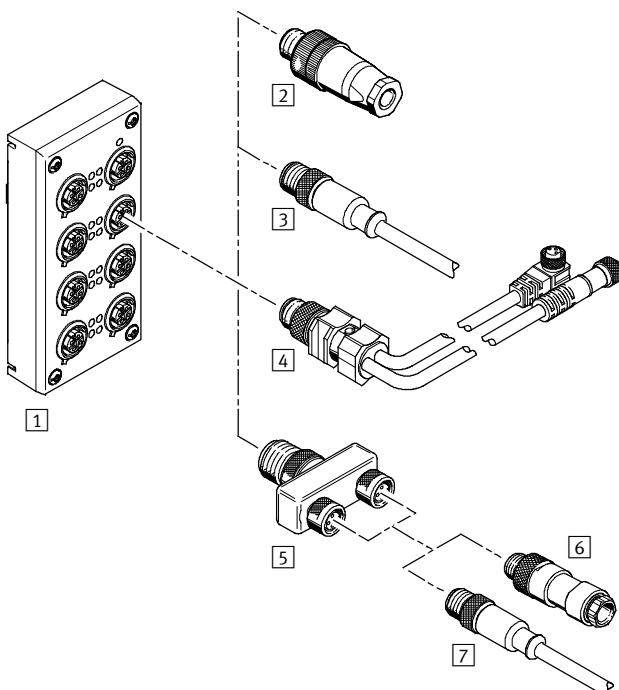CPX-M-AB-8-M12x2-5POL with M12-5POL connection



- Pre-assembled and sturdy with 2 channels per socket
- 8 sockets
- 5-pin design per socket
- With two channels per socket, the corresponding input signals can be easily connected via a T-adapter and conventional cable with M8 connection

Terminal CPX

FESTO

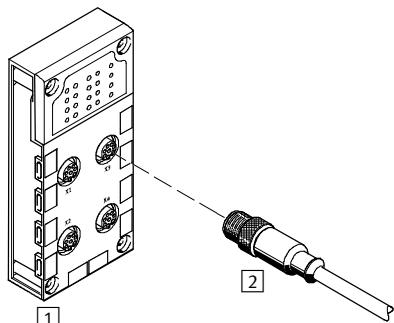
Key features – Electrical components

Terminal CPX

Key features – Electrical components

Electrical connection – Connection block

CPX-AB-4-M12-8POL with M12-8POL connection




- Connection to cylinder-valve combinations with max. 3 inputs and 2 outputs
- 4 sockets
- 8-pin design per socket

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
[1] CPX-AB-4-M12-8POL	Socket, M12, 8-pin	[2] KM12-8GD8GS-2-PU (pre-assembled connecting cable)	Socket, M12, 8-pin

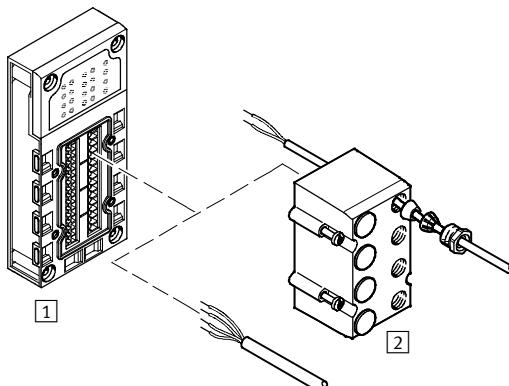CPX-AB-8-KL-4POL with spring-loaded terminal connection



- Fast connection technology for use in control cabinets
- 32 spring-loaded terminals
- 4 spring-loaded terminals per channel
- Wire cross sections 0.05 ... 1.5 mm²
- Optional cover with fittings for IP65/67 connection
 - 8 through-holes M9
 - 1 through-hole M16
 - Blanking plug
 - For I/O distributors, consoles or individual sensors/actuators

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
[1] CPX-AB-8-KL-4POL	Spring-loaded terminals, 32-pin	[2] AK-8KL (cover)	–

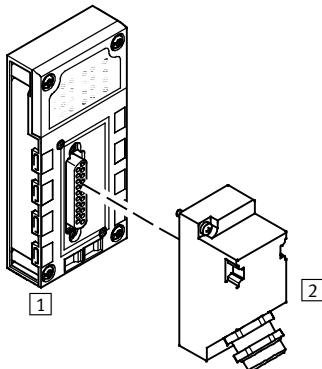
Terminal CPX

FESTO

Key features – Electrical components

Electrical connection – Connection block

CPX-AB-1-SUB-BU-25POL with Sub-D connection




- Multi-pin plug connection for I/O distributor or console
- One socket
- 25-pin design

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
[1] CPX-AB-1-SUB-BU-25POL	Socket, Sub-D, 25-pin	[2] SD-SUB-D-ST25	Crimp contacts

CPX-AB-4-HAR-4POL with quick connector



- Sturdy quick connection technology for individual connections
- 4 sockets
- 4-pin design per socket

Combination of connection block and electrical connection technology

Connection block	Connection technology	Plug connector/connecting cable	Selectable connection technology
[1] CPX-AB-4-HAR-4POL	Socket, quick connection, 4-pin	[2] SEA-GS-HAR-4POL	Insulation displacement connectors

Terminal CPX

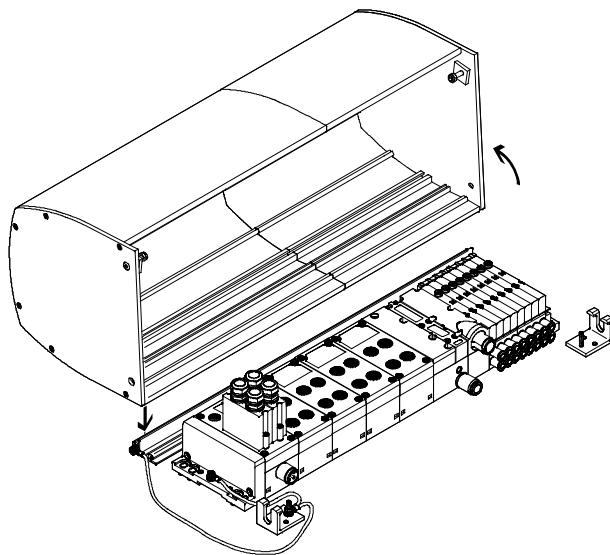
Key features – Assembly

FESTO

Hood

Description

→ 220



The CPX hood CAFC is a space and cost-saving alternative to a control cabinet. It is designed as an extruded aluminium profile and is installed on a mounting plate. The valve terminal (CPX with MPA-S or MPA-L) is well protected and is quick to install without the need for complex control cabinet installation for cables and tubing.

The rail and the two mounting brackets are mounted on a back plate. The hood is attached to the retaining rail and secured with two screws. There is also a stand-by position (locking of the hood in the open position). The hood is locked using two side screws (which meet the requirements for a special lock in compliance with ATEX). The CPX hood can be ordered online using the valve terminal configurator.

Advantages of the CPX hood

- Impact protection (min. 7 J) for the underlying modules in combination with a suitable mounting plate provided by the user
- Protection against electrostatic discharge through the use of electrically conductive materials and the option of connecting an earth wire
- Protection against accidental interference with live plug connectors (by securing the hood with at least one special lock to EN 600079-0, 9.2 and 20)
- UV protection for the underlying CPX and MPA modules

Points to note when using the CPX hood

- Only in combination with valve terminal type MPA-S and MPA-L
- No bus nodes with push-pull connection (CPX-M-FB34, CPX-M-FB35)
- CPX power supply via angled plugs, no T-plugs, no push-pull
- Electrical supply plate/additional power supply only possible with angled plug
- No MPA vertical stacking
- Use of larger QS fittings (for tubing O.D. larger than 12 mm) only possible with the angled design
- Ducted exhaust air only with elbow connector
- The permissible ambient temperature of the valve terminal is reduced by 5 °C

- Note

The CPX hood has no influence on the ATEX classification of the valve terminal or of the CPX terminal.

The CPX hood has no influence on the IP protection class of the valve terminal or of the CPX terminal.

The CPX hood does not protect against the effects of the weather in installations that are not in closed spaces.

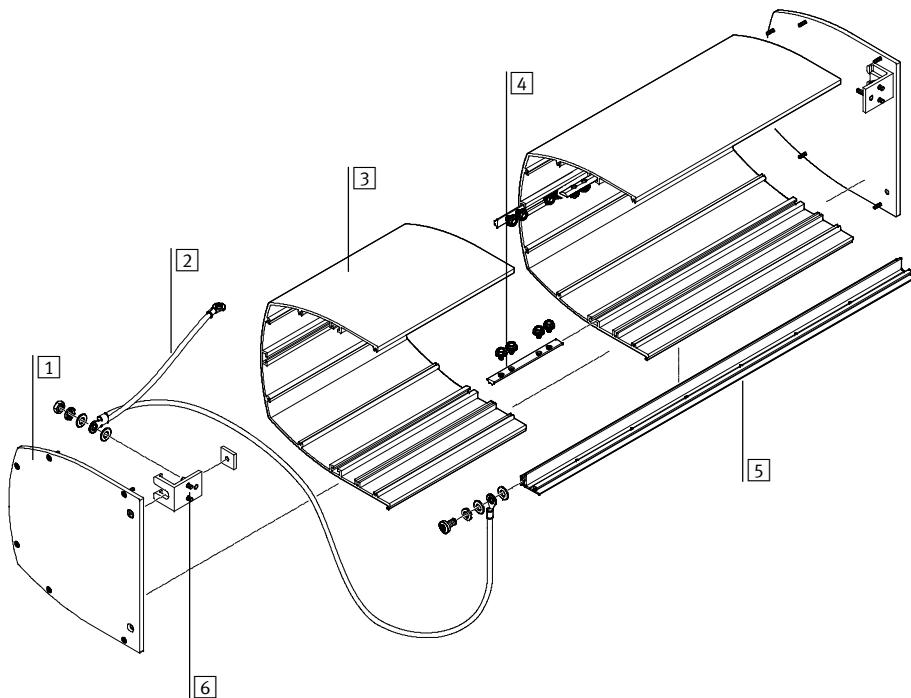
Terminal CPX

FESTO

Key features – Assembly

Hood

Assembly



Procedure:

- Assemble the rail and mounting bracket from the mounting kit
- Attach the earth cable
- Assemble the hood (if applicable, screw together several hood sections before attaching the side pieces)
- Attach and secure the hood

- [1] Side piece
- [2] Earth cable
- [3] Hood section
- [4] Slot nut with screws, for joining the hood sections
- [5] Rail
- [6] Mounting bracket

Technical data

Weight:

- Hood: approx. 500 g per 100 mm of length
- Mounting rail: approx. 550 g per 1000 mm of length
- Side pieces: approx. 500 g per side

Ambient temperature

-5 ... +50 °C

RoHS-compliant

Terminal CPX

Key features – Types of mounting


FESTO

Mounting options

Valve terminals with CPX terminal support different mounting options for direct machine mounting with high

protection and control cabinet installation.

H-rail mounting



The H-rail mounting is formed in the reverse profile of the CPX interlinking blocks. The CPX terminal can be attached to the H-rail using the H-rail mounting kit. The CPX terminal is mounted on the H-rail (see arrow A) and

then swivelled onto the H-rail and secured in place with the clamping component (see arrow B). The optional earthing plate enables a connection to be established to the machine potential/earth in one easy step.

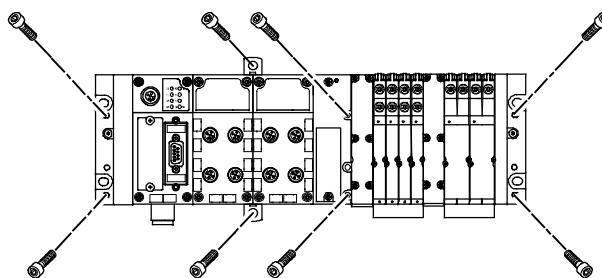
For H-rail mounting you will need the following mounting kit:

- CPX-CPA-BG-NRH

This facilitates mounting of the CPX on H-rails to EN 60715.


An additional mounting kit is required for combination with valve terminals.

Wall mounting, plastic design



The end plates of the CPX terminal, the valve terminal and the pneumatic interface include mounting holes for wall mounting. Additional mountings for the CPX terminal are available for longer valve terminals. These mountings differ depending on the design of the CPX terminal (plastic or metal).

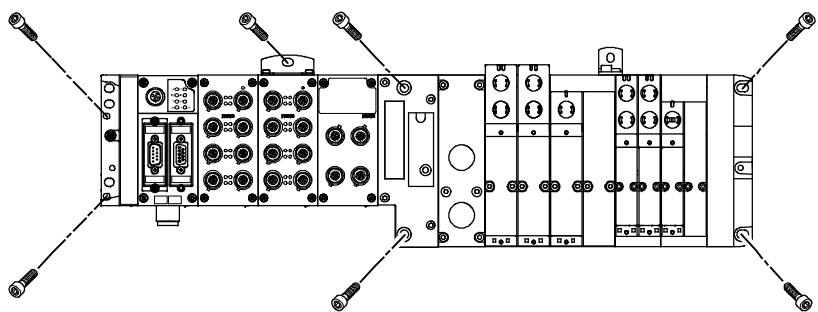Wall mounting, metal design




Terminal CPX

FESTO

Key features – Types of mounting

Plastic CPX terminal

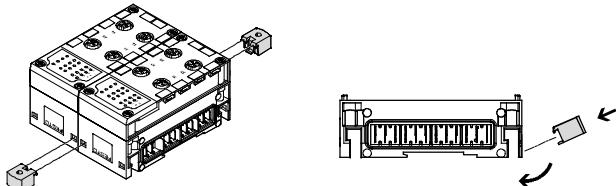Additional mountings




Additional mountings for the CPX terminal that can be fitted between two modules are available for longer valve terminals.



Note
For CPX terminals with 4 or more interlinking blocks: you will require additional mountings of the type CPX-BG-RW... every 100 or 150 mm. These are pre-assembled when supplied.

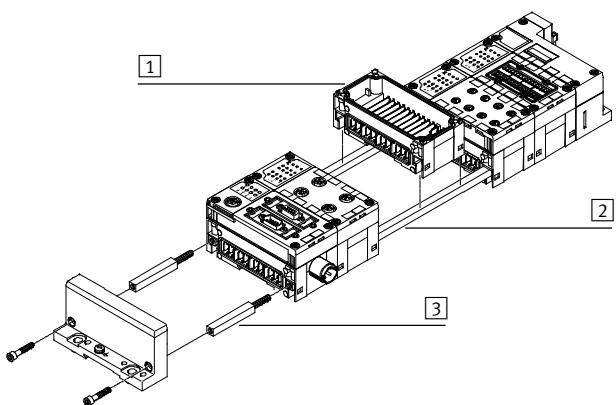Linking with tie rods




The mechanical connection between the CPX modules is created using special tie rods [2]. Two screws in the end plates are all that are needed to assemble the entire unit. The tie rod ensures that the unit resists high mechanical loads and is therefore the “mechanical backbone” of the CPX terminal.

The open design enables the interlinking blocks [1] to be replaced in the assembled state. The tie rod expansion kit [3] enables an extra module to be added to the CPX terminal.

Metal CPX terminal

Additional mountings




Additional mounting brackets for the CPX terminal that can be screwed onto the interlinking blocks are available for longer valve terminals.



Note
For CPX terminals with 4 or more interlinking blocks: you will require additional mounting brackets of the type CPX-M-BG-RW... every 100 or 150 mm. These are pre-assembled when supplied.

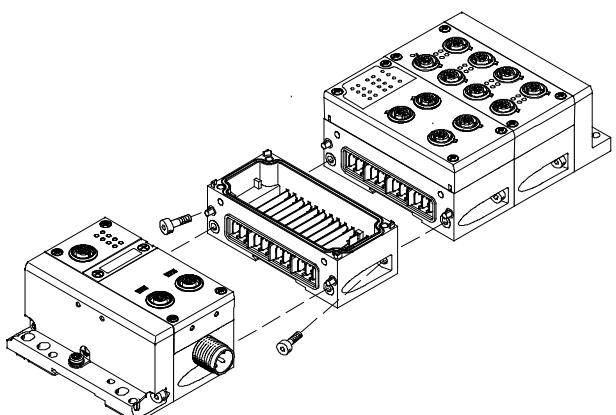Linking with screws



The mechanical connection between the CPX modules is created using special angle fittings. The CPX terminal can thus be expanded at any time.

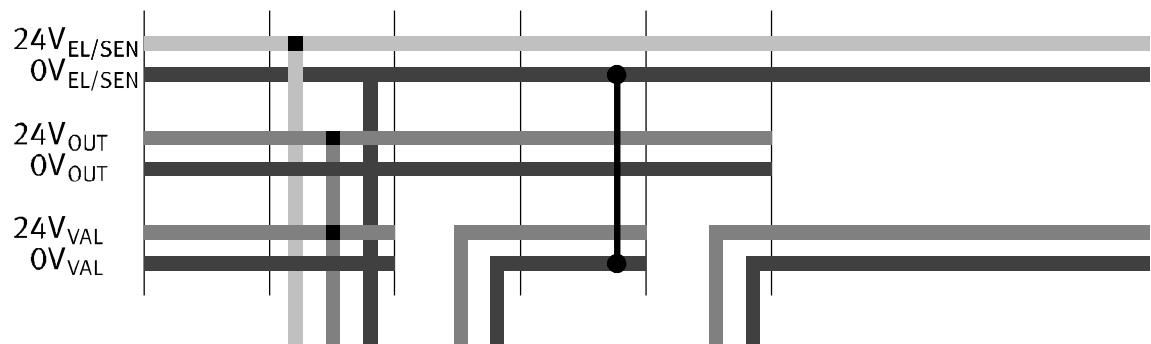
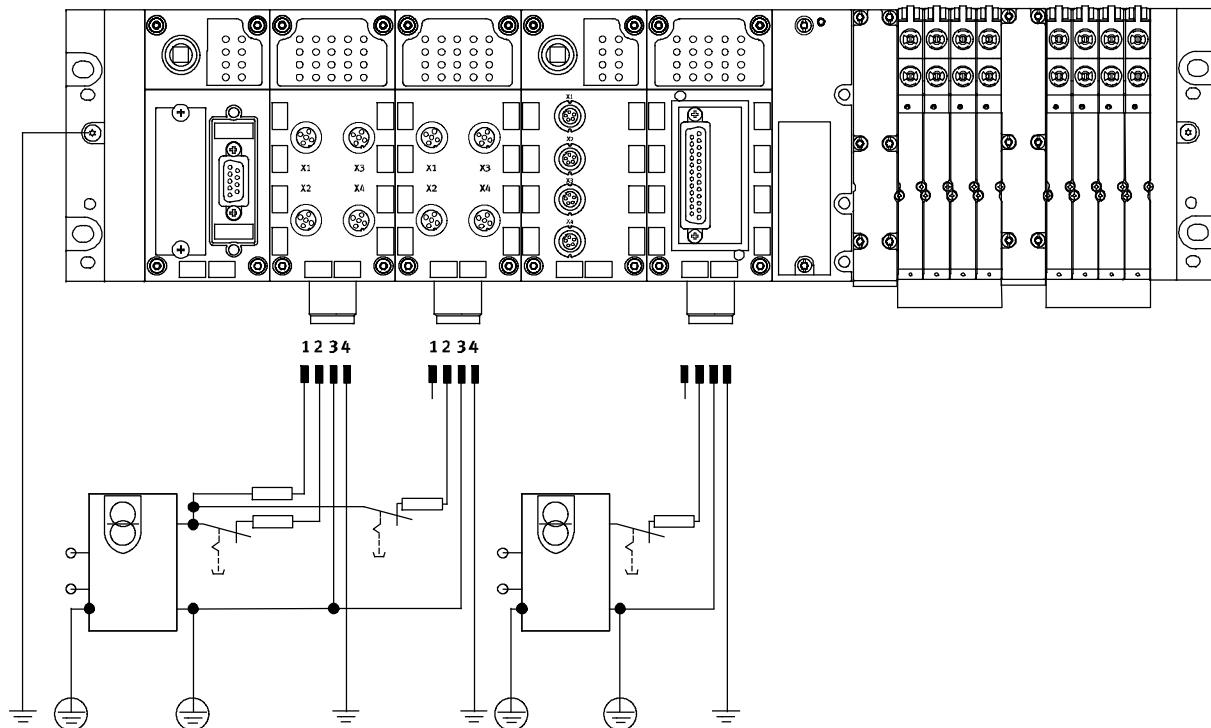
Terminal CPX

Key features – Power supply

FESTO

Power supply concept

General information



The use of decentralised devices on the fieldbus – particularly with high protection for direct machine mounting – demands a flexible power supply concept. A valve terminal with CPX can, in principle, supply all voltages via a single socket.

A distinction is made between supplying the

- electronics plus sensors
- valves plus actuators.

The following connecting threads can be selected:

- M18
- 7/8"
- AIDA push-pull

Interlinking blocks

Interlinking blocks represent the backbone of the CPX terminal with all supply lines. They provide the power supply for the modules used on them

as well as their bus connections. Many applications require the CPX terminal to be segmented into voltage zones. This applies in particular to the

separate disconnection of solenoid coils and outputs. The interlinking blocks provide either a space-saving central power supply

for the entire CPX terminal or galvanically isolated, all-pin disconnectable potential groups/voltage segments.


Terminal CPX

FESTO

Key features – Power supply

Interlinking blocks

With system supply



Type for plastic design

- CPX-GE-EV-S
- CPX-GE-EV-S-7/8-5POL
- CPX-GE-EV-S-7/8-4POL

Connection technology

- M18
- 7/8", 5-pin
- 7/8", 4-pin

Power supply

- For CPX terminal modules and connected sensors
- For valves that are connected to the CPX terminal via a pneumatic interface
- For actuators that are connected to output modules of the CPX terminal


Type for metal design

- CPX-M-GE-EV-S-7/8-5POL
- CPX-M-GE-EV-S-PP-5POL

Connection technology

- 7/8", 5-pin
- AIDA push-pull, 5-pin

Without power supply



Type for plastic design

- CPX-GE-EV

-


-

Type for metal design

- CPX-M-GE-EV-FVO

-

With additional power supply for outputs



Type for plastic design

- CPX-GE-EV-Z
- CPX-GE-EV-Z-7/8-5POL
- CPX-GE-EV-Z-7/8-4POL

Connection technology

- M18
- 7/8", 5-pin
- 7/8", 4-pin

Power supply

- For actuators that are connected to output modules of the CPX terminal


Type for metal design

- CPX-M-GE-EV-Z-7/8-5POL
- CPX-M-GE-EV-Z-PP-5POL

Connection technology

- 7/8", 5-pin
- AIDA push-pull, 5-pin

With additional power supply for valves



Type for plastic design

- CPX-GE-EV-V
- CPX-GE-EV-V-7/8-4POL

Connection technology

- M18
- 7/8", 4-pin

Power supply

- For valves that are connected to the CPX terminal via a pneumatic interface

- - Note

For 7/8":

- Commercially available accessories are often limited to max. 8 A

- - Note

The valve terminal MPA-S has either a 5-pin 7/8", 4-pin 7/8", 3-pin M18 or 5-pin AIDA push-pull power supply for one or more valve voltage zones. Galvanically isolated, all pins disconnectable with voltage monitoring in the following MPA module.

- - Note

Adapted versions of the interlinking blocks with 5-pin M18 and 7/8" connection (CPX-GE-EV-...-VL and CPX-M-GE-EV-...-VL) are available for use in ATEX environments as per certification (→ 40). The maximum current supply with these interlinking blocks is 8 A.

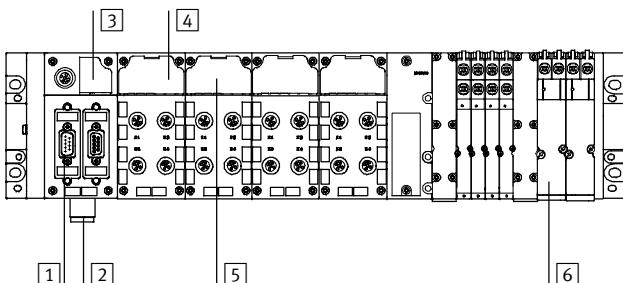
Terminal CPX

Key features – Diagnostics

FESTO

Diagnostics

System performance



Detailed diagnostic functions are needed in order to quickly locate the causes of errors in the electrical installation and therefore reduce downtimes in production plants. A basic distinction is made between on-the-spot diagnostics using LEDs or operator unit and diagnostics using a bus interface.


The CPX terminal supports on-the-spot diagnostics via a row of LEDs. This is separate from the connection area and therefore provides good visual access to status and diagnostic information.

- [1] Diagnostics via bus interface
- [2] Undervoltage monitoring
- [3] Diagnostic overview LED
 - Fieldbus status
 - CPX status
- [4] Status and diagnostic LED for module and I/O channels

- [5] Module and channel-specific diagnostics
- [6] Valve-specific diagnostic module and solenoid coils

The diagnostic messages can be read out via the bus interface in the higher-order controller and visualised for the central recording and evaluation of error causes. This is done using the individual fieldbus-specific channels. The CPX-FEC and CPX-CEC also offer the option of access via the integrated Ethernet interface (remote maintenance via PC/web applications).


Overview LED on the bus node



- [1] Fieldbus-specific LEDs
On each bus node, a maximum of 4 fieldbus-specific LEDs display the fieldbus communication status of the CPX terminal with the higher-order controller.
- [2] CPX-specific LEDs

- [2] CPX-specific LEDs
A further 4 CPX-specific LEDs provide non-fieldbus-specific information about the status of the CPX terminal, for example
 - Power system
 - Power load
 - System fault
 - Modification parameters

Input/output module status and diagnostic LEDs



- [1] Status LEDs for the inputs and outputs
Each input and output channel is assigned a status LED.
- [2] Channel-oriented diagnostic LEDs
Depending on the module design, another diagnostic LED is available for each I/O channel.
- [3] Group diagnostic LEDs
An LED displays the group diagnostics for each module.


Terminal CPX

FESTO

Key features – Parameterisation


Diagnostics

Display on the operator unit



- [1] LCD graphical display for on-site plain-text diagnostics
– Fault location and type
– Without programming

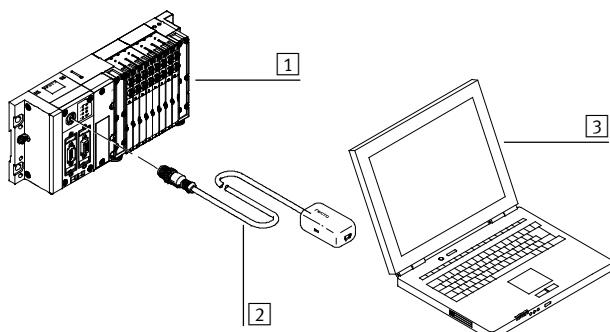Display on a PC



- [1] CPX terminal with valve terminal
[2] Adapter diagnostic interface to USB
[3] Laptop/portable device with USB interface and installed FMT software
– Fault location and type
– Without programming
– Storing the configuration
– Preparing screenshots

Parameterisation


Changes to the application are often required during commissioning. The parameterisable characteristics of the CPX modules mean that functions can be very easily changed by means of configuration software. This reduces

the number of modules needed and, consequently, the amount of storage space required.
It is therefore possible, for example, to reduce the input debounce time for an input module – normally 3 ms –

to 0.1 ms on a “fast” input module for faster processes, or to set the response of a valve following a fieldbus interrupt.
Depending on the modules used, parameterisation can be performed

via the following interfaces:

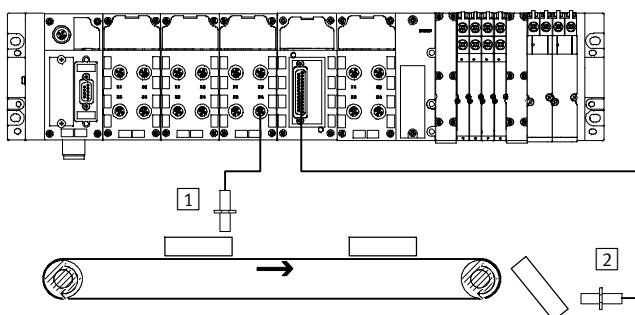- Ethernet
- Fieldbus
- Control block direct interface (programming interface)
- Operator unit CPX-MMI



- [1] Input debounce time 3 ms
[2] Input debounce time 0.1 ms

Terminal CPX

Key features – Addressing

FESTO

Addressing

The various CPX modules occupy a different number of I/O addresses within the CPX system. The maximum address space for bus nodes depends on the performance of the fieldbus systems.

Maximum system configuration:
 • 1 bus node or control block
 • 9 I/O modules
 • 1 pneumatic interface
 (e.g. pneumatic interface MPA-S with up to 16 MPA manifold sub-bases)

The maximum system configuration can be limited in individual cases by exceeding the address space.



Note
Please refer to the detailed description of the configuration/addressing rules in the technical data for CPX bus nodes.

Overview – Allocated addresses for CPX modules

	Inputs [bit]	Outputs [bit]
CPX-CTEL-4-M12-5POL	256	256
CPX-CMXX	2 x 64	2 x 64
CPX-CM-HPP	256	256
CPX-CMAX	64	64
CPX-CMPX	48	48
CPX-CMIX	48	48
CPX-4DE	4	–
CPX-8DE	8	–
CPX-16DE	16	–
CPX-M-16DE-D	16	–
CPX-L-16DE-16-KL-3POL	16	–
CPX-8DE-D	8	–
CPX-8NDE	8	–
CPX-4DA	–	4
CPX-8DA	–	8
CPX-8DA-H	–	8
CPX-8DE-8DA	8	8
CPX-L-8DE-8DA-16-KL-3POL	8	8
CPX-2AE	2 x 16	–
CPX-4AE-I	4 x 16	–
CPX-4AE-P	4 x 16	–
CPX-4AE-T	4 x 16	–
CPX-4AE-TC	4 x 16	–
CPX-2AA	–	2 x 16
CPX-FVDA-P	48	48
CPX-FVDA-P2	48	48
VABA-S6-1-X1	–	8, 16, 24, 32 ¹⁾
VABA-S6-1-X2	–	8, 16, 24, 32 ¹⁾
VABA-S6-1-X2-D	8, 16, 24, 32 ¹⁾	8, 16, 24, 32 ¹⁾
CPX-GP-CPA-10	–	8, 16, 24 ¹⁾
CPX-GP-CPA-14	–	8, 16, 24 ¹⁾
CPX-GP-03-4,0	–	8, 16, 24, 32 ¹⁾
CPX-M-GP-03-4,0	–	8, 16, 24, 32 ¹⁾
VMPA1-FB-EMS-8	–	8
VMPA1-FB-EMG-8	–	8
VMPA2-FB-EMS-4	–	4
VMPA2-FB-EMG-4	–	4
VMPA1-FB-EMS-D2-8	–	8
VMPA1-FB-EMG-D2-8	–	8
VMPA2-FB-EMS-D2-4	–	4
VMPA2-FB-EMG-D2-4	–	4
VMPA-FB-PS-1	16	–
VMPA-FB-PS-3/5	16	–
VMPA-FB-PS-P1	16	–
VMPA-FB-EMG-P1	16	16
VMPAL-EPL-CPX	–	4, 8, 16, 24, 32 ¹⁾

1) Depending on the DIL switch setting on the pneumatic interface

Terminal CPX

FESTO

Key features – Addressing

Overview – Address space for CPX bus node and control block

	Protocol	Max. total		Max. digital		Max. analogue	
		Inputs	Outputs	Inputs	Outputs	Inputs	Outputs
CPX-FEC	<ul style="list-style-type: none"> • TCP/IP • Easy IP • Modbus TCP • HTTP 	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-CEC	<ul style="list-style-type: none"> • CoDeSys Level 2 • TCP/IP • Easy IP • Modbus TCP 	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-FB6	INTERBUS	96 bits	96 bits	96 DI	96 DO	6 AI	6 AO
CPX-FB11	DeviceNet	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-FB13	PROFIBUS	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-FB14	CANopen	256 bits	256 bits	64 DI (+ 64 DI)	64 DO (+ 64 DO)	8 AI (+ 8 AI)	8 AO (+ 8 AO)
CPX-M-FB20	INTERBUS (LWL)	96 bits	96 bits	96 DI	96 DO	6 AI	6 AO
CPX-M-FB21	INTERBUS (LWL)	96 bits	96 bits	96 DI	96 DO	6 AI	6 AO
CPX-FB23	CC-Link	–	–	64 DI	64 DO	16 AI	16 AO
CPX-FB32	EtherNet/IP	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-FB33	PROFINET RT	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-M-FB34	PROFINET RT	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-M-FB35	PROFINET RT	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-FB36	EtherNet/IP	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO
CPX-FB38	EtherCAT	512 bits	512 bits	512 DI	512 DO	32 AI	18 AO



- Note
The bandwidth of the bus nodes can be restricted by the choice of module and the maximum number of modules.

Example – CPX-FB6 (INTERBUS)

	Digital inputs	Digital outputs	Remarks
3x CPX-8DE	24	–	<ul style="list-style-type: none"> • The address space is occupied by 7 CPX I/O modules plus pneumatic interface • No additional modules can be configured
1x CPX-8DE-8DA	8	8	
2x CPX-2AE	64	–	
1x CPX-2AA	–	32	
3x VMPA1	–	24	
Allocated address space	96	96	

DI = Digital inputs (1 bit)

DO = Digital outputs (1 bit)

AO = Analogue outputs (16 bits)

AI = Analogue inputs (16 bits)

Terminal CPX

Technical data

FESTO

-  - Module width
50 mm



-  - Note
The data given here apply to the CPX system. If components that conform to lower values are used in the system, the specification for the entire system is reduced to the values of those components used.

Example

Protection class IP65/IP67 applies only to the fully assembled system with fitted plugs or covers (which must also conform to IP65/67). If components with a lower protection class are used, the protection level of the entire

system is reduced to the protection class of the component with the lowest protection level, for example CageClamp connection block with IP20 protection or MPA pneumatics with IP65 protection.

General technical data		
Module No.		197330
Max. no. of modules ¹⁾	Control block	1
	Bus node	1
	I/O modules/CP interface/CTEL interface/multi-axis interface	9
	Pneumatic interface	1
Max. address capacity	Inputs	[byte] 64
	Outputs	[byte] 64
Internal cycle time		[ms] < 1
Configuration support		Fieldbus-specific
LED displays	Bus node/control block	Up to 4 LEDs, bus-specific 4 LEDs, CPX-specific <ul style="list-style-type: none">• PS = Power system• PL = Power load• SF = System fault• M = Modify parameter/forcing active
	I/O modules	Min. one group diagnostic LED Channel-oriented status and diagnostic LED, depending on module
	Pneumatic interface	One group diagnostic LED Valve status LED on valve
Diagnostics		<ul style="list-style-type: none">• Channel and module-oriented diagnostics for inputs/outputs and valves• Detection of module undervoltage for the different voltage potential values• Storage of the last 40 errors with timestamp (asynchronous access)

1) A maximum of 11 modules in total can be combined
(e.g. 1 control block + 9 I/O modules + 1 pneumatic interface, or 1 control block + 1 bus node + 8 I/O modules + 1 pneumatic interface)

Terminal CPX

FESTO

Technical data

General technical data		
Module No.		197330
Parameterisation		Module-specific and entire system, for example: <ul style="list-style-type: none">• Diagnostic behaviour• Condition monitoring• Profile of inputs• Fail-safe response of outputs and valves
Commissioning support		Forcing of inputs and outputs
Protection class to EN 60529		IP65/IP67
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Current supply	Interlinking block with system supply for electronics plus sensors actuators plus valves	[A] 16 (8/10 with 7/8" supply, 5-pin/4-pin) [A] 16 (8/10 with 7/8" supply, 5-pin/4-pin)
	Additional power supply for actuators	[A] 16 (8/10 with 7/8" supply, 5-pin/4-pin)
	Additional power supply for valves	[A] 16 (10 with 7/8" supply, 4-pin)
Current consumption		Depending on system configuration
Power failure bridging (bus electronics only)	[ms]	10
Power supply connection		M18, 4-pin 7/8", 5-pin 7/8", 4-pin AIDA push-pull, 5-pin
Fuse concept		Per module with electronic fuses
Tests	Vibration test to DIN IEC 68	<ul style="list-style-type: none">• With wall mounting: Severity level 2• With H-rail mounting: Severity level 1
	Shock test to DIN IEC 68	<ul style="list-style-type: none">• With wall mounting: Severity level 2• With H-rail mounting: Severity level 1
PWIS classification		PWIS-free (free of paint-wetting impairment substances)
Interference immunity		EN 61000-6-2 (industry)
Interference emission		EN 61000-6-4 (industry)
Isolation test for galvanically isolated circuits to IEC 1131 Part 2	[V DC]	500
Galvanic isolation of electrical voltages	[V DC]	80
Protection against direct and indirect contact		PELV (Protective Extra-Low Voltage)
Materials		End plates: Die-cast aluminium
Grid dimension	[mm]	50

Operating and environmental conditions		
Module No.		197330
Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70

Terminal CPX

Technical data

FESTO

Certifications – Maximum permissible values	
Module No.	197330
ATEX category gas	II 3G
Ex-ignition protection type gas	Ex nA IIC T4 X Gc
ATEX ambient temperature [°C]	-5 ≤ Ta ≤ +50
CE mark (see declaration of conformity)	To EU Explosion Protection Directive (ATEX) To EU EMC Directive ¹⁾
Protection class to EN 60529	IP65, IP67
Certification	c UL us - Recognized (OL) C-Tick
Explosion protection certification outside the EU	EPL Gc (Ru)

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

- - Note

The values indicated represent the maximum performance limits that can be achieved with the fully assembled product. Depending on the individual components used, the value actually achieved for the overall product may be lower.






You can select e.g. the individual components required to achieve the ATEX category by choosing the corresponding features in the online product configurator:
→ Internet:cpx

Weight [g]		
Control block	FEC	140.0
	CEC	155.0
Bus node	FB6	125.0
	FB11	120.0
	FB13	115.0
	FB14	115.0
	FB20	1070.0
	FB21	1255.0
	FB23	115.0
	FB32	125.0
	FB33	280.0
	FB34	280.0
	FB35	280.0
	FB36	125.0
	FB38	125.0
I/O module	CPX	38.0
	CPX-L	170.0
CP interface		140.0
CTEL interface	CTEL	110.0
Multi-axis interface	CMXX	155.0
Axis interface	CM-HPP	140.0
Axis controller	CMAX	140.0
End-position controller	CMPX	140.0
Measuring module	CMIX	140.0
Pneumatic interface	MPA-S	238.4
	MPA-F	690.0
	VTS/A/VTS-A-F	485.0
	MIDI/MAXI	390.0
	CPA	150.0
Connection block	Plastic	70.0
	Metal	175.0
Interlinking block, plastic	Without power supply	100.0
	With system supply	125.0
Interlinking block, metal	Without power supply	162.0
	With system supply, 7/8" 4-pin	228.0
	With system supply, 7/8" 5-pin	187.0
	With system supply, Push-pull	245.0
Tie rod	1-fold	19.0 ±2.5
	2-fold	32.5 ±2.5
	3-fold	46.0 ±2.5
	4-fold	59.5 ±2.5
	5-fold	73.0 ±2.5
	6-fold	86.5 ±2.5
	7-fold	100.0 ±2.5
	8-fold	113.5 ±2.5
	9-fold	127.0 ±2.5
	10-fold	140.5 ±2.5
End plate for plastic version	Left-hand	77.0
	Right-hand	70.0
End plate for metal version	Left-hand	113.0
	Right-hand	113.0

Terminal CPX

Accessories







Ordering data – Accessories

Designation		Part No.	Type
Mounting			
	Attachment for wall mounting (for long valve terminals, 10 pieces), design for plastic manifold sub-bases	529040	CPX-BG-RW-10x
	Attachment for wall mounting (for long valve terminals, 2 mounting brackets and 4 screws), design for metal manifold sub-bases	550217	CPX-M-BG-RW-2x
	Mounting for H-rail	526032	CPX-CPA-BG-NRH
	CPX without pneumatic components		
	CPX-VTSA		
	CPX-VTSA-F		
	CPX-MPA		
	CPX-CPA		
	CPX-MIDI	526033	CPX-03-4,0
	CPX-MAXI	526034	CPX-03-7,0
Tie rod			
	Tie rod CPX	Extension 1-fold	525418 CPX-ZA-1-E
		1-fold	195718 CPX-ZA-1
		2-fold	195720 CPX-ZA-2
		3-fold	195722 CPX-ZA-3
		4-fold	195724 CPX-ZA-4
		5-fold	195726 CPX-ZA-5
		6-fold	195728 CPX-ZA-6
		7-fold	195730 CPX-ZA-7
		8-fold	195732 CPX-ZA-8
		9-fold	195734 CPX-ZA-9
		10-fold	195736 CPX-ZA-10
Plastic interlinking block			
	Without power supply	-	195742 CPX-GE-EV
	With system supply	M18	195746 CPX-GE-EV-S
		M18, for ATEX environment	8022170 CPX-GE-EV-S-VL
		7/8" - 5-pin	541244 CPX-GE-EV-S-7/8-5POL
		7/8" - 5-pin, for ATEX environment	8022172 CPX-GE-EV-S-7/8-5POL-VL
		7/8" - 4-pin	541248 CPX-GE-EV-S-7/8-4POL
	With additional power supply for outputs	M18	195744 CPX-GE-EV-Z
		M18, for ATEX environment	8022166 CPX-GE-EV-Z-VL
		7/8" - 5-pin	541248 CPX-GE-EV-Z-7/8-5POL
		7/8" - 5-pin, for ATEX environment	8022173 CPX-GE-EV-Z-7/8-5POL-VL
		7/8" - 4-pin	541250 CPX-GE-EV-Z-7/8-4POL
	With additional power supply for valves	M18	533577 CPX-GE-EV-V
		M18, for ATEX environment	8022171 CPX-GE-EV-V-VL
		7/8" - 4-pin	541252 CPX-GE-EV-V-7/8-4POL
Metal interlinking block			
	Without power supply	-	550206 CPX-M-GE-EV
	With system supply	7/8" - 5-pin	550208 CPX-M-GE-EV-S-7/8-5POL
		7/8" - 5-pin, for ATEX environment	8022165 CPX-M-GE-EV-S-7/8-5POL-VL
		7/8" - 4-pin	568956 CPX-M-GE-EV-S-7/8-CIP-4P
		Push-pull - 5-pin	563057 CPX-M-GE-EV-S-PP-5POL
	With additional power supply for outputs	7/8" - 5-pin	550210 CPX-M-GE-EV-Z-7/8-5POL
		7/8" - 5-pin, for ATEX environment	8022158 CPX-M-GE-EV-Z-7/8-5POL-VL
		Push-pull - 5-pin	563058 CPX-M-GE-EV-Z-PP-5POL

Terminal CPX

Accessories

FESTO




Ordering data – Accessories			
Designation		Part No.	Type
Mounting accessories			
	Screws for mounting the bus node/connection block on a plastic interlinking block	Bus node/metal connection block	550218 CPX-DPT-30X32-S-4X
	Screws for mounting the bus node/connection block on a metal interlinking block	Bus node/plastic connection block	550219 CPX-M-M3x22-4x
		Bus node/metal connection block	550216 CPX-M-M3x22-S-4x
End plates for plastic version			
	End plate	Right-hand	195714 CPX-EPR-EV
		Left-hand	195716 CPX-EPL-EV
	Earthing element for right-hand/left-hand end plate	5 pieces	538892 CPX-EPFE-EV
End plates for metal version			
	End plate	Right-hand	550214 CPX-M-EPR-EV
		Left-hand	550212 CPX-M-EPL-EV
Power supply			
	Plug socket for mains connection M18x1, straight, 4-pin	For 1.5 mm ²	18493 NTSD-GD-9
		For 2.5 mm ²	18526 NTSD-GD-13,5
	Plug socket for mains connection M18x1, angled, 4-pin	For 1.5 mm ²	18527 NTSD-WD-9
		For 2.5 mm ²	533119 NTSD-WD-11
	Plug socket for mains connection 7/8", straight, 5-pin	0.25 ... 2.0 mm ²	543107 NECU-G78G5-C2
	Plug socket for mains connection 7/8", straight, 4-pin	0.25 ... 2.0 mm ²	543108 NECU-G78G4-C2
	Plug socket for mains connection 7/8", angled, 5-pin – open cable end, 5-pin	2 m	573855 NEBU-G78W5-K-2-N-LE5
	Connection socket AIDA push-pull, spring-loaded terminal	5-pin	563059 NECU-M-PPG5-C1
Inscription labels			
	Inscription labels 6x10, 64 pieces, in frames		18576 IBS-6x10

Terminal CPX

FESTO

Accessories

Ordering data – Accessories

Designation		Part No.	Type
Hood			
	Mounting rail for securing the cover	1,000 mm	572256 CAFC-X1-S
	Mounting kit for CPX cover		572257 CAFC-X1-BE
	Hood section for CPX terminal including mounting attachments for connecting several hood sections in series	200 mm	572258 CAFC-X1-GAL-200
		300 mm	572259 CAFC-X1-GAL-300
Manual			
	CPX System Manual	German	526445 P.BE-CPX-SYS-DE
		English	526446 P.BE-CPX-SYS-EN
		Spanish	526447 P.BE-CPX-SYS-ES
		French	526448 P.BE-CPX-SYS-FR
		Italian	526449 P.BE-CPX-SYS-IT
		Swedish	526450 P.BE-CPX-SYS-SV
	Operator unit CPX-MMI-1	German	534824 P.BE-CPX-MMI-1-DE
		English	534825 P.BE-CPX-MMI-1-EN
		French	534827 P.BE-CPX-MMI-1-FR
		Italian	534828 P.BE-CPX-MMI-1-IT
		Swedish	534829 P.BE-CPX-MMI-1-SV
		Spanish	534826 P.BE-CPX-MMI-1-ES

Terminal CPX

Accessories

FESTO

User manuals – General information

Comprehensive user manuals are vital for the fast and reliable use of fieldbus components. The manuals provided by Festo contain step-by-step instructions for using CPX terminals:

1. Installation
2. Commissioning and parameterisation
3. Diagnostics

Application-oriented explanations are provided for integration of the CPX terminal in the programming and configuration software of the various controller manufacturers. Use the order code to select the language you want. The manual for the configuration you have ordered is supplied automatically.

The documents can be quickly and easily downloaded from the Festo website.

➔ www.festo.com



Overview – User manuals

Type	Title	Description
Pneumatic components		
P.BE-VTSA-44-...	Valve terminals with VTSA and VTSA-F pneumatics	Instructions on assembly, installation, commissioning and diagnostics of the VTSA and VTSA-F pneumatic components.
P.BE-CPA-...	Valve terminals with CPA pneumatics	Instructions on assembly, installation, commissioning and diagnostics of the CPA pneumatic components.
P.BE-Midi/Maxi-03-...	Valve terminals with MIDI/MAXI pneumatics	Instructions on assembly, installation, commissioning and diagnostics of the MIDI/MAXI pneumatic components.
P.BE-MPA-...	Valve terminals with MPA-S pneumatics	Instructions on assembly, installation, commissioning and diagnostics of the MPA-S pneumatic components.
P.BE-MPAF-...	Valve terminals with MPA-F pneumatics	Instructions on assembly, installation, commissioning and diagnostics of the MPA-F pneumatic components.
P.BE-MPAL-...	Valve terminals	Instructions on assembly, installation, commissioning and diagnostics of the MPA-L pneumatic components.

Terminal CPX

FESTO

Accessories

Overview – User manuals		
Type	Title	Description
Electronic components		
P.BE-CPX-SYS...	System description, installation and commissioning	Overview of the design, components and mode of operation of the CPX terminal; installation and commissioning instructions as well as basic principles of parameterisation
P.BE-CPX-SYS-F...	PROFIsafe shut-off module	Connection technology and instructions on mounting, installing and commissioning for the PROFIsafe shut-off module of the type CPX-FVDA-P
P.BE-CPX-FVDA-P2...	PROFIsafe shut-off module	Connection technology and instructions on mounting, installing and commissioning for the PROFIsafe shut-off module of the type CPX-FVDA-P2
P.BE-CPX-EA...	CPX-EA modules, digital	Connection technology and assembly, installation and commissioning instructions for digital input and output modules of the type CPX... as well as CPA, MIDI/MAXI, VTSA/VTSA-F and MPA-S/F/L pneumatic interface
P.BE-CPX-AX...	CPX-EA modules, analogue	Connection technology and assembly, installation and commissioning instructions for analogue input and output modules of the type CPX...
P.BE-CPX-CP...	CPX CP interface	Instructions on assembly, installation, commissioning and diagnostics of the CP interface
P.BE-CPX-CTEL...	CPX CTEL interface	Instructions on assembly, installation, commissioning and diagnostics of the CPX CTEL master
P.BE-CPX-CMXX...	CPX multi-axis interface	Instructions on assembly, installation, commissioning and diagnostics of the CPX multi-axis interface (CMXX)
P.BE-CPX-CM-HPP...	CPX axis interface	Instructions on assembly, installation, commissioning and diagnostics of the CPX axis interface (CM-HPP)
P.BE-CPX-CMAX-SYS...	CPX axis controller	Instructions on assembly, installation, commissioning and diagnostics of the CPX axis controller (CMAX)
P.BE-CPX-CMAX-CONTROL...	CPX axis controller	Information on controlling, diagnosing and parameterising the axis controller via the fieldbus
P.BE-CPX-CMPX-SYS...	CPX end-position controller	Instructions on assembly, installation, commissioning and diagnostics of the CPX end-position controller (CMPX)
P.BE-CPX-CMIX...	CPX measuring module	Instructions on assembly, installation, commissioning and diagnostics of the CPX measuring module (CMIX)
P.BE-CPX-FB...	CPX bus node	Instructions on assembly, installation, commissioning and diagnostics of the relevant bus nodes
P.BE-CPX-PNIO...	CPX bus node for PROFINET	Instructions on assembly, installation, commissioning and diagnostics of the relevant bus nodes
P.BE-CPX-FEC...	CPX control block	Instructions on assembly, installation, commissioning and diagnostics of the relevant control block
P.BE-CPX-CEC...	CPX CoDeSys controller (control block)	Instructions on assembly, installation, commissioning and diagnostics of the relevant control block
P.BE-CPX-MMI-1...	Universal handheld type CPX-MMI-1	Instructions on assembly, installation, commissioning and diagnostics of the CPX operator unit

User manuals – GSD, EDS, etc.

Device description files and icons are used to explain the integration of the CPX terminal in the configuration software of the various controller manufacturers.

These can be downloaded quickly and easily from www.festo.com.

Terminal CPX

Technical data – Operator unit CPX-MMI-1

FESTO

-  - Width
81 mm

The operator unit is a small, convenient commissioning and service device for the CPX terminal. It provides data polling, configuration and diagnostic functions for CPX terminals. Its extremely flexible application range means that data can be read in or out at any location. IP65 compatibility makes it suitable for use in harsh industrial environments.



Application

Functions

- Advance commissioning through the monitoring/forcing of inputs and outputs without fieldbus master/PLC
- Test function for parameter settings, for example fail-safe of the outputs or switch-on delay of the inputs
- Plain-text diagnostics of module and channel-oriented errors
- Condition monitoring: preselection/loading of counters, activation of the channels to be monitored
- Display of the last 40 error occurrences with timestamp
- Identification of sporadic causes of errors through display of the diagnostic history
- Password protection

Connection

The operator unit is connected to the CPX bus nodes or control block, as appropriate, using a pre-assembled M12 cable.

The voltage for the operator unit is supplied by the CPX component

Communication

Once connected to the CPX terminal, the operator unit loads the available configuration for the I/O modules, valves, etc.

This ensures the availability of up-to-date texts, messages, menus and displays.

Status information, diagnostic messages and parameter bits are then exchanged during operation.

Assembly

A mounting bracket for the operator unit offers the option of wall or H-rail mounting.

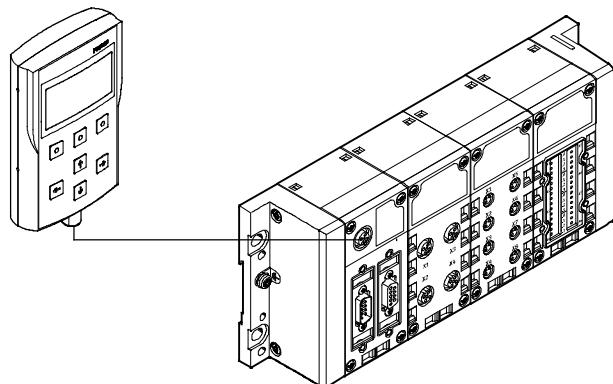
The mounting bracket also has an option for temporary mounting using a hanging device.

Terminal CPX

FESTO











Technical data – Operator unit CPX-MMI-1

Connection



The operator unit is connected to the CPX terminal using pre-assembled cables.

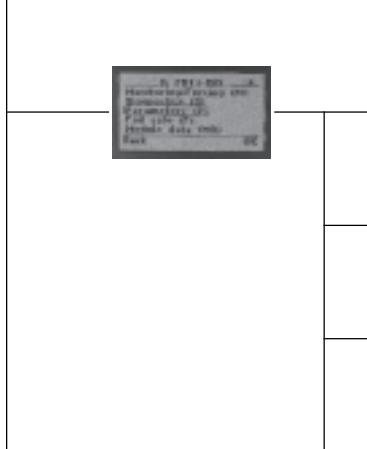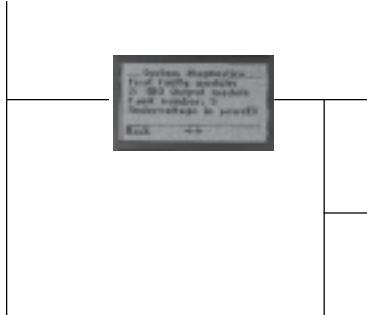Function examples



System overview

- Overview of configured modules and current diagnostic messages

Diagnostics

- Fast access to the diagnostic history and the modules with diagnostic messaging
- Display of the last 40 diagnostic messages with timestamp
- Display of the current diagnostic message for a module

Commissioning

- Selection of module-specific data and parameters
- Display and modification of the current status of the inputs and outputs of a module
- Display and modification of the current settings for module-specific parameters

Setup

- Setting of access permission (password)
- Contrast setting of the display

Terminal CPX

Technical data – Operator unit CPX-MMI-1


FESTO

General technical data		CPX-MMI-1
Type		CPX-MMI-1
Data interface	[V DC]	RS232 interface, 57.6 kBaud, M12 socket, 4-pin
Display component		LCD graphical display with background illumination (128 x 64 pixels)
Control elements		7 keys: 4 arrow keys and 3 function keys, touch-sensitive keypad
Electromagnetic compatibility		Interference emission tested to DIN EN 61000-6-4, industry Interference immunity tested to DIN EN 61000-6-2, industry
Nominal operating voltage	[V DC]	24, supplied by the connected device
Operating voltage range	[V DC]	18 ... 30
Current consumption	[mA]	50 ... 60
Protection class to IEC 60529		IP65
Relative air humidity	[%]	90, non-condensing
Vibration resistance		Tested to DIN/IEC 68/EN 60068, Part 2-6 • With wall mounting: Severity level 2 • With H-rail mounting: Severity level 1
Shock resistance		Tested to DIN/IEC 68/EN 60068, Part 2-27 • With wall mounting: Severity level 2 • With H-rail mounting: Severity level 1
Materials		Reinforced polyamide
Dimensions (W x H x D)	[mm]	81 x 137 x 28
Weight	[g]	150


Operating and environmental conditions

Ambient temperature	[°C]	0 ... 50
CE mark (see declaration of conformity)		To EU EMC Directive ¹⁾ In accordance with EU Explosion Protection Directive (ATEX)
ATEX category	Gas	II 3 G
	Dust	II 3 D
EX-ignition protection type	Gas	Ex nA IIC T6 X Gc
	Dust	Ex tc IIIC T60°C X Dc IP65
ATEX ambient temperature	[°C]	-5 <= Ta <= +50

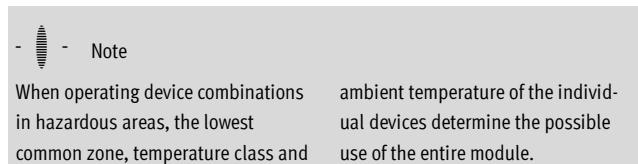- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.



Connection and display components

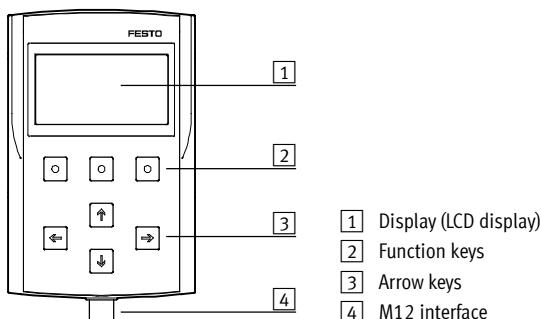

- [1] Display (LCD display)
- [2] Function keys
- [3] Arrow keys
- [4] M12 interface

Terminal CPX

FESTO

Accessories – Operator unit CPX-MMI-1

Ordering data			
Designation		Part No.	Type
Operator unit			
	Provides data polling, configuration and diagnostic functions for CPX terminals	529043	CPX-MMI-1
Connecting cable			
	Connecting cable M12-M12, specially for CPX-MMI	1.5 m	529044 KV-M12-M12-1,5
		3.5 m	530901 KV-M12-M12-3,5
Mounting			
	Bracket	534705	CPX-MMI-1-H
	Mounting for H-rail	536689	CPX-MMI-1-NRH
User manual			
	User manual for operator unit CPX-MMI-1	German	534824 P.BE-CPX-MMI-1-DE
		English	534825 P.BE-CPX-MMI-1-EN
		French	534827 P.BE-CPX-MMI-1-FR
		Italian	534828 P.BE-CPX-MMI-1-IT
		Swedish	534829 P.BE-CPX-MMI-1-SV
		Spanish	534826 P.BE-CPX-MMI-1-ES

Terminal CPX

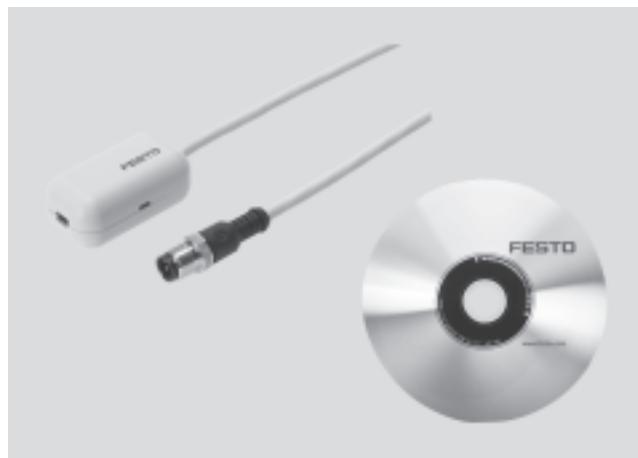
Technical data – CPX Maintenance Tool

FESTO

Function

CPX Maintenance Tool (CPX-FMT) combines service software with a connecting adapter. The service software is a tool for the design, parameterisation and online diagnostics of the CPX terminal. The USB-to-M12 adapter features built-in galvanic isolation (between CPX and PC) and enables a PC to be connected to the diagnostic interface of the CPX terminal.

- Adapter
- Software on CD-ROM



Application

Only from Festo

The CPX-FMT software enables access to CPX valve terminals via Ethernet with the control block CPX-FEC and the bus nodes EtherNet/IP (FB 32) and PROFINET (FB 33, FB 34, FB 35). The bus nodes or control block can be connected directly to the PC via a USB adapter from Festo. Similar to the CPX-MMI, diagnostic data such as

the error trace or module diagnostics can be read out and parameters can be modified in plain text. In contrast to the CPX-MMI, the data can be used directly on a PC. There is an option, for example, to send screenshots of a configuration or the current error trace directly via e-mail. In addition, CPX configurations can also be saved

and archived directly as a CPX-FMT project. Undocumented changes can subsequently be identified using the online/offline comparison function. On-site tests such as the actuation of valves or the emulation of sensor feedback (in both cases called "forcing"), for example, can be

performed without an existing controller infrastructure. It must be noted that with both the CPX-FMT and the CPX-MMI, only local parameters on the CPX valve terminal can be changed and saved. The configuration of the networks or controller software cannot be influenced.

General technical data

Type	NEFC-M12G5-0.3-U1G5	
System requirements	PC	IBM-compatible
	Drive	CD-ROM
	Interfaces	USB port (specification USB 1.1 or higher)
	Operating system	Microsoft Windows 2000 or XP
Functional range	<ul style="list-style-type: none">• Configuration and parameterisation• Reading out of system, module, channel diagnostics and error trace• Saving of the configuration as a project• Integration of plug-ins/links to self-executing programs	
Scope of delivery	<ul style="list-style-type: none">• Adapter M12, 5-pin to mini USB socket• CD-ROM with installation program	
Type of mounting	Screw-in	
Electrical connection	Plug M12x1, 5-pin	
Adapter cable composition	4 x 0.34 mm ²	
Cable length	[m]	0.3
Protection class to EN 60529	IP20	
CE mark (see declaration of conformity)	To EU EMC Directive	
Ambient temperature	[°C]	-5 ... +50
Material	Housing	Acrylic butadiene styrene
	Cable sheath	Polyurethane
	Pin contact	Gold-plated brass
Note on materials	RoHS-compliant	

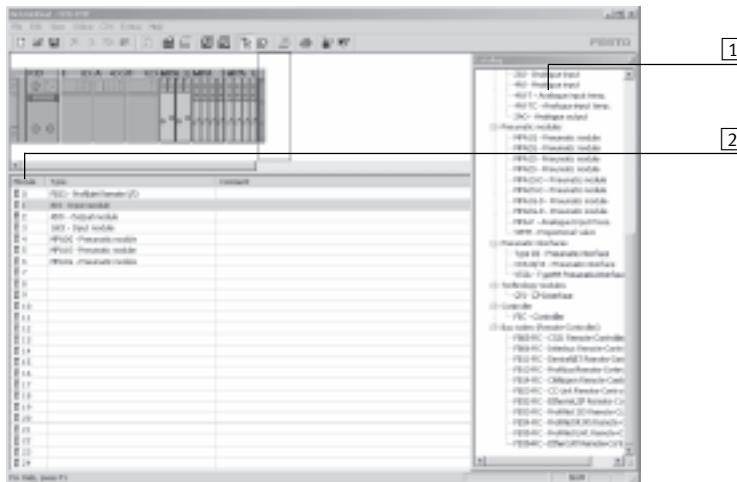
Terminal CPX

FESTO

Technical data – CPX Maintenance Tool

Display components

Creating a device configuration using the editor




The device configuration can be conveniently generated, parameterised and saved using the drag & drop feature. You can insert and move modules.

[1] Module numbers from the graphic system overview


[2] Catalogue for selecting required modules

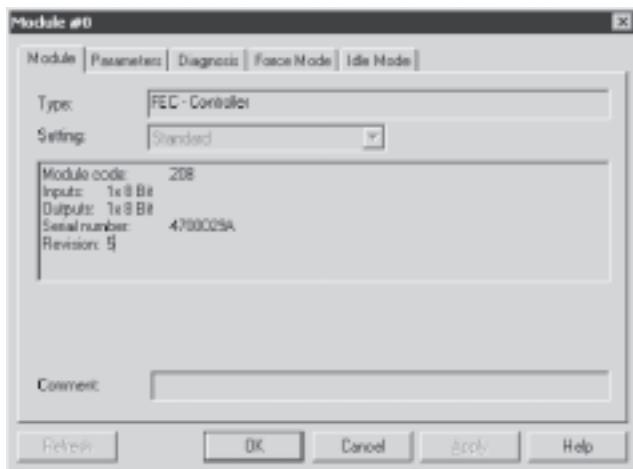Module overview for a selected module



Displays important module data as well as the number of allocated inputs and outputs.

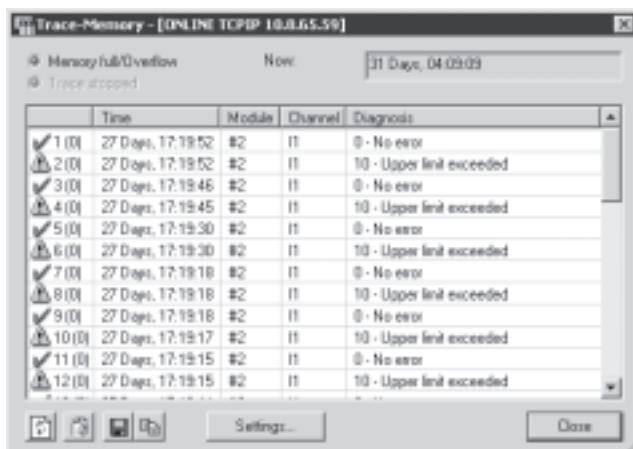Diagnostic memory



Faults which occur during operation are entered in a diagnostic memory. The first or the last 40 entries are saved, as well as the respective time measured from the moment the power supply was switched on.

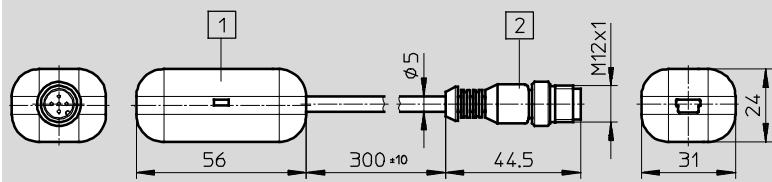
Terminal CPX

Technical data – CPX Maintenance Tool

FESTO

Dimensions

Adapter



Download CAD data ➔ www.festo.com

- [1] Mini B 5P USB port
- [2] Plug M12x1, 5-pin

Ordering data

Designation

Part No.

Type



CPX Maintenance Tool (CPX-FMT), software and USB-to-M12 adapter

547432

NEFC-M12G5-0.3-U1G5

Terminal CPX

Technical data – Control block CPX-FEC

FESTO



IT services:



Powerful control block for pre-processing actuation of the CPX modules. The power supply to and communication with other modules takes place via the interlinking block.

In addition to the connection for the Ethernet interface in RJ45 and a programming interface in Sub-D, LEDs are also provided for the bus status, operating status of the PLC and CPX peripherals information, as are switching elements and a diagnostic interface for CPX-MMI and CPX-FMT.



Application

Bus connection

The CPX-FEC is a remote controller that can be connected to a master PLC via the bus nodes of the CPX terminal or via Ethernet. At the same time, it is

Modbus/TCP (code T05)

Transmits data in binary format within TCP/IP packets. This ensures good data throughput.

Operating modes

- Stand-alone/EasyIP
- Fieldbus remote controller
- Modbus/TCP remote controller
- Remote I/O Modbus/TCP

Communication protocols

- PROFIBUS, PROFINET, DeviceNet, INTERBUS, CANopen, EtherCAT and CC-Link via CPX bus node
- Modbus/TCP
- EasyIP

- IP
- TCP
- UDP
- SMTP

- HTTP
- DHCP
- BootP
- TFTP

Setting options

CPX-FEC has the following interfaces for monitoring, programming and commissioning:

- For the CPX-MMI/-FMT
- Serial interface RS232, for example, for a Front End Display (FED)
- Ethernet interface for IT applications
- Remote diagnostics

The operating mode and fieldbus protocol are set using the DIL switch on the CPX-FEC.

The integrated web server offers a convenient means of querying data saved in the CPX-FEC.

Terminal CPX

Technical data – Control block CPX-FEC

FESTO

General technical data		
Type	CPX-FEC-1-IE	
Ethernet interface	RJ45 (8-pin, socket)	
Data interface	RS232 (Sub-D, 9-pin, socket)	
MMI/FMT interface	M12, 5-pin, socket	
Baud rate	Ethernet interface [Mbps]	10/100 (to IEEE802.3, 10BaseT)
	Data interface [kbps]	9.6 ... 115.2
	MMI/FMT interface [kbps]	56.6
Protocol	<ul style="list-style-type: none"> • TCP/IP • Easy IP • Modbus TCP • HTTP 	
Processing time for 1,024 binary instructions [ms]	Approx. 1	
Flags	M0.0 ... M9999, addressable as bits or words	
	No. of time flags	T0 ... T255
	Time range [s]	0.01 to 655.35
	No. of counting flags	Z0 ... Z255
	Counting range	0 to 65535
Register	R0 ... R255, addressable as words	
Special FE	FE 0 ... 255, init flag	
IP address setting	BOOTP/DHCP via FST or via MMI/FMT	
Max. address capacity	Inputs [byte]	64
	Outputs [byte]	64
Program memory	User program [kB]	250
	Web applications [kB]	550
Programming language	<ul style="list-style-type: none"> • IL • LD 	
Arithmetic functions	+, -, *, :, further functions via functional modules	
Functional modules	<ul style="list-style-type: none"> • CPX diagnostic status • Copy CPX diagnostic trace • Read CPX module diagnostics • Write CPX module parameter • ... 	
No. of programs/tasks	P0 ... P63	
LED displays (FEC-specific)	RUN = Program is being executed/Modbus connection active STOP = Program is stopped/no Modbus connection ERR = Error in the program execution TP = Status of the Ethernet connection	
Device-specific diagnostics	Module and channel-oriented diagnostics via peripherals error	
Parameterisation	<ul style="list-style-type: none"> • Start-up parameterisation via FST • Parameterisation during the operating time via functional module 	
Control elements	<ul style="list-style-type: none"> • DIL switch for setting the operating mode • Rotary switch for program selection/program start 	
Additional functions	<ul style="list-style-type: none"> • Storage of the last 40 errors with timestamp (access via PCP) • 8-bit system status in image table for inputs • 2-byte inputs and 2-byte outputs, system diagnostics in image table 	

Terminal CPX

FESTO

Technical data – Control block CPX-FEC

General technical data

Operating voltage	Nominal value Permissible range Power failure buffering	[V DC] [V DC] [ms]	24 (reverse polarity protected) 18 ... 30 10
Residual ripple	[Vss]		4
Current consumption	[mA]		Max. 200
Interference emission			To EN 61000-6-4 (industry)
Interference immunity			To EN 61000-6-2 (industry)
Protection class to EN 60529			IP65/IP67
Temperature range	Operation Storage/transport	[°C] [°C]	-5 ... +50 -20 ... +70
Materials			Polymer
Grid dimension	[mm]		50
Dimensions (incl. interlinking block) W x L x H	[mm]		50 x 107 x 55
Weight	[g]		140



- Note
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Overview of the operating modes


	Stand-alone	Remote controller		Remote I/O Modbus/TCP
		Ethernet	Fieldbus	
CPX-FEC function	Control	Control and communication		Ethernet slave
CPX module controlled by	CPX-FEC	CPX-FEC		Higher-order controller
Pre-processing of data in the FEC	Yes	Yes		No
Communication with higher-order controller	No	Via Ethernet • EasyIP • Modbus/TCP	Via fieldbus	Via Ethernet • EasyIP • Modbus/TCP
Web server	Possible	Possible		Possible
Configuration	FST 4.1 or higher	FST 4.1 or higher		Higher-order controller
Parameterisation	Via FST, CPX-MMI/-FMT	Via FST, CPX-MMI/-FMT		Via CPX-MMI/-FMT, Modbus
Order code	T03	T03		T05
Addressing	Changeable	Changeable		Preset
Memory	• 250 kB for user program • 550 kB for web applications	• 250 kB for user program • 550 kB for web applications		• 800 kB for web applications
CPX-MMI/-FMT	Can be connected to CPX-FEC	Can be connected to CPX-FEC		Can be connected to CPX-FEC

Terminal CPX

Technical data – Control block CPX-FEC

FESTO

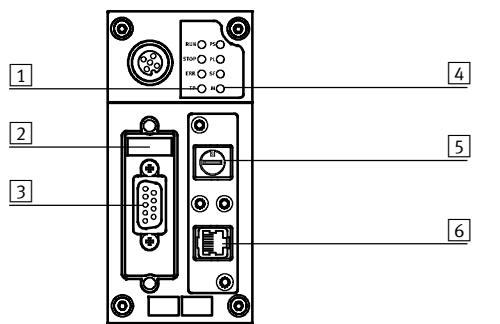Connection and display components



- [1] Controller and Ethernet LEDs
- [2] DIL switch for operating mode
- [3] Programming interface RS232
(9-pin Sub-D, socket)
- [4] CPX-specific status LEDs
- [5] 16-way rotary switch
(program selection)
- [6] Ethernet connection
(8-pin RJ45, socket)

Pin allocation for the programming interface (RS232)

Pin allocation	Pin	Signal	Designation
Sub-D socket			
	1	n.c.	Not connected
	2	RxD	Received data
	3	TxD-P	Transmitted data
	4	n.c.	Not connected
	5	GND	Data reference potential
	6	n.c.	Not connected
	7	n.c.	Not connected
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	Screened	Connection to functional earth (FE)

Pin allocation for the Ethernet interface

Pin allocation	Pin	Signal	Designation
RJ45 plug			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Screened	Screened








Ordering data

Designation	Part No.	Type
Control block		
	For pre-processing actuation of the CPX modules	529041 CPX-FEC-1-IE

Terminal CPX

FESTO

Accessories – Control block CPX-FEC

Ordering data		
Designation	Part No. Type	
Bus connection		
	Sub-D plug 534497 FBS-SUB-9-GS-1x9POL-B	
	Inspection cover, transparent 533334 AK-SUB-9/15-B	
	Inspection cover 557010 AK-SUB-9/15	
	Inscription label holder for connection block 536593 CPX-ST-1	
	RJ45/plug 534494 FBS-RJ45-8-GS	
	Cover for RJ45 connection 534496 AK-RJ45	
	Programming cable 151915 KDI-PPA-3-BU9	
	Connecting cable FED 539642 FEC-KBG7	
	Connecting cable FED 539643 FEC-KBG8	
	Adapter from 5-pin M12 to mini USB socket and controller software 547432 NEFC-M12G5-0.3-U1G5	
User manual		
	User manual for control block CPX-FEC German 538474 P.BE-CPX-FEC-DE English 538475 P.BE-CPX-FEC-EN Spanish 538476 P.BE-CPX-FEC-ES French 538477 P.BE-CPX-FEC-FR Italian 538478 P.BE-CPX-FEC-IT Swedish 538479 P.BE-CPX-FEC-SV	German 538474 P.BE-CPX-FEC-DE English 538475 P.BE-CPX-FEC-EN Spanish 538476 P.BE-CPX-FEC-ES French 538477 P.BE-CPX-FEC-FR Italian 538478 P.BE-CPX-FEC-IT Swedish 538479 P.BE-CPX-FEC-SV
Software		
	Programming software German 537927 P.SW-FST4-CD-DE English 537928 P.SW-FST4-CD-EN	German 537927 P.SW-FST4-CD-DE English 537928 P.SW-FST4-CD-EN

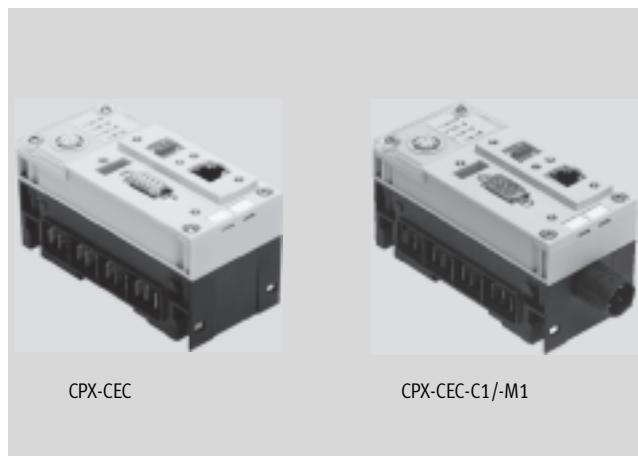
Control block CPX-CEC

Technical data

FESTO

The CoDeSys controller is a modern control system for CPX terminals that enables programming with CoDeSys to IEC 61131-3.

- Easy actuation of valve terminal configurations with MPA, VTSA
- Connection to all fieldbuses as a remote controller and for preprocessing
- Actuation of electric drives as individual axes via CANopen (CPX-CEC-C1/-M1)
- Diagnostics with flexible monitoring options for pressure, flow rate, cylinder operating time, air consumption
- Early warnings and visualisation options
- Actuation of decentralised installation systems on the basis of CPI actuation of applications in proportional pneumatics
- Servopneumatic applications
- AS-interface actuation via gateway



General technical data

Type	CPX-CEC-C1	CPX-CEC-M1	CPX-CEC
Protocol	CoDeSys level 2 EasyIP Modbus TCP TCP/IP		
CPU data	32 MB RAM 32 MB flash 400 MHz processor		
Control interface	CAN bus		-
Processing time	Approx. 200 µs/1k instruction		
Baud rate	10/100 bps to IEEE 802.3 (10BaseT) or 802.3u (100BaseTx)		
Programming software	CoDeSys provided by Festo		
Programming language	SFC, IL, FCH, LD and ST to IEC 61131-3 Additionally CFC		
Programming, operating language	German English		
Programming, support for file handling	Yes		
Program memory	4 MB user program		
Flags	30 kB remanent memory 8 MB global data memory CoDeSys variable concept		
Device-specific diagnostics	Diagnostic memory Channel and module-oriented diagnostics Undervoltage/short circuit of modules		
LED displays (bus-specific)	TP: Link/traffic		
LED displays (product-specific)	RUN: PLC status STOP: PLC status ERR: PLC runtime error PS: Electronics supply, sensor supply PL: Load supply SF: System fault M: Modify/forcing active		
Parameterisation	CoDeSys		
Configuration support	CoDeSys		
IP address setting	DHCP Via CoDeSys Via MMI		
Control elements	DIL switch for CAN termination Rotary switch for RUN/STOP	-	

Control block CPX-CEC

FESTO

Technical data

General technical data			
Type	CPX-CEC-C1	CPX-CEC-M1	CPX-CEC
Function blocks	CPX diagnostic status, copy CPX diagnostic trace, read CPX module diagnostics And others		
Additional functions	Diagnostic functions Motion functions for electric drives SoftMotion functions for electric drives Communication functions RS232		
Total number of axes	31	31 (recommended: max. 8)	-
Nominal operating voltage [V DC]	24		
Nominal operating voltage of the load voltage	24		
	18 ... 30, without pneumatics		
	21.6 ... 26.4, with pneumatics type midi/maxi		
	20.4 ... 26.4, with pneumatics type CPA		
	18 ... 30, with pneumatics type MPA		
Power failure bridging [ms]	10		
Intrinsic current consumption [mA] at nominal operating voltage	Typically 85		
Protection class	IP65, IP67		
Dimensions W x L x H [mm] (incl. interlinking block)	50 x 107 x 55		
Product weight [g]	155		
Materials			
Housing	Reinforced polyamide, polycarbonate		
Note on materials	RoHS-compliant		

Technical data – Interfaces				
Type	CPX-CEC-C1	CPX-CEC-M1	CPX-CEC	
Ethernet				
Number	1			
Ethernet interface	RJ45			
Connector plug	RJ45 socket, 8-pin			
Data transmission speed [Mbps]	10/100			
Supported protocols	TCP/IP Easy IP Modbus TCP (Server)			
Fieldbus interface				
Type	CAN bus		–	
Connection technology	Sub-D plug, 9-pin			
Transmission rate [kbps]	125; 250; 500; 800; 1,000	125; 250; 500; 1,000		
	Adjustable via software	Adjustable via software		
Electrical isolation	Yes			
RS232 interface				
Data interface	–		Sub-D socket, 9-pin 9.6 ... 230.4 kbps Electrically isolated	

Operating and environmental conditions			
Ambient temperature [°C]	–5 ... +50		
Storage temperature [°C]	–20 ... +70		
Relative air humidity [%]	95, non-condensing		
Corrosion resistance class CRC ¹⁾	2		

1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

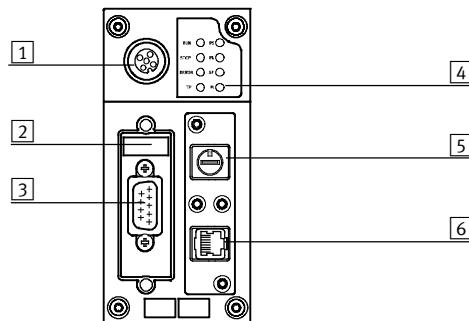
Control block CPX-CEC

Technical data

FESTO


Connection and display components

CPX-CEC-C1/-M1



- [1] CPX-MMI connection
- [2] DIL switch
- [3] Fieldbus interface (plug, Sub-D, 9-pin)
- [4] Status LEDs, bus-specific and product-specific
- [5] RUN/STOP rotary switch
- [6] Ethernet interface (RJ45, socket, 8-pin)

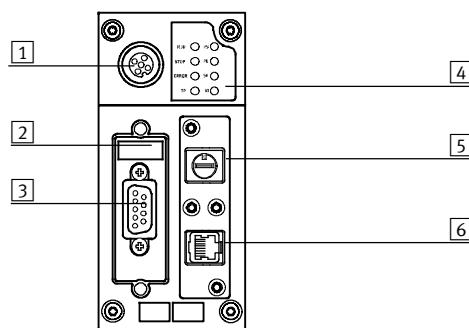CPX-CEC



- [1] CPX-MMI connection
- [2] DIL switch
- [3] RS232 interface (socket, Sub-D, 9-pin)
- [4] Status LEDs, bus-specific and product-specific
- [5] RUN/STOP rotary switch
- [6] Ethernet interface (RJ45, socket, 8-pin)

Pin allocation – Fieldbus interface (CPX-CEC-C1/-M1)

	Pin	Signal	Meaning
Sub-D plug			
	1	n.c.	Not connected
+ 1	2	CAN_L	CAN low
6 +	3	CAN_GND	CAN ground
+ 2	4	n.c.	Not connected
7 +	5	CAN_SHLD	Connection to functional earth (FE)
+ 3	6	CAN_GND	CAN ground (optional) ¹⁾
8 +	7	CAN_H	CAN high
+ 4	8	n.c.	Not connected
9 +	9	n.c.	Not connected
+ 5	Housing	Screened	Plug housing must be connected to FE

1) If a drive controller is connected to an external power supply, CAN ground (optional), pin 6, cannot be used on the CPX-CEC-C1/-M1.

Pin allocation – RS232 interface (CPX-CEC)


	Pin	Signal	Meaning
Sub-D socket			
+ 1	1	n.c.	Not connected
0 6	2	RxD	Received data
0 7	3	TxD	Transmitted data
0 8	4	n.c.	Not connected
0 9	5	GND	Data reference potential
	6	n.c.	Not connected
	7	n.c.	Not connected
	8	n.c.	Not connected
	9	n.c.	Not connected
	Screened	Screened	Connection to functional earth

Control block CPX-CEC


FESTO

Technical data

Pin allocation – Ethernet interface

	Pin	Signal	Meaning
RJ45 plug			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Screened	Screened









Ordering data

Designation	Part No.	Type
	567347	CPX-CEC-C1
	567348	CPX-CEC-M1
	567346	CPX-CEC

Control block CPX-CEC

Accessories

FESTO

Ordering data – Bus connection		Part No.	Type
Designation			
	Sub-D plug, 9-pin (for CPX-CEC-C1/-M1)	532219	FBS-SUB-9-BU-2x5POL-B
	Connecting cable FED (for CPX-CEC)	539642	FEC-KBG7
	Connecting cable FED (for CPX-CEC)	539643	FEC-KBG8
	Bus connection, plug 2xM12, 5-pin	525632	FBA-2-M12-5POL
	Plug socket for fieldbus connection, M12, 5-pin	18324	FBSD-GD-9-5POL
	Plug, M12, 5-pin	175380	FBS-M12-5GS-PG9
	Bus connection, 5-pin	525634	FBA-1-SL-5POL
	Bus connection, screw terminal, 5-pin	525635	FBSD-KL-2x5POL
	RJ45 plug, 8-pin	534494	FBS-RJ45-8-GS
	Cover for RJ45 connection	534496	AK-RJ45
	Inspection cover, transparent for Sub-D plug/socket	533334	AK-SUB-9/15-B
	Cover for Sub-D plug/socket	557010	AK-SUB-9/15
	Inscription label holder for manifold block	536593	CPX-ST-1

Documentation			
Designation	Language	Part No.	Type
	German	569121	P.BE-CPX-CEC-DE
	English	569122	P.BE-CPX-CEC-EN

Terminal CPX

Technical data – Bus node CPX-FB6

FESTO



Bus node for handling communication between the electrical CPX terminal and a higher-order master via INTERBUS.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The fieldbus communication status is displayed via four INTERBUS-specific LEDs.



Application

Bus connection

The bus connection is established via a 9-pin Sub-D socket and a 9-pin Sub-D plug with a typical INTERBUS pin allocation.

The bus connector plugs (with IP65/IP67 protection from Festo or IP20 protection from other manufacturers) facilitate the connection of the incoming and outgoing bus cable.

The outgoing bus plug contains the typical INTERBUS RBST bridge for identification of the outgoing bus connection.

The Sub-D interfaces are designed for controlling network components with a fibre-optic cable connection.

INTERBUS implementation

The CPX-FB6 supports the INTERBUS protocol to EN 50254. In addition to synchronous I/O exchange, the optional PCP channel can be used for parameterisation and diagnostic functions.

The PCP channel provides access to advanced system information and assigns operation parameters while the controller is running via the user program.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

With its address capacity of 96 inputs and 96 outputs, the CPX-FB6 supports a large number of I/O module configurations, including pneumatic interface.

Note

If the PCP channel is used, the maximum number of possible process data bits is reduced by 16.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:

- 8 byte outputs
- 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB6

FESTO

General technical data		
Type	CPX-FB6	
Fieldbus interface	Sub-D, 9-pin, socket and pin	
Baud rate	[Mbps]	
Bus type	Remote bus	
Ident. code	1, 2 or 3 (configuration-specific) 243 (PCP-channel activated)	
Profile	12 (I/O device)	
PCP channel	Yes, 16 bits (optional via DIL switch)	
Configuration support	Icons for CMD software	
Max. no. of process data bits	Inputs Outputs	[bit] [bit]
		96 96
LED displays (bus-specific)	UL = Operating voltage for INTERBUS interface RC = Remotebus check BA = Bus active RD = Remotebus disable TR = Transmit/receive	
Device-specific diagnostics	Via peripherals error	
Parameterisation	<ul style="list-style-type: none"> Start-up parameterisation via user functions (CMD) Via PCP communication 	
Additional functions	<ul style="list-style-type: none"> Storage of the last 40 errors with timestamp (access via PCP) 8-bit system status in image table for inputs 2-byte inputs and 2-byte outputs, system diagnostics in image table 	
Control elements	DIL switch	
Operating voltage	Nominal value Permissible range Power failure buffering	[V DC] [V DC] [ms]
		24 (reverse polarity protected) 18 ... 30 10
Current consumption	[mA]	
Protection class to EN 60529	IP65/IP67	
Temperature range	Operation Storage/transport	[°C] [°C]
		-5 ... +50 -20 ... +70
Materials	Polymer	
Grid dimension	[mm]	
Dimensions (incl. interlinking block) W x L x H	[mm]	
Weight	125 [g]	



Note

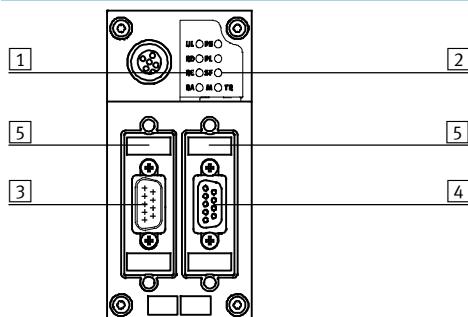
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

FESTO

Technical data – Bus node CPX-FB6

Connection and display components



- [1] INTERBUS-specific LEDs
- [2] CPX-specific status LEDs
- [3] Fieldbus connection, incoming (9-pin Sub-D pin)
- [4] Fieldbus connection, outgoing (9-pin Sub-D socket)
- [5] DIL switch

Pin allocation for the INTERBUS interface

Pin allocation for Sub-D	Pin	Signal	Designation	Pin	Pin allocation for M12
Incoming					
1	DO1	Data out	1		
2	DI1	Data in	3		
3	GND	Reference conductor/ground	5		
4	n.c.	Not connected	2		
5	n.c.	Not connected	4		
6	/DO1	Data out inverse			
7	/DI1	Data in inverse			
8	n.c.	Not connected			
9	n.c.	Not connected			
Hous-ing	Screened	Connection to FE (functional earth) via R/C combination	Hous-ing		
Outgoing					
1	DO2	Data out	1		
2	DI2	Data in	3		
3	GND	Reference conductor/ground	5		
4	n.c.	Not connected	2		
5	+5 V	Station detection ¹⁾	4		
6	/DO2	Data out inverse			
7	/DI2	Data in inverse			
8	n.c.	Not connected			
9	RBST	Station detection ¹⁾			
Hous-ing	Screened	Connection to FE (functional earth)	Hous-ing		

The incoming interface is galvanically isolated from the CPX peripherals. The plug housing is connected to the functional earth FE of the CPX terminal via an R/C combination.

1) The CPX terminal contains the protocol chip SUP1 3 OPC. This ensures automatic detection of additional connected INTERBUS stations. There is therefore no need for a bridge between pin 5 and pin 9.

Terminal CPX

Accessories – Bus node CPX-FB6

FESTO

Ordering data			
Designation		Part No.	Type
Bus node			
	INTERBUS bus node	195748	CPX-FB6
Bus connection			
	Sub-D plug	532218	FBS-SUB-9-BU-IB-B
	Incoming		
	Outgoing	532217	FBS-SUB-9-GS-IB-B
	Connection block M12 adapter (B-coded)	534505	CPX-AB-2-M12-RK-IB
	Inspection cover, transparent	533334	AK-SUB-9/15-B
	Inspection cover	557010	AK-SUB-9/15
	Inscription label holder for connection block	536593	CPX-ST-1
	Threaded sleeve, 4 pieces	533000	UNC4-40/M3x6
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	User manual for bus node CPX-FB6	German	526433 P.BE-CPX-FB6-DE
		English	526434 P.BE-CPX-FB6-EN
		Spanish	526435 P.BE-CPX-FB6-ES
		French	526436 P.BE-CPX-FB6-FR
		Italian	526437 P.BE-CPX-FB6-IT
		Swedish	526438 P.BE-CPX-FB6-SV

Terminal CPX

FESTO

Technical data – Bus node CPX-FB11



Bus node for handling communication between the electrical CPX terminal and a DeviceNet network.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The fieldbus communication status is displayed via the three DeviceNet-specific LEDs.



Application

Bus connection

The bus connection can be selected when ordering, either Micro Style as 2xM12 round connectors or OpenStyle as a terminal strip with IP20 protection.

Both connection types have the function of an integrated T-distributor with incoming and outgoing bus line.

DeviceNet implementation

The CPX-FB11 operates with the "Predefined Master/Slave Connection Set" as a "Group 2 Only Server". The polled I/O, change of state or synchronous method is used for the transmission of synchronous I/O data. The type of transmission can be selected in the network configuration.

The device diagnostics for all bus nodes CPX-FB11 is effectively gathered via strobed I/O and displayed in the input table of the controller. In addition to synchronous data transmission, asynchronous communication is supported through explicit messaging, which enables detailed device diagnostics and parameterisation.

A comprehensive EDS file supports the display of asynchronous data. It is also possible to display system information and assign parameters while the controller is running via the user program or the configuration software.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type. With its address capacity of 64 byte inputs and 64 byte outputs, the CPX-FB11 supports any configuration of I/O modules, including pneumatic interface.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:

- 8 byte outputs
- 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB11

FESTO

General technical data		
Type	CPX-FB11	
Fieldbus interface	Either <ul style="list-style-type: none">• Micro Style bus connection: 2xM12 with IP65/IP67 protection• Open Style bus connection: 5-pin terminal strip, IP20	
Baud rate	[kbps]	
Addressing range	0 ... 63 Set using DIL switch	
Product	Type	Communication adapter (12 dec.)
	Code	4554 dec.
Communication types	Polled I/O, change of state/synchronous, strobed I/O and explicit messaging	
Configuration support	EDS file and bitmaps	
Max. address capacity	Inputs	[byte]
	Outputs	[byte]
LED displays (bus-specific)	MS = Module status NS = Network status IO = I/O status	
Device-specific diagnostics	Module and channel-oriented diagnostics by means of manufacturer-specific diagnostic object	
Parameterisation	<ul style="list-style-type: none">• Module and system parameterisation via configuration interface in plain text (EDS)• Online in run or program mode	
Additional functions	<ul style="list-style-type: none">• Storage of the last 40 errors with timestamp (access via EDS)• 8-bit system status in image table for inputs• 2-byte inputs and 2-byte outputs, system diagnostics in image table	
Control elements	DIL switch	
Operating voltage	Nominal value	[V DC]
	Permissible range	[V DC]
	Power failure buffering	[ms]
Current consumption	Typically 200	
Protection class to EN 60529	IP65/IP67	
Temperature range	Operation	[°C]
	Storage/transport	[°C]
Materials	Polymer	
Grid dimension	[mm]	
Dimensions (incl. interlinking block) W x L x H	[mm]	
Weight	[g]	



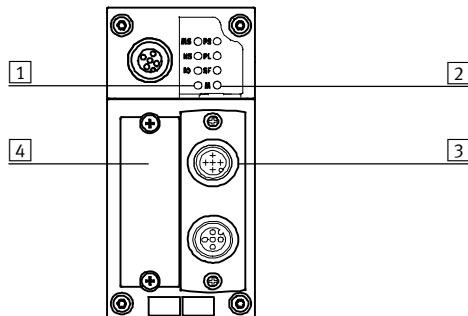
- Note
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

FESTO

Technical data – Bus node CPX-FB11

Connection and display components



- [1] Bus-specific LEDs
- [2] CPX-specific status LEDs
- [3] Selectable fieldbus connection
Micro Style
Open Style
- [4] DIL switch cover

Pin allocation for the DeviceNet interface

Pin allocation	Pin	Signal-specific core colour ¹⁾	Signal	Designation
Sub-D plug				
	1	–	n.c.	Not connected
	2	Blue	CAN_L	Received/transmitted data low
	3	Black	0 V bus	0 V CAN interface
	4	–	n.c.	Not connected
	5	Blank	Screened	Connection to housing
	6	–	n.c.	Not connected
	7	White	CAN_H	Received/transmitted data high
	8	–	n.c.	Not connected
	9	Red	24 V DC bus	24 V DC supply for CAN interface

Micro Style bus connection (M12), incoming/outgoing

Incoming	1	Blank	Screened	Connection to housing
	2	Red	24 V DC bus	24 V DC supply for CAN interface
	3	Black	0 V bus	0 V CAN interface
	4	White	CAN_H	Received/transmitted data high
	5	Blue	CAN_L	Received/transmitted data low
Outgoing	1	Blank	Screened	Connection to housing
	2	Red	24 V DC bus	24 V DC supply for CAN interface
	3	Black	0 V bus	0 V CAN interface
	4	White	CAN_H	Received/transmitted data high
	5	Blue	CAN_L	Received/transmitted data low

Open Style bus connection

	1	Black	0 V bus	0 V CAN interface
	2	Blue	CAN_L	Received/transmitted data low
	3	Blank	Screened	Connection to housing
	4	White	CAN_H	Received/transmitted data high
	5	Red	24 V DC bus	24 V DC supply for CAN interface

Bus connection 7/8"






	1	Black	Screened	Connection to housing
	2	Blue	24 V DC	24 V DC supply for CAN interface
	3	Blank	0 V	0 V CAN interface
	4	White	CAN_H	Received/transmitted data high
	5	Red	CAN_L	Received/transmitted data low

1) Typical for DeviceNet cables

Terminal CPX

Accessories – Bus node CPX-FB11

FESTO

Ordering data		Part No.	Type
Designation			
Bus node			
	DeviceNet bus node	526172	CPX-FB11
Bus connection			
	Sub-D plug	532219	FBS-SUB-9-BU-2x5POL-B
	Connection block, socket Sub-D 9-pin, plug 7/8", 5-pin	571052	CPX-AB-1-7/8-DN
	Micro Style bus connection, 2xM12	525632	FBA-2-M12-5POL
	Socket for MicroStyle connection, M12	18324	FBSD-GD-9-5POL
	Plug for Micro Style connection, M12	175380	FBS-M12-5GS-PG9
	Open Style bus connection for 5-pin terminal strip	525634	FBA-1-SL-5POL
	Terminal strip for Open Style connection, 5-pin	525635	FBSD-KL-2x5POL
	Inspection cover, transparent	533334	AK-SUB-9/15-B
	Inspection cover	557010	AK-SUB-9/15
	Inscription label holder for connection block	536593	CPX-ST-1
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	User manual for bus node CPX-FB11	German	526421 P.BE-CPX-FB11-DE
		English	526422 P.BE-CPX-FB11-EN
		Spanish	526423 P.BE-CPX-FB11-ES
		French	526424 P.BE-CPX-FB11-FR
		Italian	526425 P.BE-CPX-FB11-IT
		Swedish	526426 P.BE-CPX-FB11-SV

Terminal CPX

FESTO

Technical data – Bus node CPX-FB13



Bus node for handling communication between the electrical CPX terminal and a higher-order master via PROFIBUS DP.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The fieldbus communication status is displayed via the PROFIBUS-specific error LED.



Application

Bus connection

The bus connection is established via a 9-pin Sub-D socket with a typical PROFIBUS allocation (to EN 50170).

The bus connector plug (with IP65/IP67 protection from Festo or IP20 protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

An active bus terminal can be connected using the DIL switch integrated in the plug.

The Sub-D interface is designed for controlling network components with a fibre-optic cable connection.

PROFIBUS DP implementation

The CPX-FB13 supports the PROFIBUS DP protocol to EN 50170 Volume 2 for synchronous I/O exchange, parameterisation and diagnostic functions (DPV0).

In addition to DPV0, asynchronous communication to the advanced specification DPV1 is supported. DPV1 provides asynchronous access to advanced system information and assigns operation parameters while the controller is running via the user program.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

With its address capacity of 64 byte inputs and 64 byte outputs, the CPX-FB13 supports any configuration of I/O modules, including pneumatic interface.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:

- 8 byte outputs
- 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB13

FESTO

General technical data		
Type	CPX-FB13	
Fieldbus interface	Sub-D socket, 9-pin (EN 50 170) Galvanically isolated 5 V	
Baud rate	[Mbps]	0.0096 ... 12
Addressing range	1 ... 125 Set using DIL switch	
Product range	4: Valves	
Ident. number	0x059E	
Communication types	DPV0: Synchronous communication DPV1: Asynchronous communication	
Configuration support	GSD file and bitmaps	
Max. address capacity	Inputs [byte]	64
	Outputs [byte]	64
LED displays (bus-specific)	BF: Bus fault	
Device-specific diagnostics	Identifier and channel-oriented diagnostics to EN 50170 (PROFIBUS standard)	
Parameterisation	<ul style="list-style-type: none">Start-up parameterisation via configuration interface in plain text (GSD)Asynchronous parameterisation via DPV1	
Additional functions	<ul style="list-style-type: none">Storage of the last 40 errors with timestamp (access via DPV1)8-bit system status in image table for inputs2-byte inputs and 2-byte outputs, system diagnostics in image table	
Control elements	DIL switch	
Operating voltage	Nominal value [V DC]	24
	Permissible range [V DC]	18 ... 30
	Power failure buffering [ms]	10
Current consumption	[mA]	Typically 200
Protection class to EN 60529	IP65/IP67	
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials	Polymer	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 50
Weight	[g]	115



- Note

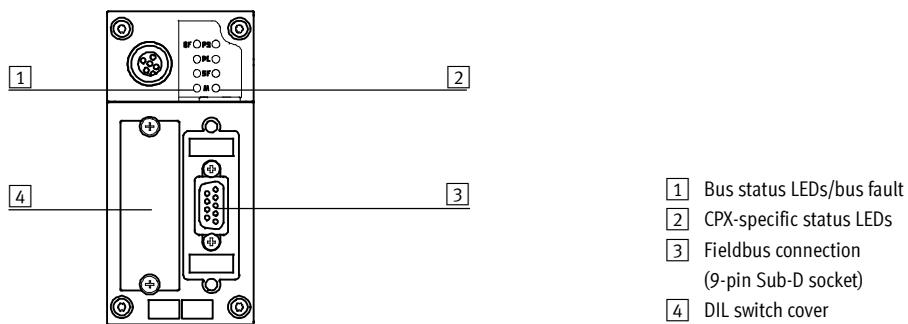
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

FESTO

Technical data – Bus node CPX-FB1

Connection and display components



Pin allocation for PROFIBUS DP interface












Pin allocation	Pin	Signal	Designation
Sub-D plug			
	1	n.c.	Not connected
	2	n.c.	Not connected
	3	RxD/TxD-P	Received/transmitted data P
	4	CNTR-P ¹⁾	Repeater control signal
	5	DGND	Data reference potential (M5V)
	6	VP	Supply voltage (P5V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Received/transmitted data N
	9	n.c.	Not connected
	Housing	Screened	Connection to housing
Bus connection M12 adapter (B-coded)			
Incoming 	1	n.c.	Not connected
	2	RxD/TxD-N	Received/transmitted data N
	3	n.c.	Not connected
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Screened	Connection to FE (functional earth)
Outgoing 	1	VP	Supply voltage (P5V)
	2	RxD/TxD-N	Received/transmitted data N
	3	DGND	Data reference potential (M5V)
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Screened	Connection to FE (functional earth)

1) The repeater control signal CNTR-P is realised as a TTL signal.

Terminal CPX

Accessories – Bus node CPX-FB13

FESTO

Ordering data		Part No.	Type
Designation			
Bus node			
	PROFIBUS bus node	195740	CPX-FB13
Bus connection			
	Sub-D plug, straight	532216	FBS-SUB-9-GS-DP-B
	Sub-D plug, angled	533780	FBS-SUB-9-WS-PB-K
	Bus connection M12 adapter (B-coded)	533118	FBA-2-M12-5POL-RK
	Connection block M12 adapter (B-coded)	541519	CPX-AB-2-M12-RK-DP
	Socket M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP	1067905	NECU-M-B12G5-C2-PB
	Plug M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP	1066354	NECU-M-S-B12G5-C2-PB
	Terminating resistor, M12, B-coded for PROFIBUS	1072128	CACR-S-B12G5-220-PB
	Inscription label holder for connection block M12	536593	CPX-ST-1
	Inspection cover, transparent	533334	AK-SUB-9/15-B
	Inspection cover	557010	AK-SUB-9/15
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5

Terminal CPX

FESTO

Accessories – Bus node CPX-FB13

Ordering data		Part No.	Type
Designation			
User manual			
	User manual for bus node CPX-FB13	German	526427 P.BE-CPX-FB13-DE
		English	526428 P.BE-CPX-FB13-EN
		Spanish	526429 P.BE-CPX-FB13-ES
		French	526430 P.BE-CPX-FB13-FR
		Italian	526431 P.BE-CPX-FB13-IT
		Swedish	526432 P.BE-CPX-FB13-SV

Terminal CPX

Technical data – Bus node CPX-FB14

FESTO



Bus node for handling communication between the electrical CPX terminal and a CANopen network master or CANopen network.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The different CANopen statuses and the fieldbus communication status are displayed via three additional LEDs.



Application

Bus connection

The bus connection is established via a 9-pin Sub-D plug (pin) as per the CAN in Automation (CiA) specification DS 102 with additional 24 V CAN transceiver supply (option as per DS 102).

The bus connector plug (with IP65/IP67 protection from Festo or IP20 protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

There are four contacts available for the four wires (CAN_L, CAN_H, 24 V, 0 V) of the incoming and outgoing bus cables.

CANopen implementation

The CPX-FB14 supports the CANopen protocol in accordance with the specifications DS 301 V4.01 and DS 401 V2.0. Implementation is based on the CiA Pre-defined Connection Set. There are four PDOs available for fast I/O data exchange.

Advanced system information can also be accessed by means of SDO communication. SDO communication also facilitates parameterisation before network startup or while the controller is running via the user program. An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

With its address capacity, the CPX-FB14 supports a large number of I/O module configurations, including pneumatic interface. By default, 8 byte digital inputs and 8 byte digital outputs can be addressed via PDO 1.

8 analogue input channels and 8 analogue output channels can be addressed via PDO 2 and 3. Status and diagnostic information can be evaluated via PDO 4. Additional 8 byte digital inputs and outputs as well as 8 analogue input and output channels can be addressed via mapping.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:

- 8 byte outputs
- 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

FESTO

Technical data – Bus node CPX-FB14

General technical data		
Type	CPX-FB14	
Fieldbus interface	Sub-D pin, 9-pin (to DS 102) Bus interface galvanically isolated via optocoupler 24 V supply for CAN interface via bus	
Baud rate	[kbps]	
Addressing range	Node ID 1 ... 127 Set using DIL switch	
Product range	Digital inputs and outputs	
Communication profile	DS 301, V4.01	
Device profile	DS 401, V2.0	
Number	PDO	4 Tx/4 Rx
	SDO	1 server SDO
Configuration support	EDS file and bitmaps	
Max. address capacity	Inputs	[byte]
	Outputs	[byte]
LED displays (bus-specific)	MS = Module status NS = Network status IO = I/O status	
Device-specific diagnostics	Via emergency message Object 1001, 1002 and 1003	
Parameterisation	Via SDO	
Additional functions	<ul style="list-style-type: none"> • Storage of the last 40 errors with timestamp (access via SDO) • 8-bit system status via transmit PDO 4 (default) • 2-byte inputs and 2-byte outputs, system diagnostics via PDO 4 • Minimum boot-up • Variable PDO mapping • Emergency message • Node guarding • Heart beat 	
Control elements	DIL switch	
Operating voltage	Nominal value	[V DC]
	Permissible range	[V DC]
	Power failure buffering	[ms]
Current consumption	Typically 200	
Protection class to EN 60529	IP65/IP67	
Temperature range	Operation	[°C]
	Storage/transport	[°C]
Materials	Polymer	
Grid dimension	[mm]	
Dimensions (incl. interlinking block) W x L x H	[mm]	
Weight	[g]	



Note

Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB14

FESTO

Connection and display components



Pin allocation for the CANopen interface








Pin allocation	Pin	Signal	Designation
Sub-D plug			
	1	n.c.	Not connected
	2	CAN_L	Received/transmitted data low
	3	CAN_GND	0 V CAN interface
	4	n.c.	Not connected
	5	CAN_Shld	Optional screened connection
	6	GND	Ground ¹⁾
	7	CAN_H	Received/transmitted data high
	8	n.c.	Not connected
	9	CAN_V+	24 V DC supply for CAN interface
	Housing	Screened	Connection to FE (functional earth)
Micro Style bus connection (M12)			
	1	Screened	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply for CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Outgoing			
	1	Screened	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply for CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Open Style bus connection			
	1	CAN_GND	0 V CAN interface
	2	CAN_L	Received/transmitted data low
	3	Screened	Connection to FE (functional earth)
	4	CAN_H	Received/transmitted data high
	5	CAN_V+	24 V DC supply for CAN interface

1) Connected internally via Pin 3

Terminal CPX

FESTO

Accessories – Bus node CPX-FB14

Ordering data		Part No.	Type
Designation			
Bus node			
	CANopen bus node	526174	CPX-FB14
Bus connection			
	Sub-D plug	532219	FBS-SUB-9-BU-2x5POL-B
	Sub-D plug, angled	533783	FBS-SUB-9-WS-CO-K
	Micro Style bus connection, 2xM12, 5-pin	525632	FBA-2-M12-5POL
	Fieldbus socket for Micro Style connection, M12, 5-pin	18324	FBSD-GD-9-5POL
	Plug for Micro Style connection, M12, 5-pin	175380	FBS-M12-5GS-PG9
	Open Style bus connection	525634	FBA-1-SL-5POL
	Terminal strip for Open Style connection, 5-pin	525635	FBSD-KL-2x5POL
	Inspection cover, transparent	533334	AK-SUB-9/15-B
	Inspection cover	557010	AK-SUB-9/15
	Inscription label holder for connection block	536593	CPX-ST-1
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	User manual for bus node CPX-FB14	German	526409 P.BE-CPX-FB14-DE
		English	526410 P.BE-CPX-FB14-EN
		Spanish	526411 P.BE-CPX-FB14-ES
		French	526412 P.BE-CPX-FB14-FR
		Italian	526413 P.BE-CPX-FB14-IT
		Swedish	526414 P.BE-CPX-FB14-SV

Terminal CPX

Technical data – Bus node CPX-M-FB20/CPX-M-FB21

FESTO



Bus node for handling communication between the electrical terminal CPX and a higher-order master via INTERBUS.

The bus node processes communication with the I/O modules.

The status of the terminal CPX is displayed as a common message via 4 CPX-specific LEDs.

The fieldbus communication status is displayed via 6 INTERBUS-specific LEDs.



Application

Bus connection

The bus connection is established via a socket with INTERBUS Rugged Line connection technology and the associated plug, with fibre-optic cables used for the power supply to the valve terminal and data transmission.

The fieldbus node is used as a remote I/O. It supports processing of max. 96 inputs and 96 outputs or max. 6 analogue I/O channels.

The I/O area is divided into:

- Digital I/O
- Analogue I/O

- System status/system diagnostics (optional)
- PCP channel (optional)

INTERBUS implementation

The CPX-M-FB20 and CPX-M-FB21 support the INTERBUS protocol to EN 50254. In addition to cyclic I/O exchange, the optional PCP channel can be used for parameterisation and diagnostic functions.

An example of this is access to the integrated diagnostic memory function, i.e. storage of the last 40 errors with timestamp, module, channel and error type.

The PCP channel provides access to advanced system information and assigns operation parameters while the controller is running via the user program.



Note

If the PCP channel is used, the maximum number of possible process data bits is reduced by 16.

Special features in combination with CPX-FB20/CPX-FB21

- Remote Controller operating mode is not supported. A CPX-FEC/CPX-CEC cannot be used in combination with CPX FB20/CPX-FB21 in a terminal CPX.

- Power is supplied via the fieldbus connection. It is therefore not possible to use an interlinking block with system supply within a terminal CPX with CPX-M-FB20/CPX-M-FB21.

- Only the valve terminals VTSA and VTSA-F with pneumatic interface VABA-S6-1-X2 can be selected as the pneumatic part.

Terminal CPX

FESTO

Technical data – Bus node CPX-M-FB20/CPX-M-FB21

General technical data		
Type	CPX-M-FB20/CPX-M-FB21	
Fieldbus interface	Rugged Line fibre-optic cable connection	
Baud rate	[Mbps]	
Bus type	Remote bus	
Max. address capacity	Inputs [bit]	96
	Outputs [bit]	96
LED displays	INTERBUS-specific	BA = Bus active FO1 = Fibre-optic cable 1 FO2 = Fibre-optic cable 2 RC = Remotebus check RD = Remotebus disable UL = Operating voltage for INTERBUS interface
	CPX-specific	M = Parameterisation SF = System fault US1 = Electronics supply, sensor supply US2 = Load supply
Device-specific diagnostics	<ul style="list-style-type: none"> Diagnostic memory Channel and module-oriented diagnostics Module undervoltage 	
Parameterisation	<ul style="list-style-type: none"> Diagnostic behaviour Fail-safe response Forcing of channels Signal setup System parameters 	
Additional functions	<ul style="list-style-type: none"> Module and system parameterisation via operator units System status can be represented using process data Additional diagnostic interface for operator units 	
Operating elements	DIL switches	
Operating voltage	Nominal value [V DC]	24 (polarity-safe)
	Permissible range [V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 90
Protection class to EN 60529	IP65/IP67	
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
CE marking (see declaration of conformity)	To EU EMC Directive	
Housing materials	Aluminium	
Note on materials	RoHS-compliant	
Grid dimension	[mm]	
Dimensions (incl. interlinking block) W x L x H	[mm]	
Product weight	CPX-FB20 [g]	1,070
	CPX-FB21 [g]	1,255



Note

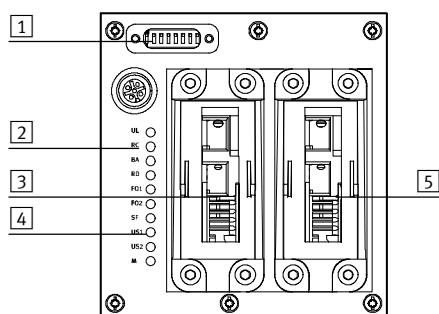
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-M-FB20/CPX-M-FB21

FESTO

Connection and display components



- [1] DIL switch
- [2] INTERBUS-specific LEDs
- [3] Fieldbus connection, incoming
- [4] CPX-specific status LEDs
- [5] Fieldbus connection, outgoing





Pin allocation for INTERBUS interface

FOC pin allocation	Pin	Wire colour	Designation
Incoming			
	A	Black	Transmitted data
	B	Orange	Received data
	1	–	24 V supply for electronics and inputs
	2	–	0 V supply for electronics and inputs
	3	–	24 V supply for valves and outputs
	4	–	0 V supply for valves and outputs
	5	–	Functional earth
Outgoing			
	A	Orange	Transmitted data
	B	Black	Received data
	1	–	24 V supply for electronics and inputs
	2	–	0 V supply for electronics and inputs
	3	–	24 V supply for valves and outputs
	4	–	0 V supply for valves and outputs
	5	–	Functional earth

Terminal CPX

FESTO

Accessories – Bus node CPX-M-FB20/CPX-M-FB21

Ordering data		Part No.	Type
Designation			
Bus node			
	INTERBUS bus node, incoming fieldbus connection	572334	CPX-M-FB20
	INTERBUS bus node, incoming and outgoing fieldbus connection	572221	CPX-M-FB21
Bus connection			
	Blanking plate for covering the DIL switches	572818	CPX-M-FB21-IB-RL
Manual			
	Manual – Bus nodes CPX-M-FB20 and CPX-M-FB21	German	575107 P.BE-CPX-FB20/21-DE
		English	575108 P.BE-CPX-FB20/21-EN
		Spanish	575109 P.BE-CPX-FB20/21-ES
		French	575110 P.BE-CPX-FB20/21-FR
		Italian	575111 P.BE-CPX-FB20/21-IT
		Swedish	575112 P.BE-CPX-FB20/21-SV

Terminal CPX

Technical data – Bus node CPX-FB23

FESTO

CC-Link

Bus node for handling communication between the electrical CPX terminal and a higher-order master for Control & Communication-Link (CC-Link) from Mitsubishi.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The fieldbus communication status is displayed via four CC-Link-specific LEDs.



Application

Bus connection

The bus connection can be selected when ordering and is established by means of a screw terminal with IP20 protection, a Sub-D plug with IP65/IP67 protection from Festo or IP20 protection from other manufacturers.

Both connection types have the function of an integrated T-distributor and thus support the connection of an incoming and outgoing bus cable.

The integrated interface with RS 485 transmission technology is designed for the typical CC-Link 3-wire connection technology (in accordance with CLPA CC-Link Spec. V1.1).

CC-Link implementation

The CPX-FB23 supports max. four stations per slave. The number of stations used can be set by means of a DIL switch. Synchronous data transmission for digital and analogue I/Os

is conducted using the bit and word ranges (Rx/Ry/RWr/RWw). The CPX-FB23 supports an address space of max. 112 digital inputs and 112 digital outputs (Rx/Ry) or up to

16 analogue inputs and 16 analogue outputs (RWr/RWw). Mixed operation of digital and analogue inputs/outputs is possible.

Example:
Station 1 + 2 = 32 digital inputs and 32 digital outputs
Station 3 = 4 analogue inputs and 4 analogue outputs

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:
• 8 byte outputs
• 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:
• 56 byte inputs
• 56 byte outputs

Terminal CPX

FESTO

Technical data – Bus node CPX-FB23

General technical data		
Type	CPX-FB23	
Fieldbus interface	Either • Sub-D socket, 9-pin • Screw terminal bus connection, IP20	
Baud rate	[kbps]	156 ... 10 000
Addressing range	1 ... 64 Set using DIL switch	
No. of stations per slave	1, 2, 3 or 4 stations Set using DIL switch	
Vendor code	0x0177	
Machine type	0x3C	
Communication types	Synchronous communication	
Configuration support	–	
Max. address capacity, inputs	Digital	Station 1, 2, 3, 4 = 64 Rx
	Analogue	Station 1, 2, 3, 4 = 16 RWr
Max. address capacity, outputs	Digital	Station 1, 2, 3, 4 = 64 Ry
	Analogue	Station 1, 2, 3, 4 = 16 RWw
LED displays (bus-specific)	RUN = Data communication OK ERROR = CRC error or data communication error SD = Send data RD = Receive data	
Device-specific diagnostics	• 8-bit system status in image table for inputs • 2 byte inputs and 2 byte outputs, system diagnostics in image table	
Parameterisation	Hold/clear by means of DIL switch	
Additional functions	Storage of the last 40 errors with timestamp (access via system diagnostics)	
Control elements	DIL switch	
Operating voltage	Nominal value [V DC]	24
	Permissible range [V DC]	18 ... 30
	Power failure buffering [ms]	10
Current consumption	[mA]	Typically 200
Protection class to EN 60529	IP65/IP67	
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials	Polymer	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 50
Weight	[g]	115



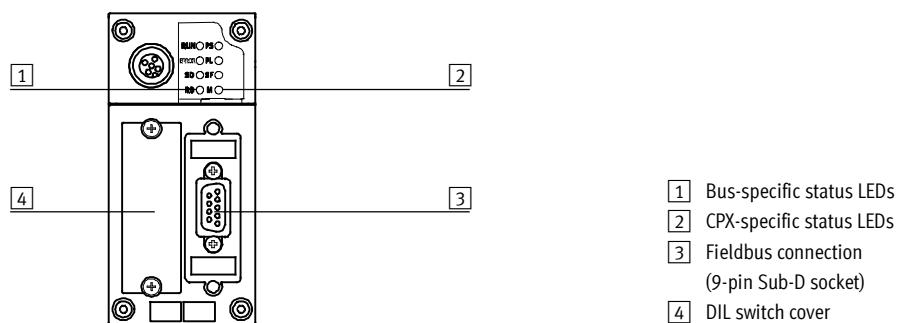
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB23

FESTO

Connection and display components



Pin allocation for the CC-Link interface






Pin allocation	Pin	Signal	Designation
Sub-D plug			
	1	n.c.	Not connected
	2	DA	Data A
	3	DG	Data reference potential
	4	n.c.	Not connected
	5	FE ¹⁾	Functional earth
	6	n.c.	Not connected
	7	DB	Data B
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	SLD	Screened
Screw terminal bus connection			
	1	FG	Functional earth/housing
	2	SLD	Screened
	3	DG	Data reference potential
	4	DB	Data B
	5	DA	Data A

1) Via RC element on housing

Terminal CPX

FESTO

Accessories – Bus node CPX-FB23

Ordering data		Part No.	Type
Designation			
Bus node			
	CC-Link bus node	526176	CPX-FB23
Bus connection			
	Sub-D plug	532220	FBS-SUB-9-GS-2x4POL-B
	Screw terminal bus connection	197962	FBA-1-KL-5POL
	Inspection cover, transparent	533334	AK-SUB-9/15-B
	Inspection cover	557010	AK-SUB-9/15
	Inscription label holder for connection block	536593	CPX-ST-1
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	User manual for bus node CPX-FB23	German	526403 P.BE-CPX-FB23-DE
		English	526404 P.BE-CPX-FB23-EN

Terminal CPX

Technical data – Bus node CPX-FB32



Bus node for handling communication between the electrical CPX terminal and the EtherNet/IP network.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules. The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.



Application

Bus connection

The bus connection is established via an M12 plug, D-coded to IEC947-5-2 with IP65/67 protection.

EtherNet/IP is an open bus system based on the Ethernet standard and TCP/IP technology (IEEE802.3).

EtherNet/IP implementation

The CPX-FB32 supports the two remote I/O and remote controller operating modes. In remote I/O operating mode, all functions of the CPX valve terminal are

directly controlled by the EtherNet/IP master (host). In addition to actuation via a bus system, it is possible to use IT technol-

ogies. An integrated web server enables diagnostic data to be visualised via HTML. Various programs support direct access to the data of the device

from the automation network. The EtherNet/IP node for CPX supports the transmission technology that conforms to DIN EN 50173/CAT 5.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:

- 8 byte outputs
- 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

FESTO

Technical data – Bus node CPX-FB32

General technical data		
Type		CPX-FB32
Fieldbus interface		Plug connector M12, D-coded, 4-pin
Baud rate	[Mbps]	10/100, full/half duplex
IP addressing		Via DHCP, DIL switch or network software
Max. address capacity, inputs	[byte]	64
Max. address capacity, outputs	[byte]	64
LED displays (bus-specific)		MS = Module status NS = Network status IO = I/O status TP = Link/traffic
Device-specific diagnostics		System, module and channel-oriented diagnostics
Parameterisation		<ul style="list-style-type: none"> Start-up parameterisation Asynchronous parameterisation via Explicit Messaging
Additional functions		<ul style="list-style-type: none"> Storage of the last 40 errors with timestamp (access via system diagnostics) 8-bit system status in image table for inputs 2-byte I/O, system diagnostics via image table
Control elements		DIL switch
Operating voltage	Nominal value	[V DC] 24
	Permissible range	[V DC] 18 ... 30
	Power failure buffering	[ms] 10
Current consumption		[mA] Typically 65
Protection class to EN 60529		IP65/IP67
Temperature range	Operation	[°C] - 5 ... +50
	Storage/transport	[°C] -20 ... +70
Materials		Polymer
Grid dimension		[mm] 50
Dimensions (incl. interlinking block) W x L x H		[mm] 50 x 107 x 50
Weight	[g]	125



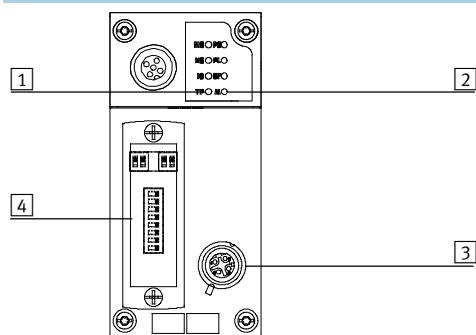
- Note
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB32

FESTO

Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-specific status LEDs
- [3] Fieldbus connection
(4-pin socket M12, D-coded)
- [4] Transparent DIL switch cover




Pin allocation for the fieldbus interface

Pin allocation	Pin	Signal	Designation
M12 socket, D-coded			
	1	TD+	Transmitted data+
	2	RD+	Received data+
	3	TD-	Transmitted data-
	4	RD-	Received data-
	Housing		Screened

Terminal CPX

FESTO

Accessories – Bus node CPX-FB32

Ordering data		Part No.	Type
Designation			
Bus node			
	EtherNet/IP bus node	541302	CPX-FB32
Bus connection			
	Plug M12x1, 4-pin, D-coded	543109	NECU-M-S-D12G4-C2-EI
	Inspection cover, transparent	533334	AK-SUB-9/15-B
	Inspection cover	557010	AK-SUB-9/15
	Inscription label holder for connection block	536593	CPX-ST-1
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	User manual for bus node CPX-FB32	German	693134 P.BE-CPX-FB32-DE
		English	693135 P.BE-CPX-FB32-EN
		Spanish	693136 P.BE-CPX-FB32-ES
		French	693137 P.BE-CPX-FB32-FR
		Italian	693138 P.BE-CPX-FB32-IT
		Swedish	693139 P.BE-CPX-FB32-SV

Terminal CPX

Technical data – Bus node CPX-FB33

FESTO



Bus node for operating the CPX valve terminal on PROFINET.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The fieldbus communication status is displayed via three bus-specific LEDs.



Application

Bus connection

The bus connection is established via two M12 sockets, D-coded to IEC61076-2-101 with IP65/67 protection.

Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality

(cross-over and patch cables can be used) that are brought together via an internal switch.

- Maximum segment length 100 m
- Transmission rate 100 Mbps

PROFINET implementation

The CPX-FB33 supports the PROFINET protocol on the basis of the Ethernet standard and TCP/IP technology to IEEE802.3.

This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs

or process equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred. The Ethernet bandwidth is sufficient to transfer both data types (real-time and non-real-time) in parallel.

The bus node features LEDs for bus status and CPX peripheral information as well as switch elements, memory stick and a diagnostic interface. The purpose of the memory stick is to guarantee fast replacement of the bus node in the event of an error. PROFINET provides the user with

access to all peripherals, diagnostic data and parameter data of the CPX valve terminal. The bus node can be used as a remote I/O or remote controller. All information relevant to the CPX can be read out and, depending on the function, changed via an MMI.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:

- 8 byte outputs
- 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

FESTO

Technical data – Bus node CPX-FB33

General technical data		
Type	CPX-FB33	
Fieldbus interface	2x socket M12, D-coded, 4-pin	
Baud rate	[Mbps]	
Protocol	PROFINET RT	
Max. address capacity	Inputs [byte]	64
	Outputs [byte]	64
LED displays	(bus-specific)	NF = Network fault TP1 = Network active port 1 TP2 = Network active port 2
	(product-specific)	M = Modify, parameterisation PL = Load supply PS = Electronic supply, sensor supply SF = System fault
Device-specific diagnostics	<ul style="list-style-type: none"> • Channel and module-oriented diagnostics • Undervoltage of modules • Diagnostic memory 	
Configuration support	GSDML file	
Parameterisation	<ul style="list-style-type: none"> • System parameters • Diagnostic behaviour • Signal setup • Fail-safe response • Forcing of channels 	
Additional functions	<ul style="list-style-type: none"> • Start-up parameterisation in plain text via fieldbus • Fast startup (FSU) • Channel-oriented diagnostics via fieldbus • Asynchronous data access via fieldbus • System status can be represented using process data • Additional diagnostic interface for operator units • Asynchronous data access via Ethernet 	
Control elements	<ul style="list-style-type: none"> • DIL switch • Optional memory card 	
Operating voltage	Nominal value [V DC]	24
	Permissible range [V DC]	18 ... 30
Current consumption	[mA]	Typically 120
Temperature range	Operation [°C]	- 5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials	Housing	Die-cast aluminium
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 50
Weight	[g]	280



Please observe the general limits and guidelines for the system when configuring the electrical modules.



Always use screws appropriate to the interlinking block (metal or plastic):

- Self-tapping screws for plastic interlinking blocks

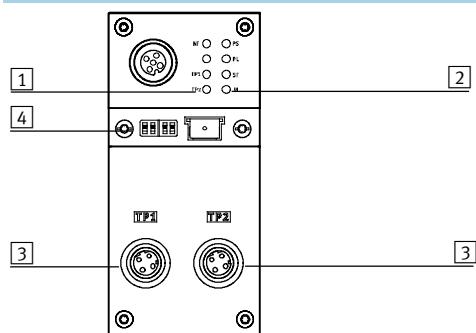
- Screws with metric thread for metal interlinking blocks

Terminal CPX

Technical data – Bus node CPX-FB33

FESTO

Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-specific status LEDs
- [3] Fieldbus connection
(4-pin socket M12, D-coded)
- [4] Transparent cover for DIL switch
and memory card




Pin allocation for the fieldbus interface

Pin allocation	Pin	Signal	Designation
M12 socket, D-coded			
	1	TD+	Transmitted data+
	2	RD+	Received data+
	3	TD-	Transmitted data-
	4	RD-	Received data-
	Housing		Screened

Terminal CPX

FESTO

Accessories – Bus node CPX-FB33

Ordering data		Part No.	Type
Designation			
Bus node			
	PROFINET bus node	548755	CPX-FB33
Bus connection			
	Plug M12x1, 4-pin, D-coded	543109	NECU-M-S-D12G4-C2-ET
	Transparent cover for DIL switch and memory card	548757	CPX-AK-P
	Memory card for PROFINET bus node, 2 MB	568647	CPX-SK-2
	Cover cap for sealing unused bus connections (10 pieces)	165592	ISK-M12
	Screws for attaching an inscription label holder to the bus node (12 pieces)	550222	CPX-M-M2,5X8-12X
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	Electronics manual, CPX bus node, type CPX-FB33	German	548759 P.BE-CPX-PNIO-DE
		English	548760 P.BE-CPX-PNIO-EN
		Spanish	548761 P.BE-CPX-PNIO-ES
		French	548762 P.BE-CPX-PNIO-FR
		Italian	548763 P.BE-CPX-PNIO-IT
		Swedish	548764 P.BE-CPX-PNIO-SV

Terminal CPX

Technical data – Bus node CPX-M-FB34

FESTO



Bus node for operating the CPX valve terminal on PROFINET IO. The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules. The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs. The fieldbus communication status is displayed via three bus-specific LEDs.



Application

Bus connection

The bus connection is established via two RJ45 push-pull sockets to IEC61076-3-106 and IEC60603 with IP65/67 protection.

Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality

(cross-over and patch cables can be used) that are brought together via an internal switch.

- Maximum segment length 100 m
- Transmission rate 100 Mbps

PROFINET implementation

The CPX-M-FB34 supports the PROFINET IO protocol based on the Ethernet standard and the TCP/IP technology to IEEE802.3. This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs

or process equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred. The Ethernet bandwidth is sufficient to transmit both data types (real-time and non-real-time) in parallel.

The bus node features LEDs for bus status and CPX peripheral information as well as switch elements, memory stick and a diagnostic interface. The purpose of the memory stick is to guarantee fast replacement of the bus node in the event of an error. PROFINET provides the user with

access to all peripherals, diagnostic data and parameter data of the CPX valve terminal. The bus node can be used as a remote I/O or remote controller. All information relevant to the CPX can be read out and, depending on the function, changed via an MMI.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:
• 8/16 byte outputs
• 8/16 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:
• 56/48 byte inputs
• 56/48 byte outputs

Terminal CPX

FESTO

Technical data – Bus node CPX-M-FB34

General technical data		
Type	CPX-M-FB34	
Fieldbus interface	2x RJ45 push-pull socket, AIDA	
Baud rate	[Mbps]	
Protocol	PROFINET RT	
Max. address capacity	Inputs [byte]	64
	Outputs [byte]	64
LED displays	(bus-specific)	NF = Network fault TP1 = Network active port 1 TP2 = Network active port 2
	(product-specific)	M = Modify, parameterisation PL = Load supply PS = Electronic supply, sensor supply SF = System fault
Device-specific diagnostics	<ul style="list-style-type: none"> • Channel and module-oriented diagnostics • Undervoltage of modules • Diagnostic memory 	
Configuration support	GSDML file	
Parameterisation	<ul style="list-style-type: none"> • System parameters • Diagnostic behaviour • Signal setup • Fail-safe response • Forcing of channels 	
Additional functions	<ul style="list-style-type: none"> • Start-up parameterisation in plain text via fieldbus • Fast startup (FSU) • Channel-oriented diagnostics via fieldbus • Asynchronous data access via fieldbus and via Ethernet • System status can be represented using process data • Additional diagnostic interface for operator units 	
Control elements	DIL switch, optional memory card	
Operating voltage	Nominal value [V DC]	24
	Permissible range [V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 120
Protection class to EN 60529	IP65, IP67	
Temperature range	Operation [°C]	- 5 ... +50
	Storage/transport [°C]	-20 ... +70
Material of housing	Die-cast aluminium	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 80
Weight	[g]	280



Please observe the general limits and guidelines for the system when configuring the electrical modules.



Always use screws appropriate to the interlinking block (metal or plastic):

- Self-tapping screws for plastic interlinking blocks

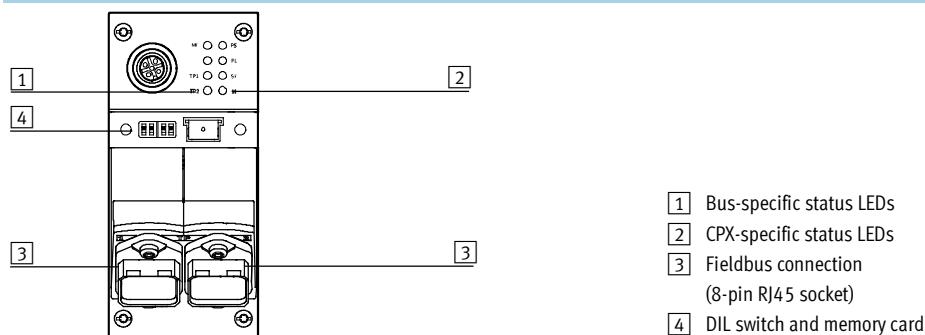
- Screws with metric thread for metal interlinking blocks

Terminal CPX


Technical data – Bus node CPX-M-FB34

FESTO

Connection and display components









Pin allocation for the fieldbus interface

Pin allocation	Pin	Signal	Designation
RJ45 plug			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Screened	Screened

Terminal CPX

FESTO

Accessories – Bus node CPX-M-FB34

Ordering data		Part No.	Type
Designation			
Bus node			
	PROFINET IO bus node	548751	CPX-M-FB34
Bus connection			
	RJ45 plug, 8-pin, push-pull	552000	FBS-RJ45-PP-GS
	Cover cap for bus connection	548753	CPX-M-AK-C
	Cover for DIL switch and memory card	548754	CPX-M-AK-M
	Memory card for PROFINET bus node, 2 MB	568647	CPX-SK-2
	Screws for attaching an inscription label holder to the bus node (12 pieces)	550222	CPX-M-M2,5X8-12X
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	Electronics manual, CPX bus node, type CPX-M-FB34	German	548759 P.BE-CPX-PNIO-DE
		English	548760 P.BE-CPX-PNIO-EN
		Spanish	548761 P.BE-CPX-PNIO-ES
		French	548762 P.BE-CPX-PNIO-FR
		Italian	548763 P.BE-CPX-PNIO-IT
		Swedish	548764 P.BE-CPX-PNIO-SV

Terminal CPX

Technical data – Bus node CPX-M-FB35

FESTO



Bus node for operating the CPX valve terminal on PROFINET IO.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The fieldbus communication status is displayed via three bus-specific LEDs.



Application

Bus connection

The bus connection is established via two SCRI push-pull sockets to IEC61754-24 (fibre-optic cable, AIDA standard) to IP65/67.

Both connections are equivalent 100BaseFX Ethernet ports that are brought together via an internal switch.

Fibre-optic cables made from plastic (POF, 980/1000 µm) are suitable for use as the transmission medium.

- Maximum segment length 50 m
- Baud rate 100 Mbps
- Supports LLDP and SNMP

PROFINET implementation

The CPX-M-FB35 supports the PROFINET IO protocol based on the Ethernet standard and the TCP/IP technology to IEEE802.3. This guarantees data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or

process equipment. Furthermore, non real-time critical information such as diagnostic information, configuration information, etc. can be transferred. The Ethernet bandwidth is sufficient to transmit both data types (real-time and non real-time) in parallel.

The bus node features LEDs for bus status and CPX peripheral information as well as switch elements, memory stick and a diagnostic interface. The purpose of the memory stick is to guarantee fast replacement of the bus node in the event of an error. PROFINET provides the user with

access to all peripherals, diagnostic data and parameter data of the CPX valve terminal. The bus node can be used as a remote I/O or remote controller. All information relevant to the CPX can be read out and, depending on the function, changed via an MMI.

Points to note in connection with CPX-FEC/CPX-CEC

When combining a fieldbus node with a control block (CPX-FEC, CPX-CEC, in bus remote controller operating mode), the connected I/Os or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node takes place

via interlinking of the CPX modules and takes up the following address capacity in the CPX system:

- 8/16 byte outputs
- 8/16 byte inputs

The following address capacity remains in the control block or CPX system for actuation of the peripherals:

- 56/48 byte inputs
- 56/48 byte outputs

Terminal CPX

FESTO

Technical data – Bus node CPX-M-FB35

General technical data		
Type	CPX-M-FB35	
Fieldbus interface	2x SCRJ push-pull socket, AIDA	
Baud rate	[Mbps]	
Protocol	PROFINET RT	
Max. address capacity	Inputs [byte]	64
	Outputs [byte]	64
LED displays	(bus-specific)	NF = Network fault TP1 = Network active port 1 TP2 = Network active port 2
	(product-specific)	M = Modify, parameterisation PL = Load supply PS = Electronic supply, sensor supply SF = System fault
Device-specific diagnostics	<ul style="list-style-type: none"> • Channel and module-oriented diagnostics • Undervoltage of modules • Diagnostic memory 	
Configuration support	GSDML file	
Parameterisation	<ul style="list-style-type: none"> • System parameters • Diagnostic behaviour • Signal setup • Fail-safe response • Forcing of channels 	
Additional functions	<ul style="list-style-type: none"> • Start-up parameterisation in plain text via fieldbus • Fast start-up (FSU) • Channel-oriented diagnostics via fieldbus • Acyclic data access via fieldbus and via Ethernet • System status can be represented using process data • Additional diagnostic interface for operator unit 	
Operating elements	DIL switch, optional memory card	
Operating voltage	Nominal value [V DC]	24
	Permissible range [V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 150
Protection class to EN 60529	IP65, IP67	
Temperature range	Operation [°C]	- 5 ... +50
	Storage/transport [°C]	-20 ... +70
Housing material	Die-cast aluminium	
Note on materials	RoHS-compliant	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 80
Product weight	[g]	280



Please observe the general limits and guidelines for the system when configuring the electrical modules.



Always use screws appropriate to the interlinking block (metal or plastic):

- Self-tapping screws for plastic interlinking blocks

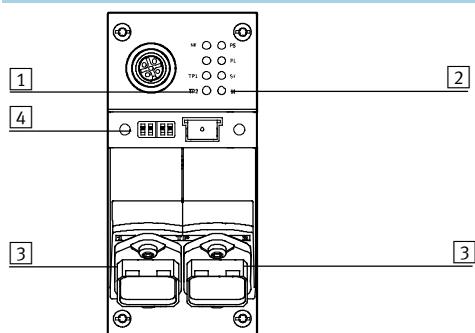
- Screws with metric thread for metal interlinking blocks

Terminal CPX

Technical data – Bus node CPX-M-FB35


FESTO

Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-specific status LEDs
- [3] Fieldbus connection (2-pin SCRJ socket)
- [4] DIL switch and memory card







Pin allocation for the fieldbus interface

Pin allocation	Pin	Signal	Designation
Plug SCRJ			
	1	Tx	Outgoing
	2	Rx	Incoming

Terminal CPX

FESTO

Accessories – Bus node CPX-M-FB35

Ordering data		Part No.	Type
Designation			
Bus node			
	PROFINET IO bus node	548749	CPX-M-FB35
Bus connection			
	Plug SCRJ, 2-pin, push-pull	571017	FBS-SCRJ-PP-GS
	Cover cap for bus connection	548753	CPX-M-AK-C
	Cover for DIL switch and memory card	548754	CPX-M-AK-M
	Memory card for PROFINET bus node, 2 MB	568647	CPX-SK-2
	Screws for attaching an inscription label holder to the bus node (12 pieces)	550222	CPX-M-M2,5X8-12X
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
Manual			
	Electronics manual, CPX bus node, type CPX-M-FB35	German	548759 P.BE-CPX-PNIO-DE
		English	548760 P.BE-CPX-PNIO-EN
		Spanish	548761 P.BE-CPX-PNIO-ES
		French	548762 P.BE-CPX-PNIO-FR
		Italian	548763 P.BE-CPX-PNIO-IT
		Swedish	548764 P.BE-CPX-PNIO-SV

Terminal CPX

Technical data – Bus node CPX-FB36



Bus node for handling communication between the electrical terminal CPX and the EtherNet/IP network.



The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the terminal CPX is displayed as a common message via 4 CPX-specific LEDs.



Application

Bus connection

The bus connection is established via an M12 plug, D-coded to IEC947-5-2 with IP65/67 protection.

EtherNet/IP is an open bus system based on the Ethernet standard and TCP/IP technology (IEEE802.3).

EtherNet/IP implementation

The CPX-FB36 supports the two operating modes: remote I/O and remote controller.
In remote I/O operating mode, all functions of the CPX valve terminal are

directly controlled by the EtherNet/IP master (host).
In addition to actuation via a bus system, it is possible to use IT technologies. An integrated web server

enables diagnostic data to be visualised via HTML. Various programs support direct access to the data of the device from the automation

network.
The EtherNet/IP node for CPX supports the transmission technology that conforms to DIN EN 50173/CAT 5.

Points to note in connection with CPX-FEC/CPX-CEC

When combining a bus node with a control block (CPX-FEC, CPX-CEC, in fieldbus remote controller operating mode), the connected I/Os or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC.
Communication between the control block and CPX bus node takes place via interlinking of the CPX modules

and takes up the following address capacity in the CPX system:

- 8 byte outputs
- 8 byte inputs

 The following address capacity

remains in the control block or CPX system for actuation of the peripherals:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

Technical data – Bus node CPX-FB36

General technical data		CPX-FB36
Type		CPX-FB36
Fieldbus interface		2x M12x1 socket, D-coded, 4-pin
Baud rates	[Mbps]	10/100
IP addressing		Via DHCP, DIL switch or network software
Max. address capacity, inputs	[byte]	64
Max. address capacity, outputs	[byte]	64
LED displays (bus-specific)		MS = Module status NS = Network status TP1 = Network active port 1 TP2 = Network active port 2
Device-specific diagnostics		<ul style="list-style-type: none"> Module and channel-oriented diagnostics Module undervoltage Diagnostic memory
Parameterisation		<ul style="list-style-type: none"> Diagnostic behaviour Fail-safe response Forcing of channels Idle mode characteristics Signal setup System parameters
Additional functions		<ul style="list-style-type: none"> EtherNet/IP Quickconnect Ring topology (DLR) Acyclic data access via "Explicit Message" and Ethernet Integrated switch Channel-oriented diagnostics via fieldbus Start-up parameterisation in plain text via fieldbus System status can be represented using process data Additional diagnostic interface for operator units
Control elements		DIL switches
Operating voltage	Nominal value [V DC]	24
	Permissible range [V DC]	18 ... 30
Current consumption (at nominal voltage, without MMI)	[mA]	Typically 100
Protection class to EN 60529		IP65, IP67
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials		PA reinforced
Note on materials		RoHS-compliant
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 50
Product weight	[g]	125

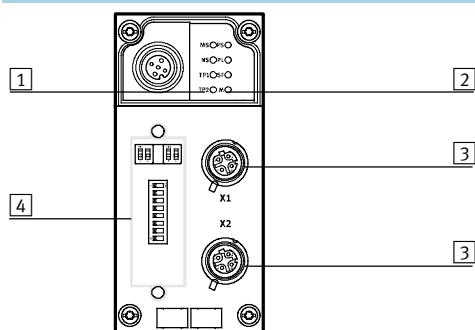


Note
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Technical data – Bus node CPX-FB36

Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-specific status LEDs
- [3] Fieldbus connection (4-pin socket M12, D-coded)
- [4] Transparent DIL switch cover





Pin allocation for the fieldbus interface

Pin allocation	Pin	Signal	Designation
M12 socket, D-coded			
	1	TD+	Transmitted data+
	2	RD+	Received data+
	3	TD-	Transmitted data-
	4	RD-	Received data-
	Hous-ing	FE	Screening

Terminal CPX

Accessories – Bus node CPX-FB36

Ordering data

Designation	Part No.	Type
Bus node		
	EtherNet/IP bus node	1912451 CPX-FB36
Bus connection		
	Plug M12x1, 4-pin, D-coded	543109 NECU-M-S-D12G4-C2-ET
	Inspection cover, transparent	533334 AK-SUB-9/15-B
	Inscription label holder for connection block	536593 CPX-ST-1
	5-pin M12 to mini USB socket adapter and controller software	547432 NEFC-M12G5-0.3-U1G5

Terminal CPX

Technical data – Bus node CPX-FB38

FESTO



Bus node for operating the CPX valve terminal on EtherCAT.

The bus node is provided with system supply via the interlinking block and processes communication with the I/O modules.

The status of the CPX terminal is displayed as a common message via four CPX-specific LEDs.

The fieldbus communication status is displayed via four bus-specific LEDs.



Application

Bus connection

The bus connection is established via two M12 sockets, D-coded to IEC61076-2-101 with IP65/67 protection.

Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality

(cross-over and patch cables can be used) that are brought together via an internal switch.

- Maximum segment length 100 m
- Transmission rate 100 Mbps

EtherCAT implementation

The CPX-FB38 supports the EtherCAT protocol based on the Ethernet standard and the TCP/IP technology to IEEE802.3.

This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors,

actuators or robot controllers, PLCs or process equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred.

The data bandwidth is sufficient to transmit both data types (real-time and non-real-time) in parallel.

The bus node features LEDs for bus status and CPX peripheral information as well as switch elements and

a diagnostic interface. The bus node can be used as a remote I/O or remote controller. All information relevant to the CPX can be read out and, dependent on the function, changed via an MMI/FMT.

Special points in combination with CPX-FEC/CPX-CEC

When a bus node is combined with a control block (CPX-FEX, CPX-CEC, in the fieldbus remote controller operating mode), the connected I/Os and/or valves, sensors and actuators are controlled via the CPX control block.

In this case, the bus node only provides the communication interface to the PLC. Communication between the control block and CPX bus node is established

via the interlinking of the CPX modules and occupies an address capacity of the CPX system of:

- 8 byte outputs
- 8 byte inputs

The remaining address capacity of the control block or CPX system for actuating the peripherals is:

- 56 byte inputs
- 56 byte outputs

Terminal CPX

FESTO

Technical data – Bus node CPX-FB38

General technical data		CPX-FB38
Type		CPX-FB38
Fieldbus interface		Two plug connectors M12, D-coded, 4-pin
Baud rate	[Mbps]	100
Max. address capacity, inputs	[byte]	64
Max. address capacity, outputs	[byte]	64
LED displays	(bus-specific)	Error = Communication error L/A1 = Network active port 1 L/A2 = Network active port 2 Run = Communication status
	(product-specific)	M = Modify, parameterisation PL = Load supply PS = Electronic supply, sensor supply SF = System fault
Device-specific diagnostics		<ul style="list-style-type: none"> • Channel and module-oriented diagnostics • Undervoltage of modules • Diagnostic memory
Configuration support		XML file
Parameterisation		<ul style="list-style-type: none"> • System parameters • Diagnostic behaviour • Signal setup • Fail-safe response • Forcing of channels
Additional functions		<ul style="list-style-type: none"> • System status can be represented using process data • Additional diagnostic interface for operator units
Control elements		DIL switch
Operating voltage	Nominal value	[V DC] 24
	Permissible range	[V DC] 18 ... 30
	Power failure buffering	[ms] 10
Current consumption		[mA] Typically 100
Protection class to EN 60529		IP65/IP67
Temperature range	Operation	[°C] - 5 ... +50
	Storage/transport	[°C] -20 ... +70
Materials	Housing	Reinforced polyamide
Grid dimension		[mm] 50
Dimensions (incl. interlinking block) W x L x H		[mm] 50 x 107 x 50
Weight		[g] 125



Please observe the general limits and guidelines for the system when configuring the electrical modules.



Always use screws appropriate to the interlinking block (metal or plastic):

- Self-tapping screws for plastic interlinking blocks

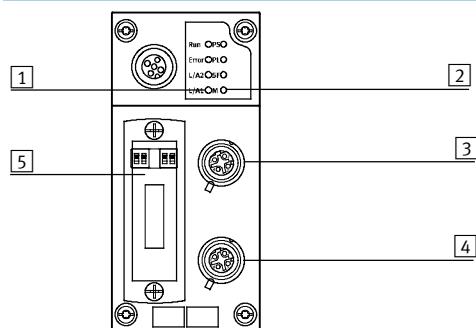
- Screws with metric thread for metal interlinking blocks

Terminal CPX

Technical data – Bus node CPX-FB38

FESTO

Connection and display components



- [1] Bus-specific status LEDs
- [2] CPX-specific status LEDs
- [3] Fieldbus connection, output (4-pin socket M12, D-coded)
- [4] Fieldbus connection, input (4-pin socket M12, D-coded)
- [5] Transparent DIL switch cover





Pin allocation for the fieldbus interface

Pin allocation	Pin	Signal	Designation
M12 socket, D-coded			
	1	TD+	Transmitted data+
	2	RD+	Received data+
	3	TD-	Transmitted data-
	4	RD-	Received data-
	Housing		Screened

Terminal CPX

FESTO


Accessories – Bus node CPX-FB38

Ordering data		Part No.	Type
Designation			
Bus node			
	EtherCAT bus node	552046	CPX-FB38
Bus connection			
	M12x1 plug, 4-pin, D-coded	543109	NECU-M-S-D12G4-C2-ET
	Inspection cover, transparent	533334	AK-SUB-9/15-B
	Cover cap for sealing unused bus connections (10 pieces)	165592	ISK-M12
	Inscription label holder for connection block	536593	CPX-ST-1
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
User manual			
	Electronics manual, CPX bus node, type CPX-FB38	German	562524 P.BE-CPX-FB38-DE
		English	562525 P.BE-CPX-FB38-EN
		Spanish	562526 P.BE-CPX-FB38-ES
		French	562527 P.BE-CPX-FB38-FR
		Italian	562528 P.BE-CPX-FB38-IT
		Swedish	562529 P.BE-CPX-FB38-SV

Terminal CPX

Technical data – CPX-CP interface

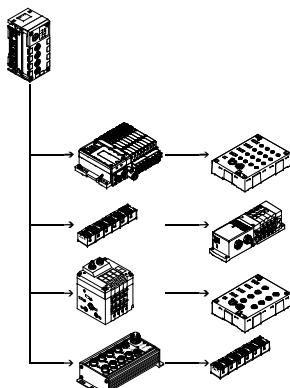FESTO



The CPX-CP electrical interface establishes the connection to CP modules of the CPI installation system via prefabricated cables. The I/O data of the connected valve terminals with CP string extension and CP input and output modules are transferred to the connected CPX bus node and thus via fieldbus to the higher-order controller. This enables modular centralised and compact decentralised concepts to be established with one system. The CP electrical interface is supported by all CPX bus nodes and the CPX-FEC.



Application

CP connection

As well as transmitting the communication data, the max. four CP strings of a CPX-CP interface also transmit the supply voltage to the connected sensors and the load supply to the valves (or outputs). Both circuits are

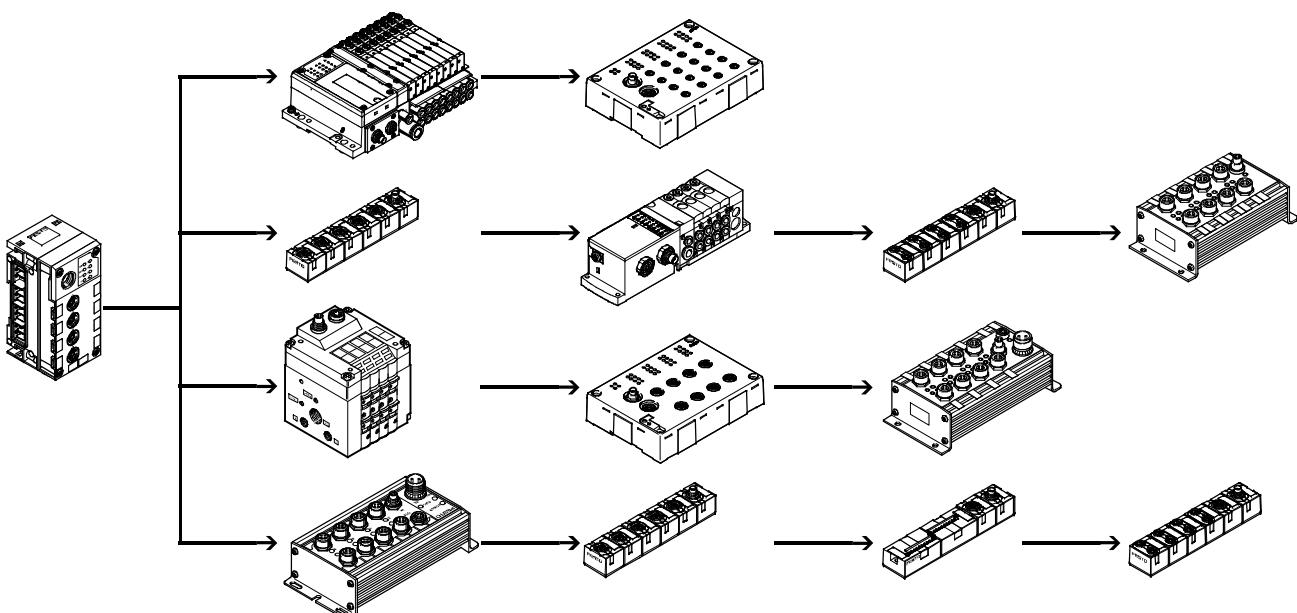
supplied separately with 24 V, but with a common reference potential. The valve terminals with CP string extension (or outputs) are supplied with voltage for the electronics and valves by the interlinking block.

The following combinations are made possible by the CP interface:

- Centralised analogue and digital inputs and outputs of the CPX terminal

- Decentralised digital inputs and outputs of the CP installation system
- Valve/valve terminals that can be connected both centrally and decentrally

Configuration example – CP interface with CP modules



Terminal CPX

FESTO

Technical data – CPX-CP interface

Implementation

The CPX-CP interface supports the CPI system:

- Max. 4 individual electronically protected CP strings
- Max. 4 CP modules per string
- Max. 32 inputs/32 outputs per string
- The maximum length of a string is 10 m. If the CP interface is positioned centrally, the CP system can cover an area of 20 m in diameter
- Modules with CPI functionality



Note

When arranging the CP modules it should be taken into consideration that CP input modules without CPI functionality should always be placed at the end of a string.

The following CP module variants are available:

- Input modules with 8 or 16 digital inputs (connection technology M8, M12 and CageClamp)
- Output modules with 4 or 8 digital outputs (connection technology M12)
- Valve terminals with CP string extension (up to 32 solenoid coils, different valve functions)

CPI modules support the following functions:

- Module-oriented diagnostics
- Module/channel-oriented parameterisation
- Support for all functions by the CPX-MMI or CPX-FMT operator unit
- Module can be positioned anywhere within the string

Several CP interface modules can be combined in one CPX terminal, depending on the address capacity of the bus node.
Example:

- CPX-FB13 (512 I/O)
- Max. 4 CP Interface modules (128 I/O each) possible

Configuration

The following rules apply for a string of a CPX-CP interface:

- Max. one output module or one valve terminal without CPI functionality
- Max. one output module without CPI functionality or one valve terminal with CP string extension
- Any number of CP modules with CPI functionality, up to the maximum limit of 4 modules and/or 32 inputs/32 outputs per string



Note

The remanent saving of configuration data means that changes in the configuration or faulty modules are still displayed even after a voltage failure.

Maximum extension:

- 4 input modules and 4 valve terminals/output modules without CPI functionality
- 16 CP modules with CPI functionality

The configuration of the strings with respect to the module type and position of the modules in the string is entered by activating the SAVE key in the CPX-CP interface and saved there remanently.
Saved data are retained even when the CP interface is isolated from the voltage supply.

The representation of the CP interface within a CPX terminal and thus at the fieldbus is dependent on the characteristics of the relevant fieldbus system. In addition to input and output addressing, this also applies to the representation of the diagnostics and parameterisation of the CP module and the characteristics of the CPI system.

Terminal CPX

Technical data – CPX-CP interface

FESTO

General technical data		CPX-CP-4-FB
Type		CPX-CP-4-FB
Brief description		CP interface
Max. number of	CP strings	4
	CP modules per string	4
	Outputs per string	32
	Inputs per string	32
CP connection		M9 socket, 5-pin
Baud rate	[kbps]	1,000
Cycle time	CP modules without CPI functionality	[ms]
	CP modules with CPI functionality	[ms]
LED displays		L1 ... 4 = Status of the CP string 1 ... 4 PS = Electronic supply, sensor supply PL = Load supply RN = Status of the CP system SF = System fault
Device-specific diagnostics		Via bus node
Operating voltage	Nominal value	[V DC]
	Permissible range	[V DC]
	Power failure buffering	[ms]
Supply voltage of sensors	[V DC]	24 ±25% coming from bus node
Load voltage of actuators	[V DC]	24 ±10% coming from bus node
Current consumption	Without CP modules	[A]
	Per CP string	[A]
Protection class to EN 60529		IP65/IP67
Temperature range	Operation	[°C]
	Storage/transport	[°C]
Materials		Polyamide
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 45
Weight	[g]	140



Note

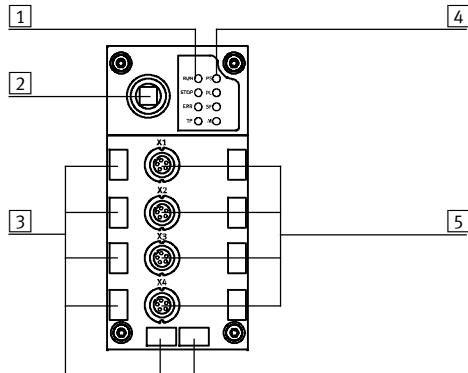
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX

Accessories CPX-CP interface


FESTO

Connection and display components



- [1] CP string LEDs
- [2] SAVE key
- [3] Holders for inscription labels (IBS 6x10)
- [4] CPX-specific status LEDs
- [5] CP connections
for up to 4 strings (0 ... 3)

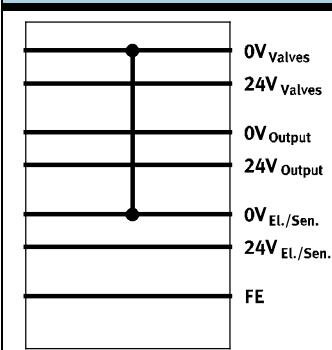Power supply




The module combines the 0 V potential of the power supply for electronics and sensors with the 0 V potential of the power supply for valves.
If all poles of the valves of a pneumatic interface connected to the right of the CP interface are to be switched off, an appropriate interlinking block with additional power supply must be used to the right of the CP interface.

Terminal CPX


Accessories CPX-CP interface

FESTO

Ordering data			
Designation		Part No.	Type
CP interface			
	Interface for max. 16 I/O modules and valve terminals of the CPI system	526705	CPX-CP-4-FB
Bus connection			
	Cover cap	M9	356684 FLANSCHDOSE SER.712
		M12	165592 ISK-M12
	Connecting cable WS-WD	0.25 m	540327 KVI-CP-3-WS-WD-0,25
		0.5 m	540328 KVI-CP-3-WS-WD-0,5
		2 m	540329 KVI-CP-3-WS-WD-2
		5 m	540330 KVI-CP-3-WS-WD-5
		8 m	540331 KVI-CP-3-WS-WD-8
	Connecting cable GS-GD	2 m	540332 KVI-CP-3-GS-GD-2
		5 m	540333 KVI-CP-3-GS-GD-5
		8 m	540334 KVI-CP-3-GS-GD-8
	Inscription label holder for connection block		536593 CPX-ST-1
User manual			
	User manual for CPX-CP interface	German	539293 P.BE-CPX-CP-DE
		English	539294 P.BE-CPX-CP-EN
		Spanish	539295 P.BE-CPX-CP-ES
		French	539296 P.BE-CPX-CP-FR
		Italian	539297 P.BE-CPX-CP-IT
		Swedish	539298 P.BE-CPX-CP-SV

Terminal CPX

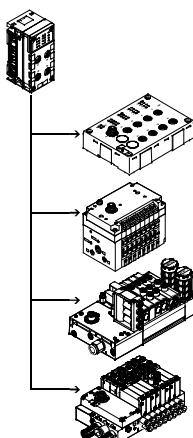Technical data – Interface CPX-CTEL



The electrical interface CPX-CTEL master establishes the connection to modules with I-Port interface (device) from the CTEL/CTEU series. The I/O data from the connected devices is transferred to the connected CPX bus node and therefore transferred to the higher-level controller via fieldbus. A maximum of 4 devices can be connected to a CPX-CTEL master via appropriate M12- interfaces.



Application

I-Port interface

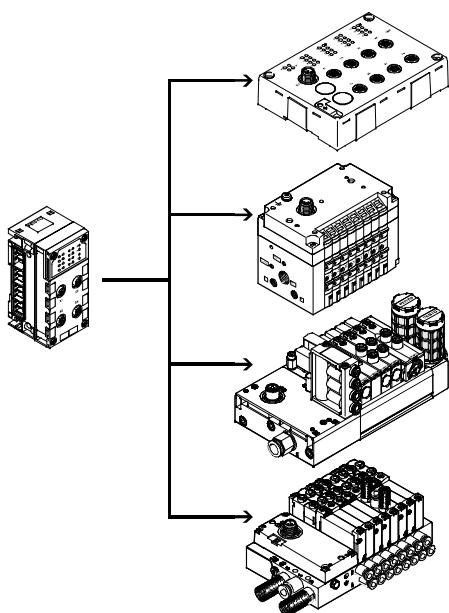
As well as transmitting the communication data, the I-Port interfaces of a CPX-CTEL master also transmit the power supply for the

connected sensors and the load supply for the valves (or outputs). Both circuits are supplied separately

with 24 V, with a separate reference potential. The connecting cables used must meet

the increased requirements resulting from their double function as a signal line and power supply cable.

Sample configuration – CPX-CTEL master with CTEL modules



The CPX-CTEL master provides four I-Port interfaces to which one device each can be connected. I-Port is an interface for exchanging serial data for connecting decentralised modules or valve terminals from Festo. The I-Port interface is based on IO-Link and is compatible with it in certain areas. The connection type corresponds to a star topology. In other words, only one module or valve terminal can be connected to each I-Port.

The restrictions compared to IO-Link include:

- Permanently set baud rate of 230.4 kbps
- SIO mode is not supported
- Max. 32 bytes of input data and 32 bytes of output data
- Only one dump of the master commands is used
- Configuration via IODD is not supported

Terminal CPX

Technical data – Interface CPX-CTEL

Implementation

The CPX-CTEL master from Festo enables modules with an I-Port interface to be connected to a CPX system:

- Max. 4 devices with individual electronic fuse protection
- Max. 64 inputs/64 outputs per I-Port interface
- The maximum length of a string is 20 m

The following device variants are available:

- Input modules with 16 digital inputs (3-pin M8 and 5-pin M12 connection technology)
- Valve terminals with I-Port interface (up to 48 solenoid coils, different valve functions)

The decentralised arrangement of the modules and valve terminals with I-Port enables them to be mounted near the cylinders and actuators/sensors to be controlled. This allows the use of shorter air supply lines and sensor cables or possibly smaller valves, which saves costs.

Several CPX-CTEL masters can be combined in one CPX terminal, depending on the address capacity of the bus node.
Example:

- CPX-FB13 (512 I/O)
- Max. 2 CPX-CTEL masters (256 I/O each) possible

Configuration

Setting

The precise number of I/O bytes made available is geared towards the requirements of the connected devices and the selected operating mode. The operating mode and configuration presetting of the CPX-CTEL master can be defined by the user.

DIL switches are used for selecting the operating mode and making the setting for manual configuration. These DIL switches are not required during operation and are only accessible in unassembled condition.

Manual configuration

With manual configuration (tool change mode), the number of inputs and outputs in the process image of the CPX system or higher-level fieldbus can be manually defined via the DIL switches.

The process image then always has the same number of bytes, regardless of the connected devices. The defined I/O length always applies to all four I-Ports (max. 8 bytes per I-Port).

Automatic configuration

With automatic configuration, the I/O length for each I-Port is individually determined and this value is used to select the appropriate or next highest configuration presetting.

Power supply for I-Port devices

The CPX-CTEL master provides two separate power supplies for the connected devices:

- One for operating the device and the inputs connected to it
- One for outputs and valves connected to the device

The power supply for devices and inputs comes from the power supply for the electronics and sensors of the CPX terminal. The power supply for outputs and valves comes from the power supply

for the valves of the CPX terminal. The interlinking block with additional power supply enables a separate voltage supply for valves and outputs. This allows this supply voltage to be

switched off separately. In other words, the valves and outputs of the connected I-Port devices can be switched off separately without having to switch off the devices themselves.

Terminal CPX

Technical data – Interface CPX-CTEL

General technical data		
Type	CPX-CTEL-4-M12-5POL	
Protocol	I-Port	
Max. address capacity	Outputs [bit]	256
	Inputs [bit]	256
I-Port connection	4x M12 socket, 5-pin, A-coded	
Number of I-Port interfaces	4	
Max. cable length	[m]	20
Internal cycle time	[ms]	1 per 8 bits of user data
Electrical isolation	Channel – channel	No
	Channel – internal bus	Yes, using an intermediate supply
LED displays	X1 ... 4 = Status of the I-Port interface 1 ... 4 PS = Electronics supply PL = Load supply -L- = Module fault	
Diagnostics	<ul style="list-style-type: none"> • Communication error • Module short circuit • Module-oriented diagnostics • Undervoltage 	
Parameterisation	<ul style="list-style-type: none"> • Diagnostic behaviour • Failsafe per channel • Forces per channel • Idle mode per channel • Module parameters • Tool change mode 	
Additional functions	Tool change mode	
Operating elements	DIL switch	
Operating voltage	Nominal value [V DC]	24 (reverse polarity protected)
	Permissible range [V DC]	18 ... 30
	Power failure buffering [ms]	10
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply per channel	[A]	4x 1.6
Max. residual output current per channel	[A]	4x 1.6
Protection class to EN 60529	IP65/IP67	
Temperature range	Operating [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials	PA reinforced, PC	
Note on materials	RoHS-compliant	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block) W x L x H	[mm]	50 x 107 x 55
Product weight	[g]	110

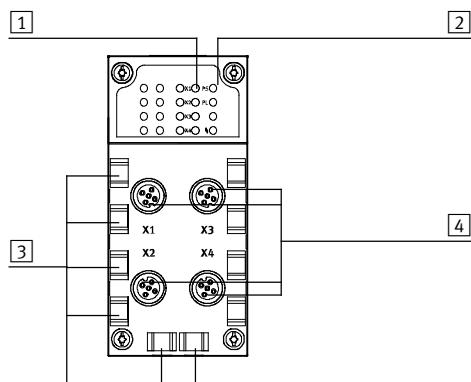


- Note
Please observe the general limits and guidelines for the system when configuring the electrical modules.

Terminal CPX


Technical data – Interface CPX-CTEL

Connection and display components




- [1] Status LEDs for I-Port interfaces
- [2] CPX-specific status LEDs
- [3] Holders for inscription labels (IBS 6x10)
- [4] I-Port interfaces for up to 4 devices

Pin allocation – I-Port interface

Pin allocation	Pin	Signal	Designation
	1	24 V _{SEN}	24 V DC supply voltage for electronics and inputs
	2	24 V _{VAL}	24 V DC load voltage supply for valves and outputs
	3	0 V _{SEN}	0 V DC supply voltage for electronics and sensors
	4	C/Q I-Port	Communication signal C/Q, data cable
	5	0 V _{VALVES}	0 V DC load voltage supply for valves and outputs

Dimensions

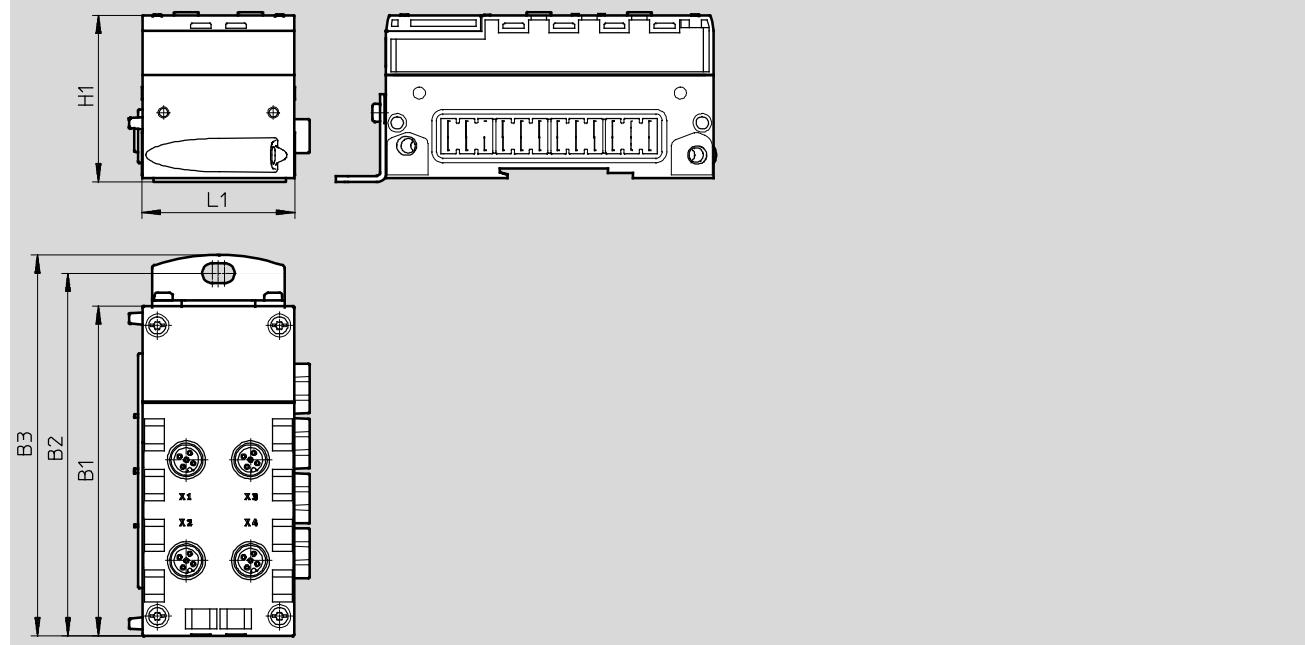Download CAD data → www.festo.com





Type	B1	B2	B3	H1	L1
CPX-CTEL-4-M12-5POL	108.1	118.9	124.9	55.1	50

Terminal CPX

Accessories – Interface CPX-CTEL

Ordering data

Designation		Part No.	Type
CPX-CTEL master			
	Interface for max. 4 I/O modules and valve terminals with I-Port interface (devices)	1577012	CPX-CTEL-4-M12-5POL
Bus connection			
	Cover cap	M12	165592 ISK-M12
	Inscription label holder for manifold block		536593 CPX-ST-1
Connecting cable			
	-	574321	NEBU-M12G5-E-5-Q8N-M12G5
		574322	NEBU-M12G5-E-7.5-Q8N-M12G5
		574323	NEBU-M12G5-E-10-Q8N-M12G5
Manual			
	Manual CPX-CTEL master	German	574600 P.BE-CPX-CTEL-DE
		English	574601 P.BE-CPX-CTEL-EN
		Spanish	574602 P.BE-CPX-CTEL-ES
		French	574603 P.BE-CPX-CTEL-FR
		Italian	574604 P.BE-CPX-CTEL-IT
		Swedish	574605 P.BE-CPX-CTEL-SV

Control block CPX-CMXX

Technical data

The control block CPX-CMXX is an intelligent module in the CPX terminal for controlling electric drive units. Individual axis and simple multi-axis applications can easily be implemented. Programming is not necessary. Configuration, parameterisation and commissioning of the application is easily achieved with the Festo Configuration Tool (FCT).

- Configuration of two axes groups with up to four axes each is possible
- There are 1024 position sets available per axes group
- Input or Teach-In of positions in specified set structure
- Parameterisation via Ethernet
- Communication protocol: FHPP-MAX, Festo handling and positioning profile for multi-axis movements.
- Control of drive units via CANopen



General technical data	
Protocol	FHPP-MAX
Maximum address volume for inputs [byte]	16
Maximum address volume for outputs [byte]	16
LED displays (bus-specific)	RUN: Program is executed STOP: Program is stopped ERR: Error in the program execution TP: Status of Ethernet connection
LED displays (product-specific)	M: Modify, parameterisation PS: Electronic supply, sensor supply
Device-specific diagnostics	Diagnostic memory Channel and module-oriented diagnostics Undervoltage/short circuit of modules
Parameterisation	System parameters
Operating elements	Rotary switch for RUN/STOP
Configuration support	Festo Configuration Tool (FCT)
Additional functions	System status can be displayed using process data Additional diagnostic interface for FCT
Supported kinematic system	2-axis gantries (X-Z / Y-Z / X-Y) 3-axis gantries (X-Y-Z)
Total number of axes	8
Distribution of axes	2 groups with max. 4 axes
Nominal operating voltage [V DC]	24
Operating voltage range [V DC]	18 ... 30
Power failure bridging [ms]	10
Intrinsic current consumption at nominal operating voltage [mA]	Typ. 85
Protection class to EN 60529	IP65/IP67
Dimensions W x L x H (including interlinking block) [mm]	50 x 107 x 55
Product weight [g]	155
Materials	
Housing	Reinforced polyamide, polycarbonate
Note on materials	RoHS-compliant

Control block CPX-CMXX

FESTO

Technical data

Technical data – Interfaces

Ethernet

Ethernet interface	Socket RJ45, 8-pin, for configuration only
--------------------	--

Interface

Control interface	CAN bus
-------------------	---------

Baud rate

[Mbit/s]


1

Operating and environmental conditions

Ambient temperature	[°C]	-5 ... +50
---------------------	------	------------

Storage temperature	[°C]	-20 ... +70
---------------------	------	-------------

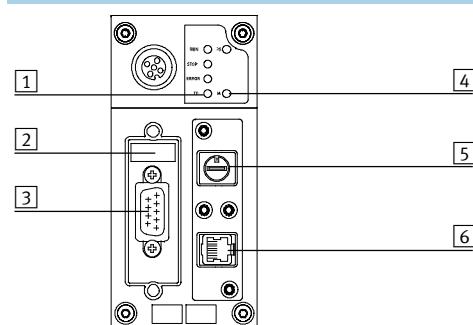Connection and display components



- [1] LED display, bus-specific
- [2] DIL switch
- [3] Control interface (plug, Sub-D, 9-pin)
- [4] LED display, product-specific
- [5] 16-position rotary switch (RUN/STOP)
- [6] Ethernet interface (RJ45, socket, 8-pin)

Pin allocation – Control interface


	Pin	Signal	Meaning
Sub-D plug			
	1	n.c.	Not connected
	2	CAN_L	CAN low
	3	CAN_GND	CAN ground
	4	n.c.	Not connected
	5	CAN_SHLD	Connection to functional earth (FE)
	6	CAN_GND	CAN ground (optional) ¹⁾
	7	CAN_H	CAN high
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing	Screened	Plug housing must be connected to FE


1) If a drive controller is connected to an external power supply, CAN ground (optional), pin 6, cannot be used on the CPX-CMXX.

Control block CPX-CMXX

Technical data

FESTO




Pin allocation – Ethernet interface			
	Pin	Signal	Meaning
Plug RJ45			
	1	TD+	Transmitted data+
	2	TD-	Transmitted data-
	3	RD+	Received data+
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	RD-	Received data-
	7	n.c.	Not connected
	8	n.c.	Not connected
	Housing	Screened	Screened

Ordering data		
Designation	Part No.	Type
	Control block	555667 CPX-CMXX

Control block CPX-CMXX

FESTO

Accessories

Ordering data – Bus connection		Part No.	Type
Designation			
	Sub-D plug, 9-pin	532219	FBS-SUB-9-BU-2x5POL-B
	Bus connection, plug 2xM12, 5-pin	525632	FBA-2-M12-5POL
	Plug socket for fieldbus connection, M12, 5-pin	18324	FBSD-GD-9-5POL
	Plug M12, 5-pin	175380	FBS-M12-5GS-PG9
	Bus connection, 5-pin	525634	FBA-1-SL-5POL
	Bus connection, screw terminal, 5-pin	525635	FBSD-KL-2x5POL
	Plug RJ45, 8-pin	534494	FBS-RJ45-8-GS
	Cover for RJ45 connection	534496	AK-RJ45
	Inspection cover, transparent for plug/socket Sub-D	533334	AK-SUB-9/15-B
	Cover for plug/socket Sub-D	557010	AK-SUB-9/15
	Inscription label holder for connection block	536593	CPX-ST-1

Documentation			
Designation	Language	Part No.	Type
	German	564221	P.BE-CPX-CMXX-DE
	English	564222	P.BE-CPX-CMXX-EN
Description of Festo handling and positioning profile for multi-axis movements FHPP-MAX	German	564223	P.BE-CMXX-FHPP-SW-DE
	English	564224	P.BE-CMXX-FHPP-SW-EN

Control block CPX-CM-HPP

Technical data

The control block CPX-CM-HPP is a module in the CPX terminal for controlling electric drives.

The control component is independent of the bus node used. This means that Festo's electric drive technology is compatible with all industrial communication interfaces.

The control block does not need to be programmed.

- Max. 4 individual electric axes can be controlled via CAN bus
- No programming required
- Standardised communication with the drives via the Festo Handling and Positioning Profile (FHPP)
- Quick configuration and diagnostics via the operator unit CPX-MMI
- Simple, flexible and cost-effective



General technical data	
Fieldbus interface	1x socket M9, 5-pin
Protocol	FHPP
Max. address volume for inputs [byte]	32
Max. address volume for outputs [byte]	32
LED display (product-specific)	Error: Error PL: Power supply
Device-specific diagnostics	Diagnostic memory
	Channel and module-oriented diagnostics
	Undervoltage/short circuit of modules
Parameterisation	Forcing of channels
	System parameters
Configuration support	Operator unit CPX-MMI
Total number of axes	4
Nominal operating voltage [V DC]	24
Operating voltage range [V DC]	18 ... 30
Power failure buffering [ms]	10
Intrinsic current consumption at nominal operating voltage [mA]	Typically 80
Protection class to EN 60529 (plug connector plugged in)	IP65/IP67
Dimensions W x L x H [mm] (incl. interlinking block)	50 x 107 x 55
Product weight [g] (without interlinking block)	140
Materials	
Housing	PA, reinforced
	PC
Note on materials	RoHS-compliant

Control block CPX-CM-HPP

FESTO

Technical data


Technical data – Interfaces

Interface		
Control interface	CAN-Bus	
Baud rate [Mbps]	1	

Operating and environmental conditions

Ambient temperature [°C]	-5 ... +50
Storage temperature [°C]	-20 ... +70
CE mark (see declaration of conformity)	To EU Low Voltage Directive

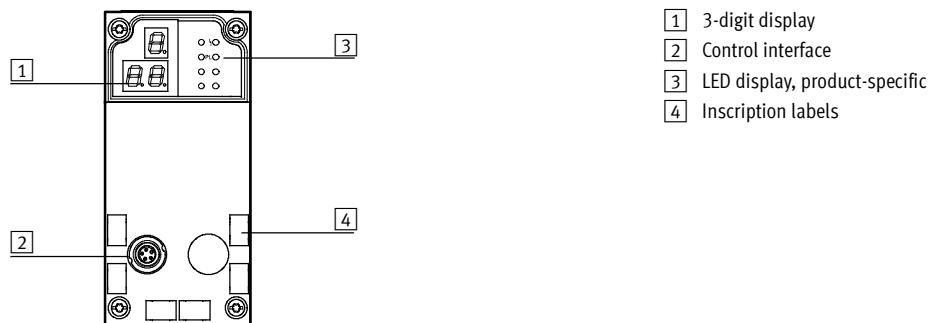Connection and display components



Pin allocation – Control interface

	Pin	Signal	Meaning
Plug M9, 5-pin			
1	n.c.	Not connected	
2	n.c.	Not connected	
3	CAN_GND	CAN ground	
4	CAN_H	CAN high	
5	CAN_L	CAN low	
Housing	Screened	Cable screen must be connected to functional earth (FE)	

Permissible CPX modules

CPX module	Protocol	Remarks
CPX-FEC	–	Revision 16 (R16) and above
CPX-CEC-...	–	In preparation
CPX-FB6	INTERBUS	Not available
CPX-FB11	DeviceNet	Revision 22 (R22) and above
CPX-FB13	PROFIBUS-DP	Revision 23 (R23) and above
CPX-FB14	CANopen	Revision 24 (R24) and above
CPX-FB23	CC-Link	In preparation
CPX-FB32	EtherNet/IP	In preparation
CPX-FB33, FB34, FB35	PROFINET	In preparation
CPX-FB38	EtherCAT	In preparation


Ordering data

Designation	Part No.	Type
	562214	CPX-CM-HPP

Control block CPX-CM-HPP

Accessories

FESTO

Ordering data – Bus connection		Cable length [m]	Part No.	Type
	Connecting cable	2	563711	NEBC-M9W5-K-2-N-LE3
		5	563712	NEBC-M9W5-K-5-N-LE3
	Plug for CAN bus interface, Sub-D, 9-pin, without terminating resistor			533783 FBS-SUB-9-WS-CO-K
	Inscription label holder for manifold block			536593 CPX-ST-1

Documentation		Language	Part No.	Type
	Manual – Control block CPX-CM-HPP	German	568683	P.BE-CPX-CM-HPP-DE
		English	568684	P.BE-CPX-CM-HPP-EN

Axis controllers CPX-CMAX

FESTO

Technical data

The axis controller CPX-CMAX is intended exclusively for valve terminals CPX.



General technical data

Operating voltage

Operating voltage range	[V DC]	18 ... 30
Nominal operating voltage	[V DC]	24
Current consumption at nominal operating voltage	[mA]	200
Fuse protection (short circuit)		Electronic
Power failure bridging	[ms]	10

Load voltage

Load voltage range	[V DC]	20 ... 30
Nominal load voltage	[V DC]	24
Perm. load current	[A]	2.5
Fuse protection (short circuit)		Electronic

Number of axis strings

1

Axes per string

1

Length of connecting cable to axis

[m]

≤ 30

Max. no. of modules

7

Display

7-segment display

Assigned addresses	Outputs	[bit]	8x8
	Inputs	[bit]	8x8

Operating modes

Record Select mode

Direct mode

Controller types

Position control

Force control

Diagnostics

Module-orientated

Via local 7-segment display

Status display

Module status

Power Load

Display/Error Axis X

MC Axis X

Control interface

Data	CAN bus with Festo protocol
	Digital

Electrical connection	5-pin
	M9
	Socket

Materials: Housing

Reinforced polyamide

Note on materials

RoHS-compliant

Product weight

[g]

140

Dimensions	Length	[mm]	107
	Width	[mm]	50
	Height	[mm]	55

Axis controllers CPX-CMAX


Technical data

FESTO

Operating and environmental conditions


Ambient temperature	[°C]	-5 ... +50
Relative air humidity	[%]	5 ... 95, non-condensing
Protection class to IEC 60529		IP65

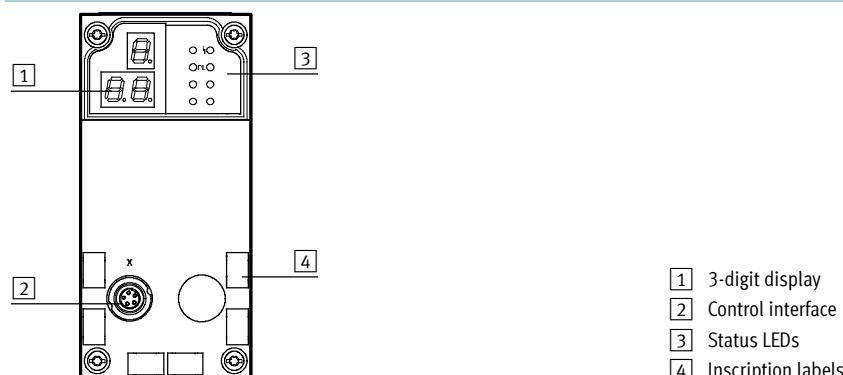Connection and display components



- [1] 3-digit display
- [2] Control interface
- [3] Status LEDs
- [4] Inscription labels

Pin allocation – plug [2]

	Pin	Signal	Designation
	1	+24 V	Nominal operating voltage
	2	+24 V	Load voltage
	3	0 V	Ground
	4	CAN_H	CAN high
	5	CAN_L	CAN low
	Housing	Screened	Cable screening

Permitted bus nodes/FEC

Bus node/FEC	Protocol	Max. no. of CMAX modules
CPX-FEC	-	7
CPX-FB6	Interbus	1
CPX-FB11	DeviceNet ¹⁾	7
CPX-FB13	PROFIBUS DP ²⁾	7
CPX-FB14	CANopen	2
CPX-FB23	CC-Link	7
CPX-FB32	Ethernet/IP	7
CPX-FB33	PROFINET, M12	7
CPX-M-FB34	PROFINET, RJ45	7
CPX-FB38	EtherCat	7

1) With Revision 20 (R20)

2) With Revision 23 (R23)


PROFIBUS®, DeviceNet®, CANopen®, INTERBUS®, CC-LINK®, EtherCAT®, PROFINET®, EtherNet/IP® is a registered trademark of its respective trademark holder in certain countries.

Axis controllers CPX-CMAX


FESTO

Accessories

Ordering data – Axis controllers

	Brief description	Part No.	Type
	Order code in the CPX configurator: T21	548932	CPX-CMAX-C1-1


Ordering data – Connecting cables

	Brief description	Cable length [m]	Part No.	Type
	Connecting cable with angled plug and angled socket	0.25	540327	KVI-CP-3-WS-WD-0,25
		0.5	540328	KVI-CP-3-WS-WD-0,5
		2	540329	KVI-CP-3-WS-WD-2
		5	540330	KVI-CP-3-WS-WD-5
		8	540331	KVI-CP-3-WS-WD-8
	Connecting cable with straight plug and straight socket	2	540332	KVI-CP-3-GS-GD-2
		5	540333	KVI-CP-3-GS-GD-5
		8	540334	KVI-CP-3-GS-GD-8
	Connector for control cabinet through-feed	-	543252	KVI-CP-3-SSD


Ordering data – Screws

	Brief description	Part No.	Type
	For mounting on the metal interlinking block	550219	CPX-M-M3X22-4X

Ordering data – Inscription labels

	Brief description	Number	Part No.	Type
	Inscription labels 6x10, in frames	64	18576	IBS-6X10

Documentation¹⁾

	Language	Part No.	Type
	DE	559750	P.BE-CPX-CMAX-SYS-DE
	EN	559751	P.BE-CPX-CMAX-SYS-EN
	ES	559752	P.BE-CPX-CMAX-SYS-ES
	FR	559753	P.BE-CPX-CMAX-SYS-FR
	IT	559754	P.BE-CPX-CMAX-SYS-IT
	SV	559755	P.BE-CPX-CMAX-SYS-SV

1) Manual in paper form is not included in the scope of delivery.

End-position controllers CPX-CMPX

Technical data

The end-position controller CPX-CMPX is intended exclusively for use in valve terminals CPX.

FESTO



General technical data

Operating voltage

Operating voltage range	[V DC]	18 ... 30
Nominal operating voltage	[V DC]	24
Current consumption at nominal operating voltage	[mA]	80

Load voltage

Load voltage range	[V DC]	20 ... 30
Nominal load voltage	[V DC]	24
Perm. load current	[A]	2.5

Number of axes per module

1

Length of connecting cable to axis

[m]

≤ 30

Max. no. of modules

9

Display

7-segment display

Control elements

3 keys

Assigned addresses

Outputs [bit]

6x8

Inputs [bit]

6x8

Diagnostics

Module-orientated

Via local 7-segment display

Via operator unit CPX-MMI-1

Status display

Module status

Power Load

Control interface

Data

CAN bus with Festo protocol

Digital

Electrical connection

5-pin

M9

Socket

Materials: Housing

Reinforced polyamide

Product weight

[g]

240

Dimensions

Length [mm]

107

Width [mm]

50

Height [mm]

55

End-position controllers CPX-CMPX


FESTO

Technical data

Operating and environmental conditions

Ambient temperature	[°C]	-5 ... +50
Relative air humidity	[%]	5 ... 95, non-condensing
Protection class to IEC 60529		IP65
CE mark (see declaration of conformity)		To EU EMC Directive

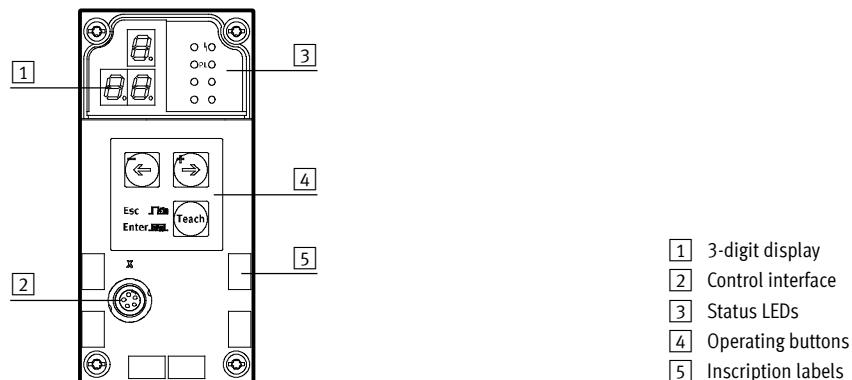Connection and display components



Pin allocation – plug [2]

	Pin	Signal	Designation
1	+24 V	Nominal operating voltage	
2	+24 V	Load voltage	
3	0 V	Ground	
4	CAN_H	CAN high	
5	CAN_L	CAN low	
Housing	Screened	Cable screening	

Permitted bus nodes/FEC

Bus node/FEC	Protocol	Max. no. of CMPX modules
CPX-FEC	–	9
CPX-FB6	Interbus	1
CPX-FB11	DeviceNet ¹⁾	9
CPX-FB13	PROFIBUS DP ²⁾	9
CPX-FB14	CANopen	3
CPX-FB23	CC-Link	9
CPX-FB32	Ethernet/IP	9
CPX-FB33	PROFINET, M12	9
CPX-M-FB34	PROFINET, RJ45	9
CPX-FB38	EtherCat	9

1) With Revision 20 (R20)


2) With Revision 22 (R22)


PROFIBUS®, DeviceNet®, CANopen®, INTERBUS®, CC-LINK®, EtherCAT®, PROFINET®, EtherNet/IP® is a registered trademark of its respective trademark holder in certain countries.

End-position controllers CPX-CMPX


Accessories


FESTO

Ordering data – End-position controllers		Part No.	Type
	Order code in the CPX configurator: T20	548931	CPX-CMPX-C-1-H1

Ordering data – Connecting cables		Cable length [m]	Part No.	Type
	Connecting cable with angled plug and angled socket	0.25	540327	KVI-CP-3-WS-WD-0,25
		0.5	540328	KVI-CP-3-WS-WD-0,5
		2	540329	KVI-CP-3-WS-WD-2
		5	540330	KVI-CP-3-WS-WD-5
		8	540331	KVI-CP-3-WS-WD-8
	Connecting cable with straight plug and straight socket	2	540332	KVI-CP-3-GS-GD-2
		5	540333	KVI-CP-3-GS-GD-5
		8	540334	KVI-CP-3-GS-GD-8
	Connector for control cabinet through-feed	–	543252	KVI-CP-3-SSD

Ordering data – Screws		Part No.	Type
	Brief description For mounting on the metal interlinking block	550219	CPX-M-M3X22-4X

Ordering data – Inscription labels		Number	Part No.	Type
	Inscription labels 6x10, in frames	64	18576	IBS-6X10

Documentation ¹⁾		Part No.	Type
	Language		
	DE	555479	P.BE-CPX-CMPX-SYS-DE
	EN	555480	P.BE-CPX-CMPX-SYS-EN
	ES	555481	P.BE-CPX-CMPX-SYS-ES
	FR	555482	P.BE-CPX-CMPX-SYS-FR
	IT	555483	P.BE-CPX-CMPX-SYS-IT
	SV	555484	P.BE-CPX-CMPX-SYS-SV

1) Manual in paper form is not included in the scope of delivery

Measuring modules CPX-CMIX

FESTO

Technical data

The measuring module CPX-CMIX is intended exclusively for use in valve terminals CPX.



General technical data

Operating voltage

Operating voltage range	[V DC]	18 ... 30
Nominal operating voltage	[V DC]	24
Current consumption at nominal operating voltage	[mA]	80
Protection against short circuit		Yes
Power failure bridging	[ms]	10

No. of axis strings

No. of axis strings	1
Axes per string	1
Length of connecting cable to axis	[m]
Max. no. of modules	9
Display	7-segment display

Assigned addresses	Outputs	[bit]	6x8
	Inputs	[bit]	6x8

Diagnostics

Channel and module-oriented
Via local 7-segment display
Undervoltage of modules
Undervoltage of measuring system
Status display

Power Load
Error

Control interface

Data	CAN bus with Festo protocol
	Digital

Electrical connection	5-pin
	M9
	Socket

Materials: Housing	Reinforced polyamide
Note on materials	RoHS-compliant

Product weight	[g]	140
Dimensions	Length	[mm]
	Width	[mm]
	Height	[mm]
		55

Measuring modules CPX-CMIX


Technical data

FESTO

Operating and environmental conditions

Ambient temperature	[°C]	-5 ... +50
Relative air humidity	[%]	5 ... 95, non-condensing
Protection class to IEC 60529		IP65

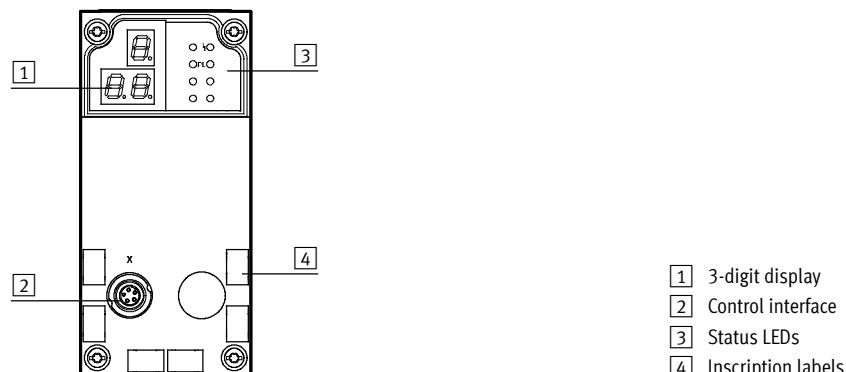Connection and display components



Pin allocation – Plug [2]

	Pin	Signal	Designation
	1	+24 V	Nominal operating voltage
	2	+24 V	Load voltage
	3	0 V	Ground
	4	CAN_H	CAN high
	5	CAN_L	CAN low
	Housing	Screened	Cable screening

Permitted bus nodes/FEC


Bus node/FEC	Protocol	Max. no. of CMIX modules	Remarks
CPX-FEC	-	9	On request
CPX-FB6	Interbus	2	On request
CPX-FB11	DeviceNet	9	Revision 20 (R20) and above
CPX-FB13	PROFIBUS DP	9	Revision 23 (R23) and above
CPX-FB14	CANopen	3	On request
CPX-FB23	CC-Link	9	On request
CPX-FB32	Ethernet/IP	9	On request
CPX-FB33	PROFINET, M12	9	On request
CPX-M-FB34	PROFINET, RJ45	9	On request
CPX-FB38	EtherCat	9	On request



PROFIBUS®, DeviceNet®, CANopen®, INTERBUS®, CC-LINK®, EtherCAT®, PROFINET®, EtherNet/IP® is a registered trademark of its respective trademark holder in certain countries.


Measuring modules CPX-CMIX


FESTO


Accessories

Ordering data – Measuring module		Part No.	Type
	Order code in the CPX configurator: T23	567417	CPX-CMIX-M1-1

Ordering data – Connecting cables		Cable length [m]	Part No.	Type
	Connecting cable with angled plug and angled socket	0.25	540327	KVI-CP-3-WS-WD-0,25
		0.5	540328	KVI-CP-3-WS-WD-0,5
		2	540329	KVI-CP-3-WS-WD-2
		5	540330	KVI-CP-3-WS-WD-5
		8	540331	KVI-CP-3-WS-WD-8
	Connecting cable with straight plug and straight socket	2	540332	KVI-CP-3-GS-GD-2
		5	540333	KVI-CP-3-GS-GD-5
		8	540334	KVI-CP-3-GS-GD-8
	Connector for control cabinet through-feed	-	543252	KVI-CP-3-SSD
Connection between linear drive DGPI, DGPIL or displacement encoder MME and measuring module CPX-CMIX				
	For linear drive DGPI, DGPIL	2	575898	NEBP-M16W6-K-2-M9W5

Ordering data – Screws		Part No.	Type
	For mounting on the metal interlinking block	550219	CPX-M-M3X22-4X

Ordering data – Inscription labels		Number	Part No.	Type
	Inscription labels 6x10, in frames	64	18576	IBS-6X10

Documentation ¹⁾		Part No.	Type
	Language		
	DE	567053	P.BE-CPX-CMIX-DE
	EN	567054	P.BE-CPX-CMIX-EN
	ES	567055	P.BE-CPX-CMIX-ES
	FR	567056	P.BE-CPX-CMIX-FR
	IT	567057	P.BE-CPX-CMIX-IT
	SV	567058	P.BE-CPX-CMIX-SV

1) Manual in paper form is not included in the scope of delivery

Terminal CPX

Technical data – Input module, digital

FESTO

Function

Digital input modules enable the connection of two-wire and three-wire sensors (proximity sensors, inductive or capacitive sensors, etc). Depending on the connection block selected, the module supports various connection concepts with different numbers of sockets (single or double allocation).

Applications

- Input modules for 24 V DC sensor supply voltage
- PNP or NPN logic
- Supports connection blocks with M12, M8, Sub-D, Harax and terminal connection
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnostics through integrated electronic fuse protection



General technical data


Type	CPX-4DE	CPX-8DE	CPX-8DE-D	CPX-8NDE
No. of inputs	4	8	8	8
Max. residual current of inputs per module [A]	0.7	1	0.7	0.7
Fuse protection	Internal electronic fuse for each module	Internal electronic fuse for each module	Internal electronic fuse for each channel	Internal electronic fuse for each module
Intrinsic current consumption at operating voltage [mA]	Typically 15			
Operating voltage	Nominal value [V DC] Permissible range [V DC]	24 18 ... 30		
Electrical isolation	Channel – channel Channel – internal bus	No No		
Switching level	Signal 0 [V DC] Signal 1 [V DC]	≤ 5 ≥ 11		≥ 11 ≤ 5
Input debounce time [ms]	3 (0.1, 10, 20 parameterisable)			
Input characteristic curve	IEC 1131 Part 2			
Switching logic	Positive logic (PNP)			Negative logic (NPN)
LED displays	Group diagnostics Channel diagnostics Channel status	1 – 4	1 – 8	1 – 8
Diagnostics	Short circuit/overload per channel			
Parameterisation	<ul style="list-style-type: none"> • Module monitoring • Behaviour after short circuit • Input debounce time • Signal stretching time 			
Protection class to EN 60529	Depending on connection block			
Temperature range	Operation [°C] Storage/transport [°C]	-5 ... +50 -20 ... +70		
Materials	Reinforced polyamide, polycarbonate			
Grid dimension [mm]	50			
Dimensions (incl. interlinking block and connection block) W x L x H [mm]	50 x 107 x 50			
Weight [g]	38			

Terminal CPX

FESTO

Technical data – Input module, digital

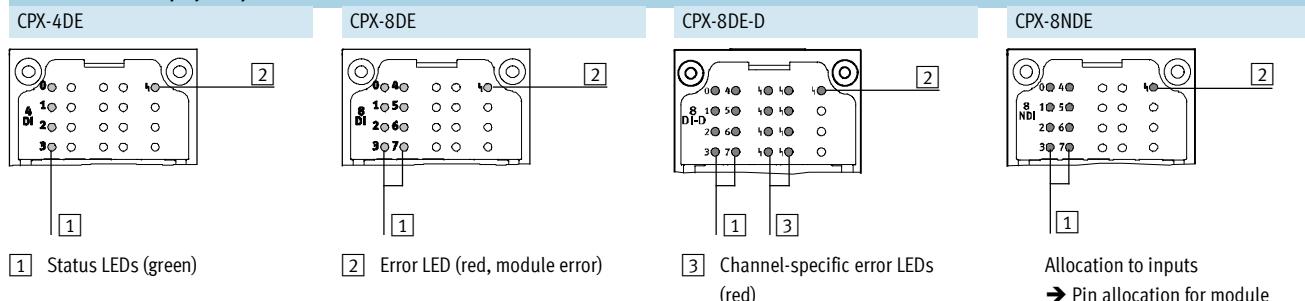Connection and display components



Connection block/digital input module combinations

Connection blocks	Part No.	Digital input modules			
		CPX-4DE	CPX-8DE	CPX-8DE-D	CPX-8NDE
CPX-AB-8-M8-3POL	195706	■	■	■	■
CPX-AB-4-M12X2-5POL	195704	■	■	■	■
CPX-AB-4-M12X2-5POL-R	541254	■	■	■	■
CPX-AB-8-KL-4POL	195708	■	■	■	■
CPX-AB-1-SUB-BU-25POL	525676	■	■	■	■
CPX-AB-4-HAR-4POL	525636	■	■	■	■
CPX-M-AB-4-M12x2-5POL	549367	■	■	■	■

Pin allocation

Connection block inputs	CPX-4DE	CPX-8DE, CPX-8DE-D and CPX-8NDE		
CPX-AB-8-M8-3POL		X1.1: 24 VSEN X1.3: 0 VSEN X1.4: Input x X2.1: 24 VSEN X2.3: 0 VSEN X2.4: Input x+1 X3.1: 24 VSEN X3.3: 0 VSEN X3.4: Input x+1 X4.1: 24 VSEN X4.3: 0 VSEN X4.4: n.c.	X5.1: 24 VSEN X5.3: 0 VSEN X5.4: Input x+2 X6.1: 24 VSEN X6.3: 0 VSEN X6.4: Input x+3 X7.1: 24 VSEN X7.3: 0 VSEN X7.4: Input x+3 X8.1: 24 VSEN X8.3: 0 VSEN X8.4: n.c.	X1.1: 24 VSEN x X1.3: 0 VSEN x X1.4: Input x X2.1: 24 VSEN x+1 X2.3: 0 VSEN x+1 X2.4: Input x+1 X3.1: 24 VSEN x+2 X3.3: 0 VSEN x+2 X3.4: Input x+2 X4.1: 24 VSEN x+3 X4.3: 0 VSEN x+3 X4.4: Input x+3 X5.1: 24 VSEN x+4 X5.3: 0 VSEN x+4 X5.4: Input x+4 X6.1: 24 VSEN x+5 X6.3: 0 VSEN x+5 X6.4: Input x+5 X7.1: 24 VSEN x+6 X7.3: 0 VSEN x+6 X7.4: Input x+6 X8.1: 24 VSEN x+7 X8.3: 0 VSEN x+7 X8.4: Input x+7
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R¹⁾ and CPX-M-AB-4-M12X2-5POL				
		X1.1: 24 VSEN X1.2: Input x+1 X1.3: 0 VSEN X1.4: Input x X1.5: FE X2.1: 24 VSEN X2.2: n.c. X2.3: 0 VSEN X2.4: Input x+1 X2.5: FE X3.1: 24 VSEN X3.2: Input x+3 X3.3: 0 VSEN X3.4: Input x+2 X3.5: FE X4.1: 24 VSEN X4.2: n.c. X4.3: 0 VSEN X4.4: Input x+3 X4.5: FE	X1.1: 24 VSEN x X1.2: Input x+1 X1.3: 0 VSEN x X1.4: Input x X1.5: FE X2.1: 24 VSEN x+2 X2.2: Input x+3 X2.3: 0 VSEN x+2 X2.4: Input x+2 X2.5: FE X3.1: 24 VSEN x+4 X3.2: Input x+5 X3.3: 0 VSEN x+4 X3.4: Input x+4 X3.5: FE X4.1: 24 VSEN x+6 X4.2: Input x+7 X4.3: 0 VSEN x+6 X4.4: Input x+6 X4.5: FE	X1.1: 24 VSEN x X1.2: Input x+1 X1.3: 0 VSEN x X1.4: Input x X1.5: FE X2.1: 24 VSEN x+2 X2.2: Input x+3 X2.3: 0 VSEN x+2 X2.4: Input x+2 X2.5: FE X3.1: 24 VSEN x+4 X3.2: Input x+5 X3.3: 0 VSEN x+4 X3.4: Input x+4 X3.5: FE X4.1: 24 VSEN x+6 X4.2: Input x+7 X4.3: 0 VSEN x+6 X4.4: Input x+6 X4.5: FE

1) Speedcon quick lock, screening additionally on metal thread

Terminal CPX

Technical data – Input module, digital

FESTO





Pin allocation

Connection block inputs	CPX-4DE	CPX-8DE, CPX-8DE-D and CPX-8NDE																																																																													
CPX-AB-8-KL-4POL																																																																															
	<table> <tr><td>X1.0: 24 V_{SEN}</td><td>X5.0: 24 V_{SEN}</td><td>X1.0: 24 V_{SEN} x</td><td>X5.0: 24 V_{SEN} x+4</td></tr> <tr><td>X1.1: 0 V_{SEN}</td><td>X5.1: 0 V_{SEN}</td><td>X1.1: 0 V_{SEN} x</td><td>X5.1: 0 V_{SEN} x+4</td></tr> <tr><td>X1.2: Input x</td><td>X5.2: Input x+2</td><td>X1.2: Input x</td><td>X5.2: Input x+4</td></tr> <tr><td>X1.3: FE</td><td>X5.3: FE</td><td>X1.3: FE</td><td>X5.3: FE</td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td>X2.0: 24 V_{SEN}</td><td>X6.0: 24 V_{SEN}</td><td>X2.0: 24 V_{SEN} x+1</td><td>X6.0: 24 V_{SEN} x+5</td></tr> <tr><td>X2.1: 0 V_{SEN}</td><td>X6.1: 0 V_{SEN}</td><td>X2.1: 0 V_{SEN} x+1</td><td>X6.1: 0 V_{SEN} x+5</td></tr> <tr><td>X2.2: Input x+1</td><td>X6.2: Input x+3</td><td>X2.2: Input x+1</td><td>X6.2: Input x+5</td></tr> <tr><td>X2.3: FE</td><td>X6.3: FE</td><td>X2.3: FE</td><td>X6.3: FE</td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td>X3.0: 24 V_{SEN}</td><td>X7.0: 24 V_{SEN}</td><td>X3.0: 24 V_{SEN} x+2</td><td>X7.0: 24 V_{SEN} x+6</td></tr> <tr><td>X3.1: 0 V_{SEN}</td><td>X7.1: 0 V_{SEN}</td><td>X3.1: 0 V_{SEN} x+2</td><td>X7.1: 0 V_{SEN} x+6</td></tr> <tr><td>X3.2: Input x+1</td><td>X7.2: Input x+3</td><td>X3.2: Input x+2</td><td>X7.2: Input x+6</td></tr> <tr><td>X3.3: FE</td><td>X7.3: FE</td><td>X3.3: FE</td><td>X7.3: FE</td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td>X4.0: 24 V_{SEN}</td><td>X8.0: 24 V_{SEN}</td><td>X4.0: 24 V_{SEN} x+3</td><td>X8.0: 24 V_{SEN} x+7</td></tr> <tr><td>X4.1: 0 V_{SEN}</td><td>X8.1: 0 V_{SEN}</td><td>X4.1: 0 V_{SEN} x+3</td><td>X8.1: 0 V_{SEN} x+7</td></tr> <tr><td>X4.2: n.c.</td><td>X8.2: n.c.</td><td>X4.2: Input x+3</td><td>X8.2: Input x+7</td></tr> <tr><td>X4.3: FE</td><td>X8.3: FE</td><td>X4.3: FE</td><td>X8.3: FE</td></tr> </table>	X1.0: 24 V _{SEN}	X5.0: 24 V _{SEN}	X1.0: 24 V _{SEN} x	X5.0: 24 V _{SEN} x+4	X1.1: 0 V _{SEN}	X5.1: 0 V _{SEN}	X1.1: 0 V _{SEN} x	X5.1: 0 V _{SEN} x+4	X1.2: Input x	X5.2: Input x+2	X1.2: Input x	X5.2: Input x+4	X1.3: FE	X5.3: FE	X1.3: FE	X5.3: FE	 	 	 	 	X2.0: 24 V _{SEN}	X6.0: 24 V _{SEN}	X2.0: 24 V _{SEN} x+1	X6.0: 24 V _{SEN} x+5	X2.1: 0 V _{SEN}	X6.1: 0 V _{SEN}	X2.1: 0 V _{SEN} x+1	X6.1: 0 V _{SEN} x+5	X2.2: Input x+1	X6.2: Input x+3	X2.2: Input x+1	X6.2: Input x+5	X2.3: FE	X6.3: FE	X2.3: FE	X6.3: FE	 	 	 	 	X3.0: 24 V _{SEN}	X7.0: 24 V _{SEN}	X3.0: 24 V _{SEN} x+2	X7.0: 24 V _{SEN} x+6	X3.1: 0 V _{SEN}	X7.1: 0 V _{SEN}	X3.1: 0 V _{SEN} x+2	X7.1: 0 V _{SEN} x+6	X3.2: Input x+1	X7.2: Input x+3	X3.2: Input x+2	X7.2: Input x+6	X3.3: FE	X7.3: FE	X3.3: FE	X7.3: FE	 	 	 	 	X4.0: 24 V _{SEN}	X8.0: 24 V _{SEN}	X4.0: 24 V _{SEN} x+3	X8.0: 24 V _{SEN} x+7	X4.1: 0 V _{SEN}	X8.1: 0 V _{SEN}	X4.1: 0 V _{SEN} x+3	X8.1: 0 V _{SEN} x+7	X4.2: n.c.	X8.2: n.c.	X4.2: Input x+3	X8.2: Input x+7	X4.3: FE	X8.3: FE	X4.3: FE	X8.3: FE	X1.0: 24 V _{SEN} x	X5.0: 24 V _{SEN} x+4
X1.0: 24 V _{SEN}	X5.0: 24 V _{SEN}	X1.0: 24 V _{SEN} x	X5.0: 24 V _{SEN} x+4																																																																												
X1.1: 0 V _{SEN}	X5.1: 0 V _{SEN}	X1.1: 0 V _{SEN} x	X5.1: 0 V _{SEN} x+4																																																																												
X1.2: Input x	X5.2: Input x+2	X1.2: Input x	X5.2: Input x+4																																																																												
X1.3: FE	X5.3: FE	X1.3: FE	X5.3: FE																																																																												
X2.0: 24 V _{SEN}	X6.0: 24 V _{SEN}	X2.0: 24 V _{SEN} x+1	X6.0: 24 V _{SEN} x+5																																																																												
X2.1: 0 V _{SEN}	X6.1: 0 V _{SEN}	X2.1: 0 V _{SEN} x+1	X6.1: 0 V _{SEN} x+5																																																																												
X2.2: Input x+1	X6.2: Input x+3	X2.2: Input x+1	X6.2: Input x+5																																																																												
X2.3: FE	X6.3: FE	X2.3: FE	X6.3: FE																																																																												
X3.0: 24 V _{SEN}	X7.0: 24 V _{SEN}	X3.0: 24 V _{SEN} x+2	X7.0: 24 V _{SEN} x+6																																																																												
X3.1: 0 V _{SEN}	X7.1: 0 V _{SEN}	X3.1: 0 V _{SEN} x+2	X7.1: 0 V _{SEN} x+6																																																																												
X3.2: Input x+1	X7.2: Input x+3	X3.2: Input x+2	X7.2: Input x+6																																																																												
X3.3: FE	X7.3: FE	X3.3: FE	X7.3: FE																																																																												
X4.0: 24 V _{SEN}	X8.0: 24 V _{SEN}	X4.0: 24 V _{SEN} x+3	X8.0: 24 V _{SEN} x+7																																																																												
X4.1: 0 V _{SEN}	X8.1: 0 V _{SEN}	X4.1: 0 V _{SEN} x+3	X8.1: 0 V _{SEN} x+7																																																																												
X4.2: n.c.	X8.2: n.c.	X4.2: Input x+3	X8.2: Input x+7																																																																												
X4.3: FE	X8.3: FE	X4.3: FE	X8.3: FE																																																																												
CPX-AB-1-SUB-BU-25POL																																																																															
	<table> <tr><td>1: Input x</td><td>14: Input x+2</td><td>1: Input x</td><td>14: Input x+4</td></tr> <tr><td>2: Input x+1</td><td>15: Input x+3</td><td>2: Input x+1</td><td>15: Input x+5</td></tr> <tr><td>3: Input x+1</td><td>16: Input x+3</td><td>3: Input x+2</td><td>16: Input x+6</td></tr> <tr><td>4: n.c.</td><td>17: n.c.</td><td>4: Input x+3</td><td>17: Input x+7</td></tr> <tr><td>5: 24 V_{SEN}</td><td>18: 24 V_{SEN}</td><td>5: 24 V_{SEN} x+1</td><td>18: 24 V_{SEN} x+4</td></tr> <tr><td>6: 0 V_{SEN}</td><td>19: 24 V_{SEN}</td><td>6: 0 V_{SEN} x+1</td><td>19: 24 V_{SEN} x+5</td></tr> <tr><td>7: 24 V_{SEN}</td><td>20: 24 V_{SEN}</td><td>7: 24 V_{SEN} x+3</td><td>20: 24 V_{SEN} x+6</td></tr> <tr><td>8: 0 V_{SEN}</td><td>21: 24 V_{SEN}</td><td>8: 0 V_{SEN} x+3</td><td>21: 24 V_{SEN} x+7</td></tr> <tr><td>9: 24 V_{SEN}</td><td>22: 0 V_{SEN}</td><td>9: 24 V_{SEN} x</td><td>22: 0 V_{SEN} x+2 and 3</td></tr> <tr><td>10: 24 V_{SEN}</td><td>23: 0 V_{SEN}</td><td>10: 24 V_{SEN} x+2</td><td>23: 0 V_{SEN} x+2 and 3</td></tr> <tr><td>11: 0 V_{SEN}</td><td>24: 0 V_{SEN}</td><td>11: 0 V_{SEN} x</td><td>24: 0 V_{SEN} x+2 and 3</td></tr> <tr><td>12: 0 V_{SEN}</td><td>25: FE</td><td>12: 0 V_{SEN} x+2</td><td>25: FE</td></tr> <tr><td>13: FE</td><td>Socket: FE</td><td>13: FE</td><td>Socket: FE</td></tr> </table>	1: Input x	14: Input x+2	1: Input x	14: Input x+4	2: Input x+1	15: Input x+3	2: Input x+1	15: Input x+5	3: Input x+1	16: Input x+3	3: Input x+2	16: Input x+6	4: n.c.	17: n.c.	4: Input x+3	17: Input x+7	5: 24 V _{SEN}	18: 24 V _{SEN}	5: 24 V _{SEN} x+1	18: 24 V _{SEN} x+4	6: 0 V _{SEN}	19: 24 V _{SEN}	6: 0 V _{SEN} x+1	19: 24 V _{SEN} x+5	7: 24 V _{SEN}	20: 24 V _{SEN}	7: 24 V _{SEN} x+3	20: 24 V _{SEN} x+6	8: 0 V _{SEN}	21: 24 V _{SEN}	8: 0 V _{SEN} x+3	21: 24 V _{SEN} x+7	9: 24 V _{SEN}	22: 0 V _{SEN}	9: 24 V _{SEN} x	22: 0 V _{SEN} x+2 and 3	10: 24 V _{SEN}	23: 0 V _{SEN}	10: 24 V _{SEN} x+2	23: 0 V _{SEN} x+2 and 3	11: 0 V _{SEN}	24: 0 V _{SEN}	11: 0 V _{SEN} x	24: 0 V _{SEN} x+2 and 3	12: 0 V _{SEN}	25: FE	12: 0 V _{SEN} x+2	25: FE	13: FE	Socket: FE	13: FE	Socket: FE	1: Input x	14: Input x+4																								
1: Input x	14: Input x+2	1: Input x	14: Input x+4																																																																												
2: Input x+1	15: Input x+3	2: Input x+1	15: Input x+5																																																																												
3: Input x+1	16: Input x+3	3: Input x+2	16: Input x+6																																																																												
4: n.c.	17: n.c.	4: Input x+3	17: Input x+7																																																																												
5: 24 V _{SEN}	18: 24 V _{SEN}	5: 24 V _{SEN} x+1	18: 24 V _{SEN} x+4																																																																												
6: 0 V _{SEN}	19: 24 V _{SEN}	6: 0 V _{SEN} x+1	19: 24 V _{SEN} x+5																																																																												
7: 24 V _{SEN}	20: 24 V _{SEN}	7: 24 V _{SEN} x+3	20: 24 V _{SEN} x+6																																																																												
8: 0 V _{SEN}	21: 24 V _{SEN}	8: 0 V _{SEN} x+3	21: 24 V _{SEN} x+7																																																																												
9: 24 V _{SEN}	22: 0 V _{SEN}	9: 24 V _{SEN} x	22: 0 V _{SEN} x+2 and 3																																																																												
10: 24 V _{SEN}	23: 0 V _{SEN}	10: 24 V _{SEN} x+2	23: 0 V _{SEN} x+2 and 3																																																																												
11: 0 V _{SEN}	24: 0 V _{SEN}	11: 0 V _{SEN} x	24: 0 V _{SEN} x+2 and 3																																																																												
12: 0 V _{SEN}	25: FE	12: 0 V _{SEN} x+2	25: FE																																																																												
13: FE	Socket: FE	13: FE	Socket: FE																																																																												
CPX-AB-4-HAR-4POL																																																																															
	<table> <tr><td>X1.1: 24 V_{SEN}</td><td>X3.1: 24 V_{SEN}</td><td>X1.1: 24 V_{SEN} x</td><td>X3.1: 24 V_{SEN} x+4</td></tr> <tr><td>X1.2: Input x+1</td><td>X3.2: Input x+3</td><td>X1.2: Input x+1</td><td>X3.2: Input x+5</td></tr> <tr><td>X1.3: 0 V_{SEN}</td><td>X3.3: 0 V_{SEN}</td><td>X1.3: 0 V_{SEN} x</td><td>X3.3: 0 V_{SEN} x+4</td></tr> <tr><td>X1.4: Input x</td><td>X3.4: Input x+2</td><td>X1.4: Input x</td><td>X3.4: Input x+4</td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td>X2.1: 24 V_{SEN}</td><td>X4.1: 24 V_{SEN}</td><td>X2.1: 24 V_{SEN} x+2</td><td>X4.1: 24 V_{SEN} x+6</td></tr> <tr><td>X2.2: n.c.</td><td>X4.2: n.c.</td><td>X2.2: Input x+3</td><td>X4.2: Input x+7</td></tr> <tr><td>X2.3: 0 V_{SEN}</td><td>X4.3: 0 V_{SEN}</td><td>X2.3: 0 V_{SEN} x+2</td><td>X4.3: 0 V_{SEN} x+6</td></tr> <tr><td>X2.4: Input x+1</td><td>X4.4: Input x+3</td><td>X2.4: Input x+2</td><td>X4.4: Input x+6</td></tr> </table>	X1.1: 24 V _{SEN}	X3.1: 24 V _{SEN}	X1.1: 24 V _{SEN} x	X3.1: 24 V _{SEN} x+4	X1.2: Input x+1	X3.2: Input x+3	X1.2: Input x+1	X3.2: Input x+5	X1.3: 0 V _{SEN}	X3.3: 0 V _{SEN}	X1.3: 0 V _{SEN} x	X3.3: 0 V _{SEN} x+4	X1.4: Input x	X3.4: Input x+2	X1.4: Input x	X3.4: Input x+4	 	 	 	 	X2.1: 24 V _{SEN}	X4.1: 24 V _{SEN}	X2.1: 24 V _{SEN} x+2	X4.1: 24 V _{SEN} x+6	X2.2: n.c.	X4.2: n.c.	X2.2: Input x+3	X4.2: Input x+7	X2.3: 0 V _{SEN}	X4.3: 0 V _{SEN}	X2.3: 0 V _{SEN} x+2	X4.3: 0 V _{SEN} x+6	X2.4: Input x+1	X4.4: Input x+3	X2.4: Input x+2	X4.4: Input x+6	X1.1: 24 V _{SEN} x	X3.1: 24 V _{SEN} x+4																																								
X1.1: 24 V _{SEN}	X3.1: 24 V _{SEN}	X1.1: 24 V _{SEN} x	X3.1: 24 V _{SEN} x+4																																																																												
X1.2: Input x+1	X3.2: Input x+3	X1.2: Input x+1	X3.2: Input x+5																																																																												
X1.3: 0 V _{SEN}	X3.3: 0 V _{SEN}	X1.3: 0 V _{SEN} x	X3.3: 0 V _{SEN} x+4																																																																												
X1.4: Input x	X3.4: Input x+2	X1.4: Input x	X3.4: Input x+4																																																																												
X2.1: 24 V _{SEN}	X4.1: 24 V _{SEN}	X2.1: 24 V _{SEN} x+2	X4.1: 24 V _{SEN} x+6																																																																												
X2.2: n.c.	X4.2: n.c.	X2.2: Input x+3	X4.2: Input x+7																																																																												
X2.3: 0 V _{SEN}	X4.3: 0 V _{SEN}	X2.3: 0 V _{SEN} x+2	X4.3: 0 V _{SEN} x+6																																																																												
X2.4: Input x+1	X4.4: Input x+3	X2.4: Input x+2	X4.4: Input x+6																																																																												

Terminal CPX

FESTO




Accessories – Input module, digital

Ordering data				
Designation		Part No.	Type	
Input module, digital				
	4 digital inputs, positive logic (PNP)	195752	CPX-4DE	
	8 digital inputs, positive logic (PNP)	195750	CPX-8DE	
	8 digital inputs, positive logic (PNP), advanced diagnostic function	541480	CPX-8DE-D	
	8 digital inputs, negative logic (NPN)	543813	CPX-8NDE	
Connection block				
	Plastic	8x socket, M8, 3-pin	195706	CPX-AB-8-M8-3POL
		4x socket, M12, 5-pin	195704	CPX-AB-4-M12X2-5POL
		4x socket, M12 with quick-lock technology, 5-pin	541254	CPX-AB-4-M12X2-5POL-R
		Spring clip terminal, 32-pin	195708	CPX-AB-8-KL-4POL
		1x Sub-D socket, 25-pin	525676	CPX-AB-1-SUB-BU-25POL
		4x socket, quick connection, 4-pin	525636	CPX-AB-4-HAR-4POL
	Metal	4x socket, M12, 5-pin	549367	CPX-M-AB-4-M12X2-5POL
Plug				
	Push-in T-connector	2x socket, M12, 5-pin 1x plug, M12, 4-pin	541596	NEDU-M12D5-M12T4
		2x socket, M8, 3-pin 1x plug, M12, 4-pin	541597	NEDU-M8D3-M12T4
	Plug	M8, 3-pin, solderable	18696	SEA-GS-M8
		M8, 3-pin, screw-in	192009	SEA-3GS-M8-S
		M12, 4-pin, PG7	18666	SEA-GS-7
		M12, PG7, 4-pin for cable Ø 2.5 mm	192008	SEA-4GS-7-2,5
		M12, 4-pin, PG9	18778	SEA-GS-9
		M12, 4 pin for 2 cables	18779	SEA-GS-11-DUO
		M12 for 2 cables, 5-pin	192010	SEA-5GS-11-DUO
		M12, 5-pin	175487	SEA-M12-5GS-PG7
	HARAX plug, 4-pin		525928	SEA-GS-HAR-4POL
	Sub-D plug, 25-pin		527522	SD-SUB-D-ST25
Connecting cable				
	Connecting cable M8-M8	0.5 m	175488	KM8-M8-GSGD-0,5
		1.0 m	175489	KM8-M8-GSGD-1
		2.5 m	165610	KM8-M8-GSGD-2,5
		5.0 m	165611	KM8-M8-GSGD-5
	Connecting cable M12-M12	2.5 m	18684	KM12-M12-GSGD-2,5
		5.0 m	18686	KM12-M12-GSGD-5
		1.0 m	185499	KM12-M12-GSWD-1-4
	Modular system for connecting cables		-	NEBU-... ➔ Internet: nebu
	DUO cable M12	2x straight socket	18685	KM12-DUO-M8-GDGD
		2x straight/angled socket	18688	KM12-DUO-M8-GDWD
		2x angled socket	18687	KM12-DUO-M8-WDWD

Terminal CPX

Accessories – Input module, digital

FESTO

Ordering data		Part No.	Type
Designation			
Cover			
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit	538220	VG-K-M9
Screening plate			
	Screening plate for M12 connections	526184	CPX-AB-S-4-M12
User manual			
	User manual	German	526439 P.BE-CPX-EA-DE
		English	526440 P.BE-CPX-EA-EN
		Spanish	526441 P.BE-CPX-EA-ES
		French	526442 P.BE-CPX-EA-FR
		Italian	526443 P.BE-CPX-EA-IT
		Swedish	526444 P.BE-CPX-EA-SV

Terminal CPX

FESTO

Technical data – Input module, digital, 16 inputs

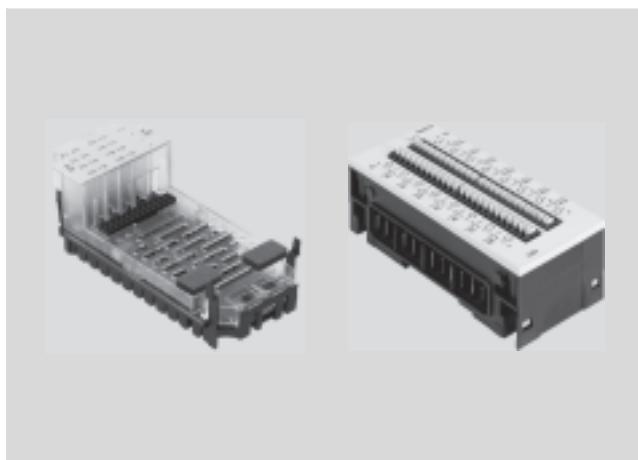
Function

Digital input modules enable the connection of two-wire and three-wire sensors (proximity sensors, inductive or capacitive sensors, etc.).

Depending on the connection block selected, the module supports various connection concepts with different numbers of sockets (single or double allocation).

Application

- Input modules for 24 V DC sensor supply voltage
- PNP logic
- Module features can be parameterised
- The input module receives the voltage supply for the electronics and the sensors from the interlinking block
- Module protection and diagnostics through integrated electronic fuse protection



General technical data


Type	CPX-16DE	CPX-M-16DE-D	CPX-L-16DE
Number of inputs	16	16	16
Max. residual current of inputs per module [A]	1.8	1.8	1.8
Intrinsic current consumption at operating voltage [mA]	Typically 15	Typically 34	Typically 15
Fuse protection	Internal electronic fuse per module	Internal electronic fuse per channel pair, additional safety fuse	Internal electronic fuse per module
Nominal operating voltage [V DC]	24	24	24
Operating voltage range [V DC]	18 ... 30	18 ... 30	18 ... 30
Electrical isolation	Channel – channel Channel – internal bus	No No	No No
Switching level	Signal 0 [V DC] Signal 1 [V DC]	≤ 5 ≥ 11	≤ 5 ≥ 11
Input debounce time [ms]	3 (0.1 ms, 10 ms, 20 ms parameterisable)		
Input characteristic	IEC 1131-T2	IEC 1131-T2	IEC 1131-T2, type 01
Switching logic	Positive logic (PNP)	Positive logic (PNP)	Positive logic (PNP)
LED displays	Group diagnostics Channel diagnostics Channel status	1 16 16	1 – 16
Diagnostics	Short circuit/overload per channel		
Parameterisation	<ul style="list-style-type: none"> • Module monitoring • Behaviour after short circuit • Input debounce time • Signal extension time 		
Protection class to EN 60529	Depending on connection block	Depending on connection block	IP20
Temperature range	Operation [°C] Storage/transport [°C]	-5 ... +50 -20 ... +70	-5 ... +50 -20 ... +70
Materials	Reinforced PA, PC		
Note on materials	–		
Grid dimension [mm]	50	50	50
Dimensions (incl. interlinking block and connection block) W x L x H [mm]	50 x 107 x 50		
Product weight [g]	38		
	Approx. 170		

Terminal CPX

Technical data – Input module, digital, 16 inputs


Connection and display components

CPX-16DE




- [1] Status LEDs (green)
For allocation to inputs
→ pin allocation for module
- [2] Error LED (red, module error)

CPX-M-16DE-D



- [1] Status LEDs (green)
for each input signal
- [2] Error LED (red, module error)

CPX-L-16DE



- [1] Status LEDs (green)
for each input signal
- [2] Error LED (red, module error)










Connection block/digital input module combinations

Connection blocks	Part No.	Digital input modules		
		CPX-16DE	CPX-M-16DE-D	CPX-L-16DE
CPX-AB-8-M8X2-4POL	541256	■	–	–
CPX-AB-8-KL-4POL	195708	■	–	–
CPX-AB-1-SUB-BU-25POL	525676	■	–	–
CPX-M-AB-8-M12X2-5POL	549335	–	■	–

Terminal CPX

FESTO

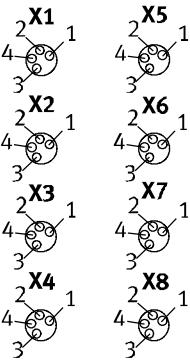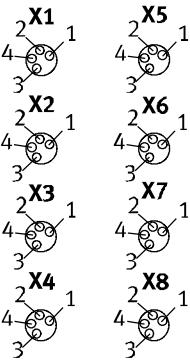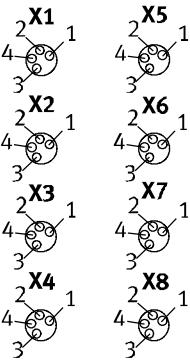Technical data – Input module, digital, 16 inputs

Pin allocation				
Connection block inputs	CPX-16DE			
CPX-AB-8-M8x2-4POL	<table border="1"> <tbody> <tr> <td></td><td> X1.1: 24 V_{SEN} X1.2: Input x+1 X1.3: 0 V_{SEN} X1.4: Input x X2.1: 24 V_{SEN} X2.2: Input x+3 X2.3: 0 V_{SEN} X2.4: Input x+2 X3.1: 24 V_{SEN} X3.2: Input x+5 X3.3: 0 V_{SEN} X3.4: Input x+4 X4.1: 24 V_{SEN} X4.2: Input x+7 X4.3: 0 V_{SEN} X4.4: Input x+6 </td><td> X5.1: 24 V_{SEN} X5.2: Input x+9 X5.3: 0 V_{SEN} X5.4: Input x+8 X6.1: 24 V_{SEN} X6.2: Input x+11 X6.3: 0 V_{SEN} X6.4: Input x+10 X7.1: 24 V_{SEN} X7.2: Input x+13 X7.3: 0 V_{SEN} X7.4: Input x+12 X8.1: 24 V_{SEN} X8.2: Input x+15 X8.3: 0 V_{SEN} X8.4: Input x+14 </td></tr> </tbody> </table>		X1.1: 24 V _{SEN} X1.2: Input x+1 X1.3: 0 V _{SEN} X1.4: Input x X2.1: 24 V _{SEN} X2.2: Input x+3 X2.3: 0 V _{SEN} X2.4: Input x+2 X3.1: 24 V _{SEN} X3.2: Input x+5 X3.3: 0 V _{SEN} X3.4: Input x+4 X4.1: 24 V _{SEN} X4.2: Input x+7 X4.3: 0 V _{SEN} X4.4: Input x+6	X5.1: 24 V _{SEN} X5.2: Input x+9 X5.3: 0 V _{SEN} X5.4: Input x+8 X6.1: 24 V _{SEN} X6.2: Input x+11 X6.3: 0 V _{SEN} X6.4: Input x+10 X7.1: 24 V _{SEN} X7.2: Input x+13 X7.3: 0 V _{SEN} X7.4: Input x+12 X8.1: 24 V _{SEN} X8.2: Input x+15 X8.3: 0 V _{SEN} X8.4: Input x+14
	X1.1: 24 V _{SEN} X1.2: Input x+1 X1.3: 0 V _{SEN} X1.4: Input x X2.1: 24 V _{SEN} X2.2: Input x+3 X2.3: 0 V _{SEN} X2.4: Input x+2 X3.1: 24 V _{SEN} X3.2: Input x+5 X3.3: 0 V _{SEN} X3.4: Input x+4 X4.1: 24 V _{SEN} X4.2: Input x+7 X4.3: 0 V _{SEN} X4.4: Input x+6	X5.1: 24 V _{SEN} X5.2: Input x+9 X5.3: 0 V _{SEN} X5.4: Input x+8 X6.1: 24 V _{SEN} X6.2: Input x+11 X6.3: 0 V _{SEN} X6.4: Input x+10 X7.1: 24 V _{SEN} X7.2: Input x+13 X7.3: 0 V _{SEN} X7.4: Input x+12 X8.1: 24 V _{SEN} X8.2: Input x+15 X8.3: 0 V _{SEN} X8.4: Input x+14		
CPX-AB-8-KL-4POL	<table border="1"> <tbody> <tr> <td></td><td> X1.0: Input x+8 X1.1: 24 V_{SEN} X1.2: Input x X1.3: FE X2.0: Input x+9 X2.1: 24 V_{SEN} X2.2: Input x+1 X2.3: FE X3.0: Input x+10 X3.1: 24 V_{SEN} X3.2: Input x+2 X3.3: FE X4.0: Input x+11 X4.1: 24 V_{SEN} X4.2: Input x+3 X4.3: FE </td><td> X5.0: Input x+12 X5.1: 0 V_{SEN} X5.2: Input x+4 X5.3: FE X6.0: Input x+13 X6.1: 0 V_{SEN} X6.2: Input x+5 X6.3: FE X7.0: Input x+14 X7.1: 0 V_{SEN} X7.2: Input x+6 X7.3: FE X8.0: Input x+15 X8.1: 0 V_{SEN} X8.2: Input x+7 X8.3: FE </td></tr> </tbody> </table>		X1.0: Input x+8 X1.1: 24 V _{SEN} X1.2: Input x X1.3: FE X2.0: Input x+9 X2.1: 24 V _{SEN} X2.2: Input x+1 X2.3: FE X3.0: Input x+10 X3.1: 24 V _{SEN} X3.2: Input x+2 X3.3: FE X4.0: Input x+11 X4.1: 24 V _{SEN} X4.2: Input x+3 X4.3: FE	X5.0: Input x+12 X5.1: 0 V _{SEN} X5.2: Input x+4 X5.3: FE X6.0: Input x+13 X6.1: 0 V _{SEN} X6.2: Input x+5 X6.3: FE X7.0: Input x+14 X7.1: 0 V _{SEN} X7.2: Input x+6 X7.3: FE X8.0: Input x+15 X8.1: 0 V _{SEN} X8.2: Input x+7 X8.3: FE
	X1.0: Input x+8 X1.1: 24 V _{SEN} X1.2: Input x X1.3: FE X2.0: Input x+9 X2.1: 24 V _{SEN} X2.2: Input x+1 X2.3: FE X3.0: Input x+10 X3.1: 24 V _{SEN} X3.2: Input x+2 X3.3: FE X4.0: Input x+11 X4.1: 24 V _{SEN} X4.2: Input x+3 X4.3: FE	X5.0: Input x+12 X5.1: 0 V _{SEN} X5.2: Input x+4 X5.3: FE X6.0: Input x+13 X6.1: 0 V _{SEN} X6.2: Input x+5 X6.3: FE X7.0: Input x+14 X7.1: 0 V _{SEN} X7.2: Input x+6 X7.3: FE X8.0: Input x+15 X8.1: 0 V _{SEN} X8.2: Input x+7 X8.3: FE		
CPX-AB-1-SUB-BU-25POL	<table border="1"> <tbody> <tr> <td></td><td> 1: Input x 2: Input x+1 3: Input x+2 4: Input x+3 5: Input x+9 6: 24 V_{SEN} 7: Input x+11 8: 24 V_{SEN} 9: Input x+8 10: Input x+10 11: 24 V_{SEN} 12: 24 V_{SEN} 13: FE 14: Input x+4 15: Input x+5 16: Input x+6 17: Input x+7 18: Input x+12 19: Input x+13 20: Input x+14 21: Input x+15 22: 0 V_{SEN} 23: 0 V_{SEN} 24: 0 V_{SEN} 25: FE Housing: FE </td><td></td></tr> </tbody> </table>		1: Input x 2: Input x+1 3: Input x+2 4: Input x+3 5: Input x+9 6: 24 V _{SEN} 7: Input x+11 8: 24 V _{SEN} 9: Input x+8 10: Input x+10 11: 24 V _{SEN} 12: 24 V _{SEN} 13: FE 14: Input x+4 15: Input x+5 16: Input x+6 17: Input x+7 18: Input x+12 19: Input x+13 20: Input x+14 21: Input x+15 22: 0 V _{SEN} 23: 0 V _{SEN} 24: 0 V _{SEN} 25: FE Housing: FE	
	1: Input x 2: Input x+1 3: Input x+2 4: Input x+3 5: Input x+9 6: 24 V _{SEN} 7: Input x+11 8: 24 V _{SEN} 9: Input x+8 10: Input x+10 11: 24 V _{SEN} 12: 24 V _{SEN} 13: FE 14: Input x+4 15: Input x+5 16: Input x+6 17: Input x+7 18: Input x+12 19: Input x+13 20: Input x+14 21: Input x+15 22: 0 V _{SEN} 23: 0 V _{SEN} 24: 0 V _{SEN} 25: FE Housing: FE			

Terminal CPX

Technical data – Input module, digital, 16 inputs

FESTO

Pin allocation	
Connection block inputs	CPX-M-16DE-D
CPX-M-AB-8-M12X2-5POL	
X1	X1.1: 24 V _{Sx}
	X1.2: Input x+1
	X1.3: 0 V _{Sx}
	X1.4: Input x
	X1.5: FE
X2	X2.1: 24 V _{Sx+2}
	X2.2: Input x+3
	X2.3: 0 V _{Sx+2}
	X2.4: Input x+2
	X2.5: FE
X3	X3.1: 24 V _{Sx+4}
	X3.2: Input x+5
	X3.3: 0 V _{Sx+4}
	X3.4: Input x+4
	X3.5: FE
X4	X4.1: 24 V _{Sx+6}
	X4.2: Input x+7
	X4.3: 0 V _{Sx+6}
	X4.4: Input x+6
	X4.5: FE
X5	X5.1: 24 V _{Sx+8}
	X5.2: Input x+9
	X5.3: 0 V _{Sx+8}
	X5.4: Input x+8
	X5.5: FE
X6	X6.1: 24 V _{Sx+10}
	X6.2: Input x+11
	X6.3: 0 V _{Sx+10}
	X6.4: Input x+10
	X6.5: FE
X7	X7.1: 24 V _{Sx+12}
	X7.2: Input x+13
	X7.3: 0 V _{Sx+12}
	X7.4: Input x+12
	X7.5: FE
X8	X8.1: 24 V _{Sx+14}
	X8.2: Input x+15
	X8.3: 0 V _{Sx+14}
	X8.4: Input x+14
	X8.5: FE

Terminal CPX

FESTO









Technical data – Input module, digital, 16 inputs

Pin allocation		CPX-L-16DE	
Connection block inputs			
X1 .0		X1.0: 24 V _{SEN}	X9.0: 24 V _{SEN}
.1		X1.1: Input x	X9.1: Input x+8
.2		X1.2: 0 V _{SEN}	X9.2: 0 V _{SEN}
X2 .0		X2.0: 24 V _{SEN}	X10.0: 24 V _{SEN}
.1		X2.1: Input x+1	X10.1: Input x+9
.2		X2.2: 0 V _{SEN}	X10.2: 0 V _{SEN}
X3 .0		X3.0: 24 V _{SEN}	X11.0: 24 V _{SEN}
.1		X3.1: Input x+2	X11.1: Input x+10
.2		X3.2: 0 V _{SEN}	X11.2: 0 V _{SEN}
X4 .0		X4.0: 24 V _{SEN}	X12.0: 24 V _{SEN}
.1		X4.1: Input x+3	X12.1: Input x+11
.2		X4.2: 0 V _{SEN}	X12.2: 0 V _{SEN}
X5 .0		X5.0: 24 V _{SEN}	X13.0: 24 V _{SEN}
.1		X5.1: Input x+4	X13.1: Input x+12
.2		X5.2: 0 V _{SEN}	X13.2: 0 V _{SEN}
X6 .0		X6.0: 24 V _{SEN}	X14.0: 24 V _{SEN}
.1		X6.1: Input x+5	X14.1: Input x+13
.2		X6.2: 0 V _{SEN}	X14.2: 0 V _{SEN}
X7 .0		X7.0: 24 V _{SEN}	X15.0: 24 V _{SEN}
.1		X7.1: Input x+6	X15.1: Input x+14
.2		X7.2: 0 V _{SEN}	X15.2: 0 V _{SEN}
X8 .0		X8.0: 24 V _{SEN}	X16.0: 24 V _{SEN}
.1		X8.1: Input x+7	X16.1: Input x+15
.2		X8.2: 0 V _{SEN}	X16.2: 0 V _{SEN}

Terminal CPX

Accessories – Input module, digital, 16 inputs

FESTO

Ordering data		Part No.	Type
Designation			
Input module, digital			
	16 digital inputs, internal electronic fuse per module	543815	CPX-16DE
	16 digital inputs, internal electronic fuse per channel pair, for CPX in metal	550202	CPX-M-16DE-D
	16 digital inputs, internal electronic fuse per module, for CPX in plastic, including interlinking block and connection block with spring-loaded terminals	572606	CPX-L-16DE-16-KL-3POL
Connection block			
	Plastic	8x socket, M8, 4-pin	541256 CPX-AB-8-M8X2-4POL
		Spring-loaded terminal, 32-pin	195708 CPX-AB-8-KL-4POL
		1x socket, Sub-D, 25-pin	525676 CPX-AB-1-SUB-BU-25POL
	Metal	8x socket, M12, 5-pin	549335 CPX-M-AB-8-M12X2-5POL
Plug			
	Push-in T-connector	2x socket, M8, 3-pin 1x plug, M8, 4-pin	544391 NEDU-M8D3-M8T4
	Plug, M8, 3-pin	Solderable	18696 SEA-GS-M8
		Screw-in	192009 SEA-3GS-M8-S
	Plug, Sub-D, 25-pin		527522 SD-SUB-D-ST25
Connecting cable			
	Connecting cable M8-M8	0.5 m	175488 KM8-M8-GSGD-0,5
		1.0 m	175489 KM8-M8-GSGD-1
		2.5 m	165610 KM8-M8-GSGD-2,5
		5.0 m	165611 KM8-M8-GSGD-5
	Modular system for connecting cables	–	NEBU-... ➔ Internet: nebu
Cover			
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug	538219 AK-8KL	
		538220 VG-K-M9	
Manual			
	Manual	German	526439 P.BE-CPX-EA-DE
		English	526440 P.BE-CPX-EA-EN
		Spanish	526441 P.BE-CPX-EA-ES
		French	526442 P.BE-CPX-EA-FR
		Italian	526443 P.BE-CPX-EA-IT
		Swedish	526444 P.BE-CPX-EA-SV

Terminal CPX

FESTO

Technical data – Output module, digital

Function

Digital outputs control actuators such as individual valves, hydraulic valves, heating controllers and many more. Separate circuits are created using an additional power supply. Parallel connection of the outputs of a module enables consuming devices to be controlled with up to 4 A.

Applications

- Output module for 24 V DC supply voltage
- PNP logic
- Module features can be parameterised
- The output module receives the voltage supply for the electronics and the outputs from the interlinking block
- Module protection and diagnostics through integrated electronic fuse protection in each channel



General technical data

Type		CPX-4DA	CPX-8DA	CPX-8DA-H					
No. of outputs		4	8	8					
Max. power supply	Per module [A]	4		8.4					
	Per channel [A]	1 (24 W lamp load, 4 channels can be connected in parallel)	0.5 (12 W lamp load, 8 channels can be connected in parallel)	2.1 (50 W lamp load), per channel pair					
Fuse protection (short circuit)	Internal electronic fuse for each channel								
Module current consumption (voltage supply for electronics)	[mA]	Typically 16	Typically 34						
Operating voltage	Nominal value [V DC]	24							
	Permissible range [V DC]	18 ... 30							
Electrical isolation	Channel – channel	No							
	Channel – internal bus	Yes, using an intermediate supply							
Output characteristic curve	To IEC 1131-2								
Switching logic	Positive logic (PNP)								
LED displays	Group diagnostics	1	1	1					
	Channel diagnostics	4	8	8					
	Channel status	4	8	8					
Diagnostics	<ul style="list-style-type: none"> • Short circuit/overload, channel x • Undervoltage of outputs 								
Parameterisation	<ul style="list-style-type: none"> • Module monitoring • Behaviour after short circuit • Fail-safe channel x • Forcing channel x • Idle mode channel x 								
Protection class to EN 60529	Depending on connection block								
Temperature range	Operation [°C]	-5 ... +50							
	Storage/transport [°C]	-20 ... +70							
Materials	Reinforced polyamide, polycarbonate								
Grid dimension	[mm]	50							
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50							
Weight	[g]	38							


Terminal CPX

Technical data – Output module, digital


FESTO

Connection and display components

CPX-4DA



CPX-8DA



- [1] Status LEDs (yellow)
Allocation to outputs
→ Pin allocation for module
- [2] Channel-specific error LEDs (red)
- [3] Error LED (red, module error)

Connection block/digital output module combinations

Connection blocks	Part No.	Digital output module		
		CPX-4DA	CPX-8DA	CPX-8DA-H
CPX-AB-8-M8-3POL	195706	■	■	–
CPX-AB-8-M8X2-4POL	541256	■	■	■
CPX-AB-4-M12X2-5POL	195704	■	■	–
CPX-AB-4-M12X2-5POL-R	541254	■	■	■
CPX-AB-8-KL-4POL	195708	■	■	■
CPX-AB-1-SUB-BU-25POL	525676	■	■	■
CPX-AB-4-HAR-4POL	525636	■	■	–
CPX-M-AB-4-M12x2-5POL	549367	■	■	■

Pin allocation

Connection block outputs	CPX-4DA	CPX-8DA	
CPX-AB-8-M8-3POL			
X1	X1.1: n.c. X1.3: 0 V _{OUT} X1.4: Output x	X5.1: n.c. X5.3: 0 V _{OUT} X5.4: Output x+2	X1.1: n.c. X1.3: 0 V _{OUT} X1.4: Output x
X2	X2.1: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1	X6.1: n.c. X6.3: 0 V _{OUT} X6.4: Output x+3	X2.1: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1
X3	X3.1: n.c. X3.3: 0 V _{OUT} X3.4: Output x+1	X7.1: n.c. X7.3: 0 V _{OUT} X7.4: Output x+3	X3.1: n.c. X3.3: 0 V _{OUT} X3.4: Output x+2
X4	X4.1: n.c. X4.3: 0 V _{OUT} X4.4: n.c.	X8.1: n.c. X8.3: 0 V _{OUT} X8.4: n.c.	X7.1: n.c. X7.3: 0 V _{OUT} X7.4: Output x+6

Terminal CPX

FESTO

Technical data – Output module, digital

Pin allocation

Connection block outputs	CPX-4DA	CPX-8DA and CPX-8DA-H			
CPX-AB-8-M8X2-4POL					
	X1.1: 0 V _{OUT} X1.2: Output x+1 X1.3: 0 V _{OUT} X1.4: Output x X2.1: 0 V _{OUT} X2.2: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1 X3.1: 0 V _{OUT} X3.2: Output x+3 X3.3: 0 V _{OUT} X3.4: Output x+2 X4.1: 0 V _{OUT} X4.2: n.c. X4.3: 0 V _{OUT} X4.4: Output x+3	X5.1: 0 V _{OUT} X5.2: n.c. X5.3: 0 V _{OUT} X5.4: n.c. X6.1: 0 V _{OUT} X6.2: n.c. X6.3: 0 V _{OUT} X6.4: n.c. X7.1: 0 V _{OUT} X7.2: n.c. X7.3: 0 V _{OUT} X7.4: n.c. X8.1: 0 V _{OUT} X8.2: n.c. X8.3: 0 V _{OUT} X8.4: n.c.	X1.1: 0 V _{OUT} X1.2: Output x+1 X1.3: 0 V _{OUT} X1.4: Output x X2.1: 0 V _{OUT} X2.2: Output x+3 X2.3: 0 V _{OUT} X2.4: Output x+2 X3.1: 0 V _{OUT} X3.2: Output x+5 X3.3: 0 V _{OUT} X3.4: Output x+4 X4.1: 0 V _{OUT} X4.2: Output x+7 X4.3: 0 V _{OUT} X4.4: Output x+6	X5.1: 0 V _{OUT} X5.2: n.c. X5.3: 0 V _{OUT} X5.4: n.c. X6.1: 0 V _{OUT} X6.2: n.c. X6.3: 0 V _{OUT} X6.4: n.c. X7.1: 0 V _{OUT} X7.2: n.c. X7.3: 0 V _{OUT} X7.4: n.c. X8.1: 0 V _{OUT} X8.2: n.c. X8.3: 0 V _{OUT} X8.4: n.c.	
CPX-AB-4-M12X2-5POL¹⁾ and CPX-AB-4-M12X2-5POL-R²⁾					
	X1.1: n.c. X1.2: Output x+1 X1.3: 0 V _{OUT} X1.4: Output x X1.5: FE X2.1: n.c. X2.2: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1 X2.5: FE	X3.1: n.c. X3.2: Output x+3 X3.3: 0 V _{OUT} X3.4: Output x+2 X3.5: FE	X1.1: n.c. X1.2: Output x+1 X1.3: 0 V _{OUT} X1.4: Output x X1.5: FE	X3.1: n.c. X3.2: Output x+5 X3.3: 0 V _{OUT} X3.4: Output x+4 X3.5: FE	
	X4.1: n.c. X4.2: n.c. X4.3: 0 V _{OUT} X4.4: Output x+3 X4.5: FE	X2.1: n.c. X2.2: Output x+3 X2.3: 0 V _{OUT} X2.4: Output x+2 X2.5: FE	X4.1: n.c. X4.2: Output x+7 X4.3: 0 V _{OUT} X4.4: Output x+6 X4.5: FE		
CPX-AB-8-KL-4POL					
	X1.0: n.c. X1.1: 0 V _{OUT} X1.2: Output x X2.0: n.c. X2.1: 0 V _{OUT} X2.2: Output x+1 X3.0: n.c. X3.1: 0 V _{OUT} X3.2: Output x+1 X4.0: n.c. X4.1: 0 V _{OUT} X4.2: n.c. X5.0: n.c. X5.1: 0 V _{OUT} X5.2: Output x+2 X6.0: n.c. X6.1: 0 V _{OUT} X6.2: Output x+3 X7.0: n.c. X7.1: 0 V _{OUT} X7.2: Output x+3 X8.0: n.c. X8.1: 0 V _{OUT} X8.2: n.c. X1.3: FE X3.3: FE X4.3: FE X5.3: FE X6.3: FE X7.3: FE X8.3: FE	X5.0: n.c. X5.1: 0 V _{OUT} X5.2: Output x X1.3: FE X3.3: FE X4.3: FE X5.3: FE X6.3: FE X7.3: FE X8.3: FE	X1.0: n.c. X1.1: 0 V _{OUT} X1.2: Output x X2.0: n.c. X2.1: 0 V _{OUT} X2.2: Output x+1 X3.0: n.c. X3.1: 0 V _{OUT} X3.2: Output x+2 X4.0: n.c. X4.1: 0 V _{OUT} X4.2: Output x+3 X5.0: n.c. X5.1: 0 V _{OUT} X5.2: Output x+4 X6.0: n.c. X6.1: 0 V _{OUT} X6.2: Output x+5 X7.0: n.c. X7.1: 0 V _{OUT} X7.2: Output x+6 X8.0: n.c. X8.1: 0 V _{OUT} X8.2: Output x+7	X5.0: n.c. X5.1: 0 V _{OUT} X5.2: Output x+4 X6.0: n.c. X6.1: 0 V _{OUT} X6.2: Output x+5 X7.0: n.c. X7.1: 0 V _{OUT} X7.2: Output x+6 X8.0: n.c. X8.1: 0 V _{OUT} X8.2: Output x+7	

1) Not suitable for CPX-8DA-H.

2) Speedcon quick lock, screening additionally on metal thread

Terminal CPX

Technical data – Output module, digital

FESTO



Pin allocation				
Connection block outputs	CPX-4DA		CPX-8DA and CPX-8DA-H	
CPX-AB-1-SUB-BU-25POL				
	1: Output x 2: Output x+1 3: Output x+1 4: n.c. 5: n.c. 6: 0 V _{OUT} 7: n.c. 8: 0 V _{OUT} 9: n.c. 10: n.c. 11: 0 V _{OUT} 12: 0 V _{OUT} 13: FE	14: Output x+2 15: Output x+3 16: Output x+3 17: n.c. 18: n.c. 19: n.c. 20: n.c. 21: n.c. 22: 0 V _{OUT} 23: 0 V _{OUT} 24: 0 V _{OUT} 25: FE Socket: FE	1: Output x 2: Output x+1 3: Output x+2 4: Output x+3 5: n.c. 6: 0 V _{OUT} 7: n.c. 8: 0 V _{OUT} 9: n.c. 10: n.c. 11: 0 V _{OUT} 12: 0 V _{OUT} 13: FE Socket: FE	14: Output x+4 15: Output x+5 16: Output x+6 17: Output x+7 18: n.c. 19: n.c. 20: n.c. 21: n.c. 22: 0 V _{OUT} 23: 0 V _{OUT} 24: 0 V _{OUT} 25: FE
CPX-AB-4-HAR-4POL ¹⁾				
	X1.1: n.c. X1.2: Output x+1 X1.3: 0 V _{OUT} X1.4: Output x X2.1: n.c. X2.2: n.c. X2.3: 0 V _{OUT} X2.4: Output x+1	X3.1: n.c. X3.2: Output x+3 X3.3: 0 V _{OUT} X3.4: Output x+2 X4.1: n.c. X4.2: n.c. X4.3: 0 V _{OUT} X4.4: Output x+3	X1.1: n.c. X1.2: Output x+1 X1.3: 0 V _{OUT} X1.4: Output x X2.1: n.c. X2.2: Output x+3 X2.3: 0 V _{OUT} X2.4: Output x+2 X3.1: n.c. X3.2: 0 V _{OUT} X3.3: 0 V _{OUT} X3.4: Output x+4 X4.1: n.c. X4.2: Output x+7 X4.3: 0 V _{OUT} X4.4: Output x+6	X3.1: n.c. X3.2: Output x+5 X3.3: 0 V _{OUT} X3.4: Output x+4 X4.1: n.c. X4.2: Output x+7 X4.3: 0 V _{OUT} X4.4: Output x+6

1) Not suitable for CPX-8DA-H.

Terminal CPX

FESTO




Accessories – Output module, digital

Ordering data			
Designation		Part No.	Type
Output module, digital			
	4 digital outputs, power supply 1 A per channel	195754	CPX-4DA
	8 digital outputs, power supply 0.5 A per channel	541482	CPX-8DA
	8 digital outputs, power supply 2.1 A per channel pair	550204	CPX-8DA-H
Connection block			
	Plastic	8x socket, M8, 3-pin	195706 CPX-AB-8-M8-3POL
		8x socket, M8, 4-pin	541256 CPX-AB-8-M8X2-4POL
		4x socket, M12, 5-pin	195704 CPX-AB-4-M12X2-5POL
		4x socket, M12 with quick-lock technology, 5-pin	541254 CPX-AB-4-M12X2-5POL-R
		Spring clip terminal, 32-pin	195708 CPX-AB-8-KL-4POL
		1x Sub-D socket, 25-pin	525676 CPX-AB-1-SUB-BU-25POL
		4x socket, quick connection, 4-pin	525636 CPX-AB-4-HAR-4POL
	Metal	4x socket, M12, 5-pin	549367 CPX-M-AB-4-M12X2-5POL
Plug			
	Push-in T-connector	2x socket M8, 3-pin 1x plug M8, 4-pin	544391 NEDU-M8D3-M8T4
	Push-in T-connector	2x socket M12, 5-pin 1x plug M12, 4-pin	541596 NEDU-M12D5-M12T4
		2x socket M8, 3-pin 1x plug M12, 4-pin	541597 NEDU-M8D3-M12T4
	Plug	M8, 3-pin, solderable	18696 SEA-GS-M8
		M8, 3-pin, screw-in	192009 SEA-3GS-M8-S
		M12, PG7	18666 SEA-GS-7
		M12, PG7, 4-pin for cable Ø 2.5 mm	192008 SEA-4GS-7-2,5
		M12, PG9	18778 SEA-GS-9
		M12 for 2 cables	18779 SEA-GS-11-DUO
		M12 for 2 cables, 5-pin	192010 SEA-5GS-11-DUO
		M12, 5-pin	175487 SEA-M12-5GS-PG7
	HARAX plug, 4-pin		525928 SEA-GS-HAR-4POL
	Sub-D plug, 25-pin		527522 SD-SUB-D-ST25
Connecting cable			
	Connecting cable M8-M8	0.5 m	175488 KM8-M8-GSGD-0,5
		1.0 m	175489 KM8-M8-GSGD-1
		2.5 m	165610 KM8-M8-GSGD-2,5
		5.0 m	165611 KM8-M8-GSGD-5
	Connecting cable M12-M12	2.5 m	18684 KM12-M12-GSGD-2,5
		5.0 m	18686 KM12-M12-GSGD-5
		1.0 m	185499 KM12-M12-GSWD-1-4
	Modular system for connecting cables		- NEBU-... → Internet: nebu
	DUO cable M12	2x straight socket	18685 KM12-DUO-M8-GDGD
		2x straight/angled socket	18688 KM12-DUO-M8-GDWD
		2x angled socket	18687 KM12-DUO-M8-WDWD

Terminal CPX

Accessories – Output module, digital

FESTO

Ordering data		Part No.	Type
Designation			
Cover			
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit	538220	VG-K-M9
Screening plate			
	Screening plate for M12 connections	526184	CPX-AB-S-4-M12
User manual			
	User manual	German	526439 P.BE-CPX-EA-DE
		English	526440 P.BE-CPX-EA-EN
		Spanish	526441 P.BE-CPX-EA-ES
		French	526442 P.BE-CPX-EA-FR
		Italian	526443 P.BE-CPX-EA-IT
		Swedish	526444 P.BE-CPX-EA-SV

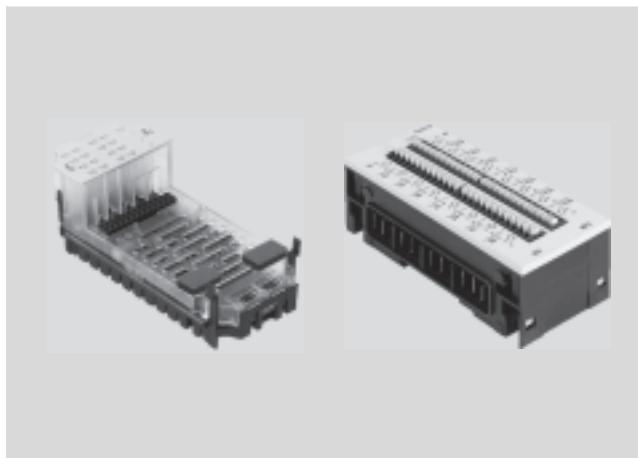
Terminal CPX

Technical data – Input/output module, digital


FESTO

Application

- Digital multi I/O module for 24 V DC supply voltage
- Supports connection blocks with Sub-D, terminal connection and M12 connection (8-pin)
- As CPX-L with connection via spring-loaded terminals
- Module features can be parameterised
- The inputs receive the voltage supply for the electronics and the sensors from the interlinking block
- The outputs receive the voltage supply for the electronics and the sensors from the interlinking block




Function

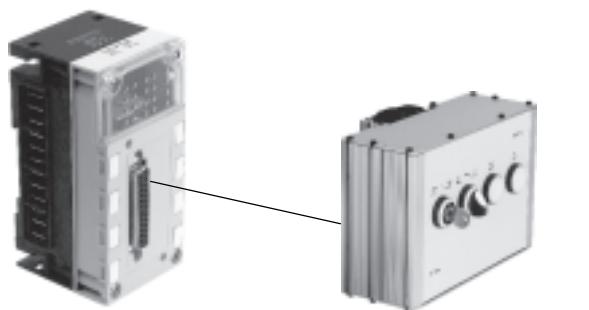


The multi I/O module controls devices with a high number of inputs and outputs per connection point. Since the module supports Sub-D connection blocks, consoles with pushbuttons and lamps can be connected to the terminal CPX using a minimal amount of installation space.

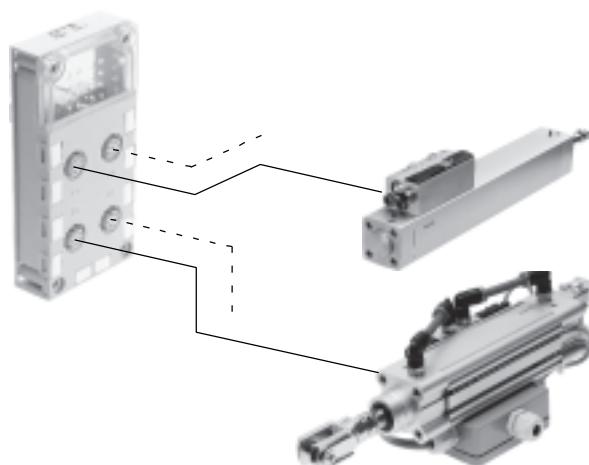Up to 8 inputs and 8 outputs can be connected to one connection point with high protection to IP65.



Since the module supports the M12 connection block (8-pin), up to 4 cylinder/valve combinations with integrated sensors can be connected. Each cylinder/valve combination is supported by 2 inputs and 2 outputs per socket. It is therefore possible to control max. 2 solenoid coils and record signals from 2 sensors with a pre-assembled cable.

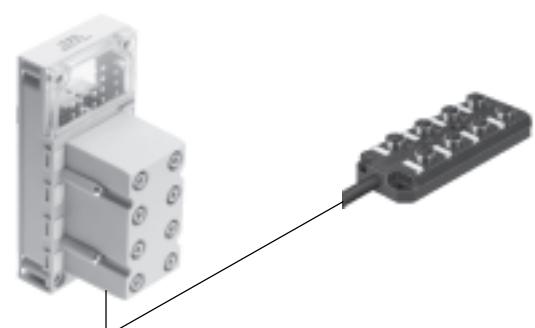Two inputs on 2 sockets are bridged to provide support for the diagnostic module of the cylinder/valve combination. This means that 3 inputs and 2 outputs are available at 2 sockets.



As an alternative to the Sub-D and M12 connection block (8-pin) for installation with high protection to IP65, the terminal connection block produces an identical result for installation with IP20 protection – or with IP65/67 protection with additional cover.

Subordinate I/O modules with multi-pin plug connection (Sub-D plug or multi-pin cable for self-assembly) support the cost-effective and space-saving integration of critical installation areas such as energy chains or upstream functions.

Terminal CPX

Technical data – Input/output module, digital

FESTO

General technical data			
Type	CPX-8DE-8DA	CPX-L-8DE-8DA	
Number	Inputs Outputs	8 8	8 8
Max. power supply per module	Sensor supply [A] Outputs [A]	0.7 4	1.8 2
Max. power supply per channel	[A]	0.5 (12 W lamp load, channels 00 ... 003 can be connected in parallel to 04 ... 07)	0.25 (6 W lamp load)
Fuse protection (short circuit)		Internal electronic fuse per channel	
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 22	Typically 15
Operating voltage	Nominal value [V DC] Permissible range [V DC]	24 18 ... 30	24 18 ... 30
Electrical isolation, inputs	Channel – channel Channel – internal bus	No No	No No
Electrical isolation, outputs	Channel – channel Channel – internal bus	No Yes, using an intermediate supply	No No
Characteristic	Inputs Outputs	IEC 1131-T2 IEC 1131-T2	IEC 1131-T2, type 01 IEC 1131-T2
Switching level, inputs	Signal 0 [V DC] Signal 1 [V DC]	≤ 5 ≥ 11	≤ 5 ≥ 15
Input debounce time	[ms]	3 (0.1 ms, 10 ms, 20 ms parameterisable)	
Switching logic		Positive logic (PNP)	Positive logic (PNP)
LED displays	Group diagnostics Channel diagnostics Channel status	1 – 16	1 – 16
Diagnostics		<ul style="list-style-type: none"> • Short circuit/overload per channel • Undervoltage at outputs 	
Parameterisation		<ul style="list-style-type: none"> • Input debounce time • Failsafe per channel • Forces per channel • Idle mode per channel • Signal extension time • Module monitoring • Behaviour after short circuit 	
Protection class to EN 60529		Depending on connection block	IP20
Temperature range	Operation [°C] Storage/transport [°C]	-5 ... +50 -20 ... +70	-5 ... +50 -20 ... +70
Materials		Reinforced PA, PC	Reinforced PA
Note on materials		–	RoHS-compliant
Grid dimension	[mm]	50	50
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50	50 x 107 x 41
Product weight	[g]	38	Approx. 170


Terminal CPX

FESTO

Technical data – Input/output module, digital


Connection and display components

CPX-8DE-8DA



- [1] Status LEDs (green)
For allocation to inputs
→ pin allocation for module
- [2] Status LEDs (yellow)
For allocation to outputs
→ pin allocation for module
- [3] Error LED (red)
(module error)

CPX-L-8DE-8DA



- [1] Status LEDs (green)
for each input signal
- [2] Error LED (red, module error)

Connection block/digital I/O module combinations

Connection blocks	Part No.	Digital I/O module	
		CPX-8DE-8DA	CPX-L-8DE-8DA
CPX-AB-4-M12-8POL	526178	■	–
CPX-AB-8-KL-4POL	195708	■	–
CPX-AB-1-SUB-BU-25POL	525676	■	–

Pin allocation



Connection block inputs/outputs

CPX-8DE-8DA																																		
<table border="0"> <tbody> <tr> <td>X1.1: 24 V_{SEN}</td> <td>X3.1: 24 V_{SEN}</td> </tr> <tr> <td>X1.2: Input x</td> <td>X3.2: Input x+4</td> </tr> <tr> <td>X1.3: Input x+1</td> <td>X3.3: Input x+5</td> </tr> <tr> <td>X1.4: 0 V_{SEN}</td> <td>X3.4: 0 V_{SEN}</td> </tr> <tr> <td>X1.5: Output x</td> <td>X3.5: Output x+4</td> </tr> <tr> <td>X1.6: Output x+1</td> <td>X3.6: Output x+5</td> </tr> <tr> <td>X1.7: Input x+4</td> <td>X3.7: n.c.</td> </tr> <tr> <td>X1.8: 0 V_{OUT}</td> <td>X3.8: 0 V_{OUT}</td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td>X2.1: 24 V_{SEN}</td> <td>X4.1: 24 V_{SEN}</td> </tr> <tr> <td>X2.2: Input x+2</td> <td>X4.2: Input x+6</td> </tr> <tr> <td>X2.3: Input x+3</td> <td>X4.3: Input x+7</td> </tr> <tr> <td>X2.4: 0 V_{SEN}</td> <td>X4.4: 0 V_{SEN}</td> </tr> <tr> <td>X2.5: Output x+2</td> <td>X4.5: Output x+6</td> </tr> <tr> <td>X2.6: Output x+3</td> <td>X4.6: Output x+7</td> </tr> <tr> <td>X2.7: Input x+6</td> <td>X4.7: n.c.</td> </tr> <tr> <td>X2.8: 0 V_{OUT}</td> <td>X4.8: 0 V_{OUT}</td> </tr> </tbody> </table>	X1.1: 24 V _{SEN}	X3.1: 24 V _{SEN}	X1.2: Input x	X3.2: Input x+4	X1.3: Input x+1	X3.3: Input x+5	X1.4: 0 V _{SEN}	X3.4: 0 V _{SEN}	X1.5: Output x	X3.5: Output x+4	X1.6: Output x+1	X3.6: Output x+5	X1.7: Input x+4	X3.7: n.c.	X1.8: 0 V _{OUT}	X3.8: 0 V _{OUT}			X2.1: 24 V _{SEN}	X4.1: 24 V _{SEN}	X2.2: Input x+2	X4.2: Input x+6	X2.3: Input x+3	X4.3: Input x+7	X2.4: 0 V _{SEN}	X4.4: 0 V _{SEN}	X2.5: Output x+2	X4.5: Output x+6	X2.6: Output x+3	X4.6: Output x+7	X2.7: Input x+6	X4.7: n.c.	X2.8: 0 V _{OUT}	X4.8: 0 V _{OUT}
X1.1: 24 V _{SEN}	X3.1: 24 V _{SEN}																																	
X1.2: Input x	X3.2: Input x+4																																	
X1.3: Input x+1	X3.3: Input x+5																																	
X1.4: 0 V _{SEN}	X3.4: 0 V _{SEN}																																	
X1.5: Output x	X3.5: Output x+4																																	
X1.6: Output x+1	X3.6: Output x+5																																	
X1.7: Input x+4	X3.7: n.c.																																	
X1.8: 0 V _{OUT}	X3.8: 0 V _{OUT}																																	
X2.1: 24 V _{SEN}	X4.1: 24 V _{SEN}																																	
X2.2: Input x+2	X4.2: Input x+6																																	
X2.3: Input x+3	X4.3: Input x+7																																	
X2.4: 0 V _{SEN}	X4.4: 0 V _{SEN}																																	
X2.5: Output x+2	X4.5: Output x+6																																	
X2.6: Output x+3	X4.6: Output x+7																																	
X2.7: Input x+6	X4.7: n.c.																																	
X2.8: 0 V _{OUT}	X4.8: 0 V _{OUT}																																	

Terminal CPX

Technical data – Input/output module, digital

FESTO

Pin allocation																																																					
Connection block inputs/outputs	CPX-8DE-8DA																																																				
CPX-AB-8-KL-4POL																																																					
	<table> <tbody> <tr><td>X1.0</td><td>24 V_{SEN}</td><td>X5.0: Output x+4</td></tr> <tr><td>X1.1</td><td>0 V_{SEN}</td><td>X5.1: 0 V_{OUT}</td></tr> <tr><td>X1.2</td><td>Input x</td><td>X5.2: Output x</td></tr> <tr><td>X1.3</td><td>FE</td><td>X5.3: FE</td></tr> <tr><td>X2.0</td><td>Input x+4</td><td>X6.0: Output x+5</td></tr> <tr><td>X2.1</td><td>Input x+5</td><td>X6.1: 0 V_{OUT}</td></tr> <tr><td>X2.2</td><td>Input x+1</td><td>X6.2: Output x+1</td></tr> <tr><td>X2.3</td><td>FE</td><td>X6.3: FE</td></tr> <tr><td>X3.0</td><td>24 V_{SEN}</td><td>X7.0: Output x+6</td></tr> <tr><td>X3.1</td><td>0 V_{SEN}</td><td>X7.1: 0 V_{OUT}</td></tr> <tr><td>X3.2</td><td>Input x+2</td><td>X7.2: Output x+2</td></tr> <tr><td>X3.3</td><td>FE</td><td>X7.3: FE</td></tr> <tr><td>X4.0</td><td>Input x+6</td><td>X8.0: Output x+7</td></tr> <tr><td>X4.1</td><td>Input x+7</td><td>X8.1: 0 V_{OUT}</td></tr> <tr><td>X4.2</td><td>Input x+3</td><td>X8.2: Output x+3</td></tr> <tr><td>X4.3</td><td>FE</td><td>X8.3: FE</td></tr> </tbody> </table>	X1.0	24 V _{SEN}	X5.0: Output x+4	X1.1	0 V _{SEN}	X5.1: 0 V _{OUT}	X1.2	Input x	X5.2: Output x	X1.3	FE	X5.3: FE	X2.0	Input x+4	X6.0: Output x+5	X2.1	Input x+5	X6.1: 0 V _{OUT}	X2.2	Input x+1	X6.2: Output x+1	X2.3	FE	X6.3: FE	X3.0	24 V _{SEN}	X7.0: Output x+6	X3.1	0 V _{SEN}	X7.1: 0 V _{OUT}	X3.2	Input x+2	X7.2: Output x+2	X3.3	FE	X7.3: FE	X4.0	Input x+6	X8.0: Output x+7	X4.1	Input x+7	X8.1: 0 V _{OUT}	X4.2	Input x+3	X8.2: Output x+3	X4.3	FE	X8.3: FE				
X1.0	24 V _{SEN}	X5.0: Output x+4																																																			
X1.1	0 V _{SEN}	X5.1: 0 V _{OUT}																																																			
X1.2	Input x	X5.2: Output x																																																			
X1.3	FE	X5.3: FE																																																			
X2.0	Input x+4	X6.0: Output x+5																																																			
X2.1	Input x+5	X6.1: 0 V _{OUT}																																																			
X2.2	Input x+1	X6.2: Output x+1																																																			
X2.3	FE	X6.3: FE																																																			
X3.0	24 V _{SEN}	X7.0: Output x+6																																																			
X3.1	0 V _{SEN}	X7.1: 0 V _{OUT}																																																			
X3.2	Input x+2	X7.2: Output x+2																																																			
X3.3	FE	X7.3: FE																																																			
X4.0	Input x+6	X8.0: Output x+7																																																			
X4.1	Input x+7	X8.1: 0 V _{OUT}																																																			
X4.2	Input x+3	X8.2: Output x+3																																																			
X4.3	FE	X8.3: FE																																																			
CPX-AB-1-SUB-BU-25POL																																																					
	<table> <tbody> <tr><td>1:</td><td>Input x</td><td>14:</td><td>Output x</td></tr> <tr><td>2:</td><td>Input x+1</td><td>15:</td><td>Output x+1</td></tr> <tr><td>3:</td><td>Input x+2</td><td>16:</td><td>Output x+2</td></tr> <tr><td>4:</td><td>Input x+3</td><td>17:</td><td>Output x+3</td></tr> <tr><td>5:</td><td>Input x+4</td><td>18:</td><td>Output x+4</td></tr> <tr><td>6:</td><td>Input x+5</td><td>19:</td><td>Output x+5</td></tr> <tr><td>7:</td><td>Input x+6</td><td>20:</td><td>Output x+6</td></tr> <tr><td>8:</td><td>Input x+7</td><td>21:</td><td>Output x+7</td></tr> <tr><td>9:</td><td>24 V_{SEN}</td><td>22:</td><td>0 V_{OUT}</td></tr> <tr><td>10:</td><td>24 V_{SEN}</td><td>23:</td><td>0 V_{OUT}</td></tr> <tr><td>11:</td><td>0 V_{SEN}</td><td>24:</td><td>0 V_{OUT}</td></tr> <tr><td>12:</td><td>0 V_{SEN}</td><td>25:</td><td>FE</td></tr> <tr><td>13:</td><td>FE</td><td></td><td>Socket: FE</td></tr> </tbody> </table>	1:	Input x	14:	Output x	2:	Input x+1	15:	Output x+1	3:	Input x+2	16:	Output x+2	4:	Input x+3	17:	Output x+3	5:	Input x+4	18:	Output x+4	6:	Input x+5	19:	Output x+5	7:	Input x+6	20:	Output x+6	8:	Input x+7	21:	Output x+7	9:	24 V _{SEN}	22:	0 V _{OUT}	10:	24 V _{SEN}	23:	0 V _{OUT}	11:	0 V _{SEN}	24:	0 V _{OUT}	12:	0 V _{SEN}	25:	FE	13:	FE		Socket: FE
1:	Input x	14:	Output x																																																		
2:	Input x+1	15:	Output x+1																																																		
3:	Input x+2	16:	Output x+2																																																		
4:	Input x+3	17:	Output x+3																																																		
5:	Input x+4	18:	Output x+4																																																		
6:	Input x+5	19:	Output x+5																																																		
7:	Input x+6	20:	Output x+6																																																		
8:	Input x+7	21:	Output x+7																																																		
9:	24 V _{SEN}	22:	0 V _{OUT}																																																		
10:	24 V _{SEN}	23:	0 V _{OUT}																																																		
11:	0 V _{SEN}	24:	0 V _{OUT}																																																		
12:	0 V _{SEN}	25:	FE																																																		
13:	FE		Socket: FE																																																		

Terminal CPX

FESTO

Technical data – Input/output module, digital

Pin allocation	
Connection block inputs	CPX-L-8DE-8DA
X1 .0 .1 .2	X1.0: 24 V _{SEN} X1.1: Input x X1.2: 0 V _{SEN+out}
X2 .0 .1 .2	X2.0: 24 V _{SEN} X2.1: Input x+1 X2.2: 0 V _{SEN+out}
X3 .0 .1 .2	X3.0: 24 V _{SEN} X3.1: Input x+2 X3.2: 0 V _{SEN+out}
X4 .0 .1 .2	X4.0: 24 V _{SEN} X4.1: Input x+3 X4.2: 0 V _{SEN+out}
X5 .0 .1 .2	X5.0: 24 V _{SEN} X5.1: Input x+4 X5.2: 0 V _{SEN+out}
X6 .0 .1 .2	X6.0: 24 V _{SEN} X6.1: Input x+5 X6.2: 0 V _{SEN+out}
X7 .0 .1 .2	X7.0: 24 V _{SEN} X7.1: Input x+6 X7.2: 0 V _{SEN+out}
X8 .0 .1 .2	X8.0: 24 V _{SEN} X8.1: Input x+7 X8.2: 0 V _{SEN+out}
	X9.0: 24 V _{SEN} X9.1: Output x X9.2: 0 V _{SEN+out}
	X10.0: 24 V _{SEN} X10.1: Output x+1 X10.2: 0 V _{SEN+out}
	X11.0: 24 V _{SEN} X11.1: Output x+2 X11.2: 0 V _{SEN+out}
	X12.0: 24 V _{SEN} X12.1: Output x+3 X12.2: 0 V _{SEN+out}
	X13.0: 24 V _{SEN} X13.1: Output x+4 X13.2: 0 V _{SEN+out}
	X14.0: 24 V _{SEN} X14.1: Output x+5 X14.2: 0 V _{SEN+out}
	X15.0: 24 V _{SEN} X15.1: Output x+6 X15.2: 0 V _{SEN+out}
	X16.0: 24 V _{SEN} X16.1: Output x+7 X16.2: 0 V _{SEN+out}
Interlinking block	CPX-L-8DE-8DA
<p>0V_{valves} 24V_{valves} 0V_{Output} 24V_{Output} 0V_{El./Sen.} 24V_{El./Sen.} FE</p>	<p>The module combines the 0 V potential of the power supply for electronics and sensors with the 0 V potential of the power supply for outputs in the CPX interlinking module.</p> <p>If all poles of the outputs of an output module connected to the right of the input/output module are to be switched off, an appropriate interlinking block with additional power supply for outputs must be used to the right of the input/output module.</p>

Terminal CPX

Accessories – Input/output module, digital

FESTO

Ordering data		Part No.	Type
Designation			
Input/output module, digital			
	8 digital inputs, 8 digital outputs	526257	CPX-8DE-8DA
	8 digital inputs, 8 digital outputs, for CPX in plastic, including interlinking block and connection block with spring-loaded terminals	572607	CPX-L-8DE-8DA-16-KL-3POL
Connection block			
	Plastic	4x socket, M12, 8-pin	526178 CPX-AB-4-M12-8POL
		Spring-loaded terminal, 32-pin	195708 CPX-AB-8-KL-4POL
		1x socket, Sub-D, 25-pin	525676 CPX-AB-1-SUB-BU-25POL
Plug			
	Plug, Sub-D, 25-pin	527522	SD-SUB-D-ST25
Connecting cable			
	Connecting cable M12	525617	KM12-8GD8GS-2-PU
Cover			
	Cover for CPX-AB-8-KL-4POL (IP65/67)	538219	AK-8KL
	- 8 cable through-feeds M9 - 1 cable through-feed for multi-pin plug	538220	VG-K-M9
Screening plate			
	Screening plate for M12 connections	526184	CPX-AB-S-4-M12
Manual			
	Manual	German	526439 P.BE-CPX-EA-DE
		English	526440 P.BE-CPX-EA-EN
		Spanish	526441 P.BE-CPX-EA-ES
		French	526442 P.BE-CPX-EA-FR
		Italian	526443 P.BE-CPX-EA-IT
		Swedish	526444 P.BE-CPX-EA-SV

Terminal CPX

FESTO

Technical data – Analogue module for inputs

Function

Analogue modules control devices with a standardised analogue interface such as sensors for pressure, temperature, flow rate, filling level, etc.

The analogue module supports various connection concepts with different numbers of sockets or terminals as appropriate to the connection block selected.

Application

- Analogue module for 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA
- Supports connection blocks with Sub-D, terminal connection and M12 connection
- Analogue module features can be parameterised
- Different data formats available
- Operation with and without galvanic isolation possible
- The analogue module receives the voltage supply for the electronics and the sensors from the interlinking block
- Analogue module protection and diagnostics through integrated electronic fuse protection



General technical data

Type	CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I
	Voltage input	Current input	Current input
No. of analogue inputs	2	4	2 or 4
Max. power supply per module	[A]	0.7	
Fuse protection		Internal electronic fuse	
Current consumption from 24 V sensor supply (quiescent current)	[mA]	Typically 50	
Current consumption from 24 V sensor supply (at full load)	[A]	Max. 0.7	
Nominal operating voltage, load voltage	[V DC]	24 ±2%	
Nominal operating voltage	[V DC]	24	
Operating voltage range	[V DC]	18 ... 30	
Signal range (parameterisable for each channel by means of DIL switch or software)	0 ... 10 V 4 ... 20 mA	0 ... 20 mA 0 ... 10 V -5 ... +5 V -10 ... +10 V	0 ... 20 mA 4 ... 20 mA -20 ... +20 mA
Operational error limit	[%]	±0.5	±0.3
Basic error limit (at 25 °C)	[%]	±0.3	±0.2
Repetition accuracy (at 25 °C)	[%]	0.15	0.1
Input resistance		100 kΩ	≤ 100 Ω
Max. permissible input voltage	[V DC]	30	-30 ... +30
Max. permissible input current	[mA]	-	40
Conversion time per channel	[μs]	Typically 150	
Cycle time (module)	[ms]	≤ 4	≤ 0.5
Data format		12 bits + prefix Scalable to 15 bits	15 bits + prefix Scalable to 15 bits
Cable length	[m]	Max. 30 (shielded)	Scalable to 15 bits


Terminal CPX

Technical data – Analogue module for inputs

FESTO

General technical data				
Type		CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I
Electrical isolation	Channel – channel	No		
	Channel – internal bus	Yes, with external sensor supply		
LED displays	Group diagnostics	1		
	Channel diagnostics	Via flashing frequency of group diagnostics	4	Via flashing frequency of group diagnostics
Diagnostics		Wire break per channel		
		Limit value violation per channel		
		Parameterisation error		
	Short circuit, input signal	Overload at input		Short circuit, input signal
	–	Overflow/underflow	–	
	–	Short circuit in sensor supply	–	
Parameterisation		Data format		
		Forces per channel		
		Limit value monitoring per channel		
		Measured value smoothing		
		Signal range per channel		
		Wire break monitoring per channel		
		Behaviour after short circuit		
	–	Behaviour after overload at input	–	
	–	Sensor supply active	–	
Protection class to EN 60529		Depending on connection block		
Temperature range	Operation	[°C]	–5 ... +50	
	Storage/transport	[°C]	–20 ... +70	
Materials	Reinforced PA, PC			
Note on materials		–	RoHS-compliant	–
Grid dimension	[mm]	50		
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50		
Product weight	[g]	38	46	38

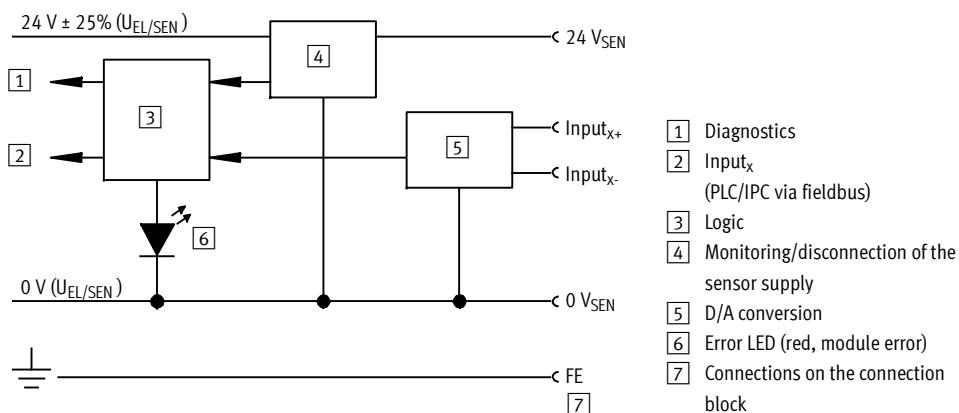Internal structure, basic representation




Terminal CPX

FESTO

Technical data – Analogue module for inputs


Connection and display components

CPX-2AE-U-I and CPX-4AE-I



[1] Error LED (red, module error)

CPX-4AE-U-I



[1] Error LED (red, module error)

[2] Channel-related error LEDs (red)

Connection block/analogue module combinations

Connection blocks	Part No.	Analogue module		
		CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I
CPX-AB-4-M12X2-5POL	195704	■	■	■
CPX-AB-4-M12X2-5POL-R	541254	■	■	■
CPX-AB-8-KL-4POL	195708	■	■	■
CPX-AB-1-SUB-BU-25POL	525676	■	■	■
CPX-M-AB-4-M12X2-5POL	549367	■	■	■

Pin allocation

Connection block inputs	CPX-2AE-U-I	CPX-4AE-U-I	CPX-4AE-I		
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL					
X1: 24 V _{SEN} X1.2: Input U0+ X1.3: 0 V _{SEN} X1.4: Input U0- X1.5: FE ²⁾	X3.1: 24 V _{SEN} X3.2: Input U1+ X3.3: 0 V _{SEN} X3.4: Input U1- X3.5: FE ²⁾	X1.1: 24 V _{SEN} X1.2: Input 0+ X1.3: 0 V _{SEN} X1.4: Input 0- X1.5: FE ²⁾	X3.1: 24 V _{SEN} X3.2: Input 2+ X3.3: 0 V _{SEN} X3.4: Input 2- X3.5: FE ²⁾	X1.1: 24 V _{SEN} X1.2: Input I0+ X1.3: 0 V _{SEN} X1.4: Input I0- X1.5: FE ²⁾	X3.1: 24 V _{SEN} X3.2: Input I2+ X3.3: 0 V _{SEN} X3.4: Input I2- X3.5: FE ²⁾
X2: 24 V _{SEN} X2.2: Input I0+ X2.3: 0 V _{SEN} X2.4: Input I0- X2.5: FE ²⁾	X4.1: 24 V _{SEN} X4.2: Input I1+ X4.3: 0 V _{SEN} X4.4: Input I1- X4.5: FE ²⁾	X2.1: 24 V _{SEN} X2.2: Input 1+ X2.3: 0 V _{SEN} X2.4: Input 1- X2.5: FE ²⁾	X4.1: 24 V _{SEN} X4.2: Input 3+ X4.3: 0 V _{SEN} X4.4: Input 3- X4.5: FE ²⁾	X2.1: 24 V _{SEN} X2.2: Input I1+ X2.3: 0 V _{SEN} X2.4: Input I1- X2.5: FE ²⁾	X4.1: 24 V _{SEN} X4.2: Input I3+ X4.3: 0 V _{SEN} X4.4: Input I3- X4.5: FE ²⁾


CPX-AB-8-KL-4POL

X1: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 289 290 291 292 293 294 295 296 297 298 299 299 300 301 302 303 304 305 306 307 308 309 309 310 311 312 313 314 315 316 317 318 319 319 320 321 322 323 324 325 326 327 328 329 329 330 331 332 333 334 335 336 337 338 339 339 340 341 342 343 344 345 346 347 348 349 349 350 351 352 353 354 355 356 357 358 359 359 360 361 362 363 364 365 366 367 368 369 369 370 371 372 373 374 375 376 377 378 379 379 380 381 382 383 384 385 386 387 388 389 389 390 391 392 393 394 395 396 397 398 399 399 400 401 402 403 404 405 406 407 408 409 409 410 411 412 413 414 415 416 417 418 419 419 420 421 422 423 424 425 426 427 428 429 429 430 431 432 433 434 435 436 437 438 439 439 440 441 442 443 444 445 446 447 448 449 449 450 451 452 453 454 455 456 457 458 459 459 460 461 462 463 464 465 466 467 468 469 469 470 471 472 473 474 475 476 477 478 479 479 480 481 482 483 484 485 486 487 488 489 489 490 491 492 493 494 495 496 497 498 499 499 500 501 502 503 504 505 506 507 508 509 509 510 511 512 513 514 515 516 517 518 519 519 520 521 522 523 524 525 526 527 528 529 529 530 531 532 533 534 535 536 537 538 539 539 540 541 542 543 544 545 546 547 548 549 549 550 551 552 553 554 555 556 557 558 559 559 560 561 562 563 564 565 566 567 568 569 569 570 571 572 573 574 575 576 577 578 579 579 580 581 582 583 584 585 586 587 588 589 589 590 591 592 593 594 595 596 597 598 598 599 599 600 601 602 603 604 605 606 607 608 609 609 610 611 612 613 614 615 616 617 618 619 619 620 621 622 623 624 625 626 627 628 629 629 630 631 632 633 634 635 636 637 638 639 639 640 641 642 643 644 645 646 647 648 649 649 650 651 652 653 654 655 656 657 658 659 659 660 661 662 663 664 665 666 667 668 669 669 670 671 672 673 674 675 676 677 678 679 679 680 681 682 683 684 685 686 687 688 688 689 689 690 691 692 693 694 695 696 697 698 698 699 699 700 701 702 703 704 705 706 707 708 709 709 710 711 712 713 714 715 716 717 718 719 719 720 721 722 723 724 725 726 727 728 729 729 730 731 732 733 734 735 736 737 738 739 739 740 741 742 743 744 745 746 747 748 749 749 750 751 752 753 754 755 756 757 758 759 759 760 761 762 763 764 765 766 767 768 769 769 770 771 772 773 774 775 776 777 778 779 779 780 781 782 783 784 785 786 787 788 788 789 789 790 791 792 793 794 795 796 797 797 798 798 799 799 800 801 802 803 804 805 806 807 808 809 809 810 811 812 813 814 815 816 817 818 819 819 820 821 822 823 824 825 826 827 828 829 829 830 831 832 833 834 835 836 837 838 839 839 840 841 842 843 844 845 846 847 848 849 849 850 851 852 853 854 855 856 857 858 859 859 860 861 862 863 864 865 866 867 868 869 869 870 871 872 873 874 875 876 877 878 879 879 880 881 882 883 884 885 886 887 888 888 889 889 890 891 892 893 894 895 896 897 897 898 898 899 899 900 901 902 903 904 905 906 907 908 909 909 910 911 912 913 914 915 916 917 918 919 919 920 921 922 923 924 925 926 927 928 929 929 930 931 932 933 934 935 936 937 938 939 939 940 941 942 943 944 945 946 947 948 949 949 950 951 952 953 954 955 956 957 958 959 959 960 961 962 963 964 965 966 967 968 969 969 970 971 972 973 974 975 976 977 978 979 979 980 981 982 983 984 985 986 987 988 988 989 989 990 991 992 993 994 995 995 996 996 997 997 998 998 999 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1088 1089 1089 1090 1091 1092 1093 1094 1095 1095 1096 1096 1097 1097 1098 1098 1099 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1178 1179 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1188 1189 1189 1190 1191 1192 1193 1194 1195 1195 1196 1196 1197 1197 1198 1198 1199 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1278 1279 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1288 1289 1289 1290 1291 1292 1293 1294 1295 1295 1296 1296 1297 1297 1298 1298 1299 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1378 1379 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1388 1389 1389 1390 1391 1392 1393 1394 1395 1395 1396 1396 1397 1397 1398 1398 1399 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1459 1460 1461 1462 1463 1464 1465 1466

Terminal CPX

Technical data – Analogue module for inputs

FESTO







Pin allocation		CPX-2AE-U-I		CPX-4AE-U-I		CPX-4AE-I	
Connection block inputs		CPX-2AE-U-I		CPX-4AE-U-I		CPX-4AE-I	
CPX-AB-1-SUB-BU-25POL							
	1: Input U0– 2: Input U0+ 3: Input I0– 4: Input I1+ 5: n.c. 6: n.c. 7: n.c. 8: n.c. 9: 24 VSEN 10: 24 VSEN 11: 0 VSEN 12: 0 VSEN 13: Shield ¹⁾	14: Input U1– 15: Input U1+ 16: Input I1– 17: Input I1+ 18: 24 VSEN 19: n.c. 20: 24 VSEN 21: n.c. 22: 0 VSEN 23: 0 VSEN 24: 0 VSEN 25: FE Socket: FE	1: Input 0– 2: Input 0+ 3: Input 1– 4: Input 1+ 5: n.c. 6: n.c. 7: n.c. 8: n.c. 9: 24 VSEN 10: 24 VSEN 11: 0 VSEN 12: 0 VSEN 13: Shield ¹⁾	14: Input 2– 15: Input 2+ 16: Input 3– 17: Input 3+ 18: 24 VSEN 19: n.c. 20: 24 VSEN 21: n.c. 22: 0 VSEN 23: 0 VSEN 24: 0 VSEN 25: FE Socket: FE	1: Input I0– 2: Input I0+ 3: Input I1– 4: Input I1+ 5: n.c. 6: n.c. 7: n.c. 8: n.c. 9: 24 VSEN 10: 24 VSEN 11: 0 VSEN 12: 0 VSEN 13: Shield ¹⁾	14: Input I2– 15: Input I2+ 16: Input I3– 17: Input I3+ 18: 24 VSEN 19: n.c. 20: 24 VSEN 21: n.c. 22: 0 VSEN 23: 0 VSEN 24: 0 VSEN 25: FE Socket: FE	

1) Connect shield to functional earth FE

Terminal CPX

FESTO

Accessories – Analogue module for inputs

Ordering data		Part No.	Type
Input module, analogue			
	2 analogue current or voltage inputs	526168	CPX-2AE-U-I
	4 analogue current or voltage inputs	573710	CPX-4AE-U-I
	2 or 4 analogue current inputs	541484	CPX-4AE-I
Connection block			
	Plastic	4x socket, M12, 5-pin	195704 CPX-AB-4-M12X2-5POL
		4x socket, M12 with quick-lock technology, 5-pin	541254 CPX-AB-4-M12X2-5POL-R
		Spring-loaded terminal, 32-pin	195708 CPX-AB-8-KL-4POL
	Metal	1x socket, Sub-D, 25-pin	525676 CPX-AB-1-SUB-BU-25POL
	4x socket, M12, 5-pin	549367 CPX-M-AB-4-M12X2-5POL	
Plug			
	Plug, M12, 5 pin	175487	SEA-M12-5GS-PG7
	Plug, Sub-D, 25-pin	527522	SD-SUB-D-ST25
Cover			
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug	538219	AK-8KL
	Fittings kit	538220	VG-K-M9
Screening plate			
	Screening plate for M12 connections	526184	CPX-AB-S-4-M12
Manual			
	Manual	German	526415 P.BE-CPX-AX-DE
		English	526416 P.BE-CPX-AX-EN
		Spanish	526417 P.BE-CPX-AX-ES
		French	526418 P.BE-CPX-AX-FR
		Italian	526419 P.BE-CPX-AX-IT
		Swedish	526420 P.BE-CPX-AX-SV

Terminal CPX

Technical data – Analogue input module with pressure sensors

Function

The pressure input modules enable a maximum of four pressures to be processed. The internal measured value of the sensor (analogue value with 10-bit resolution) is converted into an internal numerical format as appropriate to the parameterisation and made available to the bus node as an image table. It is also possible to combine two channels into one differential pressure channel.

Applications

- Measuring range 0 ... 10 bar or -1 ... +1 bar
- Choice of units of measurement
- Processing of max. four pressures per module
- Pressure indication via LCD display
- Direct connection via QS4 push-in connectors
- Error message via CPX
- Channel-oriented diagnostics



General technical data								
Type	CPX-4AE-P-B2	CPX-4AE-P-D10						
No. of analogue inputs	4							
Pneumatic connection	QS-4							
Nominal operating voltage [V DC]	24							
Operating voltage range [V DC]	18...30							
Intrinsic current consumption [mA]	Typically 50							
Measured variable	4x relative or 2x differential pressure measurement							
Displayable units	<ul style="list-style-type: none"> • kPa • mbar • psi 							
Pressure measuring range	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Starting value [bar]</td> <td>-1</td> <td>0</td> </tr> <tr> <td>Final value [bar]</td> <td>1</td> <td>10</td> </tr> </table>	Starting value [bar]	-1	0	Final value [bar]	1	10	
Starting value [bar]	-1	0						
Final value [bar]	1	10						
Internal cycle time [ms]	5							
Data format	<ul style="list-style-type: none"> • 15 bits + prefix • Binary representation in mbar, kPa, psi 							
LED displays	Group diagnostics							
Diagnostics	<ul style="list-style-type: none"> • Limit value violation per channel • Parameterisation error • Sensor limit per channel 							
Parameterisation	<ul style="list-style-type: none"> • Diagnostic delay per channel • Hysteresis per module • Unit of measurement • Measured value smoothing per channel • Limit value monitoring per channel • Sensor limit per channel • Measurement of relative/differential pressure 							
Protection class to EN 60529	IP65/IP67							
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]							
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)							
Ambient temperature [°C]	-5...50							
Storage temperature [°C]	-20 ... 70							
Temperature of medium [°C]	0...50							
Note on materials	RoHS-compliant							
Materials	Reinforced polyamide, polycarbonate							
Grid dimension [mm]	50							
Dimensions (incl. interlinking block) W x L x H [mm]	50 x 107 x 55							
Weight [g]	112							



Note

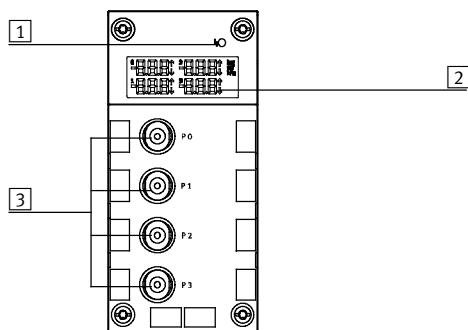
Extreme pneumatic conditions, for example high cycle frequency with large pressure amplitudes, can damage the sensors.

Terminal CPX

FESTO

Accessories – Analogue input module with pressure sensors

Connection and display components



- [1] Error LED (red, module error)
- [2] LCD display with permanent display of the four measured pressures, unit of measurement and if applicable limit value violation
- [3] QS connections

Ordering data

Designation	Part No.	Type																		
Input module, analogue																				
	560361	CPX-4AE-P-B2																		
	560362	CPX-4AE-P-D10																		
Inscription labels																				
	18576	IBS-6x10																		
User manual																				
	User manual	<table border="1"><tbody><tr><td>German</td><td>526415</td><td>P.BE-CPX-AX-DE</td></tr><tr><td>English</td><td>526416</td><td>P.BE-CPX-AX-EN</td></tr><tr><td>Spanish</td><td>526417</td><td>P.BE-CPX-AX-ES</td></tr><tr><td>French</td><td>526418</td><td>P.BE-CPX-AX-FR</td></tr><tr><td>Italian</td><td>526419</td><td>P.BE-CPX-AX-IT</td></tr><tr><td>Swedish</td><td>526420</td><td>P.BE-CPX-AX-SV</td></tr></tbody></table>	German	526415	P.BE-CPX-AX-DE	English	526416	P.BE-CPX-AX-EN	Spanish	526417	P.BE-CPX-AX-ES	French	526418	P.BE-CPX-AX-FR	Italian	526419	P.BE-CPX-AX-IT	Swedish	526420	P.BE-CPX-AX-SV
German	526415	P.BE-CPX-AX-DE																		
English	526416	P.BE-CPX-AX-EN																		
Spanish	526417	P.BE-CPX-AX-ES																		
French	526418	P.BE-CPX-AX-FR																		
Italian	526419	P.BE-CPX-AX-IT																		
Swedish	526420	P.BE-CPX-AX-SV																		

Terminal CPX

Technical data – Analogue module for temperature inputs

FESTO

Function

The CPX-PT100 analogue input module with 4 channels for temperature measurement enables the connection of up to 4 temperature sensors of the type PT100-PT1000, Ni100-Ni1000, etc. The temperature module supports various connection concepts with different numbers of sockets or terminals as appropriate to the connection block selected.

Applications

- Temperature module for temperature sensors PT100, PT200, PT500, PT1000, Ni100, Ni120, Ni500, Ni1000
- Supports connection blocks with M12, Harax and terminal connection
- Temperature module features can be parameterised
- 2-wire, 3-wire and 4-wire connection
- The temperature module is provided with voltage supply for the electronics and the sensors via the interlinking block
- Temperature module protection and diagnostics through integrated electronic fuse protection



General technical data		
Type	CPX-4AE-T	Temperature input
No. of analogue inputs	Choice of 2 or 4	
Max. power supply per module	[A]	0.7
Fuse protection		Internal electronic fuse for sensor supply
Current consumption from 24 V sensor supply (quiescent current)	[mA]	Typically 50
Supply voltage of sensors	[V DC]	24 ±25%
Sensor type (parameterisable for each channel by means of DIL switch)		PT100, PT200, PT500, PT1000 Ni100, Ni120, Ni500, Ni1000
Temperature range	Pt standard Pt climatic Ni	[°C] -200 ... +850 -120 ... +130 -60 ... +180
Sensor connection technology		2-wire, 3-wire and 4-wire technology
Resolution		15 bits + prefix
Operating error limit relative to input range		±0.06
Basic error limit (25 °C)	Standard Pt climatic	[K] ±0.6 ±0.2
Temperature errors relative to input range		[%] ±0.001
Linearity errors (no software scaling)		[%] ±0.02
Repetition accuracy (at 25 °C)		[%] ±0.05
Max. line resistance per wire		[Ω] 10
Max. permissible input voltage		[V] ±30
Cycle time (module)		[ms] ≤ 250

Terminal CPX

FESTO


Technical data – Analogue module for temperature inputs

General technical data

Data format	15 bits + prefix, complement of two, binary notation in tenths of a degree	
Cable length	[m]	Max. 200 (screened)
Electrical isolation	Channel – channel	No
	Channel – internal bus	Yes
LED displays	Group diagnostics	1
	Channel diagnostics	4
Diagnostics	<ul style="list-style-type: none"> • Short circuit/overload, channel • Parameterisation error • Value falling below nominal range/full-scale value • Value exceeding nominal range/full-scale value • Wire break 	
Parameterisation	<ul style="list-style-type: none"> • Unit of measurement and interference frequency suppression • Diagnostic message in the event of a wire break or short circuit • Limit monitoring per channel • Sensor connection technology • Sensor type/temperature coefficient, temperature range • Limit value per channel • Measured value smoothing 	
Protection class to EN 60529	Depending on connection block	
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials	Polymer	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50
Weight	[g]	38

Connection and display components

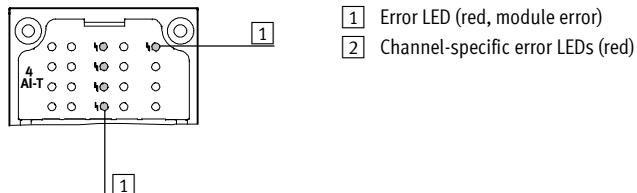CPX-4AE-T






Connection block/analogue module combinations

Connection blocks	Part No.	Temperature module
		CPX-4AE-T
CPX-AB-4-M12X2-5POL	195704	■
CPX-AB-4-M12X2-5POL-R	541254	■
CPX-AB-8-KL-4POL	195708	■
CPX-AB-4-HAR-4POL	525636	■
CPX-M-AB-4-M12X2-5POL	549367	■

Terminal CPX

Technical data – Analogue module for temperature inputs

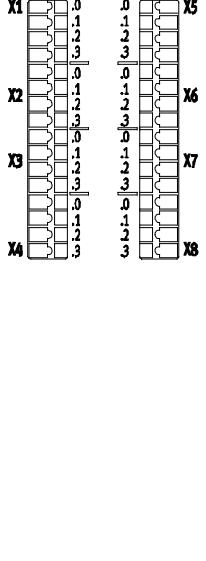FESTO

Pin allocation		
Connection block inputs	CPX-4AE-T	
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL		
	X1.1: Input I0+ X1.2: Input U0+ X1.3: Input I0- X1.4: Input U0- X1.5: FE ²⁾ X2.1: Input I1+ X2.2: Input U1+ X2.3: Input I1- X2.4: Input U1- X2.5: FE ²⁾ X3.1: Input I2+ X3.2: Input U2+ X3.3: Input I2- X3.4: Input U2- X3.5: FE ²⁾ X4.1: Input I3+ X4.2: Input U3+ X4.3: Input I3- X4.4: Input U3- X4.5: FE ²⁾	
CPX-AB-8-KL-4POL		
	X1.0: Input I0+ X1.1: Input I0- X1.2: Input U0- X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Input U0+ X2.3: FE X3.0: Input I1+ X3.1: Input I1- X3.2: Input U1- X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Input U1+ X4.3: FE X5.0: Input I2+ X5.1: Input I2- X5.2: Input U2- X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Input U1+ X6.3: FE X7.0: Input I3+ X7.1: Input I3- X7.2: Input U3- X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Input U3+ X8.3: FE	
CPX-AB-4-HAR-4POL		
	X1.1: Input I0+ X1.2: Input U0+ X1.3: Input I0- X1.4: Input U0- X2.1: Input I1+ X2.2: Input U1+ X2.3: Input I1- X2.4: Input U1- X3.1: Input I2+ X3.2: Input U2+ X3.3: Input I2- X3.4: Input U2- X4.1: Input I3+ X4.2: Input U3+ X4.3: Input I3- X4.4: Input U3-	






1) Speedcon quick lock, screening additionally on metal thread

2) FE/screening additionally on metal thread

Terminal CPX

FESTO

Accessories – Analogue module for temperature inputs

Ordering data			
Designation	Part No. Type		
Input module, analogue			
	2 or 4 analogue temperature inputs 541486 CPX-4AE-T		
Connection block			
	Plastic	4x socket, M12, 5-pin 4x socket, M12 with quick-lock technology, 5-pin Spring clip terminal, 32-pin 4x socket, quick connection, 4-pin	195704 CPX-AB-4-M12X2-5POL 541254 CPX-AB-4-M12X2-5POL-R 195708 CPX-AB-8-KL-4POL 525636 CPX-AB-4-HAR-4POL
	Metal	4x socket, M12, 5-pin	549367 CPX-M-AB-4-M12X2-5POL
	Plug		
		M12 plug, 5-pin	175487 SEA-M12-5GS-PG7
	HARAX plug, 4-pin	525928 SEA-GS-HAR-4POL	
Cover			
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug	538219 AK-8KL	
	Fittings kit	538220 VG-K-M9	
Screening plate			
	Screening plate for M12 connections	526184 CPX-AB-S-4-M12	
User manual			
	User manual	German English Spanish French Italian Swedish	526415 P.BE-CPX-AX-DE 526416 P.BE-CPX-AX-EN 526417 P.BE-CPX-AX-ES 526418 P.BE-CPX-AX-FR 526419 P.BE-CPX-AX-IT 526420 P.BE-CPX-AX-SV

Terminal CPX

Technical data – Analogue module for thermocoupler

FESTO

Function

The CPX-4AE-TC analogue input module with four channels for temperature measurement enables up to four thermocoupler sensors to be connected.

The channels feature wire break and short circuit detection.

If no cold junction compensation sensor is being used, an internal theoretical value of 25 °C can be used (accuracy is impaired).

Applications

- Supports connection blocks with M12 and terminal connection
- Temperature module features can be parameterised
- 2-wire connection
- 2-wire connection for a PT1000 sensor for cold junction compensation
- The temperature module is provided with voltage supply for the electronics and the sensors via the interlinking block
- Temperature module protection and diagnostics through integrated electronic fuse protection



General technical data

Type	CPX-4AE-TC
Type	Temperature input
No. of analogue inputs	4
Fuse protection (short circuit)	Internal electronic fuse for each channel
Nominal operating voltage	[V DC] 24
Operating voltage range	[V DC] 18 ... 30
Sensor type (parameterisable for each channel by means of software)	<ul style="list-style-type: none">• Type B +400 ... +1,820 °C, 8 µV/°C• Type E -270 ... +900 °C, 60 µV/°C• Type J -200 ... +1,200 °C, 51 µV/°C• Type K -200 ... +1,370 °C, 40 µV/°C• Type N -200 ... +1,300 °C, 38 µV/°C• Type R 0 ... +1,760 °C, 12 µV/°C• Type S 0 ... +1,760 °C, 11 µV/°C• Type T -200 ... +400 °C, 40 µV/°C
Sensor connection technology	2-wire technology
Operating error limit relative to ambient temperature	[%] Max. ±0.6
Basic error limit (at 25 °C)	[%] Max. ±0.4
Repetition accuracy (at 25 °C)	[%] ±0.05
Max. line resistance per wire	[Ω] 10
Max. residual current per module	[mA] 30
Max. permissible input voltage	[V] ±30
Internal cycle time (module)	[ms] 250

Terminal CPX

FESTO


Technical data – Analogue module for thermocoupler

General technical data

Data format	• 15 bits + prefix, complement of two • Binary notation in tenths of a degree	
Cable length	[m]	Max. 50 (screened)
Electrical isolation	Channel – channel	No
	Channel – internal bus	Yes
LED displays	Group diagnostics	1
	Channel diagnostics	4
Diagnostics	<ul style="list-style-type: none"> Parameterisation error Wire break per channel Limit value violation per channel 	
Parameterisation	<ul style="list-style-type: none"> Wire break monitoring per channel Unit of measurement Cold junction compensation Sensor type per channel Limit value monitoring per channel Measured value smoothing 	
Protection class to EN 60529	Depending on connection block	
Temperature range	Operation [°C]	-5 ... +50
	Storage/transport [°C]	-20 ... +70
Materials	Reinforced polyamide, polycarbonate	
Grid dimension	[mm]	50
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50
Weight	[g]	38

Connection and display components

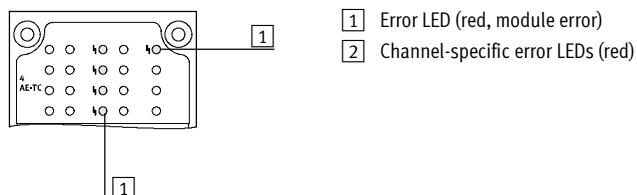CPX-4AE-TC





Connection block/analogue module combinations

Connection blocks	Part No.	Temperature module
		CPX-4AE-TC
CPX-AB-4-M12X2-5POL	195704	■
CPX-AB-4-M12X2-5POL-R	541254	■
CPX-AB-8-KL-4POL	195708	■
CPX-M-AB-4-M12x2-5POL	549367	■

Terminal CPX

Technical data – Analogue module for thermocoupler

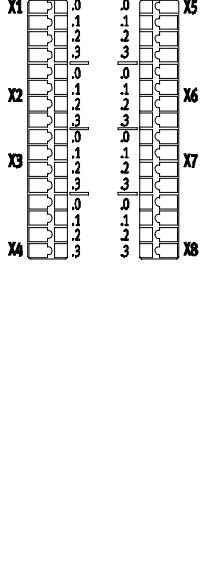FESTO

Pin allocation		
Connection block inputs	CPX-4AE-TC	
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL		
	X1.1: Input I0+ X1.2: Input U0+ X1.3: Input I0- X1.4: Input U0- X1.5: FE ²⁾ X2.1: Input I1+ X2.2: Input U1+ X2.3: Input I1- X2.4: Input U1- X2.5: FE ²⁾	X3.1: Input I2+ X3.2: Input U2+ X3.3: Input I2- X3.4: Input U2- X3.5: FE ²⁾ X4.1: Input I3+ X4.2: Input U3+ X4.3: Input I3- X4.4: Input U3- X4.5: FE ²⁾
CPX-AB-8-KL-4POL		
	X1.0: Input I0+ X1.1: Input I0- X1.2: Input U0- X1.3: FE X2.0: n.c. X2.1: n.c. X2.2: Input U0+ X2.3: FE X3.0: Input I1+ X3.1: Input I1- X3.2: Input U1- X3.3: FE X4.0: n.c. X4.1: n.c. X4.2: Input U1+ X4.3: FE	X5.0: Input I2+ X5.1: Input I2- X5.2: Input U2- X5.3: FE X6.0: n.c. X6.1: n.c. X6.2: Input U12+ X6.3: FE X7.0: Input I3+ X7.1: Input I3- X7.2: Input U3- X7.3: FE X8.0: n.c. X8.1: n.c. X8.2: Input U3+ X8.3: FE

1) Speedcon quick lock, screening additionally on metal thread

2) FE/screening additionally on metal thread

Terminal CPX

FESTO

Accessories – Analogue module for thermocoupler

Ordering data

Designation	Part No.	Type
Input module, analogue		
	553594	CPX-4AE-TC
Connection block		
	4x socket, M12, 5-pin	195704 CPX-AB-4-M12X2-5POL
	4x socket, M12 with quick-lock technology, 5-pin	541254 CPX-AB-4-M12X2-5POL-R
	Spring clip terminal, 32-pin	195708 CPX-AB-8-KL-4POL
Metal	4x socket, M12, 5-pin	549367 CPX-M-AB-4-M12X2-5POL
Cold junction compensation		
	553596	CPX-W-PT1000
Plug		
	175487	SEA-M12-5GS-PG7
Cover		
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug	538219 AK-8KL
	Fittings kit	538220 VG-K-M9
Screening plate		
	526184	CPX-AB-S-4-M12
User manual		
	User manual	German
		526415 P.BE-CPX-AX-DE
		English
		526416 P.BE-CPX-AX-EN
		Spanish
		526417 P.BE-CPX-AX-ES
		French
		526418 P.BE-CPX-AX-FR
		Italian
		526419 P.BE-CPX-AX-IT
		Swedish
		526420 P.BE-CPX-AX-SV

Terminal CPX

Technical data – Analogue module for outputs

FESTO

Function

Analogue modules control devices with a standard analogue interface such as proportional valves, etc. The analogue module supports various connection concepts with different numbers of sockets or terminals as appropriate to the connection block selected.

Applications

- Analogue module for 0 ... 10 V, 0 ... 20 mA or 4 ... 20 mA
- Supports connection blocks with M12, Sub-D and terminal connection
- Analogue module features can be parameterised
- Different data formats available
- Operation with and without galvanic isolation possible
- The analogue module receives the voltage supply for the electronics and the actuators from the interlinking block
- Analogue module protection and diagnostics through integrated electronic fuse protection



General technical data

Type	CPX-2AA-U-I		
No. of analogue outputs	Voltage output		Current output
Max. actuator supply per module	[A]	2.8	
Fuse protection	Internal electronic fuse for actuator supply		
Current consumption from 24 V sensor supply (at full load)	[mA]	Max. 150	
Current consumption from 24 V actuator supply (at full load)	[A]	4 ... 10	
Supply voltage of actuators	[V DC]	24 ±25%	
Signal range (parameterisable for each channel by means of DIL switch or software)		0 ... 10 V DC	0 ... 20 mA 4 ... 2 mA
Resolution	[bit]	12	
No. of units		4,096	
Absolute accuracy	[%]	±0.6	
Linearity errors (no software scaling)	[%]	±0.1	
Repetition accuracy (at 25 °C)	[%]	0.05	
Encoder selection	Load resistance for ohmic load	[kΩ]	Min. 1
	Load resistance for capacitive load	[μF]	Max. 1
	Load resistance for inductive load	[mH]	–
	Short circuit protection analogue output		Yes
	Short circuit current analogue output	[mA]	Approx. 20
	Open circuit voltage	[V DC]	–
	Destruction limit against externally applied voltage	[V DC]	15
	Actuator connection		2 wires
Cycle time (module)	[ms]	≤ 4	

Terminal CPX

FESTO


Technical data – Analogue module for outputs

General technical data

Type	CPX-2AA-U-I				
	Voltage output	Current output			
Response time	For ohmic load [ms]	0.1	0.1		
	For capacitive load [ms]	0.7	–		
	For inductive load [ms]	–	0.5		
Data format	15 bits + prefix, linear scaling 12 bits right-justified 12 bits left-justified, S7 compatible 12 bits left-justified, S5 compatible				
Cable length	[m]	Max. 30 (screened)			
LED displays	Group diagnostics	1			
	Channel diagnostics	Yes, by means of flashing frequency of group diagnostics			
Diagnostics	<ul style="list-style-type: none"> • Short circuit/overload, actuator supply • Parameterisation error • Value falling below nominal range/full-scale value • Value exceeding nominal range/full-scale value • Wire break 				
Parameterisation	<ul style="list-style-type: none"> • Short circuit monitoring, actuator supply • Short circuit monitoring, analogue output • Behaviour after short circuit, actuator supply • Data format • Lower limit value/full-scale value • Upper limit value/full-scale value • Monitoring of value falling below nominal range/full-scale value • Monitoring of value exceeding nominal range/full-scale value • Wire break monitoring • Signal range 				
Protection class to EN 60529	Depending on connection block				
Temperature range	Operation [°C]	–5 ... +50			
	Storage/transport [°C]	–20 ... +70			
Materials	Polymer				
Grid dimension	[mm]	50			
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50			
Weight	[g]	38			

Connection and display components

CPX-2AA-U-I



1 Error LED (red, module error)

Connection block/analogue module combinations

Connection blocks	Part No.	Analogue module
		CPX-2AA-U-I
CPX-AB-4-M12X2-5POL	195704	■
CPX-AB-4-M12X2-5POL-R	541254	■
CPX-AB-8-KL-4POL	195708	■
CPX-AB-1-SUB-BU-25POL	525676	■
CPX-M-AB-4-M12X2-5POL	549367	■

Terminal CPX

Technical data – Analogue module for outputs

Pin allocation																																	
Connection block outputs	CPX-2AA-U-I																																
CPX-AB-4-M12X2-5POL, CPX-AB-4-M12X2-5POL-R ¹⁾ and CPX-M-AB-4-M12X2-5POL																																	
	<table border="0"> <tr> <td>X1.1: 24 V_{OUT}</td><td>X3.1: 24 V_{OUT}</td></tr> <tr> <td>X1.2: Output U0+</td><td>X3.2: Output U1+</td></tr> <tr> <td>X1.3: 0 V_{OUT}</td><td>X3.3: 0 V_{OUT}</td></tr> <tr> <td>X1.4: Output GND</td><td>X3.4: Output GND</td></tr> <tr> <td>X1.5: FE²⁾</td><td>X3.5: FE²⁾</td></tr> </table> <table border="0"> <tr> <td>X2.1: 24 V_{OUT}</td><td>X4.1: 24 V_{OUT}</td></tr> <tr> <td>X2.2: Output I0+</td><td>X4.2: Output I1+</td></tr> <tr> <td>X2.3: 0 V_{OUT}</td><td>X4.3: 0 V_{OUT}</td></tr> <tr> <td>X2.4: Output GND</td><td>X4.4: Output GND</td></tr> <tr> <td>X2.5: FE²⁾</td><td>X4.5: FE²⁾</td></tr> </table>	X1.1: 24 V _{OUT}	X3.1: 24 V _{OUT}	X1.2: Output U0+	X3.2: Output U1+	X1.3: 0 V _{OUT}	X3.3: 0 V _{OUT}	X1.4: Output GND	X3.4: Output GND	X1.5: FE ²⁾	X3.5: FE ²⁾	X2.1: 24 V _{OUT}	X4.1: 24 V _{OUT}	X2.2: Output I0+	X4.2: Output I1+	X2.3: 0 V _{OUT}	X4.3: 0 V _{OUT}	X2.4: Output GND	X4.4: Output GND	X2.5: FE ²⁾	X4.5: FE ²⁾												
X1.1: 24 V _{OUT}	X3.1: 24 V _{OUT}																																
X1.2: Output U0+	X3.2: Output U1+																																
X1.3: 0 V _{OUT}	X3.3: 0 V _{OUT}																																
X1.4: Output GND	X3.4: Output GND																																
X1.5: FE ²⁾	X3.5: FE ²⁾																																
X2.1: 24 V _{OUT}	X4.1: 24 V _{OUT}																																
X2.2: Output I0+	X4.2: Output I1+																																
X2.3: 0 V _{OUT}	X4.3: 0 V _{OUT}																																
X2.4: Output GND	X4.4: Output GND																																
X2.5: FE ²⁾	X4.5: FE ²⁾																																
CPX-AB-8-KL-4POL																																	
	<table border="0"> <tr> <td>X1.0: 24 V_{OUT}</td><td>X5.0: 24 V_{OUT}</td></tr> <tr> <td>X1.1: 0 V_{OUT}</td><td>X5.1: 0 V_{OUT}</td></tr> <tr> <td>X1.2: Output GND</td><td>X5.2: Output GND</td></tr> <tr> <td>X1.3: FE</td><td>X5.3: FE</td></tr> <tr> <td>X2.0: n.c.</td><td>X6.0: n.c.</td></tr> <tr> <td>X2.1: n.c.</td><td>X6.1: n.c.</td></tr> <tr> <td>X2.2: Output U0+</td><td>X6.2: Output U1+</td></tr> <tr> <td>X2.3: FE</td><td>X6.3: FE</td></tr> <tr> <td>X3.0: 24 V_{OUT}</td><td>X7.0: 24 V_{OUT}</td></tr> <tr> <td>X3.1: 0 V_{OUT}</td><td>X7.1: 0 V_{OUT}</td></tr> <tr> <td>X3.2: Output GDN</td><td>X7.2: Output GND</td></tr> <tr> <td>X3.3: FE</td><td>X7.3: FE</td></tr> <tr> <td>X4.0: n.c.</td><td>X8.0: n.c.</td></tr> <tr> <td>X4.1: n.c.</td><td>X8.1: n.c.</td></tr> <tr> <td>X4.2: Output I0+</td><td>X8.2: Output I1+</td></tr> <tr> <td>X4.3: FE</td><td>X8.3: FE</td></tr> </table>	X1.0: 24 V _{OUT}	X5.0: 24 V _{OUT}	X1.1: 0 V _{OUT}	X5.1: 0 V _{OUT}	X1.2: Output GND	X5.2: Output GND	X1.3: FE	X5.3: FE	X2.0: n.c.	X6.0: n.c.	X2.1: n.c.	X6.1: n.c.	X2.2: Output U0+	X6.2: Output U1+	X2.3: FE	X6.3: FE	X3.0: 24 V _{OUT}	X7.0: 24 V _{OUT}	X3.1: 0 V _{OUT}	X7.1: 0 V _{OUT}	X3.2: Output GDN	X7.2: Output GND	X3.3: FE	X7.3: FE	X4.0: n.c.	X8.0: n.c.	X4.1: n.c.	X8.1: n.c.	X4.2: Output I0+	X8.2: Output I1+	X4.3: FE	X8.3: FE
X1.0: 24 V _{OUT}	X5.0: 24 V _{OUT}																																
X1.1: 0 V _{OUT}	X5.1: 0 V _{OUT}																																
X1.2: Output GND	X5.2: Output GND																																
X1.3: FE	X5.3: FE																																
X2.0: n.c.	X6.0: n.c.																																
X2.1: n.c.	X6.1: n.c.																																
X2.2: Output U0+	X6.2: Output U1+																																
X2.3: FE	X6.3: FE																																
X3.0: 24 V _{OUT}	X7.0: 24 V _{OUT}																																
X3.1: 0 V _{OUT}	X7.1: 0 V _{OUT}																																
X3.2: Output GDN	X7.2: Output GND																																
X3.3: FE	X7.3: FE																																
X4.0: n.c.	X8.0: n.c.																																
X4.1: n.c.	X8.1: n.c.																																
X4.2: Output I0+	X8.2: Output I1+																																
X4.3: FE	X8.3: FE																																
CPX-AB-1-SUB-BU-25POL																																	
	<table border="0"> <tr> <td>1: Output GND</td><td>14: Output GND</td></tr> <tr> <td>2: Output U0+</td><td>15: Output U1+</td></tr> <tr> <td>3: Output GND</td><td>16: Output GND</td></tr> <tr> <td>4: Output I0+</td><td>17: Output I1+</td></tr> <tr> <td>5: n.c.</td><td>18: 24 V_{OUT}</td></tr> <tr> <td>6: n.c.</td><td>19: n.c.</td></tr> <tr> <td>7: n.c.</td><td>20: 24 V_{OUT}</td></tr> <tr> <td>8: n.c.</td><td>21: n.c.</td></tr> <tr> <td>9: 24 V_{OUT}</td><td>22: 0 V_{OUT}</td></tr> <tr> <td>10: 24 V_{OUT}</td><td>23: 0 V_{OUT}</td></tr> <tr> <td>11: 0 V_{OUT}</td><td>24: 0 V_{OUT}</td></tr> <tr> <td>12: 0 V_{OUT}</td><td>25: FE</td></tr> <tr> <td>13: Screening³⁾</td><td>Socket: FE</td></tr> </table>	1: Output GND	14: Output GND	2: Output U0+	15: Output U1+	3: Output GND	16: Output GND	4: Output I0+	17: Output I1+	5: n.c.	18: 24 V _{OUT}	6: n.c.	19: n.c.	7: n.c.	20: 24 V _{OUT}	8: n.c.	21: n.c.	9: 24 V _{OUT}	22: 0 V _{OUT}	10: 24 V _{OUT}	23: 0 V _{OUT}	11: 0 V _{OUT}	24: 0 V _{OUT}	12: 0 V _{OUT}	25: FE	13: Screening ³⁾	Socket: FE						
1: Output GND	14: Output GND																																
2: Output U0+	15: Output U1+																																
3: Output GND	16: Output GND																																
4: Output I0+	17: Output I1+																																
5: n.c.	18: 24 V _{OUT}																																
6: n.c.	19: n.c.																																
7: n.c.	20: 24 V _{OUT}																																
8: n.c.	21: n.c.																																
9: 24 V _{OUT}	22: 0 V _{OUT}																																
10: 24 V _{OUT}	23: 0 V _{OUT}																																
11: 0 V _{OUT}	24: 0 V _{OUT}																																
12: 0 V _{OUT}	25: FE																																
13: Screening ³⁾	Socket: FE																																

1) Speedcon quick lock, screening additionally on metal thread








2) FE/screening additionally on metal thread

3) Connect screening to functional earth FE

Terminal CPX

FESTO

Accessories – Analogue module for outputs

Ordering data	
Designation	Part No. Type
Output module, analogue	
	2 analogue current or voltage outputs 526170 CPX-2AA-U-I
Connection block	
	Plastic 4x socket, M12, 5-pin 4x socket, M12 with quick-lock technology, 5-pin Spring clip terminal, 32-pin 1x Sub-D socket, 25-pin Metal 4x socket, M12, 5-pin 195704 CPX-AB-4-M12X2-5POL 541254 CPX-AB-4-M12X2-5POL-R 195708 CPX-AB-8-KL-4POL 525676 CPX-AB-1-SUB-BU-25POL 549367 CPX-M-AB-4-M12X2-5POL
Plug	
	M12 plug, 5-pin 175487 SEA-M12-5GS-PG7
	Sub-D plug, 25-pin 527522 SD-SUB-D-ST25
Connecting cable	
	Modular system for connecting cables – NEBU-... → Internet: nebu
Cover	
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug 538219 AK-8KL
	Fittings kit 538220 VG-K-M9
Screening plate	
	Screening plate for M12 connections 526184 CPX-AB-S-4-M12
User manual	
	User manual German 526415 P.BE-CPX-AX-DE English 526416 P.BE-CPX-AX-EN Spanish 526417 P.BE-CPX-AX-ES French 526418 P.BE-CPX-AX-FR Italian 526419 P.BE-CPX-AX-IT Swedish 526420 P.BE-CPX-AX-SV

Terminal CPX

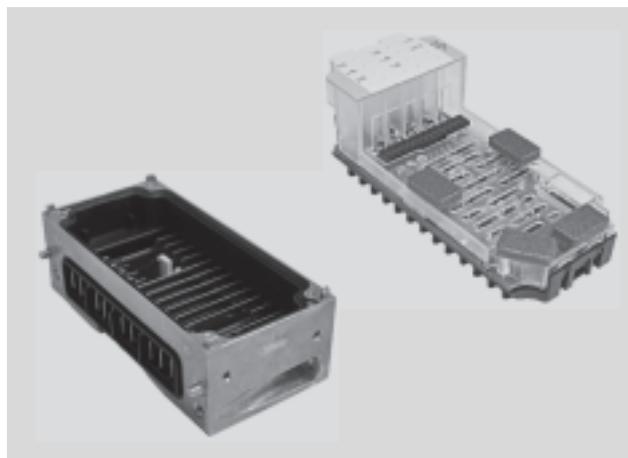
Technical data – PROFIsafe shut-off module

Function

The PROFIsafe shut-off module interrupts the contact rails of the interlinking block for valves and outputs. The supply voltage for valves can be switched by the module within the CPX terminal and via a connection block to two consuming devices. Actuation takes place via the fieldbus node (PROFINET) of the CPX terminal.

Scope of application

- Output module for 24 V DC supply voltage
- Shut-off module for supply voltage for valves
- Can only be used with PROFINET or PROFIBUS bus node
- The shut-off module is supplied with voltage for the electronics and the outputs by the interlinking block
- The outputs are supplied from the power supply for valves (V_{Valves})



General technical data

Type	CPX-FVDA-P	CPX-FVDA-P2
Number of outputs	2	
Note on outputs	1 internal channel for shutting off the supply voltage for valves 2 external outputs	
Max. power supply	Per module [A] Per channel [A]	5 0.5 (12 W lamp load) 1.5
Fuse protection (short circuit)		Internal electronic fuse for each channel
Current consumption of module	[mA]	Typ. 65 (power supply for valves) Typ. 25 (power supply for electronics)
Operating voltage	Nominal value [V DC] Permissible range [V DC]	24 20.4 ... 28.8
Voltage drop per channel	[V]	0.6
Residual ripple	[Vss]	2 within voltage range
Load capacity to FE	[nF]	100 400
Max. response time to shut-off command	[ms]	16 23
Electrical isolation	Channel – channel Channel – internal bus	No Yes, using an intermediate supply
Switching logic	Outputs	P-M switching
Safety integrity level		Safe shut off, SIL 3
Performance level		Safe shut off/category 3, performance level e
Failure rate per hour (PFH)		1.3×10^{-10} 1.0×10^{-9}
Certificate issuing authority		01/205/5074/10 01/205/50294/13
LED displays	Group diagnostics Channel diagnostics Channel status Failsafe protocol active	1 3 3 1
Diagnostics		• Short circuit/overload per channel • Undervoltage of valves • Cross circuit • Wire break per channel
Parameterisation		• Wire break monitoring per channel • Diagnostic behaviour
Protection class to EN 60529		Depending on connection block
Materials		PA reinforced, PC
Note on materials		RoHS-compliant
Grid dimension	[mm]	50
Dimensions (incl. interlinking block and connection block) W x L x H	[mm]	50 x 107 x 50 50 x 107 x 55

Terminal CPX


Technical data – PROFI safe shut-off module

Operating and environmental conditions

Ambient temperature	[°C]	-5 ... +50
Storage temperature	[°C]	-20 ... +70
CE mark (see declaration of conformity)	To EU Machinery Directive	
Certification	c UL us - Recognized (OL)	

Connection and display components

CPX-FVDA-P



- [1] Status LEDs (yellow):
0: Supply voltage for valves
1: X1
2: X2
- [2] Channel-specific error LEDs (red)
- [3] Failsafe protocol active (green)
- [4] Error LED (red, module error)

Combinations of bus nodes/control blocks and PROFI safe shut-off module

Bus node/control block	Part No.	PROFI safe shut-off module	
		CPX-FVDA-P	CPX-FVDA-P2
CPX-FEC-1-I/E	529041	–	–
CPX-CEC-C1	567347	–	–
CPX-CEC-M1	567348	–	–
CPX-CEC	567346	–	–
CPX-FB6	195748	–	–
CPX-FB11	526172	–	–
CPX-FB13	195740	–	■
CPX-FB14	526174	–	–
CPX-FB23	526176	–	–
CPX-FB32	541302	–	–
CPX-FB33	548755	■	■
CPX-M-FB34	548751	■	■
CPX-M-FB35	548749	■	■
CPX-FB36	1912451	–	–
CPX-FB38	552046	–	–



– Note

The PROFI safe shut-off module CPX-FVDA-P can only be interfaced as of software release 18.



– Note

The PROFI safe shut-off module CPX-FVDA-P2 can only be interfaced as of software release 21 or release 30 (CPX-FB13).

Terminal CPX

Technical data – PROFIsafe shut-off module

Combinations of connection blocks and PROFIsafe shut-off module			
Connection blocks	Part No.	PROFIsafe shut-off module	
		CPX-FVDA-P	CPX-FVDA-P2
CPX-M-AB-4-M12X2-5POL	549367	■	■
CPX-AB-8-KL-4POL	195708	-	■

Pin allocation																																														
Connection block outputs	CPX-FVDA-P	CPX-FVDA-P2																																												
CPX-M-AB-4-M12X2-5POL																																														
	<table border="0"> <tr><td>X1.1: 0 V_{OUT} 1 (cannot be shut off)</td><td>X3.1: n.c.</td><td>X1.1: 0 V_{OUT} 1 (cannot be shut off)</td><td>X3.1: n.c.</td></tr> <tr><td>X1.2: 24 V_{OUT} 1 (cannot be shut off)</td><td>X3.2: n.c.</td><td>X1.2: 24 V_{OUT} 1 (cannot be shut off)</td><td>X3.2: n.c.</td></tr> <tr><td>X1.3: 0 V_{OUT} 1 (can be shut off via fieldbus)</td><td>X3.3: n.c.</td><td>X1.3: 0 V_{OUT} 1 (can be shut off via fieldbus)</td><td>X3.3: n.c.</td></tr> <tr><td>X1.4: 24 V_{OUT} 1 (can be shut off via fieldbus)</td><td>X3.4: n.c.</td><td>X1.4: 24 V_{OUT} 1 (can be shut off via fieldbus)</td><td>X3.4: n.c.</td></tr> <tr><td>X1.5: FE (earth)</td><td>X3.5: FE (earth)</td><td>X1.5: FE (earth)</td><td>X3.5: FE (earth)</td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td>X2.1: 0 V_{OUT} 2 (cannot be shut off)</td><td>X4.1: n.c.</td><td>X2.1: 0 V_{OUT} 2 (cannot be shut off)</td><td>X4.1: n.c.</td></tr> <tr><td>X2.2: 24 V_{OUT} 2 (cannot be shut off)</td><td>X4.2: n.c.</td><td>X2.2: 24 V_{OUT} 2 (cannot be shut off)</td><td>X4.2: n.c.</td></tr> <tr><td>X2.3: 0 V_{OUT} 2 (can be shut off via fieldbus)</td><td>X4.3: n.c.</td><td>X2.3: 0 V_{OUT} 2 (can be shut off via fieldbus)</td><td>X4.3: n.c.</td></tr> <tr><td>X2.4: 24 V_{OUT} 2 (can be shut off via fieldbus)</td><td>X4.4: n.c.</td><td>X2.4: 24 V_{OUT} 2 (can be shut off via fieldbus)</td><td>X4.4: n.c.</td></tr> <tr><td>X2.5: FE (earth)</td><td>X4.5: FE (earth)</td><td>X2.5: FE (earth)</td><td>X4.5: FE (earth)</td></tr> </table>	X1.1: 0 V _{OUT} 1 (cannot be shut off)	X3.1: n.c.	X1.1: 0 V _{OUT} 1 (cannot be shut off)	X3.1: n.c.	X1.2: 24 V _{OUT} 1 (cannot be shut off)	X3.2: n.c.	X1.2: 24 V _{OUT} 1 (cannot be shut off)	X3.2: n.c.	X1.3: 0 V _{OUT} 1 (can be shut off via fieldbus)	X3.3: n.c.	X1.3: 0 V _{OUT} 1 (can be shut off via fieldbus)	X3.3: n.c.	X1.4: 24 V _{OUT} 1 (can be shut off via fieldbus)	X3.4: n.c.	X1.4: 24 V _{OUT} 1 (can be shut off via fieldbus)	X3.4: n.c.	X1.5: FE (earth)	X3.5: FE (earth)	X1.5: FE (earth)	X3.5: FE (earth)					X2.1: 0 V _{OUT} 2 (cannot be shut off)	X4.1: n.c.	X2.1: 0 V _{OUT} 2 (cannot be shut off)	X4.1: n.c.	X2.2: 24 V _{OUT} 2 (cannot be shut off)	X4.2: n.c.	X2.2: 24 V _{OUT} 2 (cannot be shut off)	X4.2: n.c.	X2.3: 0 V _{OUT} 2 (can be shut off via fieldbus)	X4.3: n.c.	X2.3: 0 V _{OUT} 2 (can be shut off via fieldbus)	X4.3: n.c.	X2.4: 24 V _{OUT} 2 (can be shut off via fieldbus)	X4.4: n.c.	X2.4: 24 V _{OUT} 2 (can be shut off via fieldbus)	X4.4: n.c.	X2.5: FE (earth)	X4.5: FE (earth)	X2.5: FE (earth)	X4.5: FE (earth)	
X1.1: 0 V _{OUT} 1 (cannot be shut off)	X3.1: n.c.	X1.1: 0 V _{OUT} 1 (cannot be shut off)	X3.1: n.c.																																											
X1.2: 24 V _{OUT} 1 (cannot be shut off)	X3.2: n.c.	X1.2: 24 V _{OUT} 1 (cannot be shut off)	X3.2: n.c.																																											
X1.3: 0 V _{OUT} 1 (can be shut off via fieldbus)	X3.3: n.c.	X1.3: 0 V _{OUT} 1 (can be shut off via fieldbus)	X3.3: n.c.																																											
X1.4: 24 V _{OUT} 1 (can be shut off via fieldbus)	X3.4: n.c.	X1.4: 24 V _{OUT} 1 (can be shut off via fieldbus)	X3.4: n.c.																																											
X1.5: FE (earth)	X3.5: FE (earth)	X1.5: FE (earth)	X3.5: FE (earth)																																											
X2.1: 0 V _{OUT} 2 (cannot be shut off)	X4.1: n.c.	X2.1: 0 V _{OUT} 2 (cannot be shut off)	X4.1: n.c.																																											
X2.2: 24 V _{OUT} 2 (cannot be shut off)	X4.2: n.c.	X2.2: 24 V _{OUT} 2 (cannot be shut off)	X4.2: n.c.																																											
X2.3: 0 V _{OUT} 2 (can be shut off via fieldbus)	X4.3: n.c.	X2.3: 0 V _{OUT} 2 (can be shut off via fieldbus)	X4.3: n.c.																																											
X2.4: 24 V _{OUT} 2 (can be shut off via fieldbus)	X4.4: n.c.	X2.4: 24 V _{OUT} 2 (can be shut off via fieldbus)	X4.4: n.c.																																											
X2.5: FE (earth)	X4.5: FE (earth)	X2.5: FE (earth)	X4.5: FE (earth)																																											
CPX-AB-8-KL-4POL																																														
	<table border="0"> <tr><td>X1.0: 0 V_{OUT} 1 (cannot be shut off)</td><td>X5.0: n.c.</td></tr> <tr><td>X1.1: 0 V_{OUT} 1 (can be shut off via fieldbus)</td><td>X5.1: n.c.</td></tr> <tr><td>X1.2: 24 V_{OUT} 1 (can be shut off via fieldbus)</td><td>X5.2: n.c.</td></tr> <tr><td>X1.3: FE (earth)</td><td>X5.3: n.c.</td></tr> <tr><td> </td><td> </td></tr> <tr><td>X2.0: n.c.</td><td>X6.0: n.c.</td></tr> <tr><td>X2.1: n.c.</td><td>X6.1: n.c.</td></tr> <tr><td>X2.2: 24 V_{OUT} 1 (cannot be shut off)</td><td>X6.2: n.c.</td></tr> <tr><td>X2.3: FE (earth)</td><td>X6.3: n.c.</td></tr> <tr><td> </td><td> </td></tr> <tr><td>X3.0: 0 V_{OUT} 2 (cannot be shut off)</td><td>X7.0: n.c.</td></tr> <tr><td>X3.1: 0 V_{OUT} 2 (can be shut off via fieldbus)</td><td>X7.1: n.c.</td></tr> <tr><td>X3.2: 24 V_{OUT} 2 (can be shut off via fieldbus)</td><td>X7.2: n.c.</td></tr> <tr><td>X3.3: FE (earth)</td><td>X7.3: n.c.</td></tr> <tr><td> </td><td> </td></tr> <tr><td>X4.0: n.c.</td><td>X8.0: n.c.</td></tr> <tr><td>X4.1: n.c.</td><td>X8.1: n.c.</td></tr> <tr><td>X4.2: 24 V_{OUT} 2 (cannot be shut off)</td><td>X8.2: n.c.</td></tr> <tr><td>X4.3: FE (earth)</td><td>X8.3: n.c.</td></tr> </table>	X1.0: 0 V _{OUT} 1 (cannot be shut off)	X5.0: n.c.	X1.1: 0 V _{OUT} 1 (can be shut off via fieldbus)	X5.1: n.c.	X1.2: 24 V _{OUT} 1 (can be shut off via fieldbus)	X5.2: n.c.	X1.3: FE (earth)	X5.3: n.c.			X2.0: n.c.	X6.0: n.c.	X2.1: n.c.	X6.1: n.c.	X2.2: 24 V _{OUT} 1 (cannot be shut off)	X6.2: n.c.	X2.3: FE (earth)	X6.3: n.c.			X3.0: 0 V _{OUT} 2 (cannot be shut off)	X7.0: n.c.	X3.1: 0 V _{OUT} 2 (can be shut off via fieldbus)	X7.1: n.c.	X3.2: 24 V _{OUT} 2 (can be shut off via fieldbus)	X7.2: n.c.	X3.3: FE (earth)	X7.3: n.c.			X4.0: n.c.	X8.0: n.c.	X4.1: n.c.	X8.1: n.c.	X4.2: 24 V _{OUT} 2 (cannot be shut off)	X8.2: n.c.	X4.3: FE (earth)	X8.3: n.c.							
X1.0: 0 V _{OUT} 1 (cannot be shut off)	X5.0: n.c.																																													
X1.1: 0 V _{OUT} 1 (can be shut off via fieldbus)	X5.1: n.c.																																													
X1.2: 24 V _{OUT} 1 (can be shut off via fieldbus)	X5.2: n.c.																																													
X1.3: FE (earth)	X5.3: n.c.																																													
X2.0: n.c.	X6.0: n.c.																																													
X2.1: n.c.	X6.1: n.c.																																													
X2.2: 24 V _{OUT} 1 (cannot be shut off)	X6.2: n.c.																																													
X2.3: FE (earth)	X6.3: n.c.																																													
X3.0: 0 V _{OUT} 2 (cannot be shut off)	X7.0: n.c.																																													
X3.1: 0 V _{OUT} 2 (can be shut off via fieldbus)	X7.1: n.c.																																													
X3.2: 24 V _{OUT} 2 (can be shut off via fieldbus)	X7.2: n.c.																																													
X3.3: FE (earth)	X7.3: n.c.																																													
X4.0: n.c.	X8.0: n.c.																																													
X4.1: n.c.	X8.1: n.c.																																													
X4.2: 24 V _{OUT} 2 (cannot be shut off)	X8.2: n.c.																																													
X4.3: FE (earth)	X8.3: n.c.																																													

Terminal CPX

Technical data – PROFIsafe shut-off module


Combinations of interlinking blocks and PROFIsafe shut-off module

Interlinking blocks	Part No.	PROFIsafe shut-off module	
		CPX-FVDA-P	CPX-FVDA-P2
CPX-GE-EV-S	195746	–	–
CPX-GE-EV-S-7/8-4POL	541248	–	–
CPX-GE-EV-S-7/8-5POL	541244	–	–
CPX-M-GE-EV-S-7/8-CIP-4P	568956	–	–
CPX-M-GE-EV-S-7/8-5POL	550208	–	–
CPX-M-GE-EV-S-PP-5POL	563057	–	–
CPX-GE-EV	195742	–	–
CPX-M-GE-EV	550206	–	–
CPX-M-GE-EV-FVO	567806	■	■
CPX-GE-EV-Z	195744	–	–
CPX-GE-EV-Z-7/8-4POL	541250	–	–
CPX-GE-EV-Z-7/8-5POL	541246	–	–
CPX-M-GE-EV-Z-7/8-5POL	550210	–	–
CPX-M-GE-EV-Z-PP-5POL	563058	–	–
CPX-GE-EV-V	533577	–	–
CPX-GE-EV-V-7/8-4POL	541252	–	–

General technical data

Type	CPX-M-GE-EV-FVO
Nominal operating voltage [V DC]	24
Acceptable current load (per contact/contact rail) [A]	16
Protection class to EN 60529	Depending on connection block
Ambient temperature [°C]	-5 ... +50
Material declaration	RoHS-compliant
Note on materials	Die-cast aluminium
Type of mounting	Angled fitting
Grid dimension [mm]	50
Dimensions W x L x H [mm]	50 x 107 x 35
Product weight [g]	170

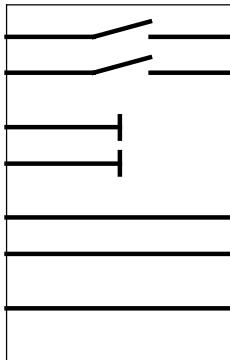Pin allocation










Circuitry	Pin	Allocation
	–	–
0V Valves	–	–
24V Valves	–	–
0V Output	–	–
24V Output	–	–
0V El./Sen.	–	–
24V El./Sen.	–	–
FE		

New
CPX-FVDA-P2

FESTO

Terminal CPX

Accessories – PROFIsafe shut-off module

Ordering data		Description	Part No.	Type
PROFIsafe shut-off module				
	Metal connection block	4x socket, M12, 5-pin	549367	CPX-M-AB-4-M12X2-5POL
	Plastic connection block	Spring-loaded terminal, 32-pin	195708	CPX-AB-8-KL-4POL
	Electronics module (can only be used with CPX-M-GE-EV-FVO)	PROFINET	567039	CPX-FVDA-P
		PROFINET, PROFIBUS	1971599	CPX-FVDA-P2
	Metal interlinking block (only for CPX-FVDA-P and CPX-FVDA-P2)		567806	CPX-M-GE-EV-FVO
Plug				
	Push-in T-connector	2x socket M12, 5-pin 1x plug M12, 4-pin	541596	NEDU-M12D5-M12T4
	Plug	M12, PG7	18666	SEA-GS-7
		M12, PG7, 4-pin for cable Ø 2.5 mm	192008	SEA-4GS-7-2,5
		M12, PG9	18778	SEA-GS-9
		M12 for 2 cables	18779	SEA-GS-11-DUO
		M12 for 2 cables, 5-pin	192010	SEA-5GS-11-DUO
		M12, 5-pin	175487	SEA-M12-5GS-PG7
Connecting cable				
	Connecting cable M12-M12	Straight plug – straight socket	2.5 m	18684 KM12-M12-GSGD-2,5
			5.0 m	18686 KM12-M12-GSGD-5
		Straight plug – angled socket	1.0 m	185499 KM12-M12-GSWD-1-4
	Modular system for connecting cables		–	NEBU-... ➔ Internet: nebu
	DUO cable M12	2x straight socket	18685	KM12-DUO-M8-GDGD
		2x straight/angled socket	18688	KM12-DUO-M8-GDWD
		2x angled socket	18687	KM12-DUO-M8-WDWD
Manual				
	Manual for PROFIsafe shut-off module	CPX-FVDA-P	German	570843 P.BE-CPX-SYS-F-DE
			English	570844 P.BE-CPX-SYS-F-EN
			Spanish	570845 P.BE-CPX-SYS-F-ES
			French	570846 P.BE-CPX-SYS-F-FR
			Italian	570847 P.BE-CPX-SYS-F-IT
			Swedish	570848 P.BE-CPX-SYS-F-SV
			Chinese	8025339 P.BE-CPX-FVDA-P-ZH
		CPX-FVDA-P2	German	8022606 P.BE-CPX-FVDA-P2-DE
			English	8022607 P.BE-CPX-FVDA-P2-EN
			Spanish	8022608 P.BE-CPX-FVDA-P2-ES
			French	8022609 P.BE-CPX-FVDA-P2-FR
			Italian	8022610 P.BE-CPX-FVDA-P2-IT
			Chinese	8022611 P.BE-CPX-FVDA-P2-ZH

Terminal CPX

Technical data – Interlinking block with system supply

Function

Interlinking blocks ensure the electrical supply of all other CPX modules. They have contact rails, from which the other CPX components on the interlinking modules are supplied with current.

Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Applications

- 24 V DC supply voltage for electronics of the CPX terminal
- 24 V DC supply voltage for inputs
- 24 V DC supply voltage for valves
- 24 V DC supply voltage for outputs



General technical data

Nominal operating voltage	[V DC]	24
Protection class to EN 60529		Depending on connection block
Ambient temperature	[°C]	-5 ... +50
Note on materials		RoHS-compliant
Grid dimension	[mm]	50
Dimensions W x L x H	[mm]	50 x 107 x 35

Technical data – Plastic interlinking blocks

Type	CPX-GE-EV-S				
		-VL	-7/8-4POL	-7/8-5POL	-7/8-5POL-VL
Electrical connection	M18	M18	7/8", 4-pin	7/8", 5-pin	7/8", 5-pin
Current supply	Sensors and electronics [A]	Max. 16	Max. 8	Max. 10	Max. 8
	Valves and outputs [A]	Max. 16	Max. 8	Max. 10	Max. 8
Materials	PA, reinforced				
Product weight	[g]	125			

Technical data – Metal interlinking blocks

Type	CPX-M-GE-EV-S			
	-7/8-CIP-4P	-7/8-5POL	-7/8-5POL-VL	-PP-5POL
Electrical connection	7/8", 4-pin	7/8", 5-pin	7/8", 5-pin	AIDA push-pull, 5-pin
Current supply	Sensors and electronics [A]	Max. 10	Max. 8	Max. 8
	Valves and outputs [A]	Max. 10	Max. 8	Max. 16
Materials	Die-cast aluminium			
Product weight	[g]	187	187	245



Note

Note the following points about the interlinking block

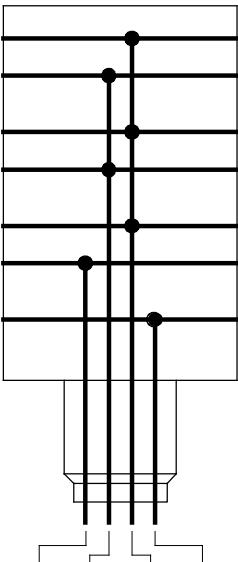

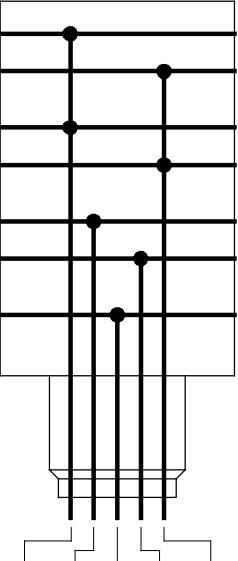

CPX-M-GE-EV-S-7/8-CIP-4P:

- Must be mounted as the first module to the right of the left-hand end plate

- Only permitted as an interlinking block to a bus node
- The functional earth (FE) must be connected via the left-hand end plate

Terminal CPX

Technical data – Interlinking block with system supply

Pin allocation – Plastic interlinking blocks		Circuitry	Pin	Allocation
Round connector, 4-pin				
	M18	1	2	3
		A	B	D
		24V	24V	0V
				FE
7/8"				
		A	B	C
		24V	24V	0V
				FE
Round connector, 5-pin				
	7/8"	1	2	3
		0V	0V	FE
				24V
				24V
		4	3	2
		5		1
		0V	0V	FE
				24V
				24V

Terminal CPX



Technical data – Interlinking block with system supply

Pin allocation – Metal interlinking blocks

Circuitry		Pin	Allocation										
Round connector, 5-pin													
	7/8"		<table border="1"> <tr> <td>1</td><td>0 V valves and outputs</td></tr> <tr> <td>2</td><td>0 V electronics and sensors</td></tr> <tr> <td>3</td><td>FE</td></tr> <tr> <td>4</td><td>24 V DC supply voltage for electronics and sensors</td></tr> <tr> <td>5</td><td>24 V DC load voltage supply for valves and outputs</td></tr> </table>	1	0 V valves and outputs	2	0 V electronics and sensors	3	FE	4	24 V DC supply voltage for electronics and sensors	5	24 V DC load voltage supply for valves and outputs
1	0 V valves and outputs												
2	0 V electronics and sensors												
3	FE												
4	24 V DC supply voltage for electronics and sensors												
5	24 V DC load voltage supply for valves and outputs												
	7/8"		<table border="1"> <tr> <td>A</td><td>24 V DC supply voltage for electronics and sensors</td></tr> <tr> <td>B</td><td>24 V DC load voltage supply for valves and outputs</td></tr> <tr> <td>C</td><td>0 V DC supply voltage for electronics and sensors</td></tr> <tr> <td>D</td><td>0 V DC load voltage supply for valves and outputs</td></tr> </table> <p>Note: The functional earth (FE) must be connected via the left-hand end plate</p>	A	24 V DC supply voltage for electronics and sensors	B	24 V DC load voltage supply for valves and outputs	C	0 V DC supply voltage for electronics and sensors	D	0 V DC load voltage supply for valves and outputs		
A	24 V DC supply voltage for electronics and sensors												
B	24 V DC load voltage supply for valves and outputs												
C	0 V DC supply voltage for electronics and sensors												
D	0 V DC load voltage supply for valves and outputs												






Terminal CPX

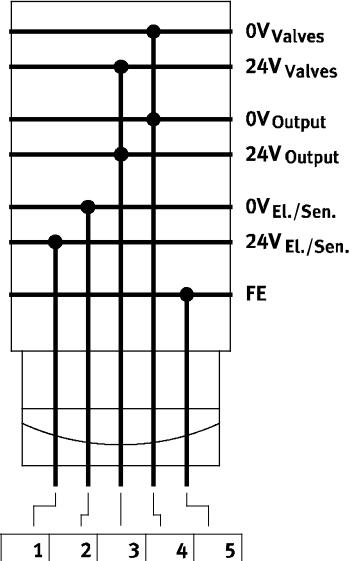Technical data – Interlinking block with system supply

Pin allocation – Metal interlinking blocks		Pin	Allocation																					
Circuitry																								
Push-pull plug, 5-pin																								
 <table border="1"> <tr> <td>PP</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> </tr> <tr> <td>24V</td> <td>0V</td> <td>24V</td> <td>0V</td> <td>FE</td> <td></td> </tr> </table>	PP	1	2	3	4	5	24V	0V	24V	0V	FE			<p>Plug pattern to PROFINET specification</p>  <table border="1"> <tr> <td>1</td> <td>24 V DC supply voltage for electronics and sensors</td> </tr> <tr> <td>2</td> <td>0 V electronics and sensors</td> </tr> <tr> <td>3</td> <td>24 V DC load voltage supply for valves and outputs</td> </tr> <tr> <td>4</td> <td>0 V valves and outputs</td> </tr> <tr> <td>5</td> <td>FE</td> </tr> </table>	1	24 V DC supply voltage for electronics and sensors	2	0 V electronics and sensors	3	24 V DC load voltage supply for valves and outputs	4	0 V valves and outputs	5	FE
PP	1	2	3	4	5																			
24V	0V	24V	0V	FE																				
1	24 V DC supply voltage for electronics and sensors																							
2	0 V electronics and sensors																							
3	24 V DC load voltage supply for valves and outputs																							
4	0 V valves and outputs																							
5	FE																							

Terminal CPX

Accessories – Interlinking block with system supply

Ordering data					
Designation		Part No.	Type		
Interlinking block with system supply					
	Connection M18, plastic interlinking block	4-pin	–	195746 CPX-GE-EV-S	
	For ATEX environment		–	8022170 CPX-GE-EV-S-VL	
	Connection 7/8", plastic interlinking block	4-pin	–	541248 CPX-GE-EV-S-7/8-4POL	
		5-pin	–	541244 CPX-GE-EV-S-7/8-5POL	
	Connection 7/8", metal interlinking block	5-pin	For ATEX environment	8022172 CPX-GE-EV-S-7/8-5POL-VL	
	Connection push-pull plug (AIDA), metal interlinking block		–	568956 CPX-M-GE-EV-S-7/8-CIP-4P	
			–	550208 CPX-M-GE-EV-S-7/8-5POL	
			For ATEX environment	8022165 CPX-M-GE-EV-S-7/8-5POL-VL	
7/8" connection sockets					
	Power supply socket	5-pin		543107 NECU-G78G5-C2	
		4-pin		543108 NECU-G78G4-C2	
	Angled socket, 5-pin – Open cable end, 5-pin	2 m		573855 NEBU-G78W5-K-2-N-LE5	
M18 connection sockets					
	Straight socket, screw terminal	4-pin	PG9	18493 NTSD-GD-9	
		4-pin	PG13.5	18526 NTSD-GD-13,5	
	Angled socket, screw terminal	4-pin	PG9	18527 NTSD-WD-9	
	Angled socket, screw terminal	4-pin	PG11	533119 NTSD-WD-11	
Connection socket AIDA push-pull					
	Socket, spring-loaded terminal	5-pin		563059 NECU-M-PPG5-C1	

Terminal CPX

Accessories – Interlinking block with system supply

Ordering data		Part No.	Type
Designation			
Mounting accessories			
	Screws for mounting the bus node/connection block on a plastic interlinking block	Bus node/metal connection block	550218 CPX-DPT-30X32-S-4X
	Screws for mounting the bus node/connection block on a metal interlinking block	Bus node/plastic connection block	550219 CPX-M-M3x22-4x
		Bus node/metal connection block	550216 CPX-M-M3x22-S-4x

Terminal CPX

FESTO

Technical data – Interlinking block

Function

Interlinking blocks ensure the electrical supply of all other CPX modules. They have contact rails, from which the other CPX components on the interlinking modules are supplied with current.

Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Applications

- All voltages are fed through to the next module by means of an interlinking system.
- The connected electronics module for inputs/outputs or bus node taps off the required voltage.



General technical data

Type	CPX-GE-EV	CPX-M-GE-EV
Electrical connection	–	–
Nominal operating voltage	[V DC]	24
Acceptable current load (per contact/contact rail)	[A]	16
Protection class to EN 60529		Depending on connection block
Ambient temperature	[°C]	–5 ... +50
Note on materials		RoHS-compliant
Materials	Polymer	Aluminium
Grid dimension	[mm]	50
Dimensions W x L x H	[mm]	50 x 107 x 35
Weight	[g]	100
		162


Pin allocation

Circuitry		Pin	Allocation
		–	–
		–	–
		–	–
		–	–
0V Valves			
24V Valves			
0V Output			
24V Output			
0V El./Sen.			
24V El./Sen.			
FE			

Terminal CPX

Accessories – Interlinking block

FESTO

Ordering data – Mounting accessories		Part No.	Type
Designation			
Interlinking block without supply			
			
Plastic interlinking block		195742	CPX-GE-EV
Metal interlinking block		550206	CPX-M-GE-EV
Mounting accessories			
		550218	CPX-DPT-30X32-S-4x
Screws for mounting the bus node/connection block on a plastic interlinking block	Bus node/metal connection block		
		550219	CPX-M-M3x22-4x
Screws for mounting the bus node/connection block on a metal interlinking block	Bus node/plastic connection block		
		550216	CPX-M-M3x22-S-4x
Bus node/metal connection block			

Terminal CPX

Technical data – Interlinking block with additional power supply for outputs

Function

Interlinking blocks ensure the electrical supply of all other CPX modules. They have contact rails, from which the other CPX components on the interlinking modules are supplied with current. Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Applications

- 24 V DC supply voltage for outputs



General technical data

Nominal operating voltage	[V DC]	24
Protection class to EN 60529		Depending on connection block
Ambient temperature	[°C]	-5 ... +50
Note on materials		RoHS-compliant
Grid dimension	[mm]	50
Dimensions W x L x H	[mm]	50 x 107 x 35

Technical data – Plastic interlinking blocks

Type	CPX-GE-EV-Z				
		-VL	-7/8-4POL	-7/8-5POL	-7/8-5POL-VL
Electrical connection	M18	M18	7/8", 4-pin	7/8", 5-pin	7/8", 5-pin
Current supply	Outputs [A]	Max. 16	Max. 8	Max. 10	Max. 8
Materials		PA, reinforced			
Product weight	[g]	125			



Technical data – Metal interlinking blocks

Type	CPX-M-GE-EV-Z		
	-7/8-5POL	-7/8-5POL-VL	-PP-5POL
Electrical connection	7/8", 5-pin	7/8", 5-pin	AIDA push-pull, 5-pin
Current supply	Outputs [A]	Max. 8	Max. 8
Materials		Die-cast aluminium	
Product weight	[g]	187	187
			245

Terminal CPX

Technical data – Interlinking block with additional power supply for outputs


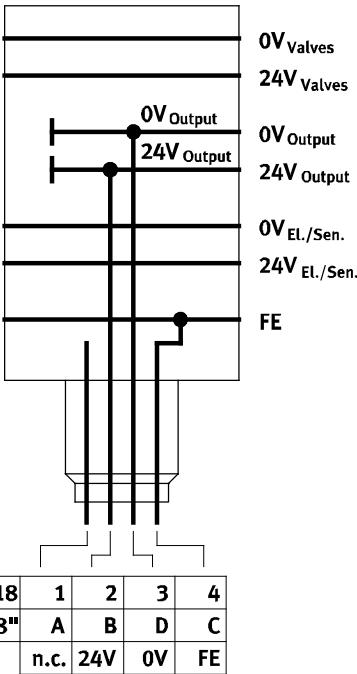
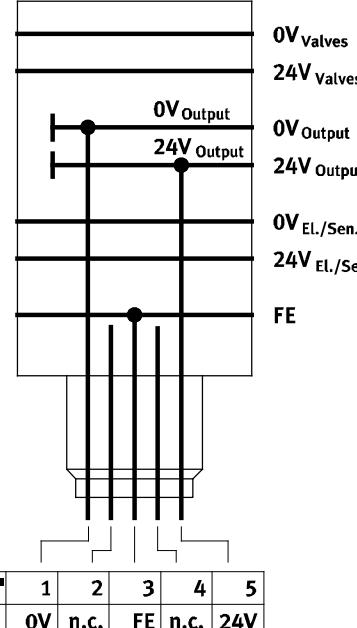
Pin allocation – Plastic interlinking blocks

Circuitry		Pin	Allocation
Round connector, 4-pin			
			
0V _{Valves}	M18	1	n.c.
24V _{Valves}		2	24 V DC load voltage supply for outputs
0V _{Output}		3	0 V
24V _{Output}		4	FE
0V _{El./Sen.}	7/8"	A	n.c.
24V _{El./Sen.}		B	24 V DC load voltage supply for outputs
FE		C	FE
		D	0V
			
0V _{Valves}	7/8"	1	0 V outputs
24V _{Valves}		2	n.c.
0V _{Output}		3	FE
24V _{Output}		4	n.c.
0V _{El./Sen.}		5	24 V DC load voltage supply for outputs
24V _{El./Sen.}			
FE			
0V			
n.c.			
FE			
n.c.			
24V			

Terminal CPX










Technical data – Interlinking block with additional power supply for outputs

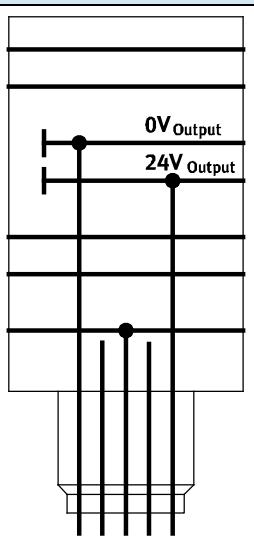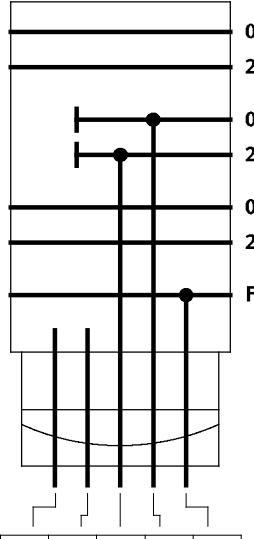Pin allocation – Metal interlinking blocks

Circuitry		Pin	Allocation												
Round connector, 5-pin															
	7/8"		<table border="1"> <tr><td>1</td><td>0 V outputs</td></tr> <tr><td>2</td><td>n.c.</td></tr> <tr><td>3</td><td>FE</td></tr> <tr><td>4</td><td>n.c.</td></tr> <tr><td>5</td><td>24 V DC load voltage supply for outputs</td></tr> </table>	1	0 V outputs	2	n.c.	3	FE	4	n.c.	5	24 V DC load voltage supply for outputs		
1	0 V outputs														
2	n.c.														
3	FE														
4	n.c.														
5	24 V DC load voltage supply for outputs														
	Push-pull plug, 5-pin	Plug pattern to PROFINET specification	<table border="1"> <tr><td>1</td><td>n.c.</td></tr> <tr><td>2</td><td>n.c.</td></tr> <tr><td>3</td><td>24 V DC load voltage supply for outputs</td></tr> <tr><td>4</td><td>0 V outputs</td></tr> <tr><td>5</td><td>FE</td></tr> </table>	1	n.c.	2	n.c.	3	24 V DC load voltage supply for outputs	4	0 V outputs	5	FE		
1	n.c.														
2	n.c.														
3	24 V DC load voltage supply for outputs														
4	0 V outputs														
5	FE														
<table border="1"> <tr><td>PP</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr> <tr><td>n.c.</td><td>n.c.</td><td>24V</td><td>0V</td><td>FE</td><td></td></tr> </table>	PP	1	2	3	4	5	n.c.	n.c.	24V	0V	FE				
PP	1	2	3	4	5										
n.c.	n.c.	24V	0V	FE											

Terminal CPX

Accessories – Interlinking block with additional power supply for outputs

Ordering data				
Designation		Part No.	Type	
Interlinking block with additional power supply for outputs				
	Connection M18, plastic interlinking block	4-pin	–	195744 CPX-GE-EV-Z
	For ATEX environment			8022166 CPX-GE-EV-Z-VL
	Connection 7/8", plastic interlinking block	4-pin	–	541250 CPX-GE-EV-Z-7/8-4POL
		5-pin	–	541246 CPX-GE-EV-Z-7/8-5POL
			For ATEX environment	8022173 CPX-GE-EV-Z-7/8-5POL-VL
	Connection 7/8", metal interlinking block	5-pin	–	550210 CPX-M-GE-EV-Z-7/8-5POL
	Connection push-pull plug (AIDA), metal interlinking block	5-pin	–	8022158 CPX-M-GE-EV-Z-7/8-5POL-VL
				563058 CPX-M-GE-EV-Z-PP-5POL
7/8" connection sockets				
	Power supply socket	5-pin		543107 NECU-G78G5-C2
		4-pin		543108 NECU-G78G4-C2
	Angled socket, 5-pin – Open cable end, 5-pin	2 m		573855 NEBU-G78W5-K-2-N-LE5
M18 connection sockets				
	Straight socket, screw terminal	4-pin	PG9	18493 NTSD-GD-9
			PG13.5	18526 NTSD-GD-13,5
	Angled socket, screw terminal	4-pin	PG9	18527 NTSD-WD-9
	Angled socket, screw terminal	4-pin	PG11	533119 NTSD-WD-11
Connection socket AIDA push-pull				
	Socket, spring-loaded terminal	5-pin		563059 NECU-M-PPG5-C1
Mounting accessories				
	Screws for mounting the bus node/connection block on a plastic interlinking block		Bus node/metal connection block	550218 CPX-DPT-30X32-S-4X
	Screws for mounting the bus node/connection block on a metal interlinking block		Bus node/plastic connection block	550219 CPX-M-M3x22-4x
			Bus node/metal connection block	550216 CPX-M-M3x22-S-4x

Terminal CPX

Technical data – Interlinking block with additional power supply for valves

Function

Interlinking blocks ensure the electrical supply of all other CPX modules.

They have contact rails, from which the other CPX components on the interlinking modules are supplied with current.

Internal division of the power supply makes it possible to switch off specific areas of the sensors and actuators individually.

Applications

- 24 V DC supply voltage for valves



General technical data







Type	CPX-GE-EV-V	CPX-GE-EV-V-VL	CPX-GE-EV-V-7/8-4POL
Electrical connection	M18		7/8", 4-pin
Nominal operating voltage	[V DC]	24	
Acceptable current load (per contact/contact rail)	[A]	16	8
Protection class to EN 60529		Depending on connection block	10
Ambient temperature	[°C]	-5 ... +50	
Note on materials		RoHS-compliant	
Materials		Polymer	
Grid dimension	[mm]	50	
Dimensions W x L x H	[mm]	50 x 107 x 35	
Weight	[g]	125	

Pin allocation – Plastic interlinking blocks

Circuitry	Pin	Allocation
Round connector, 4-pin		
M18	1	n.c.
	2	24 V DC load voltage supply for valves
	3	0 V
	4	FE
7/8"	A	n.c.
	B	24 V DC load voltage supply for valves
	C	FE
	D	0V

Terminal CPX

Accessories – Interlinking block with additional power supply for valves

Ordering data				
Designation				Part No. Type
Interlinking block with additional power supply for valves				
	Connection M18, plastic interlinking block	4-pin	–	533577 CPX-GE-EV-V
	For ATEX environment			8022171 CPX-GE-EV-V-VL
	Connection 7/8", plastic interlinking block	4-pin	–	541252 CPX-GE-EV-V-7/8-4POL
7/8" connection sockets				
	Power supply socket	5-pin		543107 NECU-G78G5-C2
		4-pin		543108 NECU-G78G4-C2
	Angled socket, 5-pin – Open cable end, 5-pin	2 m		573855 NEBU-G78W5-K-2-N-LE5
M18 connection sockets				
	Straight socket, screw terminal	4-pin	PG9	18493 NTSD-GD-9
		4-pin	PG13.5	18526 NTSD-GD-13,5
	Angled socket, screw terminal	4-pin	PG9	18527 NTSD-WD-9
	Angled socket, screw terminal	4-pin	PG11	533119 NTSD-WD-11
Mounting accessories				
	Screws for mounting the bus node/connection block on a plastic interlinking block	Bus node/metal connection block		550218 CPX-DPT-30X32-S-4X

Terminal CPX

Technical data – Pneumatic interface VMPA-FB

FESTO

Function

The pneumatic interface VMPA-FB establishes the electromechanical connection between the CPX terminal and the valve terminal MPA-S.

The signals from the bus node are forwarded to the control electronics in the electrical modules of the valve terminal MPA-S via the integrated CPX bus. The bus signal for activation of the solenoid coils is converted in the electronics module for max. 8 coils. From a technical point of view, the individual MPA pneumatic modules each represent a separate electrical module with digital outputs. Valves, which are galvanically isolated, can be supplied with power via the interlinking block CPX-GE-EV-V.

Applications

- Interface to the valve terminal MPA-S
- Max. 128 solenoid coils
- Features of the electronics module of the valve terminal MPA-S can be parameterised, for example status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe), individual channel diagnostics can be activated, condition monitoring can be activated individually for each valve
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block and feeds them through to the electronics modules of the valve terminal MPA-S
- Electronics modules of the valve terminal MPA-S:
 - Undervoltage of valves
 - Short circuit of valves
 - Open load of valves
 - Counter preset reached in condition monitoring




General technical data





Type	VMPA-FB-EPL-G	VMPA-FB-EPL-E
No. of solenoid coils	128	
Pilot air supply	Internal	External
Pilot air connection 12/14	–	M7
Pneumatic connection 1	G1/4	G1/4
Operating pressure [bar]	3 ... 8	-0.9 ... 10
Pilot pressure [bar]	3 ... 8	3 ... 8
Nominal operating voltage [V DC]	24	
Protection class to EN 60529	IP65	
Ambient temperature [°C]	-5 ... +50	
Materials	Cover Housing	Polyamide Die-cast aluminium
Weight [g]	Approx. 320	

Terminal CPX

Accessories – Pneumatic interface VMPA-FB

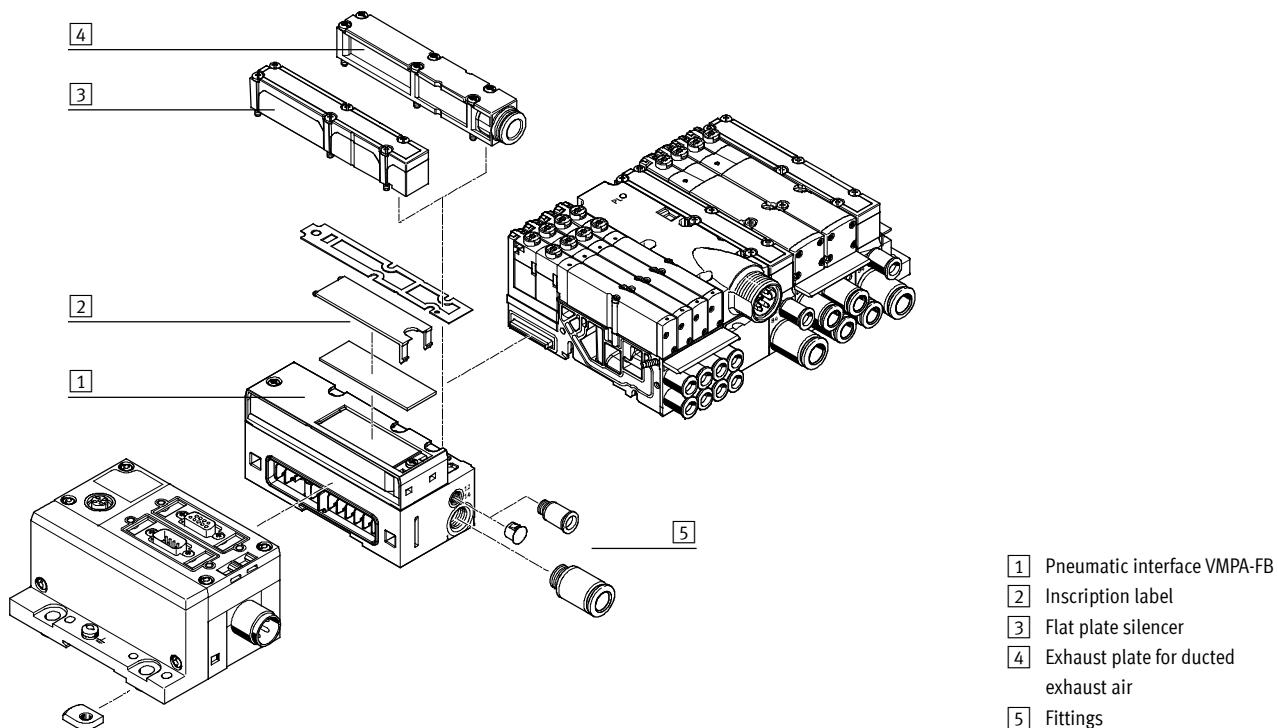Overview – Pneumatic interface VMPA-FB



Ordering data		Part No.	Type
Designation			
Pneumatic interface for CPX plastic interlinking module			
	Ducted exhaust air, internal pilot air	533370	VMPA-FB-EPL-G
	Ducted exhaust air, external pilot air	533369	VMPA-FB-EPL-E
	Flat plate silencer, internal pilot air	533372	VMPA-FB-EPL-GU
	Flat plate silencer, external pilot air	533371	VMPA-FB-EPL-EU
Pneumatic interface for CPX metal interlinking module			
	Ducted exhaust air, internal pilot air	552286	VMPA-FB-EPLM-G
	Ducted exhaust air, external pilot air	552285	VMPA-FB-EPLM-E
	Flat plate silencer, internal pilot air	552288	VMPA-FB-EPLM-GU
	Flat plate silencer, external pilot air	552287	VMPA-FB-EPLM-EU
Exhaust plate			
	For ducted exhaust air, with 10 mm push-in connector	533375	VMPA-AP
	For ducted exhaust air, with QS-3/8 connector	541629	VMPA-AP-3/8
	Flat plate silencer	533374	VMPA-APU

Terminal CPX

FESTO

Technical data – Pneumatic interface VMPAL

Function

The pneumatic interface VMPAL establishes the electromechanical connection between the terminal CPX and the valve terminal MPA-L.

The bus signal for actuating the solenoid coils is converted in the pneumatic interface for the entire valve terminal.

The interlinking within the valve terminal is identical with the interlinking with multi-pin plug connections.

Application


- Actuation of the valve terminal MPA-L
- Max. 32 solenoid coils
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block and feeds them through to the electric modules of the valve terminal MPA-L



General technical data


Type	VMPAL-EPL-CPX
Number of solenoid coils	32
Operating pressure	[bar] -0.9 ... 10
Pilot pressure	[bar] 3 ... 8
Nominal operating voltage	[V DC] 24
Protection class to EN 60529	IP67
Ambient temperature	[°C] -5 ... +50
Note on materials	RoHS-compliant

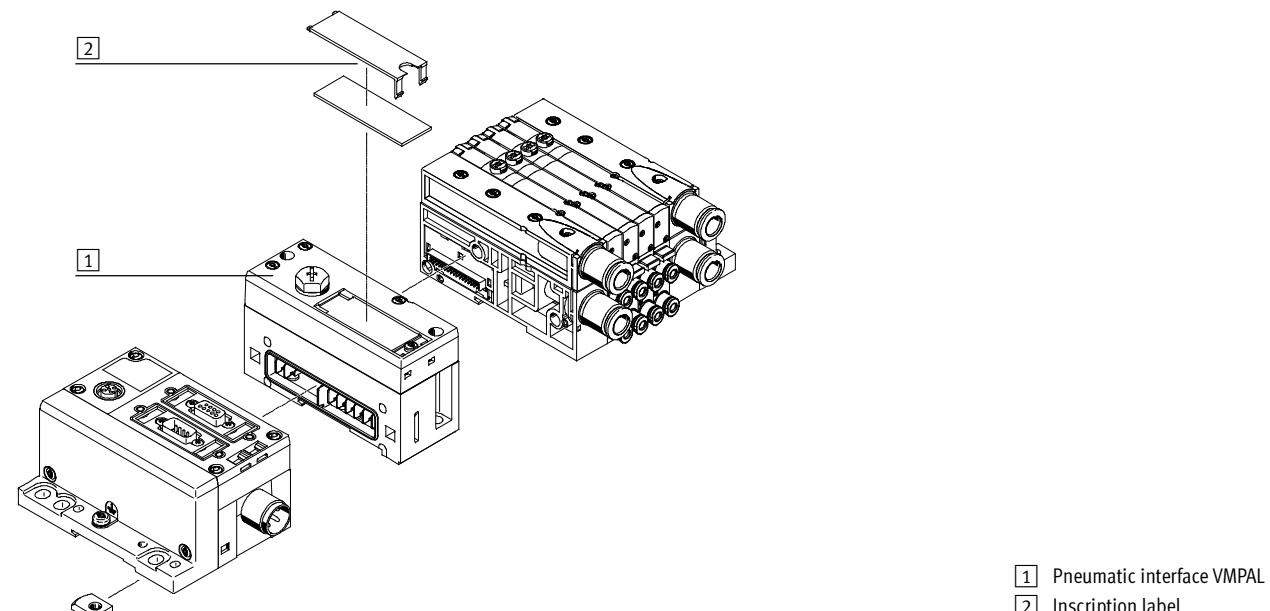Overview – Pneumatic interface VMPAL



[1] Pneumatic interface VMPAL
[2] Inscription label

Ordering data

Designation	Part No.	Type
 Pneumatic interface for CPX plastic interlinking module	570783	VMPAL-EPL-CPX

Terminal CPX

Technical data – Pneumatic interface VMPAF

Function

The pneumatic interface VMPAF establishes the electromechanical connection between the CPX terminal and the valve terminal MPA-F.

The signals from the bus node are forwarded to the control electronics in the electrical modules of the valve terminal MPA-F via the integrated CPX bus. The bus signal for activation of the solenoid coils is converted in the electronics module for max. 8 coils. From a technical point of view, the individual MPA-F pneumatic modules each represent a separate electrical module with digital outputs. Valves, which are galvanically isolated, can be supplied with power via the interlinking block CPX-GE-EV-V.

Applications

- Interface to the valve terminal MPA-F
- Max. 128 solenoid coils
- Electronics module can be parameterised, for example status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe), individual channel diagnostics, condition monitoring can be activated individually for each valve
- In the version with pressure sensor, display of the numerical pressure value, unit and adherence to setpoint value. Parameterisation via PLC or handheld unit (CPX-MMI)
- Voltage for electronics and valves supplied from the left-hand interlinking block
- Electronics modules of the valve terminal MPA-F:
 - Undervoltage of valves
 - Short circuit of valves
 - Open load of valves
 - Counter preset reached in condition monitoring



General technical data


Type	VMPAF-FB-EPL	VMPAF-FB-EPL-PS
Version	–	With integrated pressure sensor for channel 1
No. of solenoid coils	128	
Pneumatic connection 1	G½	
Operating pressure	[bar]	–0.9 ... 10
Accuracy FS	[%]	–
Nominal operating voltage	[V DC]	24
Protection class to EN 60529		IP65
Ambient temperature	[°C]	–5 ... +50
CE mark (see declaration of conformity)		To EU EMC Directive
Note on materials		RoHS-compliant
Weight	[g]	690

Terminal CPX

FESTO

Accessories – Pneumatic interface VMPAF

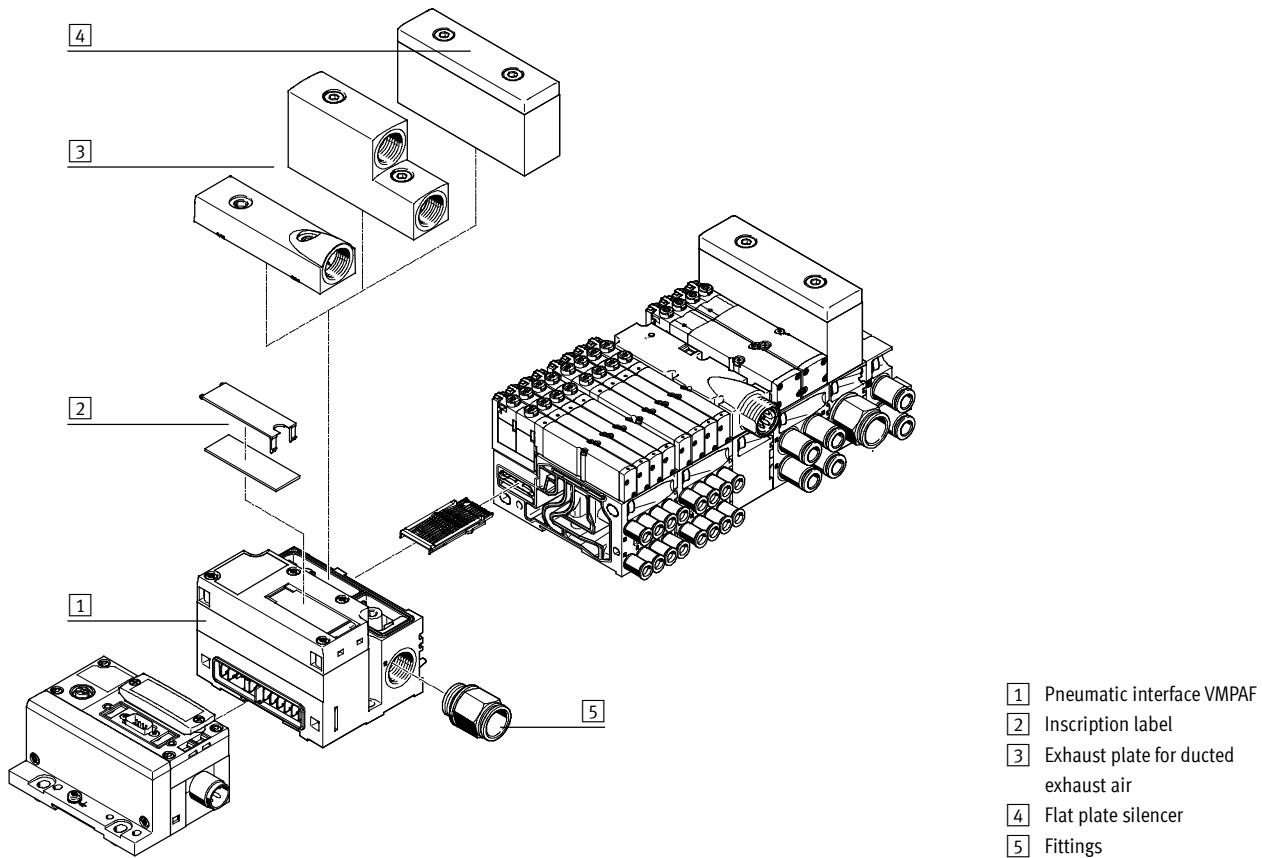Overview – Pneumatic interface VMPAF



Ordering data

Designation		Part No.	Type
Pneumatic interface for CPX plastic interlinking module			
	Without exhaust plate, without flat plate silencer	544399	VMPAF-FB-EPL
	Without exhaust plate, without flat plate silencer, with integrated pressure sensor for channel 1	547491	VMPAF-FB-EPL-PS
Pneumatic interface for CPX metal interlinking module			
	Without exhaust plate, without flat plate silencer	552279	VMPAF-FB-EPLM
	Without exhaust plate, without flat plate silencer, with integrated pressure sensor for channel 1	552280	VMPAF-FB-EPLM-PS
Exhaust plate			
	For ducted exhaust air, ducts 3/5 common	544411	VMPAF-AP-1
	For ducted exhaust air, duct 3 and duct 5 separated	544412	VMPAF-AP-2
	Flat plate silencer	544410	VMPAF-APU

Terminal CPX

Technical data – Pneumatic interface VTSA/VTSA-F

Function

The pneumatic interface VTSA provides the electromechanical connection between the terminal CPX and valve terminal VTSA/VTSA-F.

A complete pneumatic control loop system (FB-valve-drive-sensor-FB) can therefore be connected to the fieldbus using the input modules of the terminal CPX.

Different circuits for valves and electrical outputs are implemented using an additional power supply. The integrated valve diagnostic functions enable the causes of errors to be found quickly, therefore increasing system availability.

Application


- Interface to the valve terminal VTSA and VTSA-F
- Max. 32 solenoid coils
- Address space allocation (configuration) of valve terminals can be set using integrated DIL switches
- Properties of the pneumatic interface can be parameterised, e.g. status of the solenoid coil when fieldbus communication is interrupted (failsafe)
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block
- Detection of missing solenoid coils and short circuit monitoring for the valves



General technical data

Number of solenoid coils	32	
Electrical actuation	Fieldbus	
Electrical connection	Via CPX	
Diagnostics	Undervoltage at valves	
Parameterisation	<ul style="list-style-type: none"> • Failsafe per channel • Forces per channel • Idle mode per channel • Module monitoring 	
LED displays	<ul style="list-style-type: none"> • 1 Group diagnostics • Channel status (on each valve) 	
Fuse protection (short circuit)	Internal electronic fuse per valve output	
Electrical isolation channel – internal bus	Yes, when using an additional power supply for the valves	
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	21.6 ... 26.4
Intrinsic current consumption at nominal operating voltage	Electronic components [mA]	Typically 15
	Valves [mA]	Typically 50
Max. power supply per channel	[A]	0.2
Max. residual current per module	[A]	4
Protection class	<ul style="list-style-type: none"> • IP65 (to EN 60529) • NEMA 4 	
Ambient temperature	[°C]	-5 ... +50
Materials	Housing	Die-cast aluminium
	Bearing and end cap	PA
Note on materials	RoHS-compliant	
Product weight	[g]	590

Ordering data

Designation	Part No.	Type
 For plastic interlinking block	543416	VABA-S6-1-X1
For metal interlinking block	550663	VABA-S6-1-X2
	573613	VABA-S6-1-X2-D

Terminal CPX

FESTO

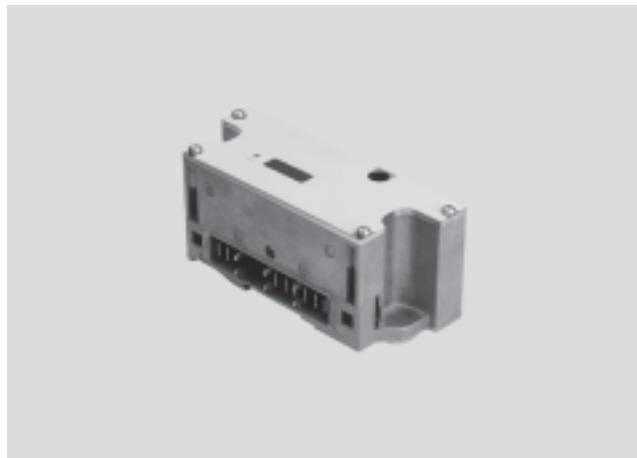
Technical data – Pneumatic interface MIDI/MAXI

Function

The pneumatic interface MIDI/MAXI connects the valve terminal MIDI/MAXI to the supported fieldbus protocols of the CPX terminal. A complete pneumatic control loop system (FB-valve-drive-sensor-FB) can therefore be connected to the fieldbus using the input modules of the CPX terminal. Different circuits for valves and electrical outputs are implemented using an additional power supply. The integrated valve diagnostic functions enable the causes of errors to be found quickly, therefore increasing system availability.

Applications

- Interface to valve terminals MIDI/MAXI
- Max. 26 solenoid coils
- Address space allocation (configuration) of valve terminals can be set using integrated DIL switches
- Pneumatic interface features can be parameterised, for example status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe)
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block



General technical data

Type	CPX-GP-03-4,0	CPX-M-GP-03-4,0
Connection for CPX interlinking blocks made of	Plastic	Metal
No. of solenoid coils	26	
Max. power supply	Per module [A]	4
	Per channel [A]	0.2
Fuse protection	Internal electronic fuse for each valve output	
Current consumption of modules for electronics	[mA]	Typically 15
Current consumption of modules for valves	[mA]	Typically 30
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	21.6 ... 26.4
Electrical isolation	Channel – channel	No
	Channel – internal bus	Yes, using an additional power supply for valves
LED displays	Group diagnostics	1
	Channel diagnostics	–
	Channel status	– (on valves)
Diagnostics	<ul style="list-style-type: none">• Undervoltage of valves• Module monitoring• Fail-safe behaviour, channel x	
Parameterisation		
Protection class to EN 60529	IP65	
Ambient temperature	[°C]	-5 ... +50
Materials	Cover	Steel Die-cast aluminium
Grid dimension	[mm]	50
Dimensions W x L x H	[mm]	50 x 132 x 55
Weight	[g]	390

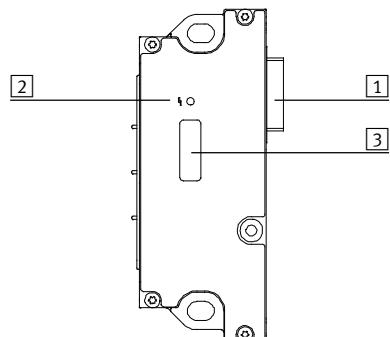
Terminal CPX

Accessories – Pneumatic interface MIDI/MAXI

FESTO

Connection and display components

CPX-GP-03-4,0



- [1] Connecting plug to valves
- [2] Error LED (red)
- [3] DIL switch under transparent cover

Ordering data

Designation	Part No.	Type
Pneumatic interface MIDI/MAXI		
For plastic interlinking block	195738	CPX-GP-03-4,0
For metal interlinking block	556775	CPX-M-GP-03-4,0
H-rail mounting		
For mounting CPX terminal and valve terminal MIDI on H-rail	526033	CPX-03-4,0
For mounting CPX terminal and valve terminal MAXI on H-rail	526034	CPX-03-7,0

Terminal CPX

Technical data – Pneumatic interface CPA

Function

The pneumatic interface CPA connects the valve terminal CPA to the supported fieldbus protocols of the CPX terminal. A complete pneumatic control loop system (FB-valve-drive-sensor-FB) can therefore be connected to the fieldbus using the input modules of the CPX terminal. Different circuits for valves and electrical outputs are implemented using an additional power supply. The integrated valve diagnostic functions enable the causes of errors to be found quickly, therefore increasing system availability.

Applications

- Interface to valve terminals CPA10 and CPA14
- Max. 22 solenoid coils
- Address space allocation (configuration) of valve terminals can be set using integrated DIL switches
- Pneumatic interface features can be parameterised, for example status of the solenoid coils in the event of fieldbus communication being interrupted (fail-safe)
- The pneumatic interface receives the voltage for the electronics and the supply voltage for the valves from the left-hand interlinking block
- Detection of missing solenoid coils and short circuit monitoring for the valves



General technical data

No. of solenoid coils	22	
Max. power supply	Per module	[A] 4
	Per channel	[A] 0.2
Fuse protection	Internal electronic fuse for each valve output	
Current consumption of module from electronics/sensor supply	[mA] Typically 15	
Supply voltage for valves	[V DC] 24 +10% -15%	
Electrical isolation	Channel – channel	No
	Channel – internal bus	Yes, using an additional power supply for valves (in preparation)
LED displays	Group diagnostics	1
	Channel diagnostics	–
	Channel status	– (on valves)
Diagnostics	<ul style="list-style-type: none"> • Load voltage of valves • Short circuit, solenoid coils (channel-oriented) • Wire break, solenoid coils (channel-oriented quiescent current detection for solenoid coils) 	
Parameterisation	<ul style="list-style-type: none"> • Module monitoring • Wire break monitoring, channel x • Fail-safe behaviour, channel x 	
Protection class to EN 60529	IP65	
Temperature range	Operation	[°C] -5 ... +50
	Storage/transport	[°C] -20 ... +70
Materials	Polymer	
Grid dimension	[mm] 50	
Dimensions W x L x H	[mm] 50 x 110 x 58	
Weight	[g]	150

- L - Type discontinued
Available up until 2015

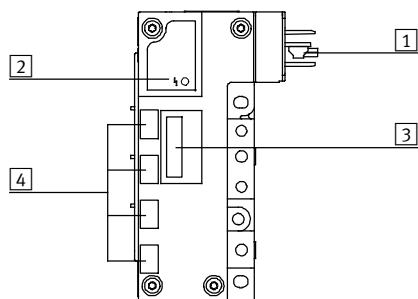
FESTO

Terminal CPX

Accessories – Pneumatic interface CPA

Connection and display components

CPX-GP-CPA-...



- [1] Connecting plug to valves
- [2] Error LED (red)
- [3] DIL switch under transparent cover
- [4] Inscription fields for addresses

Ordering data

Designation

Part No. Type

Pneumatic interface CPA

A 3D perspective view of the CPA terminal, showing its front panel with ports and mounting feet.	For CPA in 10 mm width	195710 CPX-GP-CPA-10
	For CPA in 14 mm width	195712 CPX-GP-CPA-14

H-rail mounting

A 3D perspective view of three mounting screws and washers used for H-rail mounting.	For mounting CPX terminal and valve terminal CPA on H-rail	526032 CPX-CPA-BG-NRH
--	--	-----------------------

Terminal CPX

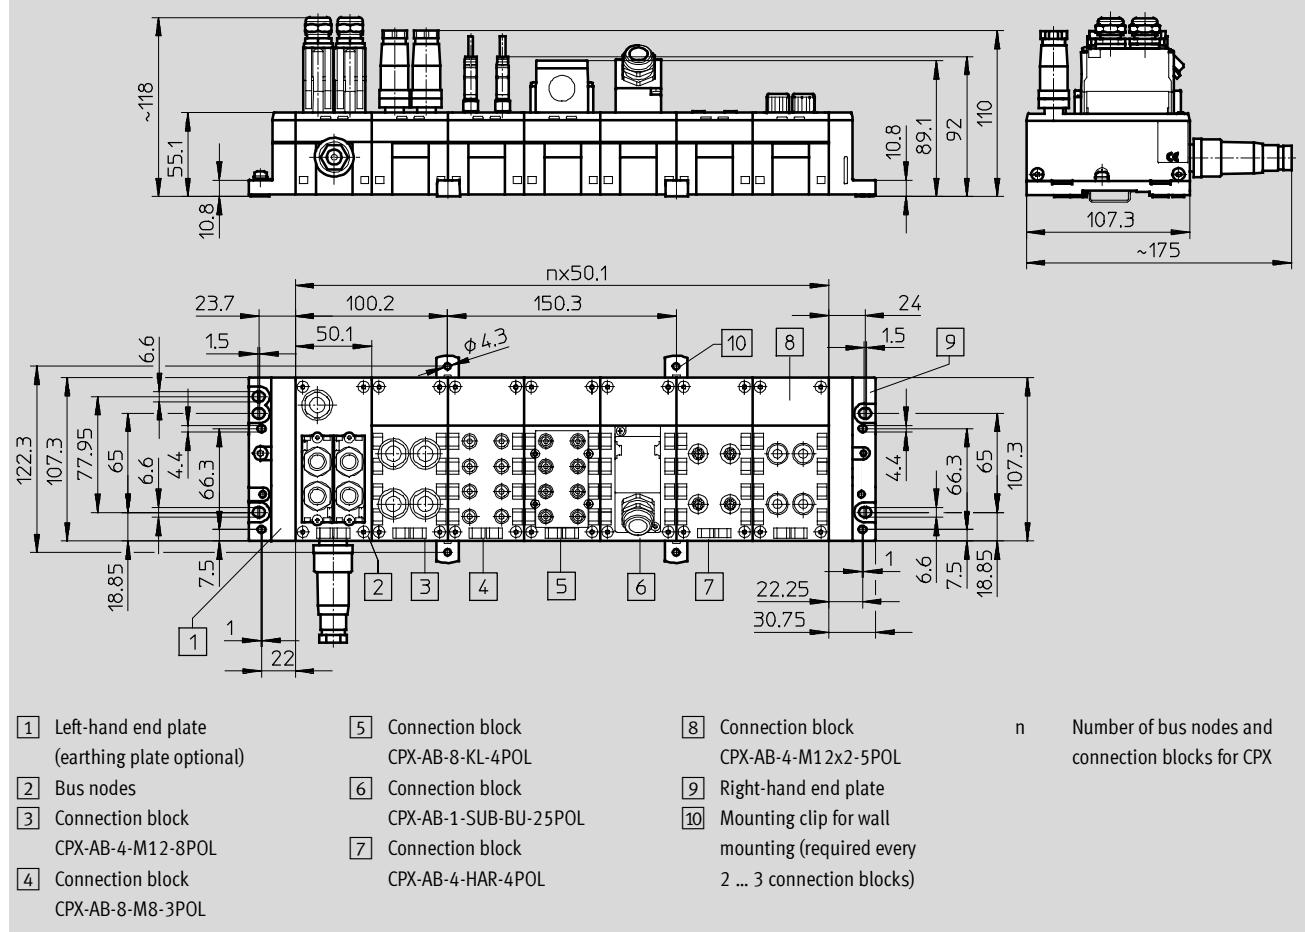
FESTO

Technical data

Dimensions – Plastic interlinking module

Download CAD data → www.festo.com

With bus nodes and connection blocks



Terminal CPX

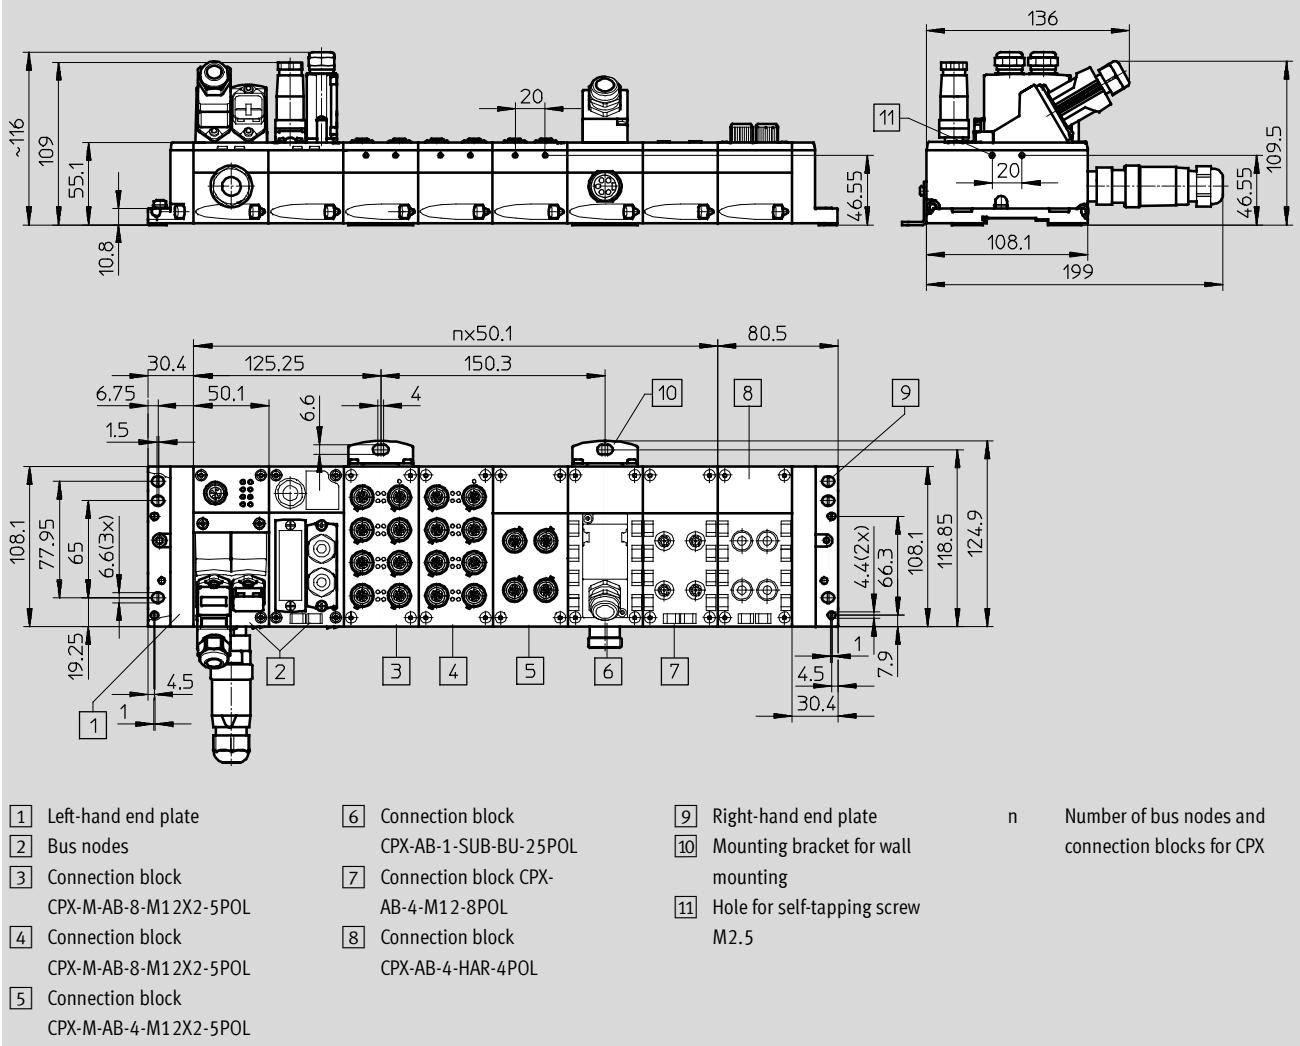
Technical data

FESTO

Dimensions – Metal interlinking block

With bus nodes and connection blocks

Download CAD data → www.festo.com



Terminal CPX

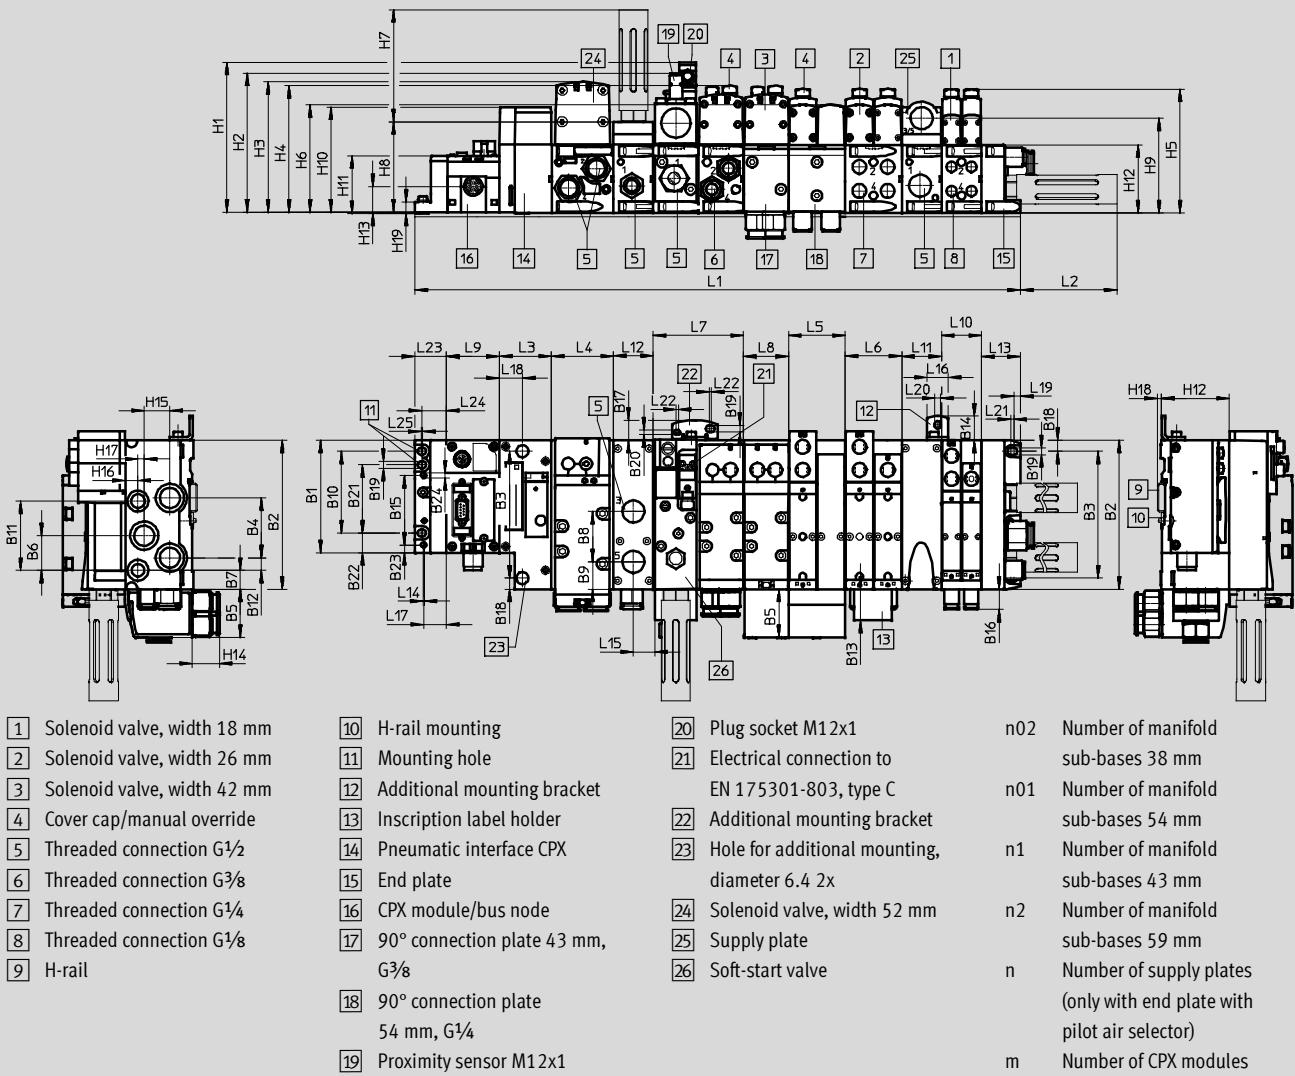
FESTO

Technical data

Dimensions

With bus nodes and valve terminal VTSA

Download CAD data → www.festo.com



Dim.	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	B16	B18	B19	B20	B21	B22	B23	B24
[mm]	107.3	142	121	57	46	33	18	48	26	78	66	12	29.6	23	19.5	10.5	6.6	4.5	65	18.9	7.5	4.4

Dim.	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19	L20	L21	L22
[mm]	92.4	50	n2x59	n01x54	54	n1x43	43	mx20.1	n02x38	nx38	38	37.3	1	20.5	20	22	22	6.3	5.5	3	2

Dim.	L23	L24	L25	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19
[mm]	30.4	23.7	1.5	143.9	133.3	125	121.3	118.2	103	106.8	87	90.3	101.4	55.1	65	25.8	25.7	24.5	12	6	3.5	10.8

Width	L1
18 mm	$30.4 + m \times 50.1 + 50 + n02 \times 38 + n \times 38 + 37.3$
26 mm	$30.4 + m \times 50.1 + 50 + n01 \times 54 + n \times 38 + 37.3$
42 mm	$30.4 + m \times 50.1 + 50 + n1 \times 43 + n \times 38 + 37.3$
52 mm	$30.4 + m \times 50.1 + 50 + n2 \times 59 + n \times 38 + 37.3$
Mixture of 18 mm, 26 mm, 42 mm and 52 mm	$30.4 + m \times 50.1 + 50 + n02 \times 38 + n01 \times 54 + n1 \times 43 + n2 \times 59 + n \times 38 + 37.3$

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Terminal CPX

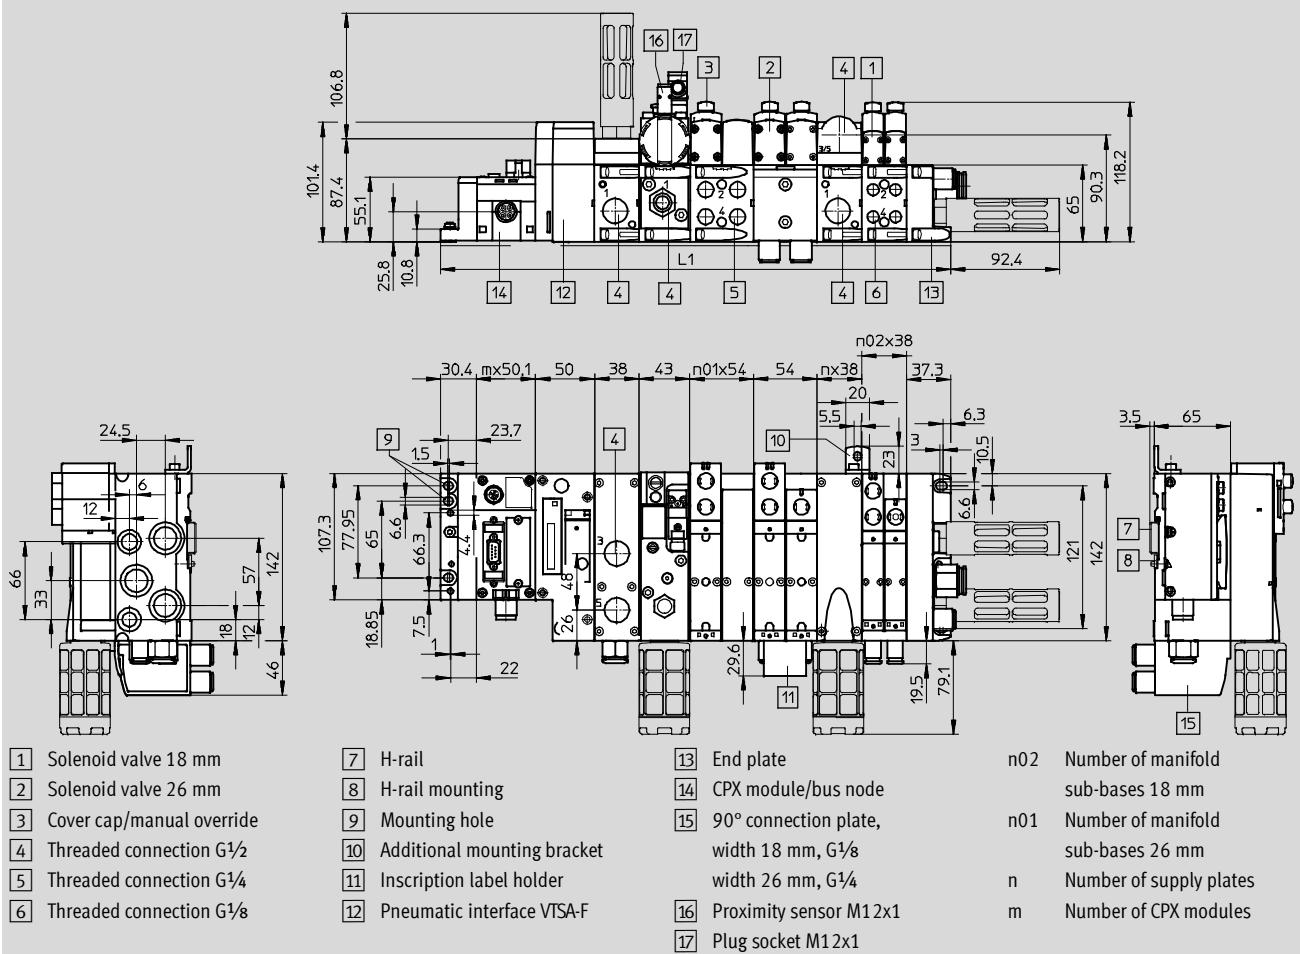
Technical data

FESTO

Dimensions

With bus nodes and valve terminal VTSA-F

Download CAD data → www.festo.com



Width	L1
18 mm	$30.4 + m \times 50.1 + 50 + n02 \times 38 + n \times 38 + 37.3$
26 mm	$30.4 + m \times 50.1 + 50 + n01 \times 54 + n \times 38 + 37.3$
Mixture of 18 mm and 26 mm	$30.4 m \times 50.1 + 50 + n02 \times 38 + n01 \times 54 + n \times 38 + 37.3$

Terminal CPX

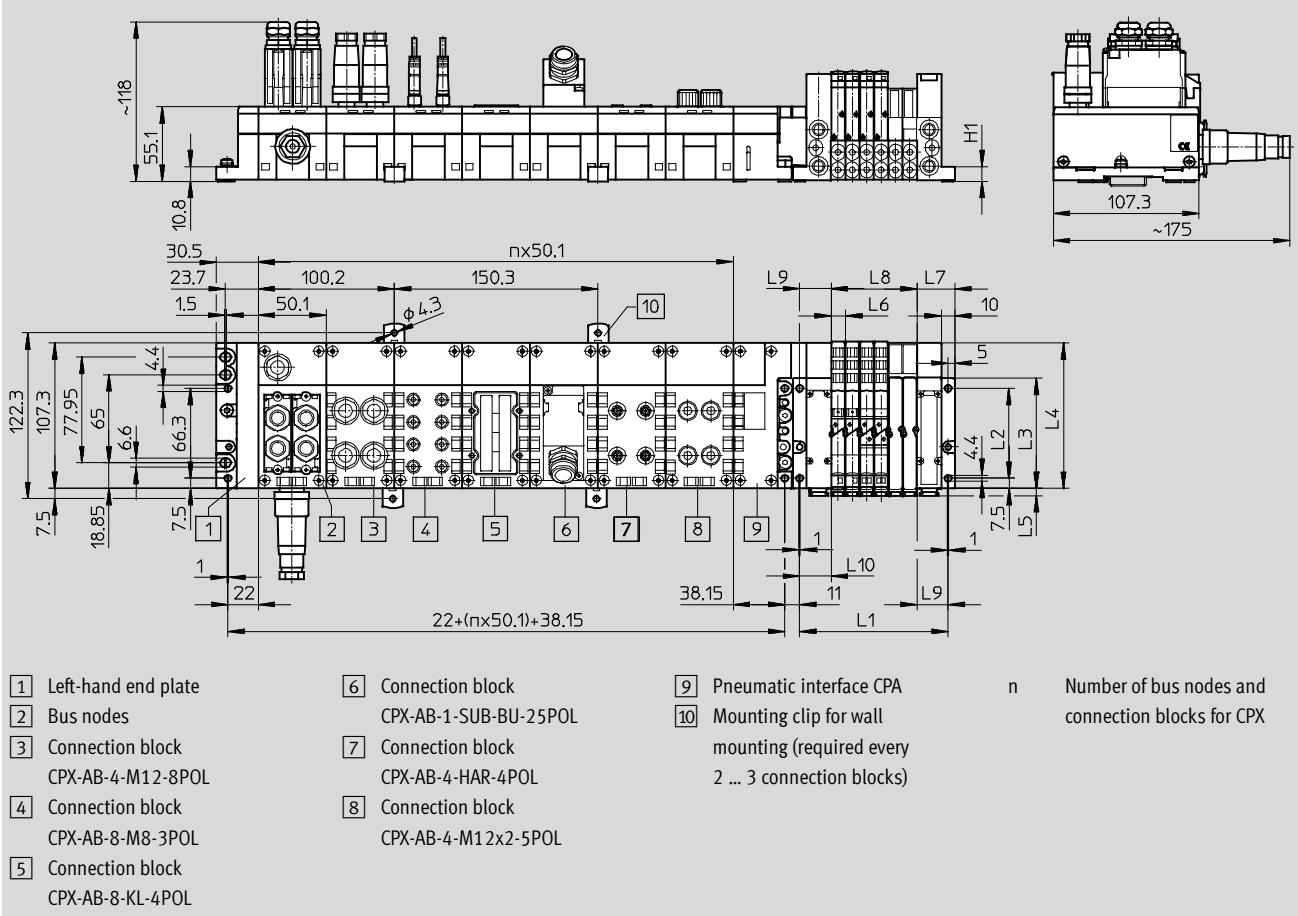
Technical data

FESTO

Dimensions

With bus nodes, connection blocks and valve terminal CPA

Download CAD data → www.festo.com



Type	L1 ¹⁾	L2 ±0.1	L3	L4	L5	L6	L7	L8 ¹⁾	L9 ±0.1	H1
CPA10	46 + (m x 10.6)	66.3	81.3	108.3	5.5	10.6	28	m x 10.6	23	10.8
CPA14	51 + (m x 14.6)	76.1	91.1	118.1	6.5	14.6	31	m x 14.6	26	13

1) m = Number of valves

Terminal CPX

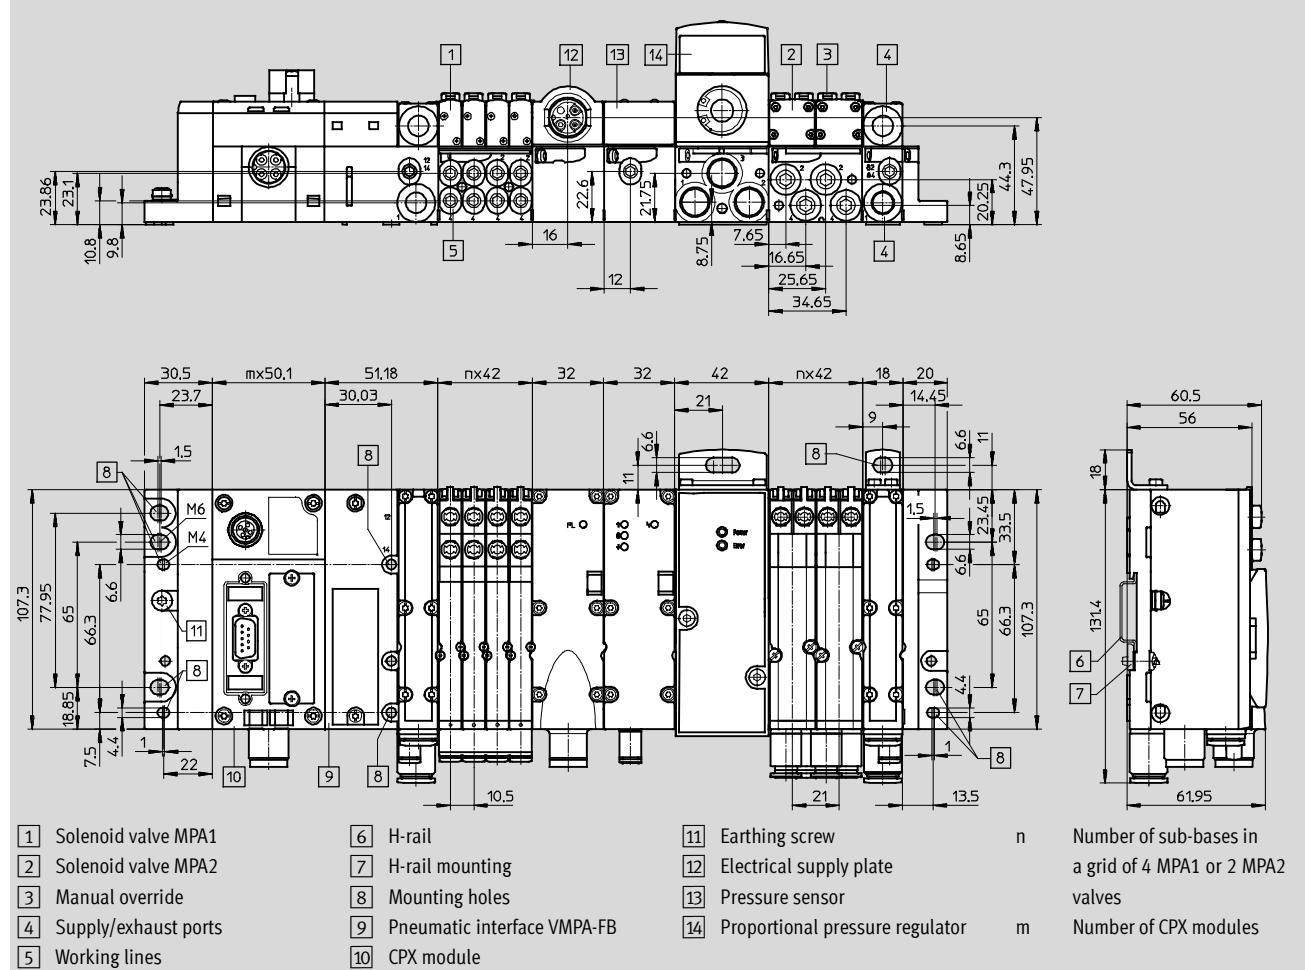
Technical data

FESTO

Dimensions

With bus nodes and valve terminal MPA-S

Download CAD data → www.festo.com



Terminal CPX

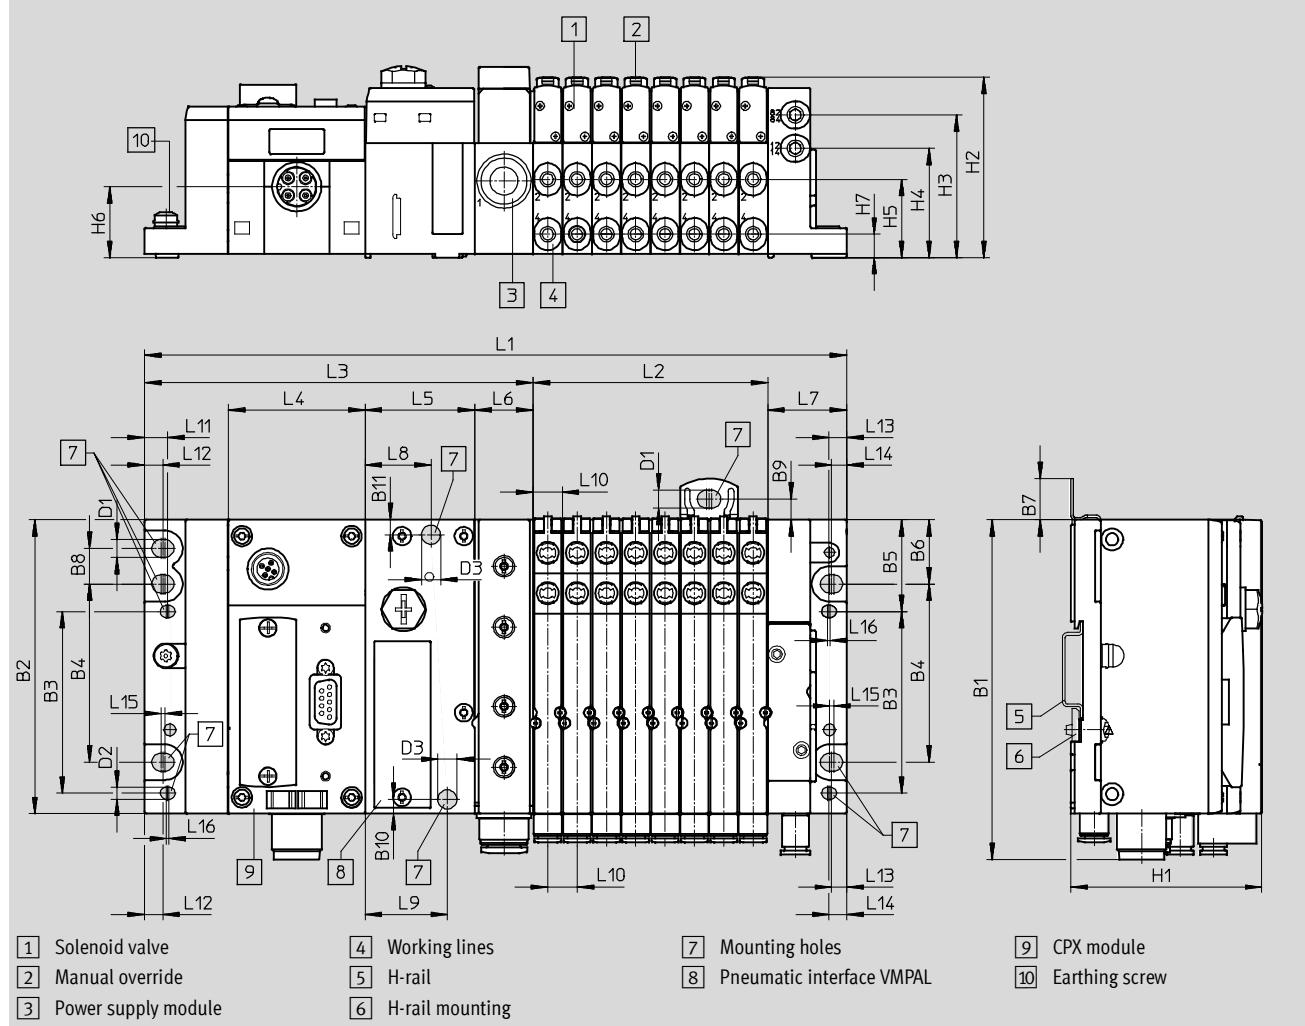
FESTO

Technical data

Dimensions

With bus node and valve terminal MPA-L

Download CAD data → www.festo.com



Type	L1 ¹⁾	L2 ¹⁾	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	D1	D2	D3
MPA-L	170.9 + n x 10.70	n x 10.70	142.1	50	40.1	21.2	28.8	24	30	10.7	8.5	6.8	5.6	6.5	6.6	4.4	7

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	H1	H2	H3	H4	H5	H6	H7
MPA-L	124	107.3	66.3	65	33.5	23.5	15	13	7.5	5.3	5.5	69.6	65.7	52	39.8	28.5	25.8	8.5

1) n = Number of sub-bases/valve positions

Terminal CPX

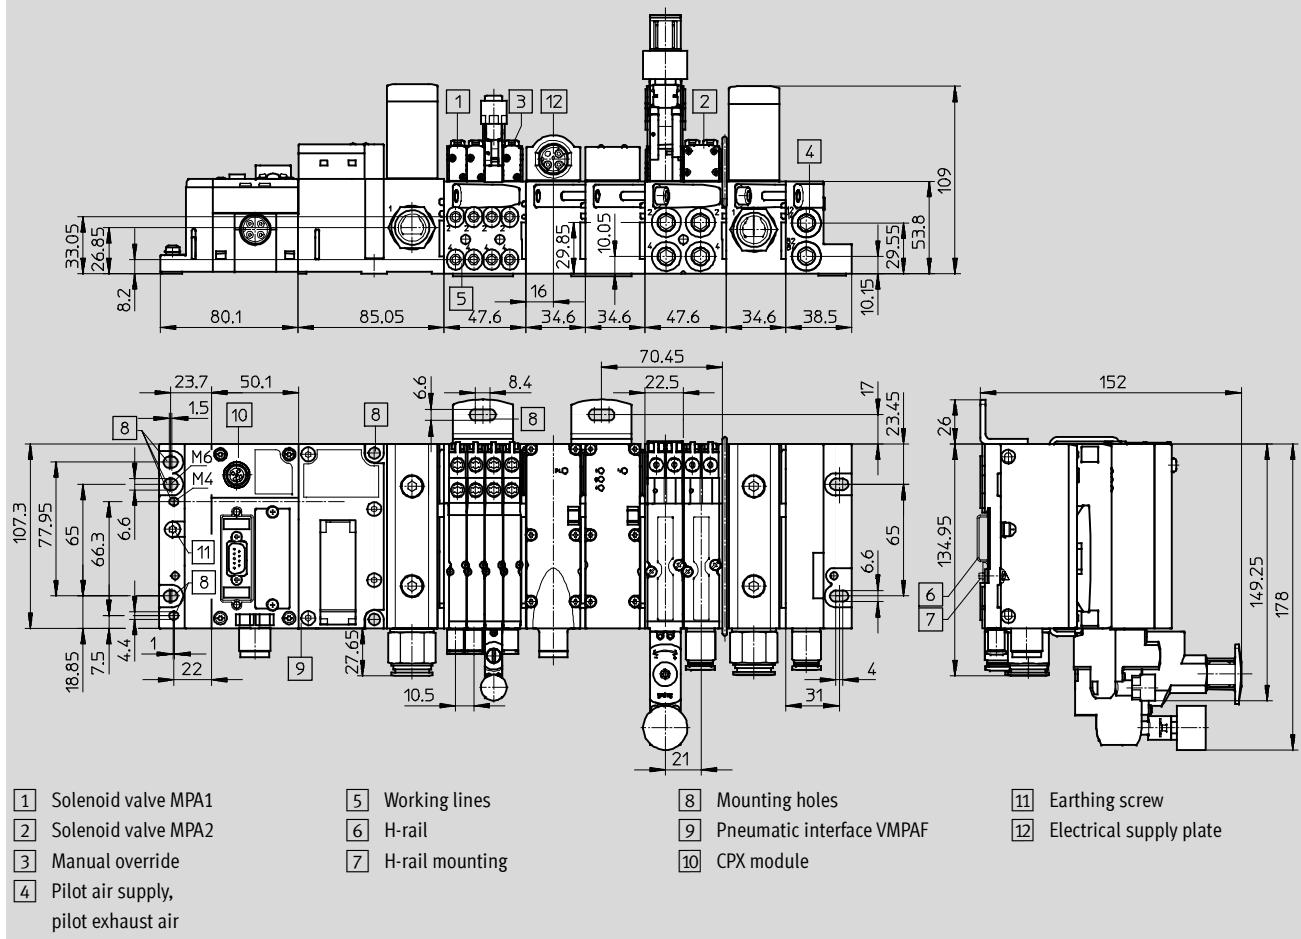
Technical data

FESTO

Dimensions

With bus nodes and valve terminal MPA-F

Download CAD data → www.festo.com



Terminal CPX

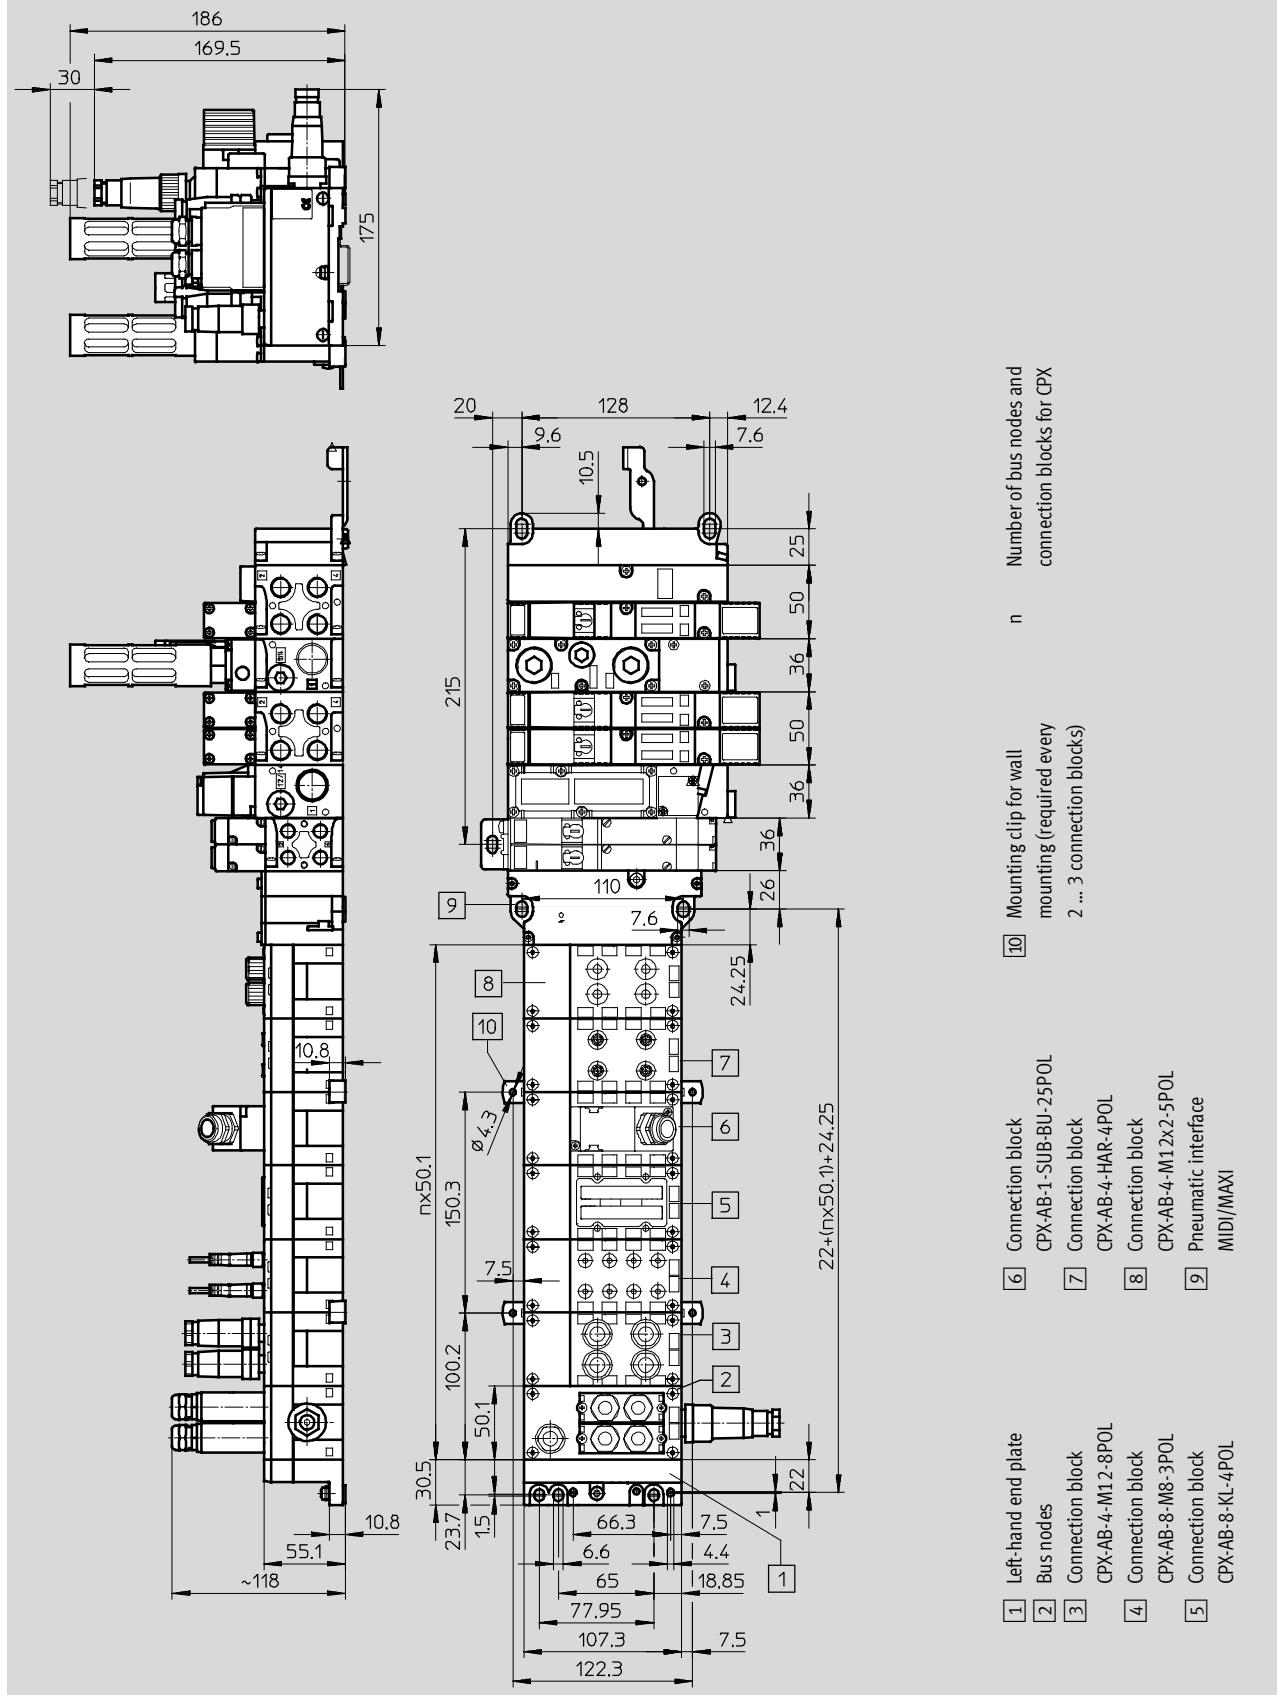
Technical data

FESTO

Dimensions

With bus nodes, connection blocks and valve terminal MIDI/MAXI

Download CAD data ➔ www.festo.com
















Terminal CPX

Accessories

FESTO

Ordering data – Accessories










Designation		Part No.	Type
Plug connectors and accessories			
	Sub-D plug for INTERBUS	Incoming	532218 FBS-SUB-9-BU-IB-B
		Outgoing	532217 FBS-SUB-9-GS-IB-B
	Sub-D plug for DeviceNet/CANopen		532219 FBS-SUB-9-BU-2x5POL-B
	Sub-D plug for PROFIBUS DP		532216 FBS-SUB-9-GS-DP-B
	Sub-D plug for CC-Link		532220 FBS-SUB-9-GS-2x4POL-B
	Sub-D plug		534497 FBS-SUB-9-GS-1x9POL-B
	Bus connection M12 adapter (B-coded) for PROFIBUS DP		533118 FBA-2-M12-5POL-RK
	Micro Style bus connection, 2xM12 for DeviceNet/CANopen		525632 FBA-2-M12-5POL
	Socket for Micro Style connection, M12		18324 FBSD-GD-9-5POL
	Plug for Micro Style connection, M12		175380 FBS-M12-5GS-PG9
	M12x1 bus connection, 4-pin (D-coded) for Ethernet		543109 NECU-M-S-D12G4-C2-ET
	Connection block, Sub-D socket, 9-pin, plug 7/8", 5-pin for DeviceNet		571052 CPX-AB-1-7/8-DN
	Connection block M12 adapter (B-coded) for PROFIBUS DP		541519 CPX-AB-2-M12-RK-DP
	Connection block M12 adapter (B-coded) for INTERBUS		534505 CPX-AB-2-M12-RK-IB
	Socket M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP		1067905 NECU-M-B12G5-C2-PB
	Plug M12x1, 5-pin, straight, for self-assembly of a connecting cable for FBA-2-M12-5POL-RK and CPX-AB-2-M12-RK-DP		1066354 NECU-M-S-B12G5-C2-PB
	Open Style bus connection for 5-pin terminal strip for DeviceNet/CANopen		525634 FBA-1-SL-5POL
	Terminal strip for Open Style connection, 5-pin		525635 FBSD-KL-2x5POL
	Screw terminal bus connection for CC-Link		197962 FBA-1-KL-5POL
	RJ45/plug		534494 FBS-RJ45-8-GS
	RJ45 plug, 8-pin, push-pull		552000 FBS-RJ45-PP-GS
	SCRJ plug, 2-pin, push-pull, for CPX-M-FB35		571017 FBS-SCRJ-PP-GS
	Socket/spring-loaded terminal, 5-pin, AIDA push-pull		563059 NECU-M-PPG5-C1
	Plug for CAN-Bus interface, Sub-D, 9-pin, without terminating resistor		533783 FBS-SUB-9-WS-CO-K

Terminal CPX

FESTO

Accessories







Ordering data – Accessories

Designation		Part No.	Type
Connecting cables			
	DUO cable M12-2xM8, 4-pin/2x3-pin	2x straight socket 2x straight/angled socket 2x angled socket	18685 KM12-DUO-M8-GDGD 18688 KM12-DUO-M8-GDWD 18687 KM12-DUO-M8-WDWD
	Push-in T-connector	2x socket M8, 3-pin 1x plug M8, 4-pin	544391 NEDU-M8D3-M8T4
	Push-in T-connector	2x socket M12, 5-pin 1x plug M12, 4-pin 2x socket M8, 3-pin 1x plug M12, 4-pin	541596 NEDU-M12D5-M12T4 541597 NEDU-M8D3-M12T4
	Connecting cable M9, 5-pin, angled plug-open cable end 3-pin	2 m 5 m	563711 NEBC-M9W5-K-2-N-LE3 563712 NEBC-M9W5-K-5-N-LE3
	Connecting cable M8-M8, straight plug-straight socket	0.5 m 1.0 m 2.5 m 5.0 m	175488 KM8-M8-GSGD-0,5 175489 KM8-M8-GSGD-1 165610 KM8-M8-GSGD-2,5 165611 KM8-M8-GSGD-5
	Connecting cable M12-M12, 4-pin, straight plug-straight socket	2.5 m 5.0 m	18684 KM12-M12-GSGD-2,5 18686 KM12-M12-GSGD-5
	Connecting cable M12-M12, 5-pin, straight plug-straight socket	1.5 m 3.5 m	529044 KV-M12-M12-1,5 530901 KV-M12-M12-3,5
	Connecting cable for CPX-CTEL, M12-M12, 5-pin, straight plug-straight socket	5 m 7.5 m 10 m	574321 NEBU-M12G5-E-5-Q8N-M12G5 574322 NEBU-M12G5-E-7.5-Q8N-M12G5 574323 NEBU-M12G5-E-10-Q8N-M12G5
	Connecting cable M12-M12, 8-pin, straight plug-straight socket	2.0 m	525617 KM12-8GD8GS-2-PU
	Connecting cable M12-M12, 4-pin, straight plug-angled socket	1.0 m	185499 KM12-M12-GSWD-1-4
	Connecting cable M9, angled plug-angled socket	0.25 m 0.5 m 2 m 5 m 8 m	540327 KVI-CP-3-WS-WD-0,25 540328 KVI-CP-3-WS-WD-0,5 540329 KVI-CP-3-WS-WD-2 540330 KVI-CP-3-WS-WD-5 540331 KVI-CP-3-WS-WD-8
	Connecting cable M9, straight plug-angled socket	2 m 5 m 8 m	540332 KVI-CP-3-GS-GD-2 540333 KVI-CP-3-GS-GD-5 540334 KVI-CP-3-GS-GD-8
	Modular system for connecting cables	–	NEBU-... → Internet: nebu
	Programming cable	151915 KDI-PPA-3-BU9	
	Connecting cable FED (for CPX-CEC)	539642 FEC-KBG7	
	Connecting cable FED (for CPX-CEC)	539643 FEC-KBG8	

Terminal CPX

Accessories

FESTO

Ordering data – Accessories			
Designation		Part No.	Type
Plug connectors and accessories – Power supply			
	Plug socket for mains connection M18, straight	For 1.5 mm ² For 2.5 mm ²	18493 NTSD-GD-9 18526 NTSD-GD-13.5
	Plug socket for mains connection M18, angled	For 1.5 mm ² For 2.5 mm ²	18527 NTSD-WD-9 533119 NTSD-WD-11
	Power supply socket	7/8" connection, 5-pin 7/8" connection, 4-pin	543107 NECU-G78G5-C2 543108 NECU-G78G4-C2
	Angled socket, 5-pin – Open cable end, 5-pin	2 m	573855 NEBU-G78W5-K-2-N-LE5
	Connection socket AIDA push-pull, spring-loaded terminal	5-pin	563059 NECU-M-PPG5-C1
Hood			
	Mounting rail for securing the cover	1,000 mm	572256 CAFC-X1-S
	Mounting kit for CPX cover		572257 CAFC-X1-BE
	Hood section for CPX terminal including mounting attachments for connecting several hood sections in series	200 mm 300 mm	572258 CAFC-X1-GAL-200 572259 CAFC-X1-GAL-300
Screws			
	Screws for mounting the bus node/connection block on a plastic interlinking block	Bus node/metal connection block	550218 CPX-DPT-30X32-S-4X
	Screws for mounting the bus node/connection block on a metal interlinking block	Bus node/plastic connection block	550219 CPX-M-M3x22-4x
		Bus node/metal connection block	550216 CPX-M-M3x22-S-4x
	Screws for attaching an inscription label holder to the bus node (CPX-FB33, CPX-M-FB34, CPX-M-FB35)	12 pieces	550222 CPX-M-M2,5X8-12X
Mounting			
	Attachment for wall mounting (for long valve terminals, 10 pieces)	Design for plastic manifold sub-bases	529040 CPX-BG-RW-10x
	Attachment for wall mounting (for long valve terminals, 2 mounting brackets and 4 screws)	Design for metal manifold sub-bases	550217 CPX-M-BG-RW-2x

Terminal CPX

FESTO

Accessories













Ordering data – Accessories

Designation	Part No.	Type
Covers and attachments		
	538219	AK-8KL
Fittings kit	538220	VG-K-M9
	526184	CPX-AB-S-4-M12
	538892	CPX-EPFE-EV
	533334	AK-SUB-9/15-B
	557010	AK-SUB-9/15
	548757	CPX-AK-P
	548754	CPX-M-AK-M
	572818	CPX-M-FB21-IB-RL
	534496	AK-RJ45
	548753	CPX-M-AK-C
	177672	ISK-M8
	356684	FLANSCHDOSE SER.712
	165592	ISK-M12

Terminal CPX

Accessories

FESTO

Ordering data – Accessories			
Designation		Part No.	Type
Functional modules			
	Memory card for PROFINET bus node (CPX-FB33, CPX-M-FB34, CPX-M-FB35), 2 MB	568647	CPX-SK-2
	Terminating resistor, M12, B-coded for PROFIBUS	1072128	CACR-S-B12G5-220-PB
	PT1000 temperature sensor for cold junction compensation	553596	CPX-W-PT1000
	Adapter from 5-pin M12 to mini USB socket and controller software	547432	NEFC-M12G5-0.3-U1G5
Inscription labels			
	Inscription labels 6x10, 64 pieces, in frames	18576	IBS-6x10
	Inscription label holder for connection block	536593	CPX-ST-1
Multi-pin plug distributors			
	Open cable end, 11-pin	8x socket M12, 5-pin	177671 MPV-E/A08-M12
	Sub-D plug, 15-pin	8x socket M8, 3-pin	177669 MPV-E/A08-M8
		12x socket M8, 3-pin	177670 MPV-E/A12-M8
	Plug M12, 8-pin	4x socket M8, 3-pin	574586 NEDU-L4R1-M8G3L-M12G8
		6x socket M8, 3-pin	574587 NEDU-L6R1-M8G3L-M12G8
Connecting cable for multi-pin plug distributors			
	Sub-D socket, 15-pin, open cable end, 15-wire	5 m	177673 KMPV-SUB-D-15-5
		10 m	177674 KMPV-SUB-D-15-10
	Angled socket M12, 8-pin, open cable end, 8-wire	Length 2 m	542256 NEBU-M12W8-2-N-LE8
		Length 5 m	542257 NEBU-M12W8-5-N-LE8
		Length 10 m	570007 NEBU-M12W8-10-N-LE8
	Straight socket M12, 8-pin, open cable end, 8-wire	Length 2 m	525616 SIM-M12-8GD-2-PU
		Length 5 m	525618 SIM-M12-8GD-5-PU
		Length 10 m	570008 SIM-M12-8GD-10-PU
Software			
	Programming software	German	537927 PSW-FST4-CD-DE
		English	537928 PSW-FST4-CD-EN