

# **FESTO**

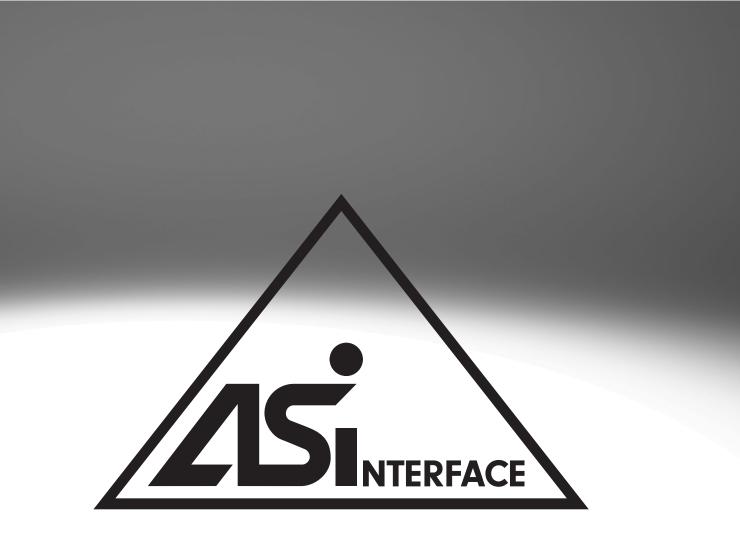

# Overview of AS-Interface

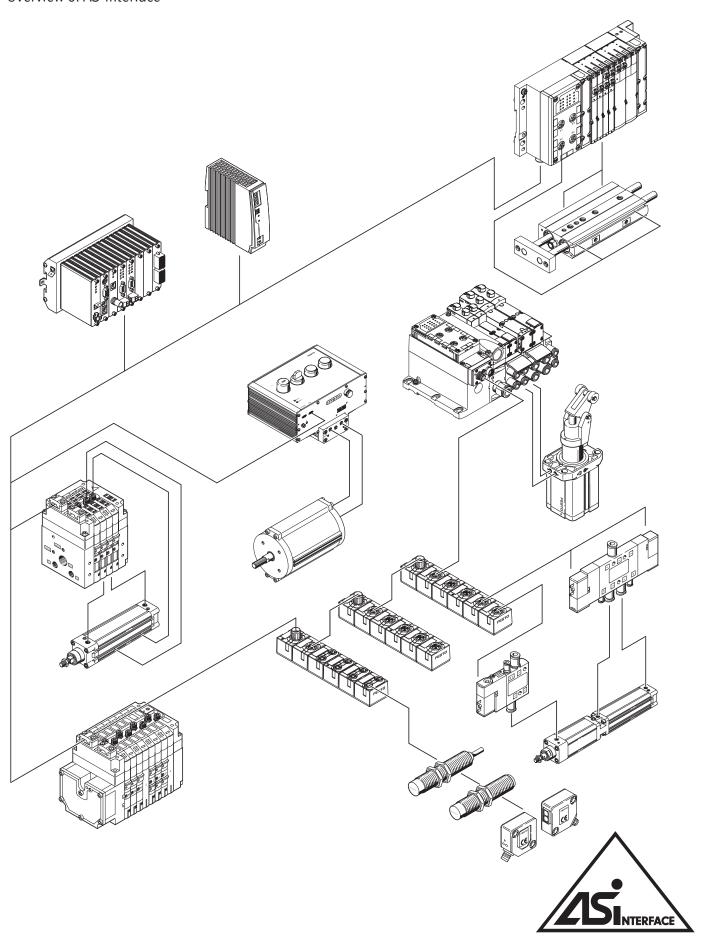

#### Overview of AS-Interface

#### Basic principles and characteristics of the bus system

Introduction

AS-Interface is a manufacturer-independent, open installation system which is widely and increasingly used at the lowermost level of decentralised manufacturing and process automation. Manufacturer independence and openness of the system are guaranteed by European standard EN 50295 and global standard IEC 62026-2.

Certified products bear the logo of the AS-International Association.

The AS-International Association and affiliated organisations represent the interests of all manufacturers involved with the AS-Interface.

#### Type

The AS-Interface system makes it possible to transfer data and energy using just one cable.

This specific technology, with which stations are connected to the yellow cable, and the low connection costs mean that even stations with a small number of inputs and outputs (max. 8 I and 8 O per valve terminal with two chips) can be networked.

This can save 26-40% on installation, depending on the type of system. This allows in particular individual or small groups of actuators, valves and sensors, to be connected to a higher-order controller in a cost-efficient way.

New developments in line with Spec 2.1, introduced in early 2000, such as the parameterisable profile 7.4 or AS-Interface Safety at Work, opened up new areas of implementation and created opportunities for significantly more efficient installation and networking concepts in many applications.

Spec 3.0, released in 2005, enabled new quantum leaps in what was possible, such as convenient control of analogue I/Os, more complex slaves, or serial transfer of text and data.

- Slaves in line with Spec 2.0 and 2.1 are also executable with Spec 3.0: the system is completely backwards compatible. Benefits of AS-Interface specification 3.0:
- All the benefits of the straightforward installation system since Spec. 2.0 are retained
- Up to 400% more I/O per master
- Improved diagnostics of faults in the peripherals
- More functions within Spec. 2.1 and 3.0: e.g. simple integration of more complex 16-bit slaves, fast analogue modules, DTM integration, asynchronous serial protocol, Safety slaves

 Slave profiles for specific functions, as well as interchangeability. Mix between different manufacturers and products, e.g. for parameters or communications services.

AS-Interface with A/B mode gives you 100% more. In A/B mode, each slave address is used twice. An output bit is used for A/B differentiation (case differentiation, see table). The cycle time is generally more than sufficient for pneumatic chains.

Specification						
Version	Inputs	Outputs	Bus cycle	Number of slaves		Total inputs/outputs
			[ms]	Digital	Analogue	
2.0	4/4	4	5	31	31	248
2.1	4	3	10	62	31	434
3.0	4/8	4/8	20	62	62	992

#### CPX-AB-8-M8-3POL with connection socket M8, 3-pin

- Manufacturer independence
- No restrictions in terms of cable layout and/or topology
- Data and energy on one two-wire cable
- Interference-free
- Medium: Unscreened cable 2x 1.5 mm<sup>2</sup>
- Max. 4 inputs and 4 outputs per slave, with 31 slaves
- Data and power supply for up to 8 outputs per AS-Interface string

- Max. 4 inputs and 3 outputs per slave, with 62 slaves (A/B mode in line with Spec V2.1)
- Modules for control cabinets (IP20) and harsh industrial environments (IP65, IP67)
- 4 analogue inputs or outputs per slave, with 31 slaves
- Profile 7.3 Analogue values (16 bit) per slave (in line with Spec. V2.1)
- Profile 7.4 Parameterisable communications profile e.g. 16x 16 bit per slave (in line with Spec. V2.1)
- Profile 7.A.7 allows 4 bits each for digital inputs and outputs on an A/B slave. The 4 outputs are each transferred in two A/B bus cycles of 2 bits each. This extends the cycle time to 20 ms (worst case).
- Insulation displacement technology
- Cable length 100 m, can be extended to up to 200 m with an extension plug and to up to 500 m through the use of repeaters and other measures
- Highly effective error protection
- · Easy commissioning
- Electronic address setting via the bus connection



A master to Spec. 3.0 is essential when using slaves to Spec. 3.0.

# Overview of AS-Interface

#### **Basic features**

Simple connection technology

- One cable for energy and data
- Cable geometry prevents reverse polarity
- No shielding due to error protection
- Insulation displacement connection technology guarantees Festo plug and work
- Alternative bus connection technology M12, 4-pin (standardised)

Ideal for pneumatic applications

Locally controlled small groups or decentralised, widely spread individual actuators means:

- Short tubing lengths
- High cycle rates
- Low air consumption. Installation and communication are provided by components of the AS-Interface.

A powerful system component

The AS-Interface is positioned clearly beneath the fieldbuses in use and is thus not in competition with the fieldbuses but is a technically necessary and economically worthwhile addition.

Everything from a single source

Festo is your single source for the AS-Interface. This means that:

- A single contact person
- Competent solutions from the market leader
- Convenient ordering system
- Complete delivery service
- Coordinated solutions for motion and control
- Worldwide service around the clock

#### Cycle rate optimisation

Decentralised solutions at the AS-Interface permit optimised electropneumatic control chains: perfectly matched valve switching time, cylinder diameter and stroke saves up to


- 20% cycle time with standard components
- 30% cycle time with faster switching valves
- 40% installation costs
- 50% air consumption/flow rate

#### **Program summary**

Valves

- Integrated inputs on valve terminals, e.g. CPV, MPA-S and VTSA/VTSA-F
- More inputs thanks to 4-way and 8-way input modules
- On request:
   Application-specific valves and integration solutions

#### Components

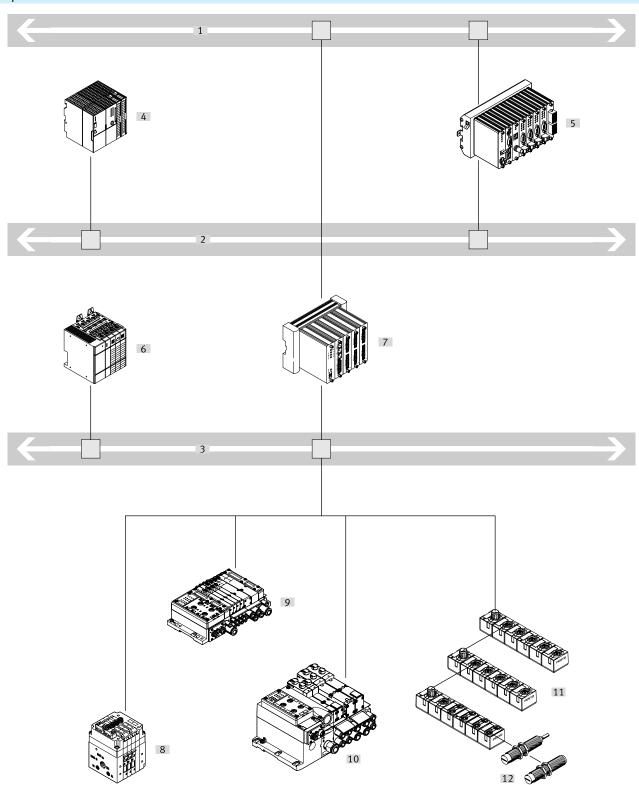

- [1] Ethernet
- [2] Fieldbus
- [3] AS-Interface
- [4] PLC with fieldbus master
- [5] Industrial PC with fieldbus master
- [6] PLC with AS-Interface master to IP20
- [7] Industrial PC with AS-Interface master
- [8] Valve terminal CPV with inputs, standard or A/B mode to Spec. 2.0, Spec. 2.1, Spec. 3.0
- [9] CPX compactMPA-S valve terminal with selectable inputs
- [10] CPX compact VTSA/VTSA-F valve terminal with selectable inputs
- [11] Compact I/O modules
- [12] Sensors/input signals

#### Application examples



# used in conveyor technology. The AS-Interface is particularly suitable in this environment. Compact I/O modules connect one or two valves of any size and up to 4 sensors directly to the AS-Interface.

# **Packaging**

Sorting

rates.

**Conveyor systems** 

Valve terminals MPA-S, VTSA/VTSA-F, and CPV:

Decentralised installation concepts are often required for more complex machines in order to create an efficient design for the electrical installation.

Complex modules and upstream functions such as packaging are controlled by the AS-Interface in this case.

Compact performance is synonymous with high performance and low weight. Mounting close to the drives simplifies installation, saves air and increases cycle

Decentralised, widely distributed individual drives and sensors are commonly



#### Mounting

Assembling, moving, handling applications often mean fast processes, compact installation conditions and reduced weight.

In such cases, compact I/O modules, valve terminals and perfectly matched drives are valuable features.



# Process technology

Water treatment

Here too, automation and decentralised intelligence are innovative companions on more modern systems.

A compact I/O module is suitable for all valves with NAMUR interface.

The valve terminal VTSA/VTSA-F opens up new opportunities for flow processes in 24-hour non-stop operation. Vertical pressure shut-off plates enable valves to be changed under pressure (hot swap), thereby avoiding downtimes.




#### Slaves

#### Valves

- Simple solution incorporating compact EA modules
- Integrated inputs on valve terminals, e.g. CPV, MPA-S and VTSA/VTSA-F
- More inputs thanks to 4-way and 8-way input modules
- On request:
- Application-specific valves and integration solutions

#### Accessories



- Compact, modular and energysaving power supply system for AS-Interface with integrated earthfault monitoring.
   Load: 5 or 10 A
- Power supply unit for AS-Interface
- Primary switched-mode, modular power supply.
- Installation accessories for laying the flat cables

#### Valve interface variants

Bus node CTEU



Incorporation of a range of valve terminals with I-Port interface in the AS-Interface:

- VTUG
- CPV

- VTUB-12
- VTOC
- MPA-L
- Universal connection technology M12
- Optional decentralised installation of the bus node with electrical connection block CAPC
- Basic diagnostics: undervoltage, short circuit


#### Compact valve terminal CPV



Maximum performance in a very small space of 400 ... 1600 l/min


- Valve combinations for 2, 4 or 8 valve slices
- Vacuum generation, relay and more in one modular assembly
- Ingenious tubing system via pneumatic multiple connector plate:
  - Quick replacement of valve terminals
  - No internal tubing is required with control cabinet installation
- Inputs M8 included for each valve position
- Ex Zone 2, 22
- AS-i Spec. 2.0, 2.1 or 3.0

#### Modular, multi-functional valve terminal MPA-S




- Valves on a sub-base:
- Easy to swap individually
- MPA-S: sturdy and modular from 360 ... 700 l/min
- Flexible valve combinations for 2 ... 8 solenoid coils
- Valve terminals can be expanded at a later date
- MPA1, MPA14 and MPA2 valves can be mixed on one valve terminal for optimised flow rates and control chains
- All valve functions, plus regulator and pressure gauge for variable pressure setting at each valve position.
- 4 or 8 inputs with selectable connection technology
- Selectable connection technology on the bus. Flat cable with 4I/40 or M12 round cable with 4I/40 and 8I/80

#### Modular, multi-functional valve terminal VTSA/VTSA-F




- Standard valves 18, 26, 42 and 52 mm to ISO 17504-2 and 5599-2 on a sub-base are easy to swap individually
- VTSA/VTSA-F: compact and modular from 550 ... 1500 l/min
- Flexible valve combinations for 1 ... 8 solenoid coils
- Valve terminals can be expanded at a later date
- 3 valve sizes can be mixed on one valve terminal for optimised flow rates and control chains
- All valve functions, multiple pressure zones, with regulator and pressure gauge for precision pressure at each valve position. Flow control valves, pressure shut-off plates for valve changes under pressure (hot swap) and further components for vertical stacking.
- 4 or 8 inputs with selectable connection technology
- Selectable connection technology on the bus. Flat cable with 4I/40 or M12 round cable with 4I/40 and 8I/80

#### Compact I/O modules



- Highly compact modules
- Sturdy, encapsulated electrics
- Bus and auxiliary power supply looped through via 2x M12
- Inputs 200 mA
- Outputs 1 A

- 8 inputs M8
- 4 inputs and 3 outputs M12

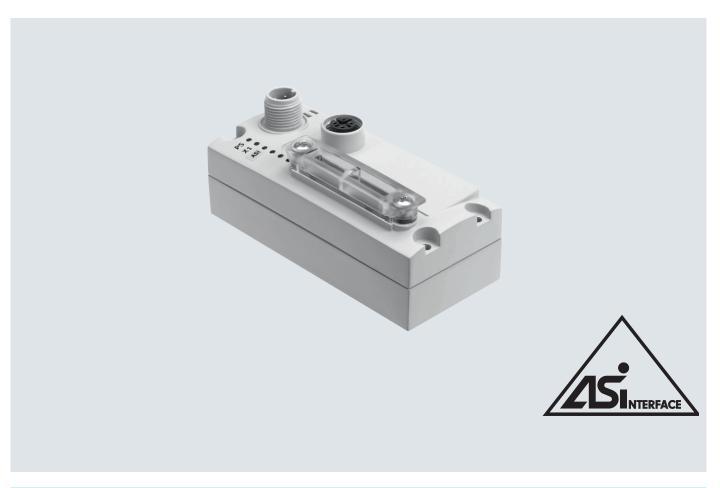

#### Interface module CTEU-AS

The bus node handles communication between the valve terminal and a higher-order AS-Interface® master.

#### General

The module has a system and load supply, a bus connection and a connection to the valve terminal with serial I-Port interface.

## Design

The module has basic diagnostic functions. It has 3 integrated LEDs for onsite indication.

A maximum of 2 byte inputs and 2 byte outputs are transmitted in the cyclic process image.

## Application

- Activation of up to 16 solenoid coils per valve terminal
- Automatic addressing
- Automatic detection of the number of connected valves

# System overview 1 1 2 2 10 11

- [1] AS-Interface
- [2] I-Port
- [3] CTEU bus node (I-Port master)
- [4] Valve terminal VTUG
- [5] Valve terminal CPV
- [6] Valve terminals VTUB-12
- [7] Valve terminal VTOC
- [8] Valve terminal MPA-L
- [9] Electrical connection block CAPC
- [10] Input module CTSL
- [11] Proportional-pressure regulator VPPM
- [12] Valve terminal MPA-L
- Communication with the higherorder controller via fieldbus
- Use a bus node CTEU compatible with the fieldbus protocol
- Up to 24 valve positions (depending on the valve terminal)
- Flow rate of up to 1200 l/min (depending on the valve terminal)

#### Connection of valve terminals to a higher-order I-Port master

#### VTUG

- Up to 24 valve positions
- Flow rate of up to 1200 l/min

# MPA-L

- Up to 32 valve positions
- Flow rate of up to 870 l/min

#### CDV

- Up to 8 valve positions
- Flow rate of up to 1200 l/min

#### VTUB-12

- Up to 35 valve positions
- Flow rate of up to 400 l/min

#### VTOC

- Up to 24 valve positions
- Flow rate of up to 10 l/min



The bus node handles communication between the valve terminal and a higher-order AS-Interface® master.

- Activation of up to 16 solenoid coils per valve terminal
- Automatic addressing
- Automatic detection of the number of connected valves



General technical data			
Fieldbus interface 1			
Protocol		AS-Interface	
Function		Incoming bus connection	
		Power supply	
Туре		AS-Interface	
Connection type		Plug	
Connection technology		M12x1, A-coded to EN 61076-2-101	
Number of pins/cores		4	
Internal cycle time	[ms]	10	
Fieldbus interface 2			
Function		Outgoing bus connection	
		Power supply	
Connection type		Socket	
Connection technology		M12x1, A-coded to EN 61076-2-101	
Number of pins/cores		4	
Inputs/outputs			
Max. address volume inputs	[byte]	2	
Max. address volume for outputs	[byte]	2	

General data			
Device-specific diagnostics		System diagnostics	
		Undervoltage	
		Communication error	
Parameterisation		Watchdog enable	
		Watchdog disable	
Additional functions		Emergency message	
		Acyclic data access via SDO	
Configuration support		None	
Control elements		DIL switches	
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply	
		X1: System status of module at I-Port 1	
	Fieldbus-specific	AS-i: AS-Interface operation	

Technical data – Electrical components		
Nominal operating voltage	[V DC]	30
Operating voltage range	[V DC]	20 31.6
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 50
Max. power supply	[A]	4

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	90 (without AS-i plug and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA
Note on materials	RoHS-compliant

Operating and environmental conditions		
Ambient temperature	[°C]	-5 +50
Storage temperature	[°C]	-20 +70
Corrosion resistance class CRC <sup>1)</sup>		2
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2</sup> )
		To EU RoHS Directive
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations
		To UK RoHS regulations
Certification		c UL us - Listed (OL)
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state
		Unused connections sealed
LABS (PWIS) conformity		VDMA24364 zone III

<sup>1)</sup> More information www.festo.com/x/topic/crc

More information www.festo.com/catalogue/... → Support/Downloads.


## Dimensions



Туре	B1	H1	H2	L1
CTEU-AS	91	45.3	39.7	40

Pin assignment		
	Pin	Allocation
M12 plug, AS-interface In		
4, 3	1	AS-Interface +
X   X	2	24 V load voltage supply
<del>(</del>	3	AS-Interface –
\ <u>\</u>	4	0 V load voltage supply
1/ 1/ 2		
M12 socket, AS-i Out		
2	1	AS-Interface +
	2	24 V load voltage supply
$1 + 0  0 \rightarrow 3$	3	AS-Interface –
٥	4	0 V load voltage supply
4		

## Connection and display components



- [1] Status LED (operating status/diagnostics)
- [2] DIL switch
- [3] Plug M12, AS-Interface bus and auxiliary power supply (AS-i In)
- [4] M12 socket, AS-Interface bus and auxiliary power supply (AS-i Out)

Ordering data				l p	I =
				Part no.	Туре
Bus node					
	AS-Interface bus node			572555	CTEU-AS
Cable socket withou	ut load voltage supply				
	Flat cable, screw terminal	Straight socket, 4-pin, M12	x1, A-coded	18789	ASI-SD-PG-M12
Flat cable					
	AS-Interface flat cable		Yellow	18940	KASI-1.5-Y-100
			Black	18941	KASI-1.5-Z-100
	Cable sleeve for insulating and sealir	ng the flat cable	,	165593	ASI-KT-FK
	Cable cap for insulating and sealing t	he flat cable		18787	ASI-KK-FK

## Valve terminals CPV





#### Valve terminals CPV with AS-Interface – Valve configuration options

Valve terminals CPV with AS-Interface can be configured with a wide range of valve slices. The system supports a maximum of 8 outputs and 8 inputs per AS-Interface slave.

This gives the following basic valve slice configuration options (see tables on following page). Vacant positions can be configured at any position instead of valve slices.

#### General

- With or without 24 V DC auxiliary power supply for solenoid coils (EMERGENCY-STOP circuitry), depending on bus interface
- Solutions with and without integrated inputs
- Width 10, 14 or 18 mm

#### **Variants**

- 2, 4 or 8 valve slices
- Optionally with 4 or 8 inputs
  - Standard mode (SPEC V2.0)
  - A/B mode (SPEC V2.1)
  - A/B mode (SPEC V3.0, profile 7.A.7)

- Optionally with floating relay outnuts
- Valves with integrated separation of ducts 1 and 11
- Separator plates for creating pressure zones
- Suitable for vacuum
- Vacant positions for subsequent extension
- Optionally with pneumatic multiple connector plate

#### Application

- Cost-effective connection of 2, 4 or 8 valve slices to the AS-Interface.
- Comprehensive range of valve functions
- Decentralised machine and system structures, for example
  - in handling technology
  - in conveyor technology
  - in the packaging industry
  - in sorting systems
  - in upstream machine functions

#### - 🖣 -

Note

Please follow the link below for more details on the various pneumatic functions.

→ Internet: cpv

# Valve terminals CPV

Types of	Types of valve terminal with AS-Interface									
Code	Туре	Valve slices	Solenoid coils	Inputs	Auxiliary p	ower supply	Size			
				(M8 connection)	With	Without	CPV10	CPV14	CPV18	
AZ	CPV1x-GE-ASI-2-Z	2	4	_		-	-		-	
AZ	CPV18-GE-ASI-4-Z	4	4	-	•	-	-	_	•	
AE/AO	CPV1x-GE-ASI-4E4A (-Z)	4	4	4	•	•	•	•	_	
AE	CPV1x-GE-ASI-8E8A-Z	8	8	8	•	_	•		-	
BE	CPV1x-GE-ASI-4E3A (-Z)	4	3	4	•	_	•		_	
BE	CPV1x-GE-ASI-8E6A-Z	8	6	8	•	-	•		_	
CE	CPV1x-GE-ASI-4E4A-Z-M8-CE	4	4	4	•	-	•	•	-	
CE	CPV1x-GE-ASI-8E8A-Z-M8-CE	8	8	8		-	-		-	

<sup>1)</sup> The load voltage (auxiliary power supply via the black cable) can be connected/disconnected separately.

Permissible combinations for valve po	osition assignment								
Туре	Slave n	Slave n				Slave n+1			
	0	1	2	3	4	5	6	7	
CPV1x-GE-ASI-2-Z	M	M							
	J	M							
	М	J							
	J	J							
CPV18-GE-ASI-4-Z	М	M	М	M					
CPV1x-GE-ASI-4E4A (-Z)	M	M	М	M					
CPV10-GE-ASI-4A (-Z)	J	Vacant position	M	M	]				
CPV14-GE-ASI-4A (-Z)	M	M	J	Vacant position					
	J	Vacant position	J	Vacant position		,			
CPV1x-GE-ASI-4E3A -Z <sup>1)</sup>	M	M	M	Vacant position					
	J	Vacant position	М	Vacant position					
CPV1x-GE-ASI-8E8A-Z <sup>1)</sup>	M	M	М	M	M	М	M	M	
CPV1x-GE-ASI-8E8A-Z-CE 1)	J	Vacant position	М	M	М	М	М	M	
	M	M	J	Vacant position	M	M	M	M	
	J	Vacant position	J	Vacant position	M	M	M	М	
	M	M	M	M	M	M	M	M	
	М	M	M	M	J	Vacant position	M	M	
	M	M	M	M	M	M	J	Vacant positio	
	M	M	М	M	J	Vacant position	J	Vacant positio	
CPV1x-GE-ASI-8E6A-Z <sup>1)</sup>	М	M	M	Vacant position	M	М	М	Vacant positio	
	M	M	М	Vacant position	J	Vacant position	M	Vacant position	
	J	Vacant position		Vacant position	М	M	M	Vacant positio	
	J	Vacant position	M	Vacant position	J	Vacant position	M	Vacant positio	

<sup>1) -</sup> Valve slices with 2 outputs must be configured at positions 0, 2, 4, 6 (positions 0, 4 only with A/B mode).


 $<sup>\</sup>boldsymbol{\mathsf{-}}$  Valve slices with 2 outputs are always followed by a vacant position.

<sup>-</sup> Slaves n and n+1 can be configured independently of one another. This gives a total of 16 different configuration options.

 $<sup>{\</sup>rm M} \hspace{0.5cm} \hbox{Valve slice with single solenoid valve or alternatively a different valve slice with one output} \\$ 

J Valve slice with double solenoid valve or alternatively a different valve slice with two outputs

# Valve terminals CPV with integrated inputs, to SPEC V2.0





#### Valve terminals CPV with integrated inputs, to specification V2.0

#### General

- Cubic design for exceptional performance and low weight
- Highly flexible thanks to various pneumatic functions (valve variants), different pressure ranges, vacuum switches and the option of integrated vacuum generation.
- Floating relay outputs (optional)
- Connection for auxiliary power supply for emergency off conditions
- Degree of protection IP65

LED indicators for:

- Status indication for inputs
- Switching status indication for valves
- PWR LED (power)
- FAULT LED (fault)

#### **Variants**

- Width 10 and 14 mm
- 4 or 8 inputs
- 4 or 8 valve positions
- Up to four pressure zones
- Suitable for vacuum

- Vacuum generation
- Various valve functions on one valve terminal, e.g.
  - 2x 3/2-way valve
  - 5/2-way valve, single solenoid
  - 5/2-way valve, double solenoid
  - 5/3-way valve
  - 2x 2/2-way valve
  - Valves with integrated separation of ducts 1 and 11
  - Separator plate
  - Vacant position

- Additional function (screwed onto valve slice)
  - One-way flow control valve
- Various mounting options

#### Application

Flexible and cost-effective connection of 4 or 8 valve slices and up to
8 sensors to the M8 inputs, to Spec.
2.0, 31 slaves, bus cycle max. 5 ms.
Executable on all masters from
Spec. 2.0 or later.



#### Note


Please follow the link below for more details on the various pneumatic functions.

→ Internet: cpv

# Valve terminals CPV with integrated inputs, to SPEC V2.0 $\,$

Technical data								
Туре			CPV4E4A-Z-M8	CPV4E4A-M8	CPV8E8A-Z-M8			
Part no.			Order via ident. code/valv	ve terminal configurator				
Code			AE	AO	AE			
Valves	Number of valve slices/solenoid coils		4	4	8			
	Valve width	[mm]	10/14					
	Setting the valve configuration		Integrated DIL switches					
	External voltage supply 24 V DC		Yes	No	Yes			
	Digital inputs		4	4	8			
	Connection technology		M8, 3-pin					
	Sensor supply via AS-Interface		Short-circuit and overload	d protected				
	Sensor connection		2-conductor and 3-condu	ictor sensors				
	Version		IEC 1131-2, type 2					
	Input circuit		PNP (positive switching)					
AS-Interface connection	Connection technology			ug (included in the scope of deliver	v)			
	Voltage range	[V DC]	26.5 31.6, reverse pol		,,			
			20					
	Current consumption, inputs	[mA]		CPV10/14				
	• In 0 status	. ,	7	61/95	40			
	In 1 status (no current consumption by sensors)		35	89/123	96			
	In 1 status (max. current consumption)		240	191/225	278			
	Max. per input	,,	200	200	200			
	Max. per valve			200				
	<ul><li>When switching on</li></ul>			25/38.75				
	<ul> <li>Following current reduction</li> </ul>			8.75/12.5				
Load voltage connection	Connection technology		AS-Interface flat cable plu	ug (version turned 180° must be or	dered separately)			
-	Nominal voltage	[V DC]	24 ±10%					
	Residual ripple	[Vss]	4					
	Current consumption, valves		CPV10/14	No load voltage connection	CPV10/14			
	When switching on	[mA]	108/176		200/310			
	Following current reduction	[mA]	42/72		70/100			
LED indicators	ASI LED		Power/green	<u> </u>				
	AUX PWR LED		Auxiliary power supply/	None	Auxiliary power supply/			
			green		green			
	FAULT LED		Fault LED/red					
	Inputs		Green					
	Valves		Yellow					
General information	Degree of protection (to EN 60529)		IP65 (fully assembled)					
	Electromagnetic compatibility							
	Interference emission		Tested to EN 55011, limit	t value class B				
	Immunity to interference		Tested to DIN EN 61000-	4-2, DIN EN 61000-4-4 and EN V 50	0140			
	CE marking		Yes, to EU Directive 89/3	36/EEC				
	Certification		c UL us Recognized (OL)					
	Temperature range	[°C]	Operation: –5 +50; storage/transport: –20 +70					
	Materials		Housing: Die-cast aluminium; Cover: Reinforced PA; Seal: NBR, CR					
	Note on materials		RoHS-compliant					
	Dimensions		→ 27					
	Weight		<b>→</b> 26					
	Pneumatic data		→ Internet: cpv					
AS-Interface data	Ident. code		F <sub>H</sub> (ID = F <sub>H</sub> ; ID1 = F <sub>H</sub> . ID2 =	= F <sub>H</sub> )				
	IO code		7 <sub>H</sub>	TV.				
	Profile		S-7.F					

## Valve terminals CPV with integrated inputs, for A/B mode, to SPEC V2.1





#### Valve terminals CPV with integrated inputs, for A/B mode, to specification V2.11)

#### General

- A/B mode increases the performance of each master
  - 100% more inputs
  - (248 instead of 124)
  - 50% more outputs
  - (186 instead of 124)
- Cubic design for exceptional performance and low weight
- Highly flexible thanks to various pneumatic functions (valve variants), different pressure ranges, vacuum switches and the option of integrated vacuum generation.

- Floating relay outputs (optional)
- Connection for auxiliary power supply for emergency off conditions
- Degree of protection IP65

#### LED indicators for:

- Status indication for inputs
- Switching status indication for valves
- PWR LED (power)
- FAULT-LED (fault)<sup>2)</sup>

#### **Variants**

- Width 10 and 14 mm
- 4 or 8 inputs
- 3 or 6 valve positions
- Up to four pressure zones
- Suitable for vacuum
- Vacuum generation
- Various valve functions on one valve terminal, e.g.
  - 2x 3/2-way valve
  - 5/2-way valve, single solenoid
  - 5/2-way valve, double solenoid
  - 5/3-way valve
  - 2x 2/2-way valve
  - Valves with integrated separation of ducts 1 and 11
  - Separator plate
- Vacant position

- Additional function (screwed onto valve slice)
  - One-way flow control valve
- Various mounting options

#### **Application**

- AS-i networks with A/B mode to SPEC 2.1 and SPEC 3.0, 62 slaves, bus cycle 10 ms
- Flexible and cost-effective connection of 3 or 6 valve slices and up to 8 sensors to the M8 inputs



Note

Please follow the link below for more details on the various pneumatic functions.


→ Internet: cpv

- 1) Slave compatible with SPEC 3.0
- 2) Peripherals faults to SPEC V2.1 not yet implemented

# Valve terminals CPV with integrated inputs, for A/B mode, to SPEC V2.1 $\,$

Туре			CPV4E3A-Z-M8	CPV8E6A-Z-M8			
Part no. Code			Order via ident. code/valve ter BE	BE			
Valves	Number of valve cliess/solonoid soils		3	6			
valves	Number of valve slices/solenoid coils	[mm]		0			
	Valve width	[mm]	10/14				
	Setting the valve configuration		Integrated DIL switches				
	External voltage supply 24 V DC		Yes				
	Digital inputs  Connection technology		4 MO 2 min	8			
			M8, 3-pin	in at a d			
	Sensor supply via AS-Interface		Short-circuit and overload prot 2-conductor and 3-conductor s				
	Sensor connection			Serisors			
	Version		IEC 1131-2, type 2				
AC Interfere commention	Input circuit		PNP (positive switching)	aludadin the associated lines.)			
AS-Interface connection	Connection technology	[V DC]		cluded in the scope of delivery)			
	Voltage range	[V DC]	26.5 31.6, reverse polarity	protected			
	Residual ripple	[mVss]	20				
	Current consumption, inputs	[mA]	-				
	• In 0 status	h	7	40			
	• In 1 status (no current consumption	, , , , , , , , , , , , , , , , , , ,	35	96			
	In 1 status (max. current consumption)	on by sensors)	137	278			
1 a a d a l ta a a a a a a a a ti a a	Max. per input		200	200			
Load voltage connection	Connection technology	N/DCl	+	ersion turned 180° must be ordered separately)			
	Nominal voltage	[V DC]	24 ±10%				
	Residual ripple	[Vss]	4 CDV44.0.44.4	CDVACAA			
	Current consumption, valves	. Al	CPV10/14	CPV10/14			
	When switching on	[mA]	81/132	150/233			
LED in diseases	Following current reduction	[mA]	32/54	53/75			
LED indicators	ASILED		Power/green				
	AUX PWR LED		Auxiliary power supply/green				
	FAULT LED		Fault LED/red				
	Inputs		Green				
Community from the control of	Valves		Yellow				
General information	Degree of protection (to EN 60529)		IP65 (fully assembled)				
	Electromagnetic compatibility		Total In EN 55044 limit also	and and D			
	Interference emission     Immunity to interference		Tested to EN 55011, limit valu				
	Immunity to interference  CF marking			DIN EN 61000-4-4 and EN V 50140			
	CE marking	[00]	Yes, to EU Directive 89/336/EE				
	Temperature range	[°C]	Operation: -5 +50; storage/				
	LABS (PWIS) criterion		Free of paint-wetting impairme	Cover: Reinforced PA; Seal: NBR, CR			
	Materials  Note on materials		<u> </u>	Cover: Reilliorceu PA; Sedi: NBK, CK			
	Dimensions		RoHS-compliant				
			→ 27				
	Weight		→ 26				
AC Interfere data	Pneumatic data		→ Internet: cpv				
AS-Interface data	Ident. code		$ID = A_{H;} ID1 = 7_{H;} ID2 = E_{H}$				
	IO code		7 <sub>H</sub> S-7.A.E				

# Valve terminals CPV with integrated inputs, for A/B mode, to SPEC V3.0





#### Valve terminals CPV with integrated inputs, for A/B mode, to specification V3.0, profile 7.A.7

#### General

- A/B mode increases the performance of each master
  - 100% more inputs
  - (248 instead of 124)
  - 100% more outputs
  - (248 instead of 124)
- Cubic design for exceptional performance and low weight
- Highly flexible thanks to various pneumatic functions (valve variants), different pressure ranges, vacuum switches and the option of integrated vacuum generation.

- Floating relay outputs, optional
- Connection for auxiliary power supply for emergency off conditions
- Degree of protection IP65

#### LED indicators for:

- Status indication for inputs
- Switching status indication for valves
- PWR LED (power)
- FAULT LED (fault)

#### **Variants**

- Width 10 and 14 mm
- 4 or 8 inputs
- 4 or 8 valve positions
- Up to four pressure zones
- Suitable for vacuum
- Vacuum generation
- Various valve functions on one valve terminal, e.g.
  - 2x 3/2-way valve
  - 5/2-way valve, single solenoid
  - 5/2-way valve, double solenoid
  - 5/3-way valve
  - 2x 2/2-way valve
  - Valves with integrated separation of ducts 1 and 11
  - Separator plate
- Vacant position

- Additional function (screwed onto valve slice)
  - One-way flow control valve
- Various mounting options

#### Application

- AS-i networks with A/B mode to SPEC 3.0, profile 7.A.7, 62 slaves, bus cycle max. 20 ms
- Flexible and cost-effective connection of 4 or 8 valve slices and up to 8 sensors to the M8 inputs.

# - Note

Slaves to Spec. 3.0 need an AS-i master to Spec. 3.0; these automatically detect the new slave profiles.


Please follow the link below for more details on the various pneumatic functions.

→ Internet: cpv

# Valve terminals CPV with integrated inputs, for A/B mode, to SPEC V3.0 $\,$

Technical data			CDV	CDV OFOA 7 MO CF			
Туре			CPV4E4A-Z M8-CE	CPV8E8A-Z M8-CE			
Part no.			Order via ident. code/valve termin				
Code			CE	CE			
Valves	Number of valve slices/solenoid coils		4	8			
	Valve width	[mm]	10/14				
	Setting the valve configuration		Integrated DIL switches				
	External power supply	[V DC]	24				
	Digital inputs		4	8			
	Connection technology		M8, 3-pin				
	Device-specific diagnostics		Short circuit/overload of inputs				
	Sensor connection		2-conductor and 3-conductor sens	sors			
	Input characteristics		IEC 1131-2, type 2				
	Switching logic at inputs		PNP (positive switching)				
AS-Interface connection	Connection technology		AS-Interface flat cable plug (includ	ded in the scope of delivery)			
	Number of slaves per device		1	2			
	Voltage range	[V DC]	26.5 31.6, reverse polarity prof	tected			
	Residual ripple	[mVss]	20				
	Debounce time at inputs (for 24 V)	[ms]	Typically 3				
	Set using AS-Interface addressing device		1A 31A (0)				
			1B 31B				
	Switching level	[V]					
	Signal 0		≤ 5				
	Signal 1		≥ 11				
	Current consumption, inputs	[mA]					
	• In 0 status		20	40			
	• In 1 status (no current consumption by ser	nsors)	Max. 48	Max. 96			
	Max. per input		200	200			
Load voltage connection	Connection technology		AS-Interface flat cable plug (version turned 180° must be ordered separately)				
	Nominal voltage	[V DC]	24 ±10%				
	Residual ripple	[Vss]	4				
	Current consumption of valves (type-dependent	ent)	CPV10/14	CPV10/14			
	When switching on	[mA]	Max. 115/175	Max. 240/460			
	Following current reduction	[mA]	Max. 55/75	Max. 95/120			
LED indicators	ASI LED		Power/green				
	AUX PWR LED		Auxiliary power supply/green				
	FAULT LED		Fault LED/red				
	Inputs		Green				
	Valves		Yellow				
General information	Degree of protection (to EN 60529)		IP65 (fully assembled)				
	Relative humidity	[%]	0 95 (non-condensing)				
	Temperature range	[°C]	Operation: -5 +50; storage/tra	nsport: -20 +70			
	Materials		Housing: Die-cast aluminium; Cov				
	Dimensions		→ 27				
	Weight		<b>→</b> 26				
	Pneumatic data		→ Internet: cpv				
AS-Interface data	Ident. code		$ID = A_{H_1} ID1 = 7_{H_2} ID2 = 7_{H_3}$				
	IO code		7 <sub>H</sub>				
	Profile		S-7.A.7				

# Valve terminals CPV without inputs, to SPEC 2.1





#### Valve terminals CPV without inputs, to specification 2.11)

#### General

- Cubic design for exceptional performance and low weight
- Highly flexible thanks to various pneumatic functions (valve variants), different pressure ranges, vacuum switches and the option of integrated vacuum generation
- Floating relay outputs (optional)
- Connection for auxiliary power supply for emergency off conditions
- Degree of protection IP65

LED indicators for:

- Switching status indication for valves
- PWR LED (power)
- FAULT-LED (fault)2)
- Valve diagnostics: short circuit or wire break at valve solenoid coil, valve not switching (no movement of the plunger)

#### **Variants**

- Width 10, 14 and 18 mm
- 2 or 4 valve positions
- Up to two pressure zones
- Suitable for vacuum
- Vacuum generation

- Valve terminal with 4 valve positions:
  - With or without 24 V DC auxiliary power supply for solenoid coils (EMERGENCY-STOP circuitry)
  - The auxiliary power supply is always integrated and can be subsequently switched off using the DIL switch.
- Various valve functions on one valve terminal, e.g.
  - 2x 3/2-way valve
- 5/2-way valve, single solenoid
- 5/2-way valve, double solenoid
- 5/3-way valve
- 2x 2/2-way valve

- Valves with integrated separation of ducts 1 and 11
- Separator plate
- Vacant position
- Additional function (screwed onto valve slice)
  - One-way flow control valve
- Extensive mounting options

#### **Application**

• Flexible and cost-effective connection of 2 or 4 valve slices, 31 slaves, bus cycle max. 5 ms



Please follow the link below for more details on the various pneumatic functions.

→ Internet: cpv

- 1) Slave compatible with SPEC 3.0
- Valve terminal with 4 valve positions: peripherals fault to SPEC 2.1 implemented valve terminal with 2 valve positions: peripherals fault not implemented

# Valve terminals CPV without inputs, to SPEC V2.1 $\,$

Technical data			CDV 2.7	CPV4-Z <sup>1)</sup>
Туре			CPV2-Z	
Part no.			Order via ident. code/valve terminal co	
Code			AZ	AS/AZ
Valves	Number of valve slices/solenoid coils		2/4	4/4
	Valve width	10 mm	•	•
		14 mm	•	•
		18 mm	•	•
	Setting the valve configuration		None (permanently assigned)	CPV 10/14 integrated DIL switch, CPV 18 <sup>3)</sup>
	External voltage supply 24 V DC		Yes	Yes <sup>2)</sup>
				Can be set using DIL switch
AS-Interface connection	Connection technology		AS-Interface flat cable plug (must be o	ordered separately)
	Voltage range	[V DC]	26.5 31.6, reverse polarity protected	ed
	Residual ripple	[mVss]	20	
	Current consumption of all valves		CPV10/14/18	CPV10/14/18
	Without current reduction	[mA]	25/25/25	25/25/25
	<ul> <li>With current reduction</li> </ul>	[mA]	25/25/25	25/25/25
Load voltage connection	Connection technology		AS-Interface flat cable plug (must be o	ordered separately)
				Blanking plug for sealing the unused connection enclosed
	Nominal voltage	[V DC]	24 ±10%	
	Residual ripple	[Vss]	4	
	Max. starting current		CPV10/14/18	CPV10/14/18
	Before current reduction	[mA]	108/176/320	110/165/246
	Following current reduction	[mA]	48/72/120	35/40/100
LED indicators	PWR LED		Power/green	
	FAULT LED		Fault LED/red	Peripherals fault LED/red Valve diagnostics: short circuit or wire break at valve solenoid coil, valve not switching
	Valves		Yellow	(no movement of the plunger)
General information	Degree of protection (to EN 60529)		IP65 (fully assembled)	
deneral information	Electromagnetic compatibility		Trob (tutty assembled)	
	Interference emission		Tested to EN 55011, limit value class	R
	Immunity to interference		Tested to DIN EN 61000-4-2, DIN EN 6	
	CE marking		Yes, to EU Directive 89/336/EEC	31000-4-4 and EN V 30140
	Temperature range	[°C]	Operation: -5 +50; storage/transpo	ort: 20 ±70
	Materials	[ C]	Housing: Die-cast aluminium; Cover: F	
	Dimensions		→ 27	Nemiorceu FA, Seat. NBN, CK
	Weight		→ 26	
	Pneumatic data		→ Internet: cpv	
AS-Interface data	Ident. code		<u>'</u>	
no interface udia	IO code		F <sub>H</sub> 8 <sub>H</sub>	
	ID2 code		F <sub>H</sub>	E <sub>H</sub> (F <sub>H</sub> for CPV18)
	Profile		г <sub>н</sub> S-8.F	S-8.F.E
	Parameter P3		3-0.1	1 = enable
	CPV valve diagnostic function			2 = disable
	Default		1 for CPV with valve diagnostics	


<sup>1)</sup> New as of HW version 0105: single or double solenoid valves can be configured using a DIL switch

<sup>2)</sup> With or without 24 V DC auxiliary power supply for solenoid coils (EMERGENCY-STOP circuitry). The auxiliary power supply is always integrated and can be switched on/off using the DIL switch.

3) None (permanently assigned)


## Overview of connections/displays – CPV with AS-Interface

CPV-...-2-Z /ASI-4-(Z)




- [1] AS-Interface bus connection
- [2] PWR LED (power, green) FAULT LED (fault, red)
- [3] Auxiliary power supply for valves (optional)
- [4] Inscription labels
- [5] LED indicator for valves

# CPV-...-4E4A(-Z) / 4E/3A-...- / 4E/4A-...-CE



- [1] AS-Interface bus connection
- [2] PWR LED (power, green) FAULT LED (fault, red)
- [3] Auxiliary power supply for valves (optional)
- [4] LED indicator for inputs (green)
- [5] Sensor connections
- [6] Inscription labels
- [7] LED indicator for valves (yellow)

#### CPV-...-8E8A-Z / 8E/6A /8E/8A-...-CE

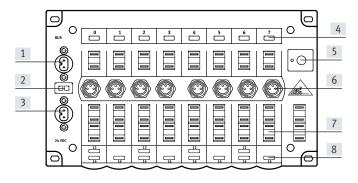

- [1] AS-Interface bus connection
- [2] PWR LED (power, green) FAULT LED (fault, red)
- [3] Auxiliary power supply for valves
- [4] LED indicator for inputs (green)
- [5] Address selector button with LED
- 6 Sensor connections
- [7] Inscription labels
- [8] LED indicator for valves (yellow)


# AS-Interface® components

Weight [g] – Valve terminal CPV with AS-Interface			
Туре	CPV10	CPV14	CPV18
Electrical connection block with AS-Interface connection			
with 2 valve positions	85	130	275
• with 4(3) valve positions	110	175	355
• with 8(6) valve positions	200	300	
End plate, pack of 2	160	280	740
Pneumatic multiple connector plate			
on CP valve terminal with 2 valve positions	120	270	520
on CP valve terminal with 4 valve positions	165	390	750
on CP valve terminal with 6 valve positions	225	510	870
on CP valve terminal with 8 valve positions	270	630	1300
Flat plate silencer	147	234	-
Relay plate	35	55	-
Blanking plate	25	45	90
Separator plate	25	45	90
Valve sub-base/vacuum generator	65	110	260
Function element: one-way flow control valve	25	54	125

# Dimensions – CPV with AS-Interface

Without integrated inputs

Download CAD data → www.festo.com

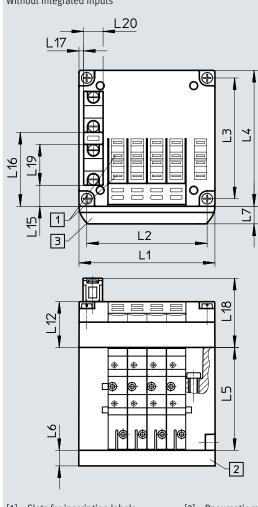



- [1] Slots for inscription labels
- [2] Pneumatic multiple connector plate
- [3] Holder for inscription labels

		L1	L2	L3	L4	L5	L6	L7	L12	L14	L15	L16	L17
CPV10	2 valves	50	41.8	62	71	52.8	15	9.5	-	10.9	38.1	2.5	35.5
	4 valves	70	61.8	62	71	52.8	15	9.5	23.5	10.9	38.1	2.5	35.5
CPV14	2 valves	68	58	78	89	58.8	20	9.5	-	14	52	5	35.5
	4 valves	96	86	78	89	58.8	20	9.5	23.5	14	52	5	35.5
CPV18	2 valves	96	85.5	106.5	118	73	20	9.5	-	27.4	68.2	10.4	40
	4 valves	132	121.5	106.5	118	73	20	9.5	28	27.4	68.2	10.4	40

#### Dimensions – CPV with AS-Interface

CPV10/14 with integrated inputs




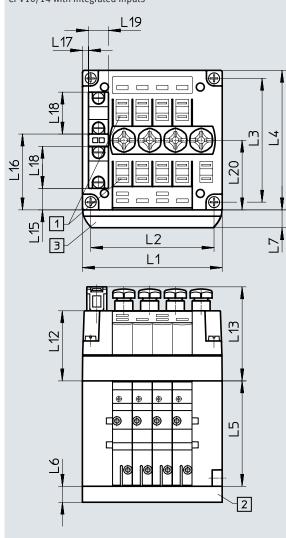


- [1] Slots for inscription labels
- [2] Pneumatic multiple connector plate
- [3] Holder for inscription labels

(CPV10/14-VI-BZ-T-... or CPV10/14-VI-ST-T-...)

		L1	L2	L3	L4	L5	L6	L7	L12	L13	L15	L16	L17	L18	L19	L20
CPV10	4 valves	70	61.8	62	71	52.8	15	9.5	35.1	47.1	10.9	38.1	3	21	10	35
CPV14	4 valves	96	86	78	89	58.8	20	9.5	35.1	47.1	18.8	46.8	5	21	10	43.3

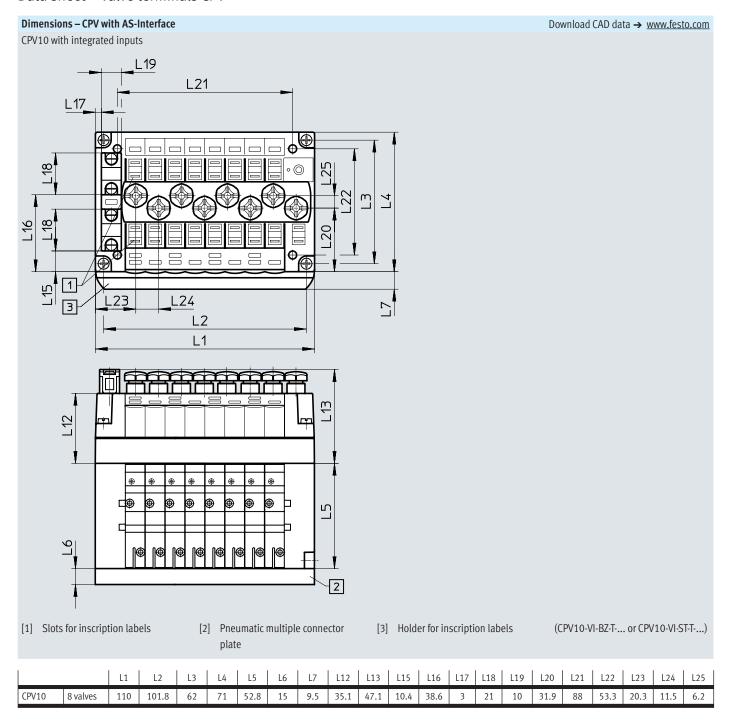

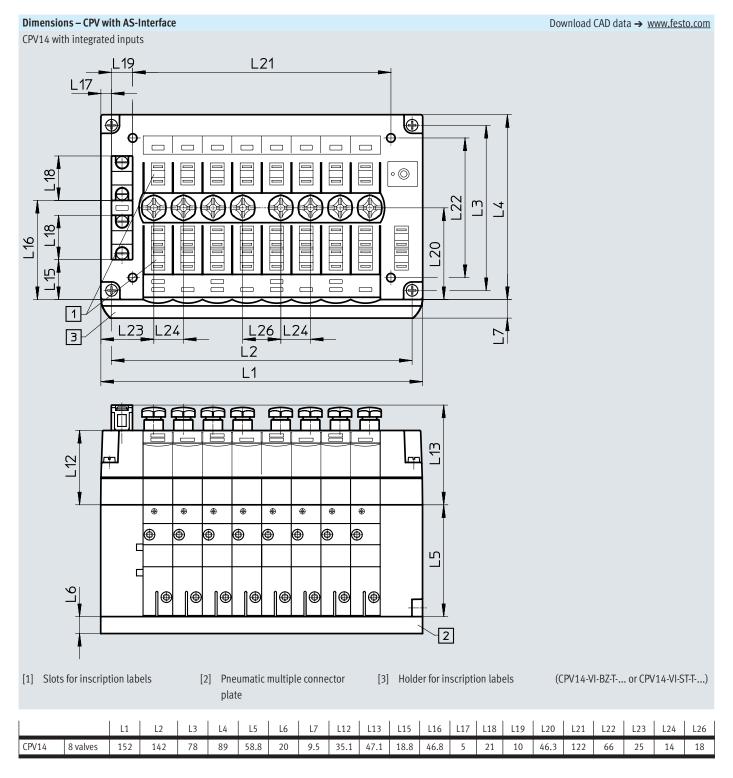

Ordering data				
	Designation		Part no.	Туре
Bus connection				
	Electrical interface CPV10	4 valve positions	552559	CPV10-GE-ASI-4E4A-Z-M8-CE
		8 valve positions	552560	CPV10-GE-ASI-8E8A-Z-M8-CE
	Electrical interface CPV14	4 valve positions	552561	CPV14-GE-ASI-4E4A-Z-M8-CE
		8 valve positions	552562	CPV14-GE-ASI-8E8A-Z-M8-CE
Bus connection				
Dus connection	AS-Interface flat cable 100 mm	Yellow	18940	KASI-1.5-Y-100
	7.5 interface hat cubic 100 inin	Black	18941	KASI-1.5-Z-100
		Black	10,41	NASI 1.5 2 100
	Flat cable socket		18785	ASI-SD-FK
	Flat cable socket	Rotated 180°	196089	ASI-SD-FK180
	Flat cable blanking plug		196090	ASI-SD-FK-BL
	AS-Interface flat cable distributor	Rotatable cable	18786	ASI-KVT-FK
	AS-Interface flat cable distributor	Symmetrical cable	18797	ASI-KVT-FK-S
	Cable cap for flat cable (pack of 50)	1	18787	ASI-KK-FK
	Cable sleeve (pack of 20)		165593	ASI-KT-FK
Sensor plug				
	Straight plug, M8x1, 3-pin, A-coded	Cable diameter 2.1 5 mm	8162298	NECB-S-M8G3-C2
	Cover cap (pack of 10)	M8	177672	ISK-M8
Connecting cable		<del></del>		
	Modular system for a choice of connecting cables		8078221	NEBA  → Internet: neba
	Straight plug M8, 3-pin, straight socket M8, 3-pin	0.5 m	8078282	NEBA-M8G3-U-0.5-N-M8G3
		1.0 m	8078283	NEBA-M8G3-U-1-N-M8G3
		2.5 m	8078286	NEBA-M8G3-U-2.5-N-M8G3
		5.0 m	8078287	NEBA-M8G3-U-5-N-M8G3

Ordering data				
	Designation		Part no.	Туре
Other				
	24 V DC power supply	5 A	8149580	CACN-3A-1-5-G2
		10 A	8149581	CACN-3A-1-10-G2
	Addressing cable		18960	KASI-ADR
	AS-Interface input module for 8 inputs M8	542124	ASI-8DI-M8-3POL	
	AS-Interface input/output module for 4 inputs/3 outputs M12	542125	ASI-4DI3DO-M12X2-5POL-Z	
<i>j</i>	Inscription labels	6x10 mm (pack of 64)	18576	IBS-6x10
		9x20 mm (pack of 20)	18182	IBS-9x20
	DIN rail to EN 60715		35430	NRH-35-2000
ag. L	Mounting for DIN rail		162556	CPV10/14-VI-BG-NRH-35
			163291	CPV18-VI-BG-NRH-35
User documentation				
	Manual for CPV pneumatics	German	165100	P.BE-CPV-DE
		English	165200	P.BE-CPV-EN
		French	165130	P.BE-CPV-FR
		Italian	165160	P.BE-CPV-IT
		Spanish	165230	P.BE-CPV-ES

#### Valve terminal MPA-S





#### MPA-S valve terminals with AS-Interface - Valve configuration options

MPA-S valve terminals with AS-Interface can be flexibly configured with a wide range of valves. The system supports a maximum of 8 outputs (solenoid coils) and 8 inputs per valve terminal. This gives the following basic valve configuration options (see tables on following page).



#### Note

Please follow the link below for more details on the various pneumatic functions.

→ Internet: mpa-s

#### General

- Solutions with integrated inputs
- Width 10 mm, 14 mm or 20 mm
- With or without 24 V DC auxiliary power supply for solenoid coils (EMERGENCY-STOP circuitry) in the case of the 4I/40 version. The auxiliary power supply is always integrated in the version with 8 inputs and cannot be subsequently switched off using the DIL switch.
- Selectable bus connection technology
  - Flat cable for AS-Interface with 4I/40 version
  - M12 round plug, 4-pin, with 4l/40 and 8l/80 version
- Selectable addressing
  - Via bus connection (M12 or flat cable)

## Variants

- 2 to 8 valves, freely configurable
- With 4 or 8 inputs
- Connection technology M12, M8, spring-loaded terminal or Sub-D
- Separating seals for creating pressure zones
- Suitable for vacuum
- Subsequent extensions either
  - via unused valve positions
  - by converting the valve terminal

#### Application

- Flexible and cost-effective connection of 2 or 8 valves (max. 8 solenoid coils) with input feedback.
- Decentralised machine and system structures, e.g.
  - in handling technology
  - in conveyor technology
  - in the packaging industry
  - in sorting systems
  - suitable for energy chains thanks to connection via round cables

# Valve terminal MPA-S — Connection technology and addressing

Types of valve terminal with AS-Interface										
Туре	Valves	Solenoid coils	Inputs	Corresponds to Spec	Extended addressing range	Auxiliary power supply can be switched off		Width		
						Yes	No	10 mm	14 mm	20 mm
VMPA-ASI-EPL-E-4E4A-Z	4	4	4	2.1	-	•	-	•	-	•
VMPA-ASI-EPL-G-4E4A-Z	4	4	4	2.1	_	•	-	•	-	-
VMPA-ASI-EPL-EU-4E4A-Z	4	4	4	2.1	_	•	_	•	-	-
VMPA-ASI-EPL-GU-4E4A-Z	4	4	4	2.1	_	•	-	•	-	-
VMPA-ASI-EPL-E-8E8A-Z	8	8	8	2.1	_	-	•	•	-	-
VMPA-ASI-EPL-G-8E8A-Z	8	8	8	2.1	_	-	•	•	-	-
VMPA-ASI-EPL-EU-8E8A-Z	8	8	8	2.1	_	-	•	•	-	-
VMPA-ASI-EPL-GU-8E8A-Z	8	8	8	2.1	_	-		•	-	•
VMPA-ASI-EPL-E-8E8A-CE	8	8	8	3.0	•	-		•	-	-
VMPA-ASI-EPL-G-8E8A-CE	8	8	8	3.0	•	-	•	•	-	-
VMPA-ASI-EPL-EU-8E8A-CE	8	8	8	3.0	•	-	•	•	-	-
VMPA-ASI-EPL-GU-8E8A-CE	8	8	8	3.0	•	-		•	-	-

Permissible combinations for valve position	assignment								
Туре	Slave n								
	0	1	2	3					
4I/4O MPA1 and MPA14 – M only (up to 4	M	M	M	M					
valves per sub-base)	M	M	M	L					
	M	M	L	L					
	M	L	L	L					
4I/4O MPA2 (2 valves per sub-base)	M	M	M	M					
	J	M	-	-					
	M	J	-	-					
	J	J	-	-					

All valve slices are freely configurable, limited by the number of solenoid coils supported (4 or 8).
 A cover plate can be used instead of a valve slice as reserve position for one or two solenoid coils.

 $<sup>{\</sup>rm M} \hspace{0.5cm} \hbox{Valve slice with single solenoid valve or alternatively a different valve slice with one output} \\$ 

J Valve slice with double solenoid valve or alternatively a different valve slice with two outputs

L Spare position

# Valve terminal MPA-S — Connection technology and addressing

Туре	Slave n plus sla	ive n+1						
	0	1	2	3	4	5	6	7
8I/80 MPA1 and MPA14 (up to 4 valves per	M	M	M	M	M	M	M	M
sub-base)	M	M	M	L	M	M	M	L
	J	J	J	J	-	_	_	-
	J	J	J	J	_	_	_	-
	J	J	J	M	_	_	_	-
	J	J	M	M	_	_	_	_
	J	J	L	L	_	_	_	-
8I/80 MPA2 (2 valves per sub-base)	M	M	M	M	M	M	M	M
	M	М	M	L	М	M	М	L
	J	J	J	J	-	-	_	-
	J	J	J	M	_	_	_	_
	J	J	M	M	_	_	_	_
	J	J	M	M	M	M	_	-
	J	J	M	M	M	L	_	-
	M	M	M	M	J	J	-	-

All valve slices are freely configurable, limited by the number of solenoid coils supported (4 or 8).
 A cover plate can be used instead of a valve slice as reserve position for one or two solenoid coils.

M Valve slice with single solenoid valve or alternatively a different valve slice with one output


J Valve slice with double solenoid valve or alternatively a different valve slice with two outputs


L Spare position

## Valve terminal MPA-S – Connection technology and addressing

#### Installation: Selectable connection technology for AS-Interface

Support for flat cables







- Straightforward installation with flat cable in more protected areas
- Fast installation technology with standard AS-Interface cables
- Standard installation at the AS-Interface with yellow flat cable possible with MPA-S version 4I/40

Standard installation at the AS-Interface flat cable

#### Support for round cables






Local round cable wiring for areas with permanently higher loads:

- Consistently high humidity
- Need for flexible installation with one cable
- Use in energy chains with highly flexible cables
- [1] Pre-assembled M12 round cable, 1 m, polyurethane
- [2] Optional cable for additional slave, e.g. highly flexible cable for energy chains or PVC cable for applications requiring resistance to cleaning agents

#### Addressing

AS-Interface connections



- [1] M12 plug for AS-Interface and incoming auxiliary supply
- [2] M12 socket for AS-Interface and outgoing auxiliary supply

## Extended addressing range

The extended addressing range enables a total of 62 slaves to be operated on an AS-Interface master. The master as well as the slaves must be designed for the extended addressing range in order to be able to exploit the full number of slaves.


With the extended addressing range, two slaves share one address. Standard slaves do not have this capability. They can be connected to a master with an extended addressing range, but also occupy a full address.

In other words, up to 62 slaves with an extended addressing range can be connected to a master with an extended addressing range, but only 31 standard slaves.

Slaves with an extended addressing range, like standard slaves, can be connected to a standard master, but must be configured as "A" slaves.

# Valve terminal MPA-S – Connection technology and addressing

# Supplementary, compact I/O modules



The compact I/O modules can be used to supplement the valve terminal MPA-S. The following are available:

- 8 inputs M8
- 4 inputs/3 outputs M12

## Key features - Display and operation

#### Display and operation

Every solenoid coil is assigned to an LED that indicates its signal status.

- Indicator 12 shows the switching status of the coil for output 2
- Indicator 14 shows the signal status of the coil for output 4

#### Manual override

valve to be switched when not electrically activated or energised.


The valve is switched by pushing the manual override. The set switching status can also be locked by rotating the manual override (code R or as accessory).

The manual override (MO) enables the

#### Alternatives:

- A covering (code N or as an accessory) prevents the manual override from being locked. The manual override can then only be activated by pushing it.
- A covering (code V) can be fitted over the manual override to prevent it from being accidentally activated.

#### Pneumatic connection and control elements




- [1] Flat plate silencer for exhaust port 3/5
- [2] Manual override (for each pilot solenoid coil, non-detenting or non-detenting/detenting)
- [3] Adjusting knob for optional pressure regulator plate
- [4] Inscription label holder for subbase
- [5] Working ports 2 and 4, per valve position
- [6] Supply port 1
- [7] Pressure gauge (optional)
- [8] Ports 12 and 14 for supplying the external pilot air

## - Note

A manually operated valve (manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the mechanical manual override.

#### Electrical connection and display components on the AS-Interface



- [1] M12 socket for AS-Interface bus and auxiliary power supply (AS-i
- [2] M12 plug for AS-Interface bus and auxiliary power supply (AS-i In)
- [3] Earth connection
- [4] Status LEDs for inputs
- [5] Status LEDs for AS-Interface
- [6] Diagnostic LEDs for valves

Туре			VMPA4E4A-Z         VMPA8E8A-Z         VMPA8E8A-CE					
Part no.			Order via ident. code	/valve terminal configu	rator			
Valves	Number of solenoid coils	4		8				
	Valve width	[mm]	10, 14, 20					
	External voltage supply 24 V DC		Can be set using DIL	switch	Yes			
Inputs	Number of digital inputs		4		8			
	Connection technology		M12 5pin, M8 3-pin,	CageClamp, Sub-D				
	Sensor supply via AS-Interface		Short-circuit and ove	rload protected				
	Sensor connection		2-conductor and 3-co	onductor sensors				
	Version		IEC 1131-2, type 02					
	Input circuit		PNP (positive switchi	ng)				
AS-Interface connection	Connection technology		M12 connection					
	Voltage range	[V DC]	26.5 31.6, reverse	polarity protected				
	Residual ripple	[mVss]	20					
	Current consumption, inputs	[mA]	Without auxiliary power supply	With auxiliary power supply	With auxiliary power s	supply		
	Basic electronic load		≤25	≤25	≤25	,		
	Total input current		350	350	350			
	Total output current	[mA]	MPA1: 270	MPA1: 540	MPA1: 540			
	(valves incl. LED)		MPA14:-	MPA14:-	MPA14: -			
			MPA2: 533	MPA2: 1065	MPA2: 1065			
Load voltage connection	Connection technology		M12 connection					
	Voltage range	[V DC]	21.6 26.4					
	Residual ripple	[Vss]	4					
Current consumption of valves per	Max. starting current (at 24 V)	[mA]	MPA1:≤80					
solenoid coil			MPA14:-					
			MPA2: ≤100					
	Following current reduction (approx. 25 ms)	[mA]	MPA1: ≤25 MPA1: −					
			MPA1: - MPA2: <20					
LED indicators	ASI LED		Green					
LLD marcators	AUX PWR LED		Green					
	FAULT LED		Red					
	Inputs		Green					
	Valves		Yellow					
General information	Materials		Die-cast aluminium,	PA		,		
ocherat mormation	Note on materials		RoHS-compliant					
	Dimensions		× 43					
	Weight	[g]	360					
AS-Interface data	Ident. code	101	$ID = F_H; ID1 = F_H^{1}; ID$	2 = E <sub>H</sub>	$ID = F_H; ID1 = F_H^{1};$ $ID2 = E_H$	$ID = A_H; ID1 = F_H^{1};$ $ID2 = E_H$		
	IO code		7 <sub>H</sub>		7 <sub>H</sub>	7 <sub>H</sub>		
	Profile		S-7.F.E		S-7.F.E	S-7.A.E		
	Addressing range		1 31		131	1A 31A, 1B 31		

<sup>1)</sup> Factory setting, is set by some programming devices (Spec. 2.1) when addressing slaves to  $0_{\rm H}$ 

Operating and environmental conditions		
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure	[MPa]	-0.09 +1
	[bar]	-0.9 +10
Pilot pressure	[MPa]	0.3 0.8
	[bar]	38
Ambient temperature	[°C]	-5 +50
Temperature of medium	[°C]	-5 +50
Storage temperature	[°C]	-20 +40
Corrosion resistance class CRC <sup>1)</sup>		0
Relative humidity		Max. 90% at 40 °C
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2</sup> )
		To EU RoHS Directive
		To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations
		To UK RoHS regulations
		To UK explosion regulations
KC marking		KC EMC
Certification		c UL us - Recognized (OL)
		RCM
Degree of protection		IP67
LABS (PWIS) conformity	<u> </u>	VDMA24364-B1/B2-L

<sup>1)</sup> More information www.festo.com/x/topic/crc

More information www.festo.com/catalogue/... → Support/Downloads.

ATEX		
Туре		MPA-ASI-VI
ATEX category for gas		II 3 G
Type of ignition protection for gas		Ex ec IIC T4 Gc X
Explosion-proof ambient temperature [s	°C]	-5 ≤ Ta ≤ +50
Explosion protection certification outside the EU		EPL Db (GB)
		EPL Gb (GB)


<sup>2)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... -> Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Combinations of connection blocks and electronics modules for inputs							
Manifold blocks	Part no.	VMPA8E8A	VMPA4E4A				
CPX-AB-4-M12X2-5POL	195704	•	•				
CPX-AB-8-M8-3POL	195706	•	•				
CPX-AB-8-KL-4POL	195708	•	•				
CPX-AB-1-SUB-BU-25POL	525676	•	•				

Pin assignment Connection block inputs		VMPA8E8A		VMPA4E4A	
CPX-AB-4-M12X2-5P					
	3 5 2 2 3 4 5 1 5	X1.1: 24 V <sub>SEN</sub> X1.2: Input x+1 X1.3: 0 V <sub>SEN</sub> X1.4: Input x	X3.1: 24 V <sub>SEN</sub> X3.2: Input x+5 X3.3: 0 V <sub>SEN</sub> X3.4: Input x+4	X1.1: 24 V <sub>SEN</sub> X1.2: Input x+1 X1.3: 0 V <sub>SEN</sub> X1.4: Input x	X3.1: 24 V <sub>SEN</sub> X3.2: Input x+3 X3.3: 0 V <sub>SEN</sub> X3.4: Input x+2
	X 1 X 3	X1.5: FE	X3.5: FE	X1.5: FE	X3.5: FE
	X2 X4	X2.1: 24 V <sub>SEN</sub> X2.2: Input x+3 X2.3: 0 V <sub>SEN</sub> X2.4: Input x+2 X2.5: FE	X4.1: 24 V <sub>SEN</sub> X4.2: Input x+7 X4.3: 0 V <sub>SEN</sub> X4.4: Input x+6 X4.5: FE	X2.1: 24 V <sub>SEN</sub> X2.2: n.c. X2.3: 0 V <sub>SEN</sub> X2.4: Input x+1 X2.5: FE	X4.1: 24 V <sub>SEN</sub> X4.2: n.c. X4.3: 0 V <sub>SEN</sub> X4.4: Input x+3 X4.5: FE
CPX-AB-8-M8-3P					
	4 X1 1 4 X5 1 3 3 3 1 4 X2 1 4 X6 1	X1.1: 24 V <sub>SEN</sub> X1.3: 0 V <sub>SEN</sub> X1.4: Input x	X5.1: 24 V <sub>SEN</sub> X5.3: 0 V <sub>SEN</sub> X5.4: Input x+4	X1.1: 24 V <sub>SEN</sub> X1.3: 0 V <sub>SEN</sub> X1.4: Input x	X5.1: 24 V <sub>SEN</sub> X5.3: 0 V <sub>SEN</sub> X5.4: Input x+2
	<b>X2</b> 1 4 X6 1 3 3 3 4 X7 1 4 X7 1 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	X2.1: 24 V <sub>SEN</sub> X2.3: 0 V <sub>SEN</sub> X2.4: Input x+1	X6.1: 24 V <sub>SEN</sub> X6.3: 0 V <sub>SEN</sub> X6.4: Input x+5	X2.1: 24 V <sub>SEN</sub> X2.3: 0 V <sub>SEN</sub> X2.4: Input x+1	X6.1: 24 V <sub>SEN</sub> X6.3: 0 V <sub>SEN</sub> X6.4: Input x+3
	4 X4 1 4 X8 1	X3.1: 24 V <sub>SEN</sub> X3.3: 0 V <sub>SEN</sub> X3.4: Input x+2	X7.1: 24 V <sub>SEN</sub> X7.3: 0 V <sub>SEN</sub> X7.4: Input x+6	X3.1: 24 V <sub>SEN</sub> X3.3: 0 V <sub>SEN</sub> X3.4: Input x+1	X7.1: 24 V <sub>SEN</sub> X7.3: 0 V <sub>SEN</sub> X7.4: Input x+3
		X4.1: 24 V <sub>SEN</sub> X4.3: 0 V <sub>SEN</sub> X4.4: Input x+3	X8.1: 24 V <sub>SEN</sub> X8.3: 0 V <sub>SEN</sub> X8.4: Input x+7	X4.1: 24 V <sub>SEN</sub> X4.3: 0 V <sub>SEN</sub> X4.4: n.c.	X8.1: 24 V <sub>SEN</sub> X8.3: 0 V <sub>SEN</sub> X8.4: n.c.

Pin assignment Connection block inputs		VMPA	8E8A			VMPA	4E4A		
CPX-AB-8-KL-4P									
	X1 .0 .0 .0 X5	X1.1: X1.2: X1.3: X2.0: X2.1: X2.2: X2.3: X3.0: X3.1: X3.2: X3.3: X4.0: X4.1:	24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+1 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+2 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+3	X5.1: X5.2: X5.3: X6.0: X6.1: X6.2: X6.3: X7.0: X7.1: X7.2: X7.3: X8.0: X8.1:	24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+5 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+6 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+7	X1.1: X1.2: X1.3: X2.0: X2.1: X2.2: X2.3: X3.0: X3.1: X3.2: X3.3: X4.0:	24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+1 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+1 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> n.c.	X5.1: X5.2: X5.3: X6.0: X6.1: X6.2: X6.3: X7.0: X7.1: X7.2: X7.3: X8.0:	24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+3 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> Input x+3 FE 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> n.c.
CPY.AR.1.SIIR.RII.25D									
CPX-AB-1-SUB-BU-25P	13 00000000000000001 25 0000000000000014	1: 2: 3: 4: 5: 6: 7: 8: 9: 10: 11: 12: 13:	Input x Input x+1 Input x+2 Input x+3 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 0 V <sub>SEN</sub> 0 V <sub>SEN</sub> FE	14: 15: 16: 17: 18: 19: 20: 21: 22: 23: 24: 25: Socke	Input x+4 Input x+5 Input x+6 Input x+7 24 V <sub>SEN</sub> 24 V <sub>SEN</sub> 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 0 V <sub>SEN</sub> FE	1: 2: 3: 4: 5: 6: 7: 8: 9: 10: 11: 12: 13:	Input x Input x+1 Input x+1 n.c. 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 0 V <sub>SEN</sub> 7 V <sub>SEN</sub> 10 V <sub>SEN</sub> 10 V <sub>SEN</sub> 10 V <sub>SEN</sub> 11 V <sub>SEN</sub> 12 V <sub>SEN</sub> 11 V <sub>SEN</sub> 12 V <sub>SEN</sub> 13 V <sub>SEN</sub> 14 V <sub>SEN</sub> 15 V <sub>SEN</sub> 16 V <sub>SEN</sub> 17 FE	14: 15: 16: 17: 18: 19: 20: 21: 22: 23: 24: 25: Socke	Input x+2 Input x+3 Input x+3 n.c. 24 V <sub>SEN</sub> 24 V <sub>SEN</sub> 24 V <sub>SEN</sub> 0 V <sub>SEN</sub> 0 V <sub>SEN</sub> FE t: FE

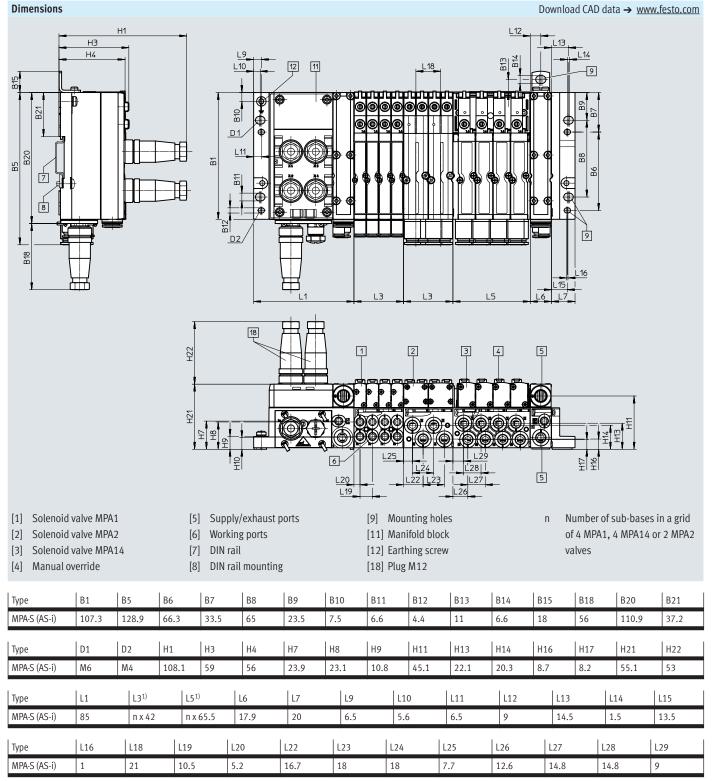

<sup>1)</sup> n = number of sub-bases (with MPA1, width 10 mm and MPA14, width 14 mm, max. 4 valve positions on sub-base; with MPA2, width 20 mm, max. 2 valve positions on sub-base)

Ordering data			1	I
	Designation		Part no.	Туре
Bus connection	AS-Interface flat cable 100 mm	Vellen	100/0	KASI-1.5-Y-100
	AS-Interface flat cable 100 mm	Yellow	18940	KASI-1.5-Y-100 KASI-1.5-Z-100
		Black	18941	KASI-1.5-2-100
	Flat cable blanking plug		196090	ASI-SD-FK-BL
	AS-Interface flat cable distributor	Rotatable cable	18786	ASI-KVT-FK
	AS-Interface flat cable distributor	Symmetrical cable	18797	ASI-KVT-FK-S
<b>6</b>	Cable cap for flat cable (pack of 50)	1	18787	ASI-KK-FK
	Cable sleeve (pack of 20)		165593	ASI-KT-FK
	Socket M12, 4-pin	For AS-Interface flat cable	18789	ASI-SD-PG-M12
	M12 socket, 5-pin	For round cable	8162291	NECB-M12G5-C2
DUO plug				
	Plug M12 for 2 connecting cables	4-pin	8162295	NECB-S-M12G4-C2-D
		5-pin	8162297	NECB-S-M12G5-C2-D
Sensor plug				
	Straight plug, M8, 3-pin	Screw-in	8162298	NECB-S-M8G3-C2
	Straight plug, M12	4-pin	8162294	NECB-S-M12G4-C2
		5-pin	8162296	NECB-S-M12G5-C2
	Sub-D plug	25-pin	527522	SD-SUB-D-ST25
	Cover cap (pack of 10)	M8 M12	177672 165592	ISK-M8 ISK-M12
		IVIIZ	100092	ISICWI12
Connecting cable	Modular system for a choice of connecting cables		0070224	NEBA
3	modulal system for a choice of conflecting capies		8078221	NEBA  → Internet: neba
	Straight plug M8, 3-pin, straight socket M8, 3-pin	0.5 m	8078282	NEBA-M8G3-U-0.5-N-M8G3
-		1.0 m	8078283	NEBA-M8G3-U-1-N-M8G3
		2.5 m	8078286	NEBA-M8G3-U-2.5-N-M8G3
		5.0 m	8078287	NEBA-M8G3-U-5-N-M8G3
	Straight plug M12, 4-pin, straight socket M12, 5-pin	0.5 m	8078221	NEBA-M12G5-U-0.5-N-M12G4

Ordering data				
	Designation		Part no.	Туре
Push-in T-connector				
	Plug M12, A-coded, 4-pin	2x socket M12, A-coded, 5-pin	8005310	NEDY-L2R1-V1-M12G5-N-M12G4
		2x socket M8, A-coded, 3-pin	8005311	NEDY-L2R1-V1-M8G3-N-M12G4
A STATE OF THE STA	Modular system for all types of sensor/actuator distributor  → Internet: nedy		-	NEDY
O STATE				
Other				
	24 V DC power supply	5 A	8149580	CACN-3A-1-5-G2
		10 A	8149581	CACN-3A-1-10-G2
	Addressing cable		18960	KASI-ADR
	AS-Interface input module for 8 inputs M8, compact		542124	ASI-8DI-M8-3POL
	AS-Interface input/output module for 4 inputs/3 outputs M12,	compact	542125	ASI-4DI3DO-M12X2-5POL-Z
THE STATE OF THE S	For foil Inscription label holder for sub-base, transparent, for paper foil label	Can be used for VMPA1 VMPA2	533362	VMPA1-ST-1-4
		Can be used for VMPA14	8085996	VMPA14-ST-1-4
	For IBS Inscription label holder for sub-base, 4-fold, for IBS 6x10	Can be used for VMPA1 VMPA2	544384	VMPA1-ST-2-4
*		Can be used for VMPA14	8085997	VMPA14-ST-2-4
	Inscription labels 6x10 mm in frames (pack of 64)		18576	IBS 6x10
	DIN rail to EN 60715		35430	NRH-35-2000
	DIN rail mounting		526032	CPX-CPA-BG-NRH
	Mounting bracket		534416	VMPA-BG-RW
User documentation				
	Manual for MPA-S pneumatics	German	534240	MPA-S-DE
		English	534241	MPA-S-EN
	+	!		

## VTSA/VTSA-F valve terminal





#### VTSA/VTSA-F valve terminals with AS-Interface - Valve configuration options

VTSA/VTSA-F valve terminals with AS-Interface can be flexibly configured with a wide range of valves. The system supports a maximum of 8 outputs (solenoid coils) and 8 inputs per valve terminal. This gives the following basic valve configuration options (see tables on following page)

## Ê

#### Note

Please follow the link below for more details on the various pneumatic functions.

- → Internet: vtsa
- → Internet: vtsa-f

#### General

- Solutions with integrated inputs
- Width 18, 26, 42 and 52 mm
- With or without 24 V DC auxiliary power supply for solenoid coils (EMERGENCY-STOP circuitry) with version 4I/40. The auxiliary power supply is always integrated in the version with 8 inputs and cannot be subsequently switched off using the DIL switch.
- Selectable bus connection technology
  - Flat cable for AS-Interface with 4I/40 version
  - M12 round plug, 4-pin, with 4I/4O and 8I/8O version
- Selectable addressing
  - Via bus connection (M12 or flat cable)

## Variants

- 1 to 8 valves, freely configurable
- Soft-start valve for slow and safe pressure build-up
  - High degree of safety
  - Safe pressurisation with sensor function
- With 4 or 8 inputs
- Connection technology M8, M12, spring-loaded terminal or Sub-D
- Separating seals for creating pressure zones
- Suitable for vacuum
- Subsequent extensions either
  - via vacant positions
- by converting the valve terminal

## Application

- Flexible and cost-effective connection of 1 or 8 valves (max. 8 solenoid coils) with input feedback.
- Decentralised machine and system structures, e.g.
  - in handling technology
  - in conveyor technology
  - in the packaging industry
  - in sorting systems
  - suitable for energy chains thanks to connection via round cables

# VTSA/VTSA-F valve terminal – Connection technology and addressing

Types of valve terminal with AS-Interface									
Туре	Valves	Solenoid coils	Inputs	Auxiliary power supply can be switched off		With (mm)			
				Yes	No	18	26	42 <sup>1)</sup>	52 <sup>1)</sup>
VTSA/VTSA-F-ASI-4E4A-Z	4	4	4	-	-	•	•	•	-
VTSA/VTSA-F-ASI-8E8A-Z	8	8	8	-	•	•	-	-	-

<sup>1)</sup> Width 42 and 52 mm not with VTSA-F – with width 52 mm, the auxiliary power supply is required.

Туре	Slave n	Slave n								
	0	1	2	3						
4I/40 VTSA/VTSA-F - 18 and 26 mm (2 valves	M	M	M	M						
per sub-base)	M	M	M	L						
	M	M	-	-						
	M	L	-	-						
	J	M	_	_						
	M	J	_	_						
	J	J	_	_						
Special case	M	M	J	L						
4I/40 VTSA – 42 and 52 mm (1 valve per	M	М	M	M						
sub-base)	M	M	M	L						
	M	M	-	_						
	M	-	-	-						
	J	M	-	-						
	J	M	M	-						
	M	J	M	-						
	J	J	-	_						

Permissible combinations in valve p	osition assignment (e	xamples)									
Туре	Slave n plus	Slave n plus slave n+1									
	0	1	2	3	4	5	6	7			
8I/80 VTSA/VTSA-F	M	М	M	M	M	M	M	М			
	M	M	M	L	M	M	M	L			
	J	J	J	J	_	-	-	-			
	J	J	J	M	_	_	_	-			
	J	J	M	M	_	-	-	_			
	J	J	M	M	M	M	_	_			

All valve slices are freely configurable, limited by the number of solenoid coils supported (4 or 8).
 A cover plate can be used instead of a valve slice as reserve position for one or two solenoid coils.

M Valve slice with single solenoid valve or alternatively a different valve slice with one output


J Valve slice with double solenoid valve or alternatively a different valve slice with two outputs

L Spare position

# VTSA/VTSA-F valve terminal – Connection technology and addressing


### Installation: Selectable connection technology for AS-Interface

Support for flat cables




- Straightforward installation with flat cable in more protected areas
- Fast installation technology with standard AS-Interface cables
- Standard installation at the AS-Interface using the yellow flat cable possible with VTSA/VTSA-F version 4I/40

#### Support for round cables



Local round cable wiring for areas with permanently higher loads:


- Consistently high humidity
- Need for flexible installation with one cable
- Use in energy chains with highly flexible cables



- [1] Pre-assembled M12 round cable, 1 m, polyurethane
- [2] Optional cable for additional slave, e.g. highly flexible cable for energy chains or PVC cable for applications requiring resistance to cleaning agents


### Addressing

AS-Interface connections



- [1] M12 plug for AS-Interface and incoming auxiliary supply
- [2] M12 socket for AS-Interface and outgoing auxiliary supply

#### Supplementary, compact I/O modules



The compact I/O modules can be used to supplement the valve terminals VTSA/VTSA-F. The following are available:

- 8 inputs M8
- 4 inputs/3 outputs M12

## Key features – Display and operation

#### Display and operation

Each solenoid coil is assigned to an LED which indicates its switching status

- Indicator 12 shows the switching status of the pilot control for output 2
- Indicator 14 shows the switching status of the pilot control for output 4

#### Manual override


The manual override enables the valve to be switched when not electrically actuated or energised.

The valve is switched by pushing the manual override. The set switching status can also be locked by turning the manual override.

#### Alternatives:

- A cover cap (accessory code N) can be fitted over the manual override to prevent it from being rotated. The valve can then only be actuated by pressing it.
- A cover cap (code V) can be fitted over the manual override to prevent it from being accidentally actuated.

#### Pneumatic connection and control elements




- 1] Pressure gauge (optional)
- [2] Adjusting knob for optional pressure regulator plate
- [3] Manual override (for each pilot solenoid coil, non-detenting or non-detenting)
- [4] Cover cap for manual override, non-detenting
- [5] Cover cap for manual override, concealed
- [6] Heavy-duty cover cap for manual override, non-detenting heavy duty, detenting via accessory
- [7] Inscription label holder for valve
- [8] Adjusting screw of optional throttle plate
- [9] Exhaust ports "Valves" (3/5)

- [10] Pilot ports 12 and 14 for supplying the external pilot air
- [11] Inscription label holder for sub-base
- [12] Supply port 1 (operating pressure)
- [13] Working ports 2 and 4, per valve position

### · 🖟 - Note

A manually operated valve (manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the mechanical manual override.

## Electrical connection and display elements



- [1] M12 socket, AS-Interface bus and auxiliary power supply (AS-i Out)
- [2] M12 plug for AS-Interface bus and auxiliary power supply (AS-i In)
- [3] Earth connection
- [4] Status LEDs for inputs
- [5] Status LEDs for AS-Interface
- [6] Diagnostic LEDs for valves

Туре			VTSA/VTSA-F-ASI-4E	4A-Z	VTSA/VTSA-F-ASI-8E8A-Z	
			Order via ident. code/valve terminal configurator			
Mounting position			Any	c/vatve terminat comigan	atol	
Digital inputs	Number of inputs		4		8	
Digital inputs	Connection technology		1.	, tension clamp terminal		
	Sensor supply via AS-Interface		Short-circuit and over	<u> </u>	, 500-0	
	Sensor connection		2-conductor and 3-c			
	Version		IEC 1131-2, type 02			
	Input circuit		PNP (positive switch			
Valves	Number of valve coils		4	5/	8	
	Valve width	[mm]	18/26/42/52 (width	n 42 and 52 mm only with	1 -	
	Power supply (auxiliary supply) 24 V DC	f1	Can be set using DII	<u>·</u>	Yes	
Max. current consumption of		[mA]	90		1 22	
AS-Interface connection	Connection technology		Plug M12x1, 4-pin;	socket M12x1, 4-pin		
	Voltage range	[V DC]	26.5 31.6, revers			
	Residual ripple	[mVss]	20			
	Galvanic of the fieldbus interface			Optocoupler		
	Current consumption, inputs	[mA]	Without auxiliary	With auxiliary power	With auxiliary power supply	
			power supply	supply		
	Basic electronic load		≤25	≤25	≤25	
	Total input current		350	350	350	
	Total current consumption		Max. 500	Max. 700	Max. 700	
Load voltage connection	Connection technology		M12 connection			
	Voltage range	[V DC]	21.6 26.4			
	Residual ripple	[Vss]	4			
LED indicators	ASI LED		Green			
	AUX PWR LED		Green			
	FAULT LED		Red			
	Inputs		Green			
	Valves		Yellow			
AS-Interface data	AS-Interface specification		AS-Interface Complete Spec 3.0			
	Addressing range, slave		131			
	Ident. code		$ID = F_H; ID1 = F_H^{1)}; II$	)2 = E <sub>H</sub>		
	IO code		7 <sub>H</sub>			
	Profile		S-7.F.E			

<sup>1)</sup> Factory setting, is set by some programming devices (Spec. 2.1) when addressing slaves to  $0_{\rm H}$ 

Operating and environ	mental conditions			
Degree of protection			IP65	
Electromagnetic compa	tibility		Tested to EN 50295	
CE marking (see declara	tion of conformity) <sup>1)</sup>		To EU EMC Directive	
UKCA marking (see decl	aration of conformity) <sup>1)</sup>		To UK EMC regulations	
			To UK RoHS regulations	
KC marking			KC EMC	
Certification			c UL us - Recognized (OL)	
			C-Tick	
			BIA	
Ambient temperature		[°C]	-5 +50	
Storage temperature		[°C]	-20 +60	
Materials	Housing		Die-cast aluminium, PA	
	Seals		NBR, PUR	
Note on materials			RoHS-compliant	
Weight	AS-Interface connection	[g]	300	
	Multi-pin node	[g]	850	

 $<sup>1) \</sup>qquad \text{More information www.festo.com/catalogue/...} \ \ \boldsymbol{\rightarrow} \ \ \text{Support/Downloads.}$ 



The valve terminal with AS-Interface connection is based on the same electrical links as the valve terminal with multi-pin plug connection.

This means a valve terminal with multi-pin plug connection can be converted using an AS-Interface module. The technical specifications of the AS-Interface system must be observed in this case.

Combinations of connection blocks and electronics modules for inputs					
Manifold blocks	Part no.	VTSA/VTSA-F-ASI-8E8A-Z VTSA/VTSA-F-ASI-4E4A-Z			
CPX-AB-4-M12x2-5POL	195704	•	•		
CPX-AB-4-M12x2-5POL-R	541254	•	•		
CPX-AB-8-KL-4POL	195708	•	•		
CPX-AB-1-Sub-BU-25POL	525676	•			
CPX-AB-8-M8-3POL	195706	•	•		


Pin assignment Connection block inputs		VTSA/VTSA-F-ASI-8E8A-Z		VTSA/VTSA-F-ASI-4E4A	-Z
CPX-AB-4-M12X2-5POL		<u>'</u>		<u>'</u>	
	3 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	X1.2: Input x+1  X1.3: 0 V <sub>SEN</sub> X1.4: Input x	X3.1: 24 V <sub>SEN</sub> X3.2: Input x+5 X3.3: 0 V <sub>SEN</sub> X3.4: Input x+4 X3.5: FE	X1.1: 24 V <sub>SEN</sub> X1.2: Input x+1 X1.3: 0 V <sub>SEN</sub> X1.4: Input x X1.5: FE	X3.1: 24 V <sub>SEN</sub> X3.2: Input x+3 X3.3: 0 V <sub>SEN</sub> X3.4: Input x+2 X3.5: FE
	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	X2.2: Input x+3 X2.3: 0 V <sub>SEN</sub> X2.4: Input x+2	X4.1: 24 V <sub>SEN</sub> X4.2: Input x+7 X4.3: 0 V <sub>SEN</sub> X4.4: Input x+6 X4.5: FE	X2.1: 24 V <sub>SEN</sub> X2.2: n.c. X2.3: 0 V <sub>SEN</sub> X2.4: Input x+1 X2.5: FE	X4.1: 24 V <sub>SEN</sub> X4.2: n.c. X4.3: 0 V <sub>SEN</sub> X4.4: Input x+3 X4.5: FE
PX-AB-8-M8-3POL					
	4 X1 1 4 X5 1 3 3 3 4 X6 1 4 X7 1 3 3 3 3 3 4 X7 1 3 3 3 3 3 4 X7 1	X1.3: 0 V <sub>SEN</sub> X1.4: Input x  X2.1: 24 V <sub>SEN</sub> X2.3: 0 V <sub>SEN</sub> X2.4: Input x+1	X5.1: 24 V <sub>SEN</sub> X5.3: 0 V <sub>SEN</sub> X5.4: Input x+4 X6.1: 24 V <sub>SEN</sub> X6.3: 0 V <sub>SEN</sub> X6.4: Input x+5	X1.1: 24 V <sub>SEN</sub> X1.3: 0 V <sub>SEN</sub> X1.4: Input x X2.1: 24 V <sub>SEN</sub> X2.3: 0 V <sub>SEN</sub> X2.4: Input x+1	X5.1: 24 V <sub>SEN</sub> X5.3: 0 V <sub>SEN</sub> X5.4: Input x+2 X6.1: 24 V <sub>SEN</sub> X6.3: 0 V <sub>SEN</sub> X6.4: Input x+3
	4 <b>X4</b> 1 4 <b>X8</b> 1	X3.3: 0 V <sub>SEN</sub> X3.4: Input x+2	X7.1: 24 V <sub>SEN</sub> X7.3: 0 V <sub>SEN</sub> X7.4: Input x+6 X8.1: 24 V <sub>SEN</sub>	X3.1: 24 V <sub>SEN</sub> X3.3: 0 V <sub>SEN</sub> X3.4: Input x+1 X4.1: 24 V <sub>SEN</sub>	X7.1: 24 V <sub>SEN</sub> X7.3: 0 V <sub>SEN</sub> X7.4: Input x+3 X8.1: 24 V <sub>SEN</sub>
		X4.3: 0 V <sub>SEN</sub>	X8.3: 0 V <sub>SEN</sub> X8.4: Input x+7	X4.3: 0 V <sub>SEN</sub> X4.4: n.c.	X8.3: 0 V <sub>SEN</sub> X8.4: n.c.

<b>Pin assignment</b> Connection block inputs		VTSA/VTSA-F-ASI-	BE8A-Z	VTSA/VTSA-F-ASI-4E4	A-Z
CPX-AB-8-KL-4POL	X1 .0 .0 .X5	X1.0: 24 V <sub>SEN</sub> X1.1: 0 V <sub>SEN</sub> X1.2: Input x X1.3: FE X2.0: 24 V <sub>SEN</sub> X2.1: 0 V <sub>SEN</sub> X2.2: Input x+ X2.3: FE X3.0: 24 V <sub>SEN</sub> X3.1: 0 V <sub>SEN</sub> X3.2: Input x+ X3.3: FE X4.0: 24 V <sub>SEN</sub> X4.1: 0 V <sub>SEN</sub> X4.2: Input x+ X4.3: FE	X6.3: FE  X7.0: 24 V <sub>SEN</sub> X7.1: 0 V <sub>SEN</sub> X7.2: Input x+6  X7.3: FE  X8.0: 24 V <sub>SEN</sub> X8.1: 0 V <sub>SEN</sub>	X1.0: 24 V <sub>SEN</sub> X1.1: 0 V <sub>SEN</sub> X1.2: Input x X1.3: FE  X2.0: 24 V <sub>SEN</sub> X2.1: 0 V <sub>SEN</sub> X2.2: Input x+1 X2.3: FE  X3.0: 24 V <sub>SEN</sub> X3.1: 0 V <sub>SEN</sub> X3.2: Input x+1 X3.3: FE  X4.0: 24 V <sub>SEN</sub> X4.1: 0 V <sub>SEN</sub> X4.1: 0 V <sub>SEN</sub> X4.2: n.c. X4.3: FE	X5.0: 24 V <sub>SEN</sub> X5.1: 0 V <sub>SEN</sub> X5.2: Input x+2 X5.3: FE  X6.0: 24 V <sub>SEN</sub> X6.1: 0 V <sub>SEN</sub> X6.2: Input x+3 X6.3: FE  X7.0: 24 V <sub>SEN</sub> X7.1: 0 V <sub>SEN</sub> X7.2: Input x+3 X7.3: FE  X8.0: 24 V <sub>SEN</sub> X8.0: 24 V <sub>SEN</sub> X8.1: 0 V <sub>SEN</sub> X8.1: 0 V <sub>SEN</sub> X8.2: n.c. X8.3: FE
CPX-AB-1-SUB-BU-25POL					
	13(00000000000) 1 25(0000000000) 14	1: Input x 2: Input x+ 3: Input x+ 4: Input x+ 5: 24 V <sub>SEN</sub> 6: 0 V <sub>SEN</sub> 7: 24 V <sub>SEN</sub> 8: 0 V <sub>SEN</sub> 9: 24 V <sub>SEN</sub> 10: 24 V <sub>SEN</sub> 11: 0 V <sub>SEN</sub> 12: 0 V <sub>SEN</sub> 13: FE	2 16: Input x+6	1: Input x 2: Input x+1 3: Input x+1 4: n.c. 5: 24 V <sub>SEN</sub> 6: 0 V <sub>SEN</sub> 7: 24 V <sub>SEN</sub> 8: 0 V <sub>SEN</sub> 9: 24 V <sub>SEN</sub> 10: 24 V <sub>SEN</sub> 11: 0 V <sub>SEN</sub> 12: 0 V <sub>SEN</sub> 13: FE	14: Input x+2 15: Input x+3 16: Input x+3 17: n.c. 18: 24 V <sub>SEN</sub> 19: 24 V <sub>SEN</sub> 20: 24 V <sub>SEN</sub> 21: 24 V <sub>SEN</sub> 22: 0 V <sub>SEN</sub> 23: 0 V <sub>SEN</sub> 24: 0 V <sub>SEN</sub> 25: FE Socket: FE

26 mm

42 mm

52 mm

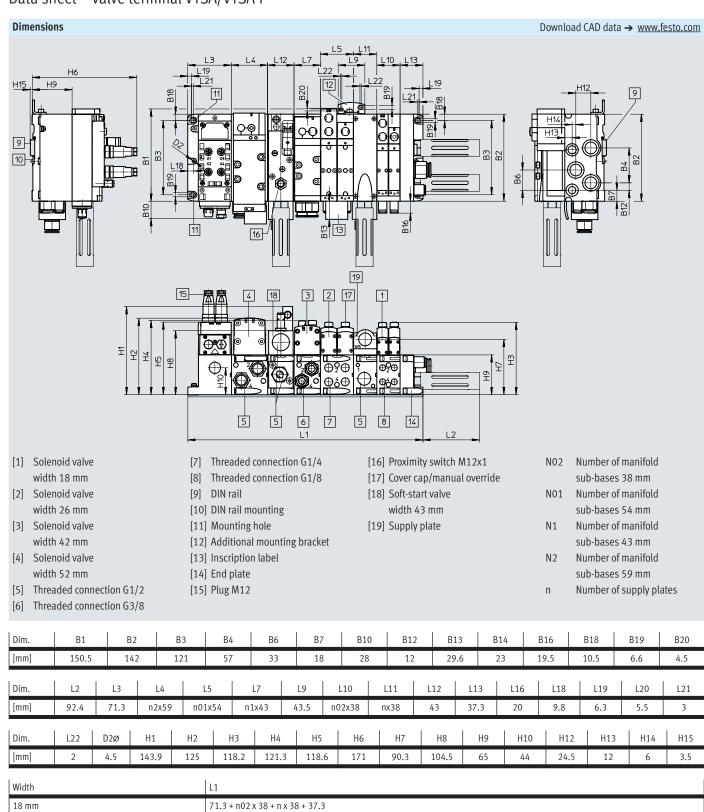

71.3 + n01 x 54 + n x 38 + 37.3 71.3 + n1 x 43 + n x 38 + 37.3

71.3 + n2 x 59 + n x 38 + 37.3

Combination of 18 mm, 26 mm, 42 mm and 52 mm 71.3 + n02 x 38 + n01 x 54 + n1 x 43 + n2 x 59 + n x 38 + 37.3

Ordering data			1	I
	Designation		Part no.	Туре
Bus connection	AS-Interface flat cable 100 mm	Vallous	19040	KASI-1.5-Y-100
	AS-Interface flat cable 100 mm	Yellow	18940	KASI-1.5-Y-100 KASI-1.5-Z-100
		Black	18941	KASI-1.5-2-100
	Flat cable blanking plug		196090	ASI-SD-FK-BL
	AS-Interface flat cable distributor	Rotatable cable	18786	ASI-KVT-FK
	AS-Interface flat cable distributor	Symmetrical cable	18797	ASI-KVT-FK-S
	Cable cap for flat cable (pack of 50)		18787	ASI-KK-FK
<b>A</b>				
	Cable sleeve (pack of 20)		165593	ASI-KT-FK
A Company	Socket M12, 4-pin	For AS-Interface flat cable	18789	ASI-SD-PG-M12
	M12 socket, 5-pin	For round cable	8162291	NECB-M12G5-C2
DUO plug				
	Plug M12 for 2 connecting cables	4-pin	8162295	NECB-S-M12G4-C2-D
		5-pin	8162297	NECB-S-M12G5-C2-D
Sensor plug				
	Straight plug, M8, 3-pin	Screw-in	8162298	NECB-S-M8G3-C2
	Straight plug, M12	4-pin	8162294	NECB-S-M12G4-C2
		5-pin	8162296	NECB-S-M12G5-C2
	Sub-D plug	25-pin	527522	SD-SUB-D-ST25
	Cover cap (pack of 10)	M8	177672	ISK-M8
<i>y</i>		M12	165592	ISK-M12
Connecting cable				
	Modular system for a choice of connecting cables		8078221	NEBA → Internet: neba
	Straight plug M8, 3-pin, straight socket M8, 3-pin	0.5 m	8078282	NEBA-M8G3-U-0.5-N-M8G3
- 🄏		1.0 m	8078283	NEBA-M8G3-U-1-N-M8G3
		2.5 m	8078286	NEBA-M8G3-U-2.5-N-M8G3
		5.0 m	8078287	NEBA-M8G3-U-5-N-M8G3
	Straight plug M12, 4-pin, straight socket M12, 5-pin	0.5 m	8078221	NEBA-M12G5-U-0.5-N-M12G4

Ordering data	I Post control		l p	l <del>-</del>
	Designation		Part no.	Туре
ush-in T-connector	Dive M40 A soded / win	20 and of M12 A and of Figure	0005340	NEDV LODA VA MAGEE N MAGE
	Plug M12, A-coded, 4-pin	2x socket M12, A-coded, 5-pin	8005310	NEDY-L2R1-V1-M12G5-N-M12G4
		2x socket M8, A-coded, 3-pin	8005311	NEDY-L2R1-V1-M8G3-N-M12G4
A STATE OF THE PARTY OF THE PAR	Modular system for all types of sensor/actuator distrib  → Internet: nedy	-	NEDY	
ther				
	24 V DC power supply	5 A	8149580	CACN-3A-1-5-G2
		10 A	8149581	CACN-3A-1-10-G2
	Addressing cable	18960	KASI-ADR	
	AS-Interface input module for 8 inputs M8	542124	ASI-8DI-M8-3POL	
	AS-Interface input/output module for 4 inputs/3 output	AS-Interface input/output module for 4 inputs/3 outputs M12		
$\stackrel{\smile}{\triangleright}$	Clip-on inscription label holder for valve cap (pack of 5		540888	ASCF-T-S6
	Inscription label holder for manifold blocks (pack of 5)		540889	ASCF-M-S6
	DIN rail to EN 60715	35430	NRH-35-2000	
	DIN rail mounting	526032	CPX-CPA-BG-NRH	
ser documentation				
	Manual – Valve terminal VTSA and VTSA-F	German	538922	VTSA/VTSA-F-DE
		English	538923	VTSA/VTSA-F-EN

# Compact I/O modules to Spec. 2.1



## Compact I/O modules to Spec. 2.1

General description

- Highly compact modules
- Encapsulated, sturdy electronics
- Inputs/outputs to IEC 1131, PNP
- Short circuit proof, overload proof
- Inputs suitable for proximity switches, inductive, capacitive or optical sensors and light barriers
- Ideal for use in decentralised handling and assembly as well as universal applications with more demanding requirements
- AS-Interface Spec. 2.11
- A/B mode
- Bus and auxiliary power supply looped through via 2x M12
- Quick installation
- Diagnostics per module

## Module with 8 inputs

- Two slaves in one housing
- 8 inputs M8, 3-pin, 200 mA per input
- Peripherals fault per slave, two fault LEDs
- Status indication per input
- Supply exclusively from "yellow"
   AS-Interface cable, pins for auxiliary supply are looped through only
- This makes it possible to cascade the input/output modules

### Module with 4 inputs/3 outputs

- Individual slave
- 4 inputs M12, 5-pin, double assignment, 200 mA per input
- 3 outputs M12, 5-pin, double assignment, 1 A per output
- Peripherals fault, fault LED
- Status indication for each input and output
- Supply of inputs exclusively from "yellow" AS-Interface cable
- Supply of outputs exclusively from "black" AS-Interface cable

### **Applications**



The M12 bus connection standardised in the AS-Interface specification offers a range of benefits:

- Use of standardised, pre-assembled M12 connecting cables
- One cable instead of two
- Quick M12 screw-type lock saves installation effort
- Flexible selection and optimisation of required cable qualities in areas with consistently high load, e.g. for
- Energy chains
- Robot arms (torsion)
- Environments with high humidity
- Aggressive media


This connection technology makes the compact modules ideally suited for use both in demanding and in very compact environments.

Decentralised machine and system structures, for example


- Handling technology
- Conveyor systems
- Packaging industry
- Sorting systems
- Upstream functions via energy chains and robot arms

#### Application tips

• Supplements valve terminals to optimise the number of inputs




 Suitable for valve terminals with M12 bus connection to loop the bus through via M12



 Universal applications for all current sensors and light barriers up to 200 mA per channel



 Universal outputs of 1 A can be connected, with parallel switching in DUO plug up to 2 A (approx. 50 W)




## Tips for application and installation (inputs/outputs)

Input module 8DI-M8

Connection technologies using M8 take account of increasing miniaturisation.

Sensors with pre-assembled connecting cables M8 or with M8 plugs can be connected directly in a 1:1 connection.

This simplifies assignment and troubleshooting. Individual sensors or cables can be easily and quickly replaced in the event of faults.

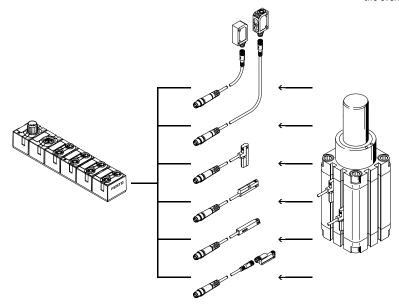

### Tips for application and installation (inputs/outputs)

Input/output module 4DI3DO-M12

Sturdy connection technology using M12 is a widely accepted standard for inputs and outputs. Direction connection for sensors with M12 connection. M12 interfaces with double assignment can be split using a DUO plug, DUO cable or T-adapter as 2xM12 or 2xM8.


The standard for valves with central plug EN 60947-5-2 and ISO 20401 defines M12 and M8 with double assignment. This allows both a double solenoid valve and a single solenoid valve to be connected directly with a 1:1 connection to a compact AS-Interface module.

This simplifies assignment and troubleshooting. Individual valves or cables can be easily and quickly replaced in the event of faults.



#### Note

In the Festo modular system for connecting cables (NEBA...), adapter cables can be configured for M8 4-pin to M12 5-pin, so that even small valve plugs as in the case of MPA-S can be connected directly via preassembled cables.

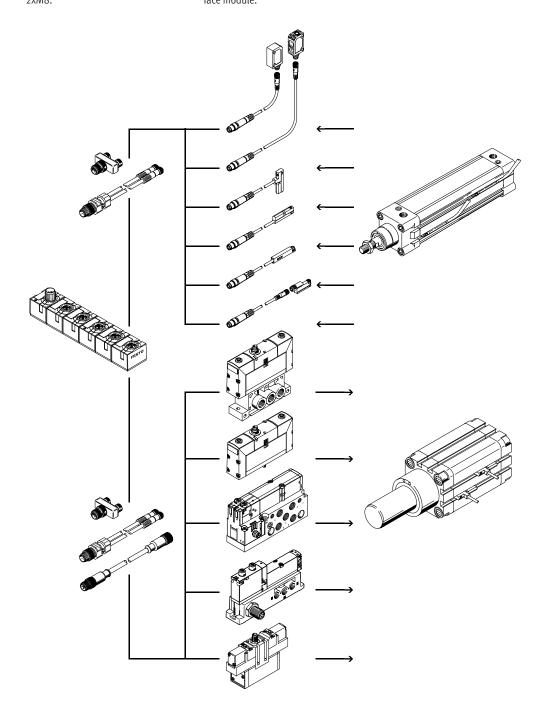


### Tips for application and installation (AS-Interface)

The compact I/O modules have 4-pin M12 connections for bus In and bus Out.

In line with the specification of the AS-Interface, both signal cables for the bus and optional auxiliary supply 24 V DC are incorporated in this one connection.

All 4 connections are looped through, allowing multiple modules and even downstream valve terminals to be cascaded.


#### Input module 8DI-M8



If an input module is at the end of a string, the flat cable can also be routed using a specially sealed fitting.

- Connection socket ASI-SD-PG-M12 mounted directly.
- Use on valve terminals with M12 is also possible, provided the auxiliary power supply is not required.

Input/output module 4DI3DO-M12



On this module, the supply of inputs is exclusively from the "yellow" AS-Interface cable, and the supply of outputs exclusively from the "black" AS-Interface cable. Power is supplied either completely via an M12 installation or via suitable converters.



#### Note

The contact load of an M12 pin is limited to 4 A. With cascaded modules, make sure that the maximum current load of the first M12 connection in a series is not exceeded, even in the worst case.


### Voltage drop on cables with M12 connection

Please note that the voltage drop on an M12 cable is higher than on the AS-Interface flat cable due to the smaller cable cross-sections.


The cable lengths must be designed according to the permissible voltage tolerances of the AS-Interface signal and the outputs for consuming devices with additional load voltage.

The graphs below give an initial impression (non-linear scaling of the cable length):

### Voltage drop U for cable cross-section 0.34 mm<sup>2</sup> with M12




### Voltage drop U for cable cross-section 0.25 $\,\mathrm{mm^2}$ with M12



### Installation

Alternative installation M12 with spurs

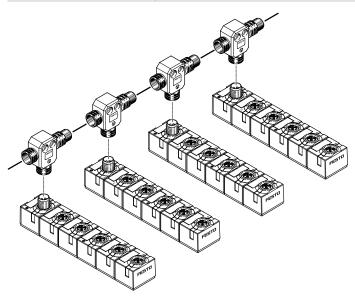

For a pure M12 installation, as an alternative to the looped-through AS-i bus, it is also possible to select an installation with spurs.

The T-adapter FB-TA-M12-5POL is suitable for this purpose (bus In: socket, bus Out: plug).

### Mounting the compact AS-Interface modules

Wall mounting

The AS-Interface modules can be mounted on flat surfaces in almost any position using the existing mounting holes and two M4 screws.




#### Note

The modules are protected against short circuit with a temperature fuse. In the event of a prolonged short circuit, the housing may reach temperatures of above 100 °C.


The modules should therefore be mounted on a surface and in an environment that is designed for this temperature and where this will not trigger a risk of fire due to ignition (ATEX category T4 – up to 135°).

#### Wall mounting – Compact I/O modules




On the compact I/O modules, the mounting holes are covered by inscription labels.

#### Mounting on profiles (ITEM, etc.)



With slot nuts for M4, otherwise see wall mounting.

#### DIN rail mounting





A mounting kit is available that can be used on a DIN rail. On the compact CP modules, the mounting holes are covered by inscription labels.

The following mounting kit is needed for DIN rail mounting:

• CP-TS-HS35

This enables mounting on DIN rails to EN 60715.

# Data sheet – Digital input module

#### **Function**

Digital input modules facilitate the connection of proximity switches or other digital 24 V DC sensors (inductive, capacitive, light barriers, etc.), PNP.

#### Application area

- Input module for 24 V DC sensor signals
- Two slaves in one housing
- M8 plug, single assignment
- Indication of the input statuses for each input signal via LED
- 24 V DC supply for all connected sensors from the ("yellow") AS-Interface cable
- Peripherals fault LED for short circuit/undervoltage for each AS-Interface slave
- Modules support A/B mode to Spec. 2.11
- Bus connection 2x M12 for bus In and bus Out
- Bus and auxiliary supply looped through for cascading with output modules



Technical data – Digital inputs			
Туре			ASI-8DI-M8-3POL
Number of inputs			8
Power supply 24 V DC			From the AS-Interface ("yellow" cable)
Intrinsic current consump	tion of electronics	[mA]	Typically 35 (inputs not connected)
Input current at 24 V DC (f	rom sensor)	[mA]	Typically 6
Fuse protection for sensor	rs and electronics modules		Internal thermal short circuit protection
Max. current consumption	n per sensor	[A]	0.24
Max. current consumption	of the sensor supply, total current per slave	[A]	0.24
Nominal operating voltage	e for sensors	[V]	24
Operating voltage range for	or sensors	[V DC]	18 30
Reverse polarity protection	n		For logic and sensor supply and AS-Interface
Galvanic isolation	Between the channels		None
	to the AS-Interface system	,	None
Logic level	Signal O	[V]	≤5
	Signal 1	[V]	≥-11
Input delay		[ms]	Typically 3
Switching logic			PNP
Input characteristic			To IEC 1131-2

# Data sheet – Digital input module

General technical data			
Туре			ASI-8DI-M8-3POL
General	Protection rating to EN 60529		IP65/IP67 (when fully plugged-in or fitted with protective cap)
	Material		PBT
	Dimensions (LxWxD)	[mm]	151 x 30 x 30
	Weight	[g]	165
LED indicators	Inputs		8 green
	AS-Interface LED		Power/green
	FAULT LED (fault 1, fault 2)		Fault LED/red per slave
AS-Interface connection/load volt-	Connection to the AS-Interface		Via M12 connecting cables, 4-core
age connection	Watchdog function		Active after 50 ms
	Peripherals fault/diagnostics		Short circuit/overload (thermally protected per channel) to specification c.S.2.1,
			two red fault LEDs
			Automatic voltage return
	AS-Interface bus voltage	[V]	26.5 31.6
	Total current consumption of AS-Interface	[mA]	Max. 350
	Current-carrying capacity of M12 pins (AS-i, AUX)	[A]	Max. 4
	AS-Interface IO code		0 <sub>h</sub>
	AS-Interface ID code 1		A <sub>h</sub>
	AS-Interface ID code 2		E <sub>h</sub>
	AS-Interface profile		S-0.A.E
	AS-Interface address (factory setting)		#1A, #2A
	AS-Interface specification		2.11 (compatible with 3.0)

Operating and environmental conditions	
Туре	ASI-8DI-M8-3POL
Protection rating to EN 60529	IP65/IP67 (when fully plugged-in or fitted with protective cap)
Ambient temperature [°C]	-5 +50
Storage temperature [°C]	-20 +70
Corrosion resistance class CRC <sup>1)</sup>	1
CE marking (see declaration of conformity) <sup>3)</sup>	To EU EMC Directive <sup>2</sup> )
	To EU RoHS Directive
	To EU Explosion Protection Directive (ATEX)
UKCA marking (see declaration of conformity) <sup>3)</sup>	To UK EMC regulations
	To UK RoHS regulations
	To UK explosion regulations
KC marking	KCEMC
Certification	c UL us - Listed (OL)
LABS (PWIS) conformity	VDMA24364-B2-L

<sup>1)</sup> More information www.festo.com/x/topic/crc

More information www.festo.com/catalogue/... → Support/Downloads.

ATEX certifications				
ATEX category for gas	II 3G			
Type of ignition protection for gas	Ex ec IIC T4 Gc X			
ATEX category for dust	II 3D			
Type of (ignition) protection for dust	Ex tc IIICT115°C IP67 Dc X			
ATEX ambient temperature [°C]	-5 ≤ Ta ≤ +50			
Explosion protection certification outside the EU	EPL Dc (GB)			
	EPL Gc (GB)			



64

When operating device combinations in potentially explosive areas, the lowest common zone, temperature class and ambient temperature of the individual devices determine the possible use of the entire module.


<sup>2)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

# Data sheet – Digital input module

## Connection and display components

ASI-8DI-M8-3POL



- [1] AS-interface connection, incoming
- [2] Status LED (green)
- [3] Red LED for indicating short circuit/overload
- [4] Green LED for status indication (one LED per input)
- [5] Sensor connections
- [6] AS-interface connection, outgoing

Pin	Signal	Designation	Pin	Signal
1	24 V DC	Operating voltage 24 V DC	1	24 V
3	0 V	Operating voltage 0 V	3	0 V
3 4 4 1 1 3 3 4 4 1 1 3 4 3 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	lx*	Sensor signal	4	x+1*

<sup>\*</sup> Ix = Input x

# Data sheet – Digital input/output module

#### **Function**

Combined digital input and output modules permit the connection of proximity switches or other 24 V DC sensors (inductive, capacitive, etc.) as well as up to 3 consuming devices 24 V DC/1 A. The electrical outputs activate actuators such as individual valves, lamps, signal equipment and many more.

Optimum actuation for valves with M12 central plug.

Plugs with double assignment are separated using a T-adapter, DUO plug or DUO cable.

#### Application area

- Input/output module for 24 V DC sensor signals and actuators, PNP
- Single slave
- M12 plug, 5-pin, double assignment
- Peripherals fault LED for short circuit/undervoltage of sensors or actuators
- Modules support A/B mode to Spec. 2.11
- Bus connection 2x M12 for bus In and bus Out
- Bus and auxiliary supply looped through for cascading with further output modules
- Indication of the input statuses for each input signal via LED
- 24 V DC supply for sensors from the ("yellow") AS-Interface cable
- Indication of the output statuses for each output signal via LED
- 24 V DC supply for actuators from the ("black") AS-Interface cable



Technical data – Digital i	nputs		
Туре	•		ASI-4DI3DO-M12x2-5POL-Z
Number of inputs			4
Power supply 24 V DC			From the AS-Interface ("yellow" cable)
Intrinsic current consump	tion of electronics	[mA]	Typically 35 (inputs not connected)
Input current at 24 V DC (	from sensor)	[mA]	Typically 6
Fuse protection for senso	rs		Internal thermal short circuit protection
Max. current consumption	n per sensor	[A]	0.24
Max. current consumption	n of the sensor supply, total current per slave	[A]	0.25
Nominal operating voltag	e for sensors	[V]	24
Operating voltage range f	or sensors	[V DC]	1830
Reverse polarity protection	n		For logic and sensor supply and AS-Interface
Galvanic isolation	Between the channels		None
	to the AS-Interface system		Yes
Logic level	Signal 0	[V]	≤5
	Signal 1	[V]	≥-11
Input delay		[ms]	Typically 3
Switching logic			PNP
Input characteristic			To IEC 1131-2

# Data sheet – Digital input/output module

Technical data – Digital outputs			
Туре			ASI-4DI3DO-M12x2-5POL-Z
Number of outputs			3
Assignment of outputs			Socket 3 with double assignment, socket 4 with single assignment
Design of actuator connection			4x M12, 5-pin
Power supply 24 V DC			From the auxiliary power supply, "black" AS-interface cable
Max. output current per channel		[A]	1.0, 2 outputs can be switched together
Operating voltage		[V DC]	24 ±25%
Fuse protection for power output			Internal thermal short circuit protection for each output
Reverse polarity protection			For actuator supply 24 V/0 V
Switching logic			PNP
Output characteristic			To ICE 1131-2
Galvanic isolation	Between the channels		None
	to the AS-Interface system		Yes
Voltage drop across the output		[V]	.1.5
Limitation of the inductive switch-	off voltage	[V]	-1045

General technical data					
Туре			ASI-4DI3DO-M12x2-5POL-Z		
LED indicators	Inputs		4 green		
	Outputs		3 yellow		
	AS-Interface LED		Power/green		
	AUX PWR LED		Auxiliary power supply/green		
	FAULT LED		Fault LED/red		
General	Protection rating to EN 60529		IP65/IP67 (when fully plugged-in or fitted with protective cap)		
	Material		PBT		
	Dimensions (LxWxD)	[mm]	151 x 30 x 30		
	Weight	[g]	165		
AS-Interface connection/load volt-	Connection to the AS-Interface		Via M12 connecting cables, 4-core		
age connection	Watchdog function		Active after 50 ms		
	Peripherals fault/diagnostics		Short circuit/overload (temperature fuse per channel) to specification C.S.2.1,		
			two red fault LEDs		
			Automatic voltage return		
	AS-Interface bus voltage	[V]	26.5 31.6		
	Total current consumption of AS-Interface	[mA]	Max. 250		
	Current-carrying capacity of M12 pins	[A]	Max. 4		
	(AS-Interface, AUX)				
	AS-Interface IO code		7 <sub>h</sub>		
	AS-Interface ID code 1		A <sub>h</sub>		
	AS-Interface ID code 2		2 <sub>h</sub>		
	AS-Interface profile		S-7.A.2		
	AS-Interface address (factory setting)		#0A		
	AS-Interface specification		2.11 (compatible with 3.0)		

# Data sheet - Digital input/output module

Operating and environmental conditions				
Туре		ASI-4DI3DO-M12x2-5POL-Z		
Protection rating to EN 60529		IP65/IP67 (when fully plugged-in or fitted with protective cap)		
Ambient temperature	[°C]	-5 +50		
Storage temperature	[°C]	-20 +70		
Corrosion resistance class CRC <sup>1)</sup>		1		
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2</sup> )		
		To EU RoHS Directive		
		To EU Explosion Protection Directive (ATEX)		
UKCA marking (see declaration of conformity) <sup>3)</sup>		To UK EMC regulations		
		To UK RoHS regulations		
		To UK explosion regulations		
KC marking		KC EMC		
Certification		c UL us - Listed (OL)		
LABS (PWIS) conformity		VDMA24364-B2-L		

- 1) More information www.festo.com/x/topic/crc
- 2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.

  If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
- More information www.festo.com/catalogue/... → Support/Downloads.


ATEX certifications	
ATEX category for gas	II 3G
Type of ignition protection for gas	Ex ec IIC T4 Gc X
ATEX category for dust	II 3D
Type of (ignition) protection for dust	Ex tc IIICT115°C IP67 Dc X
ATEX ambient temperature [°C]	-5 ≤ Ta ≤ +50
Explosion protection certification outside the EU	EPL Dc (GB)
	EPL Gc (GB)



When operating device combinations in potentially explosive areas, the lowest common zone, temperature class and ambient temperature of the individual devices determine the possible use of the entire module.

### Connection and display components

ASI-4DI3DO-M12x2-5POL-Z



- [1] AS-interface connection, incoming
- [2] Status LED (green)
- [3] Green LED for indicating load
- [4] Green LED for status indication (one LED per input)
- [5] Yellow LED for status indication (one LED per input)
- [6] Red LED for indicating short circuit/overload
- [7] AS-interface connection, outgoing
- [8] Sensor connections
- [9] Outputs


# Data sheet – Digital input/output module


Terminal assignment	Pin	Signal	Designation
	1	24 V DC	Operating voltage 24 V DC
SST (SAN	2	lx*+1	Sensor signal
In In	3	0 V	Operating voltage 0 V
Aux	4	lx*	Sensor signal
	5 - <b>5</b>	Ground	Earth terminal

<sup>\*</sup> Ix = Input x

minal assignment	Output	Output 1 and 2		Output	Output 3		
	Pin	Signal	Designation	Pin	Signal	Designation	
	1	n.c.	Not connected	1	n.c.	Not connected	
Fault	2	0x*+1	Output	2	n.c.	Not connected	
ln ln	3	0 V	Operating voltage 0 V	3	0 V	Operating voltage 0 V	
	4	Ox*	Output	4	0x*+2	Output	
	2 5 )-5 3	Ground	Earth terminal	5	Ground	Earth terminal	

<sup>\*</sup> Ox = Output

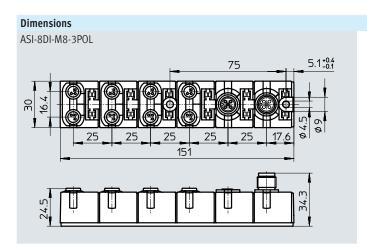



# Data sheet – Compact I/O modules

Ordering data				
_	Designation		Part no.	Туре
Bus connection				
///	AS-Interface flat cable, yellow	100 m	18940	KASI-1.5-Y-100
	AS-Interface flat cable, black	100 m	18941	KASI-1.5-Z-100
	Cable cap for flat cable (pack of 50)	I	18787	ASI-KK-FK
	Cable sleeve (pack of 20)		165593	ASI-KT-FK
	Socket M12, 4-pin	For AS-Interface flat cable	18789	ASI-SD-PG-M12
Push-in T-connector				
	T-adapter for DH-485, M12 5-pin	T-adapter for DH-485, M12 5-pin		FB-TA-M12-5POL
	Plug M12, A-coded, 4-pin	2x socket M12, A-coded, 5-pin	8005310	NEDY-L2R1-V1-M12G5-N-M12G4
		2x socket M8, A-coded, 3-pin	8005311	NEDY-L2R1-V1-M8G3-N-M12G4
W. S. W.	Modular system for all types of sensor/actuator distributo  → Internet: nedy	r	-	NEDY
Connecting cable				
	Modular system for a choice of connecting cables		8078221	NEBA
				→ Internet: neba
	Straight plug M8, 3-pin, straight socket M8, 3-pin	0.5 m	8078282	NEBA-M8G3-U-0.5-N-M8G3
		1.0 m	8078283	NEBA-M8G3-U-1-N-M8G3
		2.5 m	8078286	NEBA-M8G3-U-2.5-N-M8G3
		5.0 m	8078287	NEBA-M8G3-U-5-N-M8G3
	Straight plug M12, 4-pin, straight socket M12, 5-pin	0.5 m	8078221	NEBA-M12G5-U-0.5-N-M12G4
DUO plug				
	Plug M12 for 2 connecting cables	4-pin	8162295	NECB-S-M12G4-C2-D
		5-pin	8162297	NECB-S-M12G5-C2-D
Sensor plug				
	Straight plug, M8, 3-pin	Screw-in	8162298	NECB-S-M8G3-C2
	Straight plug, M12	4-pin	8162294	NECB-S-M12G4-C2
		5-pin	8162296	NECB-S-M12G5-C2
	Cover cap (pack of 10)	M8	177672	ISK-M8
		M12	165592	ISK-M12

# Data sheet – Compact I/O modules

Ordering data				
	Designation		Part no.	Туре
Other		Ι.		I
	24 V DC power supply	5 A 10 A	8149580 8149581	CACN-3A-1-5-G2 CACN-3A-1-10-G2
35 (C)	Addressing cable		18960	KASI-ADR
Input/output modules				
	AS-Interface input module for 8 inputs M8, compact		542124	ASI-8DI-M8-3POL
	AS-Interface input/output module for 4 inputs/3 outputs M12, compact		542125	ASI-4DI3DO-M12X2-5POL-Z
Mounting				
	DIN rail to EN 60715			NRH-35-2000
	Mounting for DIN rail		170169	CP-TS-HS35
Inscription labels				
	Inscription labels 8x20 mm, in frame (pack of 20)		539388	IBS-8x20

#### Overview of cables


Addressing cable - KASI-ADR



With the addressing cable ASI-ADR, available as accessory, any number of slaves can be addressed, either directly via the flat cable connection (FK) or the M12 connection (M12):

- Individual valve interface (FK)
- Compact I/O modules (M12)
- Valve terminals CPV (FK)
- SPC11 Soft Stop (FK)

Flat cable - KASI-1.5-...-100




The flat cable is designed with two wires. The coding strip prevents reverse polarity.

Stations on the AS-Interface network are connected to the flat cable by contact pins using insulation displacement technology — without stripping the cable and wire casing.

The yellow cable is preferably used for the AS-Interface network and the black for the auxiliary supply.

Connecting cable NEBA-M12...-M12...



The round cables are designed with 4 cores and protected against reverse polarity. Standardised connection technology replaces the yellow/black AS-Interface with a common cable.

- Fixed lengths: 0.2 m, 1 m, 2.5 m and 5 m ex-stock
- Modular system NEBA for a choice of connecting cables

- Note

Define your own connecting cable. Select M8 (3- or 4-pin) or M12 (4- or 5-pin) at each end as required and specify the desired cable length and quality – Festo delivers to your specifications.

→ www.festo.com

Flat cable sleeve – ASI-KT-FK



For insulating and sealing the AS-Interface cable at the end of the string

- Degree of protection IP65
- Shrinks with the application of heat (hot-air gun or similar)

Cable cap - ASI-KK-FK




For insulating and sealing the AS-Interface cable at the end of the string

Degree of protection IP65

#### **Dimensions**


Addressing cable – KASI-ADR

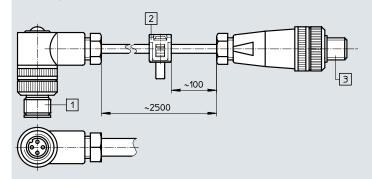


## Download CAD data → www.festo.com


- [1] Round plug for connection to addressing device
- [2] Flat cable socket for connecting stations on the AS-Interface network with plug-in connection
- [3] Flat cable socket with M12 plug connection for stations on the AS-Interface network with M12 interface

Flat cable – KASI-1.5-...-100



- [1] Blue (-)
- [2] Brown (+)

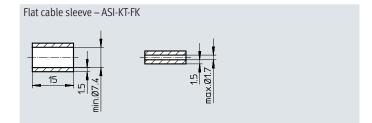




#### Overview of connection components

Flat cable socket

Flat cable socket for connecting stations on the AS-Interface network to the flat cable.



The connection is detachable. The cable socket is protected against reverse polarity.

#### ASI-SD-FK

Flat cable socket for Valve terminals CPV



#### ASI-SD-FK180

Overhead through-feed of flat cable version FK180.



#### ASI-SD-FK-BL


Blanking plug for sealing unused connections for flat cable sockets.



#### ASI-SD-PG-M12


Flat cable socket with M12 connection and special seal for the flat cable in a PG connector. For compact input module (ASI-8DI-M8-3POL).

### Flat cable distributor



#### ASI-KVT-FK

Rotatable flat cable distributor, for branching the flat cable to stations on the AS-Interface network at any desired point on the flat cable.




#### ASI-KVT-FK-S

Symmetrical flat cable distributor: this distributor can be used to rotate the profile lug by 180° when changing from one cable to another. This prevents laying the cables in a loop. Three cable caps are included in the scope of delivery to cap the cable ends.

#### Overview of distributors

Push-in T-connector NEDY



The sensor/actuator distributors NEDY each combine two sensor signals on a 4-pin plug.

These are routed on a 4- or 5-pin input socket of a valve terminal or the compact I/O module.

Any version and cable length can be

configured:

→ Internet: nedy


DUO plug - NECB-S-M12G5-C2-D



Each DUO plug conveniently combines two sensor or actuator signals/cables in one housing.

#### Overview of other connecting cables

Extension cable - NEBA



The connecting cables can be used for length compensation between a distributor and the inputs of a valve terminal or a compact I/O module.


They can also be used as AS-Interface bus cables for M12 connection technology.

Any version and cable length can be configured:

→ Internet: neba

#### Overview of other accessories

Inscription labels IBS-...



Convenient labelling system for

- Flat cable sockets
- Flat cable distributor
- Individual valve interfaces
- Compact I/O modules
- Valve terminals CPV

DIN rail NRH-35-2000



- For compact I/O modules
- Valve terminals CPV
- For individual valve interfaces
- AS-Interface power supply units

Ordering data	I postanatar		l post or	I+
	Designation		Part no.	Туре
Bus connection	AC Interface flat cable valleys	100 m	19040	VASI 1 F V 100
	AS-Interface flat cable, yellow	100 m	18940	KASI-1.5-Y-100
	AS-Interface flat cable, black	100 m	18941	KASI-1.5-Z-100
	Flat cable socket	·	18785	ASI-SD-FK
	Flat cable socket	Rotated 180°	196089	ASI-SD-FK180
	Flat cable blanking plug		196090	ASI-SD-FK-BL
	AS-Interface flat cable distributor	Rotatable cable	18786	ASI-KVT-FK
	AS-Interface flat cable distributor	Symmetrical cable	18797	ASI-KVT-FK-S
<b>6</b>	Cable cap for flat cable (pack of 50)	l	18787	ASI-KK-FK
	Cable sleeve (pack of 20)		165593	ASI-KT-FK
	Socket M12, 4-pin	For AS-Interface flat cable	18789	ASI-SD-PG-M12
	M12 socket, 5-pin	For round cable	8162291	NECB-M12G5-C2
Sensor plug		1		
Sensor prug	Straight plug, M8, 3-pin	Screw-in	8162298	NECB-S-M8G3-C2
<u>~</u>	Straight plug, M12	4-pin	8162294	NECB-S-M12G4-C2
	Straight plug, m12	5-pin	8162296	NECB-S-M12G5-C2
	Angled sensor plug	M12, 4-pin	8162292	NECB-M12W4-C2
	Sub-D plug	25-pin	527522	SD-SUB-D-ST25
	Cover cap (pack of 10)	M12	165592	ISK-M12
		M8	177672	ISK-M8
DUO plug		·		
DOO HINK	Plug M12 for 2 connecting cables	4-pin	8162295	NECB-S-M12G4-C2-D
	Trus m12 for 2 conficeling capies	5-pin	8162297	NECB-S-M12G5-C2-D
		S P	01022)/	

Ordering data				
	Designation	Part no.	Туре	
Push-in T-connector				
	T-adapter for DH-485, M12 5-pin		171175	FB-TA-M12-5POL
	Plug M12, A-coded, 4-pin	2x socket M12, A-coded, 5-pin	8005310	NEDY-L2R1-V1-M12G5-N-M12G4
		2x socket M8, A-coded, 3-pin	8005311	NEDY-L2R1-V1-M8G3-N-M12G4
S. B. S.	Modular system for all types of sensor/actuator distributor  → Internet: nedy		-	NEDY
Connecting cable				
	Modular system for a choice of connecting cables		8078221	NEBA → Internet: neba
	Straight plug M8, 3-pin, straight socket M8, 3-pin	0.5 m	8078282	NEBA-M8G3-U-0.5-N-M8G3
		1.0 m	8078283	NEBA-M8G3-U-1-N-M8G3
		2.5 m	8078286	NEBA-M8G3-U-2.5-N-M8G3
		5.0 m	8078287	NEBA-M8G3-U-5-N-M8G3
	Straight plug M12, 4-pin, straight socket M12, 5-pin	0.5 m	8078221	NEBA-M12G5-U-0.5-N-M12G4
	Connecting cable, straight plug, straight socket	M12, 8-pin, 2.0 m	525617	KM12-8GD8GS-2-PU
Other		,		
	24 V DC power supply	5 A	8149580	CACN-3A-1-5-G2
ar Co	Addressing cable		18960	KASI-ADR
Inscription labels				
	Inscription labels in frame	8x20 mm (pack of 20)	539388	IBS-8x20
		6x10 mm (pack of 64)	18576	IBS 6x10
- State -		9x20 mm (pack of 20)	18182	IBS 9x20
and the same of th	For foil	Can be used for VMPA1, VMPA2	533362	VMPA1-ST-1-4
	Inscription label holder for sub-base, transparent, for paper foil label	Can be used for VMPA14	8085996	VMPA14-ST-1-4
	For IBS	Can be used for VMPA1, VMPA2	544384	VMPA1-ST-2-4
	Inscription label holder for sub-base, 4-fold, for IBS 6x10	Can be used for VMPA14	8085997	VMPA14-ST-2-4
Mounting material				
	Mounting for DIN rail		170169	CP-TS-HS35
	Mounting for DIN rail		526032	CPX-CPA-BG-NRH
	DIN rail to EN 60715		35430	NRH-35-2000
000	Mounting bracket		534416	VMPA-BG-RW