

■ Electrically or pneumatically actuated valves

■ With internal or external pilot air

■ Pneumatic or mechanical reset

Specified types in accordance with ATEX directive for potentially explosive atmospheres

→ [www.festo.com/en/ex](http://www.festo.com/en/ex)



# Solenoid valves, ISO 5599-1

Product range overview

FESTO

Standard directional control valves  
ISO 5599/1

1.2

Function	Version	Type	ISO size	Nominal flow rate [l/min]	Pneumatic working port on sub-base	Operating voltage	
						[V DC]	[V AC]
5/2-way valves	<b>Solenoid valve</b>						
		MN1H	1	1200	G $\frac{1}{4}$	24	110, 230
			2	2300	G $\frac{3}{8}$		
			3	4500	G $\frac{1}{2}$		
		MFH	1	1200	G $\frac{1}{4}$	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			2	2300	G $\frac{3}{8}$		
			3	4500	G $\frac{1}{2}$		
		MDH	4	6000	G $\frac{3}{4}$	24	42, 110, 230
	<b>Solenoid valve with central plug M12x1</b>						
		MEBH...-ZSR	1	1200	G $\frac{1}{4}$	24	-
			2	2300	G $\frac{3}{8}$		
			3	4500	G $\frac{1}{2}$		
	<b>Double solenoid valve</b>						
		JMN1H	1	1200	G $\frac{1}{4}$	24	110, 230
			2	2300	G $\frac{3}{8}$		
			3	4500	G $\frac{1}{2}$		
	<b>Double solenoid valve with dominant signal</b>						
		JMN1DH	1	1200	G $\frac{1}{4}$	24	110, 230
			2	2300	G $\frac{3}{8}$		
			3	4500	G $\frac{1}{2}$		
	<b>Double solenoid valve</b>						
		JMFH	1	1200	G $\frac{1}{4}$	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			2	2300	G $\frac{3}{8}$		
			3	4500	G $\frac{1}{2}$		
	<b>Double solenoid valve with dominant signal</b>						
		JMFDH	1	1200	G $\frac{1}{4}$	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			2	2300	G $\frac{3}{8}$		
3			4500	G $\frac{1}{2}$			
<b>Double solenoid valve</b>							
	JMDH	4	6000	G $\frac{3}{4}$	24	42, 110, 230	
<b>Double solenoid valve with central plug M12x1</b>							
	JMEBH	1	1200	G $\frac{1}{4}$	24 V DC	-	
		2	2300	G $\frac{3}{8}$			
		3	4500	G $\frac{1}{2}$			
<b>Double solenoid valve with central plug M12x1, with dominant signal</b>							
	JMBDH	1	1200	G $\frac{1}{4}$	24 V DC	-	
		2	2300	G $\frac{3}{8}$			
		3	4500	G $\frac{1}{2}$			

# Solenoid valves, ISO 5599-1

Product range overview



Type	Pilot air supply		Type of reset		→ Page
	Internal	External	Pneumatic spring	Mechanical spring	
<b>Solenoid valve</b>					
MN1H	■	■	■	■	2 / 1.2-12
	■	■	■	■	
	■	■	■	■	
MFH	■	■	■	■	2 / 1.2-24
	■	■	■	■	
	■	■	■	■	
MDH	■	-	■	-	2 / 1.2-47
<b>Solenoid valve with central plug M12x1</b>					
MEBH-...-ZSR	■	-	■	■	2 / 1.2-35
	■	-	■	■	
	■	-	■	■	
<b>Double solenoid valve</b>					
JMN1H	■	■	-	-	2 / 1.2-16
	■	■	-	-	
	■	■	-	-	
<b>Double solenoid valve with dominant signal</b>					
JMN1DH	■	■	-	-	2 / 1.2-16
	■	■	-	-	
	■	■	-	-	
<b>Double solenoid valve</b>					
JMFH	■	■	-	-	2 / 1.2-28
	■	■	-	-	
	■	■	-	-	
<b>Double solenoid valve with dominant signal</b>					
JMFDH	■	-	-	-	2 / 1.2-28
	■	-	-	-	
	■	-	-	-	
<b>Double solenoid valve</b>					
JMDH	■	-	-	-	2 / 1.2-50
	■	-	-	-	
	■	-	-	-	
<b>Double solenoid valve with central plug M12x1</b>					
JMEBH	■	-	-	-	2 / 1.2-39
	■	-	-	-	
	■	-	-	-	
<b>Double solenoid valve with central plug M12x1, with dominant signal</b>					
JMEBDH	■	-	-	-	2 / 1.2-39
	■	-	-	-	
	■	-	-	-	

Standard directional control valves  
ISO 5599/1

1.2





# Solenoid valves, ISO 5599-1

Product range overview



Standard directional control valves  
ISO 5599/1

1.2

Function	Version	Type	ISO size	Nominal flow rate [l/min]	Pneumatic working port on sub-base	Operating voltage	
						[V DC]	[V AC]
5/3-way valves	<b>Solenoid valve</b>						
		MN1H-5/3...	1	1200	G $\frac{1}{4}$	24	110, 230
			2	2300	G $\frac{3}{8}$		
			3	4100	G $\frac{1}{2}$		
		MFH-5/3...	1	1200	G $\frac{1}{4}$	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			2	2300	G $\frac{3}{8}$		
			3	4100	G $\frac{1}{2}$		
		MDH-5/3...	4	6000	G $\frac{3}{4}$	24	110, 230
		<b>Solenoid valve with central plug M12x1</b>					
	MEBH-5/3-...-ZSR	1	1200	G $\frac{1}{4}$	24	-	
		2	2300	G $\frac{3}{8}$			
		3	4100	G $\frac{1}{2}$			

# Solenoid valves, ISO 5599-1

Product range overview






Type	Pilot air supply		Normal position			→ Page
	Internal	External	Closed	Exhausted	Pressurised	
<b>Solenoid valve</b>						
MN1H-5/3...	■	■	■	■	■	2 / 1.2-20
	■	■	■	■	■	
	■	■	■	■	■	
MFH-5/3...	■	■	■	■	■	2 / 1.2-31
	■	■	■	■	■	
	■	■	■	■	■	
MDH-5/3...	■	-	■	■	-	2 / 1.2-53
<b>Solenoid valve with central plug M12x1</b>						
MEBH-5/3-...-ZSR	■	-	■	■	■	2 / 1.2-43
	■	-	■	■	■	
	■	-	■	■	■	


Standard directional control valves  
ISO 5599/1

1.2

# Pneumatic valves, ISO 5599-1

Product range overview

Function	Version	Type	ISO size	Nominal flow rate [l/min]	Pneumatic working port on sub-base	Type of reset		→ Page
						Pneumatic spring	Mechanical spring	
5/2-way valves	<b>Pneumatic valve</b>							
		VL	1	1200	G1/4	■	■	2 / 1.2-60
			2	2300	G3/8	■	■	
			3	4500	G1/2	■	■	
			4	6000	G3/4	■	■	
	<b>Double pilot valve</b>							
		J	1	1200	G1/4	-	-	2 / 1.2-64
			2	2300	G3/8	-	-	
			3	4500	G1/2	-	-	
			4	6000	G3/4	-	-	
	<b>Double pilot valve with dominant signal</b>							
		JD	1	1200	G1/4	-	-	2 / 1.2-64
2			2300	G3/8	-	-		
3			4500	G1/2	-	-		

Function	Version	Type	ISO size	Nominal flow rate [l/min]	Pneumatic working port on sub-base	Normal position			→ Page
						Closed	Exhausted	Pressurised	
5/3-way valves	<b>Pneumatic valve</b>								
		VL5/3...	1	1200	G1/4	■	■	■	2 / 1.2-67
			2	2300	G3/8	■	■	■	
			3	4100	G1/2	■	■	■	
			4	4800	G3/4	■	■	■	
<b>Pneumatic valve</b>									

# Solenoid valves, ISO 5599-1

Type code

FESTO

Standard directional control valves  
ISO 5599/1

1.2

MN1H - 5/3 G - D-1 - - - - C -

Type	
MN1H	Single solenoid, for N1 solenoid coil
MFH	Single solenoid, for F solenoid coil
MDH	Single solenoid, with D solenoid coil
MEBH	Single solenoid, with EB solenoid coil
JMN1H	Double solenoid, for N1 solenoid coil
JMN1DH	Double solenoid, for N1 solenoid coil, with dominant signal
JMFH	Double solenoid, for F solenoid coil
JMFDH	Double solenoid, for F solenoid coil, with dominant signal
JMDH	Double solenoid, with D solenoid coil
JMEBH	Double solenoid, with EB solenoid coil
JMEBDH	Double solenoid, with EB solenoid coil, with dominant signal

Valve function	
5/2	5/2-way valve
5/3	5/3-way valve

Normal position	
G	Closed
E	Exhausted
B	Pressurised

Size	
D-1	ISO size 1
D-2	ISO size 2
D-3	ISO size 3
¾-D-4	ISO size 4

Electrical connection, operating voltage	
Central plug, round design, M12x1	
ZSR	24 V DC
Plug, square design to DIN EN 175301-803, type A	
24DC	24 V DC

Pilot air supply	
	Internal
S	External

Type of reset	
FR	Mechanical spring
	Pneumatic spring

Generation	
C	Series C


CT	Free of copper, PTFE and silicone
----	-----------------------------------

# Solenoid valves, ISO 5599-1

Peripherals overview




## Individual mounting

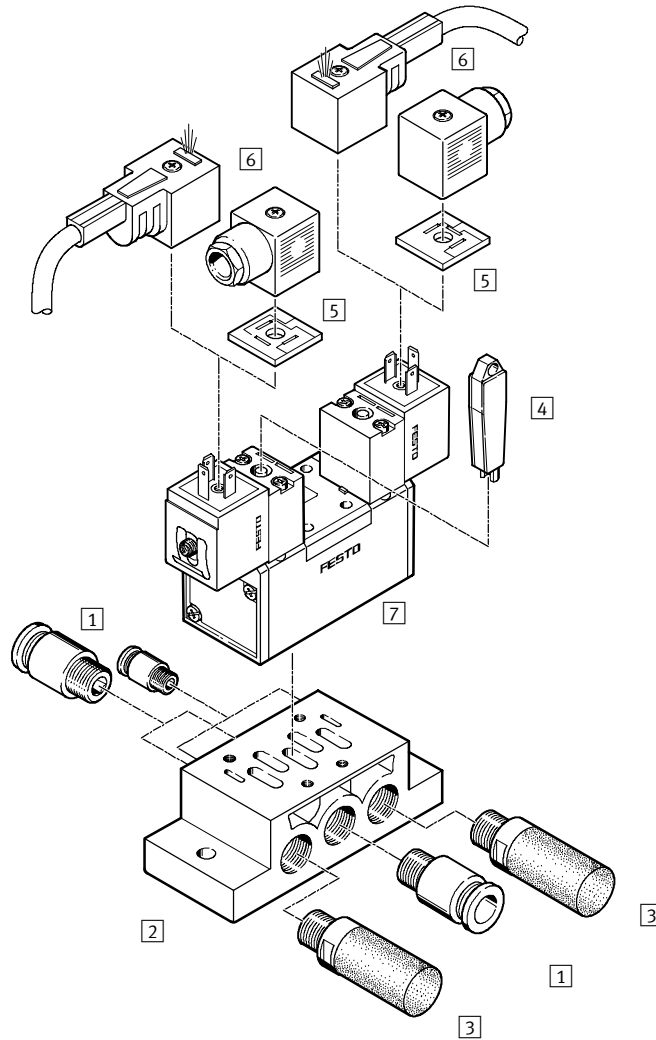


## Variants


MN1H-5/2

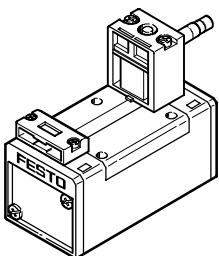


MFH-5/2

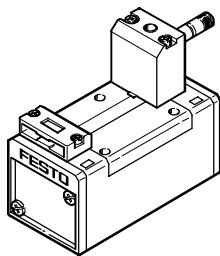


MDH-5/2

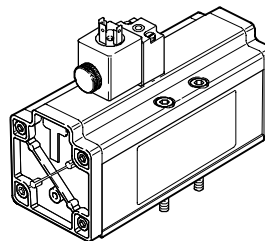


MEBH-5/2




JMN1H-5/2, MN1H-5/3




JMFH-5/2, MFH-5/3



JMDH-5/2, MDH-5/3



JMEBH-5/2, MEBH-5/3

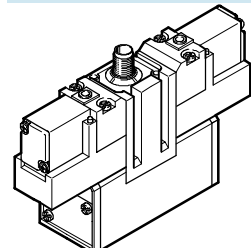




# Solenoid valves, ISO 5599-1

Peripherals overview

Accessories		
	Brief description	→ Page
1	Push-in fitting QS	Volume 3
2	Individual sub-base NAS	2 / 1.2-70
3	Silencer	Volume 3
4	Manual override tool AHB	2 / 1.2-81
5	Illuminating seal M...LD	2 / 1.2-84
6	Plug sockets with/without cables MSSD, KMF, KMC	2 / 1.2-83
7	Solenoid valve	Port pattern to ISO 5599-1, corresponding solenoid coils → 2 / 1.2-82

## Port pattern on sub-base to ISO 5599-1

Defined interfaces between valve and sub-base

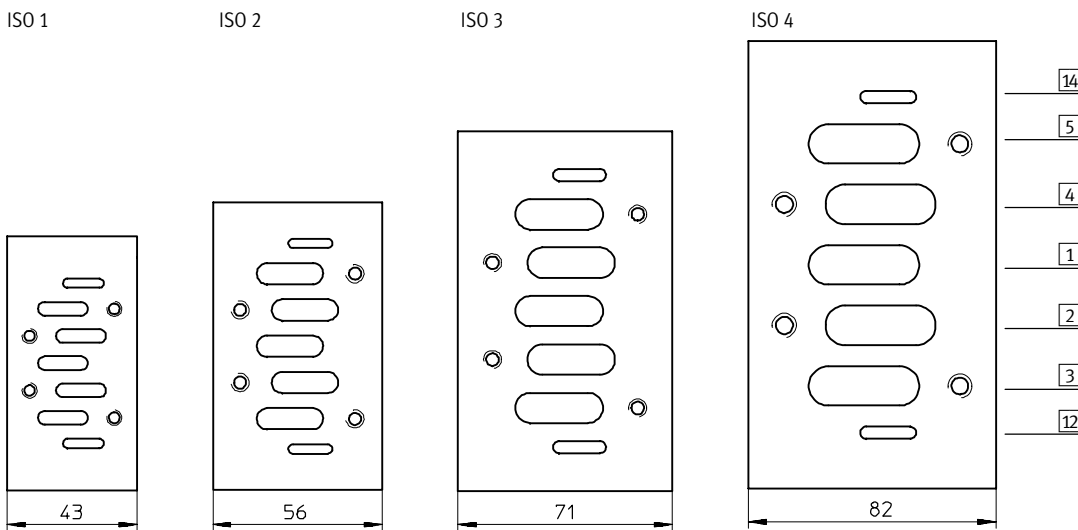


# Solenoid valves, ISO 5599-1

Peripherals overview




## Manifold mounting

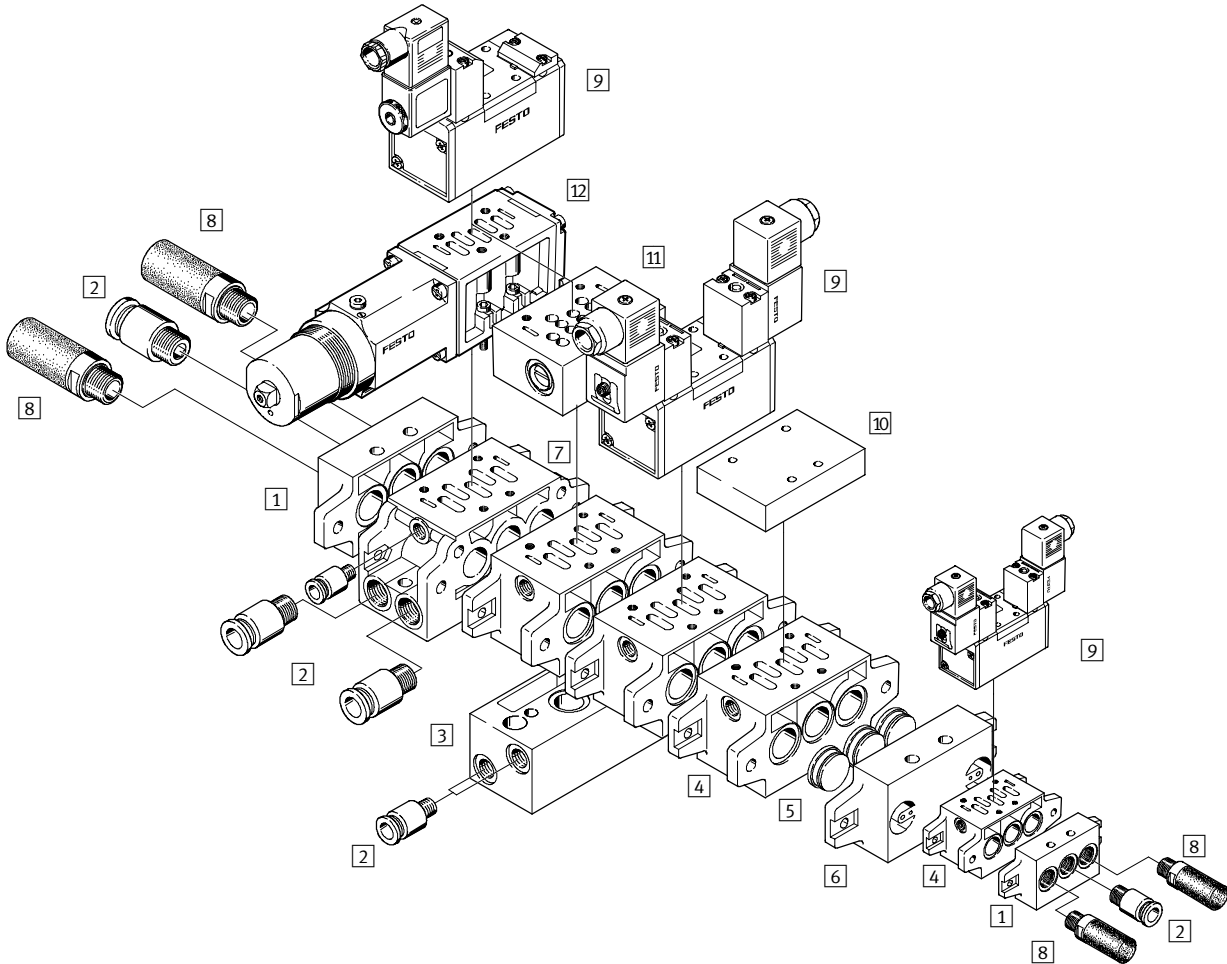


## Variants


MN1H-5/2

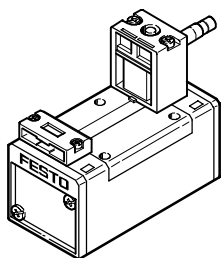


MFH-5/2

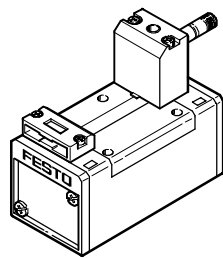


MDH-5/2

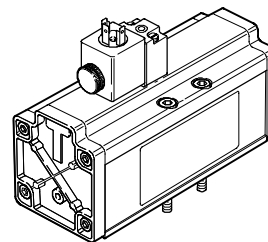


MEBH-5/2




JMN1H-5/2, MN1H-5/3




JMFH-5/2, MFH-5/3



JMDH-5/2, MDH-5/3

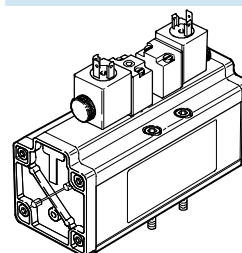

JMEBH-5/2, MEBH-5/3

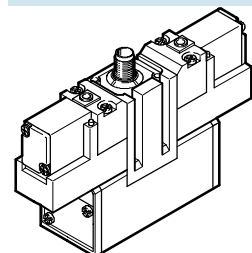


# Solenoid valves, ISO 5599-1

Peripherals overview

Accessories		
	Remarks	→ Page
1 End plate kit NEV	For sealing the manifold sub-bases	2 / 1.2-73
2 Push-in fitting QS	For connecting compressed air tubing with standard O.D.	Volume 3
3 Angle connection block NAW	For routing ports 2 and 4 to the front	2 / 1.2-72
4 Manifold sub-base NAV	With ports 2 and 4 on the bottom	2 / 1.2-72
5 Isolating disc NSC	For sealing the common lines 1, 3, 5 between end plates and manifold sub-bases or between 2 manifold sub-bases, e.g. for different working pressures	2 / 1.2-74
6 Intermediate plate NZV	For connecting manifold sub-bases of different sizes	2 / 1.2-76
7 Manifold sub-base for angle connection NAWW	With ports 2 and 4 either on the bottom or the front	2 / 1.2-73
8 Silencer	For fitting in exhaust ports	Volume 3
9 Solenoid valve	Port pattern to ISO 5599-1, corresponding solenoid coils → 2 / 1.2-82	2 / 1.2-2
10 Blanking plate NDV	For sealing unused manifold sub-bases	2 / 1.2-74
11 Throttle plate GRO	For ISO size 1, 2 and 3 with integrated exhaust air restrictors at ports 3 and 5. The throttle plate is mounted between the valve and the individual sub-base/manifold sub-base	2 / 1.2-77
12 Intermediate pressure regulator plate LR-ZP	For ISO size 1, 2 and 3 for regulating the pressure from 0 to 10 bar according to the supply pressure. The intermediate pressure regulator plate is mounted between the valve and the individual sub-base/manifold sub-base	2 / 1.2-78

## Port pattern on sub-base to ISO 5599-1


Defined interfaces between valve and sub-base

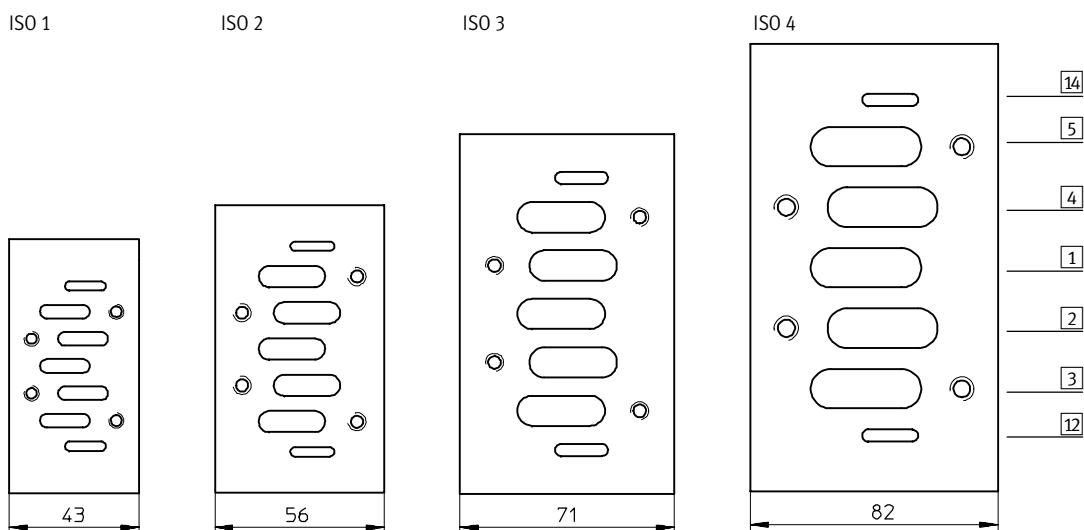


# Solenoid valves MN1H, ISO 5599-1

Technical data – 5/2-way valves



-  - Flow rate  
1200 ... 4500 l/min

-  - Voltage  
24 V DC  
110, 230 V AC



Standard directional control valves  
ISO 5599/1  
1.2

General technical data				
ISO size	1	2	3	
Valve function	5/2-way, single solenoid			
Constructional design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of reset	Mechanical or pneumatic spring			
Type of pilot control	Piloted			
Pilot air supply	Internal or external			
Direction of flow	Non-reversible			
Exhaust function	With flow control			
Manual override	Via accessory, detenting			
Type of mounting	Via through-holes			
Mounting position	Any			
Nominal size	[mm]	8	11	14.5
Standard nominal flow rate	[l/min]	1200	2300	4500
Grid dimension	[mm]	43	56	71
Pneumatic connection on sub-base		G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g]	450	710	1000
Noise level	[dB (A)]	85		

Operating and environmental conditions			Pneumatic	Mechanical
Type of reset				
Operating medium			Filtered compressed air, lubricated or unlubricated Vacuum	
Operating pressure	Internal pilot air supply	[bar]	2 ... 10	3 ... 10
	External pilot air supply	[bar]	-0.9 ... +16	-0.9 ... +16
Pilot pressure		[bar]	2 ... 10	3 ... 10
Ambient temperature		[°C]	-10 ... +50	
Temperature of medium		[°C]	-10 ... +50	

Valve response times [ms]						
ISO size	1		2		3	
	Pneumatic	Mechanical	Pneumatic	Mechanical	Pneumatic	Mechanical
On	23	17	46	24	49	33
Off	32	39	69	62	71	74


# Solenoid valves MN1H, ISO 5599-1

Technical data – 5/2-way valves

Electrical data			
N1 solenoid coil			
Electrical connection		Plug, square design to EN 175301-803, type A	
Operating voltage	D.C. voltage	[V DC]	24
	A.C. voltage	[V AC]	110/230 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	2.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 5
Protection class to EN 60 529		IP65	

## Materials

Sectional view

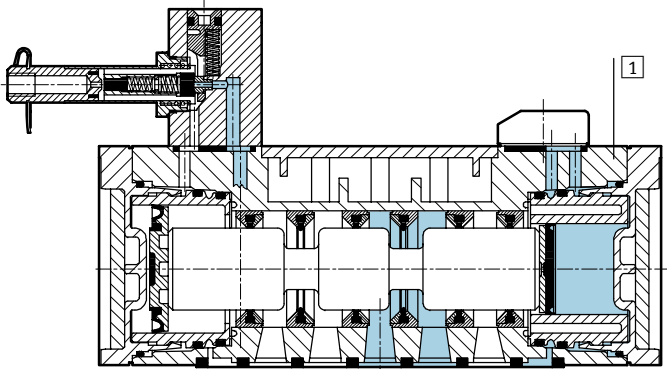

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber
	Note on material	Versions free of copper, PTFE and silicone → Ordering data


# Solenoid valves MN1H, ISO 5599-1

Technical data – 5/2-way valves



Standard directional control valves  
ISO 5599/1  
1.2

**Dimensions** Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

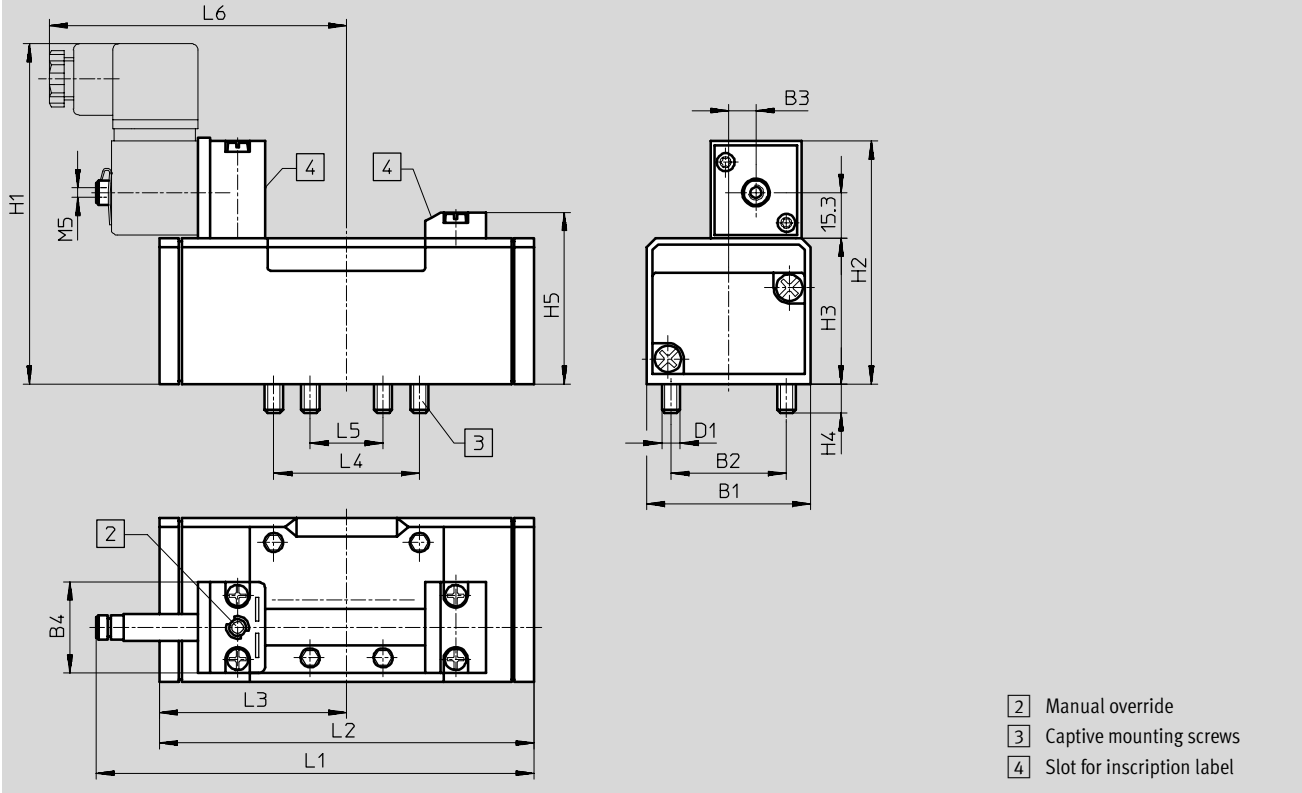

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
<b>ISO size 1</b>																
MN1H-5/2-...	42	28	6	30	M5	106	74	38	9	46.5	117.5	87.6	43.8	36	18	89
MN1H-5/2-...-FR											128	98				
<b>ISO size 2</b>																
MN1H-5/2-...	54	38	9	30	M6	116	84	48	9.5	56.5	147.6	123.4	61.7	48	24	98
MN1H-5/2-...-FR											161.5	140.7				
<b>ISO size 3</b>																
MN1H-5/2-...	65	48	12	30	M8	123	91	55	12	63.5	169	145.4	72.7	64	32	109
MN1H-5/2-...-FR											184.8	164.7				

# Solenoid valves MN1H, ISO 5599-1

Technical data – 5/2-way valves


Ordering data				
Circuit symbol	Description	ISO size	Part No.	Type
	Without N1 solenoid coil <sup>1)</sup> , internal pilot air supply, pneumatic reset	1	159 688	MN1H-5/2-D-1-C
			184 637	MN1H-5/2-D-1-C-CT <sup>2)</sup>
		2	159 700	MN1H-5/2-D-2-C
			184 640	MN1H-5/2-D-2-C-CT <sup>2)</sup>
		3	159 712	MN1H-5/2-D-3-C
			184 643	MN1H-5/2-D-3-C-CT <sup>2)</sup>
	Without N1 solenoid coil <sup>1)</sup> , external pilot air supply, pneumatic reset	1	159 686	MN1H-5/2-D-1-S-C
		2	159 698	MN1H-5/2-D-2-S-C
		3	159 710	MN1H-5/2-D-3-S-C
	Without N1 solenoid coil <sup>1)</sup> , internal pilot air supply, mechanical reset	1	159 687	MN1H-5/2-D-1-FR-C
			184 638	MN1H-5/2-D-1-FR-C-CT <sup>2)</sup>
		2	159 699	MN1H-5/2-D-2-FR-C
			184 641	MN1H-5/2-D-2-FR-C-CT <sup>2)</sup>
		3	159 711	MN1H-5/2-D-3-FR-C
184 644	MN1H-5/2-D-3-FR-C-CT <sup>2)</sup>			
	Without N1 solenoid coil <sup>1)</sup> , external pilot air supply, mechanical reset	1	159 716	MN1H-5/2-D-1-FR-S-C
		2	159 718	MN1H-5/2-D-2-FR-S-C
		3	160 896	MN1H-5/2-D-3-FR-S-C


1) N1 solenoid coils → 2 / 1.2-82  
 2) Free of copper, PTFE and silicone

# Solenoid valves JMN1H, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



-  - Flow rate  
1200 ... 4500 l/min

-  - Voltage  
24 V DC  
110, 230, 240 V AC



Standard directional control valves  
ISO 5599/1  
1.2

General technical data			
ISO size	1	2	3
Valve function	5/2-way, double solenoid		
Constructional design	Piston spool		
Sealing principle	Soft		
Actuation type	Electrical		
Type of reset	Mechanical spring		
Type of pilot control	Piloted		
Pilot air supply	Internal or external		
Direction of flow	Non-reversible		
Exhaust function	With flow control		
Manual override	Via accessory, detenting		
Type of mounting	Via through-holes		
Mounting position	Any		
Nominal size	[mm] 8	11	14.5
Standard nominal flow rate	[l/min] 1200	2300	4500
Grid dimension	[mm] 43	56	71
Pneumatic connection on sub-base	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g] 610	880	1090
Noise level	[dB (A)] 85		

Operating and environmental conditions			
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum		
Operating pressure	Internal pilot air supply	[bar] 2 ... 10	
	External pilot air supply	[bar] -0.9 ... +16	
Pilot pressure	[bar] 2 ... 10		
Ambient temperature	[°C] -10 ... +50		
Temperature of medium	[°C] -10 ... +50		

Valve response times						
ISO size	1		2		3	
		Dominant signal at 14		Dominant signal at 14		Dominant signal at 14
	18	12: 18 ms; 14: 15 ms	21	12: 24 ms; 14: 21 ms	21	12: 24 ms; 14: 21 ms



# Solenoid valves JMN1H, ISO 5599-1




Technical data – 5/2-way valves, double solenoid

Electrical data			
N1 solenoid coil			
Electrical connection	Plug, square design to EN 175301-803, type A		
Operating voltage	D.C. voltage	[V DC]	24
	A.C. voltage	[V AC]	110/230 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	2.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 5
Protection class to EN 60 529	IP65		

## Materials

Sectional view

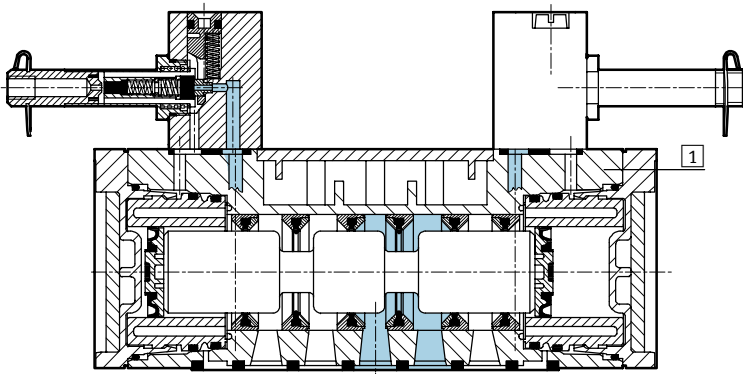

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber

Standard directional control valves  
ISO 5599/1

1.2


# Solenoid valves JMN1H, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



Standard directional control valves  
ISO 5599/1  
1.2

Dimensions Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

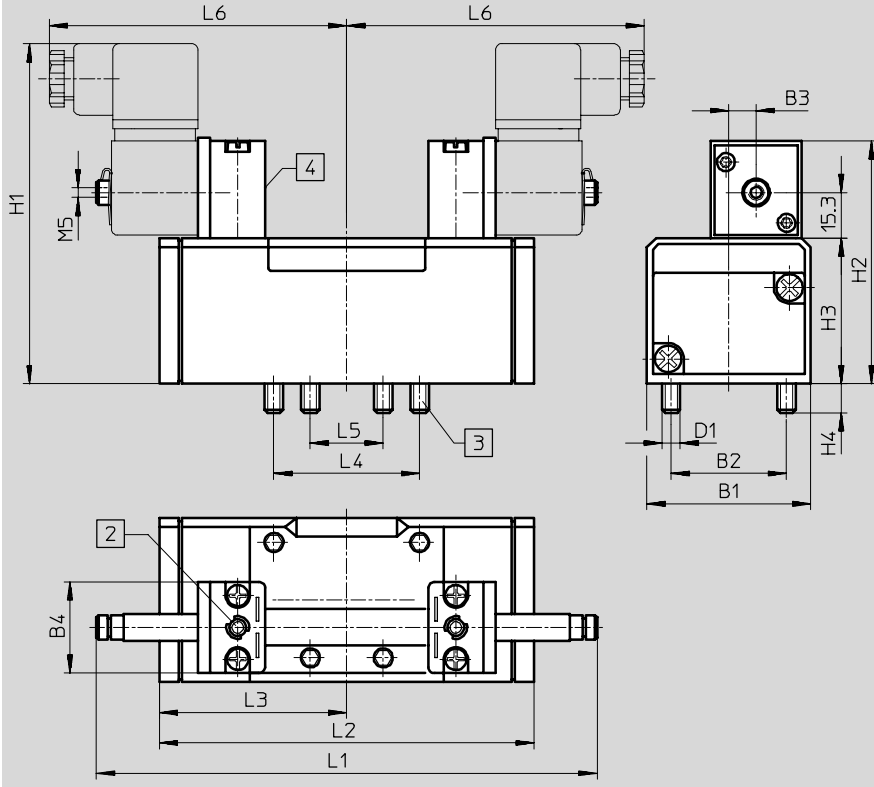

- 2 Manual override
- 3 Captive mounting screws
- 4 Slot for inscription label

ISO size	B1	B2	B3	B4	D1	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6
1	42	28	6	30	M5	106	74	38	9	147.3	87.6	43.8	36	18	89
2	54	38	9	30	M6	116	84	48	9.5	165	123.4	61.7	48	24	98
3	65	48	12	30	M8	123	91	55	12	185.7	145.4	72.7	64	32	109

# Solenoid valves JMN1H, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



Ordering data – Double solenoid valve				
Circuit symbol	Description	ISO size	Part No.	Type
	Without N1 solenoid coil <sup>1)</sup> , internal pilot air supply	1	<b>159 690</b>	<b>JMN1H-5/2-D-1-C</b>
		2	<b>159 702</b>	<b>JMN1H-5/2-D-2-C</b>
		3	<b>159 714</b>	<b>JMN1H-5/2-D-3-C</b>
	Without N1 solenoid coil <sup>1)</sup> , external pilot air supply	1	<b>159 689</b>	<b>JMN1H-5/2-D-1-S-C</b>
		2	<b>159 701</b>	<b>JMN1H-5/2-D-2-S-C</b>
		3	<b>159 713</b>	<b>JMN1H-5/2-D-3-S-C</b>
	Without N1 solenoid coil <sup>1)</sup> , internal pilot air supply, with dominant signal at 14	1	<b>159 691</b>	<b>JMN1DH-5/2-D-1-C</b>
		2	<b>159 703</b>	<b>JMN1DH-5/2-D-2-C</b>
		3	<b>159 715</b>	<b>JMN1DH-5/2-D-3-C</b>
	Without N1 solenoid coil <sup>1)</sup> , external pilot air supply, with dominant signal at 14	1	<b>159 717</b>	<b>JMN1DH-5/2-D-1-S-C</b>
		2	<b>159 719</b>	<b>JMN1DH-5/2-D-2-S-C</b>
		3	<b>160 897</b>	<b>JMN1DH-5/2-D-3-S-C</b>


1) N1 solenoid coils → 2 / 1.2-82

# Solenoid valves MN1H, ISO 5599-1

Technical data – 5/3-way valves



-  - Flow rate  
1200 ... 4600 l/min
-  - Voltage  
24 V DC  
110, 230 V AC

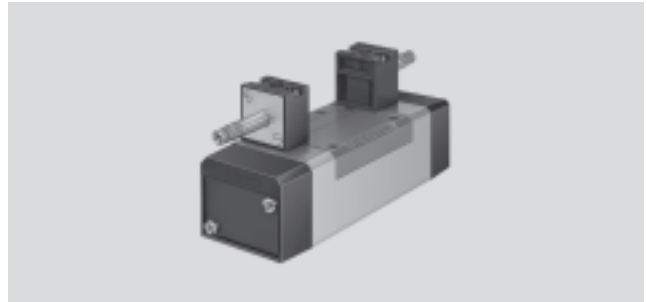

Standard directional control valves  
ISO 5599/1  
1.2

General technical data					
ISO size	1		2	3	
Valve function	5/3-way, single solenoid				
Constructional design	Piston spool				
Sealing principle	Soft				
Actuation type	Electrical				
Type of reset	Mechanical spring				
Type of pilot control	Piloted				
Pilot air supply	Internal				
Direction of flow	Non-reversible				
Exhaust function	With flow control				
Manual override	Via accessory, detenting				
Type of mounting	Via through-holes				
Mounting position	Any				
Nominal size	[mm]	8	11	14.5	
Standard nominal flow rate	Closed	[l/min]	1200	2300	4100
	Exhausted	[l/min]			4600
	Pressurised	[l/min]			4000
Grid dimension	[mm]	43	56	71	
Pneumatic connection on sub-base		G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$	
Product weight	[g]	650	940	1170	
Noise level	[dB (A)]	85			

Operating and environmental conditions			
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum		
Operating pressure	Internal pilot air supply	[bar]	3 ... 10
	External pilot air supply	[bar]	-0.9 ... +16
Pilot pressure	[bar]	3 ... 10	
Ambient temperature	[°C]	-10 ... +50	
Temperature of medium	[°C]	-10 ... +50	

Valve response times [ms]						
ISO size	1		2		3	
	On	Off	On	Off	On	Off
With N1 solenoid coil						
Closed	20	44	33	82	33	82
Exhausted	20	46	36	84	36	84
Pressurised	20	46	35	78	35	78

# Solenoid valves MN1H, ISO 5599-1




Technical data – 5/3-way valves

Electrical data			
N1 solenoid coil			
Electrical connection	Plug, square design to EN 175301-803, type A		
Operating voltage	D.C. voltage	[V DC]	24
	A.C. voltage	[V AC]	110/230 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	2.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 5
Protection class to EN 60 529	IP65		

## Materials

Sectional view

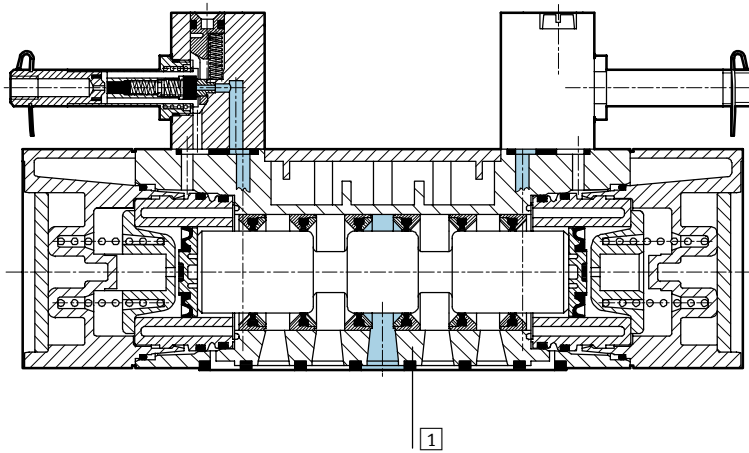

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber
Note on material		Versions free of copper, PTFE and silicone → Ordering data


# Solenoid valves MN1H, ISO 5599-1

Technical data – 5/3-way valves



Standard directional control valves  
ISO 5599/1  
1.2

Dimensions Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)






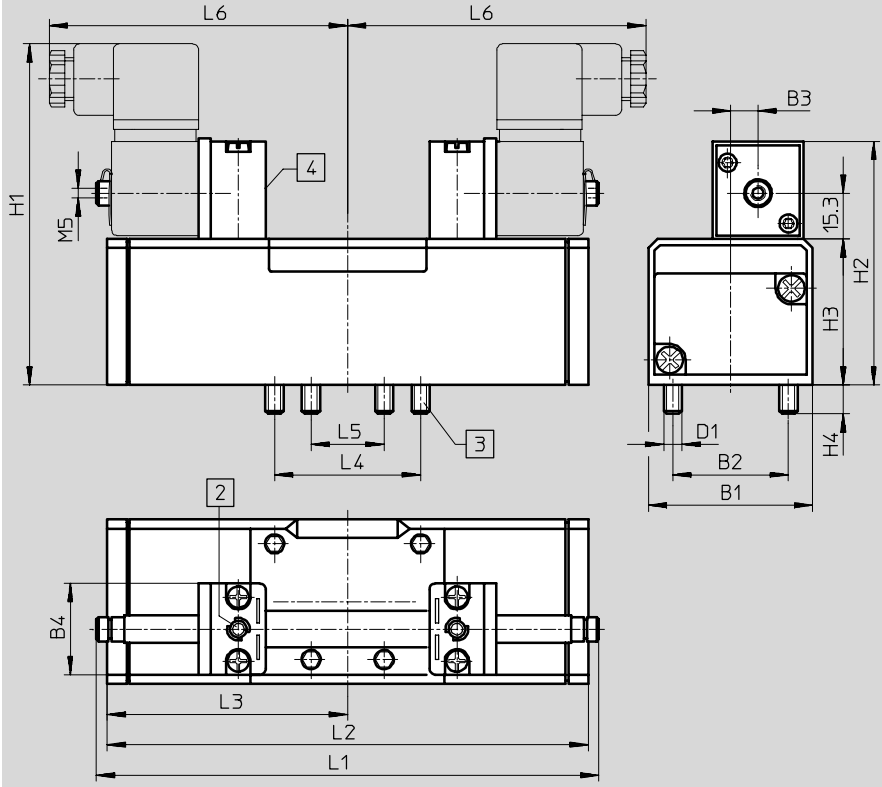


- 2 Manual override
- 3 Captive mounting screws
- 4 Slot for inscription label

ISO size	B1	B2	B3	B4	D1	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6
1	42	28	6	30	M5	106	74	38	9	147.3	108.4	54.2	36	18	89
2	54	38	9	30	M6	116	84	48	9.5	165	158	79	48	24	98
3	65	48	12	30	M8	123	91	55	12	185.7	184	92	64	32	109

# Solenoid valves MN1H, ISO 5599-1

Technical data – 5/3-way valves

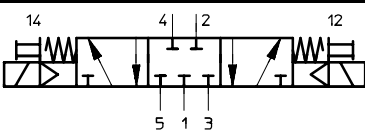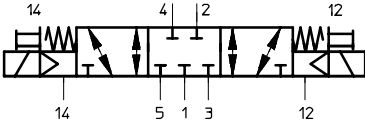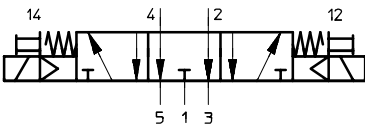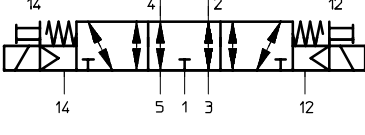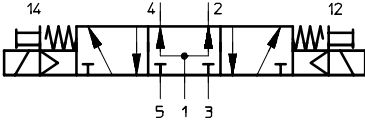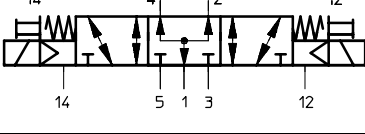
Ordering data				
Circuit symbol	Description	ISO size	Part No.	Type
	Without N1 solenoid coil <sup>1)</sup> , normally closed, internal pilot air supply	1	159 681	MN1H-5/3G-D-1-C
			184 658	MN1H-5/3G-D-1-C-CT <sup>2)</sup>
		2	159 693	MN1H-5/3G-D-2-C
			184 660	MN1H-5/3G-D-2-C-CT <sup>2)</sup>
		3	159 705	MN1H-5/3G-D-3-C
			184 662	MN1H-5/3G-D-3-C-CT <sup>2)</sup>
	Without N1 solenoid coil <sup>1)</sup> , normally closed, external pilot air supply	1	159 680	MN1H-5/3G-D-1-S-C
		2	159 692	MN1H-5/3G-D-2-S-C
		3	159 704	MN1H-5/3G-D-3-S-C
	Without N1 solenoid coil <sup>1)</sup> , normally exhausted, internal pilot air supply	1	159 683	MN1H-5/3E-D-1-C
			184 652	MN1H-5/3E-D-1-C-CT <sup>2)</sup>
		2	159 695	MN1H-5/3E-D-2-C
			184 654	MN1H-5/3E-D-2-C-CT <sup>2)</sup>
		3	159 707	MN1H-5/3E-D-3-C
			184 656	MN1H-5/3E-D-3-C-CT <sup>2)</sup>
	Without N1 solenoid coil <sup>1)</sup> , normally exhausted, external pilot air supply	1	159 682	MN1H-5/3E-D-1-S-C
		2	159 694	MN1H-5/3E-D-2-S-C
		3	159 706	MN1H-5/3E-D-3-S-C
	Without N1 solenoid coil <sup>1)</sup> , normally pressurised, internal pilot air supply	1	159 685	MN1H-5/3B-D-1-C
			184 646	MN1H-5/3B-D-1-C-CT <sup>2)</sup>
		2	159 697	MN1H-5/3B-D-2-C
			184 648	MN1H-5/3B-D-2-C-CT <sup>2)</sup>
		3	159 709	MN1H-5/3B-D-3-C
			184 650	MN1H-5/3B-D-3-C-CT <sup>2)</sup>
	Without N1 solenoid coil <sup>1)</sup> , normally pressurised, external pilot air supply	1	159 684	MN1H-5/3B-D-1-S-C
		2	159 696	MN1H-5/3B-D-2-S-C
		3	159 708	MN1H-5/3B-D-3-S-C


1) N1 solenoid coils → 2 / 1.2-82  
 2) Free of copper, PTFE and silicone

# Solenoid valves MFH, ISO 5599-1

Technical data – 5/2-way valves



-  - Flow rate  
1200 ... 4500 l/min

-  - Voltage  
12, 24, 42, 48 V DC  
24, 42, 48, 110, 230,  
240 V AC



Standard directional control valves  
ISO 5599/1  
1.2

General technical data				
ISO size	1	2	3	
Valve function	5/2-way, single solenoid			
Constructional design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of reset	Mechanical or pneumatic spring			
Type of pilot control	Piloted			
Pilot air supply	Internal			
Direction of flow	Non-reversible			
Exhaust function	With flow control			
Manual override	Via accessory, detenting			
Type of mounting	Via through-holes			
Mounting position	Any			
Nominal size	[mm]	8	11	14.5
Standard nominal flow rate	[l/min]	1200	2300	4500
Grid dimension	[mm]	43	56	71
Pneumatic connection on sub-base		G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g]	390	650	960
Noise level	[dB (A)]	85		

Operating and environmental conditions			
Type of reset		Pneumatic	Mechanical
Operating medium		Filtered compressed air, lubricated or unlubricated Vacuum	
Operating pressure	Internal pilot air supply [bar]	2 ... 10	3 ... 10
	External pilot air supply [bar]	-0.9 ... +16	-0.9 ... +16
Pilot pressure	[bar]	2 ... 10	3 ... 10
Ambient temperature	[°C]	-5 ... +40	
Temperature of medium	[°C]	-10 ... +60	

Valve response times [ms]						
ISO size	1		2		3	
Type of reset	Pneumatic	Mechanical	Pneumatic	Mechanical	Pneumatic	Mechanical
With F solenoid coil						
On	23	16	48	27	60	30
Off	35	45	71	73	66	82



# Solenoid valves MFH, ISO 5599-1


Technical data – 5/2-way valves



Electrical data			
F solenoid coil			
Electrical connection	Design		Plug vanes for plug sockets MSSD-F, KMF
Operating voltage	D.C. voltage	[V DC]	12, 24, 42, 48
	A.C. voltage	[V AC]	24, 42, 48, 110, 230, 240 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	4.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 6
Protection class to EN 60 529			IP65

## Materials

Sectional view

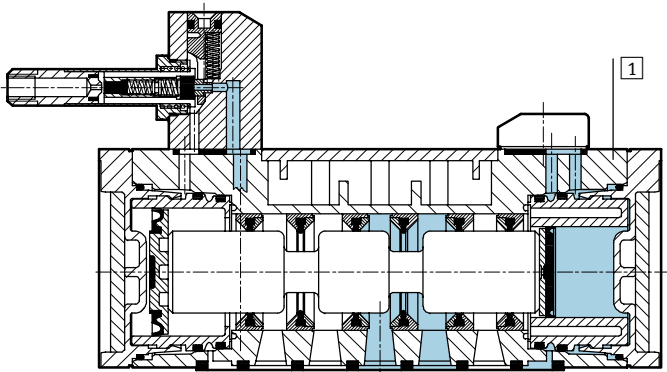

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber


# Solenoid valves MFH, ISO 5599-1

Technical data – 5/2-way valves



Standard directional control valves  
ISO 5599/1  
1.2

**Dimensions** Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

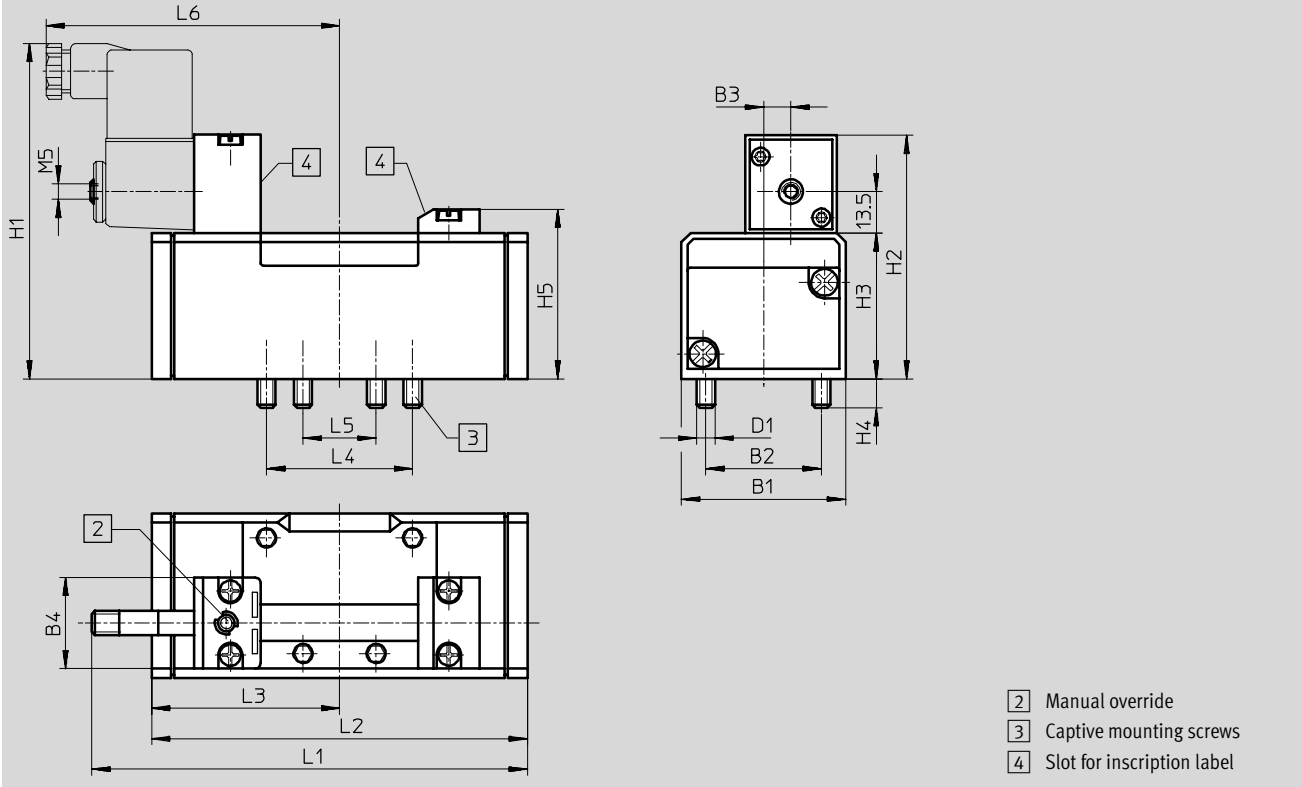

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
<b>ISO size 1</b>																
MFH-5/2-...	42	28	6	30	M5	100	70.3	38	9	46.5	115	87.6	43.8	36	18	89
MFH-5/2-...-FR											125.6	98				
<b>ISO size 2</b>																
MFH-5/2-...	54	38	9	30	M6	110	80.3	48	9.5	56.5	142	123.4	61.7	48	24	98
MFH-5/2-...-FR											159.4	140.7				
<b>ISO size 3</b>																
MFH-5/2-...	65	48	12	30	M8	117	87.3	55	12	63.5	163	145.4	72.7	64	32	109
MFH-5/2-...-FR											182	164.7				

# Solenoid valves MFH, ISO 5599-1



Technical data – 5/2-way valves


Ordering data				
Circuit symbol	Description	ISO size	Part No.	Type
	Without F solenoid coil <sup>1)</sup> , pneumatic reset, internal pilot air supply	1	<b>150 981</b>	<b>MFH-5/2-D-1-C</b>
		2	<b>151 851</b>	<b>MFH-5/2-D-2-C</b>
		3	<b>151 870</b>	<b>MFH-5/2-D-3-C</b>
	Without F solenoid coil <sup>1)</sup> , pneumatic reset, external pilot air supply	1	<b>152 562</b>	<b>MFH-5/2-D-1-S-C</b>
		2	<b>151 022</b>	<b>MFH-5/2-D-2-S-C</b>
		3	<b>151 032</b>	<b>MFH-5/2-D-3-S-C</b>
	Without F solenoid coil <sup>1)</sup> , mechanical reset, internal pilot air supply	1	<b>151 016</b>	<b>MFH-5/2-D-1-FR-C</b>
		2	<b>151 709</b>	<b>MFH-5/2-D-2-FR-C</b>
		3	<b>151 711</b>	<b>MFH-5/2-D-3-FR-C</b>


1) F solenoid coils → 2 / 1.2-82


# Solenoid valves JMFH, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



-  - Flow rate  
1200 ... 4500 l/min

-  - Voltage  
12, 24, 42, 48 V DC  
24, 42, 48, 110, 230,  
240 V AC

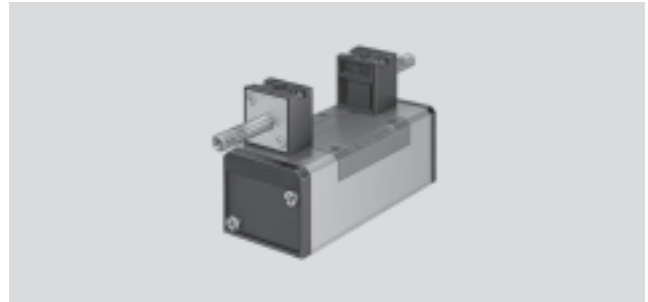

General technical data				
ISO size	1	2	3	
Valve function	5/2-way, double solenoid			
Constructional design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of pilot control	Piloted			
Pilot air supply	Internal or external			
Direction of flow	Non-reversible			
Exhaust function	With flow control			
Manual override	Via accessory, detenting			
Type of mounting	Via through-holes			
Mounting position	Any			
Nominal size	[mm]	8	11	14.5
Standard nominal flow rate	[l/min]	1200	2300	4500
Grid dimension	[mm]	43	56	71
Pneumatic connection on sub-base		G $\frac{3}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g]	490	750	1060
Noise level	[dB (A)]	85		

Operating and environmental conditions			
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum		
Operating pressure	Internal pilot air supply	[bar]	2 ... 10
	External pilot air supply	[bar]	-0.9 ... +16
Pilot pressure		[bar]	2 ... 10
Ambient temperature		[°C]	-5 ... +40
Temperature of medium		[°C]	-10 ... +60

Valve response times [ms]						
ISO size	1		2		3	
		Dominant signal at 14		Dominant signal at 14		Dominant signal at 14
With F solenoid coil						
	16	16	18	18	18	18

# Solenoid valves JMFH, ISO 5599-1




Technical data – 5/2-way valves, double solenoid

Electrical data			
ISO size		1, 2, 3	
F solenoid coil			
Electrical connection	Design	Plug vanes for plug sockets MSSD-F, KMF	
Operating voltage	D.C. voltage	[V DC]	12, 24, 42, 48
	A.C. voltage	[V AC]	24, 42, 48, 110, 230, 240 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	4.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 6
Protection class to EN 60 529		IP65	

## Materials

Sectional view

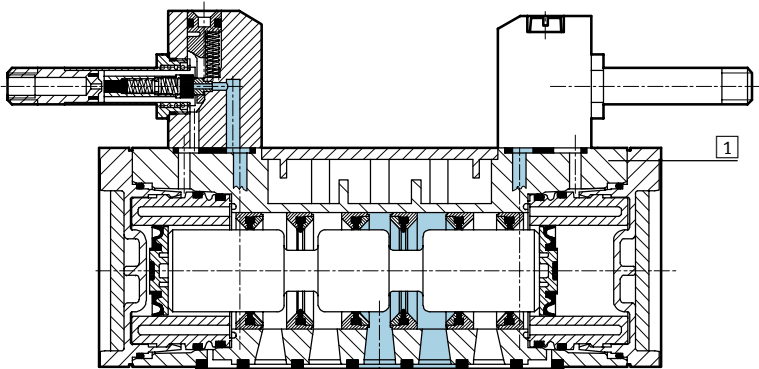

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber

# Solenoid valves JMFH, ISO 5599-1


Technical data – 5/2-way valves, double solenoid



Standard directional control valves  
ISO 5599/1  
1.2

## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

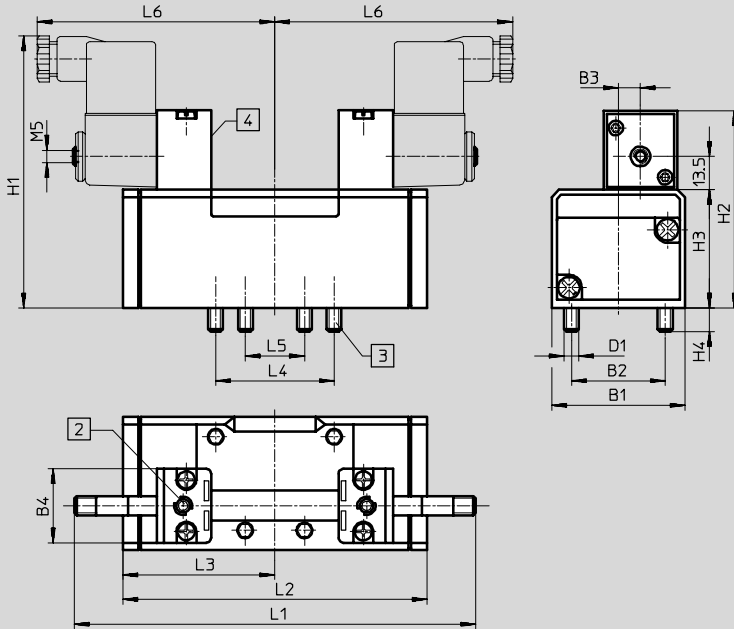

- 2 Manual override
- 3 Captive mounting screws
- 4 Slot for inscription label

ISO size	B1	B2	B3	B4	D1	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6
1	42	28	6	30	M5	100	70.3	38	9	142.6	87.6	43.8	36	18	88
2	54	38	9	30	M6	110	80.3	48	9.5	160.4	123.4	61.7	48	24	97
3	65	48	12	30	M8	117	87.3	55	12	181	145.4	72.7	64	32	109

## Ordering data



Circuit symbol	Description	ISO size	Part No.	Type
	Without F solenoid coil <sup>1)</sup> , internal pilot air supply	1	<b>150 980</b>	<b>JMFH-5/2-D-1-C</b>
		2	<b>151 852</b>	<b>JMFH-5/2-D-2-C</b>
		3	<b>151 871</b>	<b>JMFH-5/2-D-3-C</b>
	Without F solenoid coil <sup>1)</sup> , external pilot air supply	1	<b>152 563</b>	<b>JMFH-5/2-D-1-S-C</b>
		2	<b>151 023</b>	<b>JMFH-5/2-D-2-S-C</b>
		3	<b>151 033</b>	<b>JMFH-5/2-D-3-S-C</b>
	Without F solenoid coil <sup>1)</sup> , internal pilot air supply, with dominant signal at 14	1	<b>151 019</b>	<b>JMFDH-5/2-D-1-C</b>
		2	<b>151 853</b>	<b>JMFDH-5/2-D-2-C</b>
		3	<b>151 872</b>	<b>JMFDH-5/2-D-3-C</b>


1) F solenoid coils → 2 / 1.2-82

# Solenoid valves MFH, ISO 5599-1

Technical data – 5/3-way valves

FESTO

-  - Flow rate  
1200 ... 4600 l/min
-  - Voltage  
12, 24, 42, 48 V DC  
24, 42, 48, 110, 230,  
240 V AC

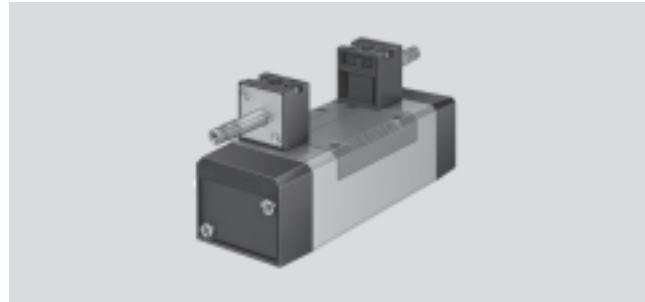

General technical data				
ISO size		1	2	3
Valve function		5/3-way, single solenoid		
Constructional design		Piston spool		
Sealing principle		Soft		
Actuation type		Electrical		
Type of reset		Mechanical spring		
Type of pilot control		Piloted		
Pilot air supply		Internal or external		
Direction of flow		Non-reversible		
Exhaust function		With flow control		
Manual override		Via accessory, detenting		
Type of mounting		Via through-holes		
Mounting position		Any		
Nominal size	[mm]	8	11	14.5
Standard nominal flow rate	Closed [l/min]	1200	2300	4100
	Exhausted [l/min]			4600
	Pressurised [l/min]			4000
Grid dimension	[mm]	43	56	71
Pneumatic connection on sub-base		G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g]	520	820	1040
Noise level	[dB (A)]	85		

Operating and environmental conditions			
Operating medium		Filtered compressed air, lubricated or unlubricated Vacuum	
Operating pressure	Internal pilot air supply [bar]	3 ... 10	
	External pilot air supply [bar]	-0.9 ... +16	
Pilot pressure	[bar]	3 ... 10	
Ambient temperature	[°C]	-5 ... +40	
Temperature of medium	[°C]	-10 ... +60	

Valve response times [ms]						
ISO size	1		2		3	
	On	Off	On	Off	On	Off
With F solenoid coil						
Closed	18	36	33	63	36	77
Exhausted	18	36	35	67	37	78
Pressurised	18	36	35	69	36	75

# Solenoid valves MFH, ISO 5599-1

Technical data – 5/3-way valves




Standard directional control valves  
ISO 5599/1

1.2

Electrical data			
F solenoid coil			
Electrical connection	Design		Plug vanes for plug sockets MSSD-F, KMF
Operating voltage	D.C. voltage	[V DC]	12, 24, 42, 48
	A.C. voltage	[V AC]	24, 42, 48, 110, 230, 240 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	4.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 6
Protection class to EN 60 529			IP65

## Materials

Sectional view

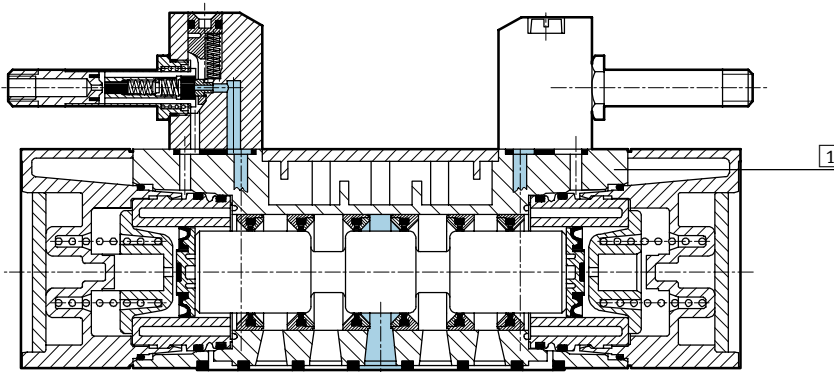

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber




# Solenoid valves MFH, ISO 5599-1

Technical data – 5/3-way valves



## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

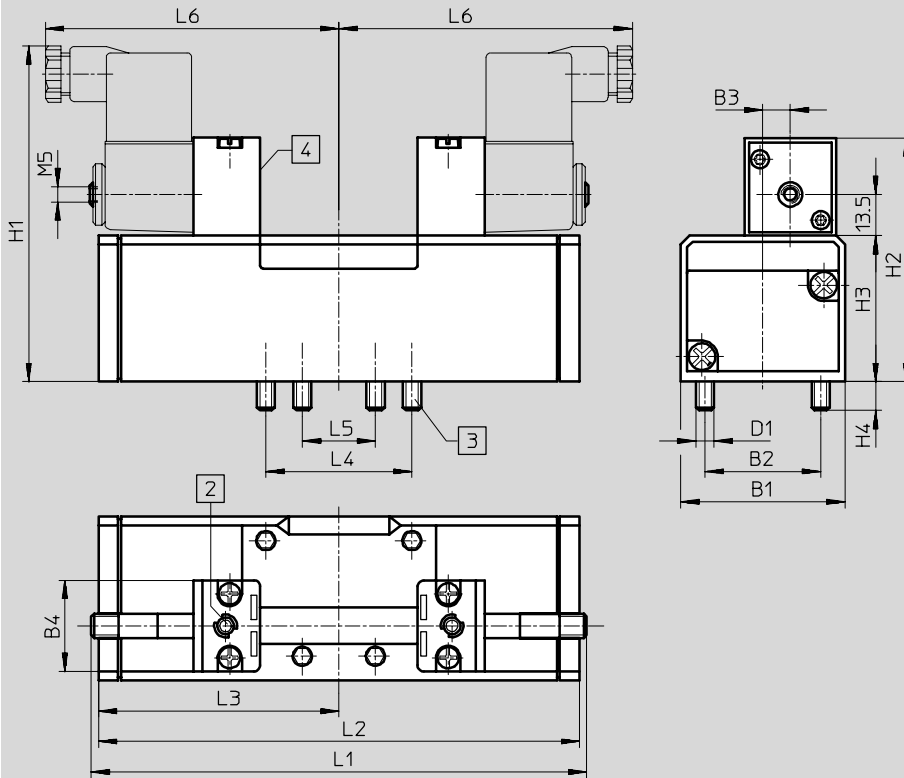

- 2 Manual override
- 3 Captive mounting screws
- 4 Slot for inscription label

ISO size	B1	B2	B3	B4	D1	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6
1	42	28	6	30	M5	100	70.3	38	9	142.6	108.4	54.2	36	18	89
2	54	38	9	30	M6	110	80.3	48	9.5	160	158	79	48	24	98
3	65	48	12	30	M8	117	87.3	55	12	181	184	92	64	32	109

# Solenoid valves MFH, ISO 5599-1

Technical data – 5/3-way valves




Ordering data				
Circuit symbol	Description	ISO size	Part No.	Type
	Without F solenoid coil <sup>1)</sup> , normally closed, internal pilot air supply	1	<b>150 982</b>	<b>MFH-5/3G-D-1-C</b>
		2	<b>151 854</b>	<b>MFH-5/3G-D-2-C</b>
		3	<b>151 873</b>	<b>MFH-5/3G-D-3-C</b>
	Without F solenoid coil <sup>1)</sup> , normally closed, external pilot air supply	1	<b>152 564</b>	<b>MFH-5/3G-D-1-S-C</b>
		2	<b>151 024</b>	<b>MFH-5/3G-D-2-S-C</b>
		3	<b>151 034</b>	<b>MFH-5/3G-D-3-S-C</b>
	Without F solenoid coil <sup>1)</sup> , normally exhausted, internal pilot air supply	1	<b>150 983</b>	<b>MFH-5/3E-D-1-C</b>
		2	<b>151 855</b>	<b>MFH-5/3E-D-2-C</b>
		3	<b>151 874</b>	<b>MFH-5/3E-D-3-C</b>
	Without F solenoid coil <sup>1)</sup> , normally exhausted, external pilot air supply	1	<b>152 565</b>	<b>MFH-5/3E-D-1-S-C</b>
		2	<b>151 025</b>	<b>MFH-5/3E-D-2-S-C</b>
		3	<b>151 035</b>	<b>MFH-5/3E-D-3-S-C</b>
	Without F solenoid coil <sup>1)</sup> , normally pressurised, internal pilot air supply	1	<b>150 984</b>	<b>MFH-5/3B-D-1-C</b>
		2	<b>151 856</b>	<b>MFH-5/3B-D-2-C</b>
		3	<b>151 875</b>	<b>MFH-5/3B-D-3-C</b>
	Without F solenoid coil <sup>1)</sup> , normally pressurised, external pilot air supply	1	<b>152 566</b>	<b>MFH-5/3B-D-1-S-C</b>
		2	<b>151 026</b>	<b>MFH-5/3B-D-2-S-C</b>
		3	<b>151 036</b>	<b>MFH-5/3B-D-3-S-C</b>

1) F solenoid coils → 2 / 1.2-82


# Solenoid valves MEBH, ISO 5599-1

Technical data – 5/2-way valves

FESTO

-  - Flow rate  
1200 ... 4500 l/min

-  - Voltage  
24 V DC

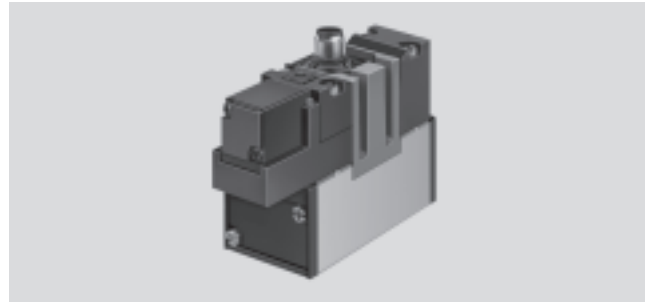

General technical data				
ISO size	1	2	3	
Valve function	5/2-way, single solenoid			
Constructional design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of reset	Mechanical or pneumatic spring			
Type of pilot control	Piloted			
Pilot air supply	Internal			
Direction of flow	Non-reversible			
Exhaust function	With flow control			
Manual override	Via accessory, detenting			
Type of mounting	Via through-holes			
Mounting position	Any			
Nominal size	[mm]	8	11	14.5
Standard nominal flow rate	[l/min]	1200	2300	4500
Grid dimension	[mm]	43	56	71
Pneumatic connection on sub-base		G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g]	550	700	1000
Noise level	[dB (A)]	85		

Operating and environmental conditions			Pneumatic		Mechanical	
Type of reset						
Operating medium			Filtered compressed air, lubricated or unlubricated Vacuum			
Operating pressure	Internal pilot air supply	[bar]	2 ... 10		3 ... 10	
	External pilot air supply	[bar]	-0.9 ... +16		-0.9 ... +16	
Pilot pressure		[bar]	2 ... 10		3 ... 10	
Ambient temperature		[°C]	-5 ... +50			
Temperature of medium		[°C]	-5 ... +50			

Valve response times [ms]						
ISO size	1		2		3	
Type of reset	Pneumatic	Mechanical	Pneumatic	Mechanical	Pneumatic	Mechanical
With EB solenoid coil						
On	20	15	50	33	59	28
Off	33	50	85	103	87	109

# Solenoid valves MEBH, ISO 5599-1

Technical data – 5/2-way valves


FESTO

## Electrical data

EB solenoid coil			
Electrical connection			Central plug, round design, M12x1
Operating voltage	D.C. voltage	[V DC]	24
Coil characteristics	D.C. voltage	[W]	2.5
Protection class to EN 60 529			IP65

## Materials

Sectional view

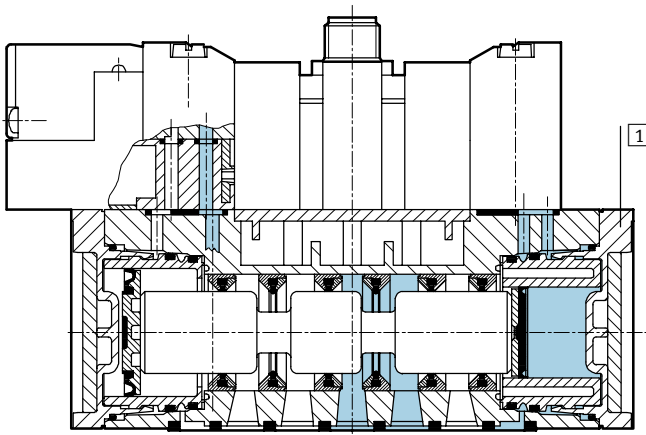

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber

# Solenoid valves MEBH, ISO 5599-1

Technical data – 5/2-way valves



Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

- 1 Attachment of plug socket adjustable by 3x 30°
- 2 Manual override
- 3 Captive mounting screws
- 5 LED display
- 6 Angled socket SEA-M12-4WD-PG7 → 2 / 1.2-84

Standard directional control valves  
ISO 5599/1  
**1.2**

Type	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
<b>ISO size 1</b>																
MEBH-5/2-...	42	28	6	17.5	M5	110	80.3	38	9	74.7	110.8	87.6	43.8	36	18	67
MEBH-5/2-...-FR											121.3	98				
<b>ISO size 2</b>																
MEBH-5/2-...	54	38	9	17.5	M6	120	90.1	48	9.5	84.2	137.6	123.4	61.7	48	24	75.9
MEBH-5/2-...-FR											154.9	140.7				
<b>ISO size 3</b>																
MEBH-5/2-...	65	48	12	17.5	M8	130	97.8	55	12	93.1	158.7	145.4	72.7	64	32	86
MEBH-5/2-...-FR											178	164.7				

### M12 central plug – Terminal allocation

Mono connection

- 1 Unused
- 2 Unused
- 3 com (-)
- 4 Signal (+) Solenoid 14

# Solenoid valves MEBH, ISO 5599-1

Technical data – 5/2-way valves



Standard directional control valves  
ISO 5599/1


1.2

Ordering data					
Circuit symbol	Description	Voltage	ISO size	Part No.	Type
	With EB solenoid coil, with central plug, pneumatic reset, internal pilot air supply	24 V DC	1	<b>184 493</b>	<b>MEBH-5/2-D-1-ZSR-C</b>
			2	<b>184 500</b>	<b>MEBH-5/2-D-2-ZSR-C</b>
			3	<b>184 507</b>	<b>MEBH-5/2-D-3-ZSR-C</b>
	With EB solenoid coil, with central plug, mechanical reset, internal pilot air supply	24 V DC	1	<b>184 494</b>	<b>MEBH-5/2-D-1-ZSR-FR-C</b>
			2	<b>184 501</b>	<b>MEBH-5/2-D-2-ZSR-FR-C</b>
			3	<b>184 508</b>	<b>MEBH-5/2-D-3-ZSR-FR-C</b>


# Solenoid valves JMEBH, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



-  - Flow rate  
1200 ... 4500 l/min

-  - Voltage  
24 V DC

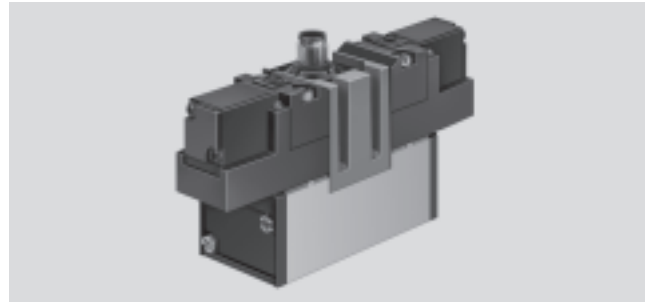

Standard directional control valves  
ISO 5599/1  
**1.2**

General technical data				
ISO size	1	2	3	
Valve function	5/2-way, double solenoid			
Constructional design	Piston spool			
Sealing principle	Soft			
Actuation type	Electrical			
Type of pilot control	Piloted			
Pilot air supply	Internal or external			
Direction of flow	Non-reversible			
Exhaust function	With flow control			
Manual override	Via accessory, detenting			
Type of mounting	Via through-holes			
Mounting position	Any			
Nominal size	[mm]	8	11	14.5
Standard nominal flow rate	[l/min]	1200	2300	4500
Grid dimension	[mm]	43	56	71
Pneumatic connection on sub-base		G $\frac{3}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g]	600	770	1080
Noise level	[dB (A)]	85		

Operating and environmental conditions			
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum		
Operating pressure	Internal pilot air supply	[bar]	2 ... 10
	External pilot air supply	[bar]	-0.9 ... +16
Pilot pressure		[bar]	2 ... 10
Ambient temperature		[°C]	-5 ... +50
Temperature of medium		[°C]	-5 ... +50

Valve response times [ms]						
ISO size	1		2		3	
		Dominant signal at 14		Dominant signal at 14		Dominant signal at 14
With EB solenoid coil						
Changeover	12	13	15	23	16	20

# Solenoid valves JMEBH, ISO 5599-1


Technical data – 5/2-way valves, double solenoid



Electrical data			
EB solenoid coil			
Electrical connection	Design	Central plug, round design, M12x1	
Operating voltage	D.C. voltage	[V DC]	24
Coil characteristics	D.C. voltage	[W]	2.5
Protection class to EN 60 529			IP65

## Materials

Sectional view

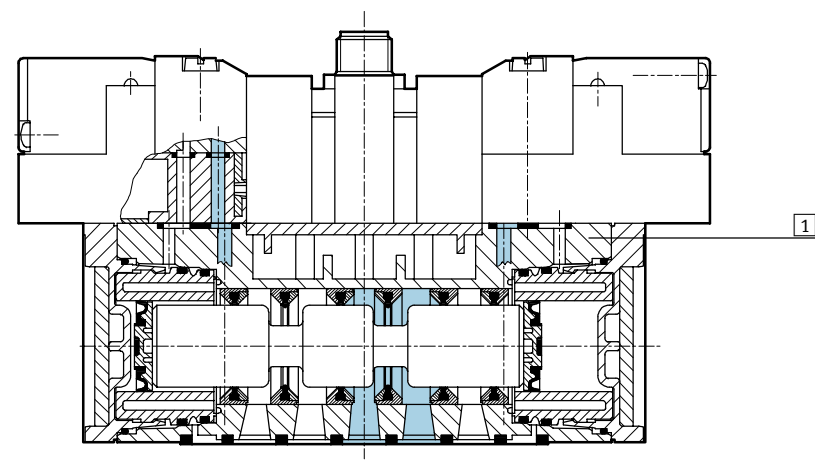

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber

Standard directional control valves  
ISO 5599/1  
1.2




# Solenoid valves JMEBH, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

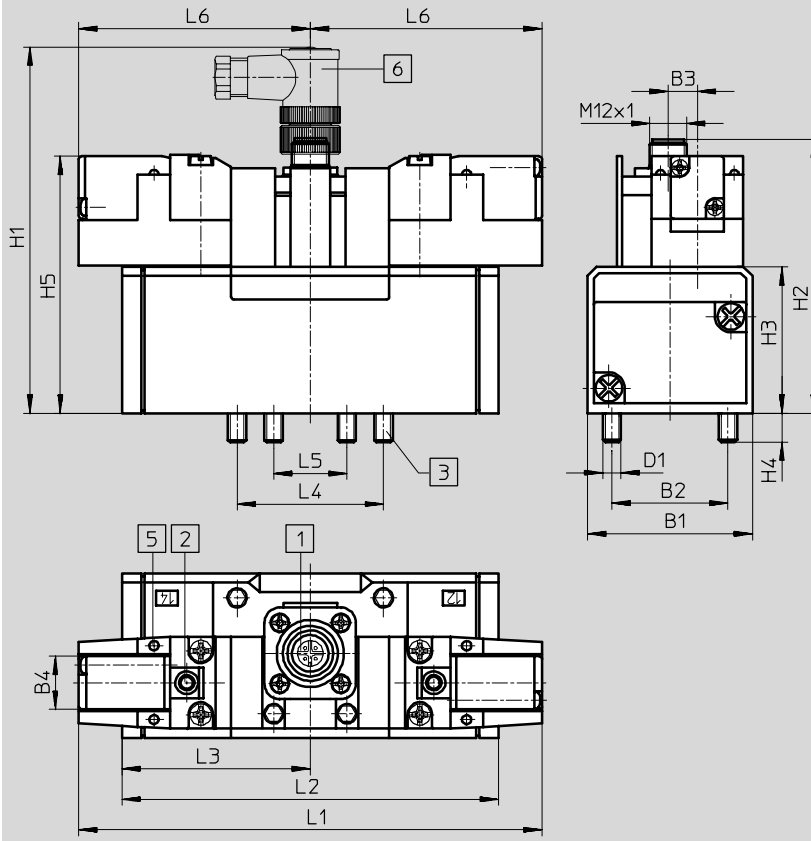


- 1 Attachment of plug socket adjustable by 3x 30°
- 2 Manual override
- 3 Captive mounting screws
- 5 LED display
- 6 Angled socket  
SEA-M12-4WD-PG7  
→ 2 / 1.2-84

ISO size	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
1	42	28	6	17.5	M5	110	80.3	38	9	74.7	134	87.6	43.8	36	18	67
2	54	38	9	17.5	M6	120	90.1	48	9.5	84.2	151.8	123.4	61.7	48	24	75.9
3	65	48	12	17.5	M8	130	97.8	55	12	93.1	171.9	145.4	72.7	64	32	86

## M12 central plug – Terminal allocation

Duo connection



- 1 Unused
- 2 Signal (+) Solenoid 12
- 3 com (-)
- 4 Signal (+) Solenoid 14

# Solenoid valves JMEBH, ISO 5599-1

Technical data – 5/2-way valves, double solenoid






Ordering data					
Circuit symbol	Solenoid coil	Voltage	ISO size	Part No.	Type
	With EB solenoid coil, with central plug, internal pilot air supply	24 V DC	1	<b>184 495</b>	<b>JMEBH-5/2-D-1-ZSR-C</b>
			2	<b>184 502</b>	<b>JMEBH-5/2-D-2-ZSR-C</b>
			3	<b>184 509</b>	<b>JMEBH-5/2-D-3-ZSR-C</b>
	With EB solenoid coil, with central plug, internal pilot air supply, with dominant signal at 14	24 V DC	1	<b>184 496</b>	<b>JMEBDH-5/2-D-1-ZSR-C</b>
			2	<b>184 503</b>	<b>JMEBDH-5/2-D-2-ZSR-C</b>
			3	<b>184 510</b>	<b>JMEBDH-5/2-D-3-ZSR-C</b>

# Solenoid valves MEBH, ISO 5599-1

Technical data – 5/3-way valves

FESTO

-  - Flow rate  
1200 ... 4600 l/min
-  - Voltage  
24 V DC

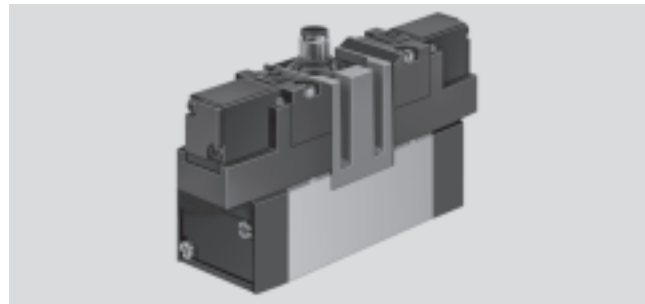

General technical data				
ISO size		1	2	3
Valve function		5/3-way, single solenoid		
Constructional design		Piston spool		
Sealing principle		Soft		
Actuation type		Electrical		
Type of reset		Mechanical spring		
Type of pilot control		Piloted		
Pilot air supply		Internal		
Direction of flow		Non-reversible		
Exhaust function		With flow control		
Manual override		Via accessory, detenting		
Type of mounting		Via through-holes		
Mounting position		Any		
Nominal size	[mm]	8	11	14.5
Standard nominal flow rate	Closed [l/min]	1200	2300	4100
	Exhausted [l/min]			4600
	Pressurised [l/min]			4000
Grid dimension	[mm]	43	56	71
Pneumatic connection on sub-base		G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
Product weight	[g]	630	800	1120
Noise level	[dB (A)]	85		

Operating and environmental conditions			
Operating medium		Filtered compressed air, lubricated or unlubricated Vacuum	
Operating pressure	Internal pilot air supply [bar]	3 ... 10	
	External pilot air supply [bar]	-0.9 ... +16	
Pilot pressure	[bar]	3 ... 10	
Ambient temperature	[°C]	-5 ... +50	
Temperature of medium	[°C]	-5 ... +50	

Valve response times [ms]						
ISO size	1		2		3	
	On	Off	On	Off	On	Off
With EB solenoid coil						
	19	68	30	106	38	130

Standard directional control valves  
ISO 5599/1  
1.2

# Solenoid valves MEBH, ISO 5599-1


Technical data – 5/3-way valves



Electrical data			
EB solenoid coil			
Electrical connection			Central plug, round design, M12x1
Operating voltage	D.C. voltage	[V DC]	24
Coil characteristics	D.C. voltage	[W]	2.5
Protection class to EN 60 529			IP65

## Materials

Sectional view

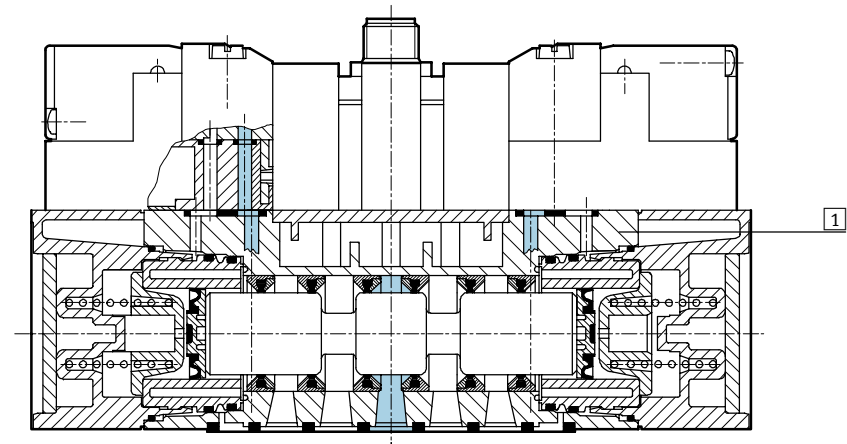

1	Housing	Die-cast aluminium, polyacetate
-	Seals	Nitrile rubber


# Solenoid valves MEBH, ISO 5599-1

Technical data – 5/3-way valves



## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

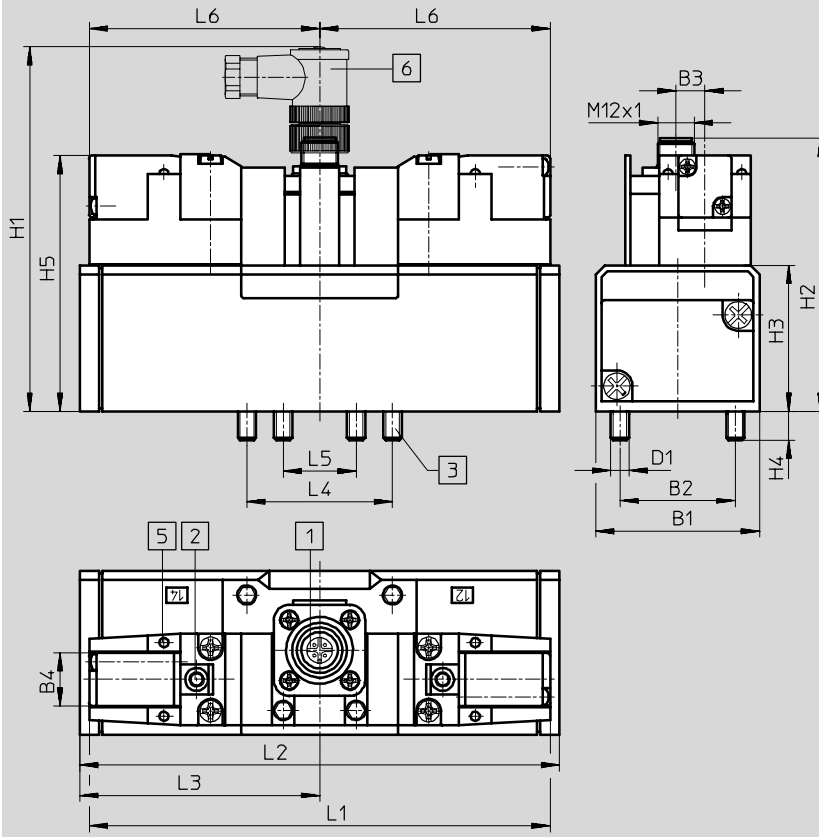


- 1 Attachment of plug socket adjustable by 3x 30°
- 2 Manual override
- 3 Captive mounting screws
- 5 LED display
- 6 Angled socket  
SEA-M12-4WD-PG7  
→ 2 / 1.2-84

ISO size	B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	L6
1	42	28	6	17.5	M5	110	80.3	38	9	74.7	134	108.4	54.2	36	18	67
2	54	38	9	17.5	M6	120	90.1	48	9.5	84.2	151.8	158	79	48	24	75.9
3	65	48	12	17.5	M8	130	97.8	55	12	93.1	171.9	184	92	64	32	86

## M12 central plug – Terminal allocation

Duo connection



- 1 Unused
- 2 Signal (+) Solenoid 12
- 3 com (-)
- 4 Signal (+) Solenoid 14

# Solenoid valves MEBH, ISO 5599-1

Technical data – 5/3-way valves



Standard directional control valves  
ISO 5599/1



1.2


Ordering data					
Circuit symbol	Description	Voltage	ISO size	Part No.	Type
	With EB solenoid coil, with central plug, normally closed, internal pilot air supply	24 V DC	1	<b>184 498</b>	<b>MEBH-5/3G-D-1-ZSR-C</b>
			2	<b>184 505</b>	<b>MEBH-5/3G-D-2-ZSR-C</b>
			3	<b>184 512</b>	<b>MEBH-5/3G-D-3-ZSR-C</b>
	With EB solenoid coil, with central plug, normally exhausted, internal pilot air supply	24 V DC	1	<b>184 497</b>	<b>MEBH-5/3E-D-1-ZSR-C</b>
			2	<b>184 504</b>	<b>MEBH-5/3E-D-2-ZSR-C</b>
			3	<b>184 511</b>	<b>MEBH-5/3E-D-3-ZSR-C</b>
	With EB solenoid coil, with central plug, normally pressurised, internal pilot air supply	24 V DC	1	<b>184 499</b>	<b>MEBH-5/3B-D-1-ZSR-C</b>
			2	<b>184 506</b>	<b>MEBH-5/3B-D-2-ZSR-C</b>
			3	<b>184 513</b>	<b>MEBH-5/3B-D-3-ZSR-C</b>

# Solenoid valves MDH, ISO 5599-1

Technical data – 5/2-way valves

FESTO

-  - Flow rate
-  - Voltage  
24 V DC  
42, 110, 230 V AC

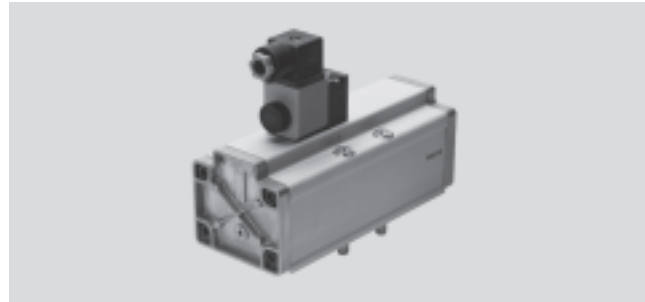

General technical data		
ISO size	4	
Valve function	5/2-way, single solenoid	
Constructional design	Piston spool	
Sealing principle	Soft	
Actuation type	Electrical	
Type of reset	Pneumatic spring	
Type of pilot control	Piloted	
Pilot air supply	Internal	
Direction of flow	Non-reversible	
Exhaust function	With flow control	
Manual override	Via accessory, detenting	
Type of mounting	Via through-holes	
Mounting position	Any	
Nominal size	[mm]	18
Standard nominal flow rate	[l/min]	6000
Grid dimension	[mm]	82
Pneumatic connection on sub-base	G3/4	
Product weight	[g]	2600

Operating and environmental conditions			
Operating medium	Filtered compressed air, lubricated or unlubricated		
Operating pressure	Internal pilot air supply	[bar]	3 ... 16
	External pilot air supply	[bar]	–
Pilot pressure		[bar]	–
Ambient temperature		[°C]	–5 ... +40
Temperature of medium		[°C]	–10 ... +60

Valve response times [ms]	
D solenoid coil	
On	120
Off	160

Standard directional control valves  
ISO 5599/1  
1.2

# Solenoid valves MDH, ISO 5599-1

Technical data – 5/2-way valves




Standard directional control valves  
ISO 5599/1

1.2

Electrical data			
D solenoid coil			
Electrical connection	Design		Plug, square design to EN 175301-803, type A
Operating voltage	D.C. voltage	[V DC]	24
	A.C. voltage	[V AC]	42, 110, 230 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	6.8
	A.C. voltage	[VA]	Pull: 16.5
	42 V		Hold: 12.2
	A.C. voltage 110 V, 230 V	[VA]	Pull: 14.4
			Hold: 10.5
Protection class to EN 60 529			IP65

## Materials

Sectional view

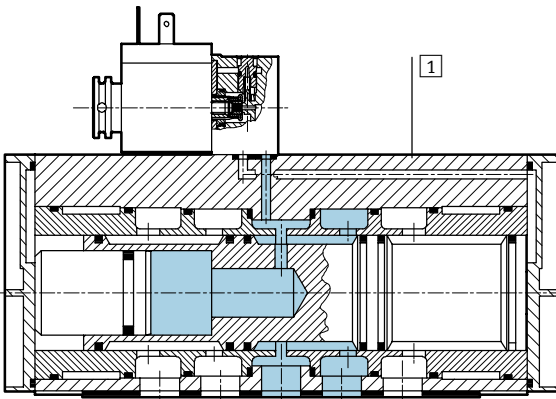

1	Housing	Anodised aluminium, polyacetate, brass
-	Seals	Nitrile rubber, polyurethane, polytetrafluoroethylene carbon




# Solenoid valves MDH, ISO 5599-1

Technical data – 5/2-way valves



## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

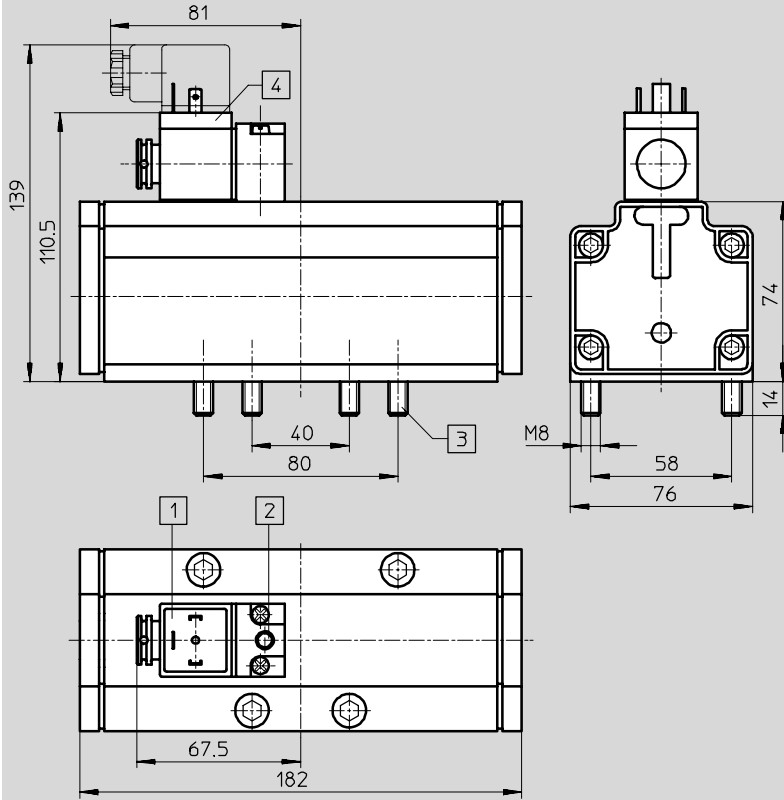

- 1 Wiring at plug socket to EN 175301-803, type A → 2 / 1.2-83
- 2 Manual override
- 3 Captive mounting screws
- 4 Solenoid coil can be repositioned by 90° regardless of manual override

## Ordering data



Circuit symbol	Solenoid coil	Voltage	ISO size	Part No.	Type		
	With D solenoid coil, pneumatic reset, internal pilot air supply	24 V DC	4	12 457	MDH-5/2-3/4-D-4-24DC		
		–		14 544	MDH-5/2-3/4-D-4 <sup>1)</sup>		
		<b>Usable pilot valves:</b>					
		24 V DC	–	119 600	MDH-3/2-24DC		
		110 V AC	–	119 601	MDH-3/2-110AC		
		230 V AC	–	119 602	MDH-3/2-230AC		
		24 V DC/ 42 V AC	–	119 603	MDH-3/2-24DC/42AC		

1) Without pilot valve. The part number for the pilot valve must be quoted when ordering.  
Order example: 14 544 MDH-5/2-3/4-D-4-119 602

# Solenoid valves JMDH, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



-  - Flow rate  
6000 l/min
  
-  - Voltage  
24 V DC  
42, 110, 230 V AC



Standard directional control valves  
ISO 5599/1  
1.2

General technical data	
ISO size	4
Valve function	5/2-way, double solenoid
Constructional design	Piston spool
Sealing principle	Soft
Actuation type	Electrical
Type of pilot control	Piloted
Pilot air supply	Internal
Direction of flow	Non-reversible
Exhaust function	With flow control
Manual override	Via accessory, detenting
Type of mounting	Via through-holes
Mounting position	Any
Nominal size	[mm] 18
Standard nominal flow rate	[l/min] 6000
Grid dimension	[mm] 82
Pneumatic connection on sub-base	G3/4
Product weight	[g] 2600

Operating and environmental conditions		
Operating medium		Filtered compressed air, lubricated or unlubricated
Operating pressure	Internal pilot air supply	[bar] 2 ... 16
	External pilot air supply	[bar] –
Pilot pressure	[bar]	–
Ambient temperature	[°C]	–5 ... +40
Temperature of medium	[°C]	–10 ... +60

Valve response times [ms]
With D solenoid coil
40

# Solenoid valves JMDH, ISO 5599-1


Technical data – 5/2-way valves, double solenoid



Electrical data			
D solenoid coil			
Electrical connection	Plug, square design to EN 175301-803, type A		
Operating voltage	D.C. voltage	[V DC]	24
	A.C. voltage	[V AC]	42, 110, 230 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	6.8
	A.C. voltage	[VA]	Pull: 16.5 Hold: 12.2
	42 V A.C. voltage 110 V, 230 V	[VA]	Pull: 14.5 Hold: 10.5
Protection class to EN 60 529	IP65		

## Materials

Sectional view

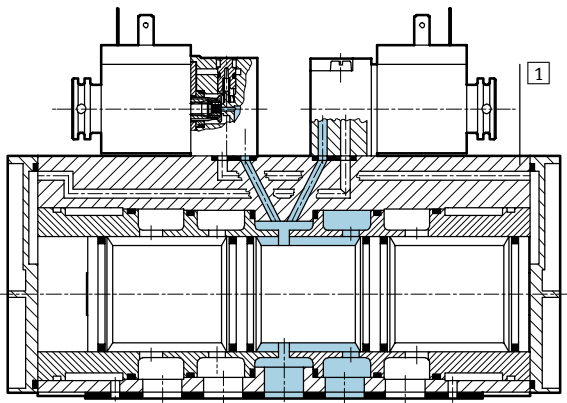

1	Housing	Anodised aluminium, polyacetate, brass
-	Seals	Nitrile rubber, polyurethane, polytetrafluoroethylene carbon

# Solenoid valves JMDH, ISO 5599-1

Technical data – 5/2-way valves, double solenoid



Standard directional control valves  
ISO 5599/1

1.2

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

**Dimensions**

- 1 Wiring at plug socket to EN 175301-803, type A → 2 / 1.2-83
- 2 Manual override
- 3 Captive mounting screws
- 4 Solenoid coil can be repositioned by 90° regardless of manual override



Ordering data – Double solenoid valve						
Circuit symbol	Description	Voltage	ISO size	Part No.	Type	
	With D solenoid coil, internal pilot air supply	24 V DC	4	<b>12 458</b>	<b>JMDH-5/2-3/4-D-4-24DC</b>	
		–		<b>14 545</b>	<b>JMDH-5/2-3/4-D-4<sup>1)</sup></b>	
	<b>Usable pilot valves:</b>					
	24 V DC	–	<b>119 600</b>	<b>MDH-3/2-24DC</b>		
	110 V AC	–	<b>119 601</b>	<b>MDH-3/2-110AC</b>		
	230 V AC	–	<b>119 602</b>	<b>MDH-3/2-230AC</b>		
	24 V DC/ 42 V AC	–	<b>119 603</b>	<b>MDH-3/2-24DC/42AC</b>		

1) Without pilot valve. The part number for the pilot valve must be quoted when ordering.  
Order example: 14 545 MDH-5/2-3/4-D-4-119 602

# Solenoid valves MDH, ISO 5599-1

Technical data – 5/3-way valves

FESTO

-  - Flow rate  
4800 l/min
  
-  - Voltage  
24 V DC  
42, 110, 230 V AC



General technical data			
ISO size	4		
Valve function	5/3-way, single solenoid		
Constructional design	Piston spool		
Sealing principle	Soft		
Actuation type	Electrical		
Type of reset	Pneumatic spring		
Type of pilot control	Piloted		
Pilot air supply	Internal		
Direction of flow	Non-reversible		
Exhaust function	With flow control		
Manual override	Via accessory, detenting		
Type of mounting	Via through-holes		
Mounting position	Any		
Nominal size	[mm]	18	
Standard nominal flow rate	Closed	[l/min]	4800
	Exhausted	[l/min]	4800
Grid dimension	[mm]	82	
Pneumatic connection on sub-base	G3/4		
Product weight	[g]	2600	

Operating and environmental conditions			
Operating medium	Filtered compressed air, lubricated or unlubricated		
Operating pressure	Internal pilot air supply	[bar]	3 ... 16
	External pilot air supply	[bar]	-
Pilot pressure		[bar]	-
Ambient temperature		[°C]	- 5 ... +40
Temperature of medium		[°C]	-10 ... +60

Valve response times [ms]	
With D solenoid coil	
On	85
Off	290

# Solenoid valves MDH, ISO 5599-1

Technical data – 5/3-way valves



Standard directional control valves  
ISO 5599/1


1.2

## Electrical data

D solenoid coil			
Electrical connection		Plug, square design to EN 175301-803, type A	
Operating voltage	D.C. voltage	[V DC]	24
	A.C. voltage	[V AC]	42, 110, 230 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	6.8
	A.C. voltage	[VA]	Pull: 16.5
	42 V		Hold: 12.2
	A.C. voltage 110 V, 230 V	[VA]	Pull: 14.5 Hold: 10.5

## Materials

Sectional view

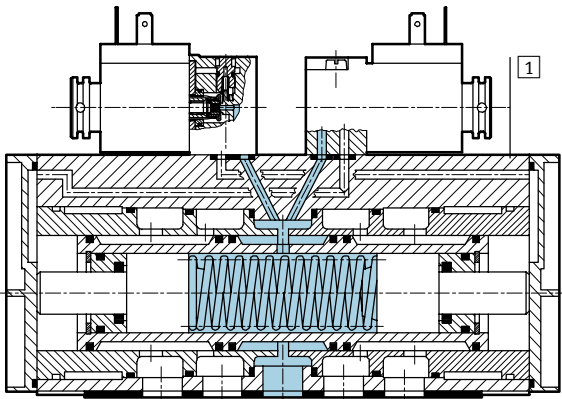

1	Housing	Anodised aluminium, polyacetate, brass
-	Seals	Nitrile rubber, polyurethane, polytetrafluoroethylene carbon

# Solenoid valves MDH, ISO 5599-1

Technical data – 5/3-way valves



Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

**Dimensions**

- 1 Wiring at plug socket to EN 175301-803, type A → 2 / 1.2-83
- 2 Manual override
- 3 Captive mounting screws
- 4 Solenoid coil can be repositioned by 90° regardless of manual override

Standard directional control valves  
ISO 5599/1


1.2

Ordering data						
Circuit symbol	Description	Voltage	ISO size	Part No.	Type	
	With D solenoid coil, normally closed, internal pilot air supply	24 V DC	4	12 459	MDH-5/3G- <sup>3</sup> / <sub>4</sub> -D-4-24DC	
		–		14 546	MDH-5/3G- <sup>3</sup> / <sub>4</sub> -D-4 <sup>1)</sup>	
		<b>Usable pilot valves:</b>				
		24 V DC	–	119 600	MDH-3/2-24DC	
		110 V AC	–	119 601	MDH-3/2-110AC	
	With D solenoid coil, normally exhausted, internal pilot air supply	24 V DC	4	12 460	MDH-5/3E- <sup>3</sup> / <sub>4</sub> -D-4-24DC	
		–		14 547	MDH-5/3E- <sup>3</sup> / <sub>4</sub> -D-4 <sup>1)</sup>	
		<b>Usable pilot valves:</b>				
		24 V DC	–	119 600	MDH-3/2-24DC	
		110 V AC	–	119 601	MDH-3/2-110AC	
230 V AC	–	119 602	MDH-3/2-230AC			
24 V DC/ 42 V AC	–	119 603	MDH-3/2-24DC/42AC			

1) Without pilot valve. The part number for the pilot valve must be quoted when ordering.  
Order example: 14 546 MDH-5/3G-<sup>3</sup>/<sub>4</sub>-D-4-119 602

# Pneumatic valves, ISO 5599-1

Type code

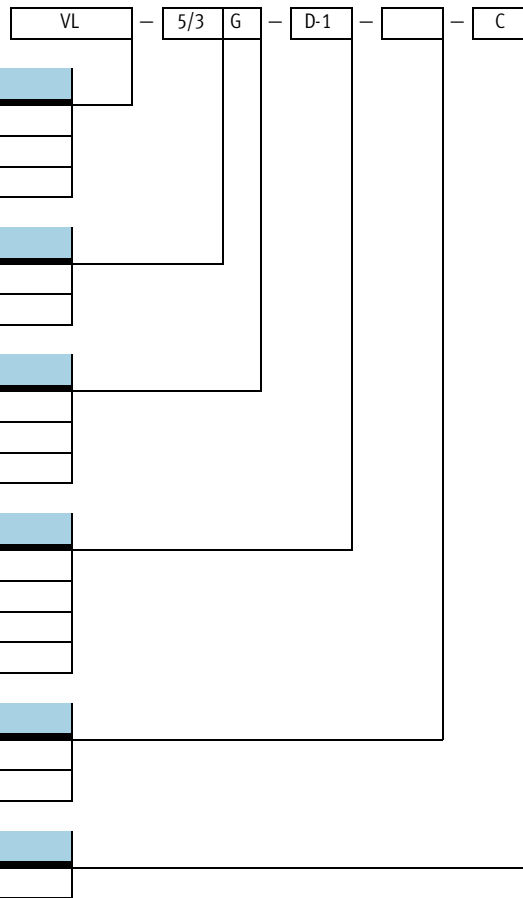




# Pneumatic valves, ISO 5599-1


Peripherals overview

## Individual mounting

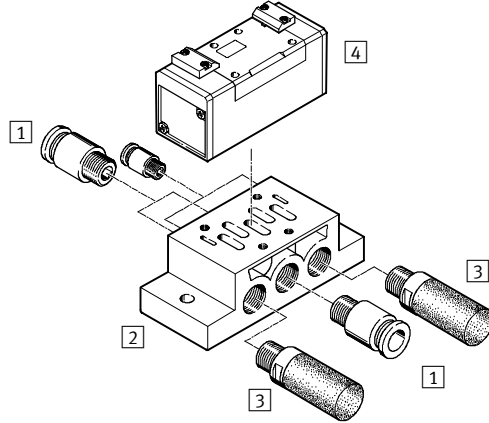

### Variants


I-5/...-3/4-D-4,  
VL-5/...-3/4-D-4



Accessories			
	Brief description	→ Page	
1	Push-in fitting QS	For connecting compressed air tubing with standard O.D.	Volume 3
2	Individual sub-base NAS/NAU	NAS – With lateral ports NAU – With ports underneath	2 / 1.2-70
3	Silencer	For fitting in exhaust ports	Volume 3
4	Pneumatic valve	Port pattern to ISO 5599-1	2 / 1.2-6

### Port pattern on sub-base to ISO 5599-1

Defined interfaces between valve and sub-base

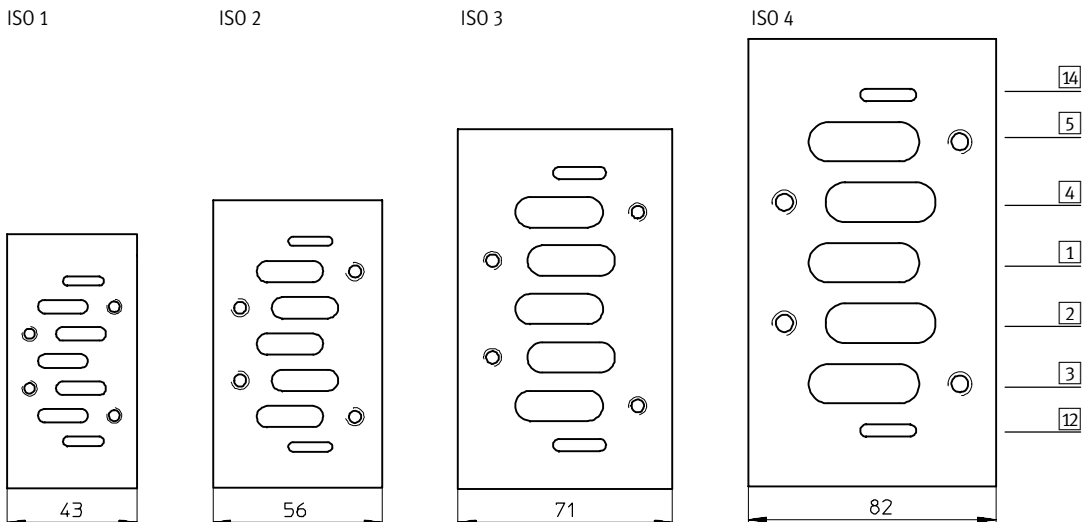


# Pneumatic valves, ISO 5599-1

Peripherals overview



## Manifold mounting

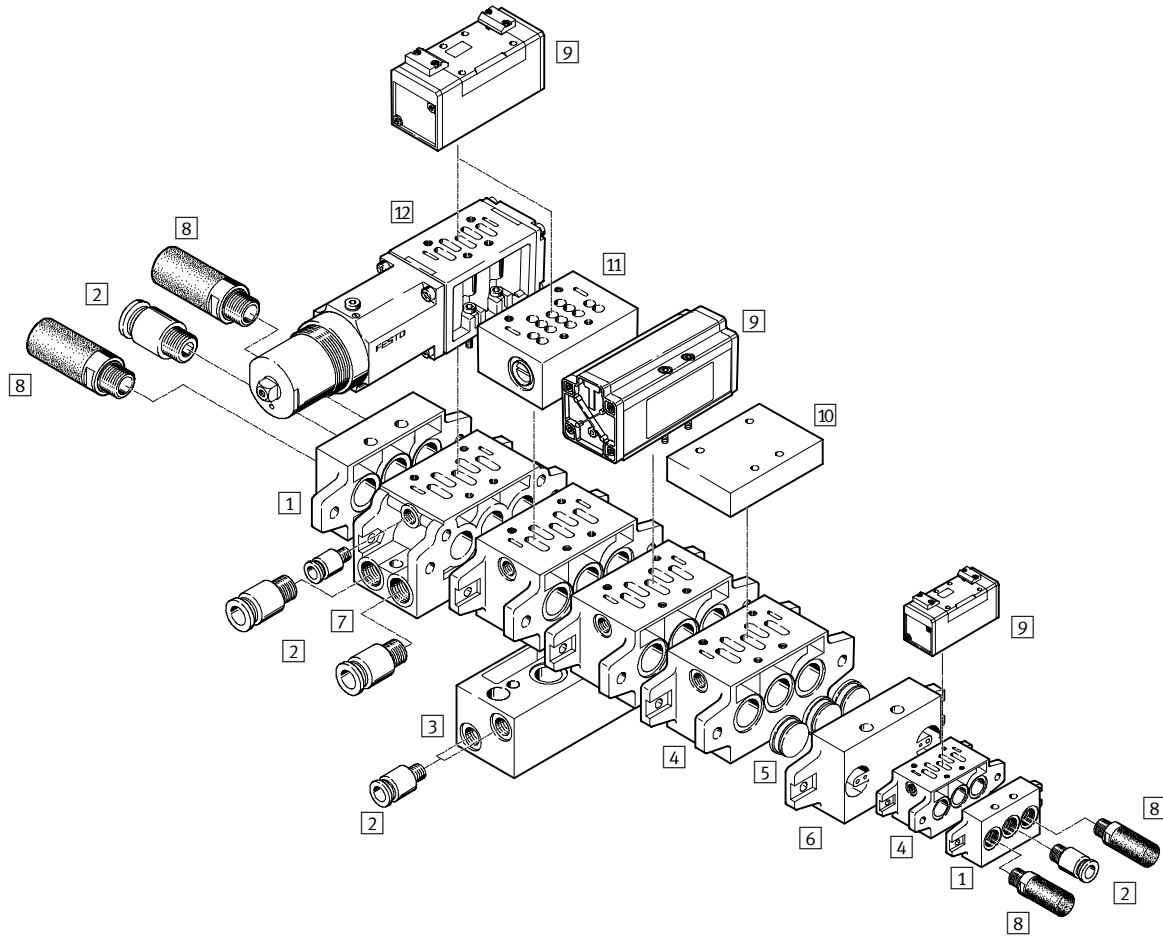

Standard directional control valves  
ISO 5599/1

1.2


# Pneumatic valves, ISO 5599-1

Peripherals overview

Accessories		
	Brief description	→ Page
1	End plate kit NEV	2 / 1.2-73
2	Push-in fitting QS	Volume 3
3	Angle connection block NAW	2 / 1.2-72
4	Manifold sub-base NAV	2 / 1.2-72
5	Isolating disc NSC	2 / 1.2-74
6	Intermediate plate NZV	2 / 1.2-76
7	Manifold sub-base for angle connection NAWW	2 / 1.2-73
8	Silencer	Volume 3
9	Pneumatic valve	Port pattern to ISO 5599-1
10	Blanking plate NDV	2 / 1.2-74
11	Throttle plate for ISO size 1, 2 and 3 GRO	2 / 1.2-77
12	Intermediate pressure regulator plate for ISO size 1, 2 and 3 LR-ZP	2 / 1.2-78

## Port pattern on sub-base to ISO 5599-1


Defined interfaces between valve and sub-base

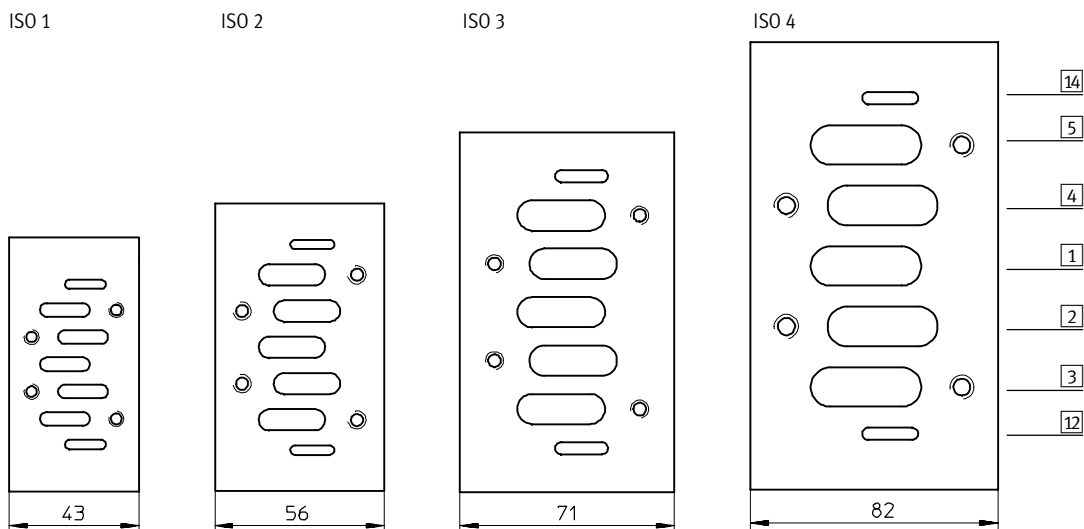


# Pneumatic valves VL, ISO 5599-1

Technical data – 5/2-way valves



-  - Flow rate  
1200 ... 6000 l/min

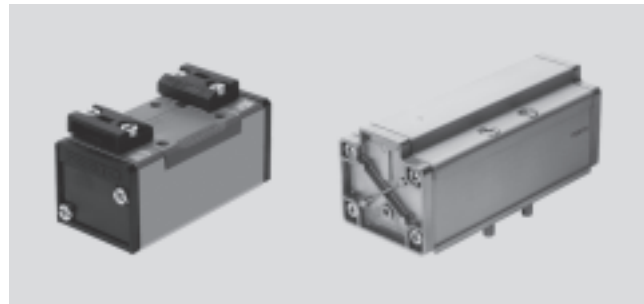

General technical data					
ISO size	1	2	3	4	
Valve function	5/2-way, single pilot				
Constructional design	Piston spool				
Sealing principle	Soft				
Actuation type	Pneumatic				
Type of reset	Mechanical or pneumatic spring				
Type of pilot control	Direct				
Direction of flow	Non-reversible				
Exhaust function	With flow control				
Manual override	None				
Type of mounting	Via through-holes				
Mounting position	Any				
Nominal size	[mm]	8	11	14.5	18
Standard nominal flow rate	[l/min]	1200	2300	4500	6000
Grid dimension	[mm]	43	56	71	82
Pneumatic connection on sub-base	1, 2, 3, 4, 5	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$	G $\frac{3}{4}$
	12, 14	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$
Product weight	[g]	290	550	810	1800
Noise level	[dB (A)]	85			

Operating and environmental conditions				
ISO size	1, 2, 3		4	
Type of reset	Pneumatic	Mechanical	Pneumatic	
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum			
Operating pressure	[bar]	2 ... 16	-0.9 ... 16	-0.9 ... +16
Pilot pressure	[bar]	2 ... 16	3 ... 16	3 ... 16
Ambient temperature	[°C]	-10 ... +60		
Temperature of medium	[°C]	-10 ... +60		


# Pneumatic valves VL, ISO 5599-1

Technical data – 5/2-way valves

Valve response times								
ISO size	1		2		3		4	
Type of reset	Pneumatic	Mechanical	Pneumatic	Mechanical	Pneumatic	Mechanical	Pneumatic	Mechanical
On	9	6	23	11	29	13	25	–
Off	18	23	39	39	36	43	90	–

## Materials

Sectional view (ISO size 1, 2, 3)

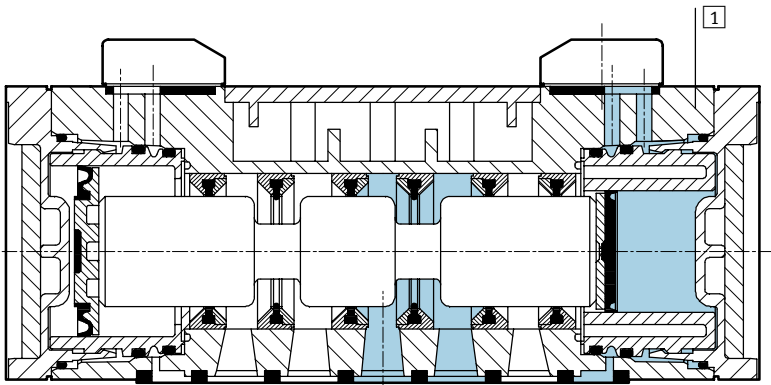

ISO size	1, 2, 3	4
1 Housing	Die-cast aluminium, polyacetate	Anodised aluminium, brass, polyurethane
– Seals	Nitrile rubber	Nitrile rubber, polytetrafluoroethylene carbon

# Pneumatic valves VL, ISO 5599-1

Technical data – 5/2-way valves




Standard directional control valves  
ISO 5599/1

1.2

## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

ISO size 1, 2, 3

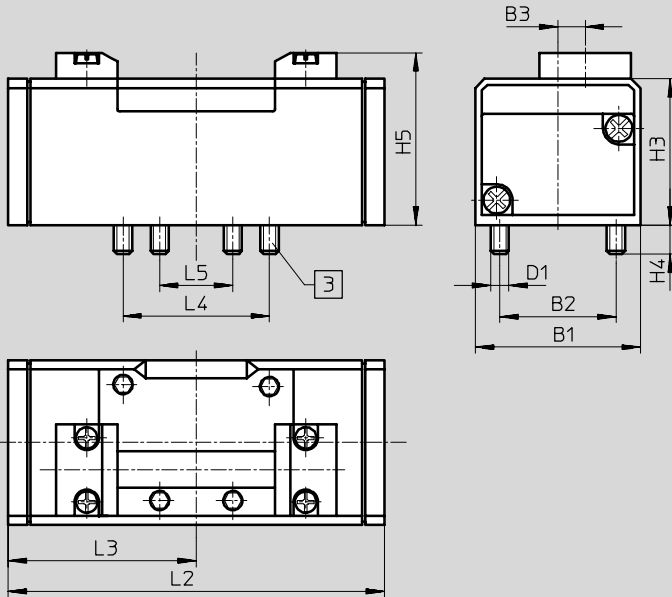

3 Captive mounting screws

Type	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
<b>ISO size 1</b>											
VL-5/2-...	42	28	6	M5	38	9	46.5	87.6	43.8	36	18
VL-5/2-...-FR								98			
<b>ISO size 2</b>											
VL-5/2-...	54	38	9	M6	48	9.5	56.5	123.4	61.7	48	24
VL-5/2-...-FR								140.7			
<b>ISO size 3</b>											
VL-5/2-...	65	48	12	M8	55	12	63.5	145.4	72.7	64	32
VL-5/2-...-FR								164.7			

# Pneumatic valves VL, ISO 5599-1


Technical data – 5/2-way valves



## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

ISO size 4

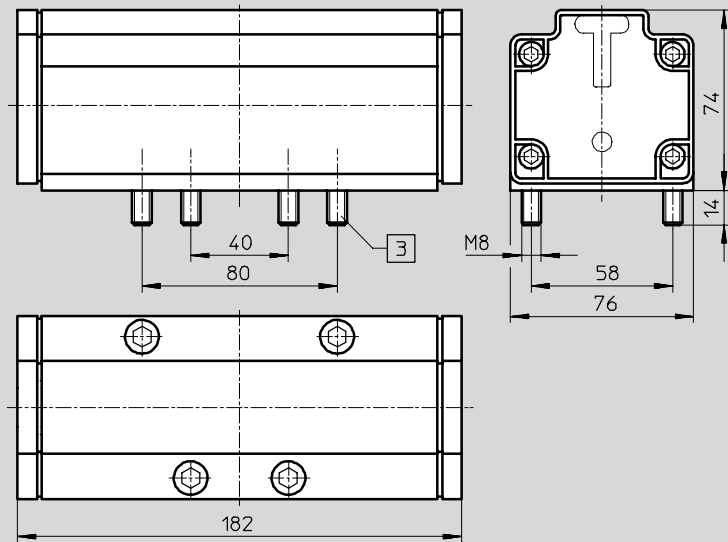

3 Captive mounting screws


## Ordering data


Circuit symbol	Description	ISO size	Part No.	Type
	Pneumatic reset	1	<b>151 009</b>	VL-5/2-D-1-C
		2	<b>151 845</b>	VL-5/2-D-2-C
		3	<b>151 864</b>	VL-5/2-D-3-C
		4	<b>12 461</b>	VL-5/2-3/4-D-4
	Mechanical reset	1	<b>151 014</b>	VL-5/2-D-1-FR-C
		2	<b>151 844</b>	VL-5/2-D-2-FR-C
		3	<b>151 863</b>	VL-5/2-D-3-FR-C

# Pneumatic valves J, ISO 5599-1

Technical data – 5/2-way valves, double pilot



-  - Flow rate  
1200 ... 6000 l/min

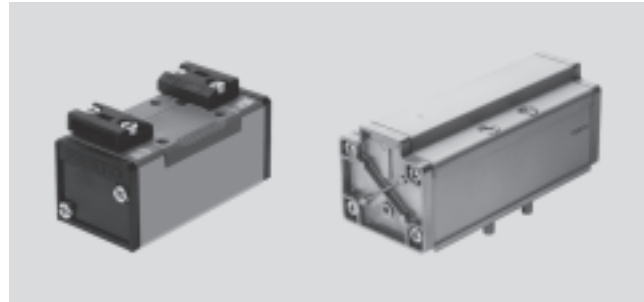

Standard directional control valves  
ISO 5599/1

1.2

General technical data					
ISO size	1	2	3	4	
Valve function	5/2-way, double pilot				
Constructional design	Piston spool				
Sealing principle	Soft				
Actuation type	Pneumatic				
Type of pilot control	Direct				
Direction of flow	Reversible				
Exhaust function	With flow control				
Manual override	None				
Type of mounting	Via through-holes				
Mounting position	Any				
Nominal size	[mm]	8	11	14.5	18
Standard nominal flow rate	[l/min]	1200	2300	4500	6000
Grid dimension	[mm]	43	56	71	82
Pneumatic connection on sub-base	1, 2, 3, 4, 5	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$	G $\frac{3}{4}$
	12, 14	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$
Product weight	[g]	290	550	810	1800
Noise level	[dB (A)]	85			

Operating and environmental conditions	
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum
Operating pressure	[bar] -0.9 ... 16
Pilot pressure	[bar] 2 ... 16
Ambient temperature	[°C] -10 ... +60
Temperature of medium	[°C] -10 ... +60

Valve response times [ms]					
ISO size	1		2, 3		4
	Dominant signal at 14		Dominant signal at 14		
	6	6/4	8	8	20



# Pneumatic valves J, ISO 5599-1

Technical data – 5/2-way valves, double pilot




Standard directional control valves  
ISO 5599/1

1.2

## Materials

Sectional view (ISO size 4)

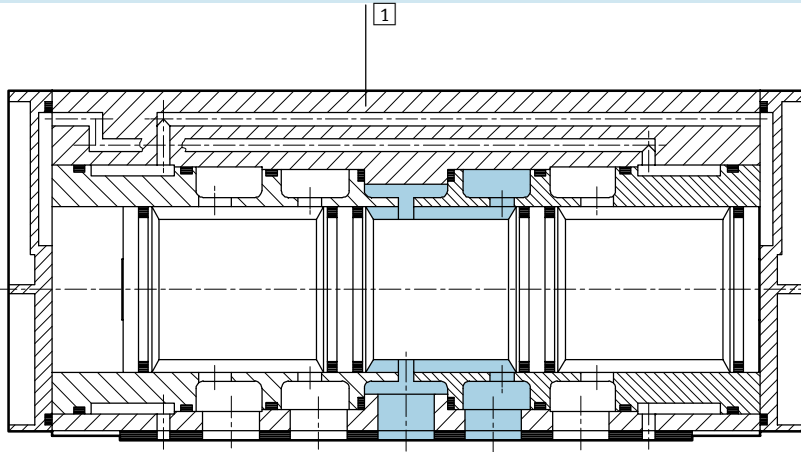


ISO size	1, 2, 3	4
1 Housing	Die-cast aluminium, polyacetate	Anodised aluminium, brass, polyurethane
- Seals	Nitrile rubber	Nitrile rubber, polytetrafluoroethylene carbon

## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

ISO size 1, 2, 3

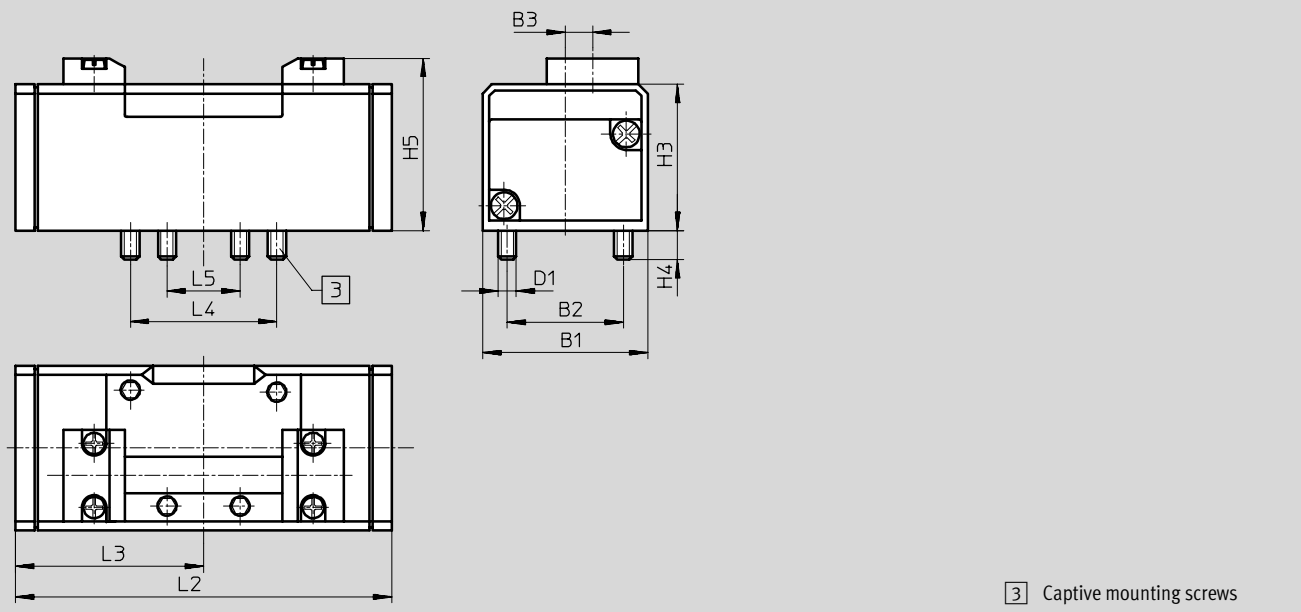

3 Captive mounting screws

ISO size	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
1	42	28	6	M5	38	9	46.5	87.6	43.8	36	18
2	54	38	9	M6	48	9.5	56.5	123.4	61.7	48	24
3	65	48	12	M8	55	12	63.5	145.4	72.7	64	32

# Pneumatic valves J, ISO 5599-1

Technical data – 5/2-way valves, double pilot




Standard directional control valves  
ISO 5599/1

1.2

## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

ISO size 4

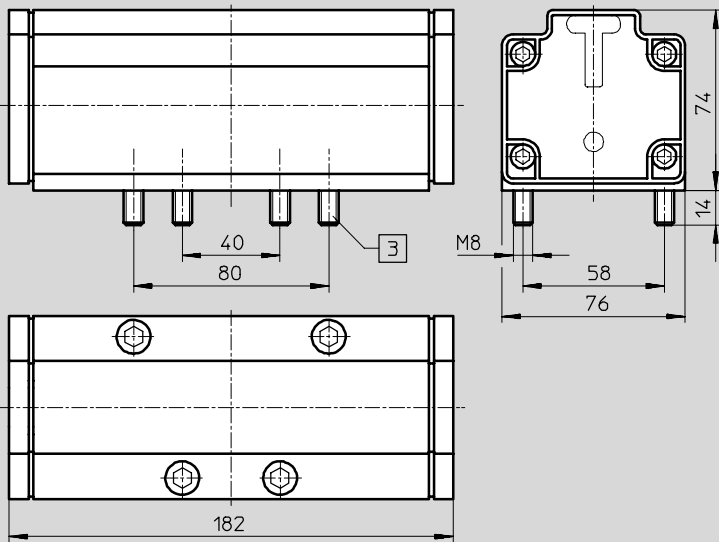

3 Captive mounting screws


## Ordering data


Circuit symbol	Description	ISO size	Part No.	Type
		1	151 007	J-5/2-D-1-C
		2	151 846	J-5/2-D-2-C
		3	151 865	J-5/2-D-3-C
		4	12 462	J-5/2-3/4-D-4
	With dominant signal at 14	1	151 008	JD-5/2-D-1-C
		2	151 847	JD-5/2-D-2-C
		3	151 866	JD-5/2-D-3-C

# Pneumatic valves VL, ISO 5599-1

Technical data – 5/3-way valves

FESTO

-  - Flow rate  
1200 ... 6000 l/min

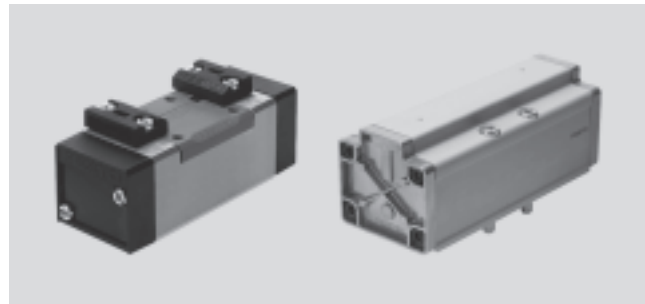

Standard directional control valves  
ISO 5599/1

1.2

General technical data				1	2	3	4
ISO size							
Valve function				5/3-way, single pilot			
Constructional design				Piston spool			
Sealing principle				Soft			
Actuation type				Pneumatic			
Type of reset				Mechanical spring			
Type of pilot control				Direct			
Pilot air supply				Internal			
Direction of flow				Reversible			
Exhaust function				With flow control			
Manual override				None			
Type of mounting				Via through-holes			
Mounting position				Any			
Nominal size		[mm]		8	11	14.5	18
Standard nominal flow rate	Closed	[l/min]		1200	2300	4100	6000
		Exhausted	[l/min]			4600	4800
		Pressurised	[l/min]			4100	–
Grid dimension		[mm]		43	56	71	82
Pneumatic connection on sub-base	1, 2, 3, 4, 5			G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$	G $\frac{3}{4}$
	12, 14			G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$
Product weight		[g]		320	825	910	2000
Noise level		[dB (A)]		85			

Operating and environmental conditions	
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum
Operating pressure	[bar] -0.9 ... +16
Pilot pressure	[bar] 3 ... 16
Ambient temperature	[°C] -10 ... +60
Temperature of medium	[°C] -10 ... +60

Valve response times								
ISO size	1		2		3		4	
	On	Off	On	Off	On	Off	On	Off
Closed	7	45	15	56	17	61	40	130
Exhausted	7	45	16	59	18	63	40	130
Pressurised	7	45	15	57	16	60	–	–

# Pneumatic valves VL, ISO 5599-1

Technical data – 5/3-way valves




Standard directional control valves  
ISO 5599/1

1.2

## Materials

Sectional view (ISO size 4)

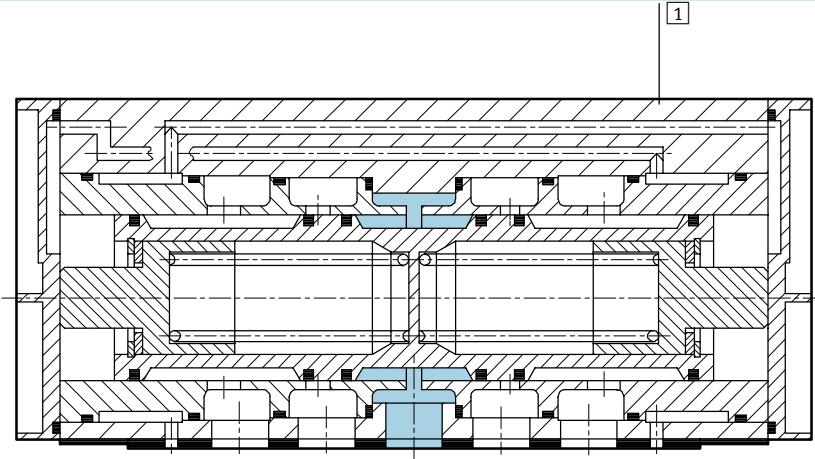


ISO size	1, 2, 3	4
1 Housing	Die-cast aluminium, polyacetate	Anodised aluminium, brass, polyurethane
– Seals	Nitrile rubber	Nitrile rubber, polytetrafluoroethylene carbon

## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

ISO size 1, 2 and 3

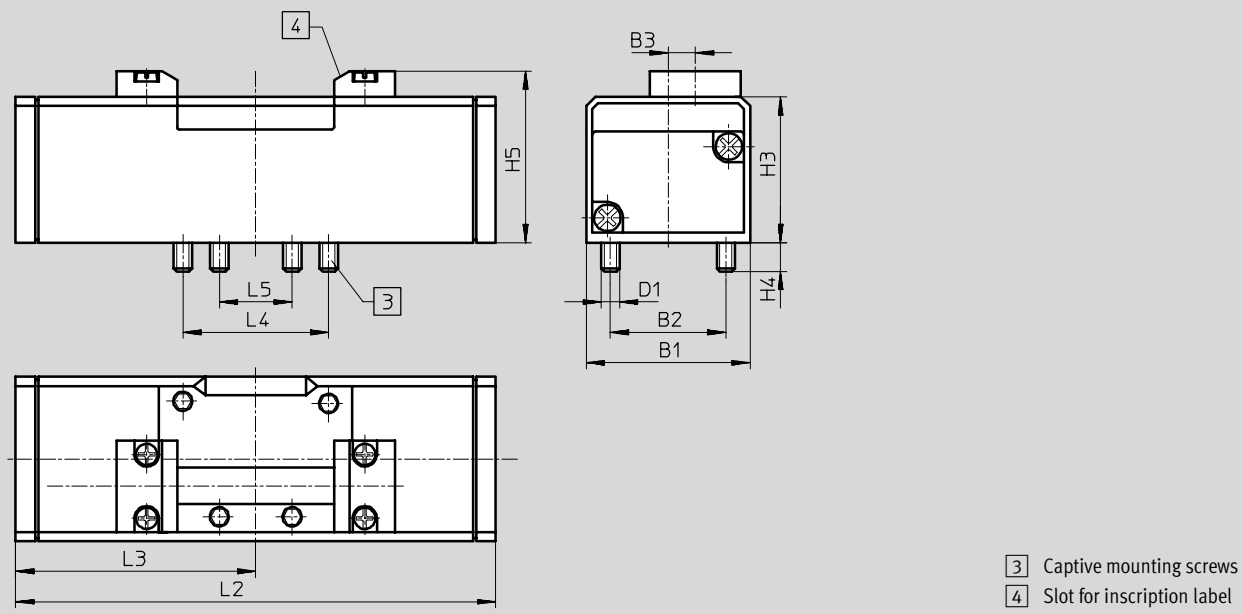

- 3 Captive mounting screws
- 4 Slot for inscription label

ISO size	B1	B2	B3	D1	H3	H4	H5	L2	L3	L4	L5
1	42	28	6	M5	38	9	46.5	108.4	54.2	36	18
2	54	38	9	M6	48	9.5	56.5	158	79	48	24
3	65	48	12	M8	55	12	63.5	184	92	64	32

# Pneumatic valves VL, ISO 5599-1

Technical data – 5/3-way valves



**Dimensions** Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

ISO size 4

3 Captive mounting screws

Standard directional control valves  
ISO 5599/1

1.2

Ordering data				
Circuit symbol	Description	ISO size	Part No.	Type
	Normally closed, mechanical reset	1	151 010	VL-5/3G-D-1-C
		2	151 848	VL-5/3G-D-2-C
		3	151 867	VL-5/3G-D-3-C
		4	12 463	VL-5/3G-¾-D-4
	Normally exhausted, mechanical reset	1	151 011	VL-5/3E-D-1-C
		2	151 849	VL-5/3E-D-2-C
		3	151 868	VL-5/3E-D-3-C
		4	12 464	VL-5/3E-¾-D-4
	Normally pressurised, mechanical reset	1	151 012	VL-5/3B-D-1-C
		2	151 850	VL-5/3B-D-2-C
		3	151 869	VL-5/3B-D-3-C

# Solenoid/pneumatic valves, ISO 5599-1

Accessories



## Individual sub-base

### NAS

Lateral ports


Material:

Size 1, 2, 3

Die-cast aluminium

Size 4

Anodised aluminium

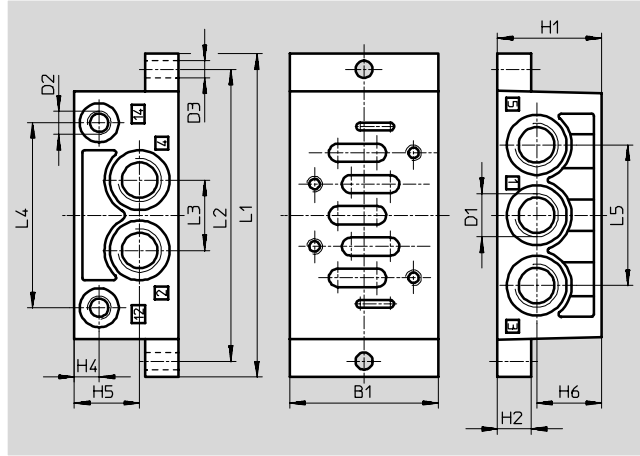

Dimensions and ordering data																	
ISO size	B1	D1	D2	D3 ∅	H1	H2	H4	H5	H6	L1	L2	L3	L4	L5	Weight [g]	Part No.	Type
1	48	G $\frac{1}{4}$	G $\frac{1}{8}$	5.5	32	10	9	20.3	20.3	110	98	23	60	46	190	9 484	NAS- $\frac{1}{4}$ -1A-ISO <sup>1)</sup>
2	57	G $\frac{3}{8}$	G $\frac{1}{8}$	6.6	40	13	9	25	25	124	112	27	71	54	300	11 310	NAS- $\frac{3}{8}$ -2A-ISO <sup>1)</sup>
3	71	G $\frac{1}{2}$	G $\frac{1}{8}$	6.6	32	18	9	16	16	149	136	32	91	64	360	10 336	NAS $\frac{1}{2}$ -3A-ISO <sup>1)</sup>
4	85	G $\frac{3}{4}$	G $\frac{1}{8}$	9	42	19	9	21	21	186	170	42	111	84	1260	152 813	NAS- $\frac{3}{4}$ -4A-ISO

1) Free of copper, PTFE and silicone

General technical data				
ISO size	1	2	3	4
Type of mounting	2 through-holes in housing			
Pneumatic connection	1, 2, 3, 4, 5	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
	12, 14	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$

# Solenoid/pneumatic valves, ISO 5599-1



Accessories

## Individual sub-base

**NAU**

Ports underneath


Material:

Size 1, 2, 3

Die-cast aluminium

Size 4

Anodised aluminium

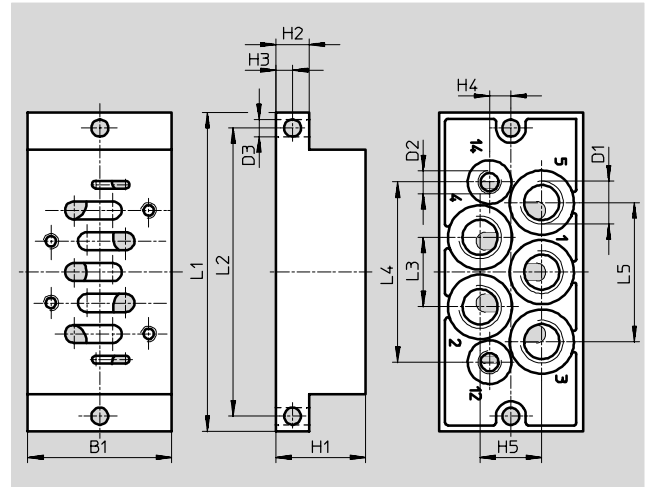

### Dimensions and ordering data

ISO size	B1	D1	D2	D3 Ø	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5	Weight [g]	Part No.	Type
1	46	G $\frac{1}{4}$	G $\frac{1}{8}$	5.5	30	10	5	7.5	20	110	98	23	60.7	46	280	9 485	NAU- $\frac{1}{4}$ -1B-ISO <sup>1)</sup>
2	56	G $\frac{3}{8}$	G $\frac{1}{8}$	6.6	35	13	6.5	8.3	24	124	112	27	70	54	450	11 416	NAU- $\frac{3}{8}$ -2B-ISO <sup>1)</sup>
3	71	G $\frac{1}{2}$	G $\frac{1}{8}$	6.6	32	18	9	10	30	149	136	32	90	66	660	10 337	NAU- $\frac{1}{2}$ -3B-ISO <sup>1)</sup>
4	85	G $\frac{3}{4}$	G $\frac{1}{8}$	9	28	19	9.5	12	37	186	170	42	111	84	1080	152 814	NAU- $\frac{3}{4}$ -4B-ISO

1) Free of copper, PTFE and silicone

### General technical data

ISO size	1	2	3	4
Type of mounting	2 through-holes in housing			
Pneumatic connection	1, 2, 3, 4, 5	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{2}$
	12, 14	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$

Standard directional control valves  
ISO 5599/1

1.2

# Solenoid/pneumatic valves, ISO 5599-1

Accessories



## Manifold sub-base NAV

Ports underneath

Material:

Size 1, 2, 3

Die-cast aluminium

Size 4

Anodised aluminium



Ordering data					
ISO size	Pneumatic connection		Weight [g]	Part No.	Type
	1, 2, 3, 4, 5	12, 14			
1	G $\frac{1}{4}$	G $\frac{1}{8}$	240	10 173	NAV- $\frac{1}{4}$ -1C-ISO
2	G $\frac{3}{8}$	G $\frac{1}{8}$	400	11 305	NAV- $\frac{3}{8}$ -2C-ISO
3	G $\frac{1}{2}$	G $\frac{1}{8}$	700	10 175	NAV- $\frac{1}{2}$ -3C-ISO
4	G $\frac{3}{4}$	G $\frac{1}{8}$	1400	11 139	NAV- $\frac{3}{4}$ -4C-ISO

Dimensions → 2 / 1.2-75

## Angle connection block NAW

Ports at side and underneath

Material:

Size 1, 2, 3

Die-cast aluminium

Size 4

Anodised aluminium



Ordering data					
ISO size	Pneumatic connection		Weight [g]	Part No.	Type
	1, 2, 3, 4, 5	12, 14			
1	G $\frac{1}{4}$	G $\frac{1}{8}$	360	11 304	NAW- $\frac{1}{4}$ -1E-ISO <sup>1)</sup>
2	G $\frac{3}{8}$	G $\frac{1}{8}$	600	11 307	NAW- $\frac{3}{8}$ -2E-ISO <sup>1)</sup>
3	G $\frac{1}{2}$	G $\frac{1}{8}$	920	11 309	NAW- $\frac{1}{2}$ -3E-ISO <sup>1)</sup>
4	G $\frac{3}{4}$	G $\frac{1}{8}$	1550	11 141	NAW- $\frac{3}{4}$ -4E-ISO

Dimensions → 2 / 1.2-75

1) Free of copper, PTFE and silicone



# Solenoid/pneumatic valves, ISO 5599-1

Accessories

## Manifold sub-base for angle connection NAVW

Ports at side and underneath

Material:

Size 1, 2, 3

Die-cast aluminium

Size 4

Anodised aluminium



Ordering data					
ISO size	Pneumatic connection		Weight [g]	Part No.	Type
	1, 2, 3, 4, 5	12, 14			
1	G <sup>1</sup> / <sub>4</sub>	G <sup>1</sup> / <sub>8</sub>	320	152 789	NAVW- <sup>1</sup> / <sub>4</sub> -1-ISO
2	G <sup>3</sup> / <sub>8</sub>	G <sup>1</sup> / <sub>8</sub>	550	152 790	NAVW- <sup>3</sup> / <sub>8</sub> -2-ISO
3	G <sup>1</sup> / <sub>2</sub>	G <sup>1</sup> / <sub>8</sub>	1020	152 791	NAVW- <sup>1</sup> / <sub>2</sub> -3-ISO

Dimensions → 2 / 1.2-75

## End plate kit NEV


Material:

Size 1, 2, 3

Die-cast aluminium

Size 4

Anodised aluminium

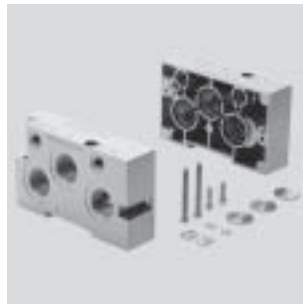

Ordering data					
ISO size	Pneumatic connection		Weight [g]	Part No.	Type
	1, 2, 3, 4, 5	12, 14			
1	G <sup>3</sup> / <sub>8</sub>	–	280	10 174	NEV-1DA/DB-ISO <sup>1)</sup>
2	G <sup>1</sup> / <sub>2</sub>	–	450	11 306	NEV-2DA/DB-ISO <sup>1)</sup>
3	G1	–	760	10 176	NEV-3DA/DB-ISO <sup>1)</sup>
4	G1	–	1390	11 140	NEV-4DA/DB-ISO

Dimensions → 2 / 1.2-75

1) Free of copper, PTFE and silicone

# Solenoid/pneumatic valves, ISO 5599-1

Accessories



## Blanking plate NDV

Material:

Size 1, 2, 3

Steel

Size 4

Wrought aluminium alloy



Ordering data			
ISO size	Weight [g]	Part No.	Type
1	113	9 489	NDV-1-ISO
2	166	11 308	NDV-2-ISO
3	314	10 340	NDV-3-ISO
4	1480	11 142	NDV-4-ISO

Dimensions → 2 / 1.2-75

## Isolating disc NSC

Material:

Wrought aluminium alloy



Ordering data					
ISO size	Pneumatic connection		Weight [g]	Part No.	Type
	1, 2, 3	12, 14			
1	1/4	–	6	11 550	NSC-1/4-1-ISO <sup>1)</sup>
2	3/8	–	9.2	11 908	NSC-3/8-2-ISO <sup>1)</sup>
3	1/2	–	20	11 551	NSC-1/2-3-ISO <sup>1)</sup>
4	3/4	–	24	11 699	NSC-3/4-4-ISO

Dimensions → 2 / 1.2-75

1) Free of copper, PTFE and silicone


# Solenoid/pneumatic valves, ISO 5599-1

Accessories



## Dimensions – Manifold mounting

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

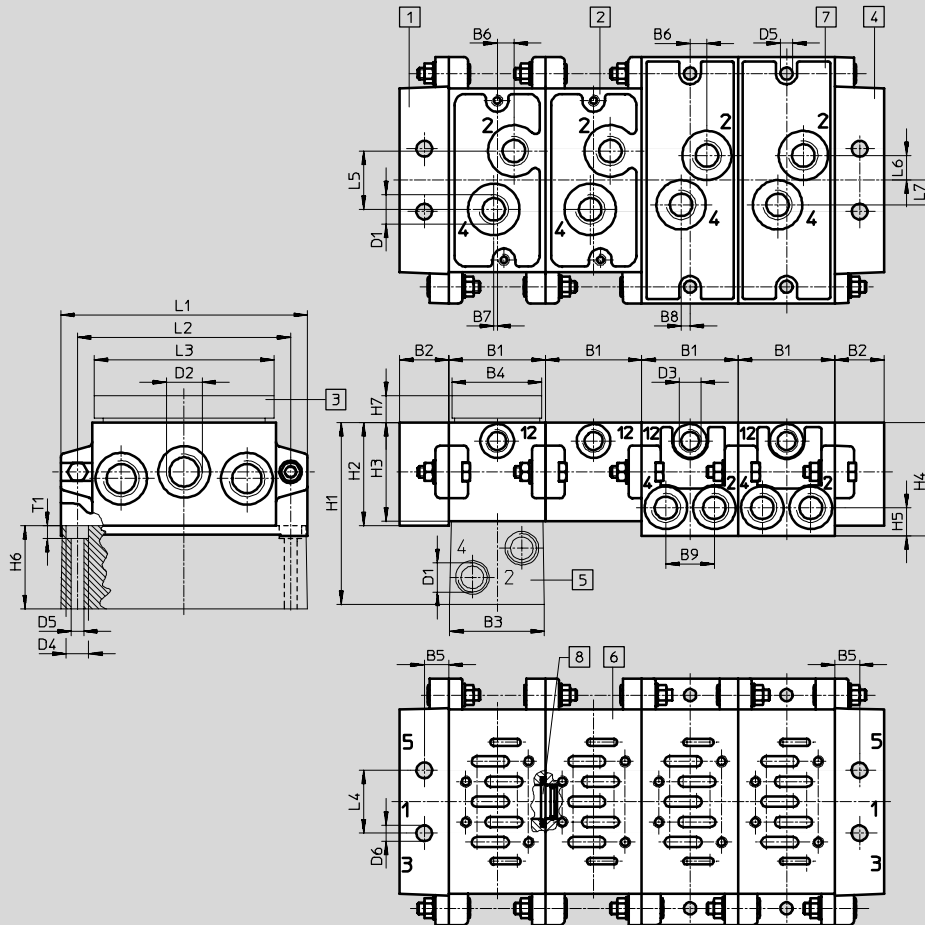

- |                         |                              |   |                      |
|-------------------------|------------------------------|---|----------------------|
| 1 Left-hand end plate   | 4 Right-hand end plate       | 6 Port pattern to ISO 5599-1                  | 8 Isolating disc NSC |
| 2 Manifold sub-base NAV | 5 Angle connection block NAW | 7 Manifold sub-base for angle connection NAWW |                      |
| 3 Blanking plate NDV    |                              |   |                      |

ISO size	B1	B2	B3	B4	B5	B6	B7	B8	B9	D1	D2	D3	D4	D5	D6
1	43	22	42	40	11	7.5	1.5	4	21.6	G $\frac{1}{4}$	G $\frac{3}{8}$	G $\frac{1}{8}$	10	5.5	7
2	56	26	55	50	13	6	5	6	27	G $\frac{3}{8}$	G $\frac{1}{2}$	G $\frac{1}{8}$	11	6.6	9
3	71	30	70	70	15	8	6	6	35.5	G $\frac{1}{2}$	G1	G $\frac{1}{8}$	15	9	12
4	82	30	80	80	15	9	8	-	-	G $\frac{3}{4}$	G1	G $\frac{1}{8}$	15	9	12

ISO size	H1	H2	H3	H4	H5	H6	H7	L1	L2	L3	L4	L5	L6	L7	T1
1	81	46	44	50.5	12.5	37	5	110	95	80	28	26	11	11	5.7
2	85	47	45	60	15	40	5	135	115	96	35	30	15	14	6.8
3	99	56	54	66	17.5	45	5	190	168	120	52	38	19	19	9
4	120	58	55	-	-	65	5	215	184	-	56	52	-	-	9

# Solenoid/pneumatic valves, ISO 5599-1

Accessories




## Intermediate plate NZV

for connecting manifold sub-bases of different sizes

Material:


Die-cast aluminium, anodised  
Free of copper, PTFE and silicone

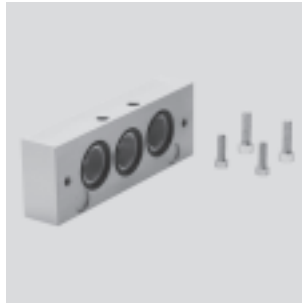

### Dimensions


Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

Intermediate plates NZV – ISO size 1, 2, 3

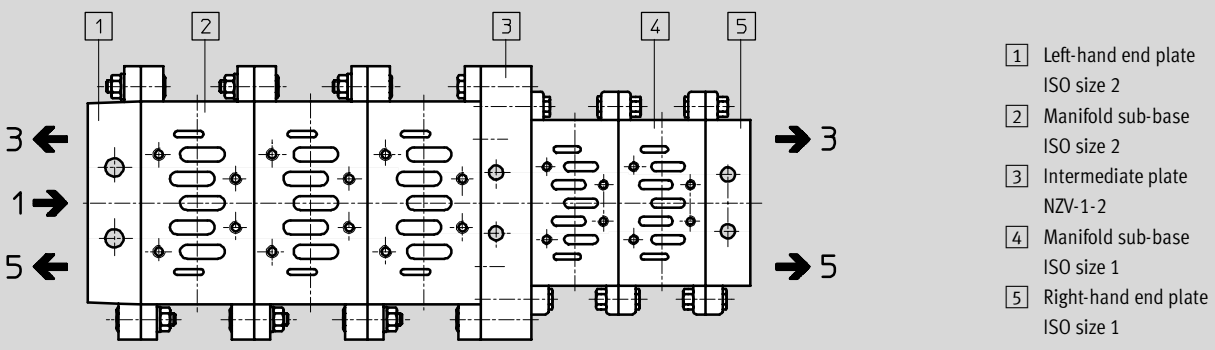

### NZV-1-2

### NZV-3-2/1

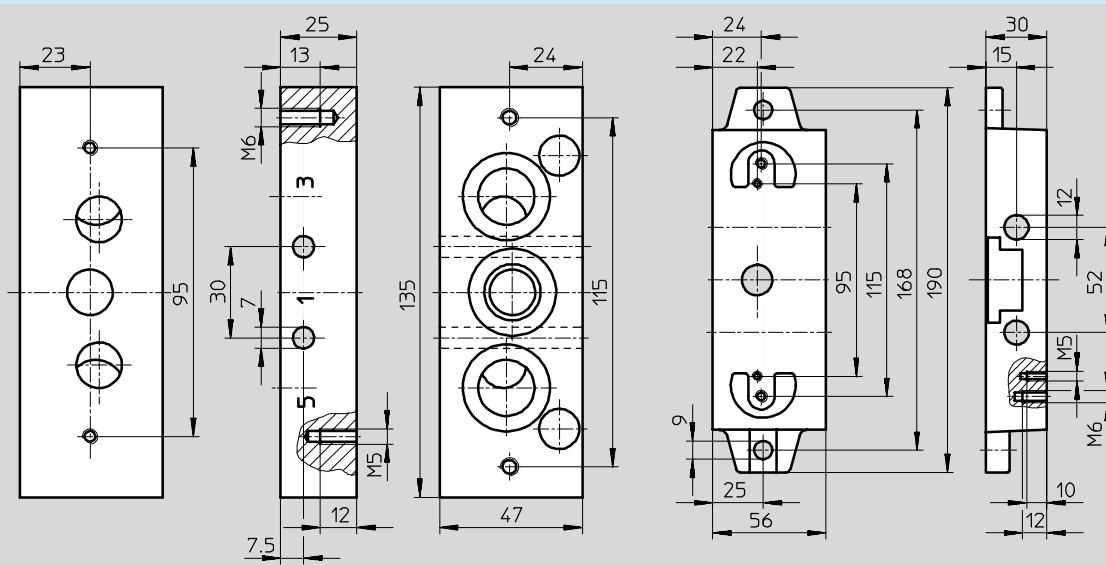

### Ordering data

Weight [g]	Part No.	Type
For manifold sub-bases ISO size 1 and 2		
393	164 940	NZV-1-2
For manifold sub-bases ISO size 1 and 3 or size 2 and 3		
473	12 911	NZV-3-2/1

# Solenoid/pneumatic valves, ISO 5599-1

Accessories

## Throttle plates GRO




Exhaust air restrictor for 3 and 5

Material:


Anodised aluminium, brass



### Standard nominal flow rate $q_{nN}$ as a function of the turns $n$ of the adjusting screw

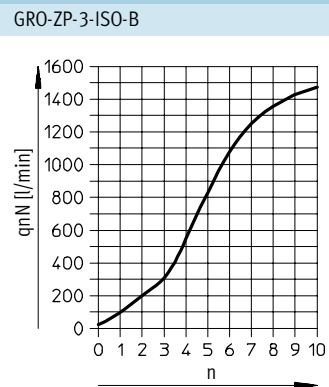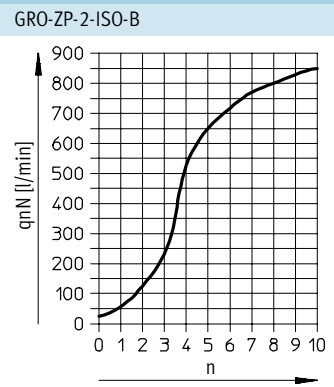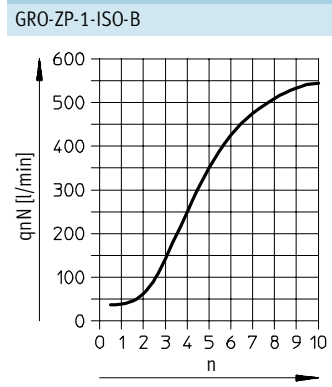

### Dimensions Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

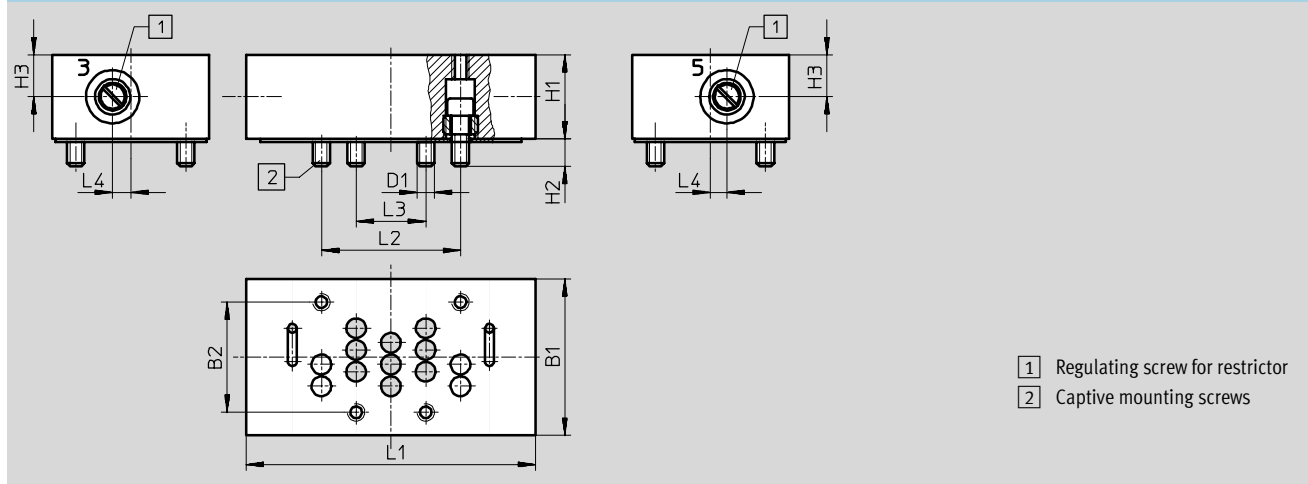

Dimensions and ordering data													
ISO size	D1	B1	B2	H1	H2	H3	L1	L2	L3	L4	Weight [g]	Part No.	Type
1	M5	42	28	25	6.5	12.5	77	36	18	6	230	151 705	GRO-ZP-1-ISO-B
2	M6	54	38	29	9.5	14.5	100	48	24	6.3	440	151 706	GRO-ZP-2-ISO-B
3	M8	70	48	33	12	16.5	132	64	32	7	850	151 707	GRO-ZP-3-ISO-B

# Solenoid/pneumatic valves, ISO 5599-1

Accessories



## Intermediate pressure regulator plate LR-ZP



Material:  
Housing:  
Die-cast aluminium, steel  
Seals:  
Nitrile rubber





### Flow rate $q_n$ as a function of the output pressure $p_2$

LR-ZP-A-D-1, LR-ZP-B-1,  
LR-ZP-A/B-1

LR-ZP-P-D-1



LR-ZP-A-D-2, LR-ZP-B-2,  
LR-ZP-A/B-2

LR-ZP-P-D-2

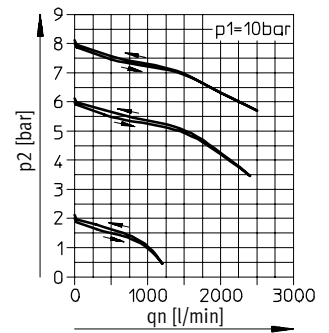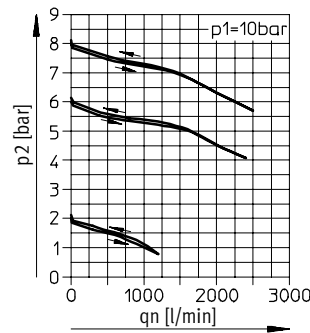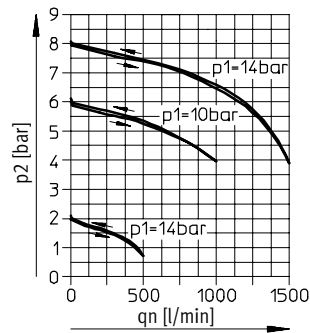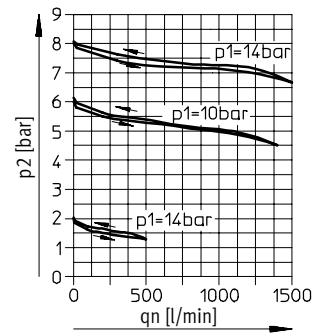


LR-ZP-A-D-3, LR-ZP-B-3,  
LR-ZP-A/B-3

LR-ZP-P-D-3

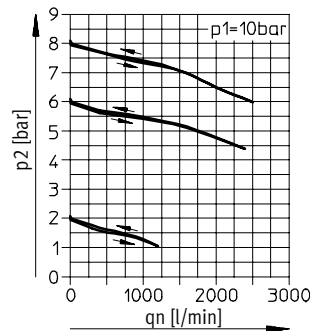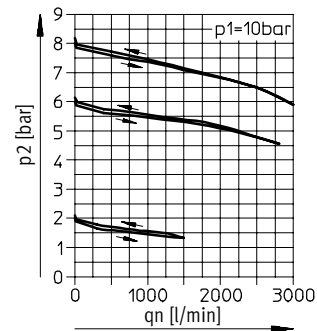


### Pressure regulation


Port 1 regulated

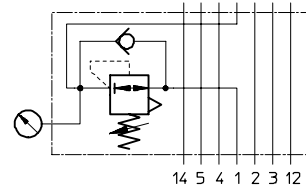


Port 2 regulated

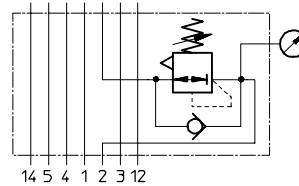

Port 4 regulated

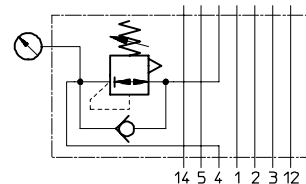

Ports 2 and 4 regulated

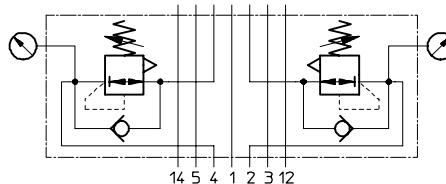

# Solenoid/pneumatic valves, ISO 5599-1


Accessories

FESTO

## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

Intermediate pressure regulator plates LR-ZP – ISO size 1, 2, 3

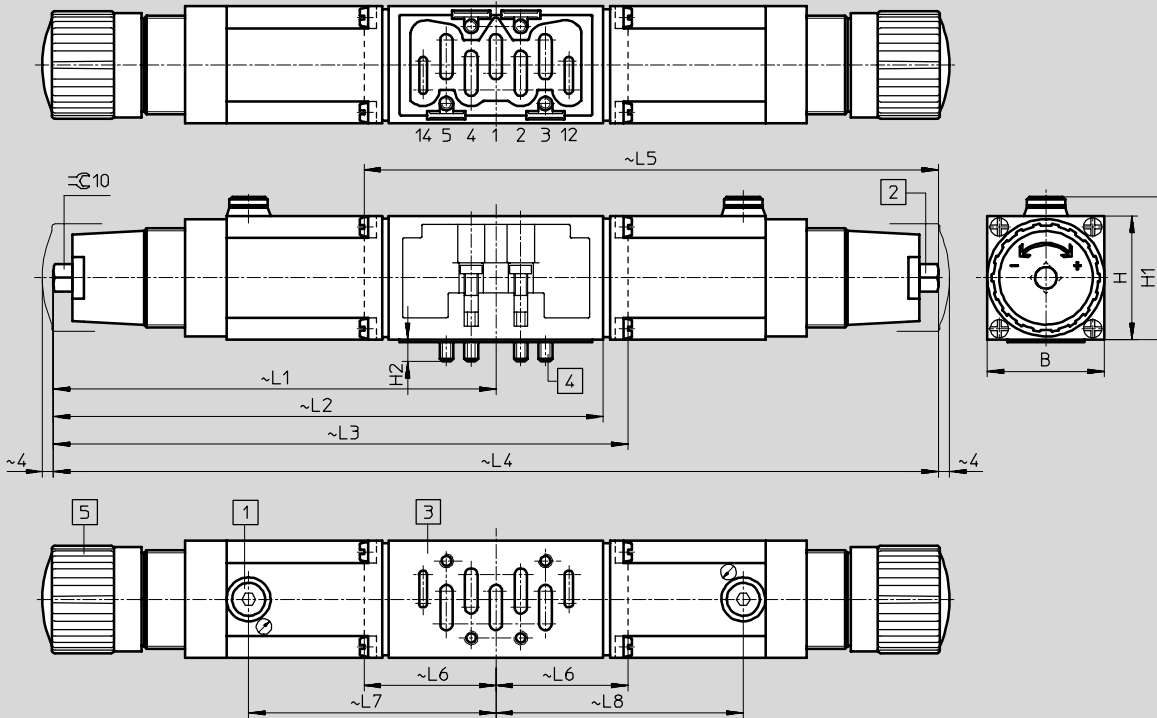

- |  |                              |                   |
|--|------------------------------|-------------------|
| 1 Pressure gauge connection<br>G $\frac{1}{8}$ | 3 Port pattern to ISO 5599-1 | 5 Regulating knob |
| 2 Regulating screw                             | 4 Captive mounting screws    |                   |

Standard directional control valves  
ISO 5599/1

1.2

# Solenoid/pneumatic valves, ISO 5599-1

FESTO

Accessories

Standard directional control valves  
ISO 5599/1  
1.2

Dimensions and ordering data																				
Regulated port	B	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	Weight [g]	Part No.	Type					
<b>ISO size 1</b>																				
1	42.6	45	52	8	161	-	209	-	-	48	90	-	520	35 966	LR-ZP-P-D-1					
																	165 859	LR-ZP-P-D-1-CT <sup>1)</sup>		
2												209	48	-	90	520	35 424	LR-ZP-B-D-1		
																		165 856	LR-ZP-B-D-1-CT <sup>1)</sup>	
4					161	-	-	322	-	-	90	90	520	35 969	LR-ZP-A-D-1					
															165 850	LR-ZP-A-D-1-CT <sup>1)</sup>				
2, 4					161	200	-	-	-	-	90	-	840	35 427	LR-ZP-A/B-D-1					
															165 853	LR-ZP-A/B-D-1-CT <sup>1)</sup>				
<b>ISO size 2</b>																				
1	54	58	62.5	10	188	-	247	-	-	-	105.5	-	960	35 967	LR-ZP-P-D-2					
																		165 860	LR-ZP-P-D-2-CT <sup>1)</sup>	
2									-	-	-	-	247	59	-	105.5	960	35 425	LR-ZP-B-D-2	
																			165 857	LR-ZP-B-D-2-CT <sup>1)</sup>
4					188	-	-	376	-	-	105.5	105.5	960	35 970	LR-ZP-A-D-2					
															165 851	LR-ZP-A-D-2-CT <sup>1)</sup>				
2, 4					188	233	-	-	-	-	105.5	-	1490	35 428	LR-ZP-A/B-D-2					
															165 854	LR-ZP-A/B-D-2-CT <sup>1)</sup>				
<b>ISO size 3</b>																				
1	70	63	65	14	201.5	-	274	-	-	-	119	-	1220	35 968	LR-ZP-P-D-3					
																			165 861	LR-ZP-P-D-3-CT <sup>1)</sup>
2											-	-	-	274	72.5	-	119	1220	35 426	LR-ZP-B-D-3
																				165 858
4						-	-	403	-	-	119	119	1220	35 971	LR-ZP-A-D-3					
															165 852	LR-ZP-A-D-3-CT <sup>1)</sup>				
2, 4						260	-	-	-	-	119	-	1770	35 429	LR-ZP-A/B-D-3					
															165 855	LR-ZP-A/B-D-3-CT <sup>1)</sup>				

1) Free of copper, PTFE and silicone

Ordering data – Pressure gauge for intermediate pressure regulator plates LR-ZP					
ISO size	Weight [g]	Part No.	Type		
1, 2, 3	64.5	345 395	MA-40-16-1/8		




# Solenoid/pneumatic valves, ISO 5599-1



Accessories

## Manual override tool AHB


Material:  
Polymer

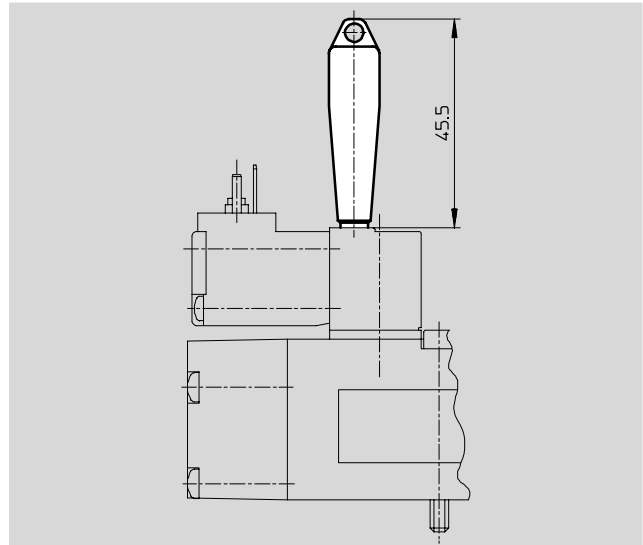

Ordering data			
For valve	Weight [g]	Part No.	Type
MEBH	5	157 601	AHB-MEB
MN1H/MFH	10	157 651	AHB-MD/MF/MV

## Inscription labels IBS-9x17

Material:  
Polymer

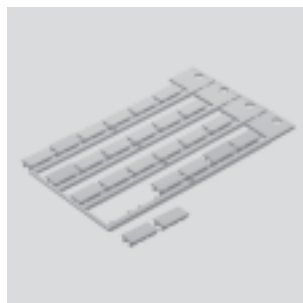

Ordering data		
	Part No.	Type
Inscription label for valves (24 in frames included in scope of delivery)	161 937	IBS-9x17

Standard directional control valves  
ISO 5599/1

1.2

 Core Range



# Solenoid/pneumatic valves, ISO 5599-1




Accessories

**FESTO**

Standard directional control valves  
ISO 5599/1

1.2

Ordering data		Part No.	Type
<b>Push-in fittings QS</b>			
		→	Volume 3
<b>Silencers</b>			
		→	Volume 3




Ordering data – Solenoid coils			Technical data → 2 / 7.1-0	
	Voltage	Cable length [m]	Part No.	Type
<b>F solenoid coils for valves MFH, JMFH</b>				
	12 V DC	–	34 410	MSFG-12DC-OD
	24 V DC and 42 V AC, 50 ... 60 Hz	–	34 411	MSFG-24DC/42AC-OD
	42 V DC	–	34 413	MSFG-42DC-OD
	24 V AC	–	34 415	MSFG-24AC-OD
	48 V AC, 50 ... 60 Hz	–	34 418	MSFW-48AC-OD
	110 V AC, 50 ... 60 Hz and 120 V AC, 60 Hz	–	34 420	MSFW-110AC-OD
	230 V AC, 50 ... 60 Hz and 240 V AC, 60 Hz	–	34 422	MSFW-230AC-OD
	240 V AC, 50 ... 60 Hz	–	34 424	MSFW-240AC-OD
<b>N1 solenoid coils for valves MN1H, JMN1H</b>				
	24 V DC	–	123 060	MSN1G-24DC-OD
	12 V DC and 24 V AC, 50 ... 60 Hz	–	170 152	MSN1W-24AC/12DC-OD
	110 V AC, 50 ... 60 Hz	–	123 061	MSN1W-110AC-OD
	230 V AC, 50 ... 60 Hz	–	123 062	MSN1W-230AC-OD
<b>F solenoid coils for valves MFH, JMFH – Explosion-proof to EN 50 028</b>				
	24 V DC	1	535 619	MSFG-24DC-EX
	24 V DC	5	535 621	MSFG-24DC-EX-K5
	24 V AC, 50 ... 60 Hz	1	535 623	MSFW-24AC-EX
	110 V AC, 50 ... 60 Hz	1	535 622	MSFW-110AC-EX
	230 V AC, 50 ... 60 Hz	1	535 620	MSFW-110AC-EX
	230 V AC, 50 ... 60 Hz	5	535 625	MSFW-110AC-EX-K5




 Core Range

# Solenoid/pneumatic valves, ISO 5599-1



Accessories

Ordering data – Plug sockets, plug sockets with cable for F solenoid coils					
	Voltage	Cable length [m]	Switching status display with LED	Part No.	Type
Plug socket without cable					Technical data → 2 / 7.2-10
	–	–	–	<b>34 431</b>	<b>MSSD-F</b>
Plug socket without cable with insulation displacement technology					Technical data → 2 / 7.2-10
	–	–	–	<b>192 746</b>	<b>MSSD-F-S-M16</b>
Plug socket with cable					Technical data → 2 / 7.3-21
	24 V DC	2.5	■	<b>30 935</b>	<b>KMF-1-24DC-2,5-LED</b>
	24 V DC	5	■	<b>30 937</b>	<b>KMF-1-24DC-5-LED</b>
	24 V DC	10	■	<b>193 458</b>	<b>KMF-1-24DC-10-LED</b>
	Up to 240 V	2.5	–	<b>30 936</b>	<b>KMF-1-230AC-2,5</b>
	Up to 240 V	5	–	<b>30 938</b>	<b>KMF-1-230AC-5</b>

Ordering data – Plug sockets, plug sockets with cable for N1 and D solenoid coils					
	Voltage	Cable length [m]	Switching status display with LED	Part No.	Type
Plug socket without cable					Technical data → 2 / 7.2-10
	–	–	–	<b>34 583</b>	<b>MSSD-C</b>
Plug socket without cable with insulation displacement technology					Technical data → 2 / 7.2-10
	–	–	–	<b>192 748</b>	<b>MSSD-C-S-M16</b>
Plug socket with cable					Technical data → 2 / 7.3-21
	24 V DC	2.5	■	<b>30 931</b>	<b>KMC-1-24DC-2,5-LED</b>
	24 V DC	5	■	<b>30 933</b>	<b>KMC-1-24DC-5-LED</b>
	24 V DC	10	■	<b>193 459</b>	<b>KMC-1-24DC-10-LED</b>
	Up to 230 V	2.5	–	<b>30 932</b>	<b>KMC-1-230AC-2,5</b>
	Up to 230 V	5	–	<b>30 934</b>	<b>KMC-1-230AC-5</b>

 Core Range



# Solenoid/pneumatic valves, ISO 5599-1



Accessories

**FESTO**

Standard directional control valves  
ISO 5599/1

1.2

Ordering data – Plug sockets, plug sockets with cable for valves with central plug					
	Voltage	Cable length [m]	Switching status display with LED	Part No.	Type
Plug socket without cable					Technical data → 2 / 7.2-10
	–	–	–	185 498	SEA-M12-4WD-PG7
Plug socket with cable					Technical data → 2 / 7.3-21
	–	–	–	185 499	KM-12-M12-GSWD-1-4

Ordering data – Illuminating seal				Technical data → 2 / 7.4-1	
	Voltage	Part No.	Type		
For F solenoid coils					
	12 ... 24 V DC	19 143	MF-LD-12-24DC		
	230 V DC/V AC	19 144	MF-LD-230AC		
For N1 solenoid coils					
	12 ... 24 V DC	19 145	MC-LD-12-24DC		
	230 V DC/V AC	19 146	MC-LD-230AC		

 Core Range