



■ Electrically or pneumatically actuated valves

■ With internal or external pilot air

■ Sturdy and reliable

Specified types in accordance with ATEX directive for potentially explosive atmospheres

→ [www.festo.com/en/ex](http://www.festo.com/en/ex)

# Solenoid/pneumatic valves, Tiger Classic

Key features



## General information

- Highly durable poppet valve concept for all 3/2 and 5/2-way valves
- Pneumatic or electrical actuation with F solenoid coil
- With flow rates of up to 7,500 l/min
- Pipe thread in sizes G $\frac{1}{8}$ , G $\frac{1}{4}$ , G $\frac{1}{2}$  and G $\frac{3}{4}$
- Tried and tested assembly on PAL or PRS manifold strips with hollow bolts
- Optimised response times with patented U-ring and servo control



## Solenoid coils

### F solenoid coils

Voltage:

- 12 to 230 V DC
- 12 to 240 V AC (50 to 60 Hz)

Power consumption:

- 4.5 W

- Selected types acc. to ATEX directive for explosive atmospheres

- Easily interchangeable solenoid coils
- Solenoid coil not included in scope of delivery

## Variants

### VL/O-3-...

Depending upon selected connections:  
Normally closed or normally open

### MFH-3-..., MOFH-3-...

- MFH-3-...  
Normally closed
- MOFH-3-...  
Normally open

These valves can be converted from one function to the other by rotating the seal under the cover.

### MFH-3-...-S

This valve type can be used within a range of 0 to 8 bar and also as MOFH (through flow when not actuated) with a separate pilot line.

### MFH-5-...-S

The external pilot air connection means that these valves can also be used with low operating pressures.

# Solenoid/pneumatic valves, Tiger Classic

Key features



## Manifold mounting

With PAL manifold strip




With PRS manifold block



The Tiger Classic valves can be mounted on PAL manifold strips with common supply port or on PRS manifold blocks with common supply port and common exhausts. The valves are mounted on the strips and blocks with hollow bolts. The manifold strip and manifold block have 2 to 6 valve positions.

Vacant positions can be sealed on PAL manifold strips with blanking caps, or with blanking plates on PRS manifold blocks.

Separate pressure levels can be provided to individual valves by means of hollow bolts with threaded connection.

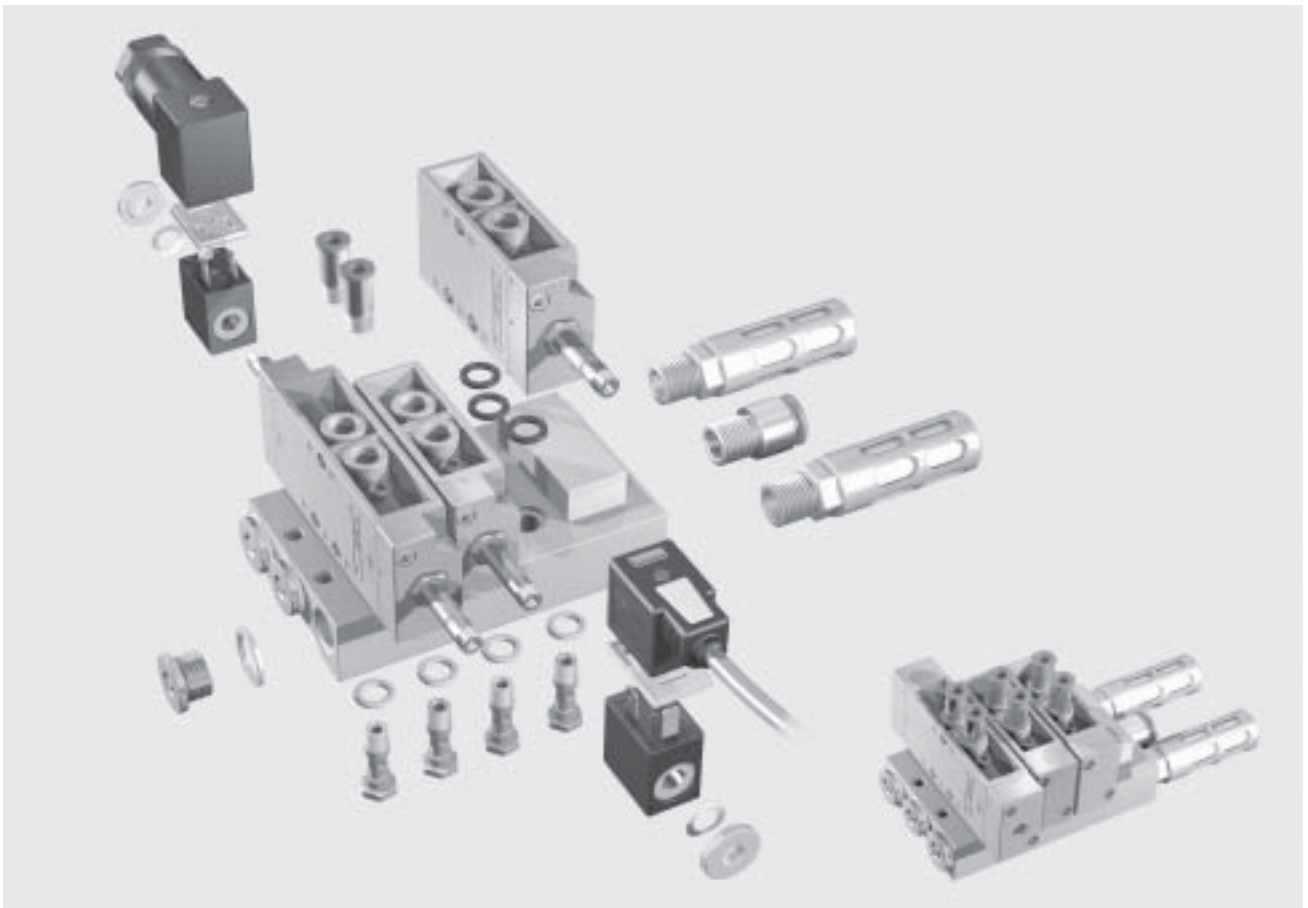



# Solenoid valves, Tiger Classic




Product range overview



Directional control valves for standard applications  
Tiger Classic

2.3

Function	Design	Type	Pneumatic connection	Operating voltage	
				[V DC]	[V AC]
3/2-way valves	<b>Solenoid valve</b>				
		MFH	G1/8	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			G1/4		
			G1/2		
			G3/4		
		MOFH	G1/8	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			G1/4		
			G1/2		
G3/4					

Function	Design	Type	Pneumatic connection	Operating voltage	
				[V DC]	[V AC]
5/2-way valves	<b>Solenoid valve</b>				
		MFH	G1/8	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			G1/4		
			G1/2		
	<b>Double solenoid valve</b>				
		JMFH	G1/8	12, 24, 42, 48	24, 42, 48, 110, 230, 240
			G1/4		
			G1/2		
	<b>Double solenoid valve with dominant signal</b>				
		JMFHD	G1/8	12, 24, 42, 48	24, 42, 48, 110, 230, 240
G1/4					

# Solenoid valves, Tiger Classic

Product range overview







Type	Normal position		Pilot air supply		Type of reset		→ Page
	Closed	Open	Internal	External	Air spring	Mechanical spring	
<b>Solenoid valve</b>							
MFH	■	-	■	■	-	■	2 / 2.3-12
	■	-	■	■	-	■	
	■	-	■	■	-	■	
	■	-	■	■	-	■	
MOFH	-	■	■	-	-	■	2 / 2.3-12
	-	■	■	-	-	■	
	-	■	■	-	-	■	
	-	■	■	-	-	■	

Type	Pilot air supply		Type of reset		→ Page
	Internal	External	Air spring	Mechanical spring	
<b>Solenoid valve</b>					
MFH	■	■	-	■	2 / 2.3-17
	■	■	-	■	
	■	■	-	■	
<b>Double solenoid valve</b>					
JMFH	■	■	-	-	2 / 2.3-22
	■	■	-	-	
	■	■	-	-	
<b>Double solenoid valve with dominant signal</b>					
JMFDH	-	■	-	-	2 / 2.3-22
	-	■	-	-	

# Pneumatic valves, Tiger Classic

Product range overview




Function	Design	Type	Pneumatic connection	Type of reset		→ Page	
				Air spring	Mechanical spring		
3/2-way valves		VL/O	G1/8	-	■	2 / 2.3-29	
			G1/4	-	■		
			G1/2	-	■		
			G3/4	-	■		
5/2-way valves		VL	G1/8	-	■	2 / 2.3-33	
			G1/4	-	■		
			G1/2	-	■		
	<b>Double pilot valve</b>						
		JH	G1/8	-	-	2 / 2.3-36	
			G1/4	-	-		
			G1/2	-	-		
	<b>Double pilot valve with dominant signal</b>						
		JDH	G1/8	-	-	2 / 2.3-36	
G1/4			-	-			

Directional control valves for standard applications  
Tiger Classic

2.3

# Solenoid valves, Tiger Classic

Type codes

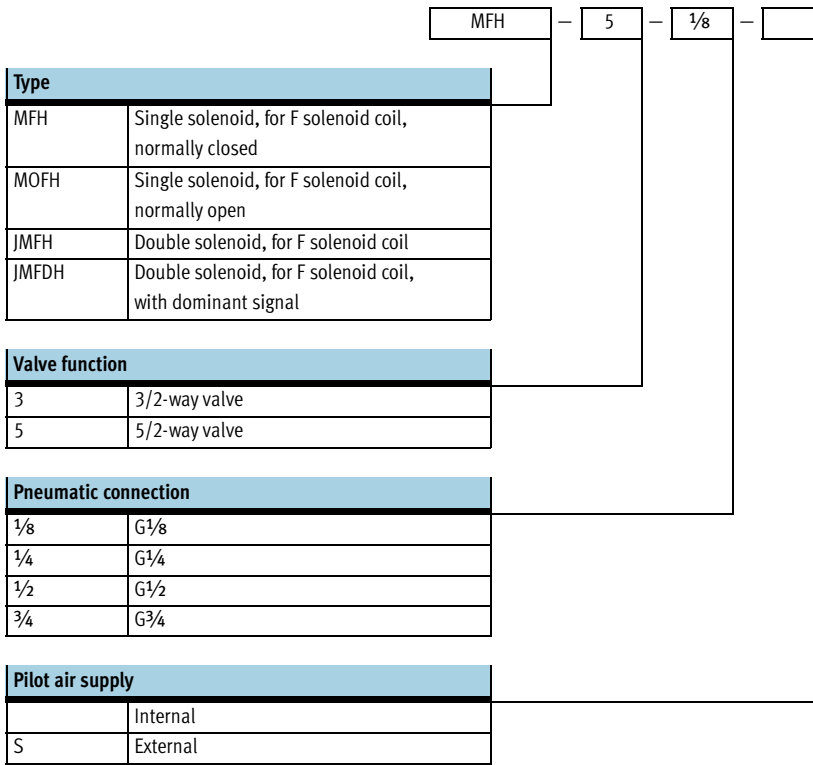


# Solenoid valves, Tiger Classic

Peripherals overview





## Mounting on manifold block

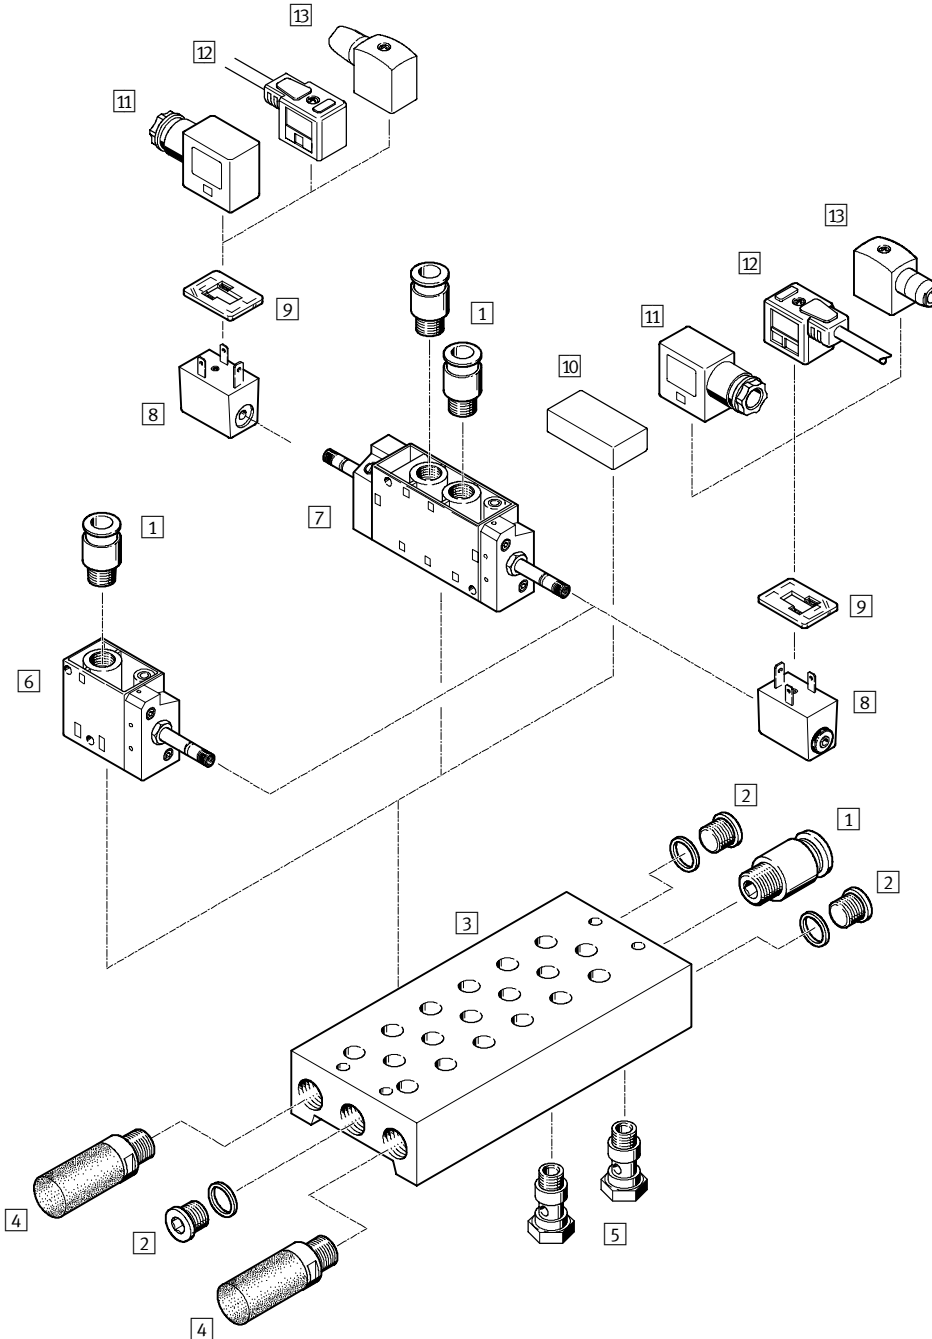

### Variants

MFH-5-...

JMFH-5-...





# Solenoid valves, Tiger Classic

Peripherals overview

FESTO

Accessories		
	Brief description	→ Page
1	Push-in fitting QS	Volume 3
2	Blanking plug G	Volume 3
3	Manifold block PRS	2 / 2.3-42
4	Silencer	Volume 3
5	Hollow bolt VT	2 / 2.3-41
6	Solenoid valve MFH	2 / 2.3-4
7	Double solenoid valve JMFH	2 / 2.3-4
8	F solenoid coil MSFG, MSFW	2 / 2.3-44
9	Luminescent seal M...-LD	2 / 2.3-45
10	Blanking plate PRSB	2 / 2.3-43
11	Plug socket MSSD-F	2 / 2.3-45
12	Plug socket with cable KMF	2 / 2.3-45
13	Plug socket MSSD-F-S	2 / 2.3-45

Directional control valves for standard applications  
Tiger Classic


2.3

# Solenoid valves, Tiger Classic

Peripherals overview





## Mounting on manifold strip

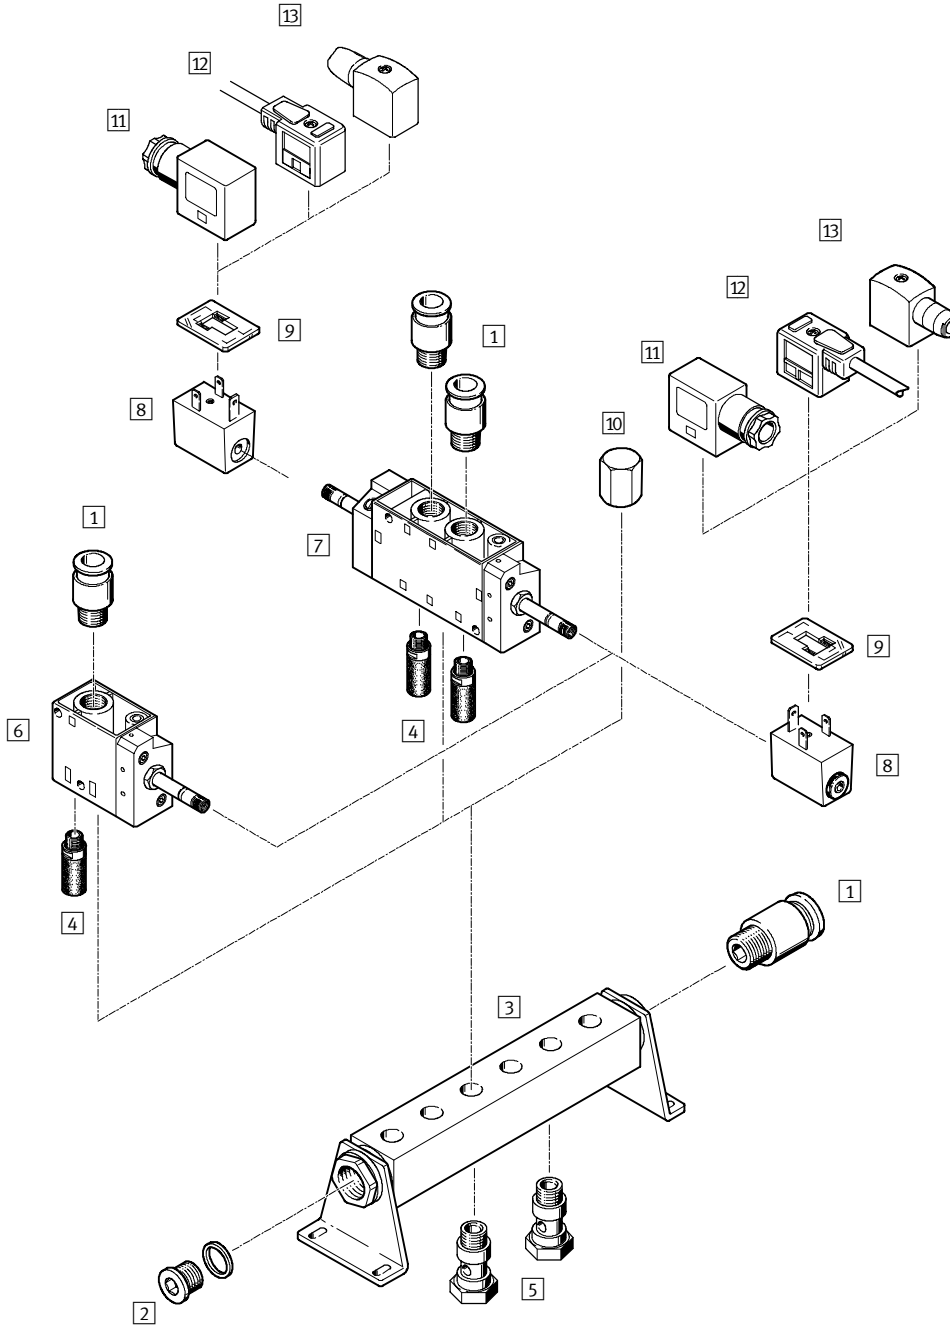

### Variants

MFH-5-...

JMFH-5-...



# Solenoid valves, Tiger Classic

Peripherals overview





Accessories		
	Brief description	→ Page
1	Push-in fitting QS	For connecting standard O.D. tubing Volume 3
2	Blanking plug G	1 included in the scope of delivery for PAL manifold strip Volume 3
3	Manifold strip PAL	2 / 2.3-40
4	Silencer	For fitting in exhaust ports Volume 3
5	Hollow bolt VT	For distribution of compressed air or for separate compressed air supply 2 / 2.3-41
6	Solenoid valve MFH	For F solenoid coil 2 / 2.3-4
7	Double solenoid valve JMFH	For F solenoid coil 2 / 2.3-4
8	F solenoid coil MSFG, MSFW	2 / 2.3-44
9	Luminescent seal M...-LD	For displaying the switching status 2 / 2.3-45
10	Blanking cap VTM	For blanking an unused valve position 2 / 2.3-41
11	Plug socket MSSD-F	For valves MFH, JMFH 2 / 2.3-45
12	Plug socket with cable KMF	For valves MFH, JMFH 2 / 2.3-45
13	Plug socket MSSD-F-S	For valves MFH, JMFH 2 / 2.3-45

# Solenoid valves MFH, Tiger Classic

Technical data – 3/2-way valves



-  - Flow rate  
500 ... 7,500 l/min
-  - Voltage  
12, 24, 42, 48 V DC  
24, 42, 48, 110, 230,  
240 V AC
- Wearing parts kits  
→ 2 / 2.3-16



General technical data					
Pneumatic connection	G1/8	G1/4	G1/2	G3/4	
Valve function	3/2-way, single solenoid				
Constructional design	Poppet valve				
Sealing principle	Soft				
Actuation type	Electrical				
Type of reset	Mechanical spring				
Type of control	Piloted				
Pilot air supply	Internal or external				
Direction of flow	Non reversible				
Exhaust function	With flow control				
Manual override	Detenting				
Type of mounting	Via through holes				
Mounting position	Any				
Nominal size	[mm]	5	7	14	19
Standard nominal flow rate	[l/min]	500	800	3,700	7,500
Product weight	[g]	240	320	1,100	1,260

Operating and environmental conditions						
Pneumatic connection	G1/8	G1/4	G1/2	G3/4		
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum					
Operating pressure	Internal pilot air supply	[bar]	1.5 ... 8	1.5 ... 8	1.5 ... 8	2 ... 8
	External pilot air supply	[bar]	-0.95 ... +10	-0.95 ... +10	-0.95 ... +10	-0.95 ... +10
Pilot pressure	[bar]	1 ... 8	1 ... 8	1 ... 8	1 ... 8	
Ambient temperature	[°C]	-5 ... +40				
Temperature of medium	[°C]	-10 ... +60				


# Solenoid valves MFH, Tiger Classic

Technical data – 3/2-way valves




## Minimal pilot pressure $p_{12}/p_{14}$ as a function of operating pressure $p_1$ (external pilot air supply)


MFH-5-1/8-S

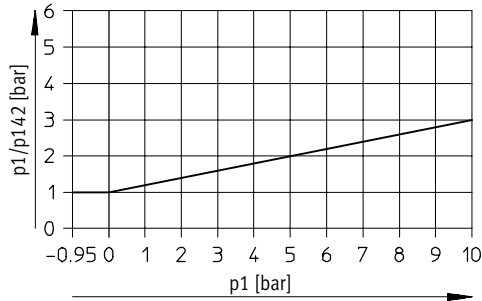


MFH-5-1/4-S

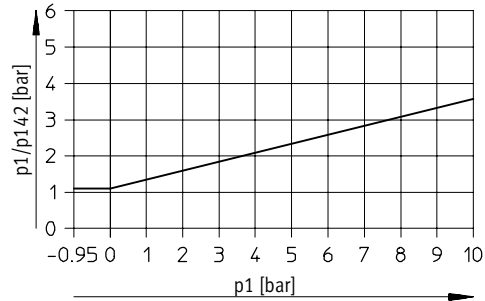

MFH-5-1/2-S

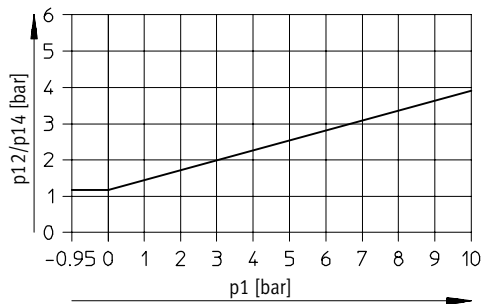

MFH-5-3/4-S

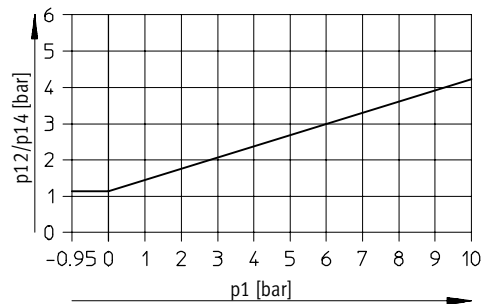

## Valve response times [ms]

Pneumatic connection	G1/8		G1/4		G1/2		G3/4	
Normal position	Closed	Open	Closed	Open	Closed	Open	Closed	Open
Internal pilot air supply								
On	9	9	10	15	18	18	40	40
Off	29	29	29	45	90	90	29	29
External pilot air supply								
On	9	-	10	-	18	-	40	-
Off	29	-	29	-	90	-	29	-

# Solenoid valves MFH, Tiger Classic


Technical data – 3/2-way valves



Electrical data			
F solenoid coil			
Electrical connection		Plug vanes for plug sockets MSSD-F, KMF	
Operating voltage	D.C. voltage	[V DC]	12, 24, 42, 48
	A.C. voltage	[V AC]	24, 42, 48, 110, 230, 240 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	4.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 6
Protection class to EN 60 529		IP65 (in combination with plug socket)	

## Materials

Sectional view

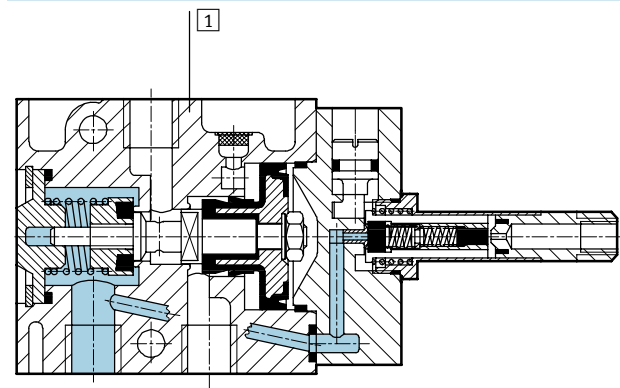

1	Housing	Aluminium die-cast, anodised
-	Seals	Nitrile rubber

# Solenoid valves MFH, Tiger Classic


Technical data – 3/2-way valves



## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)


MFH, MOFH

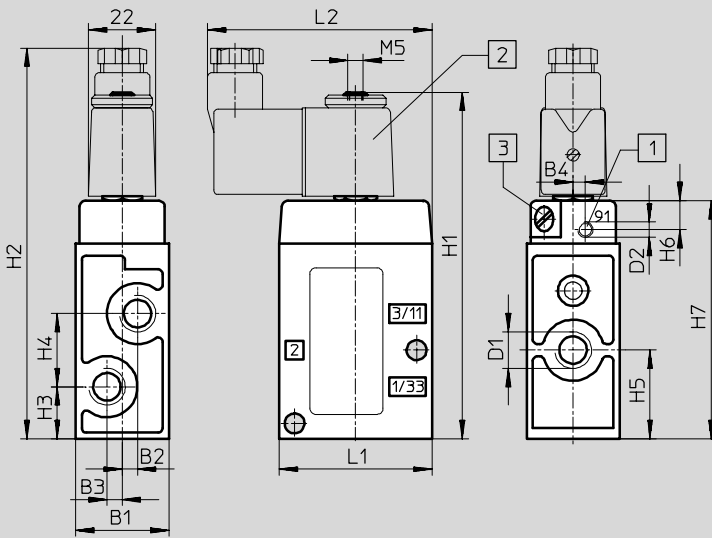

- 1 Additional connection for external pilot air with MFH-3-...-S
- 2 Solenoid coil is 360° rotatable
- 3 Manual override can be repositioned by 180°

Pneumatic connection	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	H7	L1	L2
G $\frac{1}{8}$	26	3.5	3.5	2.7	G $\frac{1}{8}$	M5	97	111	12.5	19	22	9.5	63	45	71
G $\frac{1}{4}$	30.4	5	5	4	G $\frac{1}{4}$	M5	112	126	17	24	29	9.5	78	50	74
G $\frac{1}{2}$	52	8	8	-	G $\frac{1}{2}$	G $\frac{1}{8}$	151	165	30	38	49	10.5	117	80	89
G $\frac{3}{4}$	68	8	8	-	G $\frac{3}{4}$	G $\frac{1}{8}$	171	185	34	44	56	11	137	92	95

## Attachment diagram

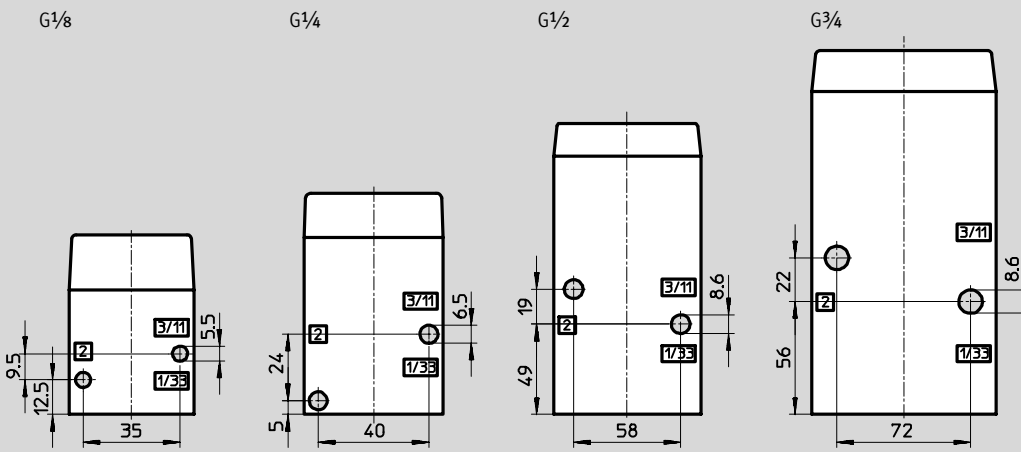

# Solenoid valves MFH, Tiger Classic

Technical data – 3/2-way valves



Ordering data				
Circuit symbol	Description	Pneumatic connection	Part No.	Type
	Without F solenoid coil <sup>1)</sup> , internal pilot air supply	G <sup>1</sup> / <sub>8</sub>	<b>7 802</b>	<b>MFH-3-1/8</b>
		G <sup>1</sup> / <sub>4</sub>	<b>9 964</b>	<b>MFH-3-1/4</b>
		G <sup>1</sup> / <sub>2</sub>	<b>9 857</b>	<b>MFH-3-1/2</b>
		G <sup>3</sup> / <sub>4</sub>	<b>11 967</b>	<b>MFH-3-3/4</b>
	Without F solenoid coil <sup>1)</sup> , internal pilot air supply	G <sup>1</sup> / <sub>8</sub>	<b>7 877</b>	<b>MOFH-3-1/8</b>
		G <sup>1</sup> / <sub>4</sub>	<b>7 876</b>	<b>MOFH-3-1/4</b>
		G <sup>1</sup> / <sub>2</sub>	<b>7 884</b>	<b>MOFH-3-1/2</b>
		G <sup>3</sup> / <sub>4</sub>	<b>11 969</b>	<b>MOFH-3-3/4</b>
	Without F solenoid coil <sup>1)</sup> , external pilot air supply	G <sup>1</sup> / <sub>8</sub>	<b>7 958</b>	<b>MFH-3-1/8-S</b>
		G <sup>1</sup> / <sub>4</sub>	<b>7 959</b>	<b>MFH-3-1/4-S</b>
		G <sup>1</sup> / <sub>2</sub>	<b>7 960</b>	<b>MFH-3-1/2-S</b>
		G <sup>3</sup> / <sub>4</sub>	<b>11 968</b>	<b>MFH-3-3/4-S</b>

1) F solenoid coils → 2 / 2.3-44

Ordering data – Wearing parts kits		
Pneumatic connection	Part No.	Type
G <sup>1</sup> / <sub>8</sub>	<b>104 206</b>	<b>MFH-3-1/8</b>
G <sup>1</sup> / <sub>4</sub>	<b>104 207</b>	<b>MFH-3-1/4</b>
G <sup>1</sup> / <sub>2</sub>	<b>104 208</b>	<b>MFH-3-1/2</b>



Core Range



# Solenoid valves MFH, Tiger Classic

Technical data – 5/2-way valves

FESTO

-  - Flow rate  
500 ... 3,700 l/min
  
-  - Voltage  
12, 24, 42, 48 V DC  
24, 42, 48, 110, 230,  
240 V AC
  
- Wearing parts kits  
→ 2 / 2.3-21



General technical data				
Pneumatic connection		G1/8	G1/4	G1/2
Valve function		5/2-way, single solenoid		
Constructional design		Poppet valve		
Sealing principle		Soft		
Actuation type		Electrical		
Type of reset		Mechanical spring		
Type of control		Piloted		
Direction of flow		Non reversible		
Pilot air supply		Internal or external		
Exhaust function		With flow control		
Manual override		Detenting		
Type of mounting		Via through holes		
Mounting position		Any		
Nominal size	[mm]	5	7	14
Standard nominal flow rate	[l/min]	500	1,000	3,700
Product weight	[g]	270	290	1,135

Operating and environmental conditions					
Pneumatic connection		G1/8	G1/4	G1/2	
Operating medium		Filtered compressed air, lubricated or unlubricated			
Operating pressure	Internal pilot air supply	[bar]	1.8 ... 8	2.2 ... 8	2 ... 8
	External pilot air supply	[bar]	0 ... 10	0 ... 8	0 ... 8
Pilot pressure	[bar]	1 ... 8	1.5 ... 8	1.5 ... 8	
Ambient temperature	[°C]	-5 ... +40			
Temperature of medium	[°C]	-10 ... +60			


# Solenoid valves MFH, Tiger Classic

Technical data – 5/2-way valves




## Minimal pilot pressure p12, p14 as a function of operating pressure p1 (external pilot air supply)

MFH-5-1/8-S

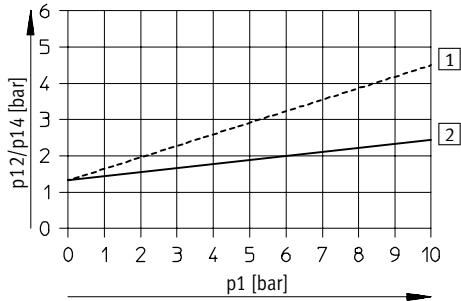


----- Exhaust throttled  
 ————— Exhaust unthrottled

MFH-5-1/4-S

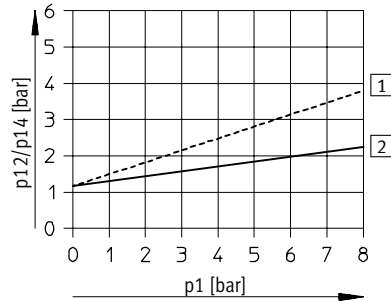

----- Exhaust throttled  
 ————— Exhaust unthrottled

MFH-5-1/2-S

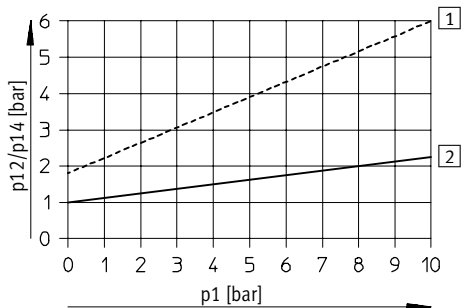

----- Exhaust throttled  
 ————— Exhaust unthrottled

### Valve response times [ms]

Pneumatic connection	G1/8		G1/4		G1/2	
Pilot air supply	Internal	External	Internal	External	Internal	External
On	8	8	9	9	15	21
Off	36	36	29	29	154	150

# Solenoid valves MFH, Tiger Classic


Technical data – 5/2-way valves



Electrical data			
F solenoid coil			
Electrical connection	Plug vanes for plug sockets MSSD-F, KMF		
Operating voltage	D.C. voltage	[V DC]	12, 24, 42, 48
	A.C. voltage	[V AC]	24, 42, 48, 110, 230, 240 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	4.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 6
Protection class to EN 60 529	IP65 (in combination with plug socket)		

## Materials

Sectional view

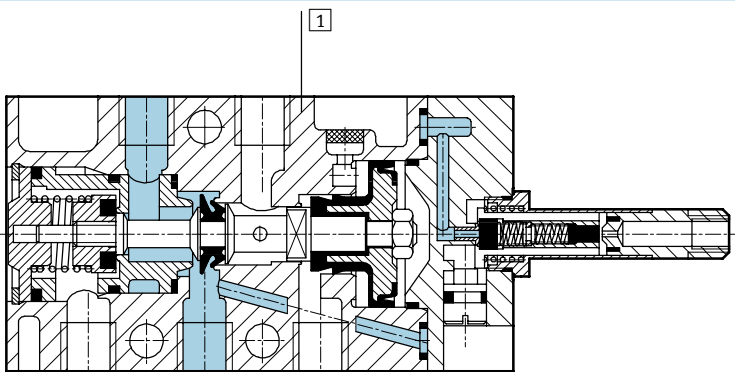

1	Housing	Aluminium die-cast, anodised
-	Seals	Nitrile rubber

# Solenoid valves MFH, Tiger Classic

Technical data – 5/2-way valves




## Dimensions Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

MFH

- 1 Additional connection for external pilot air with MFH-5-...-S
- 2 Solenoid coil is 360° rotatable
- 3 Manual override can be repositioned by 180°

Pneumatic connection	B1	B2	B3	B4	D1	D2	H1	H2	H3	H4	H5	H6	H7	L1	L2
G <sup>1</sup> / <sub>8</sub>	26	3.5	3.5	2.7	G <sup>1</sup> / <sub>8</sub>	M5	117	131	13.5	19	23	9.5	83	45	71
G <sup>1</sup> / <sub>4</sub>	30.4	–	5	4	G <sup>1</sup> / <sub>4</sub>	M5	128	143	12	24	28	9.5	128	50	74
G <sup>1</sup> / <sub>2</sub>	52	–	8	–	G <sup>1</sup> / <sub>2</sub>	G <sup>1</sup> / <sub>8</sub>	192	209	32	38	51	10.5	158	80	89

## Attachment diagram

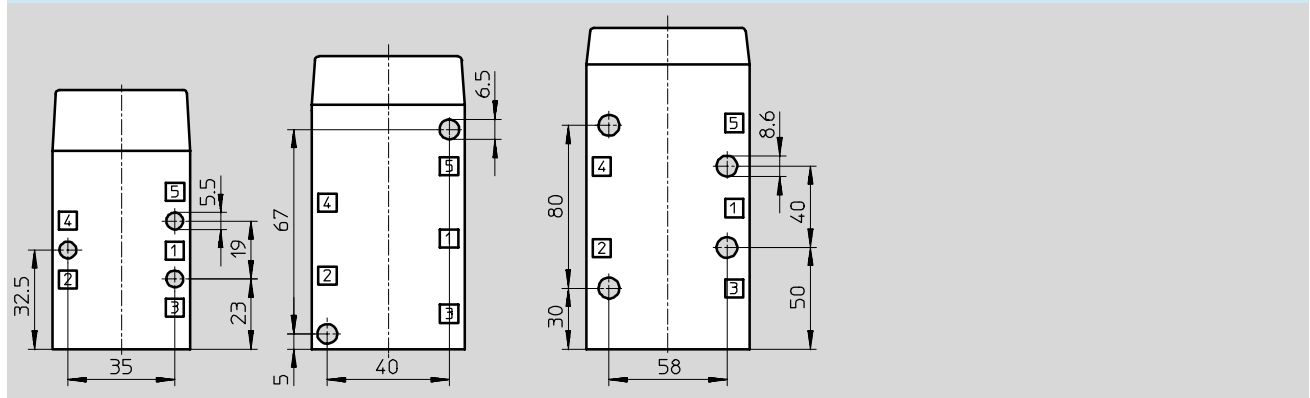

# Solenoid valves MFH, Tiger Classic

Technical data – 5/2-way valves

Ordering data				
Circuit symbol	Description	Pneumatic connection	Part No.	Type
	Without F solenoid coil <sup>1)</sup> , internal pilot air supply	G <sup>1</sup> / <sub>8</sub>	9 982	MFH-5-1/8
		G <sup>1</sup> / <sub>4</sub>	6 211	MFH-5-1/4
		G <sup>1</sup> / <sub>2</sub>	6 420	MFH-5-1/2
	Without F solenoid coil <sup>1)</sup> , external pilot air supply	G <sup>1</sup> / <sub>8</sub>	10 348	MFH-5-1/8-S
		G <sup>1</sup> / <sub>4</sub>	10 349	MFH-5-1/4-S
		G <sup>1</sup> / <sub>2</sub>	35 547	MFH-5-1/2-S

1) F solenoid coils → 2 / 2.3-44

Ordering data – Wearing parts kits		
Pneumatic connection	Part No.	Type
G <sup>1</sup> / <sub>8</sub>	104 209	MFH-5-1/8 <sup>1)2)</sup>
G <sup>1</sup> / <sub>4</sub>	104 211	MFH-5-1/4 <sup>3)4)</sup>



- 1) Order mounting sleeves 228 389 separately
- 2) Use up to E602 series
- 3) Order mounting sleeves 229 363 separately
- 4) Use from 1/81 series

Core Range

## Double solenoid valves JMFH, Tiger Classic

Technical data – 5/2-way double solenoid valves

FESTO

-  - Flow rate  
600 ... 4,500 l/min
-  - Voltage  
12, 24, 42, 48 V DC  
24, 42, 48, 110, 230,  
240 V AC

Wearing parts kits  
→ 2 / 2.3-26



General technical data					
Pneumatic connection		G1/8	G1/4	G1/2	
Valve function		5/2-way, double solenoid			
Constructional design		Poppet valve			
Sealing principle		Soft			
Actuation type		Electrical			
Type of control		Piloted			
Pilot air supply		Internal or external			
Direction of flow		Non reversible			
Exhaust function		With flow control			
Manual override		Detenting			
Type of mounting		Via through holes			
Mounting position		Any			
Nominal size		[mm]	5	7	14
Standard nominal flow rate	Internal pilot air supply	[l/min]	600	1,100	4,500
	External pilot air supply	[l/min]	600	1,100	4,000
Product weight			425	530	1,210


Operating and environmental conditions					
Pneumatic connection		G1/8	G1/4	G1/2	
Operating medium		Filtered compressed air, lubricated or unlubricated			
Operating pressure	Internal pilot air supply	[bar]	1.5 ... 8	1.5 ... 8	2 ... 8
	External pilot air supply	[bar]	0 ... 8	0 ... 8	0 ... 8
	With dominant signal	[bar]	2.5 ... 8	2.5 ... 8	–
Pilot pressure		[bar]	1.2 ... 8	1.2 ... 8	0.5 ... 8
Ambient temperature		[°C]	–5 ... +40		
Temperature of medium		[°C]	–10 ... +60		

# Double solenoid valves JMFH, Tiger Classic

Technical data – 5/2-way double solenoid valves


**Minimal pilot pressure p12, p14 as a function of operating pressure p1 (external pilot air supply)**

JMFH-5-1/8-S

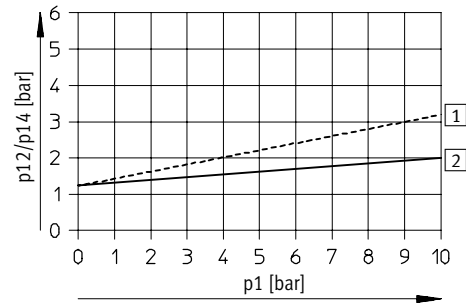


----- Exhaust throttled  
 ————— Exhaust unthrottled

JMFH-5-1/4-S

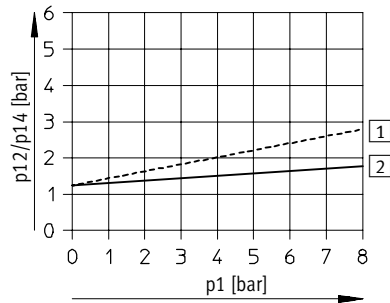

----- Exhaust throttled  
 ————— Exhaust unthrottled

JMFH-5-1/2-S

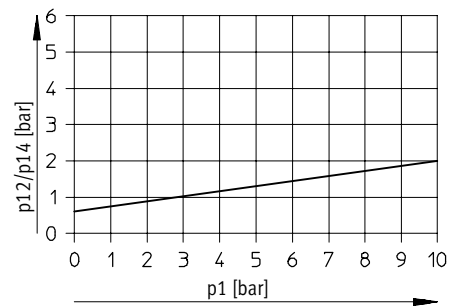

Valve response times [ms]						
Pneumatic connection	G1/8	Dominating signal at 14		G1/4	Dominating signal at 14	
Internal pilot air supply						
On/changeover	–	16	–	24	–	
Off/changeover	18	24	11	32	16	
External pilot air supply						
On/changeover	–	–	–	–	–	
Off/changeover	18	–	11	–	28	

# Double solenoid valves JMFH, Tiger Classic


Technical data – 5/2-way double solenoid valves



Electrical data			
F solenoid coil			
Electrical connection		Plug vanes for plug sockets MSSD-F, KMF	
Operating voltage	D.C. voltage	[V DC]	12, 24, 42, 48
	A.C. voltage	[V AC]	24, 42, 48, 110, 230, 240 (50 ... 60 Hz)
Coil characteristics	D.C. voltage	[W]	4.5
	A.C. voltage	[VA]	Pull: 7.5 Hold: 6
Protection class to EN 60 529		IP65 (in combination with plug socket)	

## Materials

Sectional view

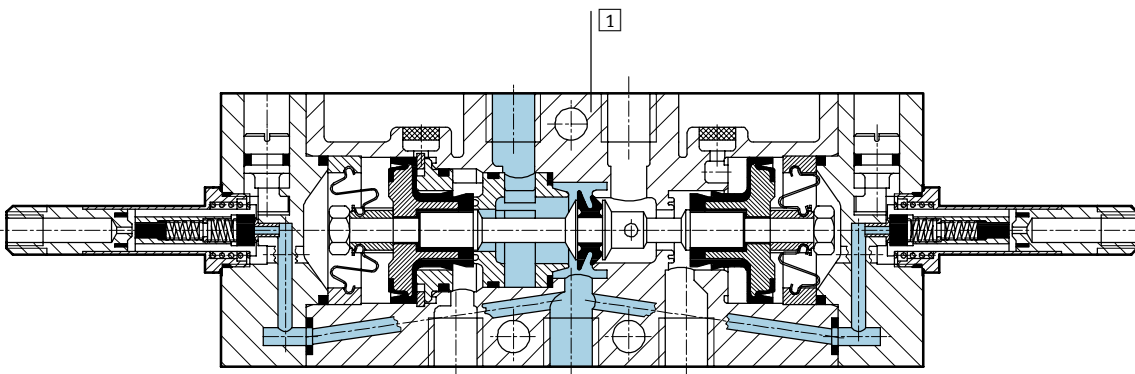

1	Housing	Aluminium die-cast, anodised
-	Seals	Nitrile rubber




# Double solenoid valves JMFH, Tiger Classic

Technical data – 5/2-way double solenoid valves




**Dimensions** Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)  
 JMFH, JMFHDH

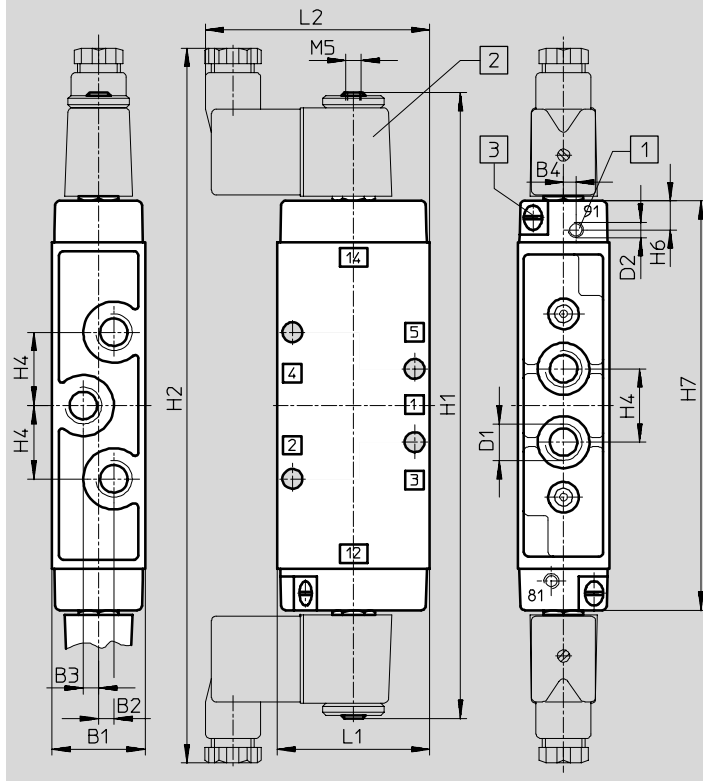

- 1 Additional connection for external pilot air with JMF...H-5-...-S
- 2 Solenoid coil is 360° rotatable
- 3 Manual override can be repositioned by 180°

Pneumatic connection	B1	B2	B3	B4	D1	D2	H1	H2	H4	H6	H7	L1	L2
G $\frac{1}{8}$	26	3.5	3.5	2.7	G $\frac{1}{8}$	M5	184	217	19	9.5	116.5	45	71
G $\frac{1}{4}$	30.4	-	5	4	G $\frac{1}{4}$	M5	202	235	24	9.5	134	50	74
G $\frac{1}{2}$	52	-	8	-	G $\frac{1}{2}$	G $\frac{3}{8}$	244	272	38	10.5	176	80	89

## Attachment diagram

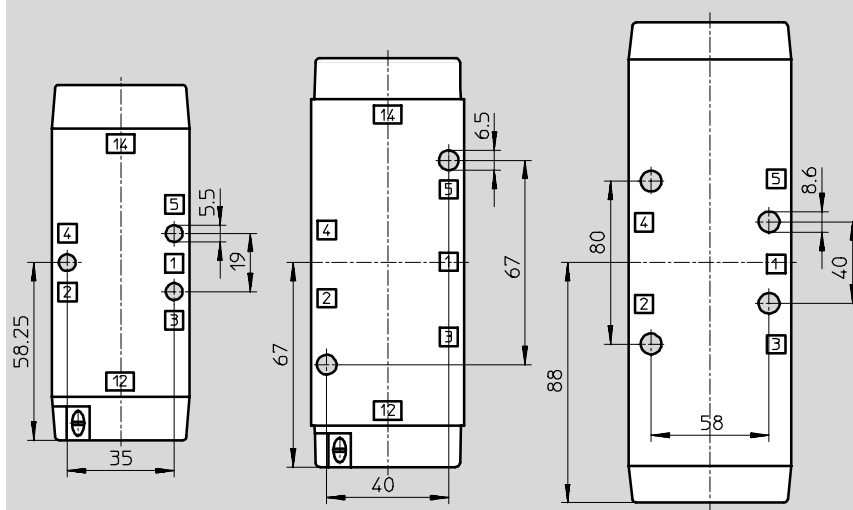

# Double solenoid valves JMFH, Tiger Classic

Technical data – 5/2-way double solenoid valves



Ordering data				
Circuit symbol	Description	Pneumatic connection	Part No.	Type
	Without F solenoid coil <sup>1)</sup> , internal pilot air supply	G <sup>1</sup> / <sub>8</sub>	<b>8 820</b>	<b>JMFH-5-1/8</b>
		G <sup>3</sup> / <sub>4</sub>	<b>10 410</b>	<b>JMFH-5-1/4</b>
		G <sup>1</sup> / <sub>2</sub>	<b>10 166</b>	<b>JMFH-5-1/2</b>
	Without F solenoid coil <sup>1)</sup> , external pilot air supply	G <sup>1</sup> / <sub>8</sub>	<b>14 008</b>	<b>JMFH-5-1/8-S</b>
		G <sup>3</sup> / <sub>4</sub>	<b>14 009</b>	<b>JMFH-5-1/4-S</b>
		G <sup>1</sup> / <sub>2</sub>	<b>35 548</b>	<b>JMFH-5-1/2-S</b>
	Without F solenoid coil <sup>1)</sup> , internal pilot air supply, with dominating signal at 14	G <sup>1</sup> / <sub>8</sub>	<b>8 821</b>	<b>JMFDH-5-1/8</b>
		G <sup>3</sup> / <sub>4</sub>	<b>10 411</b>	<b>JMFDH-5-1/4</b>

1) F solenoid coils → 2 / 2.3-44


Ordering data – Wearing parts kits		
Pneumatic connection	Part No.	Type
G <sup>1</sup> / <sub>8</sub>	<b>104 891</b>	<b>JMFH-5-1/8<sup>1)</sup></b>
G <sup>3</sup> / <sub>4</sub>	<b>104 892</b>	<b>JMFH-5-1/4<sup>2)</sup></b>

- 1) Order mounting sleeves 228 389 separately
- 2) Order mounting sleeves 229 363 separately

Core Range

# Pneumatic valves, Tiger Classic

Type codes

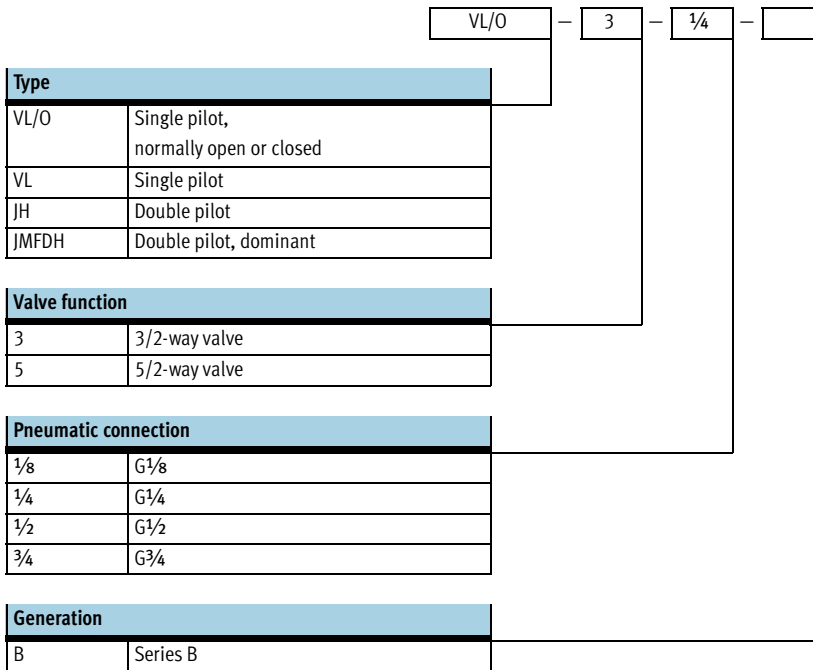

# Pneumatic valves, Tiger Classic


Peripherals overview

FESTO


Directional control valves for standard applications  
Tiger Classic

2.3

## Mounting on manifold block

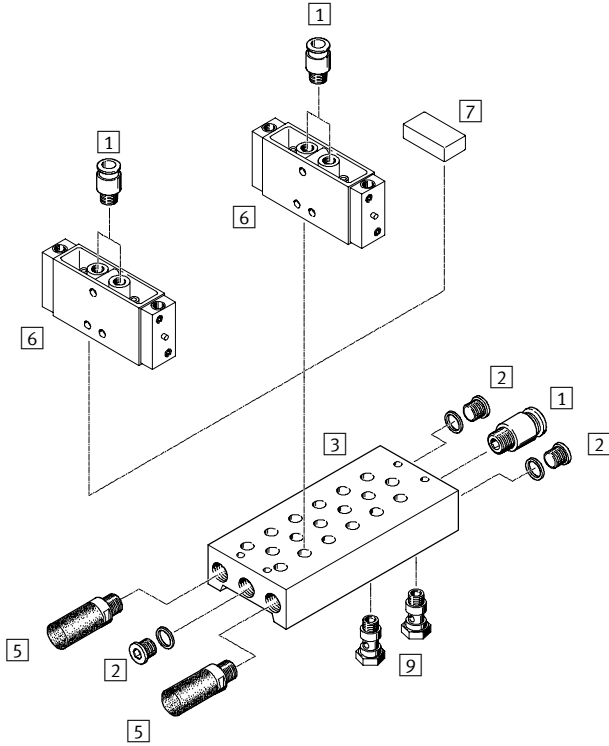

## Mounting on manifold strip

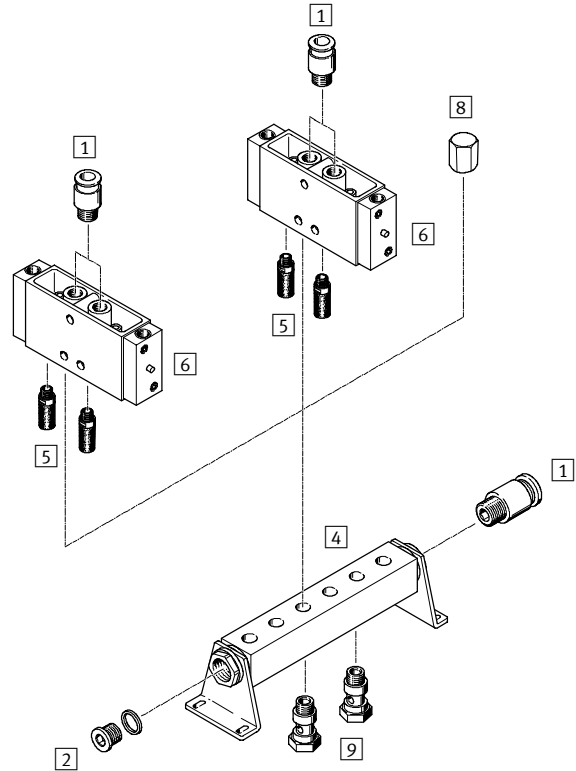


Accessories		
	Brief description	→ Page
1	Push-in fitting QS	Volume 3
2	Blanking plug G	3 included in the scope of delivery for PRS manifold block 1 included in the scope of delivery for PAL manifold strip
3	Manifold block PRS	2 / 2.3-42
4	Manifold strip PAL	2 / 2.3-40
5	Silencer	For fitting in exhaust ports
6	Pneumatic valve VL, JH	
7	Blanking plate PRSB	For covering an unused valve position
8	Blanking cap VTM	For blanking an unused valve position
9	Hollow bolt VT	For distribution of compressed air or for separate compressed air supply

# Pneumatic valves VL/O, Tiger Classic

Technical data – 3/2-way valves



-  - Flow rate  
500 ... 7,500 l/min

Wearing parts kits  
→ 2 / 2.3-32



General technical data				
Pneumatic connection	G1/8	G1/4	G1/2	G3/4
Valve function	3/2-way, single pilot			
Constructional design	Poppet valve			
Sealing principle	Soft			
Actuation type	Pneumatic			
Type of reset	Mechanical spring			
Type of pilot control	Direct			
Direction of flow	Reversible			
Exhaust function	With flow control			
Manual override	None			
Type of mounting	Via through holes			
Mounting position	Any			
Nominal size [mm]	5	7	14	19
Standard nominal flow rate	500	800	3,700	7,500
Product weight [g]	150	230	860	1,200

Operating and environmental conditions				
Pneumatic connection	G1/8	G1/4	G1/2	G3/4
Operating medium	Filtered compressed air, lubricated or unlubricated Vacuum			
Operating pressure	Normally closed [bar]	-0.95 ... +10	-0.95 ... +10	-0.95 ... +10
	Normally open [bar]	0 ... 10	0 ... 10	0 ... 10
Pilot pressure	See diagram (max. 10 bar)			
Ambient temperature [°C]	-10 ... +60			


# Pneumatic valves VL/O, Tiger Classic

Technical data – 3/2-way valves




## Minimal pilot pressure $p_{12}/p_{14}$ as a function of operating pressure $p_1$

VL/O-3-1/8-B

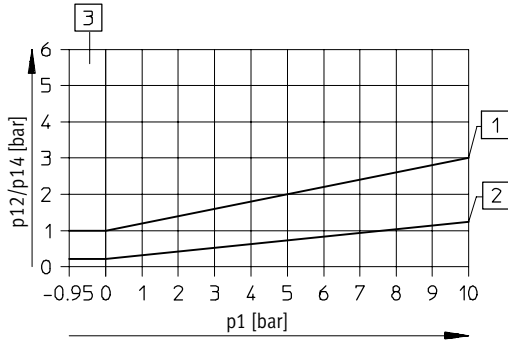


- 1 Switch-on pressure
- 2 Switch-off pressure
- 3 Only for normally closed

## VL/O-3-1/4 – Normally closed

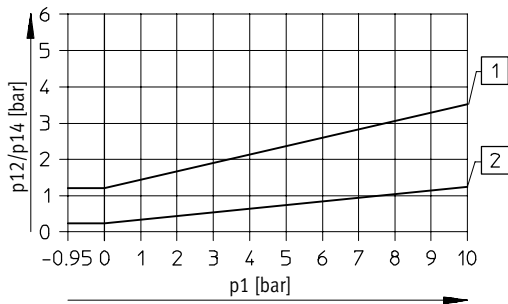


- 1 Switch-on pressure
- 2 Switch-off pressure

## VL/O-3-1/4 – Normally open

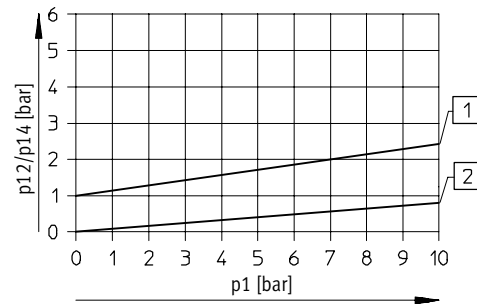


- 1 Switch-on pressure
- 2 Switch-off pressure

## VL/O-3-1/2 – Normally closed

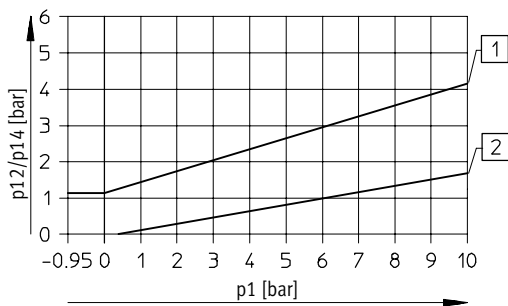

- 1 Switch-on pressure
- 2 Switch-off pressure

## VL/O-3-1/2 – Normally open

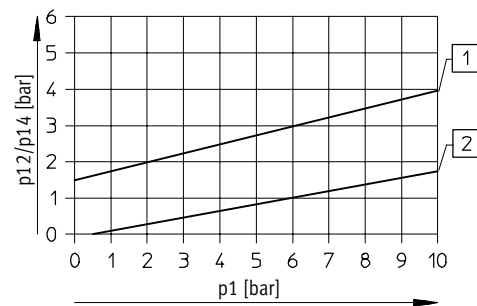


- 1 Switch-on pressure
- 2 Switch-off pressure

# Pneumatic valves VL/O, Tiger Classic

Technical data – 3/2-way valves




VL/O-3-3/4 – Normally closed

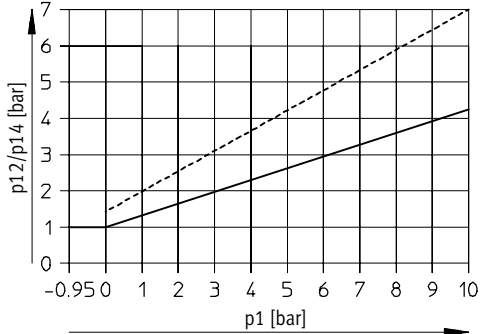

----- Exhaust throttled  
 ——— Exhaust unthrottled

VL/O-3-3/4 – Normally open

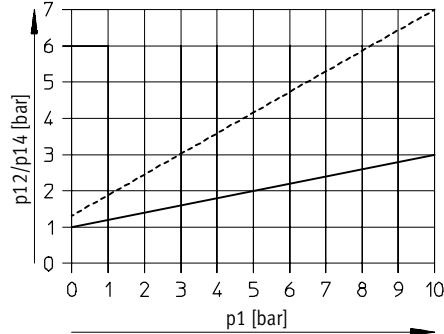


----- Exhaust throttled  
 ——— Exhaust unthrottled

## Valve response times [ms]

Pneumatic connection	G1/8	G1/4	G1/2	G3/4
On	4	8	17	23
Off	10	30	30	23

## Materials

Sectional view

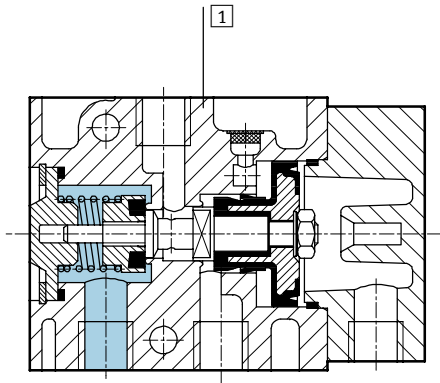


1	Housing	Aluminium die-cast, anodised
-	Seals	Nitrile rubber

# Pneumatic valves VL/O, Tiger Classic

Technical data – 3/2-way valves




## Dimensions Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

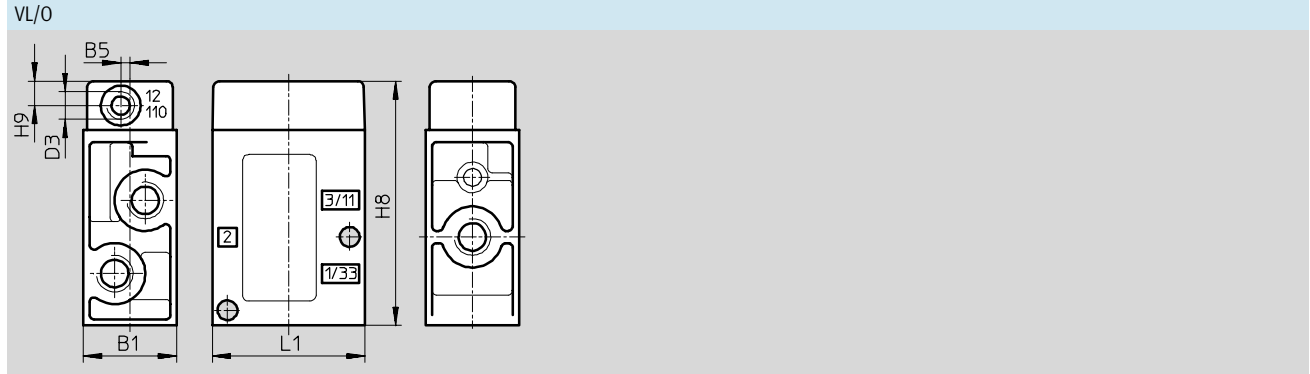

Pneumatic connection	B1	B5	D3	H8	H9	L1
G $\frac{1}{8}$	26	3	G $\frac{1}{8}$	65	8	45
G $\frac{1}{4}$	30.4	-	G $\frac{1}{8}$	80	8	50
G $\frac{1}{2}$	52	-	G $\frac{1}{4}$	118	10	80
G $\frac{3}{4}$	68	-	G $\frac{1}{4}$	138	10	92

## Attachment diagram

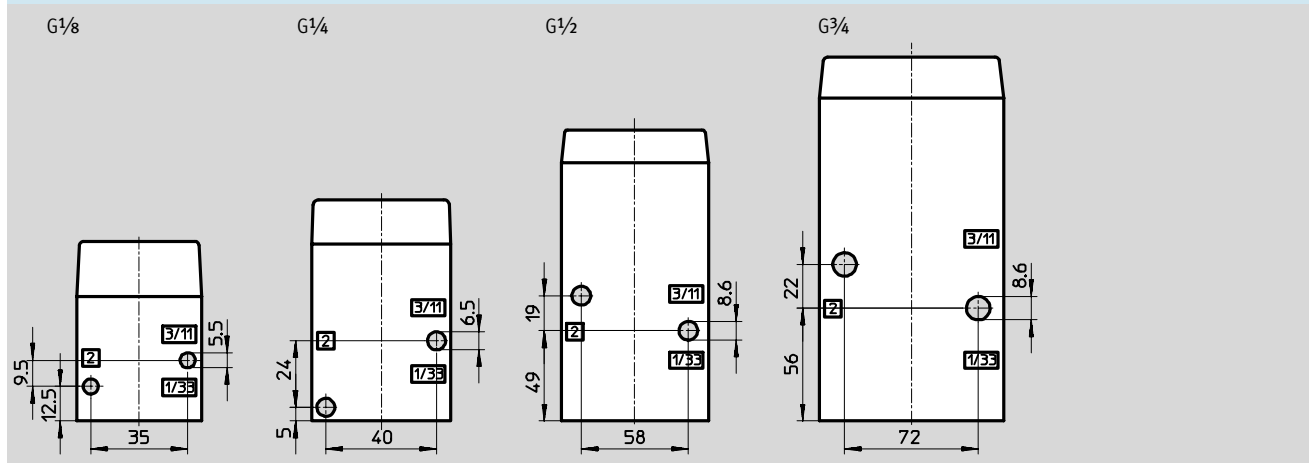

## Ordering data

Circuit symbol	Description	Pneumatic connection	Part No.	Type
	Mechanical reset, optionally normally open or closed	G $\frac{1}{8}$	7 803	VL/O-3- $\frac{1}{8}$ -B
		G $\frac{1}{4}$	9 984	VL/O-3- $\frac{1}{4}$
		G $\frac{1}{2}$	9 983	VL/O-3- $\frac{1}{2}$
		G $\frac{3}{4}$	10 049	VL/O-3- $\frac{3}{4}$

## Ordering data – Wearing parts kits


Pneumatic connection	Part No.	Type
G $\frac{1}{8}$	104 222	VL/O-3- $\frac{1}{8}$ -B
G $\frac{1}{4}$	104 207	VL/O-3- $\frac{1}{4}$
G $\frac{1}{2}$	104 208	VL/O-3- $\frac{1}{2}$



# Pneumatic valves VL, Tiger Classic

Technical data – 5/2-way valves

FESTO

-  - Flow rate  
500 ... 3,700 l/min

Wearing parts kits  
→ 2 / 2.3-35



General technical data				
Pneumatic connection	G1/8	G1/4	G1/2	
Valve function	5/2-way, single pilot			
Constructional design	Poppet valve			
Sealing principle	Soft			
Actuation type	Pneumatic			
Type of reset	Mechanical spring			
Type of pilot control	Direct			
Direction of flow	Non reversible			
Manual override	None			
Exhaust function	With flow control			
Type of mounting	Via through holes			
Mounting position	Any			
Nominal size	[mm]	5	7	14
Standard nominal flow rate	[l/min]	500	800	3,700
Product weight		180	220	1,070

Operating and environmental conditions				
Pneumatic connection	G1/8	G1/4	G1/2	
Operating medium	Filtered compressed air, lubricated or unlubricated			
Operating pressure	[bar]	0 ... 10	0 ... 8	0 ... 10
Pilot pressure	[bar]	See diagram (max. 10 bar)		
Ambient temperature	[°C]	-10 ... +60		

Directional control valves for standard applications  
Tiger Classic

2.3


# Pneumatic valves VL, Tiger Classic

Technical data – 5/2-way valves




## Minimal pilot pressure $p_{12}/p_{14}$ as a function of operating pressure $p_1$

VL-5-1/8

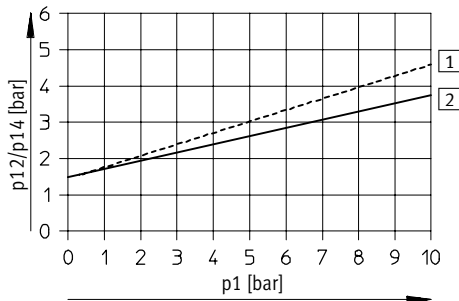


----- Exhaust throttled  
 ———— Exhaust unthrottled

VL-5-1/4

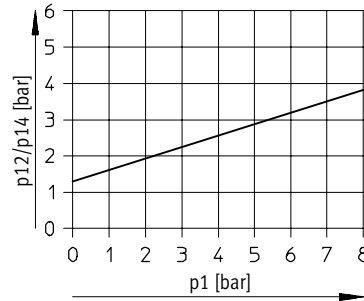

VL-3-1/2

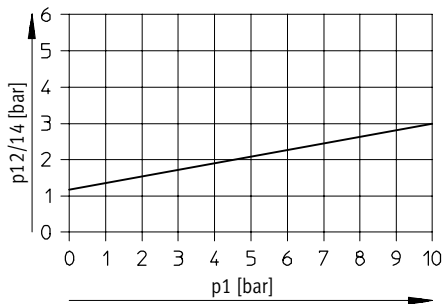


## Valve response times [ms]

Pneumatic connection	G1/8	G1/4	G1/2
On	5	8	6
Off	16	12	27

## Materials

Sectional view

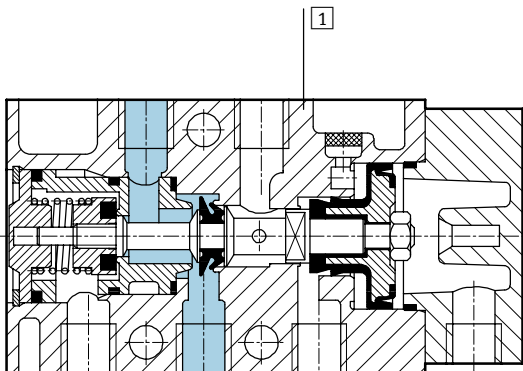


1	Housing	Aluminium die-cast, anodised
-	Seals	Nitrile rubber

# Pneumatic valves VL, Tiger Classic

Technical data – 5/2-way valves




Dimensions Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

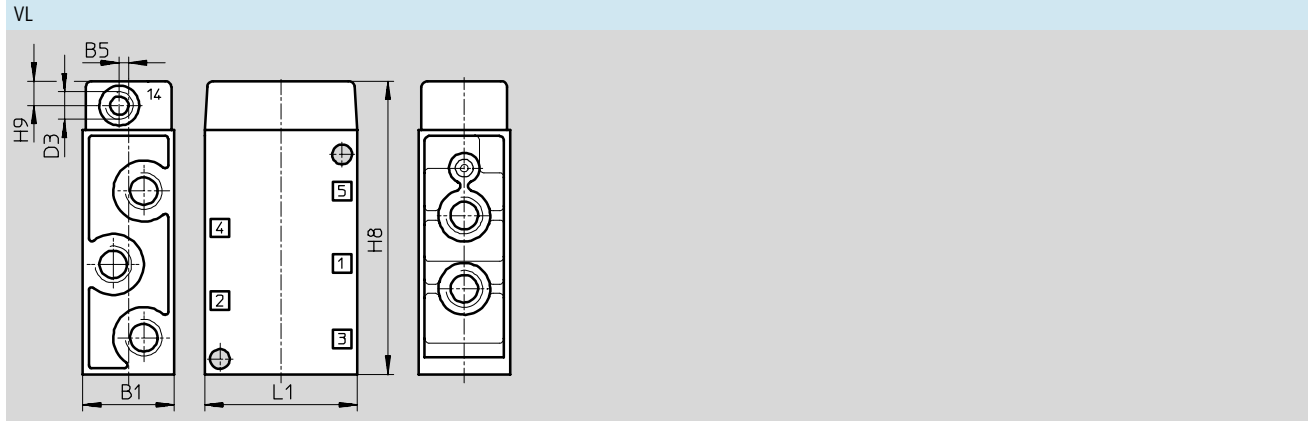

Pneumatic connection	B1	B5	D3	H8	H9	L1
G $\frac{1}{8}$	26	3	G $\frac{1}{8}$	85	8	45
G $\frac{1}{4}$	30.4	-	G $\frac{1}{8}$	96	8	50
G $\frac{1}{2}$	52	-	G $\frac{1}{4}$	159	10	80

## Attachment diagram

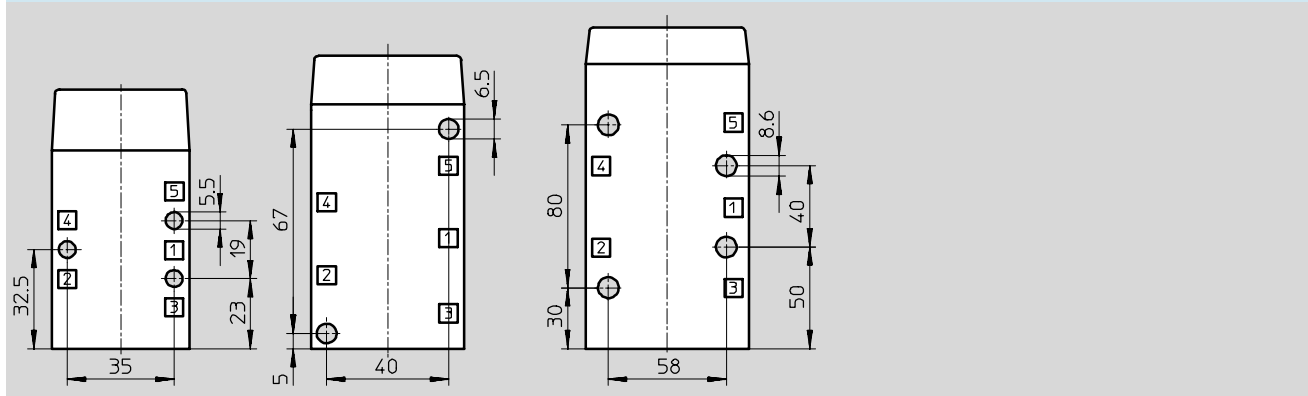

## Ordering data

Circuit symbol	Description	Pneumatic connection	Part No.	Type
	Mechanical reset	G $\frac{1}{8}$	9 764	VL-5-1/8
		G $\frac{1}{4}$	9 199	VL-5-1/4
		G $\frac{1}{2}$	9 445	VL-5-1/2

## Ordering data – Wearing parts kits

Pneumatic connection	Part No.	Type
G $\frac{1}{8}$	104 209	VL-5-1/8 <sup>1)</sup>
G $\frac{1}{4}$	104 211	VL-5-1/4 <sup>2)3)</sup>
G $\frac{1}{2}$	104 212	VL-5-1/2


- 1) Order mounting sleeves 228 389 separately
- 2) Order mounting sleeves 229 363 separately
- 3) Use from 1/81 series

Core Range

# Pneumatic valves JH, Tiger Classic

Technical data – 5/2-way valves, double pilot valves



-  - Flow rate  
600 ... 4,500 l/min

Wearing parts kits  
→ 2 / 2.3-39



General technical data			
Pneumatic connection	G1/8	G1/4	G1/2
Valve function	5/2-way, double pilot		
Constructional design	Poppet valve		
Sealing principle	Soft		
Actuation type	Pneumatic		
Type of pilot control	Direct		
Direction of flow	Non reversible		
Exhaust function	With flow control		
Manual override	Resetting		
Type of mounting	Via through holes		
Mounting position	Any		
Nominal size [mm]	5	7	14
Standard nominal flow rate	600	1,100	4,500
Product weight [g]	245	330	1,130


Operating and environmental conditions			
Pneumatic connection	G1/8	G1/4	G1/2
Operating medium	Filtered compressed air, lubricated or unlubricated		
Operating pressure [bar]	0 ... 10	0 ... 8	0 ... 10
Pilot pressure [bar]	See diagram (max. 10 bar)		
Ambient temperature [°C]	-10 ... +60		

# Pneumatic valves JH, Tiger Classic


Technical data – 5/2-way valves, double pilot valves

**Minimal pilot pressure  $p_{12}/p_{14}$  as a function of operating pressure  $p_1$**


JH-5-1/8

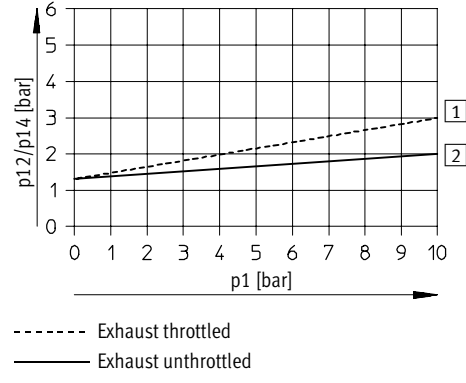


JDH-5-1/8

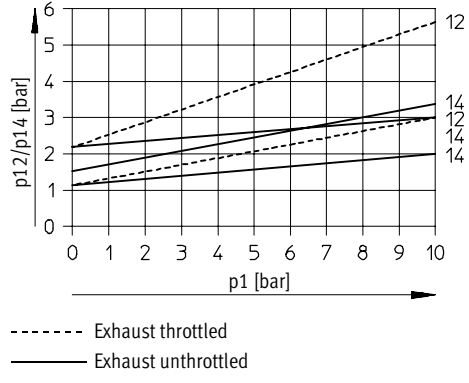


JH-5-1/4

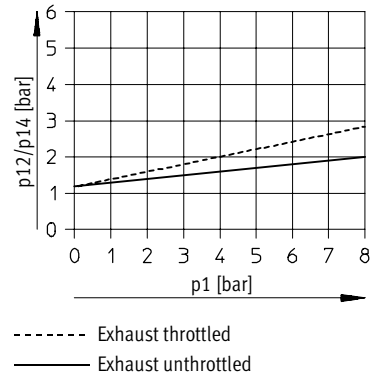

JDH-5-1/4

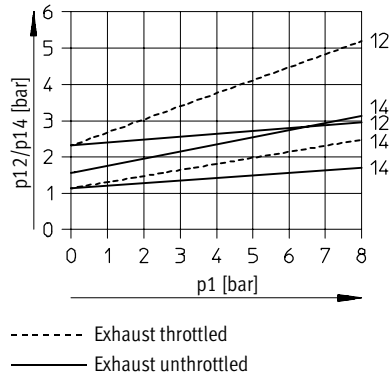

**Valve response times [ms]**

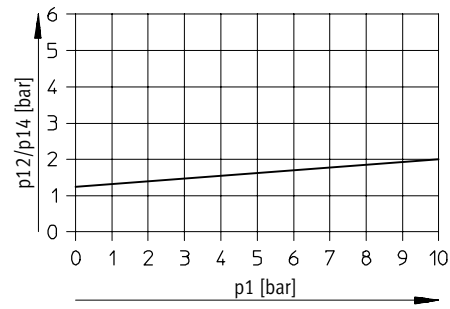

Pneumatic connection	G <sup>1</sup> / <sub>8</sub>		G <sup>1</sup> / <sub>4</sub>		G <sup>1</sup> / <sub>2</sub>
		Dominating signal at 14		Dominating signal at 14	
On/changeover	–	9	–	7	–
Off/changeover	2	16	7	16	3

Directional control valves for standard applications  
 Tiger Classic  
**2.3**


# Pneumatic valves JH, Tiger Classic

Technical data – 5/2-way valves, double pilot valves



## Materials

Sectional view

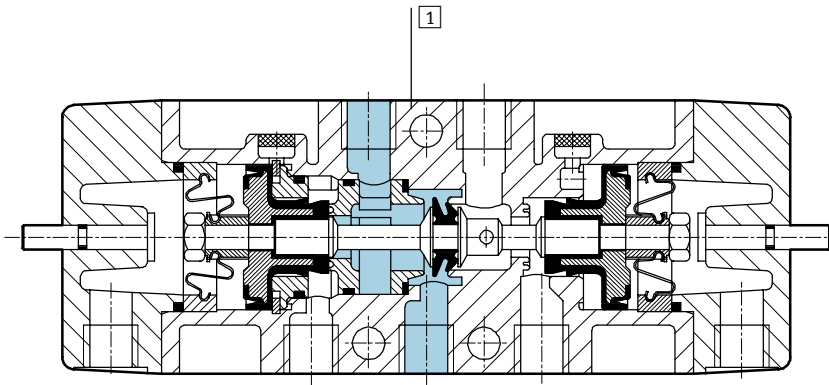


1	Housing	Aluminium die-cast, anodised
-	Seals	Nitrile rubber

## Dimensions

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

JH, JDH

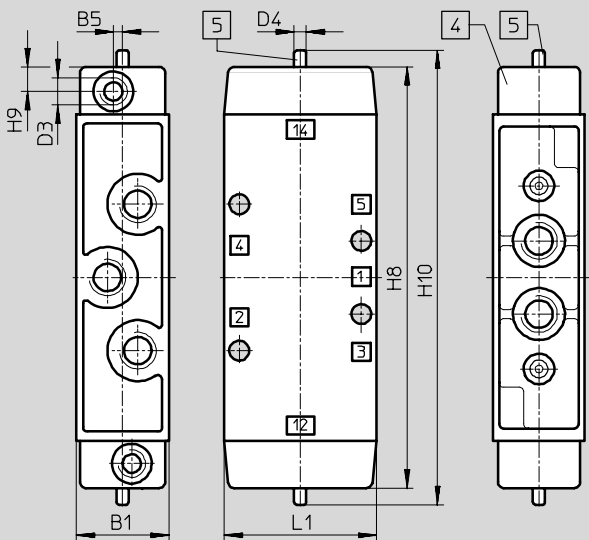

- 4 Cover can be repositioned by 180°
- 5 Manual override


Pneumatic connection	B1	B5	D3	D4 Ø	H8	H9	H10	L1
G <sup>1</sup> / <sub>8</sub>	26	3	G <sup>1</sup> / <sub>8</sub>	5	120	8	132	45
G <sup>1</sup> / <sub>4</sub>	30.4	-	G <sup>1</sup> / <sub>8</sub>	5	138	8	149	50
G <sup>1</sup> / <sub>2</sub>	52	-	G <sup>1</sup> / <sub>4</sub>	9.9	178	10	193	80

# Pneumatic valves JH, Tiger Classic

Technical data – 5/2-way valves, double pilot valves



Attachment diagram

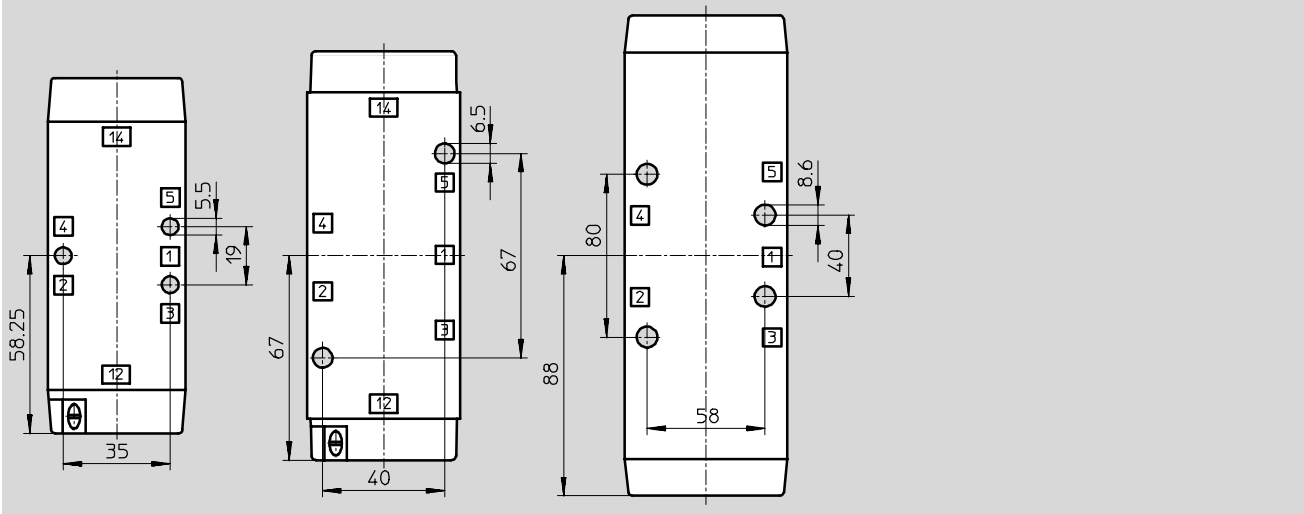

Ordering data				
Circuit symbol	Description	Pneumatic connection	Part No.	Type
		G1/8	8 823	JH-5-1/8
		G1/4	10 408	JH-5-1/4
		G1/2	10 165	JH-5-1/2
	With dominating signal at 14	G1/8	8 824	JDH-5-1/8
		G1/4	10 409	JDH-5-1/4

Ordering data – Wearing parts kits		
Pneumatic connection	Part No.	Type
G1/8	104 891	JH-5-1/8 <sup>1)</sup>
G1/4	104 892	JH-5-1/4 <sup>2)</sup>

- 1) Order mounting sleeves 228 389 separately
- 2) Order mounting sleeves 229 363 separately

Core Range

# Solenoid/pneumatic valves, Tiger Classic

Accessories




## Manifold strip

PAL

Materials:

Manifold: anodised aluminium

Mounting bracket: galvanised steel

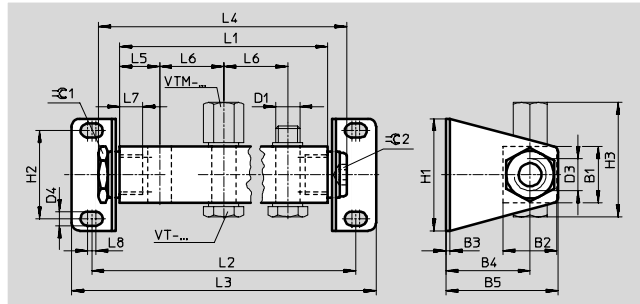

### Dimensions and ordering data

Type	B1	B2	B3	B4	B5	D1	D3	D4	H1	H2	H3	L5	L6	L7	L8	≅ 1	≅ 2
PAL-1/8-...	20	21	2	33.5	44.5	G1/8	G1/4	5.2	44	32	43	18	34	12	4	19	8
PAL-1/4-...	28	27	2	42	56	G1/4	G3/8	7	56	44	56	20	32	14	4	24	10
PAL-1/2-...	40	40	3	73	93	G1/2	G3/4	11	80	60	75	35	69	16	5	36	17

Number of valve ports	L1	L2	L3	L4	Weight [g]	Part No.	Type
<b>Pneumatic connection G1/8</b>							
2	70	96	114	89	145	<b>8 601</b>	<b>PAL-1/8-2</b>
3	104	130	148	123	170	<b>8 602</b>	<b>PAL-1/8-3</b>
4	138	164	182	157	190	<b>8 603</b>	<b>PAL-1/8-4</b>
5	172	198	216	191	215	<b>8 604</b>	<b>PAL-1/8-5</b>
6	206	232	250	225	240	<b>9 767</b>	<b>PAL-1/8-6</b>
<b>Pneumatic connection G1/4<sup>1)</sup></b>							
2	72	100	120	94	330	<b>9 188</b>	<b>PAL-1/4-2</b>
3	104	132	152	126	405	<b>9 189</b>	<b>PAL-1/4-3</b>
4	136	164	184	158	480	<b>9 190</b>	<b>PAL-1/4-4</b>
5	168	196	216	190	555	<b>9 191</b>	<b>PAL-1/4-5</b>
6	200	228	248	222	630	<b>9 192</b>	<b>PAL-1/4-6</b>
<b>Pneumatic connection G1/2</b>							
2	139	181	213	164	770	<b>9 492</b>	<b>PAL-3/8-2</b>
3	208	250	282	233	915	<b>9 493</b>	<b>PAL-3/8-3</b>
4	277	319	351	302	1 060	<b>9 494</b>	<b>PAL-3/8-4</b>
5	346	388	420	371	1 220	<b>9 495</b>	<b>PAL-3/8-5</b>
6	415	457	489	440	1 370	<b>9 496</b>	<b>PAL-3/8-6</b>

1) MOFH-3-3/4 is not suitable for manifold mounting



# Solenoid/pneumatic valves, Tiger Classic

Accessories

## Hollow bolt

VT

For manifold strip PAL

Material:

galvanised steel



Ordering data			
Pneumatic connection	Weight [g]	Part No.	Type
G $\frac{1}{8}$	6	8 626	VT- $\frac{1}{8}$
G $\frac{1}{4}$	15	5 928	VT- $\frac{1}{8}$ -1 <sup>1)</sup>
G $\frac{1}{4}$	15	206 147	VT- $\frac{1}{4}$ -2
G $\frac{1}{2}$	30	9 986	VT- $\frac{1}{2}$

1) For valves with G $\frac{1}{8}$  connection

## Blanking cap

VTM

For sealing vacant valve positions

Material:

wrought aluminium alloy



Ordering data			
Pneumatic connection	Weight [g]	Part No.	Type
G $\frac{1}{8}$	5	9 768	VTM- $\frac{1}{8}$
G $\frac{1}{4}$	5	9 768	VTM- $\frac{1}{8}$ 1 <sup>1)</sup>
G $\frac{1}{4}$	7	3 099	VTM- $\frac{1}{4}$
G $\frac{1}{2}$	28	9 987	VTM- $\frac{1}{2}$

1) For valves with G $\frac{1}{8}$  connection

# Solenoid/pneumatic valves, Tiger Classic


Accessories



## Manifold block

PRS

Material:  
anodised aluminium

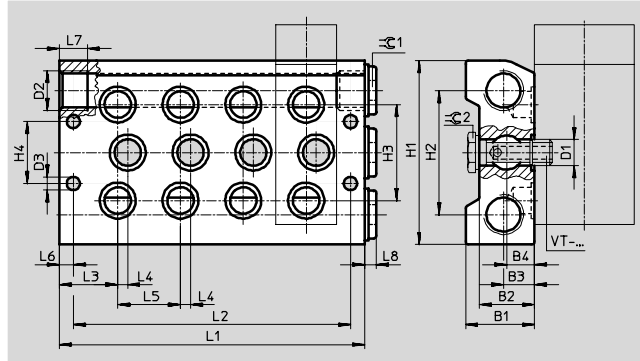

Dimensions and ordering data																				
Type	B1	B2	B3	B4	D1	D2	D3	H1	H2	H3	H4	L3	L4	L5	L6	L7	L8	⊘ 1	⊘ 2	
PRS-1/8-...	28.5	22	12.5	10.8	G1/8	G3/8	6.6	80	56	38	28	23.5	7	27	7	12	5	8	14	
PRS-1/4-...	34.5	27.5	14	14	G1/4	G1/2	6.6	92	62	48	31	29.2	5	31.4	7	14	6	10	17	

Number of valve ports	L1	L2	Weight [g]	Part No.	Type
Pneumatic connection G1/8					
2	81	67	360	11 898	PRS-1/8-2
3	108	94	460	11 899	PRS-1/8-3
4	135	121	625	11 900	PRS-1/8-4
5	162	148	650	11 901	PRS-1/8-5
6	189	175	750	11 902	PRS-1/8-6
Pneumatic connection G1/4					
2	89.8	75.8	590	10 185	PRS-1/4-2
3	121.2	107.2	750	10 186	PRS-1/4-3
4	152.6	138.6	900	10 187	PRS-1/4-4
5	184	170	1070	10 188	PRS-1/4-5
6	215.4	201.4	1 230	10 189	PRS-1/4-6

## Hollow bolt

VT

For manifold block PRS

Material:  
galvanised steel



Ordering data				
Pneumatic connection	Weight [g]	Part No.	Type	
G1/8	17	11 539	VT-1/8-PRSK	
G1/4	32	9 499	VT-1/4-PRS	

Core Range

# Solenoid/pneumatic valves, Tiger Classic

Accessories

## Blanking plate

### PRSB

For sealing vacant valve positions

Material:  
aluminium



Ordering data			
Pneumatic connection	Weight [g]	Part No.	Type
G $\frac{1}{8}$	55	11 687	PRSB- $\frac{1}{8}$
G $\frac{1}{4}$	80	11 688	PRSB- $\frac{1}{4}$

## Hollow bolt

### VT

For separate compressed air supply on valve

Material:  
galvanised steel



Ordering data			
Pneumatic connection	Weight [g]	Part No.	Type
G $\frac{1}{8}$	16	12 634	VT- $\frac{1}{8}$ -AJK-P
G $\frac{1}{4}$	24	12 910	VT- $\frac{1}{8}$ -AJS-P*
G $\frac{1}{4}$	45	12 635	VT- $\frac{1}{4}$ -AJ-P

1) For valves with G $\frac{1}{8}$  connection





# Solenoid/pneumatic valves, Tiger Classic



Accessories



Directional control valves for standard applications  
Tiger Classic

2.3




Ordering data		
	Note	Part No. Type
<b>Push-in/threaded fittings QS</b>		
		→ Volume 3
<b>Silencer</b>		
		→ Volume 3
<b>Blanking plug</b>		
	A blanking plug is included in the scope of delivery for manifold strip PAL. 3 blanking plugs are included in the scope of delivery for manifold block PRS.	→ Volume 3
<b>Reducing nipple</b>		
	A reducing nipple is included in the scope of delivery for manifold strip PAL. 3 reducing nipples are included in the scope of delivery for manifold block PRS.	→ Volume 3


Ordering data – Solenoid coils			Data sheets → 2 / 7.1-0	
	Voltage	Cable length [m]	Part No.	Type
<b>F solenoid coils</b>				
	12 V DC	–	34 410	MSFG-12DC-OD
	24 V DC and 42 V AC, 50 ... 60 Hz	–	34 411	MSFG-24DC/42AC-OD
	42 V DC	–	34 413	MSFG-42DC-OD
	24 V AC	–	34 415	MSFG-24AC-OD
	48 V AC, 50 ... 60 Hz	–	34 418	MSPW-48AC-OD
	110 V AC, 50 ... 60 Hz and 120 V AC, 60 Hz	–	34 420	MSPW-110AC-OD
	230 V AC, 50 ... 60 Hz and 240 V AC, 60 Hz	–	34 422	MSPW-230AC-OD
	240 V AC, 50 ... 60 Hz	–	34 424	MSPW-240AC-OD
<b>F solenoid coils – Explosion-proof to EN 50 028</b>				
	24 V DC	1	535 619	MSFG-24DC-EX
	24 V DC	5	535 621	MSFG-24DC-EX-K5
	24 V AC, 50 ... 60 Hz	1	535 623	MSPW-24AC-EX
	110 V AC, 50 ... 60 Hz	1	535 622	MSPW-110AC-EX
	230 V AC, 50 ... 60 Hz	1	535 620	MSPW-110AC-EX
	230 V AC, 50 ... 60 Hz	5	535 625	MSPW-110AC-EX-K5

 Core Range

# Solenoid/pneumatic valves, Tiger Classic

Accessories

Ordering data – Plug sockets/plug sockets with cable for F solenoid coils					
	Voltage	Cable length [m]	LED	Part No.	Type
Plug socket without cable					Data sheets → 2 / 7.2-10
	–	–	–	<b>34 431</b>	<b>MSSD-F</b>
Plug socket without cable with insulation displacement technology					Data sheets
2 / 7.2-10					
	–	–	–	<b>192 746</b>	<b>MSSD-F-S-M16</b>
Plug socket with cable					Data sheets → 2 / 7.3-21
	24 V DC	2.5	■	<b>30 935</b>	<b>KMF-1-24DC-2,5-LED</b>
	24 V DC	5	■	<b>30 937</b>	<b>KMF-1-24DC-5-LED</b>
	24 V DC	10	■	<b>193 458</b>	<b>KMF-1-24DC-10-LED</b>
	Up to 240 V	2.5	–	<b>30 936</b>	<b>KMF-1-230AC-2,5</b>
	Up to 240 V	5	–	<b>30 938</b>	<b>KMF-1-230AC-5</b>

Ordering data – Illuminating seal				Data sheets → 2 / 7.4-1	
	Voltage	Part No.	Type		
For F solenoid coils					
	12 ... 24 V DC	<b>19 143</b>	<b>MF-LD-12-24DC</b>		
	230 V DC/V AC	<b>19 144</b>	<b>MF-LD-230AC</b>		

 Core Range