


- Piston rod secured against rotation by means of guide rods and yoke plate
- Wide range of accessories
- Spare parts service

Specified types in accordance with ATEX directive for potentially explosive atmospheres  
➔ [www.festo.com/en/ex](http://www.festo.com/en/ex)

# Compact cylinders ADNGF, standard port pattern


Peripherals overview

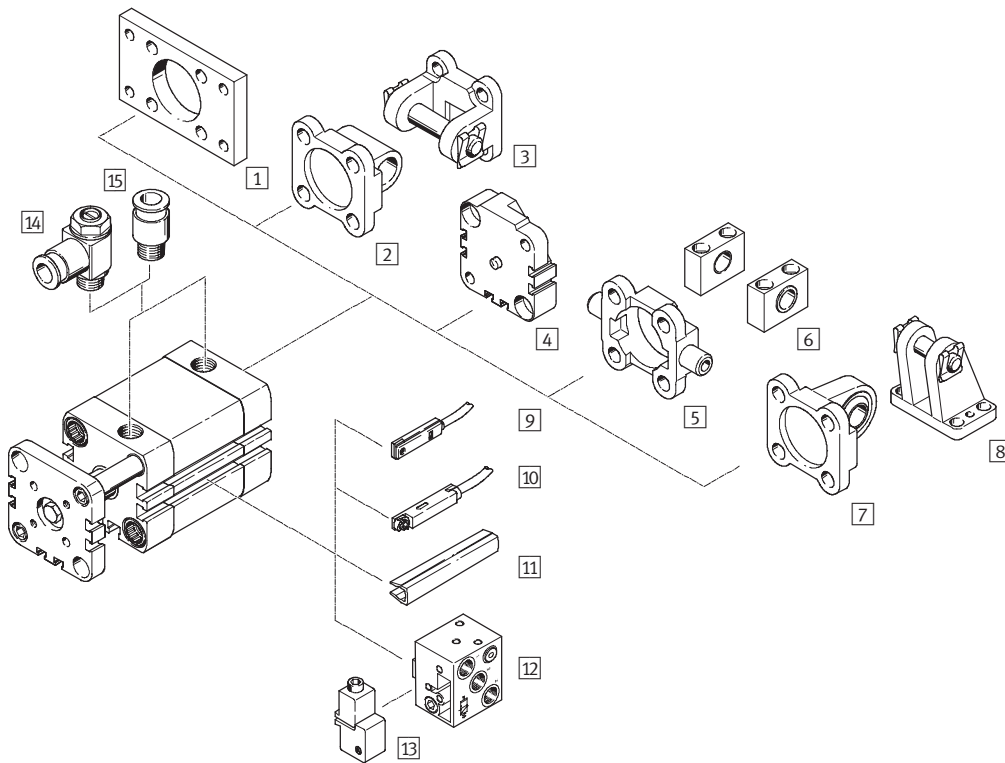

Mounting attachments and accessories		
	Brief description	→ Page
1	Flange mounting FNC	1 / 6.2-27
2	Swivel flange SNCL	1 / 6.2-28
3	Swivel flange SNCB	1 / 6.2-31
4	Multi-position kit DPNA	1 / 6.2-30
5	Trunnion flange ZNCF/CRZNG	1 / 6.2-32
6	Trunnion support LNZG	1 / 6.2-33
7	Swivel flange SNCS	1 / 6.2-29
8	Clevis foot LBG	1 / 6.2-29
9	Proximity sensor SME/SMT-8	1 / 6.2-35
10	Proximity sensor SME/SMT-8M	1 / 6.2-35
11	Slot cover ABP-5-S	1 / 6.2-35
12	Proximity sensor SMPO-8E	1 / 6.2-36
13	Mounting kit SMB-8E	1 / 6.2-36
14	One-way flow control valve GRLA/GRLZ	1 / 6.2-34
15	Push-in fitting QS	Volume 3

# Compact cylinders ADNGF, standard port pattern

Type codes

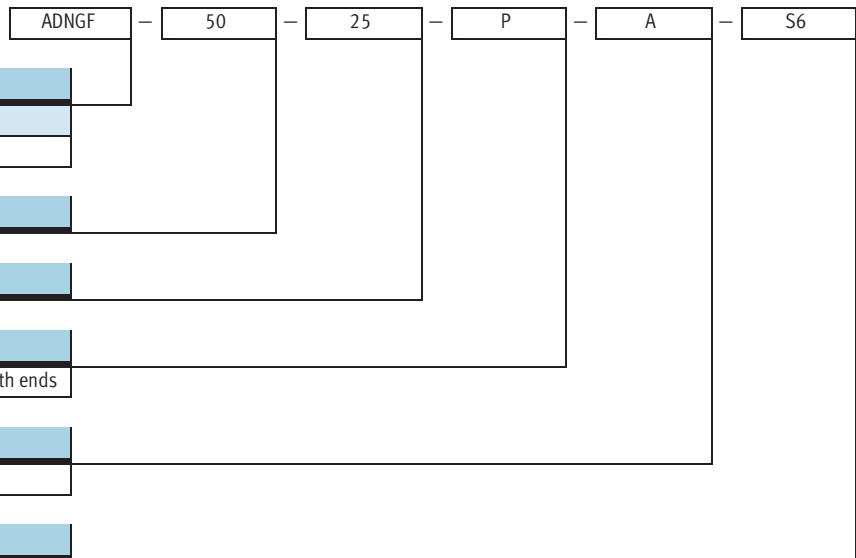

**Type**

Double-acting	
ADNGF	Compact cylinder

**Piston Ø [mm]**

**Stroke [mm]**

**Cushioning**

P	Flexible cushioning rings/pads at both ends
---	---


**Position sensing**

A	Via proximity sensor
---	----------------------


**Variant**

S2	Through piston rod
S6	Heat-resistant seals up to max. 120 °C
TL	Captive rating plate

**With guide rods and yoke plate**  
ADNGF-...



**With guide rods, yoke plate and through piston rod**  
ADNGF-...-S2




# Compact cylinders ADNGF, standard port pattern

Technical data



## Function



- - Diameter  
12 ... 100 mm

- - Stroke length  
1 ... 400 mm

## Variants



S2



S6



General technical data										
Piston $\varnothing$	12	16	20	25	32	40	50	63	80	100
Pneumatic connection	M5	M5	M5	M5	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$
Constructional design	Piston									
	Piston rod									
	Cylinder barrel									
Cushioning	Flexible cushioning rings/pads at both ends									
Position sensing	Via proximity sensor									
Type of mounting	Via through-holes									
	Via female threads									
	Via accessories									
Mounting position	Any									

Operating and environmental conditions										
Piston $\varnothing$	12	16	20	25	32	40	50	63	80	100
Operating medium	Filtered compressed air, lubricated or unlubricated									
Operating pressure [bar]	1.5 ... 10			1 ... 10						
	S2	1.5 ... 10				1 ... 10				
Ambient temperature <sup>1)</sup> [°C]	-20 ... +80									
S6	0 ... +120									
Corrosion resistance class CRC <sup>2)</sup>	2									

1) Note operating range of proximity sensors

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents


Forces [N] and impact energy [J]										
Piston $\varnothing$	12	16	20	25	32	40	50	63	80	100
Theoretical force at 6 bar, advancing	68	121	188	295	483	754	1178	1870	3016	4712
	S2	51	90	141	247	415	686	1057	1750	2827
Theoretical force at 6 bar, retracting	51	90	141	247	415	686	1057	1750	2827	4524
	S2	51	90	141	247	415	686	1057	1750	2827
Max. impact energy at the end positions	0.07	0.15	0.2	0.3	0.4	0.7	1.0	1.3	1.8	2.5

# Compact cylinders ADNGF, standard port pattern

Technical data




Max. lateral force  $F_q$  as a function of the projection  $x$

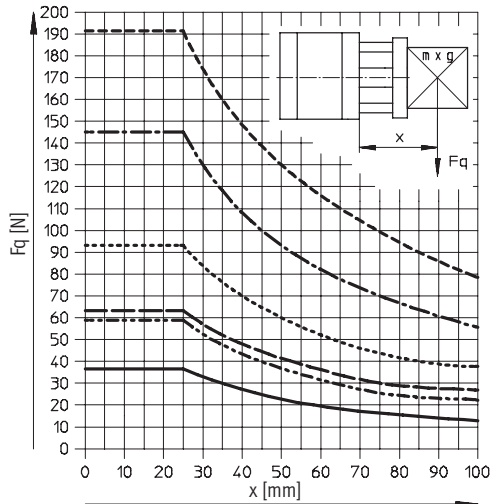

- $\varnothing$  12/16
- - -  $\varnothing$  20/25
- — —  $\varnothing$  32
- · · · ·  $\varnothing$  40
- · - · -  $\varnothing$  50/63
- - - - -  $\varnothing$  80/100

Torque  $M$  as a function of the stroke length  $l$

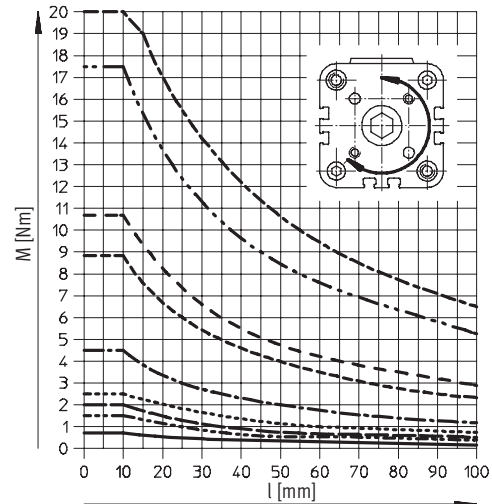


- $\varnothing$  12/16
- - -  $\varnothing$  20
- — —  $\varnothing$  25
- · · · ·  $\varnothing$  32
- · - · -  $\varnothing$  40
- - - - -  $\varnothing$  50
- · - · -  $\varnothing$  63
- - - - -  $\varnothing$  80
- - - - -  $\varnothing$  100

Weight [g]										
Piston $\varnothing$	12	16	20	25	32	40	50	63	80	100
Product weight with 0 mm stroke	90	93	161	191	327	430	687	915	1678	2673
Additional weight per 10 mm stroke	14	16	26	28	38	45	64	72	97	116
Moving load with 0 mm stroke	22	29	60	85	122	164	287	373	778	1089
Additional load per 10 mm stroke	4	6	11	11	17	17	29	29	43	43

## Materials

Sectional view

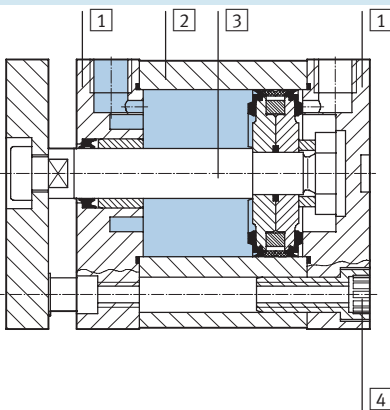

Compact cylinder	Basic version	S6
1 Cover	Anodised aluminium	
2 Cylinder barrel	Anodised aluminium	
3 Piston rod	High-alloy steel	
4 Flange screws	$\varnothing$ 12 ... 16	High-alloy steel
	$\varnothing$ 20 ... 63	Galvanised steel
	$\varnothing$ 80 ... 100	Standard screws, galvanised steel
- Seals	Polyurethane	Fluoro elastomer

# Compact cylinders ADNGF, standard port pattern


Technical data



## Dimensions – Basic version


Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

∅ 12 ... 63

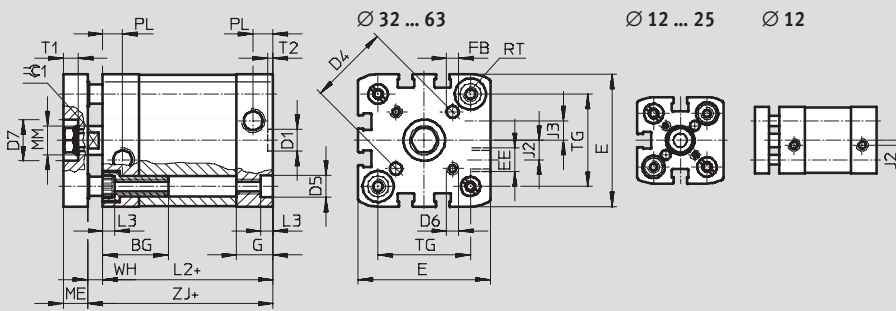

+ = plus stroke length

∅ 80 ... 100

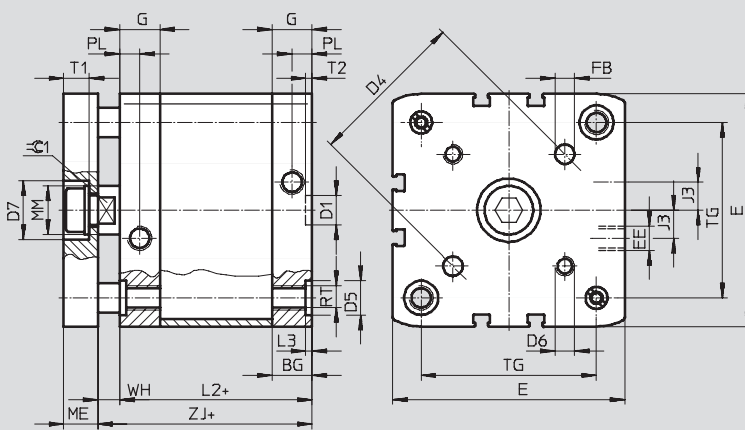

+ = plus stroke length

∅	BG	D1	D4	D5	D6	D7	E	EE	FB	G	J2	J3
[mm]		∅ H9	∅	∅ F9		∅ H9			∅ H8			
12	17	9	12	6	M3	-	27.5 <sup>+0.3</sup>	M5	3	10.5	2	-
16			14			29 <sup>+0.3</sup>				11		
20	19.5		17	9	M4	14	35.5 <sup>+0.3</sup>		4	12	2.6	
25			22		M5	17	39.5 <sup>+0.3</sup>					
32	27	12	28	12	M6	22	47 <sup>+0.3</sup>	G <sup>1</sup> / <sub>8</sub>	5	15	6	6
40			33									54.5 <sup>+0.3</sup>
50		42	15	50	M8	24	65.5 <sup>+0.3</sup>		6	8	16.5	11.5
63		65		M10	75.5 <sup>+0.3</sup>							
80	16.5		80			95.5 <sup>+0.6</sup>	8	10	21.5	20		
100	21.5					113.5 <sup>+0.6</sup>						

∅	L2	L3	ME	MM	PL	RT	T1	T2	TG	WH	ZJ	≈ <sub>1</sub>	
[mm]	max.	+0.2		∅ h8	+0.2			+0.1	±0.2	+1		h13	
12	35	3.5	6	6	6	M4	-	2.1	16	4.2	40	5	
16				8								18	7
20	37	5	8	10	M5	5	5	2.1	22	5.65	43	9	
25									26				45
32	44		12	12	M6	6	6	6	2.1	32.5	6.15	50	10
40	38									51			
50	45	12	16	M8	7.5	7.5	2.6	2.6	46.5	8.25	53	13	
63	49								56.5				57
80	54	2.6	14	20	M10	10.5	10.5	2.6	72	9	63	17	
100	67								89				76

# Compact cylinders ADNGF, standard port pattern


Technical data



## Dimensions – Variant

Download CAD data → [www.festo.com/en/engineering](http://www.festo.com/en/engineering)

S2 – Through piston rod



+ = plus stroke length  
++ = plus 2x stroke length

∅ [mm]	AF min.	KF	T4	WH +1	ZJ	ZM
12	8	M3	1.5	4.2	40	44.2
16	10	M4		4.85		44.85
20	14	M6	2.6	5.65	43	48.65
25					45	50.65
32	16	M8	3.3	6.15	50	56.15
40					51	57.15
50	20	M10	4.7	8.25	53	61.25
63					57	65.25
80		M12	6.1	9	63	72
100					76	85

# Compact cylinders ADNGF, standard port pattern

Ordering data – Modular products



M Mandatory data						O Options		
Module No.	Function	Size	Stroke	Cushioning	Position sensing	Type of piston rod	Temperature resistance	Captive rating plate
537 123	ADNGF	12	1 ... 400	P	A	S2		
537 124								
537 125								
537 126								
537 127								
537 128								
537 129								
537 130								
537 131								
537 132								
<b>Order example</b>								
<b>537 128</b>	<b>ADNGF</b>	<b>- 40</b>	<b>- 250</b>	<b>- P</b>	<b>- A</b>	<b>- S2</b>	<b>- S6</b>	<b>- TL</b>

Ordering table														
Size	12	16	20	25	32	40	50	63	80	100	Condi- tions	Code	Enter code	
M Module No.	<b>537123</b>	<b>537124</b>	<b>537125</b>	<b>537126</b>	<b>537127</b>	<b>537128</b>	<b>537129</b>	<b>537130</b>	<b>537131</b>	<b>537132</b>				
Function	Compact cylinder, double-acting, standard port pattern											<b>ADNGF</b>	ADNGF	
Size [mm]	12	16	20	25	32	40	50	63	80	100		-...		
Stroke [mm]	1 ... 200		3 ... 200		5 ... 300			5 ... 400				-...		
Cushioning	Flexible cushioning rings/pads at both ends											<b>-P</b>	-P	
Position sensing	Via proximity sensor											<b>-A</b>	-A	
O Type of piston rod	Through piston rod											<b>-S2</b>		
Temperature resistance	Heat-resistant seals up to max. 120 °C											<b>1</b>	<b>-S6</b>	
Captive rating plate	Laser etched rating plate												<b>-TL</b>	

<sup>1</sup> S6 Max. stroke: 250 mm

Transfer order code




# Compact cylinders ADNGF, standard port pattern



Accessories

## Flange mounting FNC

Material:  
Galvanised steel  
Free of copper, PTFE and silicone

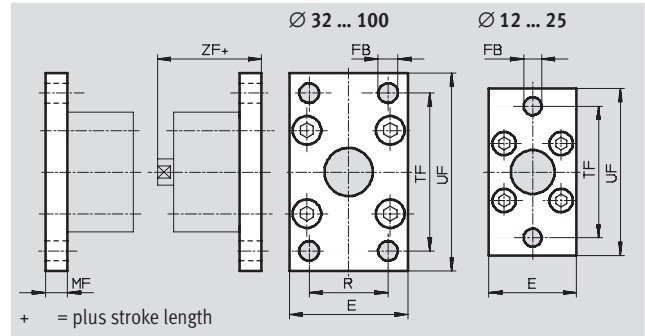

Dimensions and ordering data											
For Ø	E	FB	MF	R	TF	UF	ZF	CRC <sup>1)</sup>	Weight	Part No.	Type
[mm]		Ø				±1			[g]		
12	28	5.5	8	-	40	50	48	2	80	537 245	FNC-12
16	29				43	55					
20	36	6.6			55	70	51	2	145	537 247	FNC-20
25	40				60	76	53	2	170	537 248	FNC-25
32	45	7	10	32	64	80	60	2	240	174 376	FNC-32
40	54	9		36	72	90	61	2	280	174 377	FNC-40
50	65		12	45	90	110	65	2	520	174 378	FNC-50
63	75			50	100	120	69	2	690	174 379	FNC-63
80	93	12	16	63	126	150	79	2	1650	174 380	FNC-80
100	110	14		75	150	175	92	2	2400	174 381	FNC-100

1) Corrosion resistance class 2 to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

# Compact cylinders ADNGF, standard port pattern

Accessories





## Swivel flange SNCL

Material:

SNCL: Die-cast aluminium

SNCL-...-R3: Die-cast aluminium with protective coating

Free of copper, PTFE and silicone

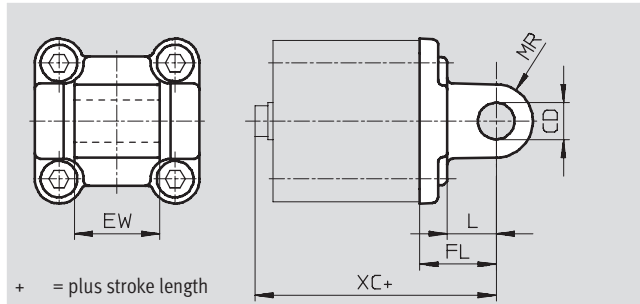

+ = plus stroke length

Dimensions and ordering data						
For $\varnothing$	CD	EW	FL	L	MR	XC
[mm]	$\varnothing$ H9	h12	$\pm 0.2$			
12	6	12	16	10	6	56
16						
20	8	16	20	14	8	63
25						65
32	10	26	22	13	10	72
40	12	28	25	16	12	76
50		32	27			80
63	16	40	32	21	16	89
80		50	36	22		99
100	20	60	41	27	20	117

For $\varnothing$	Basic version				R3 – High corrosion protection			
	CRC <sup>1)</sup>	Weight [g]	Part No.	Type	CRC <sup>1)</sup>	Weight [g]	Part No.	Type
[mm]								
12	2	20	537 790	SNCL-12	3	20	537 794	SNCL-12-R3
16	2	25	537 791	SNCL-16	3	25	537 795	SNCL-16-R3
20	2	40	537 792	SNCL-20	3	40	537 796	SNCL-20-R3
25	2	45	537 793	SNCL-25	3	45	537 797	SNCL-25-R3
32	2	85	174 404	SNCL-32	–	–	–	–
40	2	115	174 405	SNCL-40	–	–	–	–
50	2	180	174 406	SNCL-50	–	–	–	–
63	2	270	174 407	SNCL-63	–	–	–	–
80	2	480	174 408	SNCL-80	–	–	–	–
100	2	700	174 409	SNCL-100	–	–	–	–

1) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 3 to Festo standard 940 070

Components requiring higher corrosion resistance. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface



# Compact cylinders ADNGF, standard port pattern



Accessories

## Swivel flange SNCS

Material:  
Die-cast aluminium

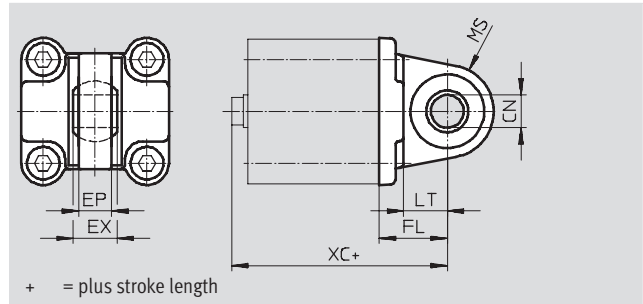


Dimensions and ordering data												
For Ø	CN	EP	EX	FL	LT	MS	XC	CRC <sup>1)</sup>	Weight	Part No.	Type	
[mm]	Ø H7	+0.2		±0.2					[g]			
32	10	10.5	14	22	13	15	66	2	85	174 397	SNCS-32	
40	12	12	16	25	16	17	70	2	125	174 398	SNCS-40	
50	16	15	21	27	16	20	72	2	210	174 399	SNCS-50	
63	16	15	21	32	21	22	81	2	280	174 400	SNCS-63	
80	20	18	25	36	22	27	90	2	540	174 401	SNCS-80	
100	20	18	25	41	27	29	108	2	700	174 402	SNCS-100	

1) Corrosion resistance class 2 to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

## Clevis foot LBG

The clevis foot is secured against rotation with a dowel pin.

Material:  
Nodular graphite cast iron  
Free of copper, PTFE and silicone

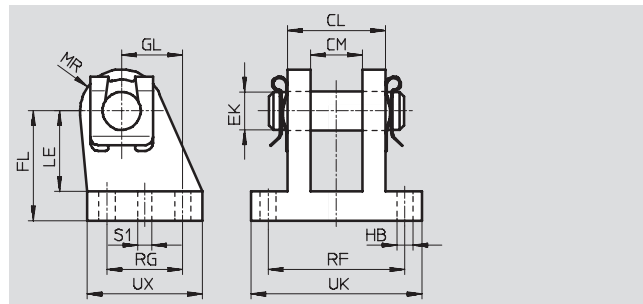

Dimensions and ordering data																	
For Ø	CL	CM	EK	FL	GL	HB	LE	MR	RF	RG	S1	UK	UX	CRC <sup>1)</sup>	Weight	Part No.	Type
[mm]			Ø			Ø					Ø				[g]		
32	28	14.1	10	32	16	6.8	24	12	42	20	4.8	56	36	2	220	31 761	LBG-32
40	30	16.1	12	36	20	6.8	26	14	44	26	5.8	58	41.5	2	300	31 762	LBG-40
50	40	21.1	16	45	25	9.2	33	15	56	31	5.8	70	47	2	540	31 763	LBG-50
63	40	21.1	16	50	25	9	38	17	56	31	7.8	70	47	2	580	31 764	LBG-63
80	50	25.1	20	63	30	11	49	18	70	36	7.8	89	57	2	1050	31 765	LBG-80
100	50	25.1	20	71	41	11	56	22	70	46	9.8	89	67.5	2	1375	31 766	LBG-100

1) Corrosion resistance class 2 to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents


# Compact cylinders ADNGF, standard port pattern


Accessories



## Multi-position kit DPNA

Material:  
 Flange: Aluminium  
 Screws: Galvanised steel  
 Free of copper, PTFE and silicone

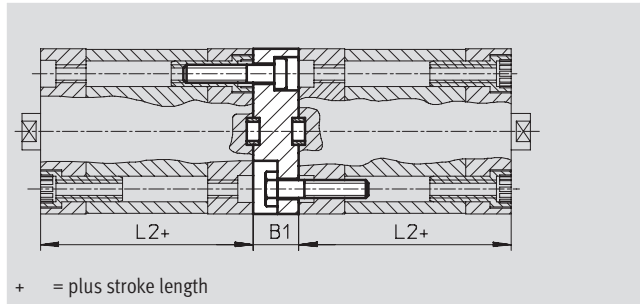

 - Note  
 The maximum overall stroke length may not be exceeded when combining cylinders and multi-position kits.

Dimensions and ordering data						
For Ø	L2	B1	Max. overall stroke length	CRC <sup>1)</sup>	Part No.	Type
[mm]			[mm]			
12	35	13	600	2	537 263	DPNA-12
16			600	2	537 264	DPNA-16
20	600		2	537 265	DPNA-20	
25	600		2	537 266	DPNA-25	
32	44		800	2	537 267	DPNA-32
40	45		15	800	2	537 268
50		800		2	537 269	DPNA-50
63		800		2	537 270	DPNA-63
80	54	17	1000	2	537 271	DPNA-80
100	67	19.5	1000	2	537 272	DPNA-100


1) Corrosion resistance class 2 to Festo standard 940 070  
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

# Compact cylinders ADNGF, standard port pattern

Accessories

## Swivel flange SNCB/SNCB-...-R3

Material:  
 SNCB: Die-cast aluminium  
 SNCB-...-R3: Die-cast aluminium with protective coating, high corrosion protection  
 Free of copper, PTFE and silicone

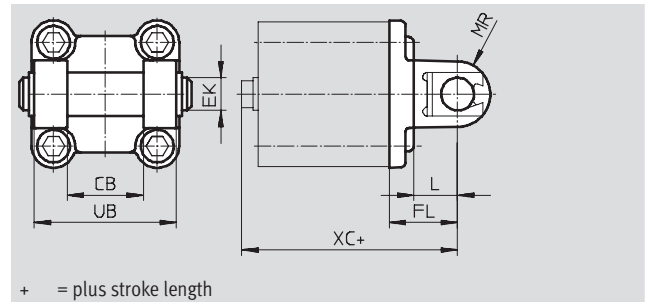

Dimensions and ordering data							
For $\varnothing$	CB	EK	FL	L	MR	UB	XC
[mm]	H14	$\varnothing$ e8	$\pm 0.2$			h14	
32	26	10	22	13	10	45	72
40	28	12	25	16	12	52	76
50	32	12	27	16	12	60	80
63	40	16	32	21	16	70	89
80	50	16	36	22	16	90	99
100	60	20	41	27	20	110	117

For $\varnothing$	Basic version				R3 – High corrosion protection			
	CRC <sup>1)</sup>	Weight [g]	Part No.	Type	CRC <sup>1)</sup>	Weight [g]	Part No.	Type
[mm]								
32	2	100	<b>174 390</b>	<b>SNCB-32</b>	3	100	<b>176 944</b>	<b>SNCB-32-R3</b>
40	2	150	<b>174 391</b>	<b>SNCB-40</b>	3	150	<b>176 945</b>	<b>SNCB-40-R3</b>
50	2	225	<b>174 392</b>	<b>SNCB-50</b>	3	225	<b>176 946</b>	<b>SNCB-50-R3</b>
63	2	365	<b>174 393</b>	<b>SNCB-63</b>	3	365	<b>176 947</b>	<b>SNCB-63-R3</b>
80	2	610	<b>174 394</b>	<b>SNCB-80</b>	3	610	<b>176 948</b>	<b>SNCB-80-R3</b>
100	2	925	<b>174 395</b>	<b>SNCB-100</b>	3	925	<b>176 949</b>	<b>SNCB-100-R3</b>

1) Corrosion resistance class 2 to Festo standard 940 070  
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.  
 Corrosion resistance class 3 to Festo standard 940 070  
 Components requiring higher corrosion resistance. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface

# Compact cylinders ADNGF, standard port pattern


Accessories



## Trunnion flange ZNCF/CRZNG

Material:

ZNCF: Special steel casting  
 CRZNG: Electrolytically polished special steel casting  
 Free of copper, PTFE and silicone

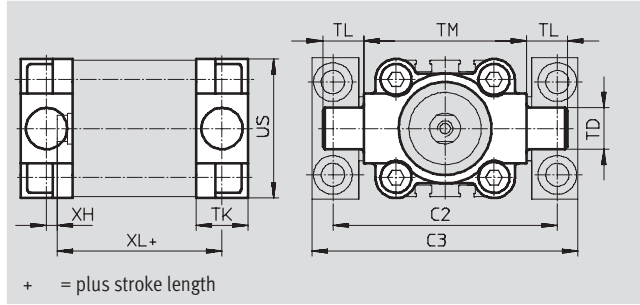

Dimensions and ordering data									
For Ø	C2	C3	TD	TK	TL	TM	US	XH	XL
[mm]			Ø e9						
32	71	86	12	16	12	50	45	2	52
40	87	105	16	20	16	63	54	4	55
50	99	117	16	24	16	75	64	4	57
63	116	136	20	24	20	90	75	4	61
80	136	156	20	28	20	110	93	5	81
100	164	189	25	38	25	132	110	10	86

For Ø	Basic version				R3 – High corrosion protection			
	CRC <sup>1)</sup>	Weight [g]	Part No.	Type	CRC <sup>1)</sup>	Weight [g]	Part No.	Type
[mm]								
32	2	130	<b>174 411</b>	<b>ZNCF-32</b>	4	150	<b>161 852</b>	<b>CRZNG-32</b>
40	2	240	<b>174 412</b>	<b>ZNCF-40</b>	4	260	<b>161 853</b>	<b>CRZNG-40</b>
50	2	390	<b>174 413</b>	<b>ZNCF-50</b>	4	430	<b>161 854</b>	<b>CRZNG-50</b>
63	2	600	<b>174 414</b>	<b>ZNCF-63</b>	4	640	<b>161 855</b>	<b>CRZNG-63</b>
80	2	1150	<b>174 415</b>	<b>ZNCF-80</b>	4	1300	<b>161 856</b>	<b>CRZNG-80</b>
100	2	2030	<b>174 416</b>	<b>ZNCF-100</b>	4	2400	<b>161 857</b>	<b>CRZNG-100</b>

1) Corrosion resistance class 2 to Festo standard 940 070  
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.  
 Corrosion resistance class 4 to Festo standard 940 070  
 Components requiring higher corrosion resistance. Parts used with aggressive media, e.g. food or chemical industry. These applications should be supported with special tests with the media if required

# Compact cylinders ADNGF, standard port pattern

Accessories


## Trunnion support LNZG

Material:

Trunnion support: Anodised aluminium

Plain bearing: Plastic

Free of copper, PTFE and silicone

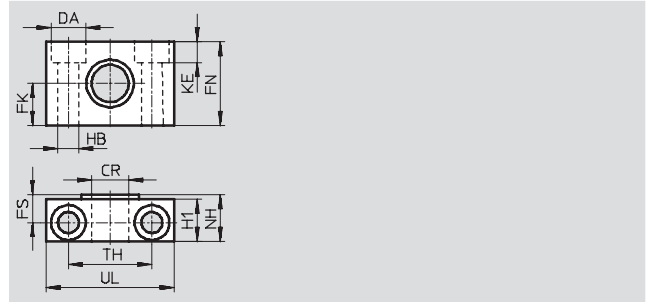



Dimensions and ordering data														Weight [g]	Part No.	Type
For $\varnothing$ [mm]	CR $\varnothing$ D11	DA $\varnothing$ H13	FK $\varnothing$ $\pm 0.1$	FN	FS	H1	HB $\varnothing$ H13	KE	NH	TH $\pm 0.2$	UL	CRC <sup>1)</sup>				
32	12	11	15	30	10.5	15	6.6	6.8	18	32	46	2	125	32 959	LNZG-32	
40, 50	16	15	18	36	12	18	9	9	21	36	55	2	400	32 960	LNZG-40/50	
63, 80	20	18	20	40	13	20	11	11	23	42	65	2	480	32 961	LNZG-63/80	
100	25	20	25	50	16	24.5	14	13	28.5	50	75	2	960	32 962	LNZG-100/125	

1) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

# Compact cylinders ADNGF, standard port pattern

Accessories




Ordering data – One-way flow control valves				Technical data → Volume 2	
	Connection		Material	Part No.	Type
	For Ø	For tubing O.D.			
<b>For exhaust air</b>					
	12, 16, 20, 25	3	Metal design	193 137	GRLA-M5-QS-3-D
		4		193 138	GRLA-M5-QS-4-D
		6		193 139	GRLA-M5-QS-6-D
	32, 40, 50, 63, 80, 100	3		193 142	GRLA-1/8-QS-3-D
		4		193 143	GRLA-1/8-QS-4-D
		6		193 144	GRLA-1/8-QS-6-D
		8		193 145	GRLA-1/8-QS-8-D
		<b>For supply air</b>			
	12, 16, 20, 25	3	Metal design	193 153	GRLZ-M5-QS-3-D
		4		193 154	GRLZ-M5-QS-4-D
		6		193 155	GRLZ-M5-QS-6-D
	32, 40, 50, 63, 80, 100	3		193 156	GRLZ-1/8-QS-3-D
		4		193 157	GRLZ-1/8-QS-4-D
		6		193 158	GRLZ-1/8-QS-6-D
		8		193 159	GRLZ-1/8-QS-8-D








# Compact cylinders ADNGF, standard port pattern

Accessories

**FESTO**

Ordering data – Proximity switches for T-slot, magneto-resistive					Technical data → <a href="http://www.festo.com/catalogue/sm">www.festo.com/catalogue/sm</a>	
	Type of mounting	Switch output	Electrical connection	Cable length [m]	Part No.	Type
<b>N/O contact</b>						
	Insertable in the slot from above, flush with cylinder profile	PNP	Cable, 3-wire	2,5	543 867	SMT-8M-PS-24V-K-2,5-OE
			Plug M8x1, 3-pin	0,3	543 866	SMT-8M-PS-24V-K-0,3-M8D
			Plug M12x1, 3-pin	0,3	543 869	SMT-8M-PS-24V-K-0,3-M12
		NPN	Cable, 3-wire	2,5	543 870	SMT-8M-NS-24V-K-2,5-OE
Plug M8x1, 3-pin	0,3		543 871	SMT-8M-NS-24V-K-0,3-M8D		
	Insertable in the slot lengthwise, flush with the cylinder profile	PNP	Cable, 3-wire	2,5	175 436	SMT-8-PS-K-LED-24-B
			Plug M8x1, 3-pin	0,3	175 484	SMT-8-PS-S-LED-24-B
<b>N/C contact</b>						
	Insertable in the slot from above, flush with cylinder profile	PNP	Cable, 3-wire	7,5	543 873	SMT-8M-PO-24V-K7,5-OE




Ordering data – Proximity switches for T-slot, magnetic reed					Technical data → <a href="http://www.festo.com/catalogue/sm">www.festo.com/catalogue/sm</a>		
	Type of mounting	Switch output	Electrical connection	Cable length [m]	Part No.	Type	
<b>N/O contact</b>							
	Insertable in the slot from above, flush with cylinder profile	Contacting	Cable, 3-wire	2,5	543 862	SME-8M-DS-24V-K-2,5-OE	
				5,0	543 863	SME-8M-DS-24V-K-5,0-OE	
			Plug M8x1, 3-pin	Cable, 3-wire	2,5	543 872	SME-8M-ZS-24V-K-2,5-OE
				0,3	543 861	SME-8M-DS-24V-K-0,3-M8D	
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	2,5	150 855	SME-8-K-LED-24	
			Plug M8x1, 3-pin	0,3	150 857	SME-8-S-LED-24	
<b>N/C contact</b>							
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	7,5	160 251	SME-8-0-K-LED-24	

Ordering data – Connecting cables				Technical data → <a href="http://www.festo.com/catalogue/nebu">www.festo.com/catalogue/nebu</a>	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2,5	541 333	NEBU-M8G3-K-2.5-LE3
			5	541 334	NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-wire	2,5	541 363	NEBU-M12G5-K-2.5-LE3
			5	541 364	NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2,5	541 338	NEBU-M8W3-K-2.5-LE3
			5	541 341	NEBU-M8W3-K-5-LE3
	Angled socket, M12x1, 5-pin	Cable, open end, 3-wire	2,5	541 367	NEBU-M12W5-K-2.5-LE3
			5	541 370	NEBU-M12W5-K-5-LE3

# Compact cylinders ADNGF, standard port pattern



Accessories

Ordering data – Rectangular proximity sensors, pneumatic		Technical data → <a href="http://www.festo.com/catalogue/sm">www.festo.com/catalogue/sm</a>	
Pneumatic connection		Part No.	Type
3/2-way valve, normally closed			
	Female thread M5	178 563	SMPO-8E
Ordering data – Mounting kit for proximity sensors SMPO-8E		Technical data → <a href="http://www.festo.com/catalogue/smb">www.festo.com/catalogue/smb</a>	
Assembly		Part No.	Type
	Clamped in T-slot	178 230	SMB-8E
Ordering data – Slot cover for T-slot			
Assembly	Length	Part No.	Type
	Insertable from above	2x 0.5 m	151 680 ABP-5-S

Drives with linear guides  
Rod guides

6.2