

Measuring modules CPX-CMIX



Measuring modules CPX-CMIX

Key features

At a glance

Movement and measurement in one, as an integral component of the valve terminal CPX – the modular peripheral system for decentralised automation tasks.

The modular design means that valves, digital inputs and outputs, positioning modules, end-position controllers and measuring modules, as appropriate to the application, can be combined in almost any way on the CPX terminal.

Advantages:

- Pneumatics and electrics – movement and measurement on one platform
- Innovative measurement technology – piston rod drives, rodless drives, rotary drives
- Actuation via fieldbus
- Remote maintenance, remote diagnostics, web server, SMS and e-mail alert are all possible via TCP/IP
- Modules can be quickly exchanged and expanded without altering the wiring

Retracting/advancing and measuring in one work step	Time and space-saving	Process reliability	Reduced system costs
---	-----------------------	---------------------	----------------------

Fully digital data acquisition and transmission means pneumatic cylinders can now be used as sensors. With very high repetition accuracy and incorporating both analogue and digital measuring sensors.


Electrical peripherals enable the highly efficient measuring module to be seamlessly and compactly integrated into existing control environments. The new component is tailored to the proven CPX system and can be commissioned quickly and easily.

All process steps are measured and documented, which significantly improves quality. The adjustable contact force (via pressure regulator) also increases the precision of the “displacement sensor”.

As with all modules in the electrical terminal CPX, easy functional integration in fieldbus/Ethernet networks is a matter of course.

Drives to use

Linear drives DGCI

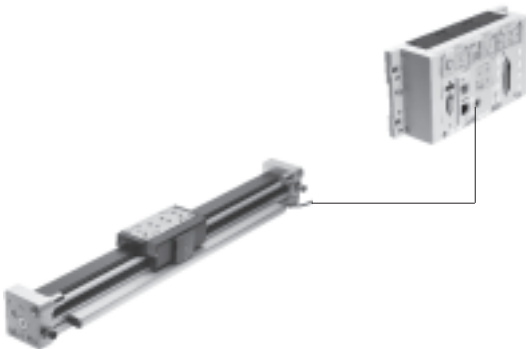

- The measurement signal of the linear drive DGCI supplies a CAN signal, which is read in directly into the CPX-CMIX module
- The measuring system measures absolute values, in other words the actual position is immediately available for the controller after the system is switched on


Technical data		
Linearity	[%]	≤ ±0.01 full scale (nominal length)
Repetition accuracy	[mm]	< ±0.01
Hysteresis	[µm]	< 4
Shortest measurable speed	[mm/s]	10

Measuring modules CPX-CMIX

Key features

Drives to use

Linear drives DNCI

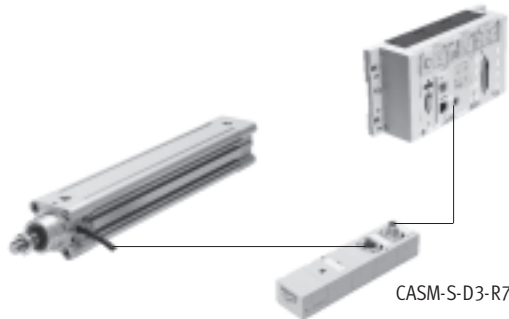


- The measuring signal of the linear drive DNCI is an incremental signal, which is converted to a CAN signal in the sensor interface CASM-S-D3-R7. The converted signal is then read into the CPX-CMIX
- The measuring system does not measure absolute values, so must be homed after it is switched on. The actual position is available for the controller once this has been done

Technical data

Linearity	[mm]	≤ ±0.07
Repetition accuracy	[mm]	< ±0.02
Hysteresis	[µm]	< 0.03
Shortest measurable speed	[mm/s]	10

Swivel modules DSMI, standard cylinders DNCM or potentiometers MLO-POT

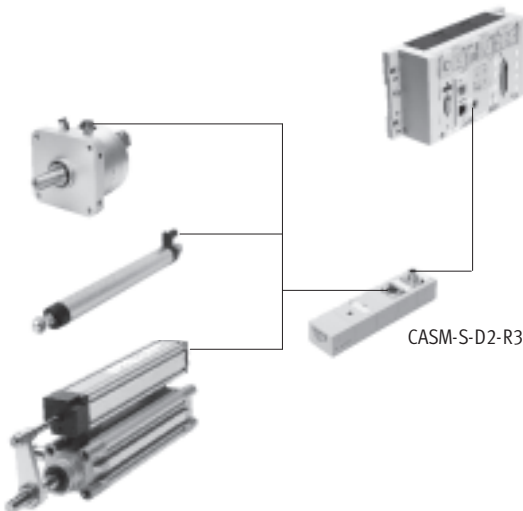

- The measuring systems supply an analogue measuring signal, which is converted to a CAN signal in the sensor interface CASM-S-D2-R3. The converted signal is then read into the CPX-CMIX
 - Potentiometers measure absolute values, in other words the actual position is immediately available for the controller after the potentiometer is switched on
- Other potentiometers can be used, in which case the following must be noted:
- The connection resistance of the potentiometer must be 3 ... 20 kΩ
 - Poorer potentiometer values for linearity and temperature coefficient will decrease the accuracy of the measured value
 - A special cable must be used for connection to the sensor interface

Technical data


Measuring length	[mm]	100	150	225	300	360	450	500
Linearity	[% of stroke]	±0.1	±0.09	±0.08	±0.07	±0.06	±0.05	±0.05
Repetition accuracy	[mm]	±0.01	±0.01	±0.01	±0.01	±0.011	±0.014	±0.016
Shortest measurable speed	[mm/s]	3	5	7	9	11	14	15
Temperature coefficient	[ppm/°C]	5						

Measuring length	[mm]	600	750	1,000	1,250	1,500	1,750	2,000
Linearity	[% of stroke]	±0.05	±0.04	±0.04	±0.03	±0.03	±0.03	±0.02
Repetition accuracy	[mm]	±0.019	±0.023	±0.03	±0.038	±0.046	±0.054	±0.062
Shortest measurable speed	[mm/s]	18	23	31	38	46	53	61
Temperature coefficient	[ppm/°C]	5						


Measuring modules CPX-CMIX

Type codes and peripherals overview

Type codes

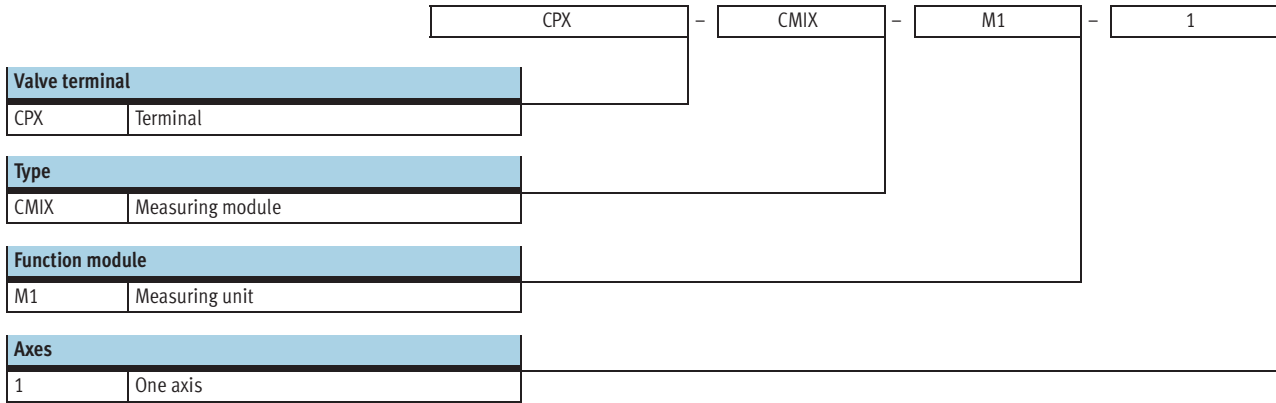

Peripherals overview

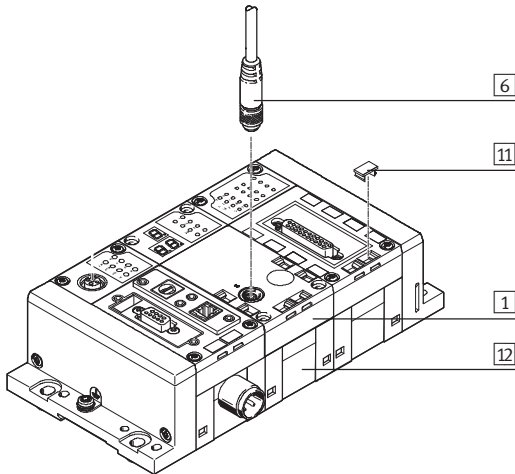

Accessories			
Type		Brief description	→ Page/Internet
1	Measuring module CPX-CMIX	Integrated in the CPX terminal. Screws for mounting on the plastic interlinking block are included in the scope of delivery.	5
6	Connecting cable KVI-CP-3	For connecting the measuring module CPX-CMIX and displacement encoder.	7
11	Inscription label IBS	For labelling the modules.	7
12	Interlinking block CPX-GE	Connects the individual modules. Two versions are available: plastic or metal interlinking block.	8
-	Screws CPX-M-M3	For mounting on the metal interlinking block.	7

Measuring modules CPX-CMIX

Technical data

The measuring module CPX-CMIX is intended exclusively for use in valve terminals CPX.




General technical data		
Operating voltage		
Operating voltage range	[V DC]	18 ... 30
Nominal operating voltage	[V DC]	24
Current consumption at nominal operating voltage	[mA]	80
Protection against short circuit		Yes
Power failure bridging	[ms]	10
No. of axis strings		1
Axes per string		1
Length of connecting cable to axis	[m]	≤ 30
Max. no. of modules		9
Display		7-segment display
Assigned addresses	Outputs	[bit] 6x8
	Inputs	[bit] 6x8
Diagnostics		Channel and module-oriented
		Via local 7-segment display
		Undervoltage of modules
		Undervoltage of measuring system
Status display		Power Load
		Error
Control interface		
Data		CAN bus with Festo protocol
		Digital
Electrical connection		5-pin
		M9
		Socket
Materials: Housing		Reinforced polyamide
Product weight	[g]	140
Dimensions	Length	[mm] 107
	Width	[mm] 50
	Height	[mm] 55


Measuring modules CPX-CMIX

Technical data

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Relative air humidity	[%]	5 ... 95, non-condensing
Protection class to IEC 60529		IP65
CE mark (see declaration of conformity)		To EU EMC Directive

Connection and display components

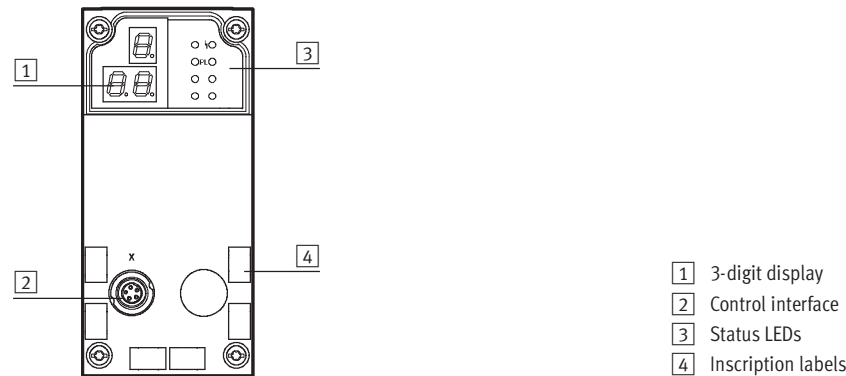


Pin allocation – Plug 2			
	Pin	Signal	Designation
	1	+24 V	Nominal operating voltage
	2	+24 V	Load voltage
	3	0 V	Ground
	4	CAN_H	CAN high
	5	CAN_L	CAN low
	Housing	Screened	Cable screening



Permitted bus nodes/FEC			
Bus node/FEC	Protocol	Max. no. of CMIX modules	Remarks
CPX-FEC	-	9	On request
CPX-FB6	Interbus	2	On request
CPX-FB11	DeviceNet	9	Revision 20 (R20) and above
CPX-FB13	Profibus DP	9	Revision 23 (R23) and above
CPX-FB14	CANopen	3	On request
CPX-FB23	CC-Link	9	On request
CPX-FB32	Ethernet/IP	9	On request
CPX-FB33	Profinet, M12	9	On request
CPX-M-FB34	Profinet, RJ45	9	On request
CPX-FB38	EtherCat	9	On request


PROFIBUS®, DeviceNet®, CANopen®, INTERBUS®, CC-LINK®, EtherCAT®, PROFINET®, EtherNet/IP® is a registered trademark of its respective trademark holder in certain countries.


Measuring modules CPX-CMIX


Accessories

Ordering data – Measuring module			
	Brief description	Part No.	Type
	Order code in the CPX configurator: T23	567417	CPX-CMIX-M1-1

Ordering data – Connecting cables			
	Brief description	Cable length [m]	Part No. Type
	Connecting cable with angled plug and angled socket	0.25	540327 KVI-CP-3-WS-WD-0,25
		0.5	540328 KVI-CP-3-WS-WD-0,5
		2	540329 KVI-CP-3-WS-WD-2
		5	540330 KVI-CP-3-WS-WD-5
		8	540331 KVI-CP-3-WS-WD-8
	Connecting cable with straight plug and straight socket	2	540332 KVI-CP-3-GS-GD-2
5		540333 KVI-CP-3-GS-GD-5	
8		540334 KVI-CP-3-GS-GD-8	
	Connector for control cabinet through-feed	–	543252 KVI-CP-3-SSD

Ordering data – Screws			
	Brief description	Part No.	Type
	For mounting on the metal interlinking block	550219	CPX-M-M3X22-4X


Ordering data – Inscription labels			
	Brief description	Number	Part No. Type
	Inscription labels 6x10, in frames	64	18576 IBS-6X10


Documentation ¹⁾			
	Language	Part No.	Type
	DE	567053	P.BE-CPX-CMIX-DE
	EN	567054	P.BE-CPX-CMIX-EN
	ES	567055	P.BE-CPX-CMIX-ES
	FR	567056	P.BE-CPX-CMIX-FR
	IT	567057	P.BE-CPX-CMIX-IT
	SV	567058	P.BE-CPX-CMIX-SV

1) Manual in paper form is not included in the scope of delivery

Measuring modules CPX-CMIX

Accessories

Ordering data – Interlinking block, plastic, as expansion block				
	Brief description	Connection	Part No.	Type
	Without power supply	–	195742	CPX-GE-EV
	With additional power supply for outputs	M18	195744	CPX-GE-EV-Z
		7/8" – 5-pin	541248	CPX-GE-EV-Z-7/8-5POL
		7/8" – 4-pin	541250	CPX-GE-EV-Z-7/8-4POL
	With additional power supply for valves	M18	533577	CPX-GE-EV-V
7/8" – 4-pin		541252	CPX-GE-EV-V-7/8-4POL	

Ordering data – Tie rod				
	Brief description	Expansion	Part No.	Type
	For expansion using an interlinking block	1-fold	525418	CPX-ZA-1-E