

AS-interface® modules CESA

FESTO



AS-interface® modules CESA

Key features

FESTO

Basic principles and features of the bus system

Introduction

The AS-interface system permits the transfer of power and data using a single cable. The advanced technology used to connect stations to the yellow cable and the low connection costs mean that even stations with a small number of inputs and outputs (max. 8 inputs and 8 outputs per valve terminal with two chips) can be networked. The AS-interface gateways from Festo act as a master for the AS-interface network and a slave for the higher-level fieldbus system (Profibus or CANopen).

From the point of view of the higher-level fieldbus, the AS-interface gateways behave like modular I/O modules. This makes commissioning and troubleshooting much easier. The gateways can be connected to the controllers FED-CEC/-CECCAN (CANopen master), CPX-CEC (CANopen master) and CECX (Profibus-DP and CANopen master) from Festo as well as any other controllers with a Profibus or CANopen interface.

For the Festo controllers, the controller functionality is programmed as normal using the CoDeSys programming tool. Larger systems can be easily configured with the help of the AS-interface control software. The data of the connected AS-interface slave devices can be easily diagnosed for servicing.

- Extended AS-interface diagnostic functions that far surpass the standard diagnostic functions according to the AS-interface Specification
- Simple configuration error history enables sporadic configuration errors to be located
- Error counters enable the quality of data communication on the AS-interface cable to be monitored

AS-interface Specification version	Inputs	Outputs	Bus cycle (ms)	No. of slaves, digital	No. of slaves, analogue	Σ I/O
2.0	4/4	4	5	31	31	248
2.1	4	3	10	62	31	434
3.0	4/8	4/8	20	62	62	992

Master/slave principle

- Non-proprietary
- No restrictions in terms of cable layout and/or topology
- Data and power via a single two-wire cable
- Immune to interference
- Medium: unscreened cable 2x 1.5 mm²
- With 31 slaves, max. 4 inputs and 4 outputs per slave
- Data and power supply for up to 8 outputs per AS-interface string
- With 62 slaves, max. 4 inputs and 3 outputs per slave (A/B operation as per Specification V2.1)
- Modules for control cabinets (IP20) and harsh industrial environments (IP65, IP67)
- With 31 slaves, 4 analogue inputs or outputs per slave
- Profile 7.3: analogue values (16 bits) per slave (as per Specification V2.1)
- Profile 7.4: parameterisable communication profile, e.g. 16x 16 bits per slave (as per Specification V2.1)
- Profile 7.A.7 permits 4 bits for digital inputs and 4 bits for digital outputs on just one A/B slave. The 4 outputs are transmitted in two A/B bus cycles of 2 bits each. This extends the cycle time (in the worst-case scenario) to 20 ms.
- Insulation displacement technology
- Cable length 100 m, can be extended to up to 200 m through the use of an extension plug and to up to 500 m through the use of repeaters, etc.
- Highly effective error control
- Simple commissioning
- Electronic address selection via the bus connection




Note

Slaves to Specification V3.0 require a master to Specification V3.0.

AS-interface® modules CESA

System overview

Components

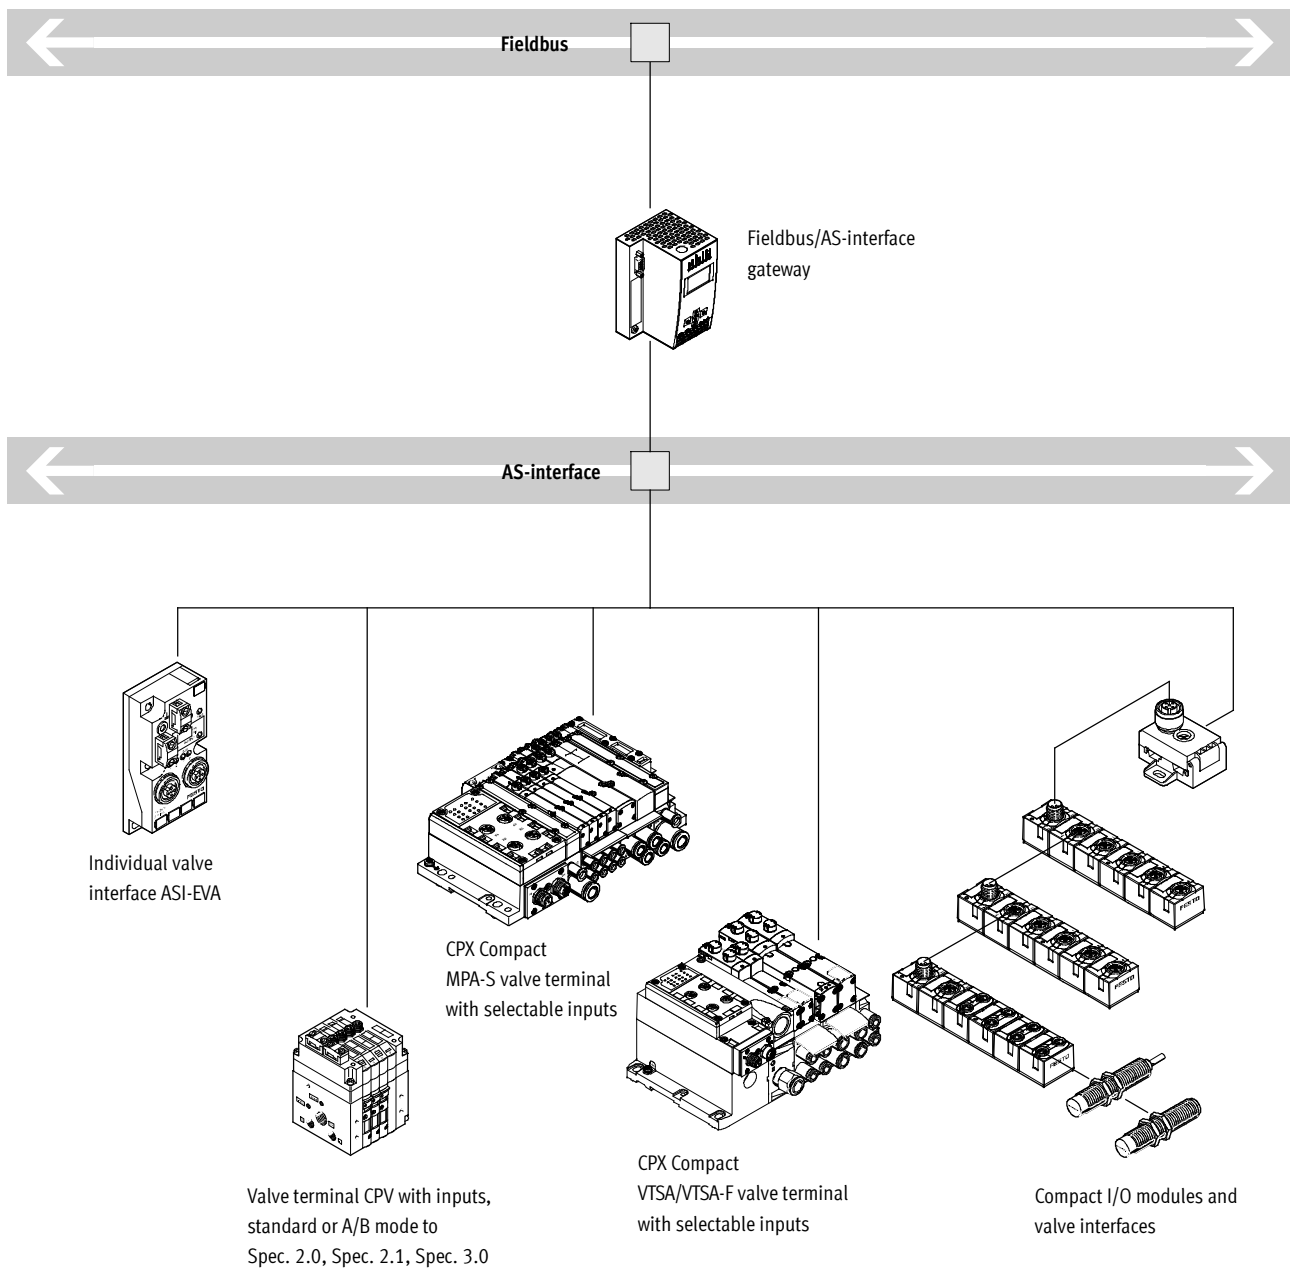


AS-interface® modules CESA

System overview

FESTO

Master




AS-interface gateways are used to connect the AS-interface network to a higher-level fieldbus. They behave like a master within the AS-interface network and a slave within the fieldbus network.

The AS-interface gateways from Festo conform to the AS-interface Specification 3.0 and support the extended addressing range with up to 62 AS-interface slaves.

- Versions
- CANopen
 - Profibus

Slaves

Actuators




Actuators for the process industry
Quarter turn actuators DRD (Copar)
Linear valve actuators DLP (Copac)

- Local controllers for actuators for the process industry in exterior applications in the range $-5 \dots +50 \text{ }^{\circ}\text{C}$

- Individual valve interface ASI-EVA for Namur valves
- Sensor box with visual position detection DAPZ

Valves




- A universal solution from the individual valve interface up to a compact solution with 8 valves

- Integrated inputs on individual valve interfaces and valve terminals CPV, MPA-S and VTSA/VTSA-F

- More inputs thanks to 4-way and 8-way input modules
- On request: Application-specific valves and integration solutions

Compact I/O modules, valve interfaces




- Highly compact modules
- Sturdy, encapsulated electrics
- Bus and auxiliary power supply 2x M12 looped through

- Inputs 200 mA
- Outputs 1 A

- 8 inputs M8
- 4 inputs and 3 outputs M12

Accessories



- Addressing device with user-friendly operating and diagnostic functions for the entire AS-interface, for example to perform the following tasks in a fully installed network:
 - change addresses
 - set outputs
 - read inputs
 - and many more

- Power supply unit for AS-interface
- Primary switched mode modular power supply
- Compact, modular and energy-saving power supply system for AS-interface – with integrated earth-fault monitoring system. AS-interface load: 4.8 A. Optional auxiliary power supply 24 VDC, load: 5 or 10 A


- Installation accessories for installing the flat cable

AS-interface® modules CESA

Connection technology and addressing


Handling

Operation




The AS-interface gateways can be configured and programmed using the GSPF software.
An alternative option for programming, commissioning or troubleshooting is to use the operating buttons on the gateway and the LED and LCD displays on the gateway.

AS-interface connections

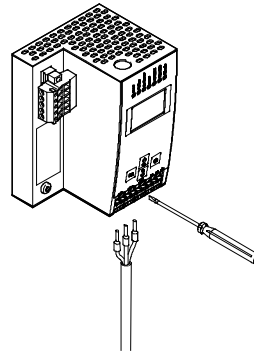

The AS-interface network as well as the power supply for the gateway and AS-interface are connected via a terminal strip.

Mounting

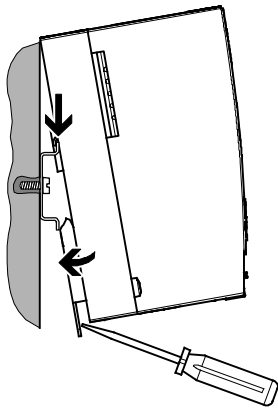

The gateway is mounted using an H-rail.
There are appropriate lugs on the rear of the device.

Extended addressing range

The extended addressing range enables a total of 62 slaves to be operated on one AS-interface master. The masters as well as the slaves must be designed for the extended addressing range in order to be able to exploit the full number of slaves.
With the extended addressing range, two slaves share one address. Standard slaves do not have this capability. They can be connected to a master

with an extended addressing range, but also occupy a full address. In other words, up to 62 slaves with an extended addressing range but only 31 standard slaves can be connected to a master with an extended addressing range.
Slaves with an extended addressing range can be connected like standard slaves to a standard master, but must be configured as an "A" slave.

AS-interface® modules CESA

Type codes

FESTO

		CESA	—	GW	—	AS	—	CO
Type								
CESA	Individual controller							
Function module								
GW	Gateway							
Interface								
AS	AS-interface							
Bus connection								
CO	CANopen							
PB	Profibus DP							

AS-interface® modules CESA

Technical data

CESA-GW-AS-PB

AS-interface module with Profibus DP connection


CESA-GW-AS-CO

AS-interface module with CANopen connection

The AS-interface modules are used to couple decentralised AS-interface networks to higher-level controllers via a fieldbus.

The following fieldbus connections are available:

- Profibus DP
- CANopen

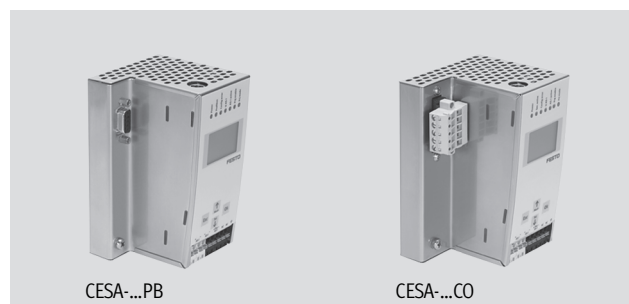

General technical data		
	CESA-GW-AS-PB	CESA-GW-AS-CO
Operating elements	4 buttons	
Status displays	LCD display	
	Yellow LED: Projection mode	
	Green LED: AS-interface operating normally	
	Green LED: AS-interface voltage OK	
	Green LED: PROFIBUS master detected	
	Green LED: Slave programming	
	Green LED: Voltage ON	
	Red LED: Configuration error	
Operating voltage	[V DC]	30 (AS-interface voltage)
Current consumption	[mA]	200 (from the AS-interface line)
Protection class	IP20	
Resistance test	As per EN 61131-2 (resistance to shock, vibration)	
Product weight	[g]	460
Dimensions W x L x H	[mm]	75 x 120 x 83
Materials		
Housing	High-alloy stainless steel	
Note on materials	Contains PWIS (paint-wetting impairment substances)	
	RoHS-compliant	

Technical data – Interfaces		
	CESA-GW-AS-PB	CESA-GW-AS-CO
Fieldbus interface		
Type	Profibus to DIN 19245 Part 3	CANopen, Device Specification CiA DS-301
Connection technology	Sub-D socket, 9-pin	COMBICON plug, 5-pin
Transmission rate	9.6 kbps ... 12 Mbps	10 kbps ... 1 Mbps
Programming/diagnostic interface		
Type	RS232 serial interface	

Operating and environmental conditions		
	CESA-GW-AS-PB	CESA-GW-AS-CO
Ambient temperature	[°C]	0 ... +55
Storage temperature	[°C]	–25 ... +85
Certification	cULus listed (OL)	
	C-Tick	
CE mark (see declaration of conformity) ¹⁾	To EU EMC Directive	


1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

AS-interface® modules CESA


Technical data

FESTO


Connection and display components

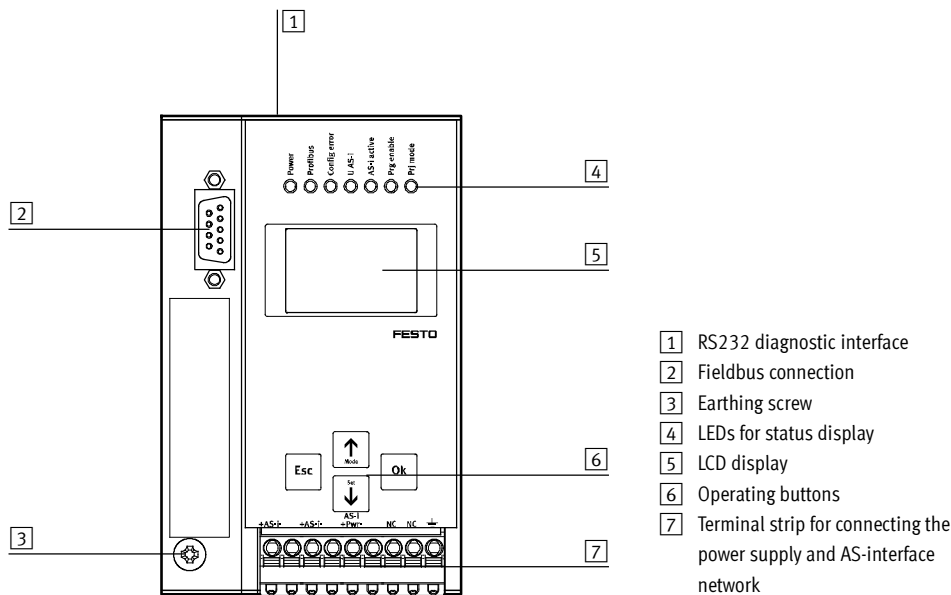

Pin allocation – Profibus

	Pin	Signal	Meaning
Sub-D socket to DIN 50170			
	1	n.c.	Not connected
	2	n.c.	Not connected
	3	RxD/TxD-P	Data transmission line B
	4	n.c.	Not connected
	5	DGND	Data reference potential (0 V)
	6	VP	Supply voltage (+5 V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Data transmission line A
	9	n.c.	Not connected

Pin allocation – CANopen

	Pin	Signal	Meaning
Terminal strip, 5-pin ¹⁾			
	1	V+	24 V DC supply CAN interface
	2	CAN_H	Received/transmitted data high
	3	Screened	Connection to FE (functional earth)
	4	CAN_L	Received/transmitted data low
	5	V-	0 V CAN interface

1) The interface is supplied with voltage via the plug.

Pin allocation – AS-interface

		Signal	Meaning
Screw terminal			
	1	+AS-i-	Connection to AS-interface line
	2	AS-i +PWR-	Power supply for AS-interface line (max. 8 A)
	3	FE	Functional earth


AS-interface® modules CESA

Technical data


Dimensions

Download CAD data → www.festo.com

CESA-GW-AS-PB

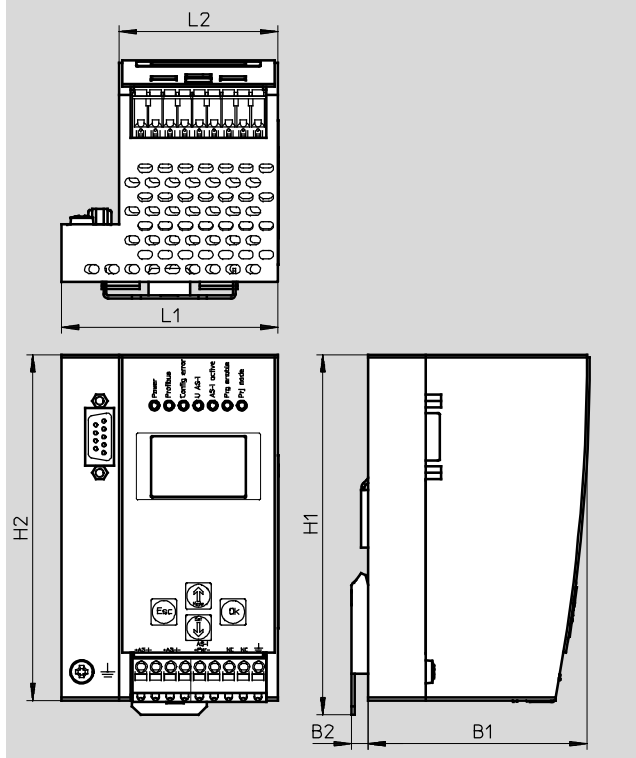

CESA-GW-AS-CO




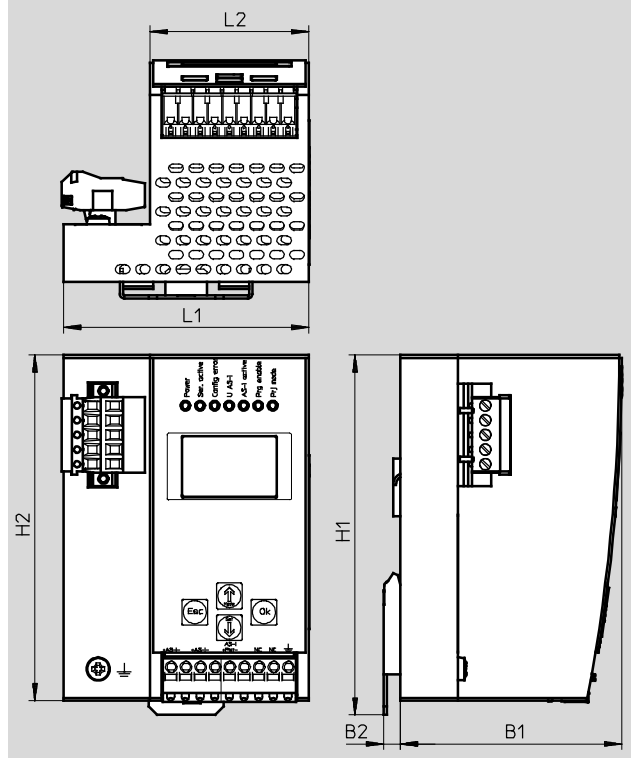


Type	B1	B2	H1	H2	L1	L2
CESA-GW-AS-PB	76	7	125	120	75	55
CESA-GW-AS-CO	76	7	125	120	85	55

AS-interface® modules CESA

Accessories

FESTO

Ordering data					Part No.	Type
AS-interface gateway						
	AS-interface master with Profibus DP fieldbus connection			567032	CESA-GW-AS-PB	
	AS-interface master with CANopen fieldbus connection			567033	CESA-GW-AS-CO	
Profibus bus connection						
	Sub-D plug, angled			533780	FBS-SUB-9-WS-PB-K	
AS-interface						
	AS-interface flat cable, yellow		100 m	18940	KASI-1,5-Y-100	
	AS-interface flat cable, black		100 m	18941	KASI-1,5-Z-100	
	Cable cap for flat cable (pack of 50)			18787	ASI-KK-FK	
	Cable sleeve (pack of 20)			165593	ASI-KT-FK	
	AS-interface module as bus termination			567035	CACF-BT-AS	
	Primary switched mode modular power supply 24 V DC power supply		5 A	547867	SVG-1/230-24VDC-5A	
			10 A	547868	SVG-1/230-24VDC-10A	
	H-rail to EN 60715			35430	NRH-35-2000	
	Software for configuring the system and diagnosing the AS-interface slaves during servicing			567036	GSPF-BS-1-AF-ML	