


Guided drives DGRF-C, Clean Design

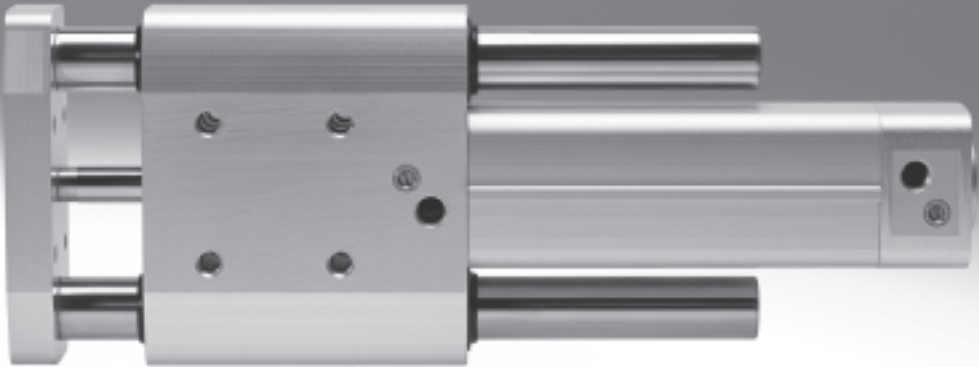

Guided drives DGRF-C, Clean Design

Key features and product range overview

At a glance


- The guided drive is used wherever hygiene, ease of cleaning and resistance are important, predominantly in dry and splash zones in the food and packaging industry
- Corrosion-resistant in harsh ambient conditions
- Easy-to-clean design
- FDA-compliant
- Suitable for unlubricated operation
- Resistant to conventional cleaning agents
- For hygiene reasons, the threads on the end caps should be sealed with locking screws
- Variant (A3): special piston rod seal and guide rod wiper seal increase the service life of the drive

Areas of application:


- Bottling systems in the beverage industry
 - Labelling and palletising machines
- Milk processing
 - Filling ice cream and yoghurt containers, etc.
- Meat processing
- Confectionery production
- Bakery production
- Packaging industry
 - Foodstuffs, pharmaceuticals, cosmetics, chemicals, beverages and tobacco

Mounting options


From underneath

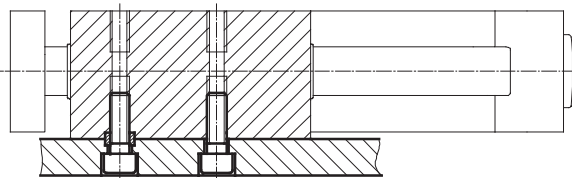


From above

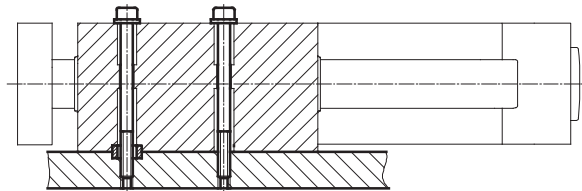

On the yoke plate

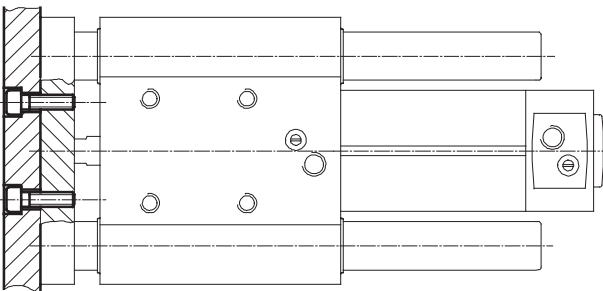

Product range overview


Function	Type	Piston Ø	Stroke	Cushioning		Position sensing	Mounting rail	Unlubricated operation
				P	PPV	A	R	A3
Double-acting	 DGRF-C-GF	20, 25	10 ... 400	■	–	–	–	■
		32	10 ... 400	■	■	■	■	■
		40, 50, 63	10 ... 400	–	■	■	■	■

Guided drives DGRF-C, Clean Design


Peripherals overview

FESTO

Piston Ø 20, 25

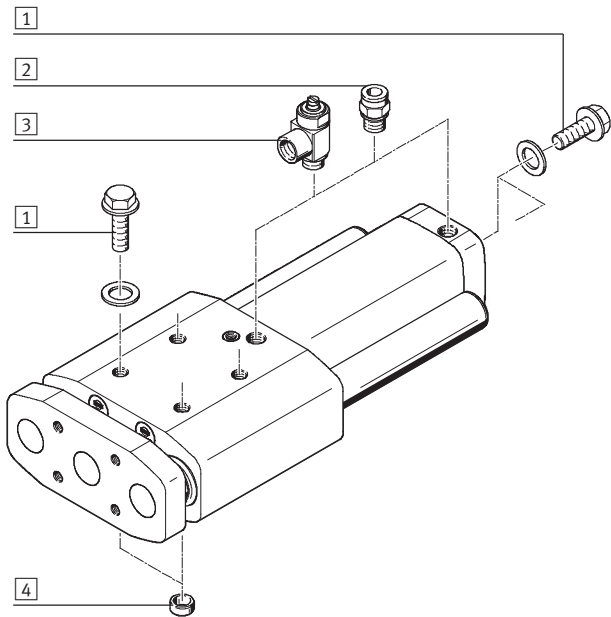

Piston Ø 32, 40, 50, 63

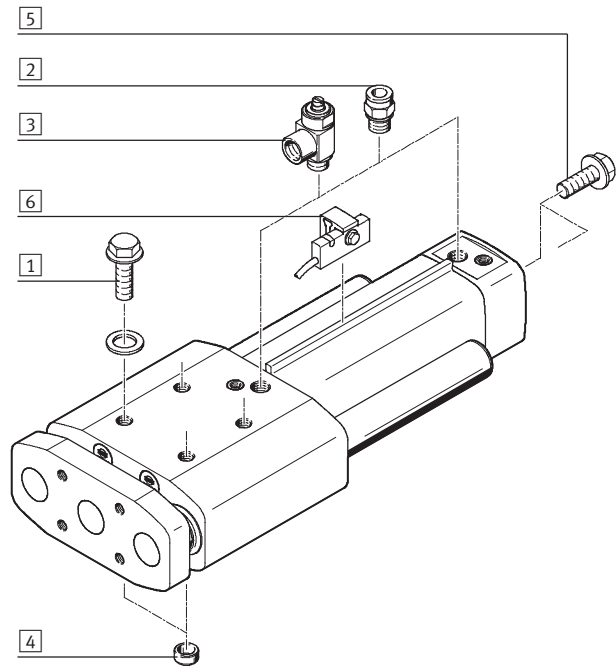

Accessories			
	Brief description	→ Page/Internet	
1	locking screw DAMD	<ul style="list-style-type: none"> • For sealing unused mounting threads • The cover disc is included with the screw • The screws are not included with the drive 	13
2	Push-in fitting QS-F/QSL-F/CRQS/CRQSL/NPQP	For connecting compressed air tubing with standard O.D.	11
3	One-way flow control valve CRGRLA/GRLA-F	For regulating speed	13
4	Centring sleeve ZBH	<ul style="list-style-type: none"> • For centring the guided drive • Two centring sleeves included in the scope of delivery 	13
5	locking screw CR	<ul style="list-style-type: none"> • For sealing unused mounting threads • The screws are not included with the drive 	13
6	Proximity sensor SMT-C1	<ul style="list-style-type: none"> • For sensing the position • Proximity sensor is mounted on the sensor mounting rail 	11

Guided drives DGRF-C, Clean Design


Type codes

		DGRF	-	C	-	GF	-	32	-	200	-	PPV	-	A	-	R	-	A3	
Type																			
Double-acting																			
DGRF	Guided drive																		
Version																			
C	Easy-to-clean design																		
Guide																			
GF	Plain-bearing guide																		
Piston Ø [mm]																			
Stroke [mm]																			
Cushioning																			
P	Flexible cushioning rings at both ends																		
PPV	Pneumatic cushioning, adjustable at both ends																		
Position sensing																			
A	Via proximity sensor																		
Sensor mounting, external																			
R	Mounting rail for proximity sensor																		
Wiper seal material																			
-	Standard																		
A3	Suitable for unlubricated operation																		



Guided drives DGRF-C, Clean Design

FESTO

Technical data

 Function
 Piston Ø 20, 25


Piston Ø 32, 40, 50, 63

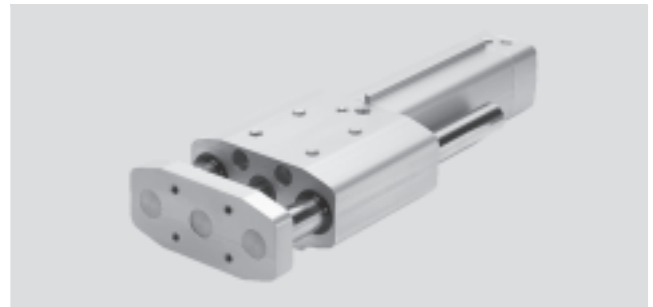
 Diameter
 20 ... 63 mm
 Stroke length
 10 ... 400 mm


General technical data						
Piston Ø	20	25	32	40	50	63
Pneumatic connection	M5	M5	G $\frac{1}{8}$	G $\frac{1}{4}$	G $\frac{1}{4}$	G $\frac{3}{8}$
Mode of operation	Double-acting					
Design	Guide					
	Guide rods with yoke					
Guide	Plain-bearing guide					
Cushioning	P	Flexible cushioning rings at both ends			–	
	PPV	–			Pneumatic cushioning, adjustable at both ends	
Cushioning length	[mm]	–	20	20	22	22
Position sensing		–		Via proximity sensor		
Type of mounting	Via through-hole					
	Via female thread					
Mounting position	Any					
Torsional backlash ¹⁾	[°]	0.13	0.11	0.10	0.09	0.06

1) Retracted state, without load

Operating and environmental conditions						
Piston Ø	20	25	32	40	50	63
Variant			P	PPV		
Operating medium	Filtered compressed air, lubricated or unlubricated					
Operating pressure	[bar]	2.5 ... 10		2 ... 10	2 ... 12	1.5 ... 12
	A3 [bar]	2 ... 10		2 ... 12	1.5 ... 12	
Ambient temperature	[°C]	–20 ... +80				
Corrosion resistance class CRC ¹⁾		3				

 1) Corrosion resistance class 3 according to Festo standard 940 070
 Components subject to high corrosion stress. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface

Force [N] and impact energy [J]						
Piston Ø	20	25	32	40	50	63
Theoretical force at 6 bar, advancing	189	295	483	754	1,178	1,870
Theoretical force at 6 bar, retracting	141	247	415	633	990	1,682
Max. impact energy in the end positions with P cushioning	0.2	0.3	0.4	–	–	–

Permissible impact velocity:

$$v_{\text{perm.}} = \sqrt{\frac{2 \times E_{\text{perm.}}}{m_{\text{dead}} + m_{\text{load}}}}$$

Maximum permissible load:

$$m_{\text{load}} = \frac{2 \times E_{\text{perm.}}}{v^2} - m_{\text{dead}}$$

$v_{\text{perm.}}$ Permissible impact velocity
 $E_{\text{perm.}}$ Max. impact energy
 $m_{\text{Intrinsic}}$ Moving load (drive)
 m_{Load} Moving effective load

Note

This data represents the maximum values that can be achieved. The maximum permissible impact energy must be observed.


Guided drives DGRF-C, Clean Design

Technical data

Weight [g]							
Piston \varnothing Variant	20	25	32		40	50	63
			P	PPV			
Product weight with 0 mm stroke	900	1,200	2,100	2,300	2,950	4,700	6,100
Additional weight per 10 mm stroke	52	55	80	83	92	142	147
Moving load with 0 mm stroke	420	490	900	910	1,100	1,800	2,100
Additional load per 10 mm stroke	38	38	58	58	65	102	102


Materials

Sectional view

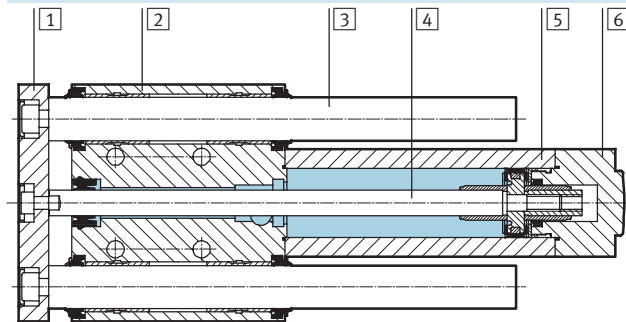


Guided drive	Standard	A3
1 Yoke plate	Wrought aluminium alloy	
2 Housing	Wrought aluminium alloy	
3 Guide rod	High-alloy stainless steel	
4 Piston rod	High-alloy stainless steel	
5 Cylinder barrel	Wrought aluminium alloy	
6 End cap	Wrought aluminium alloy	
- Seal	Polyurethane elastomer	Polyethylene
- Note on materials	RoHS-compliant	

Max. effective load F as a function of stroke l



1 Centre of gravity of effective load

- Load data are based on a distance from the centre of gravity of XS = 50 mm
- Load data can be requested for larger distances


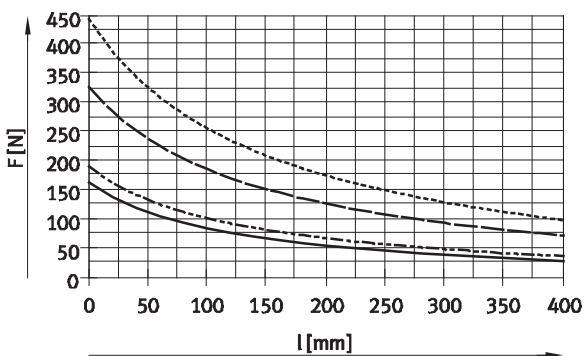


- ∅ 20
- - - ∅ 25
- ∅ 32/40
- - - ∅ 50/63

Guided drives DGRF-C, Clean Design

Technical data


Max. torque load M as a function of stroke l

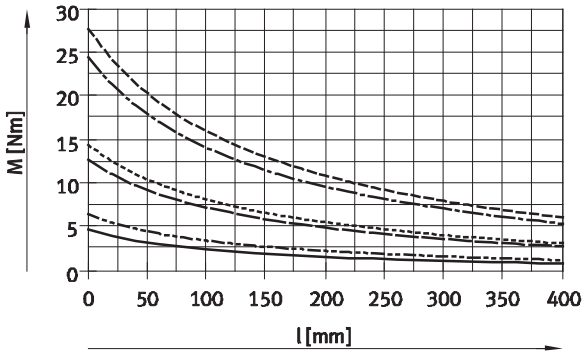

- Ø 20
- - - Ø 25
- · — Ø 32
- · - · - Ø 40
- - - - - Ø 50
- · - · - · - Ø 63


Deflection of piston rod

Deflection f1 due to bearing backlash as a function of stroke l



- $f = f1 + f2$
- f = Total deflection of piston rod
- $f1$ = Deflection due to bearing backlash
- $f2$ = Deflection due to lateral force


Deflection f1, due to bearing backlash as a function of stroke l

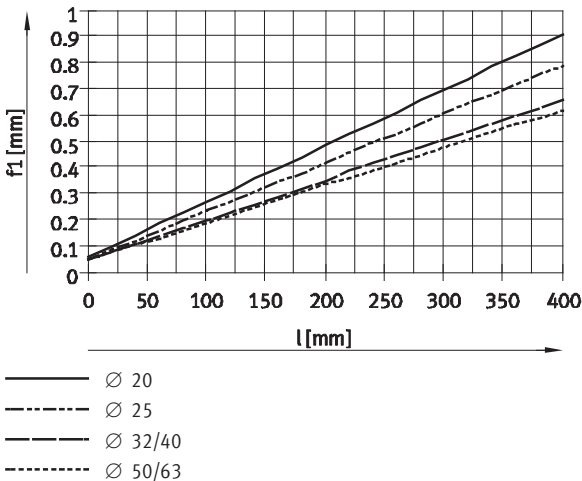

- Ø 20
- - - Ø 25
- · — Ø 32/40
- · - · - Ø 50/63

Deflection f2, due to effective load F and rigidity c as a function of stroke l


$$f2 = \frac{F}{c}$$

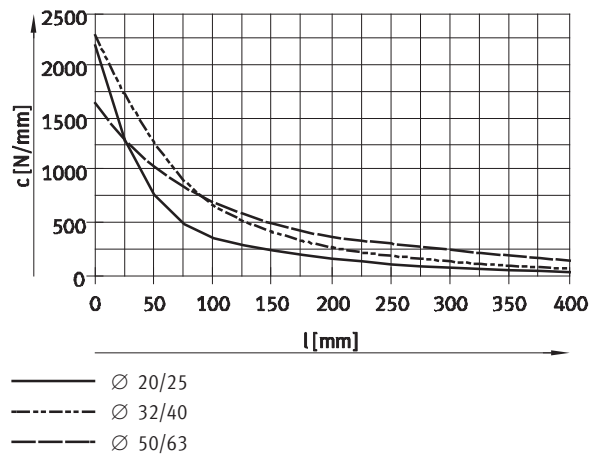

- Ø 20/25
- - - Ø 32/40
- · — Ø 50/63

End-position sensing

A minimum stroke is required to be able to sense both end positions at the cylinder.



- 1 Position of the proximity sensor within the housing

Piston Ø	32	40	50	63
Minimum stroke [mm]	35	35	35	30


Guided drives DGRF-C, Clean Design

Technical data

Dimensions

Download CAD Data → www.festo.com/us/cad

DGRF-...-P-... – Flexible cushioning rings at both ends

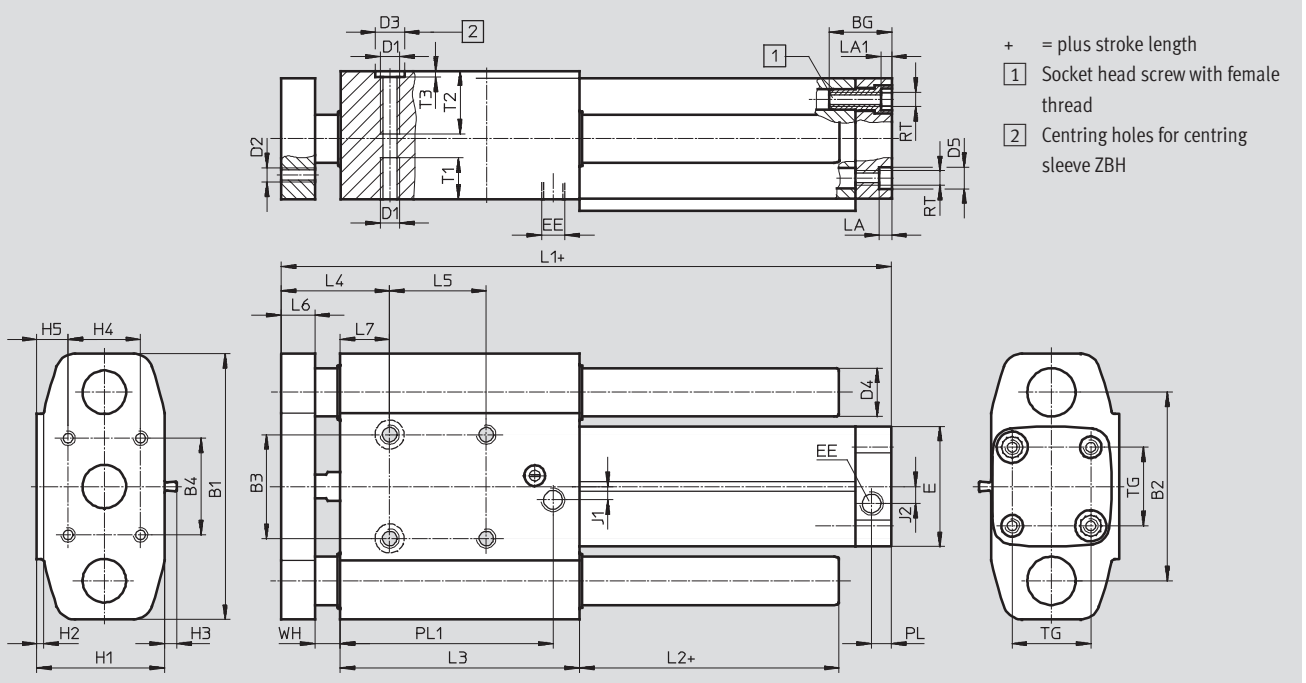

∅	BG	B1	B2	B3 ²⁾	B4	D1	D2	D3 ³⁾	D4	D5	E	EE
[mm]								∅ H7	∅	∅ F9		
20	19.5	83	58	30	30	M6	M5	9	16	9	37	M5
25	19.5	95	68	35	40	M6	M6	9	16	9	42	M5
32	26	110	78	43	40	M8	M6	12	20	9	50	G1/8

∅	H1	H2	H3 ¹⁾	H4	H5	J1	J2	L1	L2	L3	L4	L5
[mm]												
20	39	2	–	20	10.5	0	0	115 +1.4/-0.8	7	68	40 +1/-0.9	30
25	44	2	–	20	13	0	0	126 +1.4/-0.8	7	77	40+1/-0.9	40
32	53	3	5	30	13	5.5	7	152.8 ±1.1	7.4	99	45+0.9/-1	40

∅	L6	L7	LA	LA1	PL	PL1	RT	T1	T2	T3	TG	WH
[mm]												
20	12	18	4.9	4.6	6	62	M5	13	20	2.1	22	10 +0.5/-0.7
25	12	18	4.9	4.6	6	71	M5	13	25	2.1	26	10 +0.5/-0.7
32	14	20.4	5.1	4.6	8.2	88	M6	17	26	2.6	32.5	10.7 +0.3/-0.9

1) Only in combination with sensor mounting rail (DGRF-...-R)
 2) Tolerance between centring holes ±0.02 mm
 3) Two centring sleeves included in the scope of delivery

Guided drives DGRF-C, Clean Design


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

DGRF-...-PPV-... – Pneumatic cushioning, adjustable at both ends

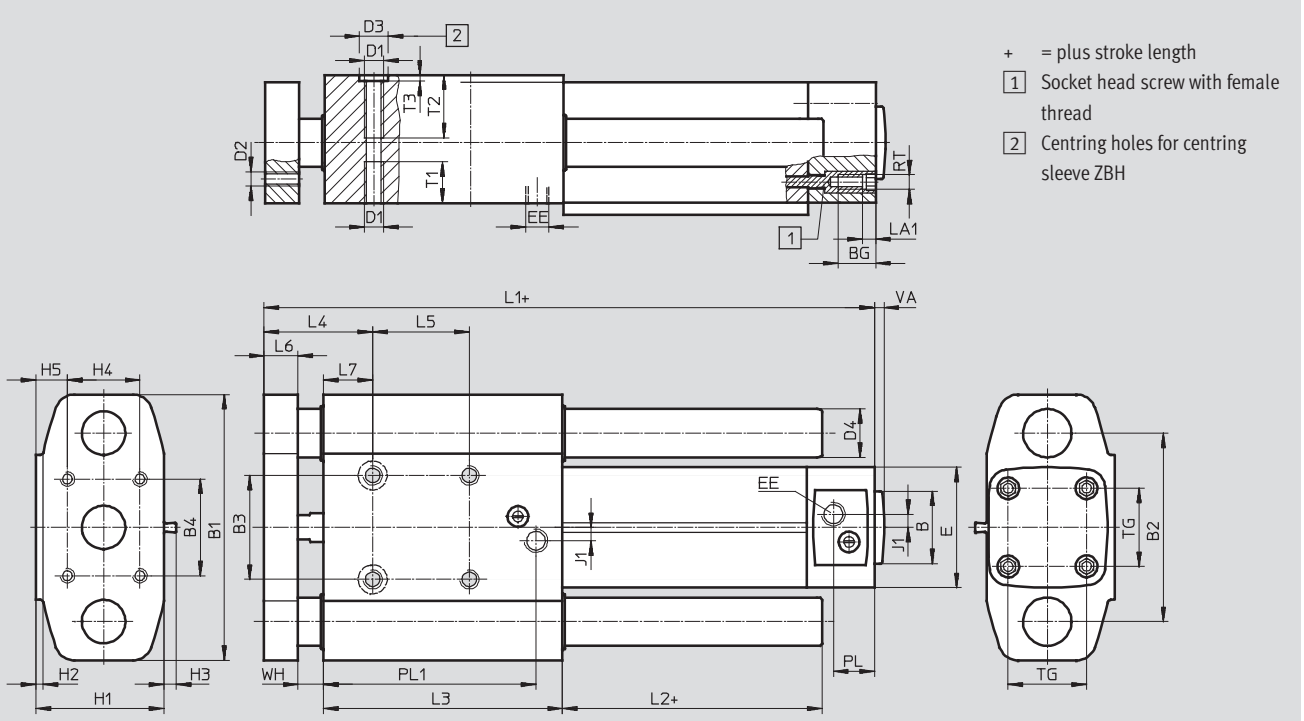

+ = plus stroke length

1) Socket head screw with female thread

2) Centring holes for centring sleeve ZBH

∅	B	BG	B1	B2	B3 ²⁾	B4	D1	D2	D3 ³⁾	D4	E	EE
[mm]	∅ d11								∅ H7	∅		
32	30	16	110	78	43	40	M8	M6	12	20	50	G ¹ / ₈
40	35	16	120	88	51	50	M8	M6	12	20	58	G ¹ / ₄
50	40	17	148	110	64	60	M8	M8	12	25	70	G ¹ / ₄
63	45	17	162	125	80	80	M10	M8	12	25	81	G ³ / ₈

∅	H1	H2	H3 ¹⁾	H4	H5	J1	L1	L2	L3	L4	L5
[mm]											
32	53	3	5	30	13	5.5	177.6 +1.9/-1.2	7.4	99	45 +1.5/-1.1	40
40	61	3	5	30	17	6.5	183.5 +1.9/-1.3	7.5	99	45 +1.5/-1.1	40
50	73	3	5	40	18	8.5	193.5 +1.7/-1.3	7.7	105	50 +1.3/-1.2	40
63	84	3	5	40	23.5	11	207.3 +1.7/-1.3	7.5	105	50 +1.3/-1.2	40

∅	L6	L7	LA1	PL	PL1	RT	T1	T2	T3	TG	VA	WH
[mm]												
32	14	20.4	5.6	17	88	M6	17	26	2.6	32.5	4	10.6 +1/-0.9
40	14	20.5	5.6	19	83	M6	17	26	2.6	38	4	10.5 ±1
50	16	22.7	6.1	20	89	M8	17	20	2.6	46.5	4	11.3 +0.8/-1
63	20	18.5	6.1	25	79.5	M8	17	24	2.6	56.5	4	11.5 +0.8/-1

1) Only in combination with sensor mounting rail (DGRF-...-R)
 2) Tolerance between centring holes ±0.02 mm
 3) Two centring sleeves included in the scope of delivery

Guided drives DGRF-C, Clean Design

Ordering data – Modular products

Ordering table									
Size	20	25	32	40	50	63	Conditions	Code	Enter code
M Module No.	562216	562217	563366	562219	562220	562221			
Function	Guided drive							DGRF	DGRF
Product design	Easy-to-clean design							-C	-C
Guide	Plain-bearing guide							-GF	-GF
Piston Ø	20	25	32	40	50	63		-...	
Stroke [mm]	10 ... 400							-...	
Cushioning	Flexible cushioning rings at both ends							-P	
				Pneumatic cushioning, adjustable at both ends				-PPV	
Position sensing				Via proximity sensor			1	-A	
Sensor mounting, external				Mounting rail for proximity sensor			1	-R	
0 Wiper seal variant	Standard								
	For unlubricated operation							-A3	


1 **A, R** Always present with piston Ø 32 ... 63.



Transfer order code




Guided drives DGRF-C, Clean Design

Accessories

FESTO

Ordering data – Proximity sensors for T-slot, magneto-resistive					Technical data → Internet: smt	
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part No.	Type
N/O contact						
	Is mounted on the mounting rail	PNP	Cable, 3-wire	5.0	571339	SMT-C1-PS-24V-K-5,0-OE
			Plug M8x1, 3-pin	0.3	571342	SMT-C1-PS-24V-K-0,3-M8D
			Plug M12x1, 3-pin	0.3	571341	SMT-C1-PS-24V-K-0,3-M12



Ordering data – Connecting cables for SMT-C1...				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
			5	541334	NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541363	NEBU-M12G5-K-2.5-LE3
			5	541364	NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3
Angled socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541367	NEBU-M12W5-K-2.5-LE3	
		5	541370	NEBU-M12W5-K-5-LE3	

Ordering data – Push-in fittings				Technical data → Internet: quick star			
	Connection		Material	Part No.	Type	PU ²⁾	
	Thread	Tubing O.D.					
With external hexagon							
	M5	4	Brass, nickel and chrome-plated	533844	QS-F-M5-4 ¹⁾	10	
		G1/8		6	533845		QS-F-M5-6 ¹⁾
				G1/4	4		193408
	6				193409		QS-F-G1/8-6 ¹⁾
	8	193410			QS-F-G1/8-8 ¹⁾		
	G1/4	6		193411	QS-F-G1/4-6 ¹⁾		
		8		193412	QS-F-G1/4-8 ¹⁾		
		10		193413	QS-F-G1/4-10 ¹⁾		
	G3/8	8		193414	QS-F-G3/8-8 ¹⁾		
		10		193415	QS-F-G3/8-10 ¹⁾		
		12		193487	QS-F-G3/8-12 ¹⁾		
		M5		4	Stainless steel		162860
R1/8			6	162861		CRQS-M5-6 ¹⁾	
			R1/4	4		132643	CRQS-1/8-4
		6		162862		CRQS-1/8-6	
8		162863		CRQS-1/8-8			
R1/4		6	132644	CRQS-1/4-6			
		8	162864	CRQS-1/4-8			
		10	162865	CRQS-1/4-10			
R3/8		10	162866	CRQS-3/8-10			
		12	162867	CRQS-3/8-12			
		R1/8	4	Polypropylene		132417	NPQP-D-R18-Q4
	R1/4		6		132418	NPQP-D-R18-Q6	
			8		132419	NPQP-D-R18-Q8	
		6	132421		NPQP-D-R14-Q6		
	R1/4	8	132422		NPQP-D-R14-Q8		
		10	132423		NPQP-D-R14-Q10		
		10	132424		NPQP-D-R38-Q10		
	R3/8	10	132425		NPQP-D-R38-Q12		
		12					




1) With sealing ring
2) Packaging unit

Guided drives DGRF-C, Clean Design

Accessories

Ordering data – Push-in fittings				Technical data → Internet: quick star					
	Connection		Material	Part No.	Type	PU ²⁾			
	Thread	Tubing O.D.							
With internal hexagon									
	M5	4	Brass, nickel and chrome-plated	533924	QS-F-M5-4-1 ¹⁾	10			
		6		537014	QS-F-M5-6-1 ¹⁾				
	G ¹ / ₈	4		533927	QS-F-G ¹ / ₈ -4-1 ¹⁾				
		6		533928	QS-F-G ¹ / ₈ -6-1 ¹⁾				
		8		533929	QS-F-G ¹ / ₈ -8-1 ¹⁾				
	G ¹ / ₄	8		533930	QS-F-G ¹ / ₄ -8-1 ¹⁾				
		10		533931	QS-F-G ¹ / ₄ -10-1 ¹⁾				
	G ³ / ₈	12		533932	QS-F-G ³ / ₈ -12-1 ¹⁾				
		M5		4	Stainless steel		132328	CRQS-M5-4-1 ¹⁾	1
				6			132329	CRQS-M5-6-1 ¹⁾	
R ¹ / ₈		6	132330	CRQS- ¹ / ₈ -6-1					
		8	132331	CRQS- ¹ / ₈ -8-1					
R ¹ / ₄		8	132332	CRQS- ¹ / ₄ -8-1					
		10	132333	CRQS- ¹ / ₄ -10-1					
R ³ / ₈		10	132334	CRQS- ³ / ₈ -10-1					

- 1) With sealing ring
- 2) Packaging unit



Ordering data – Push-in L-fittings				Technical data → Internet: crqsl					
	Connection		Material	Part No.	Type	PU ²⁾			
	Thread	Tubing O.D.							
With external hexagon									
	M5	4	Brass, nickel and chrome-plated	533849	QSL-F-M5-4-1 ¹⁾	10			
		6		533850	QSL-F-M5-6-1 ¹⁾				
		G ¹ / ₈		4	193418		QSL-F-G ¹ / ₈ -4-1 ¹⁾		
				6	193419		QSL-F-G ¹ / ₈ -6-1 ¹⁾		
				8	193420		QSL-F-G ¹ / ₈ -8-1 ¹⁾		
	G ¹ / ₄	6		193421	QSL-F-G ¹ / ₄ -6-1 ¹⁾				
		8		193422	QSL-F-G ¹ / ₄ -8-1 ¹⁾				
		10		193423	QSL-F-G ¹ / ₄ -10-1 ¹⁾				
		12		533853	QSL-F-G ¹ / ₄ -12-1 ¹⁾				
		G ³ / ₈		8	193424		QSL-F-G ³ / ₈ -8-1 ¹⁾		
		M5		4	Stainless steel		162870	CRQSL-M5-4-1 ¹⁾	1
				6			162871	CRQSL-M5-6-1 ¹⁾	
		R ¹ / ₈		4			132598	CRQSL- ¹ / ₈ -4	
				6			162872	CRQSL- ¹ / ₈ -6	
				8			162873	CRQSL- ¹ / ₈ -8	
R ¹ / ₄		6	132599	CRQSL- ¹ / ₄ -6					
		8	162874	CRQSL- ¹ / ₄ -8					
		10	162875	CRQSL- ¹ / ₄ -10					
R ³ / ₈		10	162876	CRQSL- ³ / ₈ -10					
		12	162877	CRQSL- ³ / ₈ -12					
	R ¹ / ₈	4	Polypropylene	132428	NPQP-L-R18-Q4	1			
		6		132429	NPQP-L-R18-Q6				
		8		132430	NPQP-L-R18-Q8				
	R ¹ / ₄	6		132432	NPQP-L-R14-Q6				
		8		132433	NPQP-L-R14-Q8				
		10		132434	NPQP-L-R14-Q10				
	R ³ / ₈	10		132435	NPQP-L-R38-Q10				
		12		132436	NPQP-L-R38-Q12				

- 1) With sealing ring
- 2) Packaging unit


Guided drives DGRF-C, Clean Design




Accessories

FESTO

Ordering data – One-way flow control valves				Technical data → Internet: crgla		
	Connection		Material	Part No.	Type	PU ¹⁾
	Thread	For push-in fitting				
	M5	CRQS/CRQSL/CRQST, Quick Star	Electropolished special steel casting	161403	CRGRLA-M5-B	1
	G1/8			161404	CRGRLA-1/8-B	
	G1/4			161405	CRGRLA-1/4-B	
	G3/8			161406	CRGRLA-3/8-B	
	G1/8	Push-in connector is integrated	Chrome-plated metal	195597	GRLA-F-1/8-QS-4-D	1
				195598	GRLA-F-1/8-QS-6-D	
				195599	GRLA-F-1/8-QS-8-D	
				195600	GRLA-F-1/4-QS-6-D	
	G1/4			195601	GRLA-F-1/4-QS-8-D	

1) Packaging unit


Ordering data – Plastic tubing, standard O.D.		Technical data → Internet: tubing
		Type
	Approved for use in the food industry and resistant to hydrolysis	PUN-H
	Good resistance to chemicals and hydrolysis	PLN
	Pneumatic tubing with resistance to high temperatures and chemicals	PFAN

Ordering data – locking screws, corrosion-resistant				
	For Ø	Description	Part No. Type PU ¹⁾	
For mounting thread on the guide				
	20, 25	With cover disc	543715 DAMD-P-M6-12-R1	4
	32, 40, 50		543716 DAMD-P-M8-16-R1	
	63		543717 DAMD-P-M10-16-R1	
For mounting thread on the end cap				
	20, 25	With cover disc	543714 DAMD-P-M5-10-R1	4
	32 ²⁾		543715 DAMD-P-M6-12-R1	
	32 ³⁾ , 40	–	650120 CR-M6x12-A2-70:6KT	
	50, 63		650121 CR-M8x16-A2-70:6KT	

1) Packaging unit

2) For drive with P cushioning

3) For drive with PPV cushioning

Ordering data – Centring sleeves		Technical data → Internet: zbh		
	For Ø	Part No.	Type	PU ¹⁾
	20, 25	150927	ZBH-9	10
	32, 40, 50, 63	189653	ZBH-12	

1) Packaging unit

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com