

Mini slides DGSL

FESTO



Mini slides DGSL


Key features

FESTO

General information

- Double-acting drives
- Wide range of options for mounting
- System product for handling and assembly technology
- Highly elastic thanks to wide range of assembly and connection options on:
 - Drive body, slide, yoke plate

The technology in detail

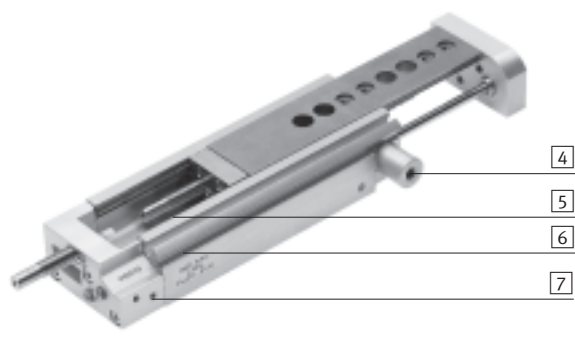

1 Cushioning



- Choice of five cushioning types:
 - Elastic cushioning without metal end position (P)
 - Elastic cushioning without metal end position, short design (E)
 - Elastic cushioning with metal end position (P1)
 - Shock absorbers (Y3)
 - Shock absorbers with reducing sleeve (Y11)
- Alternative:
 - Without cushioning (N)

2 Cover



- The cover stops foreign parts or dirt getting into the guide
- The cover comes in different lengths and can be trimmed as required by the customer

3 Coarse stroke adjustment



- The end stop for the advanced end position can be adjusted mechanically, for example to shorten the stroke

4 Clamping unit




- Mechanical clamping, for fixing the slide in any position; frictional locking (C)

4 End-position locking




- Mechanical locking when the end position is reached, for fixing the slide in the unpressurised, retracted state; positive locking (E3)

5 Innovative guide unit




- Wide roller track, which provides extremely high rigidity
- High load capacity
- High precision
- Housing and steel slide form a guide: there are no accumulative tolerances

6 Position sensing



- Proximity sensors can be integrated, so there are no projecting parts
- Two slots for mounting
- Clearly visible from the side and from above

7 Supply ports




- Choice of two sides:
 - On front face
 - At the side

Mini slides DGSL

System example

FESTO

System product for handling and assembly technology

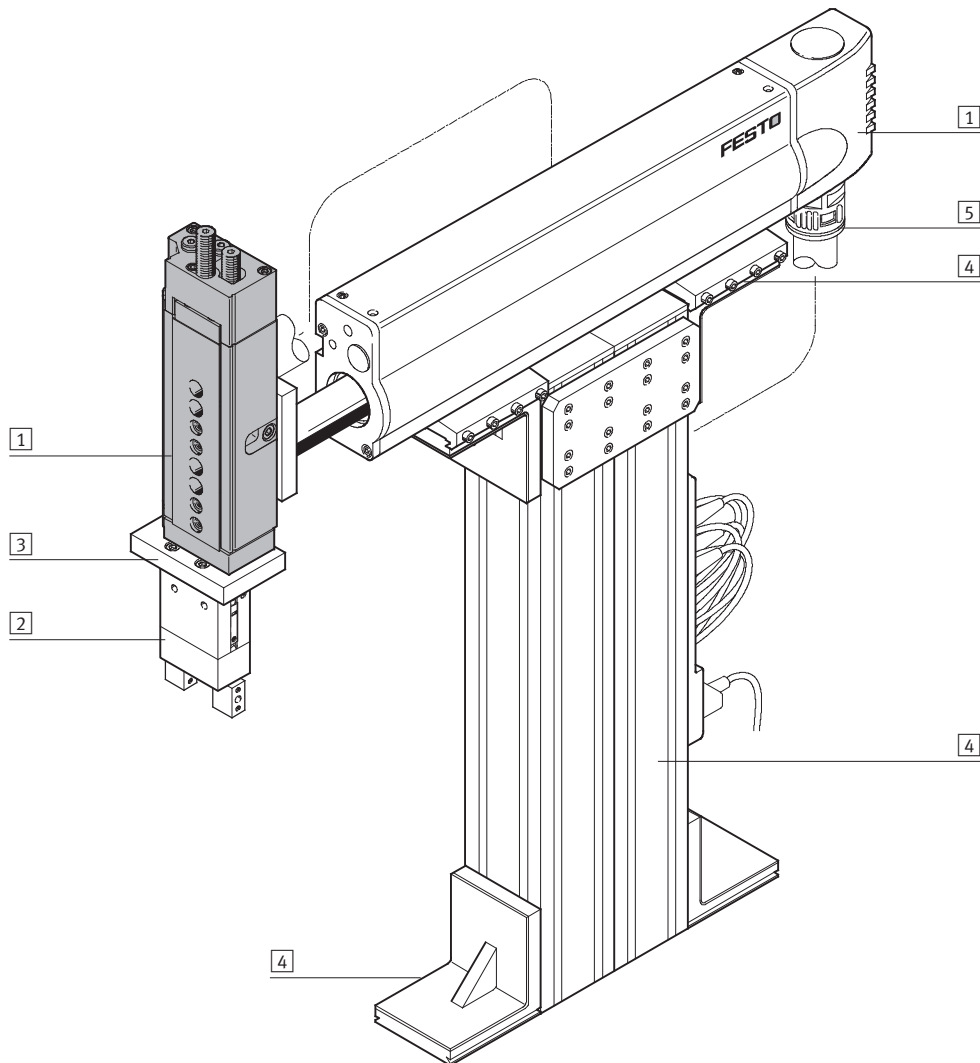


System components and accessories		
	Brief description	➔ Page/Internet
1 Drives	Wide range of combinations possible within handling and assembly technology	drive
2 Grippers	Wide range of variations possible within handling and assembly technology	gripper
3 Adapters	For drive/drive and drive/gripper connections	adapter kit
4 Basic components	Profiles and profile connections as well as profile/drive connections	basic component
5 Installation components	For a clear, safe layout of electrical cables and tubing	installation component
– Axes	Wide range of combinations possible within handling and assembly technology	axis
– Motors	Servo and stepper motors, with or without gearing	motor

Mini slides DGSL

Peripherals overview

FESTO

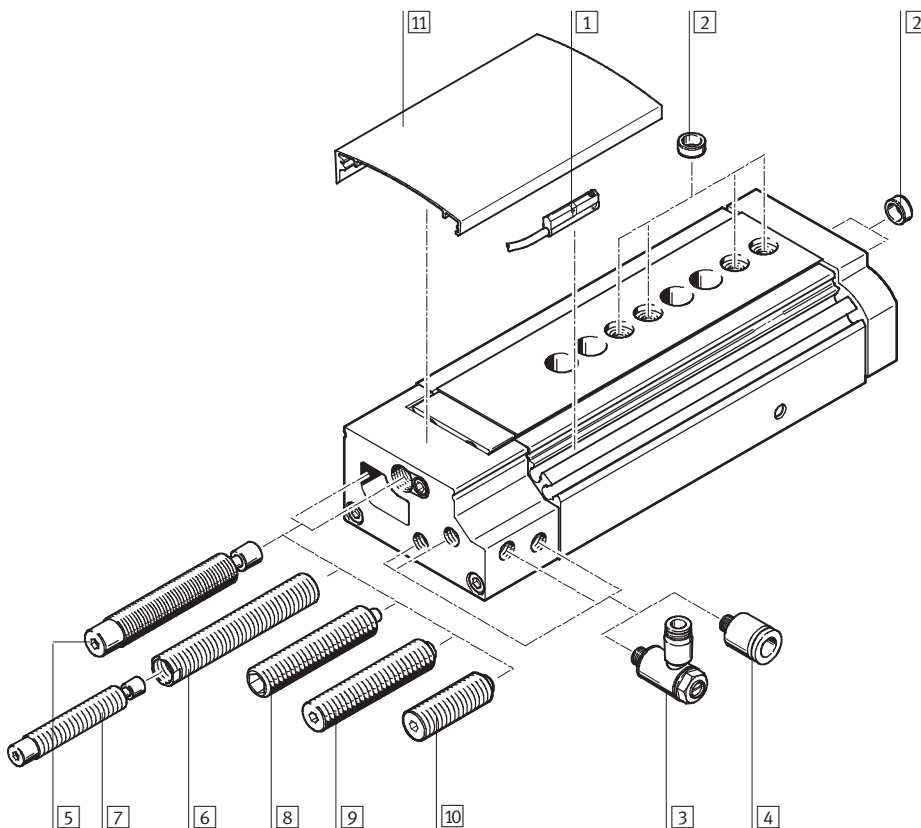

Note

Operation without cushioning components is not permitted.

Accessories		
	Brief description	→ Page/Internet
1	Proximity sensor SME/SMT-10	For position sensing. Can be integrated in the sensor slot, so there are no projecting parts
2	Centring sleeve ZBH	For centring loads and attachments (centring sleeves are included in the scope of delivery of the mini slide)
3	One-way flow control valve GRLA	For regulating speed
4	Push-in fitting QSM	For connecting compressed air tubing with standard O.D.
5	Cushioning with shock absorber Y3	For large loads and high speed. Ensures precise, metal-to-metal contact after the cushioning
6	Reducing sleeve DAYH	For installing a smaller shock absorber. For applications where the cushioning energy lies between the cushioning Y3 and P1
7	Shock absorber DYSW	→ 12 (shock absorber selection)
8	Cushioning with stop P1	Precision metal stop for small loads at low speed
9	Cushioning P	- Flexible stop for medium loads at medium speed (standard design)
10	Cushioning E	- Flexible stop for medium loads at medium speed (short design)
11	Cover DADS	- For protection, to stop foreign parts or dirt getting into the guide - The cover can be trimmed as required by the customer

Mini slides DGSL

Type codes

FESTO


		DGSL	–	10	–	100	–		E3	–	Y3	A
Type												
Double-acting												
DGSL	Mini slide											
Size												
Stroke [mm]												
Clamping unit												
C	Attached											
End-position locking												
E3	With piston rod in retracted position											
Cushioning												
P	Elastic cushioning without metal end position, both ends											
P1	Elastic cushioning with metal end position, both ends											
Y3	Progressive shock absorber, both ends											
E	Elastic cushioning without metal end position, both ends, short design											
Y11	Progressive shock absorber with reducing sleeve, both ends											
N	Without cushioning											
Position sensing												
A	Via proximity sensor											

Mini slides DGSL

Technical data

FESTO

Function



- Ø - Size
4 ... 25

- I - Stroke length
10 ... 200 mm

Wearing parts kits

→ 45

Technical data:

- DGSL-C (with clamping unit)
- DGSL-E3 (with end-position locking)

→ 40



General technical data									
Size		4	6	8	10	12	16	20	25
Pneumatic connection		M3			M5			G1/8	
Design		Scotch yoke system							
Guide		Ball bearing cage guide							
Type of mounting		Via through-hole							
		Via female thread							
Cushioning	P	Elastic cushioning without metal end position, both ends							
	E	Elastic cushioning without metal end position, both ends, short design							
	P1	Elastic cushioning with metal end position, both ends, adjustable							
	Y3	–			Progressive shock absorber, both ends				
	Y11	–			Progressive shock absorber with reducing sleeve, both ends				
	N	–			Without cushioning				
Position sensing		Via proximity sensor							
Mounting position		Any							
Max. advancing speed		[m/s]	0.5		0.8				
Max. retracting speed		[m/s]	0.5		0.8				
Repetition accuracy	P1/Y3	[mm]	±0.01						
	P	[mm]	0.3						

Operating and environmental conditions								
Size	4	6	8	10	12	16	20	25
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]							
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)							
Min. operating pressure	[bar]	2.5	1.5			1		
Max. operating pressure	[bar]	8						
Ambient temperature ¹⁾	[°C]	0 ... +60						

1) Note operating range of proximity sensors.

Piston Ø, forces and impact energy								
Size	4	6	8	10	12	16	20	25
Piston Ø	[mm]	6	8	10	12	16	20	25
Theoretical force at 6 bar, advancing	[N]	17	30	47	68	121	188	295
Theoretical force at 6 bar, retracting	[N]	13	23	40	51	104	158	247
Impact energy in the end positions	P, E	[Nm]	0.015	0.05	0.08	0.12	0.25	0.35
	P1	[Nm]	0.005	0.02	0.03	0.04	0.06	0.12
	Y3	[Nm]	–	–	0.8	1.3	2.5	4
	1)	[Nm]	–	–	–	0.8	1.3	2.5

1) With reducing sleeve and next smallest shock absorber.

Mini slides DGSL

Technical data


FESTO

Weight [g]									
Size	Stroke	4	6	8	10	12	16	20	25
Product weight without cushioning component									
	10	82	158	235	396	604	896	1,535	2,520
	20	93	179	263	434	660	954	1,649	2,670
	30	104	197	289	470	711	1,008	1,746	2,824
	40	–	215	313	507	762	1,072	1,857	2,983
	50	–	232	370	548	813	1,143	1,991	3,137
	80	–	–	454	727	1,112	1,365	2,295	4,019
	100	–	–	–	813	1,229	1,712	2,921	4,519
	150	–	–	–	–	1,499	2,034	3,620	5,344
	200	–	–	–	–	–	–	4,248	6,139
Moving load without cushioning component									
	10	31	68	101	163	256	403	660	998
	20	34	76	111	180	279	432	710	1,052
	30	38	83	121	194	299	459	750	1,115
	40	–	90	130	208	320	486	801	1,181
	50	–	99	152	226	340	519	858	1,244
	80	–	–	185	299	456	618	998	1,567
	100	–	–	–	334	507	776	1,254	1,761
	150	–	–	–	–	614	910	1,566	2,102
	200	–	–	–	–	–	–	1,807	2,432
Cushioning component									
	P	2	3.6	6	14	23	45.6	82.4	106
	E	1	2	3	9	12	15	31	40
	P1	1.6	3	5	12	19.7	39.6	77.3	104
	Y3	–	–	6	11	21	42	67	91
	1)	–	–	–	18	33	52	91	131

1) With reducing sleeve and next smallest shock absorber.

Materials

Sectional view

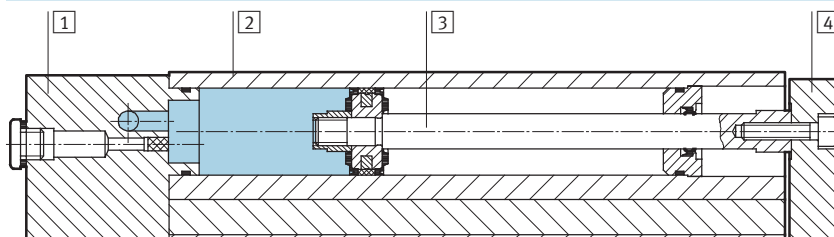

Mini slide	
1 End cap	Anodised aluminium
2 Housing	Anodised aluminium
3 Piston rod	High-alloy steel
4 Yoke plate	Anodised aluminium
– Guide	Tempered steel
– Seals	Thermoplastic rubber, hydrogenated nitrile rubber, nitrile rubber
Note on materials	Free of copper and PTFE


Mini slides DGSL

Technical data

FESTO

Possible combinations without adapter plate


Pick and place

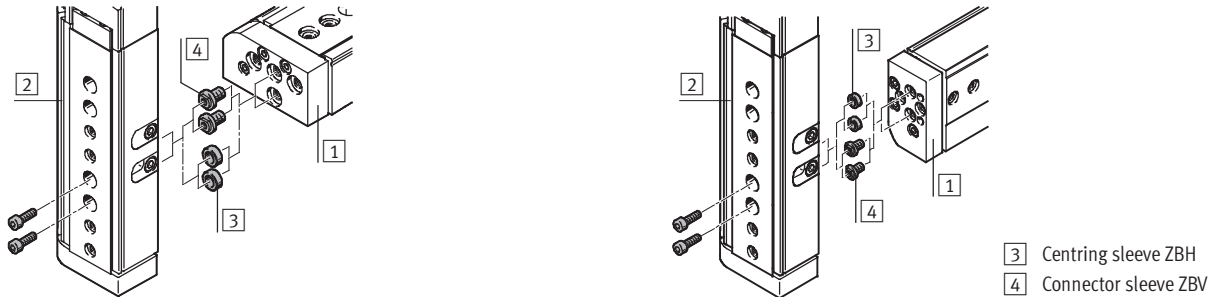

Piggy-back assembly



Mounting example with connector sleeve ZBV

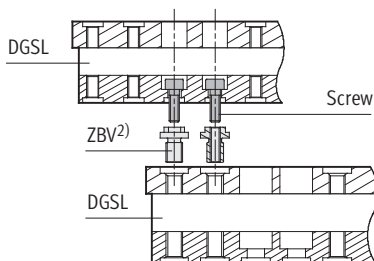

1 Basic drive									
Size		4	6	8	10	12	16	20	25
2 Assembly drive	4	2x M3x7 2x ZBH-5 ¹⁾	2x M3x10 2x ZBH-5 ¹⁾	ZBV-M4-7 ²⁾	ZBV-M4-7 ²⁾	–	–	–	–
	6	–	2x M3x10 2x ZBH-5 ¹⁾	ZBV-M4-7 ²⁾	ZBV-M4-7 ²⁾	–	–	–	–
	8	–	–	2x M4x12 2x ZBH-7 ¹⁾	2x M4x12 2x ZBH-7 ¹⁾	ZBV-M5-7 ²⁾	ZBV-M5-7 ²⁾	–	–
	10	–	–	–	2x M4x14 2x ZBH-7 ¹⁾	ZBV-M5-7 ²⁾	ZBV-M5-7 ²⁾	–	–
	12	–	–	–	–	2x M5x14 2x ZBH-7 ¹⁾	2x M5x16 2x ZBH-7 ¹⁾	ZBV-M6-9 ²⁾	ZBV-M6-9 ²⁾
	16	–	–	–	–	–	2x M5x18 2x ZBH-7 ¹⁾	ZBV-M6-9 ²⁾	ZBV-M6-9 ²⁾
	20	–	–	–	–	–	–	2x M6x20 2x ZBH-9 ¹⁾	2x M6x20 2x ZBH-9 ¹⁾
	25	–	–	–	–	–	–	–	2x M6x30 2x ZBH-9 ¹⁾

1) Centring sleeves ZBH are included in the scope of delivery of the mini slide DGSL

2) Connector sleeves ZBV → 46


Mini slides DGSL

Technical data

FESTO

Parallelism [mm]


The term parallelism refers to the accuracy of alignment between the mounting surface and the slide surface.

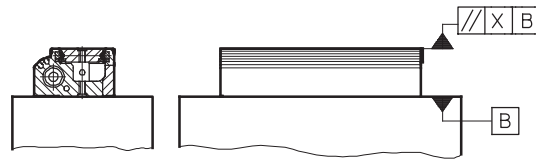


Size	Stroke [mm]	4	6	8	10	12	16	20	25
Parallelism X	10	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
	20	0.02	0.02	0.02	0.02	0.025	0.025	0.025	0.025
	30	0.025	0.025	0.025	0.025	0.025	0.025	0.03	0.03
	40	–	0.025	0.025	0.025	0.03	0.03	0.035	0.035
	50	–	0.03	0.03	0.03	0.035	0.035	0.04	0.04
	80	–	–	0.035	0.035	0.04	0.04	0.045	0.045
	100	–	–	–	0.045	0.05	0.05	0.055	0.055
	150	–	–	–	–	0.075	0.075	0.08	0.08
	200	–	–	–	–	–	–	0.08	0.08

Linearity [mm]

The term linearity refers to the accuracy of alignment between the mounting surface and the slide surface as a function of the stroke.

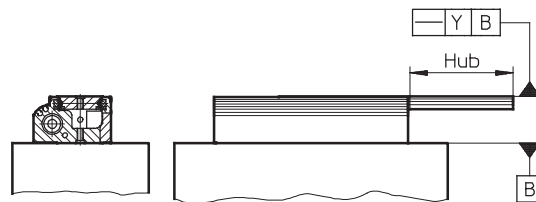

Linear travel accuracy y as a function of stroke length l

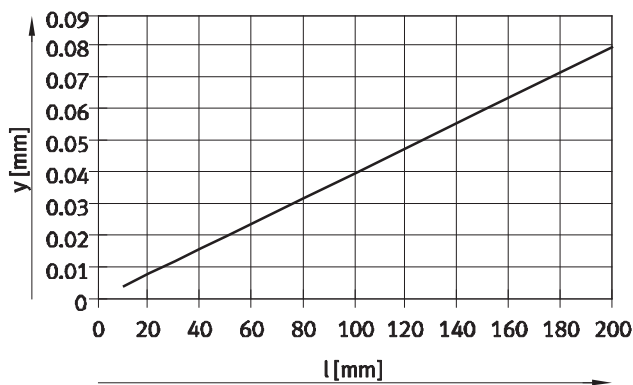

Mini slides DGSL

Technical data

FESTO

Adjustable end-position range

Coarse adjustment of the advanced end position

The mini slide DGSL allows the advanced fixed stop to be adjusted by removing the cover.


This permits stroke reduction down to the next but one smaller standard stroke through a combination of coarse and precision adjustments.

Advantages:

- Can be flexibly adapted to the application
- Integrated, which means reduced conversion effort and costs
- Large setting range

Note

Removal of the fixed stops can result in the destruction of the mini slide DGSL.

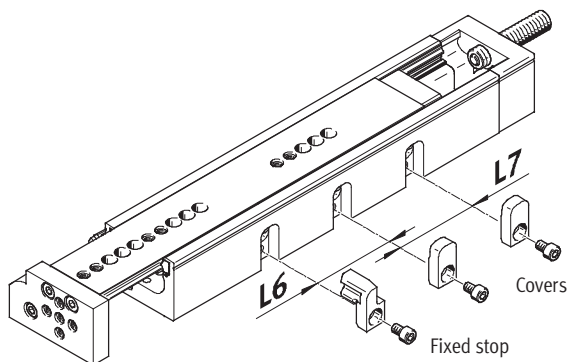

Size Stroke [mm]	4		6		8		10		12		16		20		25	
	L6	L7	L6	L7	L6	L7	L6	L7	L6	L7	L6	L7	L6	L7	L6	L7
10	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
20	10	–	14	–	10	–	–	–	–	–	–	–	–	–	–	–
30	10	–	14	–	16	–	–	–	–	–	–	–	–	–	–	–
40	–	–	14	–	16	–	–	–	–	–	–	–	–	–	–	–
50	–	–	14	14	16	–	–	–	–	–	–	–	–	–	–	–
80	–	–	–	–	16	16	24	–	29	–	35	–	–	–	55	–
100	–	–	–	–	–	–	24	24	29	–	35	–	44	–	55	–
150	–	–	–	–	–	–	–	–	29	29	35	–	44	–	55	–
200	–	–	–	–	–	–	–	–	–	–	–	–	44	44	55	–

Example:

DGSL-12-150-...

Max. stroke = 150 mm

By adjusting the fixed stop

by the dimension **L6**:

Stroke = $150 - 29 = 121$ mm

By adjusting the fixed stop

by the dimension **L6** and **L7**:

Stroke = $150 - 29 - 29 = 92$ mm

The stroke can additionally be reduced by means of precision adjustment:

Stroke = $150 - 29 - 29 - 29 = 63$ mm

Precision adjustment
of the advanced and retracted end
position → 11

Mini slides DGSL

Technical data

FESTO

Adjustable end-position range

Precision adjustment of the advanced and retracted end position

Precision adjustment of the required stroke reduction is possible using the cushioning components (on the slide and in the end cap).

Advantages:

- Precision adjustment is accurately fixed by the clamping component
- No readjustment required, position is fully retained under load
- Quick and easy adjustment, only one tool required

Step 1:

Loosen the clamping component.

Step 2:

Position the slide by hand in the desired end position.


Step 3:

Turn the stop element using an Allen key until the end position is reached.


Step 4:

Tighten the clamping component.

Step 1



Step 2 ... 4




Adjustable end-position range [mm] per end position/stroke reduction									
Size		4	6	8	10	12	16	20	25
Advanced end position									
With cushioning	P	-14.5	-16.5	-19.5	-27.5	-29	-37.5	-50.5	-55
	E	-4.5	-5	-4.5	-13	-9	-3.5	-6.5	-11.5
	P1	-14.5	-16.5	-19.5	-27.5	-29	-37.5	-50.5	-55
	Y3	-	-	-15	-24	-29	-36.5	-44	-56
	1)	-	-	-15	-24	-29	-36.5	-44	-56
Retracted end position									
With cushioning	P	-13.5	-15	-18.5	-20	-25.5	-39.5	-49.5	-49
	E	-3.5	-3.5	-3.5	-5.5	-5.5	-5.5	-5.5	-5.5
	P1	-13.5	-15	-18.5	-20	-25.5	-39.5	-49.5	-49
	Y3	-	-	-14	-15	-25.5	-38.5	-42	-51.5
	1)	-	-	-14	-15	-25.5	-38.5	-42	-51.5

1) With reducing sleeve and next smallest shock absorber.

Note

The distance L of the cushioning component (→ operating instructions) must not be fallen below (factory setting).

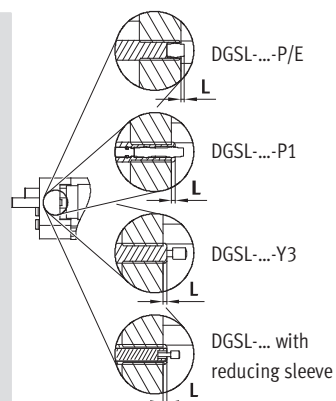

Note

The setting range of the advanced and retracted end position is restricted when using the cushioning type "E".

Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Effective load m as a function of impact velocity v

With the mini slide DGSL the shock absorber can be replaced and thus the cushioning behaviour can be influenced (depending on the effective load).

This is done by removing the existing shock absorbers on the DGSL and replacing them with a smaller shock absorber as appropriate to the application (→ description below).

Graphs



for selecting a suitable shock absorber as a function of the mounting position of the mini slide
→ from 13.

Ordering data

Shock absorbers DYSW, DYEF and reducing sleeve DAYH → 46.



With smaller loads:

The next smallest shock absorber DYSW can be installed with the help of the reducing sleeve DAYH.

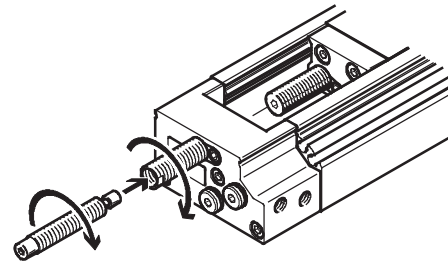

With very small loads:

The shock absorber DYEF can be installed.



Selection example:

Existing drive:


Mini slide: DGSL-10-...-Y3-A

Given:

Effective load: 500 g

Impact velocity: 0.4 m/s

Mounting position: Horizontal

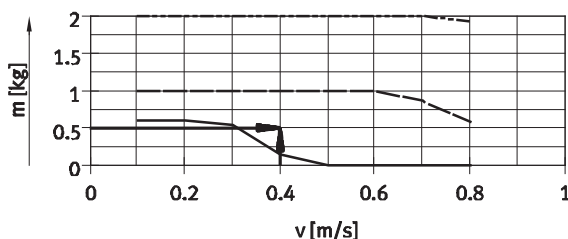

- DYSW-5-8 (cushioning Y3)
- DYSW-4-6 with DAYH-4 (cushioning Y11)
- DYEF-M8-Y1F

Result:

The first cushioning curve, which is located above the point of intersection, is the most suitable for this case.

Due to the low effective load of less than one kilogram, the cushioning

characteristics are greatly improved by replacing the shock absorber DYSW-5-8 integrated in the mini slide with the reducing sleeve DAYH-4 and the next smallest shock absorber DYSW-4-6.

Fundamentally, the following applies: shock absorbers must be loaded. Since the shock absorber DYSW-4-6 is more fully utilised in this case, both the service life of the shock absorber

and the cushioning characteristics are improved.

Mini slides DGSL


Technical data

FESTO

Shock absorber selection


Effective load m as a function of impact velocity v – horizontal mounting position

DGSL-4

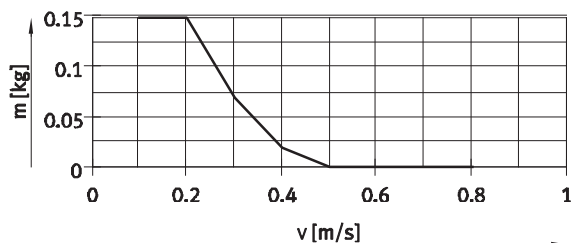


DYEF-M4-Y1F (cushioning P1)

DGSL-6

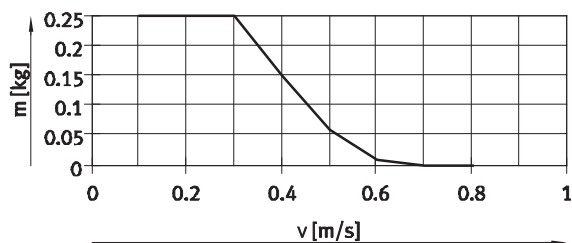

DYEF-M5-Y1F (cushioning P1)


DGSL-8

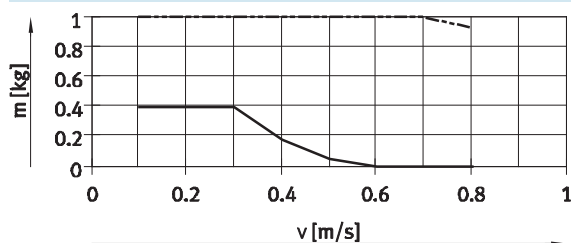

DYSW-4-6 (cushioning Y3)

DYEF-M6-Y1F

DGSL-10

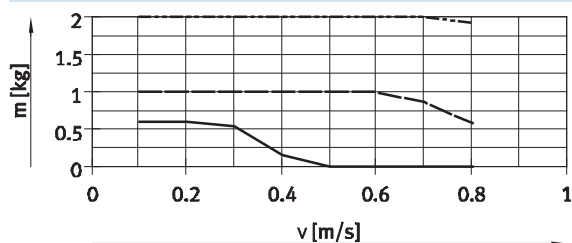


DYSW-5-8 (cushioning Y3)

DYSW-4-6 with DAYH-4 (cushioning Y11)

DYEF-M8-Y1F

DGSL-12

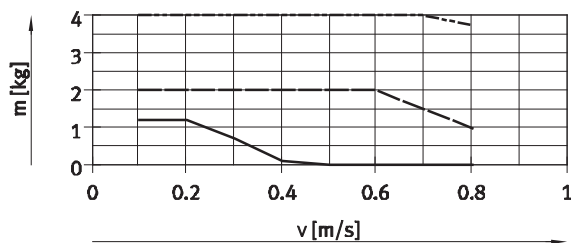


DYSW-7-10 (cushioning Y3)

DYSW-5-8 with DAYH-5 (cushioning Y11)

DYEF-M10-Y1F

DGSL-16

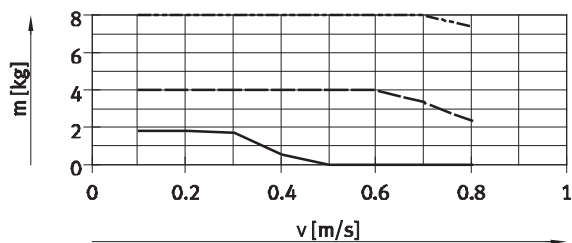


DYSW-8-14 (cushioning Y3)

DYSW-7-10 with DAYH-7 (cushioning Y11)

DYEF-M12-Y1F

DGSL-20

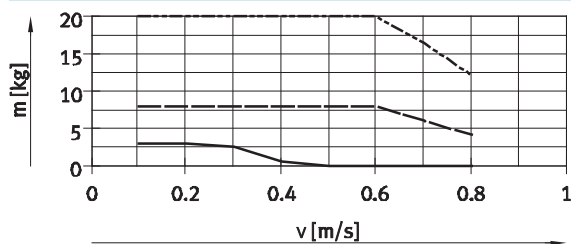


DYSW-10-17 (cushioning Y3)

DYSW-8-14 with DAYH-8 (cushioning Y11)

DYEF-M14-Y1F

DGSL-25

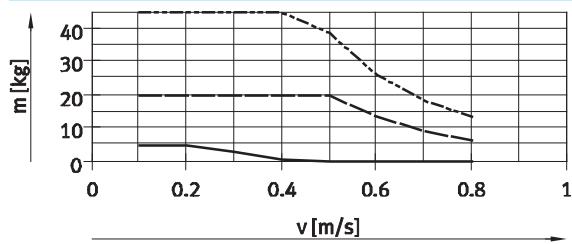

DYSW-12-20 (cushioning Y3)

DYSW-10-17 with DAYH-10 (cushioning Y11)

DYEF-M16-Y1F

Mini slides DGSL


Technical data

FESTO

Shock absorber selection


Effective load m as a function of impact velocity v – vertical mounting position, effective load moving upwards

DGSL-4

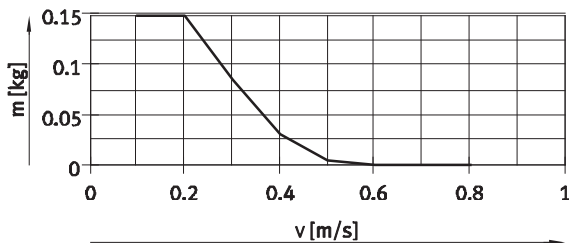


DYEF-M4-Y1F (cushioning P1)

DGSL-6

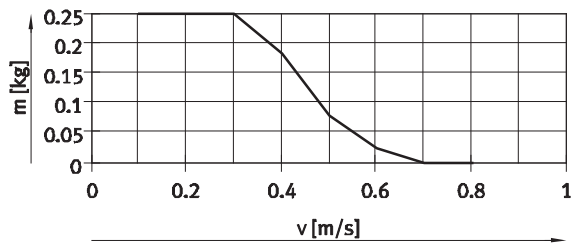

DYEF-M5-Y1F (cushioning P1)


DGSL-8

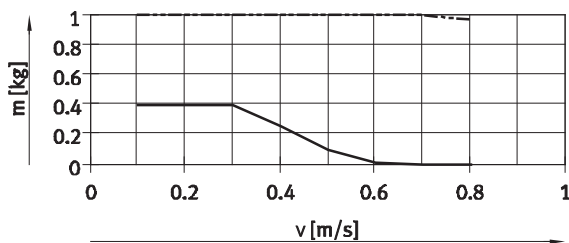

DYSW-4-6 (cushioning Y3)

DYEF-M6-Y1F

DGSL-10

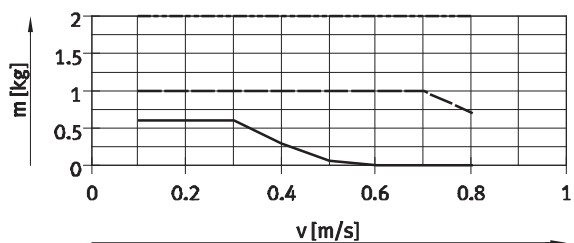


DYSW-5-8 (cushioning Y3)

DYSW-4-6 with DAYH-4 (cushioning Y11)

DYEF-M8-Y1F

DGSL-12

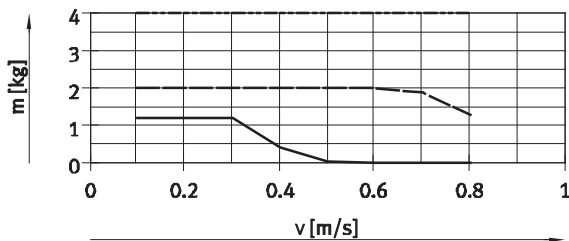


DYSW-7-10 (cushioning Y3)

DYSW-5-8 with DAYH-5 (cushioning Y11)

DYEF-M10-Y1F

DGSL-16

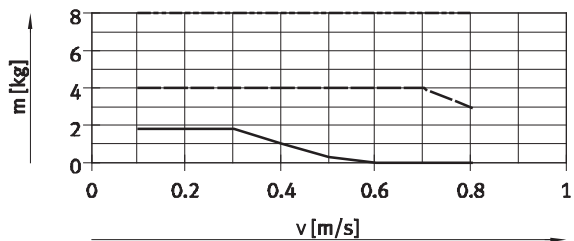


DYSW-8-14 (cushioning Y3)

DYSW-7-10 with DAYH-7 (cushioning Y11)

DYEF-M12-Y1F

DGSL-20

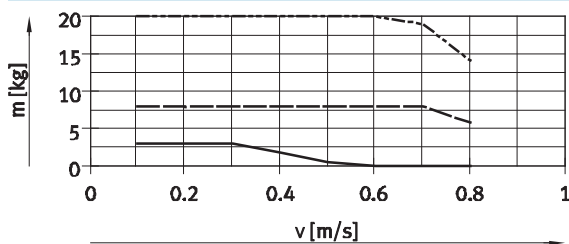


DYSW-10-17 (cushioning Y3)

DYSW-8-14 with DAYH-8 (cushioning Y11)

DYEF-M14-Y1F

DGSL-25

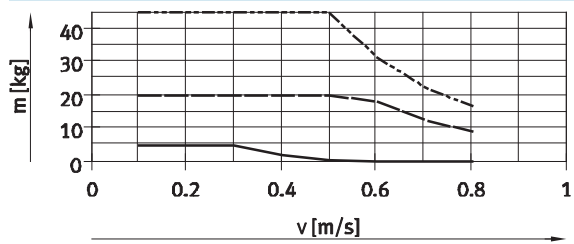

DYSW-12-20 (cushioning Y3)

DYSW-10-17 with DAYH-10 (cushioning Y11)

DYEF-M16-Y1F

Mini slides DGSL


Technical data

FESTO

Shock absorber selection


Effective load m as a function of impact velocity v – vertical mounting position, effective load moving downwards

DGSL-4

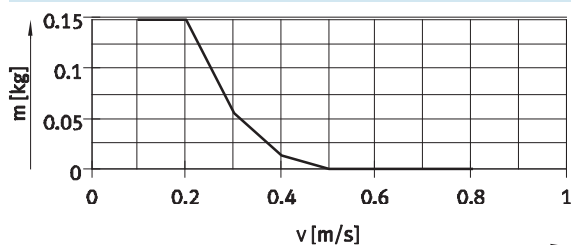


DYEF-M4-Y1F (cushioning P1)

DGSL-6

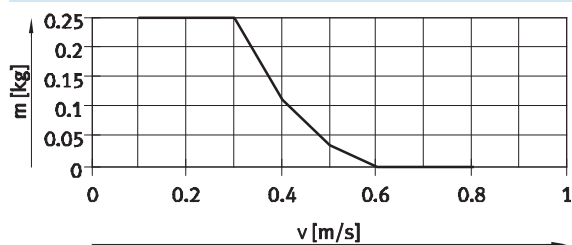

DYEF-M5-Y1F (cushioning P1)


DGSL-8

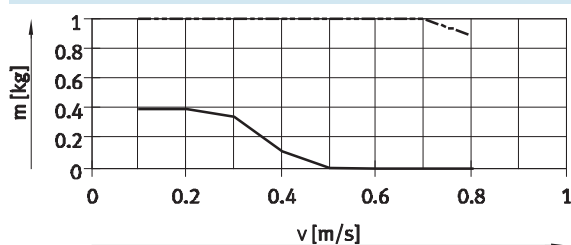

DYSW-4-6 (cushioning Y3)

DYEF-M6-Y1F

DGSL-10

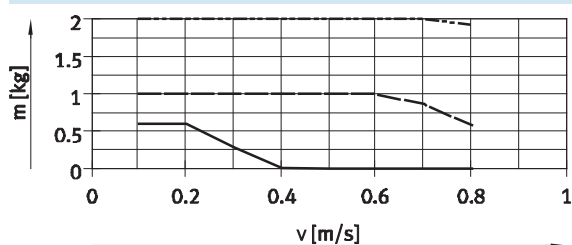


DYSW-5-8 (cushioning Y3)

DYSW-4-6 with DAYH-4 (cushioning Y11)

DYEF-M8-Y1F

DGSL-12

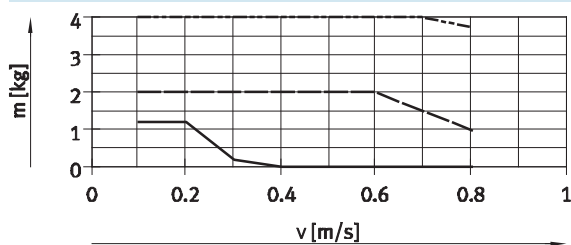


DYSW-7-10 (cushioning Y3)

DYSW-5-8 with DAYH-5 (cushioning Y11)

DYEF-M10-Y1F

DGSL-16

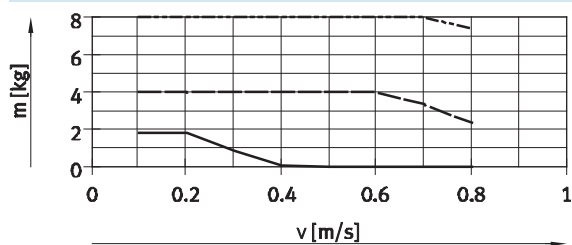


DYSW-8-14 (cushioning Y3)

DYSW-7-10 with DAYH-7 (cushioning Y11)

DYEF-M12-Y1F

DGSL-20

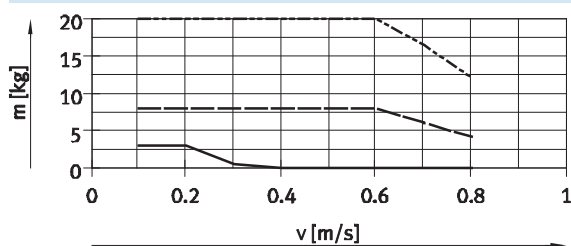


DYSW-10-17 (cushioning Y3)

DYSW-8-14 with DAYH-8 (cushioning Y11)

DYEF-M14-Y1F

DGSL-25

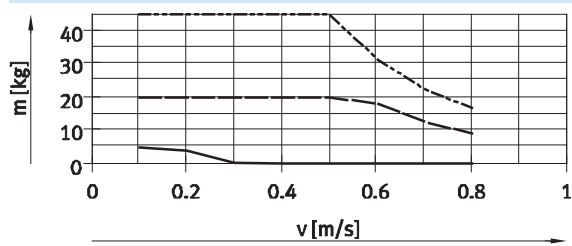

DYSW-12-20 (cushioning Y3)

DYSW-10-17 with DAYH-10 (cushioning Y11)

DYEF-M16-Y1F


Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P/E – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 19


Advancing

Stroke 10 mm, size 4 ... 10

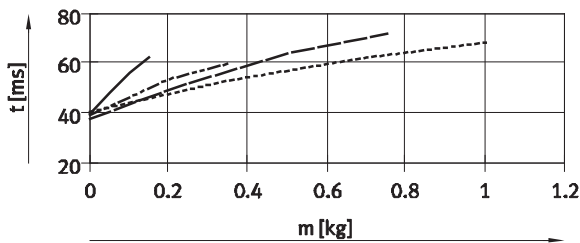


Retracting


Stroke 10 mm, size 4 ... 10

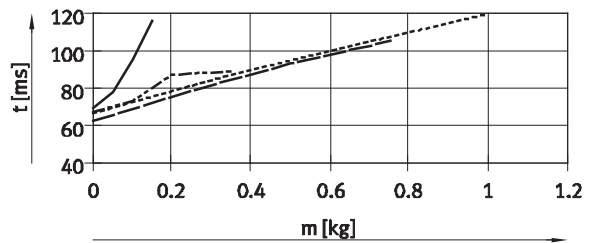


Stroke 10 mm, size 12 ... 16

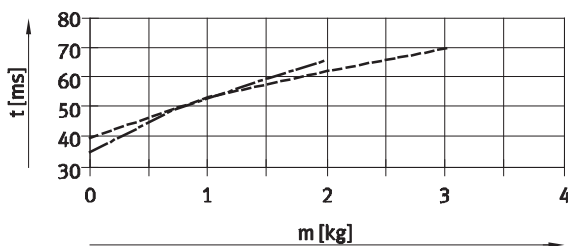


Stroke 10 mm, size 12 ... 16

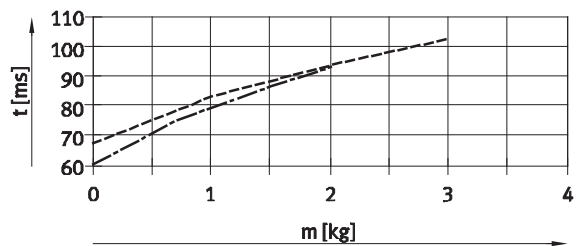


Stroke 10 mm, size 20 ... 25

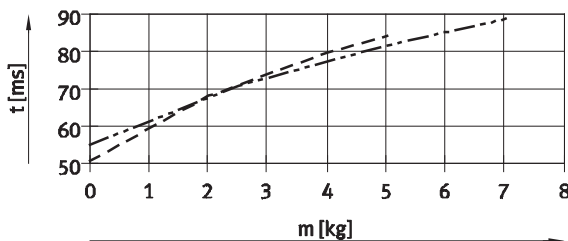


Stroke 10 mm, size 20 ... 25

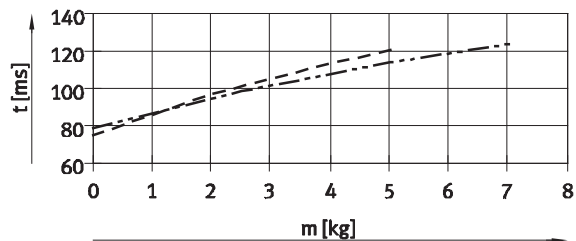

Stroke 30 mm, size 4 ... 10

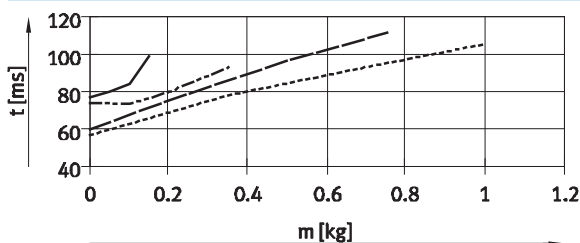

Stroke 30 mm, size 4 ... 10

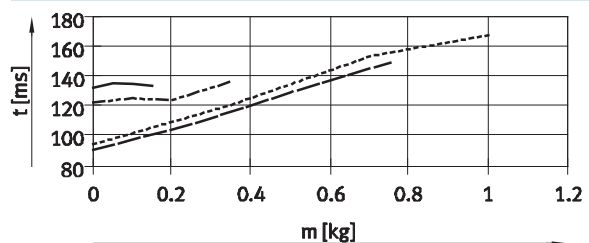

— DGSL-4	— DGSL-12
- - - DGSL-6	- - - DGSL-16
- - - DGSL-8	- - - DGSL-20
- - - DGSL-10	- - - DGSL-25

Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P/E – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 19


Advancing

Stroke 30 mm, size 12 ... 25

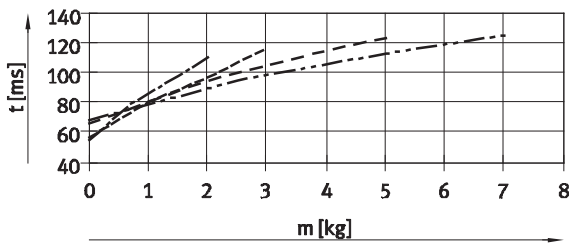


Retracting


Stroke 30 mm, size 12 ... 16

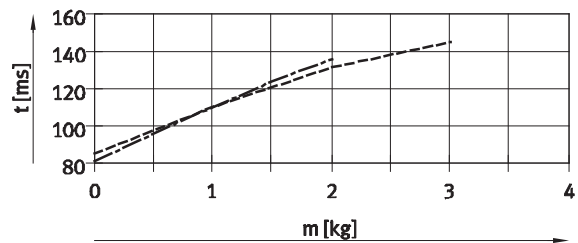


Stroke 30 mm, size 20 ... 25

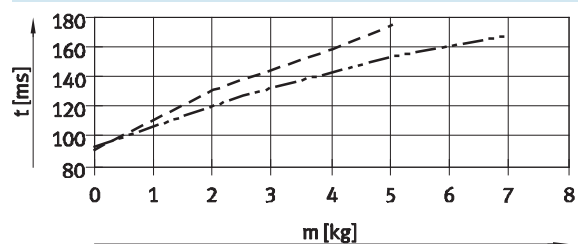


Stroke 50 mm, size 6 ... 12

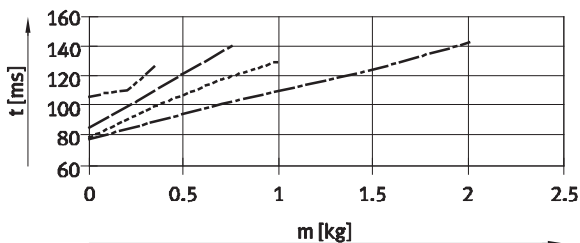


Stroke 50 mm, size 6 ... 12

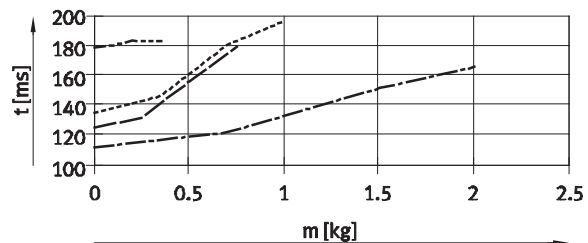


Stroke 50 mm, size 16 ... 25

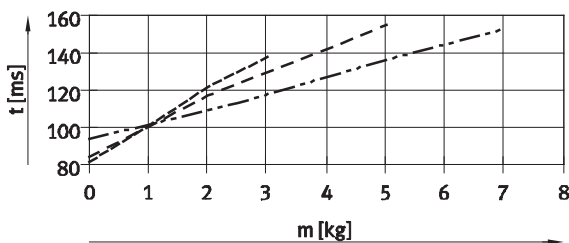

Stroke 50 mm, size 16

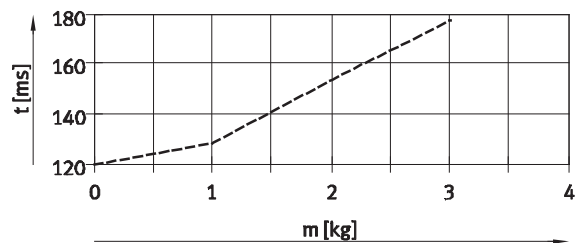

Stroke 50 mm, size 20 ... 25

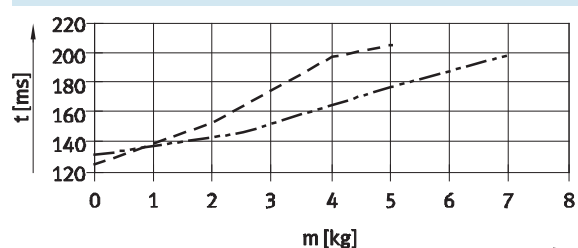


Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P/E – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 19


Advancing

Stroke 100 mm, size 10 ... 16

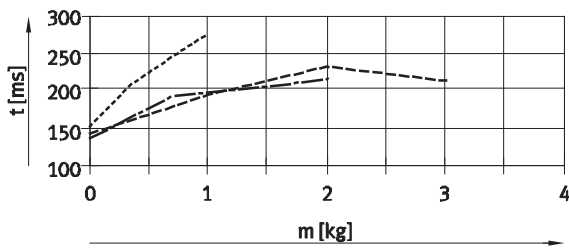


Retracting


Stroke 100 mm, size 10 ... 16

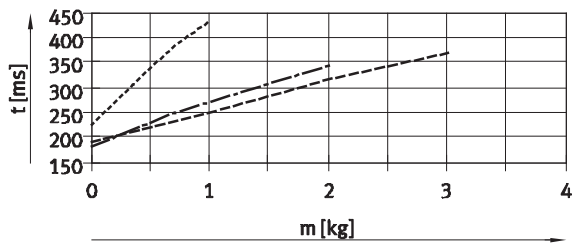


Stroke 100 mm, size 20 ... 25

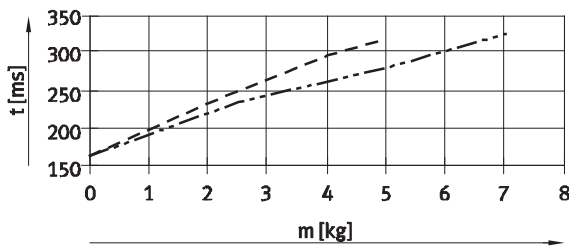


Stroke 100 mm, size 20 ... 25

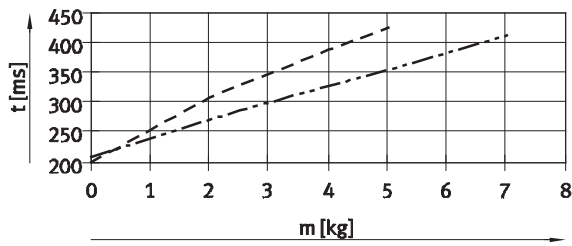


Stroke 150 mm, size 12 ... 16

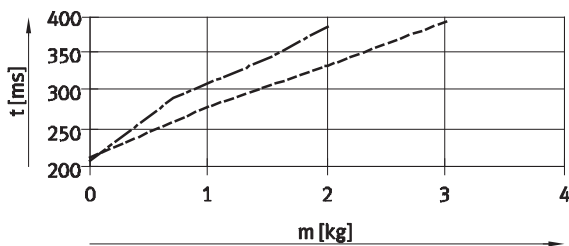


Stroke 150 mm, size 12 ... 16

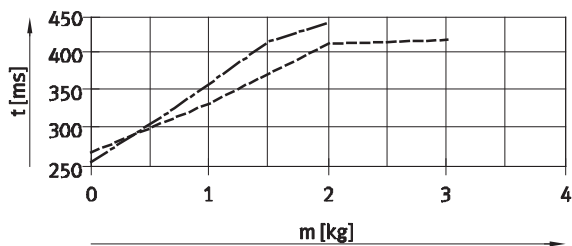

Stroke 150 mm, size 20 ... 25

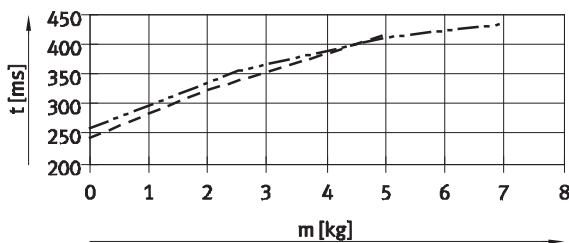

Stroke 150 mm, size 20 ... 25

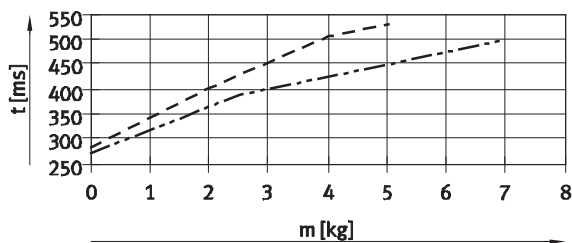

..... DGSL-10
 -.-.-.- DGSL-12
 ----- DGSL-16
 -.-.-.- DGSL-20
 -.-.-.- DGSL-25

Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P/E – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 19

Advancing


Stroke 200 mm, size 20 ... 25

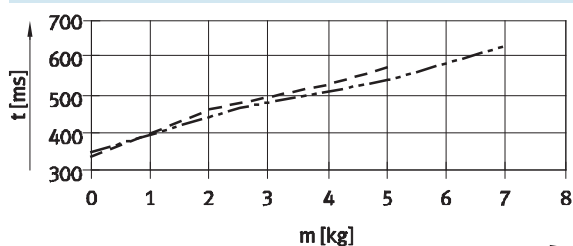

--- DGSL-20
- . - DGSL-25

Retracting

Stroke 200 mm, size 20 ... 25

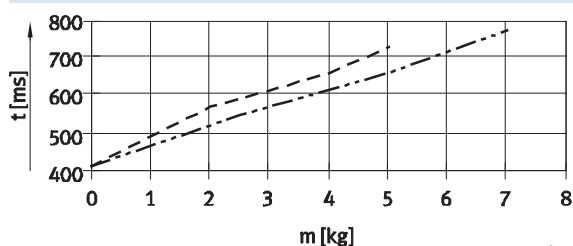

Vertical mounting position

The travel times for a vertical mounting position are calculated by multiplying the data for a horizontal mounting position by a correction factor k_a (advancing) and k_r (retracting), see adjacent table.

Given:

Stroke = 200 mm
Size = 20
Effective load = 3 kg
Ascertained travel time t_h (horizontal), see graph:
– Advancing = 500 ms
– Retracting = 600 ms
Calculated travel time t_v (vertical):
– Advancing: $t_v = t_h \times k_a$
 $t_v = 500 \text{ ms} \times 0.9 = 450 \text{ ms}$
– Retracting: $t_v = t_h \times k_r$
 $t_v = 600 \text{ ms} \times 1.1 = 660 \text{ ms}$

Stroke [mm]	Size	Advancing (k_a) ¹⁾	Retracting (k_r)
10	4, 6, 8, 10	0.95	1.1
	12, 16, 20, 25	0.95	1.2
30	4, 6, 8, 10	0.95	1.1
	12, 16, 20, 25	0.95	1.2
50	6, 8, 10, 12	0.9	1.1
	16, 20, 25	1.1	1.2
100	10, 12, 16, 20, 25	1	1.1
150	12, 16, 20, 25	1	1.1
200	20, 25	0.9	1.1

1) Downward.

Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P1 – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 23


Advancing

Stroke 10 mm, size 4 ... 10

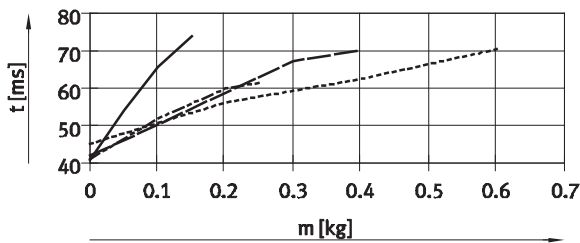


Retracting


Stroke 10 mm, size 4 ... 10

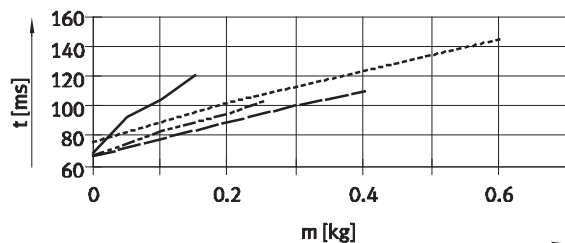


Stroke 10 mm, size 12 ... 16

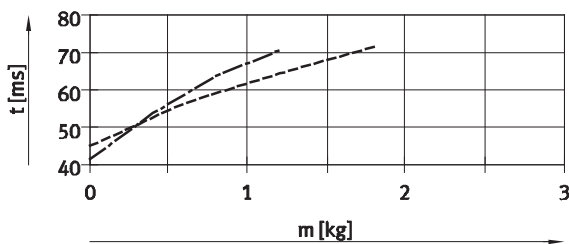


Stroke 10 mm, size 12 ... 16

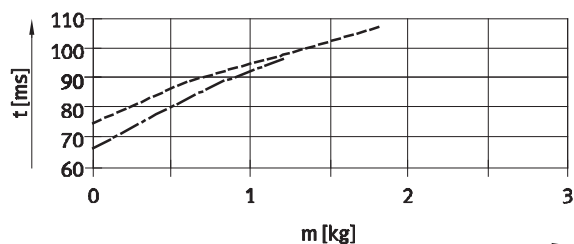


Stroke 10 mm, size 20 ... 25

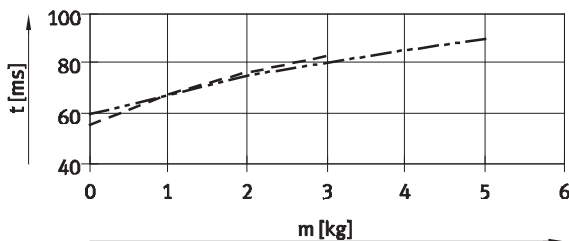


Stroke 10 mm, size 20 ... 25

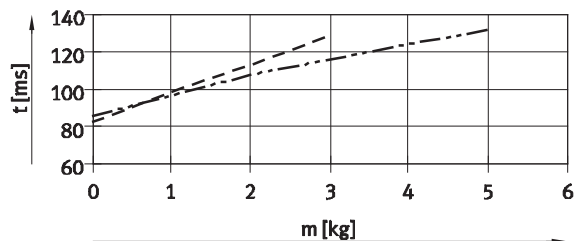

Stroke 30 mm, size 4 ... 10

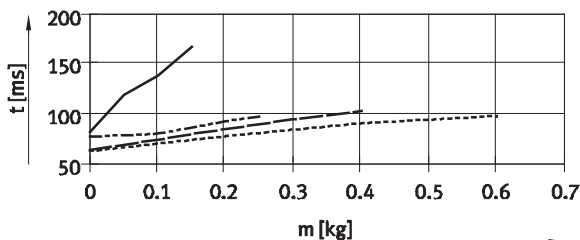

Stroke 30 mm, size 4 ... 10

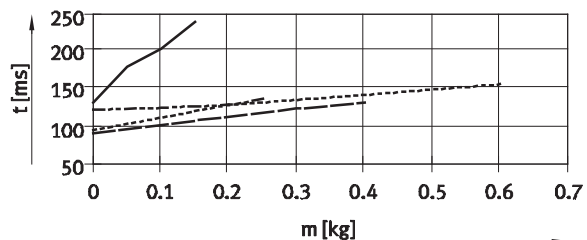

————— DGSL-4	----- DGSL-12
----- DGSL-6	----- DGSL-16
----- DGSL-8	----- DGSL-20
----- DGSL-10	----- DGSL-25

Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P1 – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 23


Advancing

Stroke 30 mm, size 12 ... 16

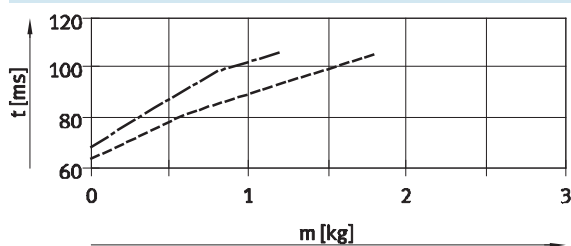


Retracting


Stroke 30 mm, size 12 ... 16

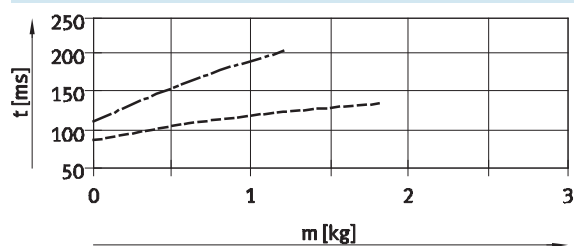


Stroke 30 mm, size 20 ... 25

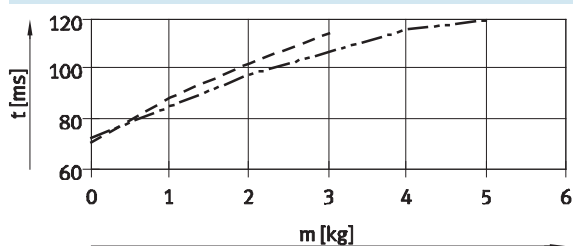


Stroke 30 mm, size 20 ... 25

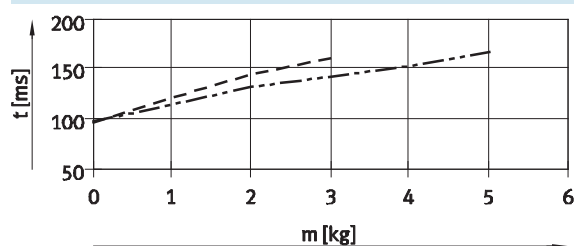


Stroke 50 mm, size 6 ... 12

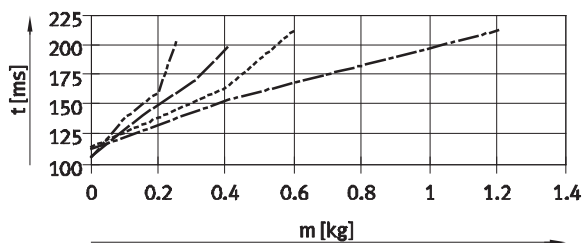


Stroke 50 mm, size 6 ... 12

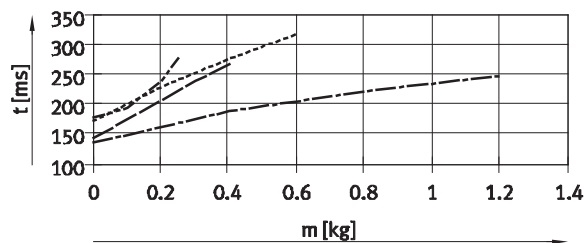

Stroke 50 mm, size 16 ... 25

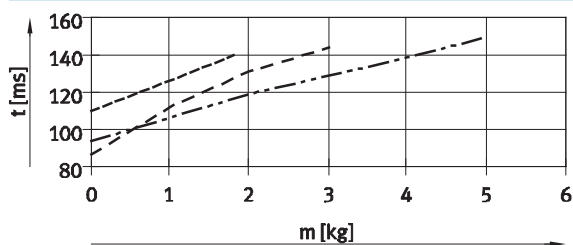

Stroke 50 mm, size 16 ... 25

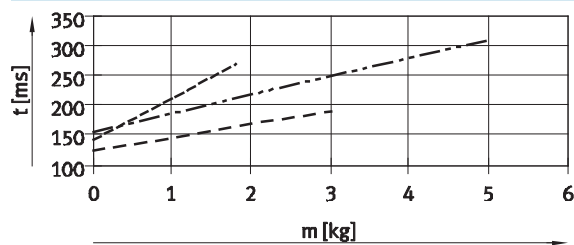

- | | |
|---------------|---------------|
| ----- DGSL-6 | ----- DGSL-16 |
| ----- DGSL-8 | ----- DGSL-20 |
| ----- DGSL-10 | ----- DGSL-25 |
| ----- DGSL-12 | |

Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P1 – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 23


Advancing

Stroke 100 mm, size 10 ... 16

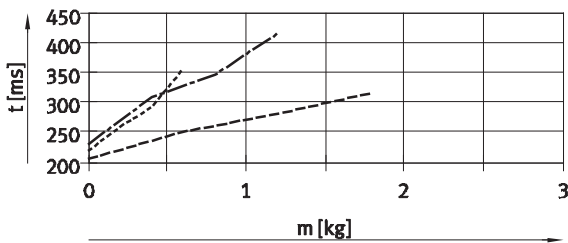


Retracting


Stroke 100 mm, size 10 ... 25

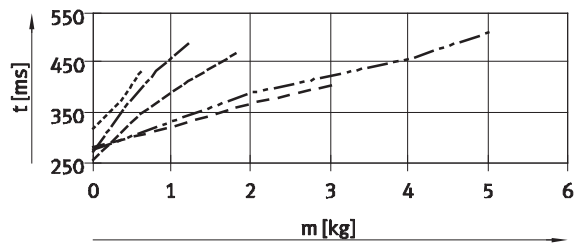


Stroke 100 mm, size 20 ... 25

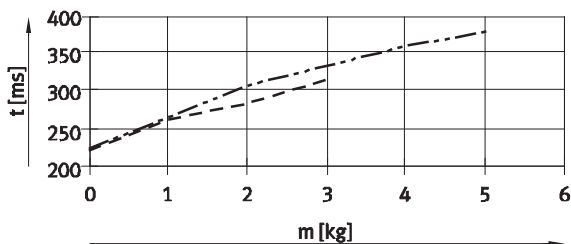

Stroke 150 mm, size 12 ... 25

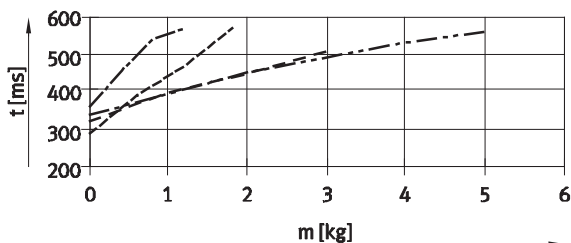

Stroke 150 mm, size 12 ... 25

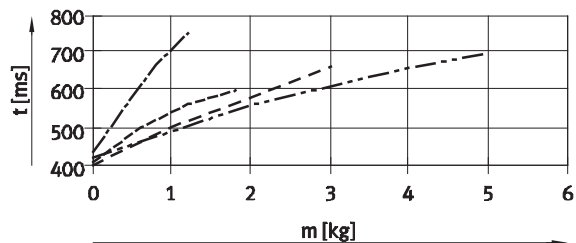

----- DGSL-10
 - - - - - DGSL-12
 - - - - - DGSL-16
 - - - - - DGSL-20
 - - - - - DGSL-25

Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning P1 – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 23


Advancing

Stroke 200 mm, size 20

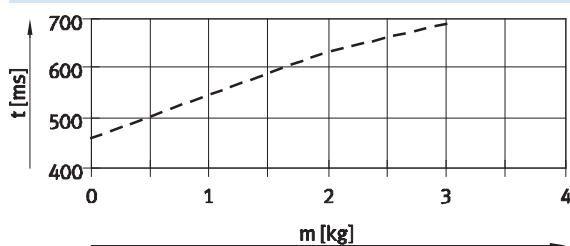


Retracting


Stroke 200 mm, size 20

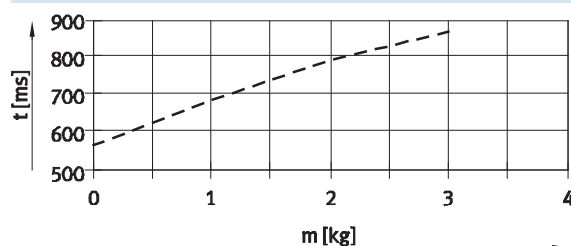

Stroke 200 mm, size 25

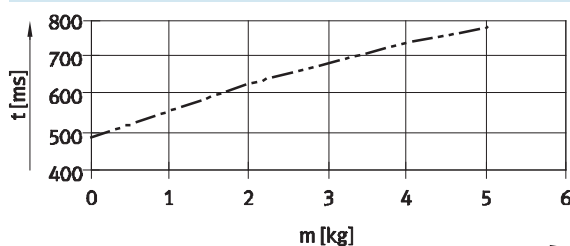

Stroke 200 mm, size 25

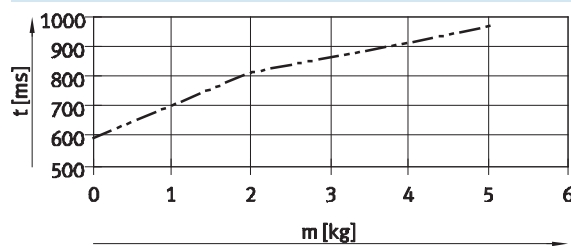

--- DGSL-20
--- DGSL-25

Vertical mounting position

The travel times for a vertical mounting position are calculated by multiplying the data for a horizontal mounting position by a correction factor k_a (advancing) and k_r (retracting), see adjacent table.

Given:

Stroke = 200 mm
Size = 20
Effective load = 2 kg
Ascertained travel time t_h (horizontal), see graph:
– Advancing = 640 ms
– Retracting = 780 ms
Calculated travel time t_v (vertical):
– Advancing: $t_v = t_h \times k_a$
 $t_v = 640 \text{ ms} \times 0.9 = 576 \text{ ms}$
– Retracting: $t_v = t_h \times k_r$
 $t_v = 780 \text{ ms} \times 1.1 = 858 \text{ ms}$

Stroke [mm]	Size	Advancing (k_a) ¹⁾	Retracting (k_r)
10	4, 6, 8, 10	1	1.1
	12, 16, 20, 25	1.1	1.2
30	4, 6, 8, 10	1	1.1
	12, 16, 20, 25	1.1	1.2
50	6, 8, 10, 12	1	1.1
	16, 20, 25	0.9	1.1
100	10, 12, 16, 20, 25	0.95	1.1
150	12, 16, 20, 25	0.95	1.1
200	20, 25	0.9	1.1

1) Downward.


Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning Y3 – horizontal mounting position




The values in the graphs are determined by calculation.
The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 25


Advancing

Stroke 30 mm, size 8 ... 12

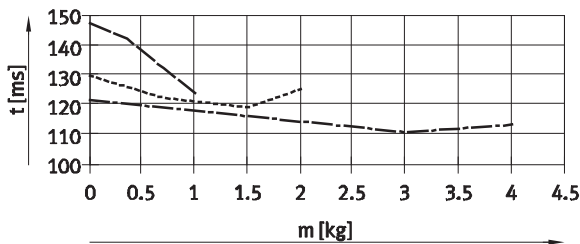


Retracting


Stroke 30 mm, size 8 ... 12

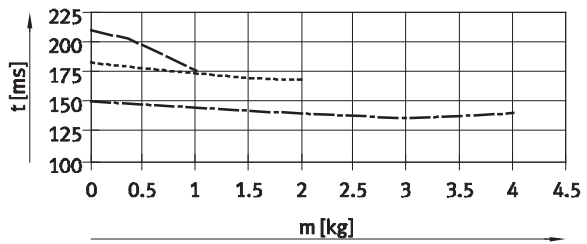


Stroke 30 mm, size 16 ... 25

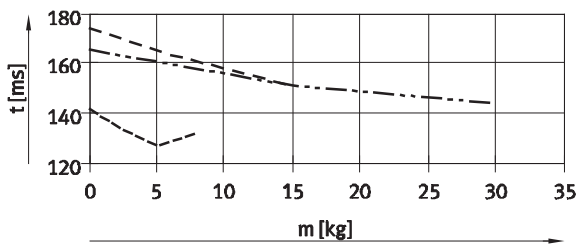


Stroke 30 mm, size 16 ... 25

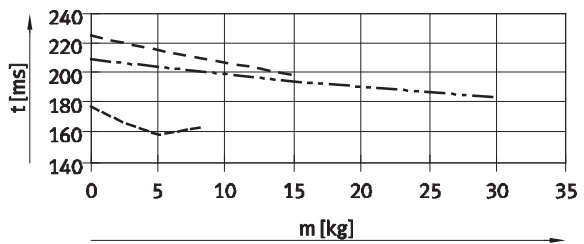


Stroke 50 mm, size 8 ... 12

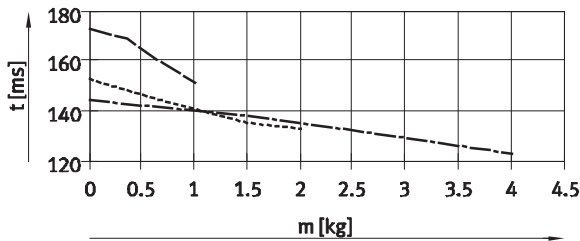


Stroke 50 mm, size 8 ... 12

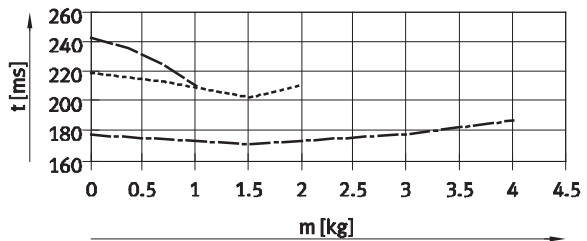

Stroke 50 mm, size 16 ... 25

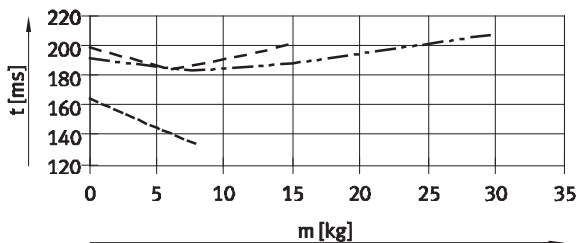

Stroke 50 mm, size 16 ... 25

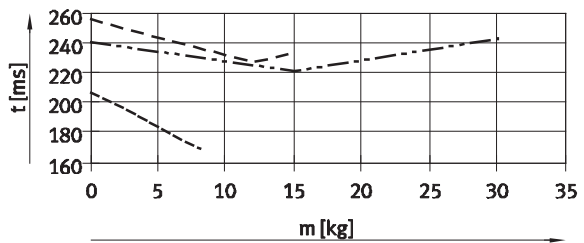

—————	DGSL-8	-----	DGSL-16
- - - - -	DGSL-10	- - - - -	DGSL-20
-	DGSL-12	-	DGSL-25


Mini slides DGSL

Technical data

FESTO

Shock absorber selection

Travel time t as a function of effective load m and cushioning Y3 – horizontal mounting position




The values in the graphs are determined by calculation. The travel time as a function of effective load must not be reduced

below the values shown, because the kinetic impact or residual energy in the end positions can result in damage to the drive.

Vertical mounting position
→ 25


Advancing

Stroke 100 mm, size 10 ... 25

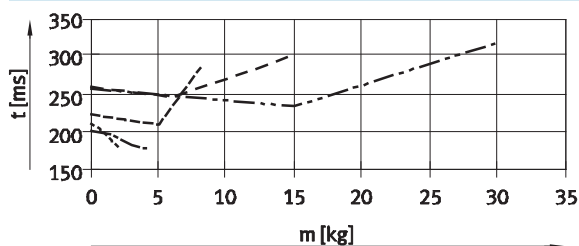


Retracting


Stroke 100 mm, size 10 ... 25

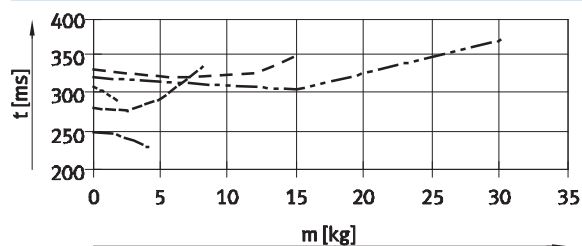


Stroke 150 mm, size 12 ... 25

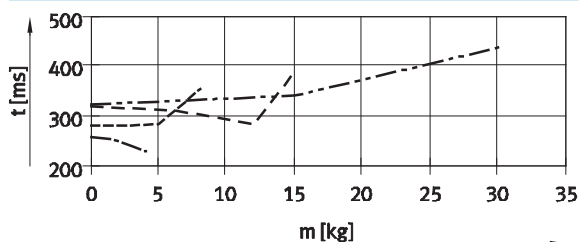


Stroke 150 mm, size 12 ... 25

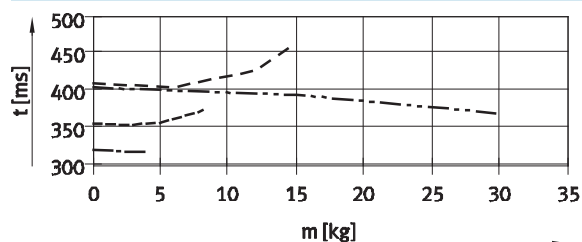

Stroke 200 mm, size 20 ... 25

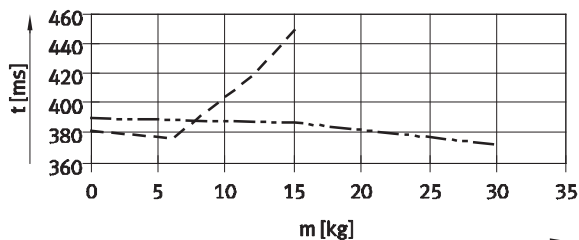

Stroke 200 mm, size 20 ... 25

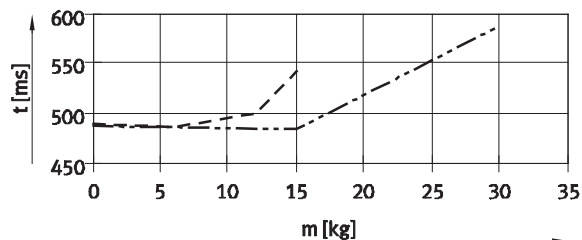

----- DGSL-10
----- DGSL-12
----- DGSL-16
----- DGSL-20
----- DGSL-25

Vertical mounting position

The travel times for a vertical mounting position are calculated by multiplying the data for a horizontal mounting position by a correction factor k_a (advancing) and k_r (retracting), see adjacent table.

Given:

Stroke = 200 mm
Size = 20
Effective load = 10 kg
Ascertained travel time t_h (horizontal), see graph:
– Advancing = 405 ms
– Retracting = 490 ms
Calculated travel time t_v (vertical):
– Advancing: $t_v = t_h \times k_a$
 $t_v = 405 \text{ ms} \times 0.9 = 365 \text{ ms}$
– Retracting: $t_v = t_h \times k_r$
 $t_v = 490 \text{ ms} \times 1.5 = 735 \text{ ms}$

Stroke [mm]	Size	Advancing (k_a) ¹⁾	Retracting (k_r)
30	8, 10, 12	0.95	1.2
	16, 20, 25	0.9	1.5
50	8, 10, 12	0.9	1.5
	16, 20, 25	0.9	1.5
100	10, 12, 16, 20, 25	0.8	1.5
150	12, 16, 20, 25	0.9	1.5
200	20, 25	0.9	1.5

1) Downward.


Mini slides DGSL

Technical data

FESTO

Dynamic characteristic load values


Torques are indicated with reference to the centre of the guide.
These values must not be exceeded during dynamic operation. Special attention must be paid to the cushioning phase.

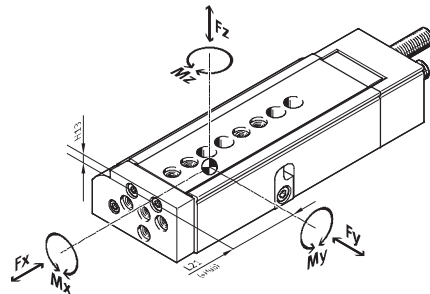

If the drive is simultaneously subjected to several of the indicated forces and torques, the following equation must be satisfied in addition to the indicated maximum loads:


$$\frac{|F_y|}{F_{y_{max}}} + \frac{|F_z|}{F_{z_{max}}} + \frac{|M_x|}{M_{x_{max}}} + \frac{|M_y|}{M_{y_{max}}} + \frac{|M_z|}{M_{z_{max}}} \leq 1$$

Position of the guide centre

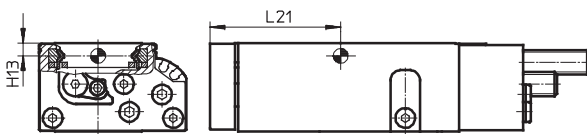

Calculation example

Given:

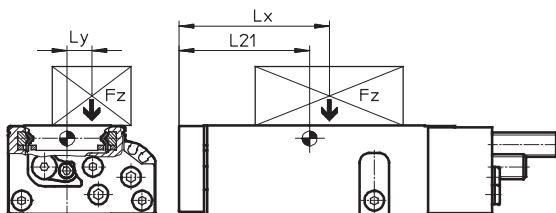

Mini slide = DGSL-10
Stroke length = 80 mm
Lever arm L_x = 50 mm
Lever arm L_y = 30 mm
Load F_z = 0.8 kg
Acceleration a = 0 m/s²

To be calculated:

F_y , F_z , M_x , M_y , M_z
and
verification of operation
with combined load

Solution:

L_{21} = 83 mm from table

F_y = 0 N

F_z = $m \times g$
= 0.8 kg $\times$ 9.81 m/s² = 7.848 N

M_x = $m \times g \times L_y$
= 0.8 kg $\times$ 9.81 m/s² $\times$ 30 mm = 0.236 Nm

M_y = $m \times g \times [(L_{21} + \text{stroke}) - L_x]$
= 0.8 kg $\times$ 9.81 m/s² $\times$ [(83 mm + 80 mm) - 50 mm] = 0.886 Nm

M_z = 0 Nm

Combined load:

$$\frac{|F_y|}{F_{y_{max}}} + \frac{|F_z|}{F_{z_{max}}} + \frac{|M_x|}{M_{x_{max}}} + \frac{|M_y|}{M_{y_{max}}} + \frac{|M_z|}{M_{z_{max}}} = 0 + \frac{7.848\text{N}}{1200\text{N}} + \frac{0.236\text{Nm}}{18\text{Nm}} + \frac{0.886\text{Nm}}{12\text{Nm}} + 0 = 0.094 \leq 1$$

Permissible forces and torques						Geometric characteristics	
Size	Stroke [mm]	F _y max [N]	F _z max [N]	M _x max [Nm]	M _y max, M _z max [Nm]	H13 [mm]	L21 [mm]
4							
	10	343	343	2	2	2.7	31
	20	368	368	2	2		36
	30	387	387	2	2		42
6							
	10	540	540	6	4.5	3.4	37
	20	590	590	7	5		42
	30	631	631	8	5.5		47
	40	677	677	8	5.5		52
	50	719	719	8	5.5		57

Mini slides DGSL

Technical data

FESTO

Permissible forces and torques						Geometric characteristics	
Size	Stroke [mm]	F _y _{max} [N]	F _z _{max} [N]	M _x _{max} [Nm]	M _y _{max} , M _z _{max} [Nm]	H13 [mm]	L21 [mm]
8							
	10	657	657	7	5.5	3.25	41
	20	745	745	8	5.5		46
	30	850	850	9	5.5		51
	40	934	934	10	5.5		56
	50	962	962	10	8		67
	80	971	971	10	8		82
10							
	10	927	927	15	6	4.2	43
	20	1,003	1,003	15	7		46
	30	1,078	1,078	15	8		51
	40	1,152	1,152	15	9		56
	50	1,175	1,175	18	9		61
	80	1,200	1,200	18	12		83
	100	1,250	1,250	18	12		96
12							
	10	942	942	15	8	5.2	44
	20	1,006	1,006	15	9		49
	30	1,075	1,075	15	10		54
	40	1,142	1,142	18	11		59
	50	1,200	1,200	18	12		64
	80	1,280	1,280	20	15		88
	100	1,340	1,340	20	15		98
	150	1,400	1,400	20	15		124
16							
	10	1,769	1,769	35	20	6.4	54
	20	2,021	2,021	35	22		59
	30	2,274	2,274	35	22		64
	40	2,527	2,527	40	25		69
	50	2,780	2,780	40	25		74
	80	2,800	2,800	50	27		89
	100	2,850	2,850	50	43		113
	150	2,900	2,900	50	43		138
20							
	10	2,911	2,911	60	30	7.55	56
	20	3,143	3,143	60	30		61
	30	3,354	3,354	60	30		66
	40	3,612	3,612	60	40		71
	50	3,816	3,816	70	50		76
	80	4,032	4,032	80	50		91
	100	4,200	4,200	85	80		121
	150	4,400	4,400	90	80		152
	200	4,600	4,600	90	80		177
25							
	10	3,270	3,270	100	60	8.55	64
	20	3,744	3,744	100	60		69
	30	4,205	4,205	100	60		74
	40	4,643	4,643	110	60		79
	50	4,650	4,650	120	60		84
	80	4,700	4,700	130	80		112
	100	4,750	4,750	130	80		129
	150	4,800	4,800	130	80		154
	200	4,800	4,800	130	80		179

Mini slides DGSL


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Size 4 ... 10

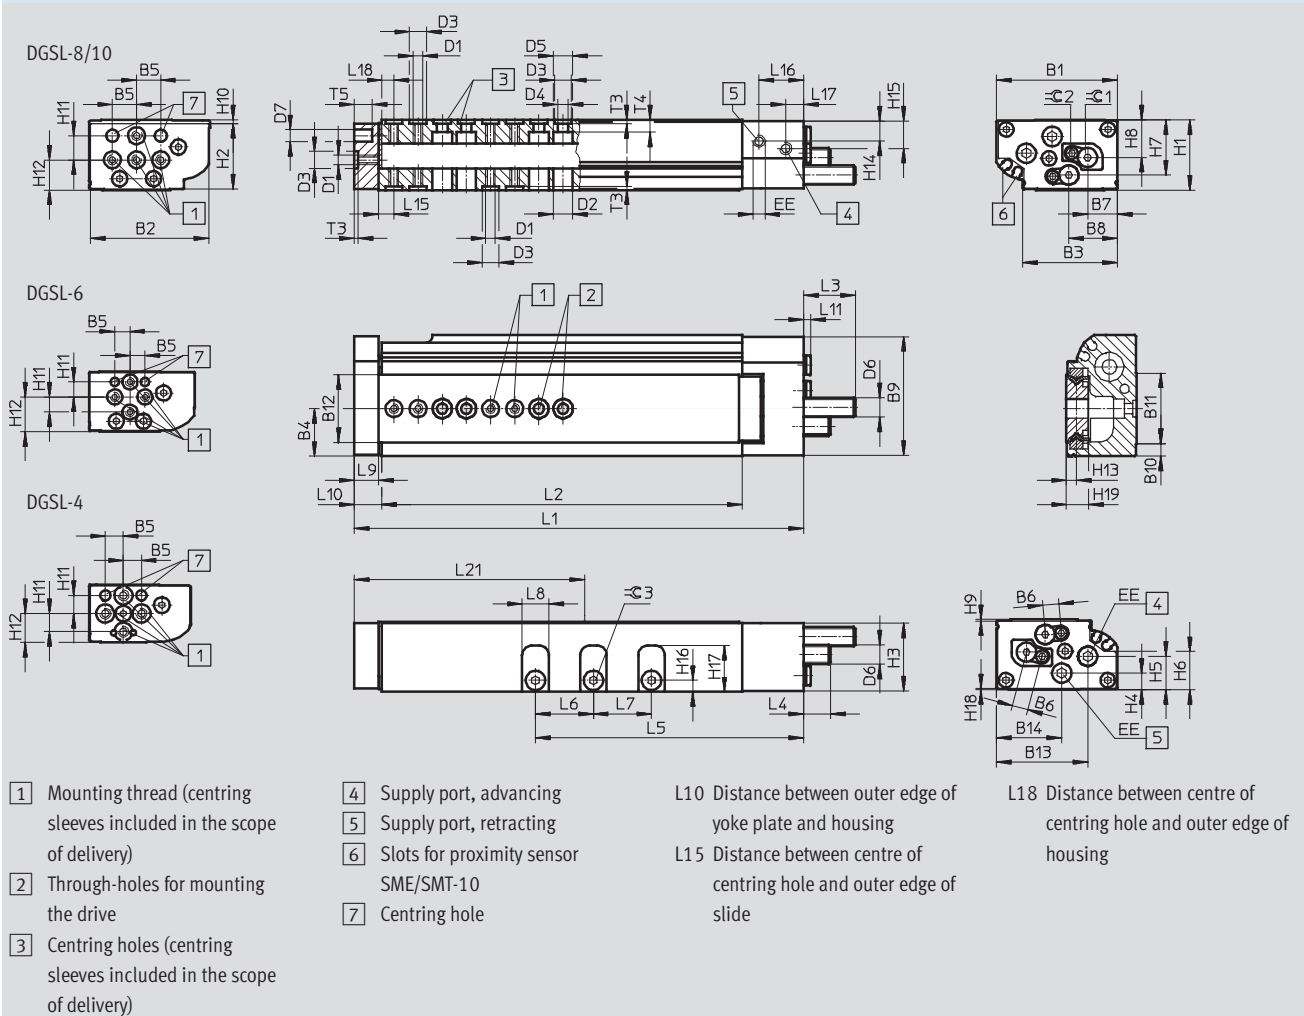

General dimensions

Size	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	D1
4	28	27.4	18.1	9.4	5	3.55	6.3	11.95	27.5	2	17.2	12.4	23.15	16.15	M3
6	35	34.5	26	13.5	5	5	8.2	13.5	34.5	3.5	19.9	20	28.1	18.9	M3
8	42	41.3	31.2	16.6	10	6	10.3	16.25	41.5	4.5	24	24.1	33	24.4	M4
10	50	49	39.2	19.65	10	6.8	12.35	20.1	49	5	29.2	28	37.7	27	M4

Size	D2 Ø	D3 Ø	D4 Ø	D5 Ø	D6	D7 Ø	EE	H1 ±0.08	H2	H3	H4	H5	H6	H7	H8
4	6.2	5 ^{H7}	3.3	6	M4x0.5	3 ^{H7}	M3	16	15.4	15.1	3.85	6.3	8.6	8.4	8.1
6	6.2	5 ^{H7}	3.3	6	M5x0.5	3 ^{H7}	M3	20	19	19.25	4.7	7.8	10.2	16	10.55
8	8	7 ^{H7}	4.3	8	M6x0.5	5 ^{H7}	M3	24	22.7	23	6.5	10.6	14	18.9	13.3
10	8	7 ^{H7}	4.3	8	M8x1	5 ^{H7}	M5	29	27.1	28	6.8	13.8	15.8	22.8	15.5

Size	H9	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19	T3 +0.1	T4	T5	≈C 2 ¹⁾	≈C 3
4	0.65	0.3	5	8	2.7	5.35	5.85	3	10.6	0.25	5.3	1.3	2.3	4	1.3	2
6	0.5	0.5	5	11.5	3.4	6.5	7.2	3.7	13.1	0.27	6.5	1.3	3.3	6	1.5	2.5
8	0.6	0.9	10	8.7	3.25	7.8	10.5	4.1	16.8	0.35	6.6	1.6	3.8	7.5	2	2.5
10	0.6	1.4	10	12.5	4.2	8.75	11.75	4.8	19.25	0.4	9	1.6	5	7.5	2.5	3

1) With size 4, the scope of delivery of the drive includes an Allen key

Mini slides DGSL

Technical data

FESTO

Stroke-dependent dimensions															
Size	Stroke	L1	L2	L5	L6	L7	L8	L9	L10	L11	L15 ±0.05	L16	L17	L18 ±0.05	L21
4	10	72.1	48	36.35	–	–	6.5	5.5	6.6	2.5	4	13.25	4.25	3	31
	20	81.2	57.1	37.95	10										36
	30	91.2	67.1	47.95	11										42
6	10	81.1	54	33.1	–	–	8	8	9.6	2.5	5.1	13.25	4.25	3.5	37
	20	91.1	64	43.1	14										42
	30	101.1	74	53.1											47
	40	111.1	84	63.1											52
	50	121.1	94	73.1											57
8	10	90.2	59.6	34.6	–	–	8	10	11.6	2.5	7	14.65	4.35	5.5	41
	20	100.2	69.6	44.6	10										46
	30	110.2	79.6	54.6	16										51
	40	120.2	89.6	64.6											56
	50	142.2	111.6	74.6											67
	80	172.2	141.6	104.6											16
10	10	103.1	66	41.3	–	–	11	10	11.6	2.5	6.4	18.5	7	5	43
	20	112.8	75.7	51	46										
	30	122.8	85.7	61	51										
	40	132.8	95.7	71	56										
	50	142.8	105.7	81	61										
	80	186.2	149.1	111	24										83
	100	206.2	169.1	131	24										24

Cushioning-dependent dimensions					
Size	Cushioning	L3 max.	L4 max.	≈ 1	
				For adjusting the cushioning stroke	For adjusting the end position
4	P	15.2	7.8	–	1.3
	E	5.7	0	–	1.3
	P1	14	6	1.3	2.5
6	P	17.6	8.1	–	1.5
	E	6.6	0	–	1.5
	P1	15.5	5.8	1.5	3
8	P	21.1	10.7	–	2
	E	6.6	0	–	2
	P1	19	9.1	2	4
	Y3	24.3	23.9	–	2
10	P	22.8	12.5	–	2.5
	E	8.8	0	–	2.5
	P1	20.5	10.2	2.5	5
	Y3	25.5	14.9	–	2.5
	Y11	30.4	19.9	–	2


Mini slides DGSL

Technical data


FESTO

Hole pattern for mounting threads and centring holes


DGSL-4-10




DGSL-4-20




DGSL-4-30




DGSL-6-10




DGSL-6-20




DGSL-6-30




DGSL-6-40/50

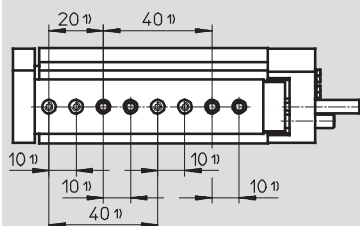


DGSL-8-10



DGSL-8-20



DGSL-8-30

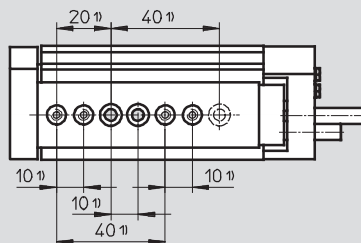


Mini slides DGSL

Technical data


FESTO

Hole pattern for mounting threads and centring holes


DGSL-8-40

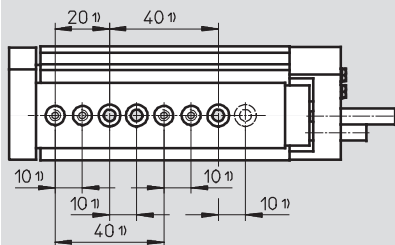


DGSL-8-50/80

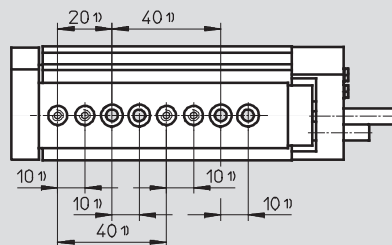


DGSL-10-10




DGSL-10-20

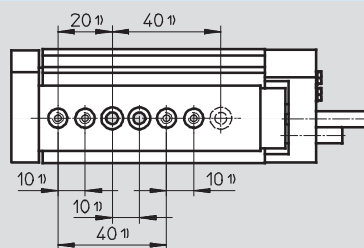

DGSL-10-30

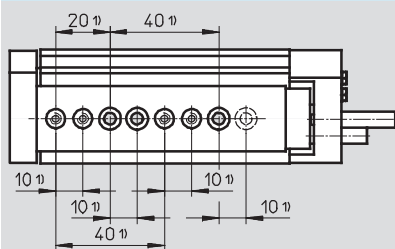


DGSL-10-40 ... 100

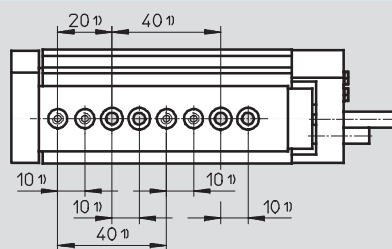

Distances from yoke plate to mounting threads and centring holes

DGSL-4 ... 10

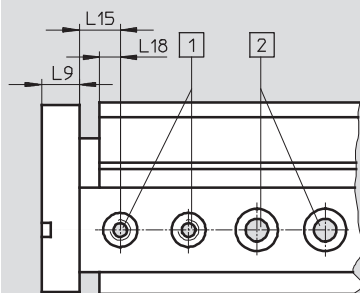

- 1 Centring holes with thread
- 2 Through-holes for mounting the drive

- 1) Tolerance for centring hole ± 0.02
- Tolerance for through-hole ± 0.1

Size	L9	L15 ± 0.05	L18
4	5.5	4	3
6	8	5.1	3.5
8	10	7	5.5
10	10	6.4	5

Mini slides DGSL


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Size 12/16

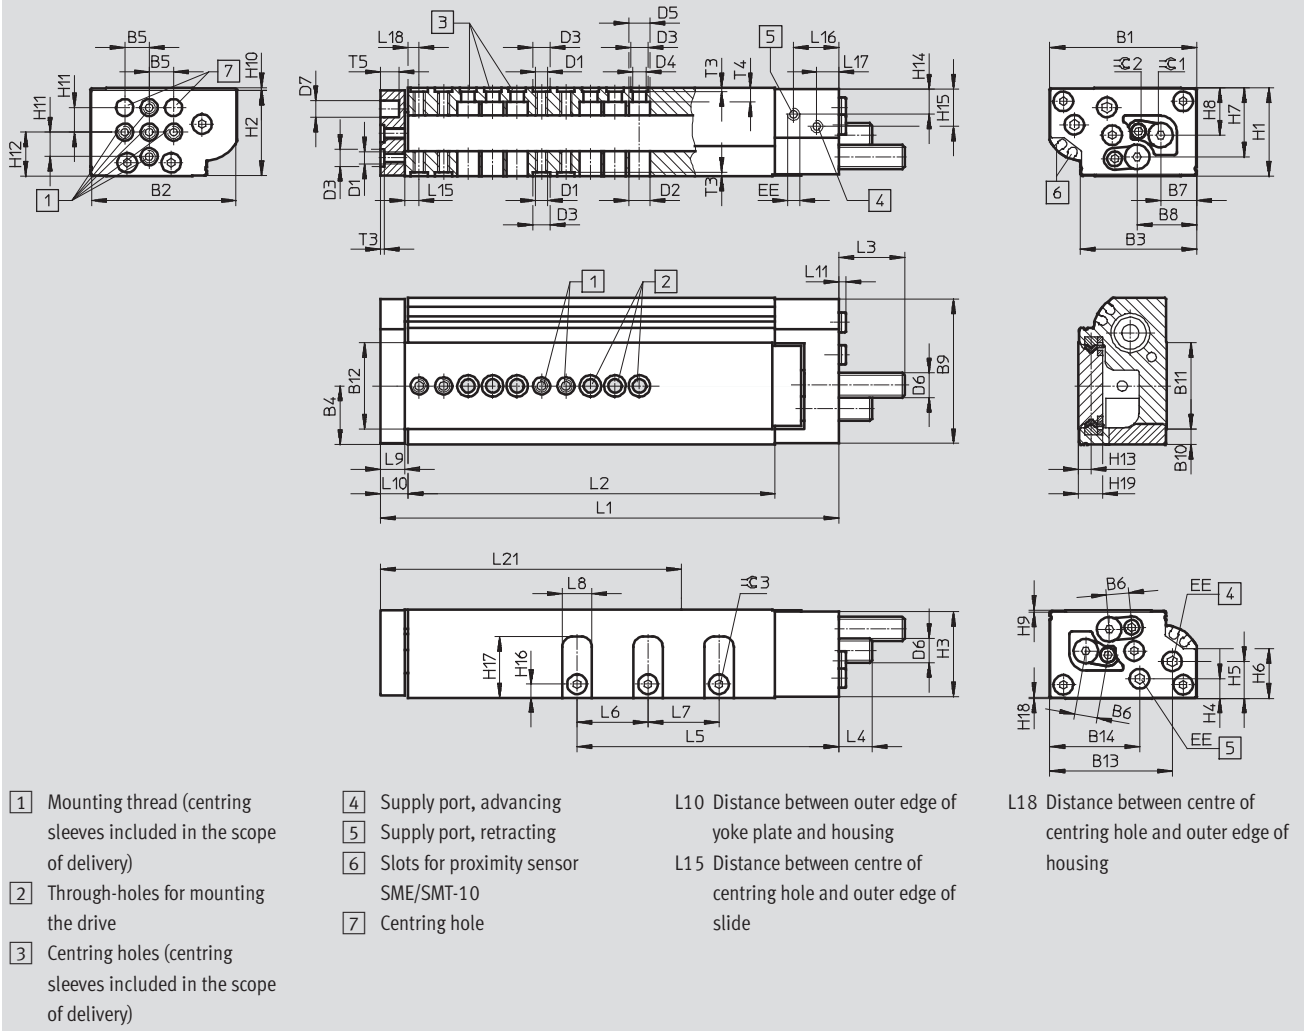

General dimensions															
Size	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	D1
12	60	59	47.6	24	10	9.2	14.7	24.3	59	6.4	35.35	35.2	50	36.7	M5
16	66	65	53.5	26.7	10	11.1	16.7	27.5	65	7.75	37.9	38	50.4	36.7	M5

Size	D2 Ø	D3 Ø	D4 Ø	D5 Ø	D6	D7 Ø	EE	H1 ±0.08	H2	H3	H4	H5	H6	H7	H8
12	8.8	7 ^{H7}	5.5	8.8	M10x1	8 ^{H7}	M5	36	34.8	34.7	8	15.1	20.35	28.2	19.3
16	8.8	7 ^{H7}	5.5	9.2	M12x1	8 ^{H7}	M5	40	38	39	8.5	16.7	20.6	31.7	20.8

Size	H9	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19	T3 +0.1	T4	T5	∅ 2	∅ 3
12	0.8	0.95	10	17.9	5.2	10.75	15.75	5.5	24.9	0.5	10	1.6	5.6	7.5	3	3
16	0.5	1.5	10	20	6.4	10.5	16.7	7	26.6	0.5	12.4	1.6	6.1	9	4	4

Mini slides DGSL

Technical data

FESTO

Stroke-dependent dimensions															
Size	Stroke	L1	L2	L5	L6	L7	L8	L9	L10	L11	L15 ±0.05	L16	L17	L18 ±0.05	L21
12	10	106.2	68.6	42.4	–	–	12	10	11.6	2.5	5.8	18.5	7.5	4.5	44
	20	116.2	78.6	52.4											49
	30	126.2	88.6	62.4											54
	40	136.2	98.6	72.4											59
	50	146.2	108.6	82.4											64
	80	197.6	160	112.4	29	–	14	12	13.6	2.5	6.8	21	7	5.5	88
	100	217.6	180	132.4											98
	150	267.6	230	182.4											124
16	10	124.1	82.5	45	–	–	14	12	13.6	2.5	6.8	21	7	5.5	54
	20	134.6	93	54.6											59
	30	144.6	103	64.6											64
	40	154.6	113	74.6											69
	50	164.6	123	84.6											74
	80	194.6	153	114.6	35	–	14	12	13.6	2.5	6.8	21	7	5.5	89
	100	243.6	202	134.6											113
	150	293.6	252	184.6											138

Cushioning-dependent dimensions					
Size	Cushioning	L3 max.	L4 max.	≈ 1	
				For adjusting the cushioning stroke	For adjusting the end position
12	P	28.1	14.9	–	3
	E	8.8	0	–	3
	P1	26	12.8	3	6
	Y3	36.9	23.7	–	3
	Y11	42.2	18.7	–	2.5
16	P	42.3	26.1	–	4
	E	8.8	0	–	4
	P1	40	23.8	4	8
	Y3	51.9	35.7	–	4
	Y11	55.4	38.9	–	3


Mini slides DGSL

Technical data


FESTO

Hole pattern for mounting threads and centring holes


DGSL-12-10




DGSL-12-20




DGSL-12-30




DGSL-12-40




DGSL-12-50 ... 100




DGSL-12-150

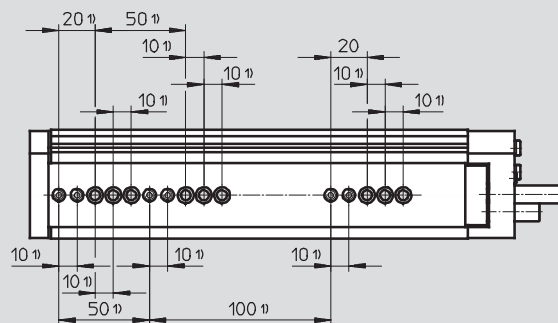

DGSL-16-10



DGSL-16-20




Mini slides DGSL

Technical data


FESTO

Hole pattern for mounting threads and centring holes


DGSL-16-30



DGSL-16-40 ... 100




DGSL-16-150

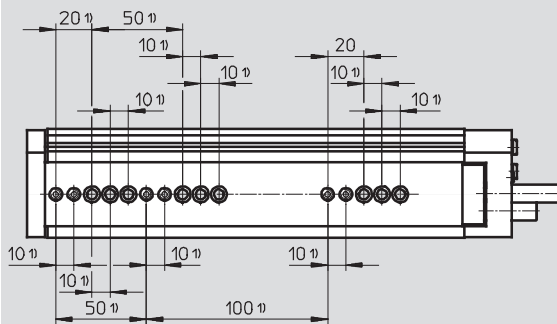

Distances from yoke plate to mounting threads and centring holes

DGSL-12/16

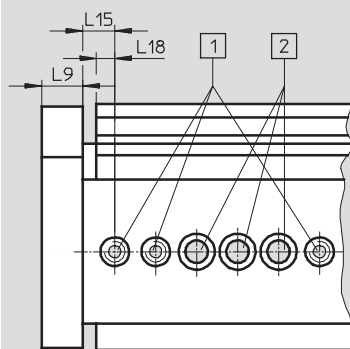

- 1 Centring holes with thread
- 2 Through-holes for mounting the drive

- 1) Tolerance for centring hole ± 0.02
- Tolerance for through-hole ± 0.1

Size	L9	L15 ± 0.05	L18
12	10	5.8	4.5
16	12	6.8	5.5

Mini slides DGSL


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Size 20/25

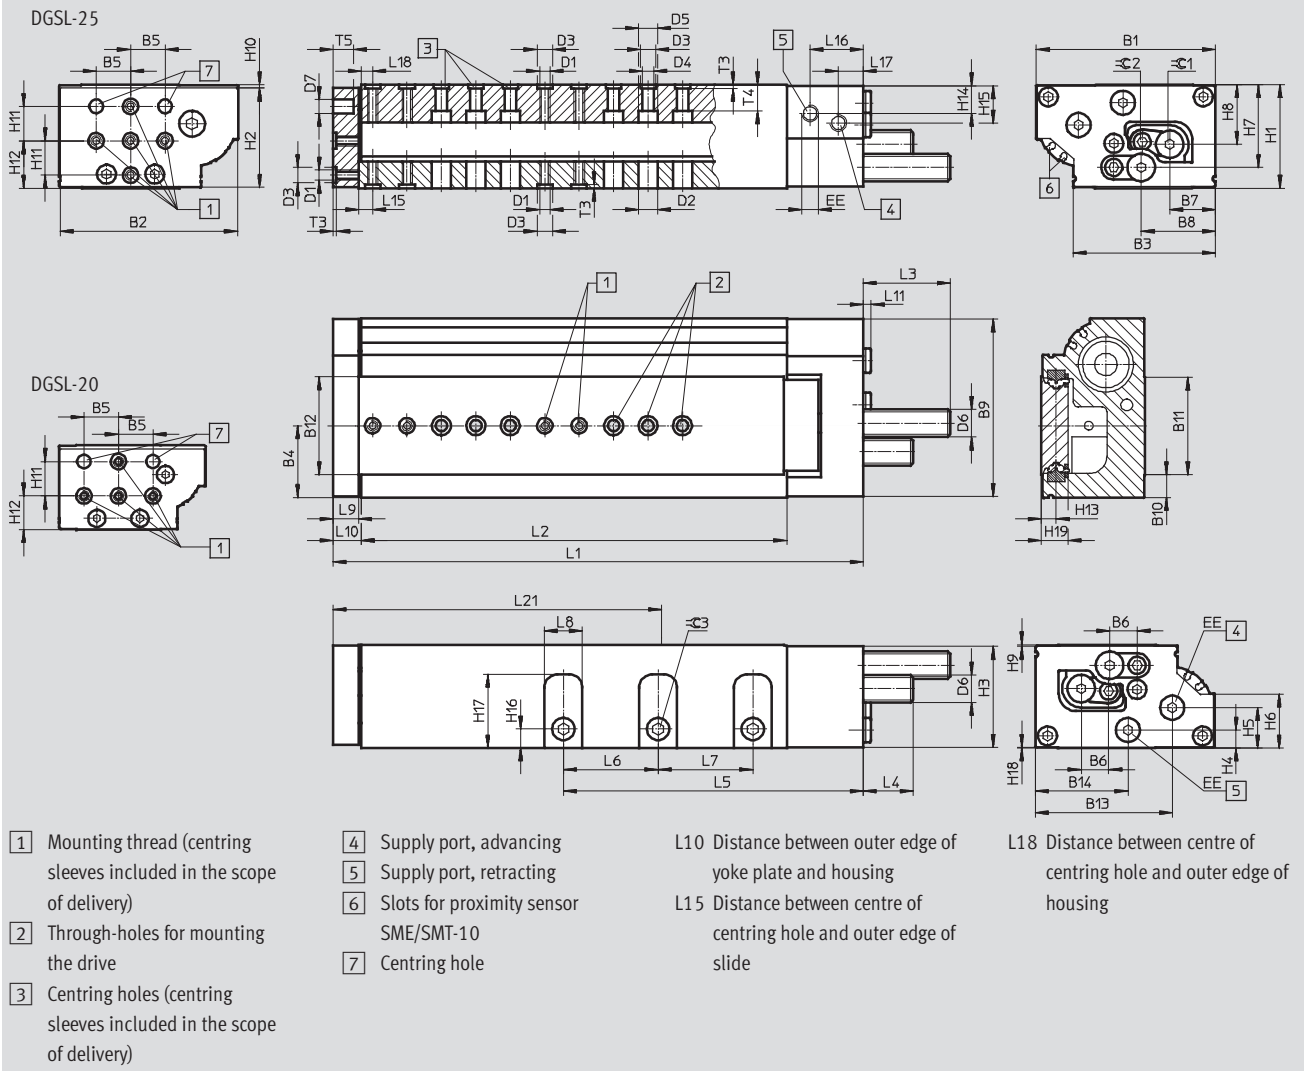

General dimensions

Size	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	D1
20	85	84	68.85	34.5	20	14	21.4	36.35	83.4	10	48.9	49.2	64.1	48.6	M6
25	104	103	82.6	41.6	20	16.2	26.4	43.1	103	13.25	56.5	56.7	79.4	53.7	M6

Size	D2 Ø	D3 Ø	D4 Ø	D5 Ø	D6	D7 Ø	EE	H1 ±0.08	H2	H3	H4	H5	H6	H7	H8
20	11	9 ^{H7}	6.6	11	M14x1	8 ^{H7}	G ¹ / ₈	49	46.5	47.7	10.3	20.6	23.2	38.2	26.1
25	11	9 ^{H7}	6.6	11	M16x1	8 ^{H7}	G ¹ / ₈	60	57.5	58.5	10.5	23.4	31.2	48	34.5

Size	H9	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19	T3 +0.1	T4	T5	≈ 2	≈ 3
20	0.5	2	20	19.6	7.55	14.7	14.7	10	33.3	0.8	14.5	2.1	8.8	10	4	5
25	1	2	20	27.5	8.55	16.6	22.2	11	42.7	0.5	15.5	2.1	15.1	12	5	6

Mini slides DGSL

Technical data

FESTO

Stroke-dependent dimensions															
Size	Stroke	L1	L2	L5	L6	L7	L8	L9	L10	L11	L15 ±0.05	L16	L17	L18 ±0.05	L21
20	10	141.2	84.6	59.1	–	–	17	14	15.6	4.6	7.8	29.3	10.5	6.5	56
	20	151.2	94.6	69.1											61
	30	161.2	104.6	79.1											66
	40	171.2	114.6	89.1											71
	50	183.2	126.6	99.1											76
	80	211.2	154.6	129.1											91
	100	270.2	213.6	149.1	44	44									121
	150	333.2	276.6	199.1											152
	200	383.2	326.6	252.1											177
25	10	157.1	96	63.7	–	–	22	15	16.6	4.6	8	30.9	12.2	6.5	64
	20	167.1	106	72.2											69
	30	177.1	116	82.2											74
	40	187.1	126	92.2											79
	50	197.1	136	102.2											84
	80	253.1	192	132.2	55	112									
	100	286.1	225	152.2		129									
	150	338.1	277	202.2		154									
	200	388.1	327	254.2		179									

Cushioning-dependent dimensions					
Size	Cushioning	L3 max.	L4 max.	≈ 1	
				For adjusting the cushioning stroke	For adjusting the end position
20	P	52.4	31.2	–	4
	E	8.8	0	–	4
	P1	50.1	28.9	4	8
	Y3	55.5	34.3	–	4
	Y11	67.4	45.9	–	4
25	P	51.9	30.5	–	5
	E	8.8	0	–	5
	P1	49.6	28.2	5	10
	Y3	65.2	43.8	–	5
	Y11	78.4	56.9	–	4


Mini slides DGSL

Technical data


FESTO

Hole pattern for mounting threads and centring holes


DGSL-20-10/20




DGSL-20-30/40




DGSL-20-50




DGSL-20-80

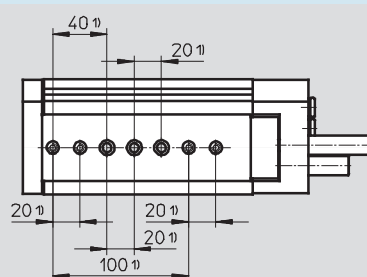


DGSL-20-100 ... 200

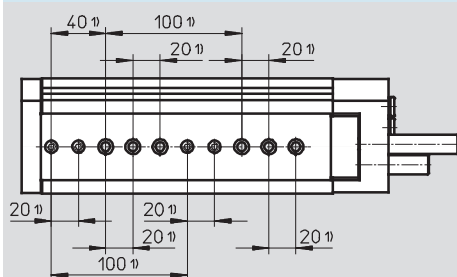

DGSL-25-10



DGSL-25-20




Mini slides DGSL

Technical data


FESTO

Hole pattern for mounting threads and centring holes


DGSL-25-30/40




DGSL-25-50

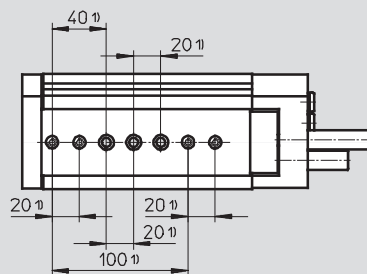

DGSL-25-80

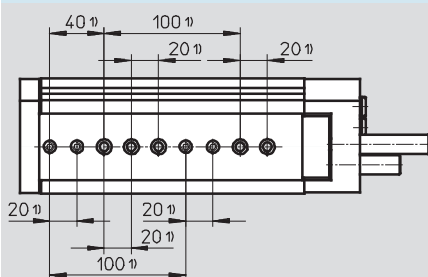


DGSL-25-100 ... 200

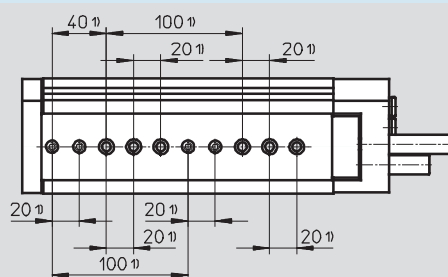

Distances from yoke plate to mounting threads and centring holes

DGSL-20/25

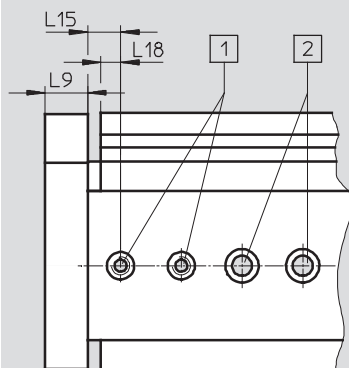

- 1 Centring holes with thread
- 2 Through-holes for mounting the drive

- 1) Tolerance for centring hole ± 0.02
- Tolerance for through-hole ± 0.1

Size	L9	L15 ± 0.05	L18
20	14	7.8	6.5
25	15	8	6.5


Mini slides DGSL-C/-E3

Technical data


FESTO

Function

C – Clamping unit



E3 – End-position locking



Size
6 ... 25

Wearing parts kits
→ 45



Note

Additional measures are required for use in safety-related applications; in Europe, for example, the standards listed under the EC Machinery Directive must be observed.

Without additional measures in accordance with statutory minimum requirements, the product is not suitable for use in safety-related sections of control systems.

General technical data – Clamping unit							
Size	6	8	10	12	16	20	25
Function	– Mechanical clamping – For fixing the slide in any position – Frictional locking						
Clamping type with effective direction	At both ends Clamping via spring force, released via air pressure						
Pneumatic connection	M5						
Mounting position	Any						
Static holding force [N]	80	80	180	180	350	350	600
Product weight [g]	10	10	15	15	50	50	50

Operating and environmental conditions – Clamping unit	
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Min. release pressure [bar]	3
Max. operating pressure [bar]	≤ 10

General technical data – End-position locking							
Size	6	8	10	12	16	20	25
Function	– Mechanical locking when the end position is reached – For fixing the slide in the unpressurised, retracted state – Positive locking						
Clamping type with effective direction	At both ends Clamping via spring force, air pressure to unlock						
Pneumatic connection	M5						
Mounting position	Any						
Static holding force [N]	60	60	160	160	250	380	640
Product weight [g]	13	13	26	26	64	64	65

Operating and environmental conditions – End-position locking	
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Operating pressure [bar]	3 ... 8

Mini slides DGSL-C/-E3


Technical data

FESTO

Adjustable end-position range

When using end-position locking (E3), the adjustable range of the retracted end position is reduced by the following values.

1 Adjustable end-position range

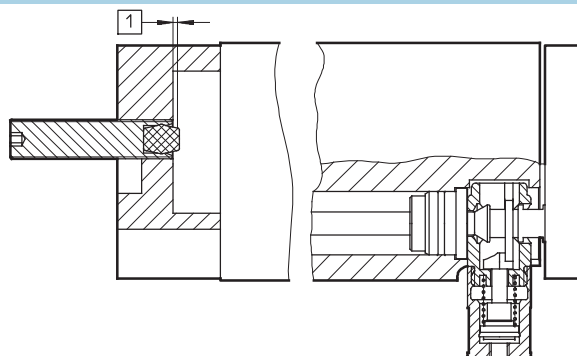


Size	1
6, 8	max. 1.5 mm
10, 12	max. 2.3 mm
16, 20, 25	max. 2.7 mm

Dimensions

Download CAD Data → www.festo.com/us/cad

C – Clamping unit/E3 – End-position locking

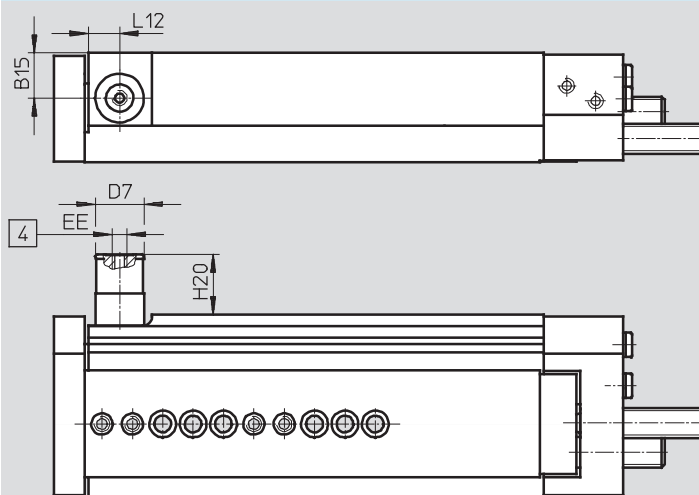

4 Supply port

Size	B15	D7 Ø	EE	H20		L12
				C	E3	
6	7.2	12	M5	10.7	21.2	7.3
8	9.9	12		10.5	21	7.3
10	11.2	16		11.8	21.2	10.5
12	14.8	16		10.5	19.9	10.3
16	14	20		27.5	30.5	13
20	17	20		21.3	24.3	14
25	22.55	20		17.75	20.65	14

Mini slides DGSL

Technical data

FESTO

Ordering data							
Size	Stroke [mm]	Part No.	Type	Size	Stroke [mm]	Part No.	Type
With cushioning P				With cushioning E			
4	10	543910	DGSL-4-10-PA	4	10	570158	DGSL-4-10-EA
	20	543911	DGSL-4-20-PA		20	570159	DGSL-4-20-EA
	30	543912	DGSL-4-30-PA		30	570160	DGSL-4-30-EA
6	10	543916	DGSL-6-10-PA	6	10	570161	DGSL-6-10-EA
	20	543917	DGSL-6-20-PA		20	570162	DGSL-6-20-EA
	30	543918	DGSL-6-30-PA		30	570163	DGSL-6-30-EA
	40	543919	DGSL-6-40-PA		40	570164	DGSL-6-40-EA
	50	543920	DGSL-6-50-PA		50	570165	DGSL-6-50-EA
8	10	543926	DGSL-8-10-PA	8	10	570166	DGSL-8-10-EA
	20	543927	DGSL-8-20-PA		20	570167	DGSL-8-20-EA
	30	543928	DGSL-8-30-PA		30	570168	DGSL-8-30-EA
	40	543929	DGSL-8-40-PA		40	570169	DGSL-8-40-EA
	50	543930	DGSL-8-50-PA		50	570170	DGSL-8-50-EA
	80	543931	DGSL-8-80-PA		80	570171	DGSL-8-80-EA
10	10	543942	DGSL-10-10-PA	10	10	570172	DGSL-10-10-EA
	20	543943	DGSL-10-20-PA		20	570173	DGSL-10-20-EA
	30	543944	DGSL-10-30-PA		30	570174	DGSL-10-30-EA
	40	543945	DGSL-10-40-PA		40	570175	DGSL-10-40-EA
	50	543946	DGSL-10-50-PA		50	570176	DGSL-10-50-EA
	80	543947	DGSL-10-80-PA		80	570177	DGSL-10-80-EA
	100	543948	DGSL-10-100-PA		100	570178	DGSL-10-100-EA
12	10	543961	DGSL-12-10-PA	12	10	570179	DGSL-12-10-EA
	20	543962	DGSL-12-20-PA		20	570180	DGSL-12-20-EA
	30	543963	DGSL-12-30-PA		30	570181	DGSL-12-30-EA
	40	543964	DGSL-12-40-PA		40	570182	DGSL-12-40-EA
	50	543965	DGSL-12-50-PA		50	570183	DGSL-12-50-EA
	80	543966	DGSL-12-80-PA		80	570184	DGSL-12-80-EA
	100	543967	DGSL-12-100-PA		100	570185	DGSL-12-100-EA
16	10	543983	DGSL-16-10-PA	16	10	570187	DGSL-16-10-EA
	20	543984	DGSL-16-20-PA		20	570188	DGSL-16-20-EA
	30	543985	DGSL-16-30-PA		30	570189	DGSL-16-30-EA
	40	543986	DGSL-16-40-PA		40	570190	DGSL-16-40-EA
	50	543987	DGSL-16-50-PA		50	570191	DGSL-16-50-EA
	80	543988	DGSL-16-80-PA		80	570192	DGSL-16-80-EA
	100	543989	DGSL-16-100-PA		100	570193	DGSL-16-100-EA
20	10	543990	DGSL-16-150-PA	16	150	570186	DGSL-12-150-EA
	10	544005	DGSL-20-10-PA		10	570187	DGSL-16-10-EA
	20	544006	DGSL-20-20-PA		20	570188	DGSL-16-20-EA
	30	544007	DGSL-20-30-PA		30	570189	DGSL-16-30-EA
	40	544008	DGSL-20-40-PA		40	570190	DGSL-16-40-EA
	50	544009	DGSL-20-50-PA		50	570191	DGSL-16-50-EA
	80	544010	DGSL-20-80-PA		80	570192	DGSL-16-80-EA
25	100	544011	DGSL-20-100-PA	20	100	570193	DGSL-16-100-EA
	150	544012	DGSL-20-150-PA		150	570194	DGSL-16-150-EA
	200	544013	DGSL-20-200-PA		10	570195	DGSL-20-10-EA
	10	544030	DGSL-25-10-PA		20	570196	DGSL-20-20-EA
	20	544031	DGSL-25-20-PA		30	570197	DGSL-20-30-EA
	30	544032	DGSL-25-30-PA		40	570198	DGSL-20-40-EA
	40	544033	DGSL-25-40-PA		50	570199	DGSL-20-50-EA
	50	544034	DGSL-25-50-PA		80	570200	DGSL-20-80-EA
	80	544035	DGSL-25-80-PA		100	570201	DGSL-20-100-EA
	100	544036	DGSL-25-100-PA		150	570202	DGSL-20-150-EA
	150	544037	DGSL-25-150-PA		200	570203	DGSL-20-200-EA
	200	544038	DGSL-25-200-PA	25	10	570204	DGSL-25-10-EA
					20	570205	DGSL-25-20-EA
					30	570206	DGSL-25-30-EA
					40	570207	DGSL-25-40-EA
					50	570208	DGSL-25-50-EA
					80	570209	DGSL-25-80-EA
					100	570210	DGSL-25-100-EA
					150	570211	DGSL-25-150-EA
					200	570212	DGSL-25-200-EA

Mini slides DGSL

Technical data

FESTO

Ordering data							
Size	Stroke [mm]	Part No.	Type	Size	Stroke [mm]	Part No.	Type
With cushioning P1				With cushioning Y3			
4	10	543913	DGSL-4-10-P1A	4	10	–	
	20	543914	DGSL-4-20-P1A		20	–	
	30	543915	DGSL-4-30-P1A		30	–	
6	10	543921	DGSL-6-10-P1A	6	10	–	
	20	543922	DGSL-6-20-P1A		20	–	
	30	543923	DGSL-6-30-P1A		30	–	
	40	543924	DGSL-6-40-P1A		40	–	
	50	543925	DGSL-6-50-P1A		50	–	
8	10	543932	DGSL-8-10-P1A	8	10	–	
	20	543933	DGSL-8-20-P1A		20	–	
	30	543934	DGSL-8-30-P1A		30	543938	DGSL-8-30-Y3A
	40	543935	DGSL-8-40-P1A		40	543939	DGSL-8-40-Y3A
	50	543936	DGSL-8-50-P1A		50	543940	DGSL-8-50-Y3A
	80	543937	DGSL-8-80-P1A		80	543941	DGSL-8-80-Y3A
10	10	543949	DGSL-10-10-P1A	10	10	–	
	20	543950	DGSL-10-20-P1A		20	–	
	30	543951	DGSL-10-30-P1A		30	543956	DGSL-10-30-Y3A
	40	543952	DGSL-10-40-P1A		40	543957	DGSL-10-40-Y3A
	50	543953	DGSL-10-50-P1A		50	543958	DGSL-10-50-Y3A
	80	543954	DGSL-10-80-P1A		80	543959	DGSL-10-80-Y3A
	100	543955	DGSL-10-100-P1A		100	543960	DGSL-10-100-Y3A
12	10	543969	DGSL-12-10-P1A	12	10	–	
	20	543970	DGSL-12-20-P1A		20	–	
	30	543971	DGSL-12-30-P1A		30	543977	DGSL-12-30-Y3A
	40	543972	DGSL-12-40-P1A		40	543978	DGSL-12-40-Y3A
	50	543973	DGSL-12-50-P1A		50	543979	DGSL-12-50-Y3A
	80	543974	DGSL-12-80-P1A		80	543980	DGSL-12-80-Y3A
	100	543975	DGSL-12-100-P1A		100	543981	DGSL-12-100-Y3A
16	10	543991	DGSL-16-10-P1A	16	10	–	
	20	543992	DGSL-16-20-P1A		20	–	
	30	543993	DGSL-16-30-P1A		30	543999	DGSL-16-30-Y3A
	40	543994	DGSL-16-40-P1A		40	544000	DGSL-16-40-Y3A
	50	543995	DGSL-16-50-P1A		50	544001	DGSL-16-50-Y3A
	80	543996	DGSL-16-80-P1A		80	544002	DGSL-16-80-Y3A
	100	543997	DGSL-16-100-P1A		100	544003	DGSL-16-100-Y3A
20	10	544014	DGSL-20-10-P1A	20	10	–	
	20	544015	DGSL-20-20-P1A		20	–	
	30	544016	DGSL-20-30-P1A		30	544023	DGSL-20-30-Y3A
	40	544017	DGSL-20-40-P1A		40	544024	DGSL-20-40-Y3A
	50	544018	DGSL-20-50-P1A		50	544025	DGSL-20-50-Y3A
	80	544019	DGSL-20-80-P1A		80	544026	DGSL-20-80-Y3A
	100	544020	DGSL-20-100-P1A		100	544027	DGSL-20-100-Y3A
25	10	544039	DGSL-25-10-P1A	25	10	–	
	20	544040	DGSL-25-20-P1A		20	–	
	30	544041	DGSL-25-30-P1A		30	544048	DGSL-25-30-Y3A
	40	544042	DGSL-25-40-P1A		40	544049	DGSL-25-40-Y3A
	50	544043	DGSL-25-50-P1A		50	544050	DGSL-25-50-Y3A
	80	544044	DGSL-25-80-P1A		80	544051	DGSL-25-80-Y3A
	100	544045	DGSL-25-100-P1A		100	544052	DGSL-25-100-Y3A
	150	544046	DGSL-25-150-P1A		150	544053	DGSL-25-150-Y3A
	200	544047	DGSL-25-200-P1A		200	544054	DGSL-25-200-Y3A

Ordering data for modular products ➔ 44

Mini slides DGSL

Ordering data – Modular products

FESTO

M Mandatory data				O Options		M	
Module No.	Function	Size	Stroke	Clamping unit	End-position locking	Cushioning	Position sensing
543902	DGSL	4	10 ... 200	C	E3	P	A
543903		6				P1	
543904		8				Y3	
543905		10				E	
543906		12				Y11	
543907		16				N	
543908		20					
543909		25					
Ordering example							
543904	DGSL	- 8	- 30	-	E3	- Y3	A

Ordering table													
Size	4	6	8	10	12	16	20	25	Condition s	Code		Enter code	
[M]	Module No.	543902	543903	543904	543905	543906	543907	543908	543909				
	Function	Mini slide with recirculating ball bearing guide									DGSL		DGSL
											—		—
	Size	4	6	8	10	12	16	20	25		...		
											—		—
	Stroke [mm]	10									10		
		20									20		
		30									30		
		—	40								40		
		—	50								50		
		—	—	80							80		
		—	—	—	100						100		
		—	—	—	—	150				150			
		—	—	—	—	—	—	200			200		
[O]											—		—
	Clamping unit	—	Attached								C		
	End-position locking	—	With piston rod in retracted position							[1]	E3		
[M]											—		—
	Cushioning	Elastic cushioning rings/pads at both ends, end positions adjustable									P		
		Elastic cushioning rings/pads at both ends, end positions adjustable, with fixed stop									P1		
		—	Progressive shock absorber at both ends							[2]	Y3		
		Elastic cushioning rings/pads at both ends, end positions adjustable, short design									E		
		—	Progressive shock absorber with reducing sleeve, both ends							[2]	Y11		
		—	Without cushioning							[2]	N		
	Position sensing	Via proximity sensor									A		A

Note

Operation without cushioning components is not permitted.

- 1 E3 Not with clamping unit C
2 Y3, Y11, N Minimum stroke 30 mm

Transfer order code

	DGSL	-		-		-		-		A
--	------	---	--	---	--	---	--	---	--	---

Mini slides DGSL

Wearing parts kits and accessories

FESTO

Ordering data – Wearing parts kits					
Size	Part No.	Type	Size	Part No.	Type
4	713743	DGSL-4-...	12	713747	DGSL-12-...
6	713744	DGSL-6-...	16	713748	DGSL-16-...
8	713745	DGSL-8-...	20	713749	DGSL-20-...
10	713746	DGSL-10-...	25	713750	DGSL-25-...


Cover DADS

Materials:

Anodised aluminium

Free of copper, PTFE and silicone

RoHS-compliant

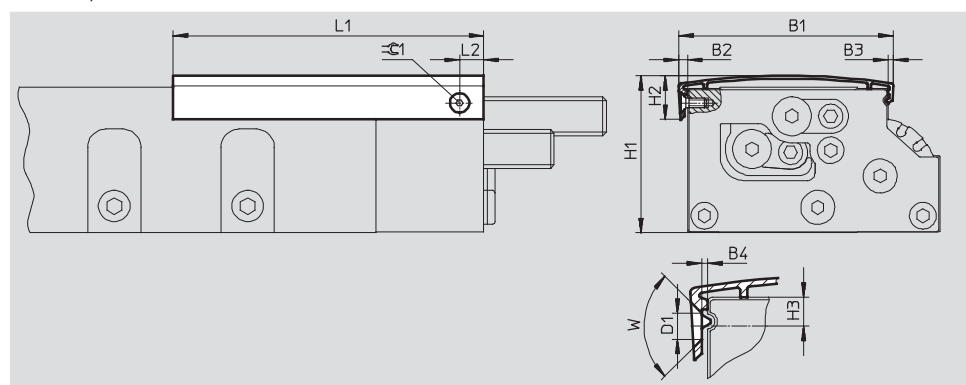

Dimensions and ordering data																
For size	Length [mm]	B1	B2	B3	B4	D1	H1	H2	H3	L1	L2	W	±G1	Weight [g]	Part No.	Type
4	30	22	1.9	–	0.4	2.8	17.9	7.5	2	40	4.5	90°	–	2	1086663	DADS-AB-G6-4-30
	500									500				27	1212468	DADS-AB-G6-4-500
6	50	31.2	1.4	–	0	2.8	22	8.2	2.5	63	6	90°	–	4	1066625	DADS-AB-G6-6-50
	500									500				33	1212476	DADS-AB-G6-6-500
8	80	36.3	1.9	–	0.3	2.8	26.5	8.2	2	93	7	90°	–	8	1087413	DADS-AB-G6-8-80
	500									500				42	1212478	DADS-AB-G6-8-500
10	50	43.6	2.8	2.2	1.2	3.4	32	12	3.4	70	10	90°	2	11	1162400	DADS-AB-G6-10-50
	100									120				18	1090689	DADS-AB-G6-10-100
	500									500				75	1212479	DADS-AB-G6-10-500
12	50	51.7	2.7	2	0.5	3.4	38.8	12.8	4.25	72	10	90°	2	12	1162406	DADS-AB-G6-12-50
	150									170				28	1090732	DADS-AB-G6-12-150
	500									500				82	1212480	DADS-AB-G6-12-500
16	50	60	4.3	3.1	2.25	3.4	43.7	15.2	5	73	10	90°	2	21	1162410	DADS-AB-G6-16-50
	150									173				49	1066591	DADS-AB-G6-16-150
	500									500				141	1212503	DADS-AB-G6-16-500
20	50	74.8	3.6	2.8	1.2	4.4	53.2	18.9	6.5	74	10	90°	2.5	28	1162412	DADS-AB-G6-20-50
	100									124				46	1162415	DADS-AB-G6-20-100
	200									224				83	1090823	DADS-AB-G6-20-200
	500									500				184	1212521	DADS-AB-G6-20-500
25	50	88.4	3.5	2.7	0.7	4.4	64.7	18.3	6	78	10	90°	2.5	34	1162417	DADS-AB-G6-25-50
	100									128				55	1162419	DADS-AB-G6-25-100
	200									228				98	1090895	DADS-AB-G6-25-200
	500									500				213	1212523	DADS-AB-G6-25-500

Note

With the 500 mm covers, the mounting hole must be made by the customer.

The cover can be trimmed as required by the customer.

Mini slides DGSL

Accessories

FESTO


Ordering data						
	For size	Brief description	Order code	Part No.	Type	PU ¹⁾
Centring sleeve ZBH Technical data → Internet: zbh						
	4, 6	For centring loads and attachments (the scope of delivery of the mini slide includes six centring sleeves)	–	189652	ZBH-5	10
	8, 10, 12, 16			186717	ZBH-7	
	20, 25			150927	ZBH-9	
Connector sleeve ZBV Technical data → Internet: zbv						
	8, 10	• For connecting two mini slides DGSL • Sizing information refers to the y axis	–	548802	ZBV-M4-7	3
	12, 16			548803	ZBV-M5-7	
	20, 25			548804	ZBV-M6-9	
Shock absorber DYEF-...-Y1 Technical data → Internet: dyef						
	4	Elastic cushioning, without metal stop	P	1179810	DYEF-M4-Y1	1
	6			1179818	DYEF-M5-Y1	
	8			1179831	DYEF-M6-Y1	
	10			1179834	DYEF-M8-Y1	
	12			1179837	DYEF-M10-Y1	
	16			1179840	DYEF-M12-Y1	
	20			1179863	DYEF-M14-Y1	
	25			1179879	DYEF-M16-Y1	
Shock absorber DYEF-S-...-Y1 Technical data → Internet: dyef						
	4	Elastic cushioning, without metal stop, short design	E	1152500	DYEF-S-M4-Y1	1
	6			1152507	DYEF-S-M5-Y1	
	8			1152524	DYEF-S-M6-Y1	
	10			1152536	DYEF-S-M8-Y1	
	12			1152959	DYEF-S-M10-Y1	
	16			1153004	DYEF-S-M12-Y1	
	20			1153017	DYEF-S-M14-Y1	
	25			1153023	DYEF-S-M16-Y1	
Shock absorber DYEF-...-Y1F Technical data → Internet: dyef						
	4	Elastic cushioning, with metal stop	P1	548370	DYEF-M4-Y1F	1
	6			548371	DYEF-M5-Y1F	
	8			548372	DYEF-M6-Y1F	
	10			548373	DYEF-M8-Y1F	
	12			548374	DYEF-M10-Y1F	
	16			548375	DYEF-M12-Y1F	
	20			548376	DYEF-M14-Y1F	
	25			548377	DYEF-M16-Y1F	
Shock absorber DYSW Technical data → Internet: dysw						
	8	Progressive shock absorber, both ends	Y3	548070	DYSW-4-6-Y1F	1
	10			548071	DYSW-5-8-Y1F	
	12			548072	DYSW-7-10-Y1F	
	16			548073	DYSW-8-14-Y1F	
	20			548074	DYSW-10-17-Y1F	
	25			548075	DYSW-12-20-Y1F	
Reducing sleeve DAYH						
	10	For DYSW-4-6	–	1165476	DAYH-4	1
	12	For DYSW-5-8		1165480	DAYH-5	
	16	For DYSW-7-10		1165484	DAYH-7	
	20	For DYSW-8-14		1165488	DAYH-8	
	25	For DYSW-10-17		1165491	DAYH-10	

1) Packaging unit

Mini slides DGSL

Accessories

FESTO

Ordering data							
	For size	Brief description	Part No.	Type	PU ¹⁾		
One-way flow control valve GRLA			Technical data ➔ Internet: grla				
	4, 6, 8	- For regulating speed - Only one GRLA-M3-QS-3 can be mounted on the front face with size 4	175041	GRLA-M3-QS-3	1		
	10, 12, 16		175038	GRLA-M3			
			20, 25	193137		GRLA-M5-QS-3-D	
				20, 25		193138	GRLA-M5-QS-4-D
193143			GRLA-1/8-QS-4-D				
193144			GRLA-1/8-QS-6-D				
162965			GRLA-1/8-QS-6-RS-B				
			162966	GRLA-1/8-QS-8-RS-B			
Push-in fitting QSM			Technical data ➔ Internet: quick star				
	4, 6, 8	For connecting compressed air tubing with standard O.D.	153301	QSM-M3-3	10		
	10, 12, 16		153304	QSM-M5-4			
	20, 25		153307	QSM-1/8-6			

1) Packaging unit

Ordering data – Proximity sensors for C-slot, magneto-resistive					
	Type of mounting	Switching output	Electrical connection, connection direction	Cable length [m]	Part No. Type
N/O contact					
	Insertable in the slot from above	PNP	Cable, 3-wire, in-line	2.5	551373 SMT-10M-PS-24V-E-2,5-L-OE
			Plug M8x1, 3-pin, in-line	0.3	551375 SMT-10M-PS-24V-E-0,3-L-M8D
			Plug M8x1, 3-pin, angled	0.3	551376 SMT-10M-PS-24V-E-0,3-Q-M8D

Ordering data – Proximity sensors for C-slot, magnetic reed					
	Type of mounting	Switching output	Electrical connection, connection direction	Cable length [m]	Part No. Type
N/O contact					
	Insertable in the slot from above, flush with the cylinder profile	Contacting	Plug M8x1, 3-pin, in-line	0.3	551367 SME-10M-DS-24V-E-0,3-L-M8D
			Cable, 3-wire, in-line	2.5	551365 SME-10M-DS-24V-E-2,5-L-OE
			Cable, 2-wire, in-line	2.5	551369 SME-10M-ZS-24V-E-2,5-L-OE
	Insertable in the slot lengthwise	Contacting	Plug M8x1, 3-pin, in-line	0.3	173212 SME-10-SL-LED-24
			Cable, 3-wire, in-line	2.5	173210 SME-10-KL-LED-24

Note

Proximity sensors SME are not permitted for size 4.

Ordering data – Connecting cables				
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No. Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333 NEBU-M8G3-K-2,5-LE3
			5	541334 NEBU-M8G3-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338 NEBU-M8W3-K-2,5-LE3
			5	541341 NEBU-M8W3-K-5-LE3

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com