

## Suction grippers ESG

**FESTO**




# Suction grippers ESG

Key features

FESTO

## Product overview

Suction gripper and suction cup



Festo vacuum suction grippers offer outstanding functionality and quality.

An extensive range of modular suction cups in different shapes, materials and sizes, plus a wide selection of suction cup holders, angle and height compensators and filters within the

modular suction gripper system, provide users with a huge range of possible combinations for a wide variety of applications.

## Suction gripper ESG

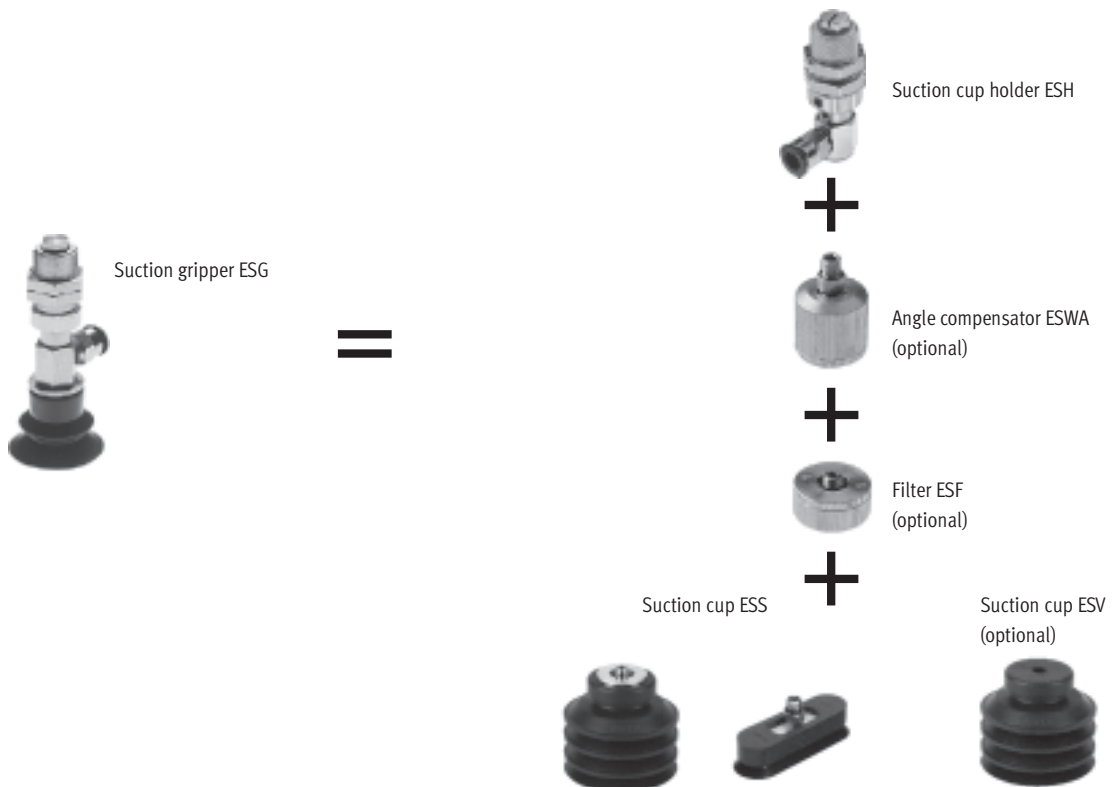
→ 7

Modular products with over 2000 variants

- The ideal solution for the transport of workpieces of different weights, surfaces and shapes
- Choose from:
  - 15 suction cup diameters
  - 6 different materials – including anti-static types
  - 6 suction cup shapes
  - Various suction cup holders
  - Optional accessories (filters and angle compensators)
- Wide range of variants
- A suitable solution for every task
- Wide range to suit applications with various temperature ranges and workpiece surfaces
- Suction cups made from silicone are approved for use in the food industry

Suction grippers as a complete solution

Suction grippers made from individual components



# Suction grippers ESG

Key features

FESTO

## Suction cups VAS/VASB

Technical data → Internet: vas

Sturdy and reliable

- The ideal solution for the transport of workpieces of different weights, surfaces and shapes
- Choose from:
  - 12 suction cup diameters
  - 2 suction cup shapes: round and bellows design
  - 3 suction cup materials: nitrile rubber, polyurethane and silicone for use in a wide variety of applications
- Wide range to suit applications with various temperature ranges and workpiece surfaces
- Suction cups made from silicone are approved for use in the food industry
- All tubing connector sizes correspond to a holder size



# Suction grippers ESG

Key features

FESTO

## At a glance

The Festo suction gripper range offers a wide variety of possible combinations with a modular product system containing more than 2000 variants.

Choose from:

- 2 suction cup shapes:
  - Round, 15 different diameters
  - Oval, 11 different diameters
- 6 suction cup designs
- 6 different suction cup materials
- Various suction cup holders:
  - With and without height compensators
  - With different tubing connectors: Push-in fitting, barbed fitting, or threaded
- Optional accessories: Filters and angle compensators

Even extremely small workpieces, e.g. in the electronics industry, can be accurately and gently transported. Additionally, all components included in the modular range are easily and quickly interchangeable in the event that requirements change. Suction grippers can be ordered complete, or as individual components.

**Cost savings thanks to:**

- Modular range
- The handy suction cup can be replaced easily (wearing part)
- Reduced warehousing
- Long service life
- Low investment costs
- Large range – including industry-related solutions

## The complete solution

The suction gripper ESG comes already assembled to meet your specific requirements and is ready to use.

The suction cup shape and dimensions together form a part number. You can then expand this part number to form a personalised type code by adding your own choice of suction cup material, holder type, tubing connector and accessories.

Your benefits:

With just one part number and type code you can order your own complete suction gripper system.



## The individual components

If, for instance, you have to handle a different workpiece surface finish, all you need to do is add the right suction cup.

Your benefits:

By adding individual components you can create new areas of application for your suction gripper ESG.

### Suction cup holder ESH

Technical data → Internet: [esh](#)

The area of application determines which is the right suction cup holder to use.

The suction cup or accessories are attached directly to the suction cup holder.

- 6 holder sizes
- 8 holder types
- 3 tubing connectors



### Suction cup with mounting ESS

Technical data → Internet: [ess](#)

The suction cup consists of the suction cup itself, plus the support plate with mounting.

Here too, the area of application of the suction gripper determines which is the right suction cup to use.

- 6 connection sizes: a tubing connector for every holder size
- 2 suction cup shapes
- 6 suction cup designs
- 6 suction cup materials



## Accessories

### Filter ESF

Technical data → Internet: [esf](#)

- For protecting vacuum generators from contamination or damage



### Angle compensator ESWA

Technical data → Internet: [eswa](#)

- The angle compensator ensures maximum suction cup grip for workpieces with sloping surfaces.



# Suction grippers ESG

Product range overview

FESTO

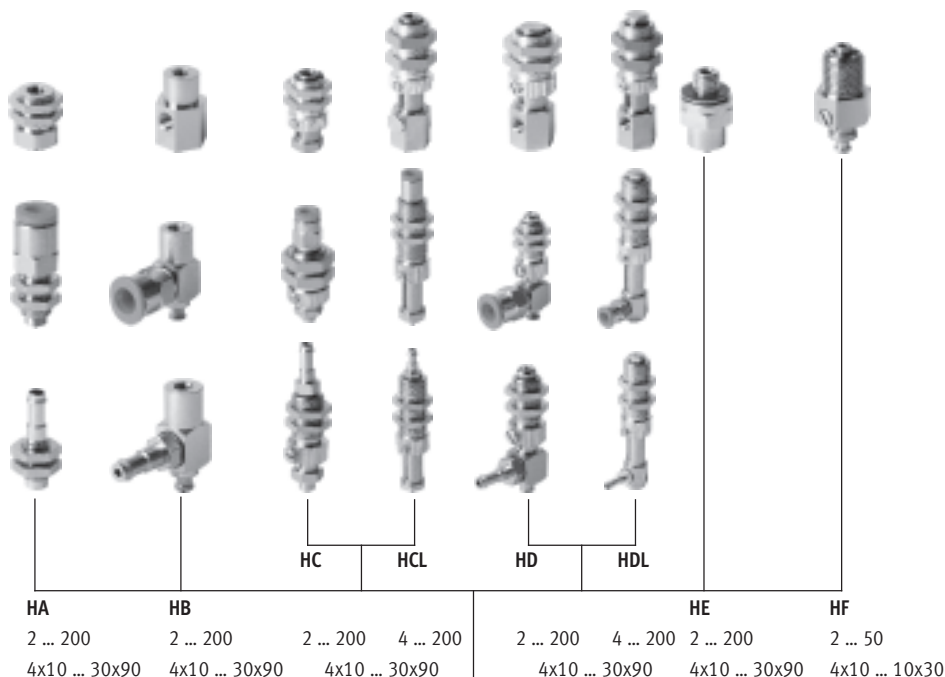
## Suction cup holders

Connection with G thread  
for suction cup  $\varnothing$  60 ... 200 mm  
for suction cup size 15x45 ... 30x90 mm

Push-in fitting QS  
for suction cup  $\varnothing$  2 ... 50 mm  
for suction cup size 4x10 ... 10x30 mm

Barbed fitting PK  
for suction cup  $\varnothing$  2 ... 50 mm  
for suction cup size 4x10 ... 10x30 mm

Holder type  
for suction cup  $\varnothing$  [mm]  
for suction cup size [mm]



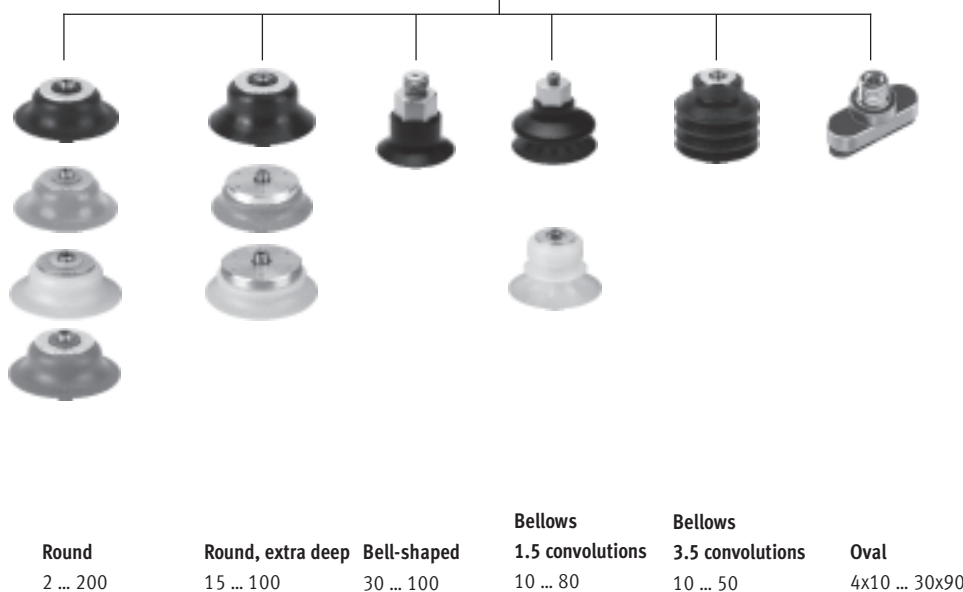
Angle compensators  
for suction cup  $\varnothing$  10 ... 100 mm  
only holder sizes 3, 4 and 5

Filters  
for suction cup  $\varnothing$  10 ... 50 mm  
for suction cup size 4x10 ... 30x90 mm  
only holder sizes 3 and 4

## Suction cups

Materials:

- Nitrile rubber (NBR)  
for suction cup  $\varnothing$  2 ... 200 mm
- Butadiene rubber (BR)  
anti-static  
for suction cup  $\varnothing$  2 ... 50 mm
- Polyurethane (PU)  
for suction cup  $\varnothing$  2 ... 200 mm
- Silicone (SI)  
for suction cup  $\varnothing$  2 ... 200 mm
- Fluoro rubber (FPM)  
for suction cup  $\varnothing$  2 ... 200 mm
- Vulkollan® (GT/BT)  
for suction cup  $\varnothing$  30 ... 100 mm



# Suction grippers ESG

Type codes

FESTO

		ESG	–	20	–	S	N	–	HC	–	QS
<b>Type</b>											
ESG	Suction gripper										
<b>Suction cup Ø or suction cup size [mm]</b>											
2 ... 200	Round										
4x10	Oval										
4x20	Oval										
6x10	Oval										
6x20	Oval										
8x20	Oval										
8x30	Oval										
10x30	Oval										
15x45	Oval										
20x60	Oval										
25x75	Oval										
30x90	Oval										
<b>Suction cup shape</b>											
S	Round, flat										
E	Round, extra deep										
B	Round, bellows with 1.5 convolutions										
C	Round, bellows with 3.5 convolutions										
G	Round, bell-shaped										
O	Oval, flat										
<b>Materials</b>											
N	Nitrile rubber										
U	Polyurethane										
S	Silicone										
F	Fluoro elastomer										
NA	Butadiene rubber, anti-static										
T	Vulkollan®										
<b>Suction cup holder</b>											
HA	Without height compensator, vacuum port on top										
HB	Without height compensator, vacuum port on side										
HC	With height compensator, vacuum port on top										
HCL	With long height compensator, vacuum port on top										
HD	With height compensator, vacuum port on side										
HDL	With long height compensator, vacuum port on side										
HE	Without height compensator, vacuum port on top, with threaded connection for direct screw-in										
HF	With height compensator, vacuum port on top, with threaded connection for direct screw-in										
<b>Vacuum port</b>											
QS	Push-in connector QS										
PK	Barbed fitting connector										
G	Threaded connection										




Possible combinations can be found in the ordering data.

# Suction grippers ESG for suction cup Ø 2 and 4

FESTO

Technical data

Function



Temperature range  
-30 ... +200 °C

Suction cup type:

- Round, flat



General technical data – Suction cup					
Suction cup diameter	Suction cup connection	Holding force at nominal operating pressure -0.7 bar	Suction cup volume	Min. workpiece radius	Weight
[mm]	[mm]	[N]	[cm <sup>3</sup> ]	[mm]	[g]
Round, flat					
2	3 <sup>1)</sup>	0.1	0.002	10	0.1
4	3 <sup>1)</sup>	0.46	0.008	10	0.1

1) Is plugged onto or into the suction cup

Material types – Suction cup					
Material	N	U	S	F	NA
Shore hardness	50 ±5	60 ±5	50 ±5	60 ±5	50 ±5
Colour	Black	Blue	Transparent	Grey	Black with white dot
Material	Nitrile rubber	Polyurethane	Silicone	Fluoro rubber	Butadiene rubber, anti-static
Note on materials	RoHS-compliant				
	Free of copper and PTFE				

Ambient conditions – Suction cup					
Material	N	U	S	F	NA
Ambient temperature [°C]	-10 ... +70	-20 ... +60	-30 ... +180	-10 ... +200	-10 ... +70
Corrosion resistance CRC <sup>1)</sup>	1				


1) Corrosion resistance class 1 according to Festo standard 940 070


Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.


# Suction grippers ESG for suction cup Ø 2 and 4


FESTO


Technical data

Suction cup holder size 1		Vacuum port <b>1</b>	
Holder type HA		QS4	PK-3
	Mounting thread <b>2</b>	M6x0.75	M5x0.5
	Max. tightening torque [Nm]	3	2
	Suction cup connection <b>3</b> [mm]	3	3
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	6	3

Holder type HB		Vacuum port <b>1</b>	
		QS4	PK-3
	Mounting thread <b>2</b>	M3x0.5	M3x0.5
	Suction cup connection <b>3</b> [mm]	3	3
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	5	4

Holder type HC		Vacuum port <b>1</b>	
		QS4	PK-3
	Mounting thread <b>2</b>	M12x1	M8x0.75
	Max. tightening torque [Nm]	14	3.5
	Suction cup connection <b>3</b> [mm]	3	3
	Height compensation [mm]	3	3
	Max. spring force [N]	0.1	0.1
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	17	8

Holder type HCL		Vacuum port <b>1</b>	
		QS4	PK-3
	Mounting thread <b>2</b>	M12x1	M12x1
	Max. tightening torque [Nm]	14	14
	Suction cup connection <b>3</b> [mm]	3	3
	Height compensation [mm]	10	10
	Max. spring force [N]	0.1	0.1
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	20	19


Holder type HD		Vacuum port <b>1</b>	
		QS4	PK-3
	Mounting thread <b>2</b>	M8x0.75	M8x0.75
	Max. tightening torque [Nm]	3.5	3.5
	Suction cup connection <b>3</b> [mm]	3	3
	Height compensation [mm]	3	3
	Max. spring force [N]	0.1	0.1
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	13	11





# Suction grippers ESG for suction cup Ø 2 and 4

FESTO

Technical data

Suction cup holder size 1			
Holder type HDL		Vacuum port 1	
		QS4	PK-3
	Mounting thread 2	M12x1	M12x1
	Max. tightening torque [Nm]	14	14
	Suction cup connection 3 [mm]	3	3
	Height compensation [mm]	10	10
	Max. spring force [N]	0.1	0.1
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	29	28

Holder type HE		Vacuum port 1	
		Direct	
	Mounting thread 2	M3x0.5	
	Max. tightening torque [Nm]	0.7	
	Suction cup connection 3 [mm]	3	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate	
	Weight [g]	1	


Holder type HF		Vacuum port 1	
		Direct	
	Mounting thread 2	M10x1	
	Max. tightening torque [Nm]	7	
	Suction cup connection 3 [mm]	3	
	Height compensation [mm]	2.6	
	Min. spring force [N]	2	
	Max. spring force [N]	4	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate, nitrile rubber	
	Weight [g]	14	

# Suction grippers ESG for suction cup Ø 6 and 8

FESTO

Technical data

Function



Temperature range

−30 ... +200 °C

Suction cup type:

- Round, flat



General technical data – Suction cup					
Suction cup diameter	Suction cup connection	Holding force at nominal operating pressure −0.7 bar	Suction cup volume	Min. workpiece radius	Weight
[mm]	[mm]	[N]	[cm <sup>3</sup> ]	[mm]	[g]
Round, flat					
6	4 <sup>1)</sup>	1.1	0.015	15	0.2
8	4 <sup>1)</sup>	2.3	0.030	20	0.2

1) Is plugged onto or into the suction cup

Material types – Suction cup					
Material	N	U	S	F	NA
Shore hardness	50 ±5	60 ±5	50 ±5	60 ±5	50 ±5
Colour	Black	Blue	Transparent	Grey	Black with white dot
Material	Nitrile rubber	Polyurethane	Silicone	Fluoro rubber	Butadiene rubber, anti-static
Note on materials	RoHS-compliant				
	Free of copper and PTFE				

Ambient conditions – Suction cup					
Material	N	U	S	F	NA
Ambient temperature [°C]	−10 ... +70	−20 ... +60	−30 ... +180	−10 ... +200	−10 ... +70
Corrosion resistance CRC <sup>1)</sup>	1				


1) Corrosion resistance class 1 according to Festo standard 940 070


Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.


# Suction grippers ESG for suction cup $\varnothing$ 6 and 8


FESTO


Technical data

Suction cup holder size 2			Vacuum port <span>1</span>	
Holder type HA			QS6	PK-4
	Mounting thread <span>2</span>		M10x1	M8x0.75
	Max. tightening torque [Nm]		7	3.5
	Suction cup connection <span>3</span> [mm]		4	4
	Temperature range [°C]		0 ... +60	-10 ... +60
	Materials		Steel, polyacetate, nitrile rubber	Steel
	Weight [g]		12	7

Holder type HB			Vacuum port <span>1</span>	
			QS6	PK-4
	Mounting thread <span>2</span>		M4x0.7	M4x0.7
	Suction cup connection <span>3</span> [mm]		4	4
	Temperature range [°C]		0 ... +60	-10 ... +60
	Materials		Steel, polyacetate, nitrile rubber	Steel
	Weight [g]		13	11

Holder type HC			Vacuum port <span>1</span>	
			QS6	PK-4
	Mounting thread <span>2</span>		M12x1	M8x0.75
	Max. tightening torque [Nm]		14	3.5
	Suction cup connection <span>3</span> [mm]		4	4
	Height compensation [mm]		3	3
	Max. spring force [N]		0.1	0.1
	Temperature range [°C]		0 ... +60	-10 ... +60
	Materials		Steel, polyacetate, nitrile rubber	Steel
	Weight [g]		18	8


Holder type HCL			Vacuum port <span>1</span>	
			QS6	PK-4
	Mounting thread <span>2</span>		M12x1	M12x1
	Max. tightening torque [Nm]		14	14
	Suction cup connection <span>3</span> [mm]		4	4
	Height compensation [mm]		10	10
	Max. spring force [N]		0.1	0.1
	Temperature range [°C]		0 ... +60	-10 ... +60
	Materials		Steel, polyacetate, nitrile rubber	Steel
	Weight [g]		20	19


Holder type HD			Vacuum port <span>1</span>	
			QS6	PK-3
	Mounting thread <span>2</span>		M8x0.75	M8x0.75
	Max. tightening torque [Nm]		3.5	3.5
	Suction cup connection <span>3</span> [mm]		4	4
	Height compensation [mm]		3	3
	Max. spring force [N]		0.1	0.1
	Temperature range [°C]		0 ... +60	-10 ... +60
	Materials		Steel, polyacetate, nitrile rubber	Steel
	Weight [g]		15	12


# Suction grippers ESG for suction cup $\varnothing$ 6 and 8

FESTO

Technical data

Suction cup holder size 2		Vacuum port <b>1</b>	
Holder type HDL		QS6	PK-3
	Mounting thread <b>2</b>	M12x1	M12x1
	Max. tightening torque [Nm]	14	14
	Suction cup connection <b>3</b> [mm]	4	4
	Height compensation [mm]	10	10
	Max. spring force [N]	0.1	0.1
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	33	32

Holder type HE		Vacuum port <b>1</b>	
		Direct	
	Mounting thread <b>2</b>	M5x0.5	
	Max. tightening torque [Nm]	1.9	
	Suction cup connection <b>3</b> [mm]	4	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate	
	Weight [g]	3	


Holder type HF		Vacuum port <b>1</b>	
		Direct	
	Mounting thread <b>2</b>	M10x1	
	Max. tightening torque [Nm]	7	
	Suction cup connection <b>3</b> [mm]	4	
	Height compensation [mm]	2.6	
	Min. spring force [N]	2	
	Max. spring force [N]	4	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate, nitrile rubber	
	Weight [g]	14	

# Suction grippers ESG for suction cup Ø 10 and 15

FESTO

Technical data

Function



Temperature range

–30 ... +200 °C

Suction cup type:

- Round, flat
- Round, extra deep
- Round, bellows 1.5 convolutions
- Round, bellows 3.5 convolutions



General technical data – Suction cup						
Suction cup diameter	Suction cup connection	Holding force at nominal operating pressure –0.7 bar	Suction cup volume	Min. workpiece radius	Height compensation	Weight
[mm]	[mm]	[N]	[cm <sup>3</sup> ]	[mm]	[mm]	[g]
Round, flat						
10	M4x0.7	3.9	0.050	30	–	1.5
15	M4x0.7	8.5	0.208	35	–	1.9
Round, extra deep						
15	M4x0.7	9.8	0.350	20	–	1.9
Round, bellows 1.5 convolutions						
10	M4x0.7	4.7	0.380	20	4	1.8
Round, bellows 3.5 convolutions						
10	M4x0.7	3.9	0.290	25	3.3	1.6

Material types – Suction cup					
Material	N	U	S	F	NA
Shore hardness	60 ±5	60 ±5	50 ±5	60 ±5	50 ±5
Colour	Black	Blue	Transparent	Grey	Black with white dot
Material	Nitrile rubber	Polyurethane	Silicone	Fluoro rubber	Butadiene rubber, anti-static
Note on materials	RoHS-compliant				
	Free of copper and PTFE				

Ambient conditions – Suction cup					
Material	N	U	S	F	NA
Ambient temperature [°C]	–10 ... +70	–20 ... +60	–30 ... +180	–10 ... +200	–10 ... +70
Corrosion resistance CRC <sup>1)</sup>	1				


1) Corrosion resistance class 1 according to Festo standard 940 070


Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.


# Suction grippers ESG for suction cup Ø 10 and 15


FESTO

Technical data

Suction cup holder size 3		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
Holder type HA		QS6	PK-4
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M12x1	M8x0.75
	Max. tightening torque [Nm]	14	3.5
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M4x0.7	M4x0.7
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	20	10

Holder type HB		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
		QS6	PK-4
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M6x1	M6x1
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M4x0.7	M4x0.7
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	29	27

Holder type HC		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
		QS6	PK-4
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M4x0.7	M4x0.7
	Height compensation [mm]	6	6
	Min. spring force [N]	2	2
	Max. spring force [N]	5	5
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	34	32

Holder type HCL		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
		QS6	PK-4
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M4x0.7	M4x0.7
	Height compensation [mm]	20	20
	Min. spring force [N]	2	2
	Max. spring force [N]	5	5
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	34	32

# Suction grippers ESG for suction cup Ø 10 and 15

Technical data

**FESTO**

Suction cup holder size 3			
Holder type HD		Vacuum port 1	
		QS6	PK-3
	Mounting thread 2	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection 3	M4x0.7	M4x0.7
	Height compensation [mm]	6	6
	Min. spring force [N]	2	2
	Max. spring force [N]	5	5
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	46	44

Holder type HDL			
		Vacuum port 1	
		QS6	PK-3
	Mounting thread 2	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection 3	M4x0.7	M4x0.7
	Height compensation [mm]	20	20
	Min. spring force [N]	1	1
	Max. spring force [N]	3	3
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	65	63


Holder type HE			
		Vacuum port 1	
		Direct	
	Mounting thread 2	G1/8	
	Max. tightening torque [Nm]	9	
	Suction cup connection 3	M4x0.7	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate	
	Weight [g]	11	


Holder type HF			
		Vacuum port 1	
		Direct	
	Mounting thread 2	M14x1	
	Max. tightening torque [Nm]	21	
	Suction cup connection 3	M4x0.7	
	Height compensation [mm]	6	
	Min. spring force [N]	6	
	Max. spring force [N]	12	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate, nitrile rubber	
	Weight [g]	54	

## Suction grippers ESG for suction cup Ø 10 and 15

**FESTO**

Technical data

Angle compensator ESWA		
Mounting thread		M4x0.7
	Design	Ball joint with ± 15° swivel angle
	Max. tightening torque [Nm]	0.4
	Temperature range [°C]	0 ... +60
	Materials	Housing: Nickel plated aluminium; Filter: Polyvinylfluoride; Seals: Nitrile rubber
	Weight [g]	9

Vacuum filter ESF		
Holder size		3
	Max. flow rate [l/min]	100
	Grade of filtration [µm]	10
	Pressure range [bar]	−0.95 ... +4
	Temperature range [°C]	0 ... +60
	Materials	Housing: Nickel plated aluminium; Filter: Polyvinylfluoride; Seals: Nitrile rubber
	Weight [g]	9




# Suction grippers ESG for suction cup Ø 20 ... 50/oval suction cup

FESTO

Technical data

Function



Temperature range

–30 ... +200 °C



Suction cup type:

- Round, flat
- Round, extra deep
- Round, bellows 1.5 convolutions
- Round, bellows 1.5 convolutions, Vulkollan®
- Round, bellows 3.5 convolutions
- Round, bell-shaped
- Oval, flat

General technical data – Suction cup						
Suction cup diameter	Suction cup connection	Holding force at nominal operating pressure –0.7 bar	Suction cup volume	Min. workpiece radius	Height compensation	Weight
[mm]	[mm]	[N]	[cm³]	[mm]	[mm]	[g]
Round, flat						
20	M6x1	16.3	0.318	60	–	6.4
30	M6x1	40.8	0.867	110	–	9
40	M6x1	69.6	1.566	230	–	16.3
50	M6x1	105.8	2.387	330	–	22
Round, extra deep						
20	M6x1	17	0.840	30	–	6.4
30	M6x1	37.2	2.120	50	–	9.2
40	M6x1	67.6	4.040	80	–	16.9
50	M6x1	103.6	7.900	100	–	23.4
Round, bellows 1.5 convolutions						
20	M6x1	12.9	1.600	40	6.0	6.7
30	M6x1	26.2	4.070	80	8.0	9.9
40	M6x1	52.3	8.870	90	9.5	18.7
50	M6x1	72.6	14.230	150	11	24.7
Round, bellows 1.5 convolutions, Vulkollan®						
40	M6x1	59	–	35	9	18
50	M6x1	100	–	40	10	24
Round, bellows 3.5 convolutions						
20	M6x1	8.2	2.750	50	7.0	6.9
30	M6x1	20.8	9.470	80	10.5	12.2
40	M6x1	42.4	19.720	100	12.8	21.9
50	M6x1	63.4	38.920	180	17.5	32.1
Round, bell-shaped						
30	M6x1	36	–	26	3.5	12
40	M6x1	64	–	35	5.5	14
50	M6x1	97	–	40	8	17

® Registered Trademark of the Bayer MaterialScience AG Group

# Suction grippers ESG for suction cup Ø 20 ... 50/oval suction cup

FESTO

Technical data

General technical data – Suction cup						
Suction cup diameter	Suction cup connection	Holding force at nominal operating pressure –0.7 bar	Suction cup volume	Min. workpiece radius	Height compensation	Weight
[mm]	[mm]	[N]	[cm³]	[mm]	[mm]	[g]
Oval, flat						
4x10	M6x1	2	0.064	–	–	2
4x20	M6x1	3.4	0.112	–	–	2.5
6x10	M6x1	2.9	0.106	–	–	2
6x20	M6x1	5.9	0.196	–	–	2.5
8x20	M6x1	8	0.256	–	–	2.5
8x30	M6x1	10.9	0.376	–	–	3
10x30	M6x1	15.2	0.350	–	–	2.9

Material types – Suction cup						
Material	N	U	S	F	NA	T
Shore hardness	60 ±5	60 ±5	50 ±5	60 ±5	50 ±5	72
Colour	Black	Blue	Transparent	Grey	Black with white dot	Reddish brown
Material	Nitrile rubber	Polyurethane	Silicone	Fluoro rubber	Butadiene rubber, anti-static	Vulkollan®
Note on materials	RoHS-compliant					
	Free of copper and PTFE					

Ambient conditions – Suction cup						
Material	N	U	S	F	NA	T
Ambient temperature [°C]	–10 ... +70	–20 ... +60	–30 ... +180	–10 ... +200	–10 ... +70	–10 ... +80
Corrosion resistance CRC <sup>1)</sup>	1					2

1) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.


Corrosion resistance class 2 according to Festo standard 940 070


Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a surrounding industrial atmosphere or media such as cooling or lubricating agents.


# Suction grippers ESG for suction cup Ø 20 ... 50/oval suction cup


FESTO

Technical data

Suction cup holder size 4		Vacuum port <b>1</b>	
Holder type HA		QS6	PK-4
	Mounting thread <b>2</b>	M14x1	M12x1
	Max. tightening torque [Nm]	21	14
	Suction cup connection <b>3</b>	M6x1	M6x1
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	30	23

Holder type HB		Vacuum port <b>1</b>	
		QS6	PK-4
	Mounting thread <b>2</b>	M6x1	M6x1
	Suction cup connection <b>3</b>	M6x1	M6x1
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	27	25


Holder type HC		Vacuum port <b>1</b>	
		QS6	PK-4
	Mounting thread <b>2</b>	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection <b>3</b>	M6x1	M6x1
	Height compensation [mm]	6	6
	Min. spring force [N]	5	5
	Max. spring force [N]	10	10
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	33	31


Holder type HCL		Vacuum port <b>1</b>	
		QS6	PK-4
	Mounting thread <b>2</b>	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection <b>3</b>	M6x1	M6x1
	Height compensation [mm]	20	20
	Min. spring force [N]	1	1
	Max. spring force [N]	9	9
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	47	46


# Suction grippers ESG for suction cup Ø 20 ... 50/oval suction cup


FESTO

Technical data

Suction cup holder size 4		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
Holder type HD		QS6	PK-3
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M6x1	M6x1
	Height compensation [mm]	6	6
	Min. spring force [N]	5	5
	Max. spring force [N]	10	10
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	45	43

Holder type HDL		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
		QS6	PK-3
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M14x1	M14x1
	Max. tightening torque [Nm]	21	21
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M6x1	M6x1
	Height compensation [mm]	20	20
	Min. spring force [N]	1	1
	Max. spring force [N]	9	9
	Temperature range [°C]	0 ... +60	-10 ... +60
	Materials	Steel, polyacetate, nitrile rubber	Steel
	Weight [g]	65	63


Holder type HE		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
		Direct	
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	G½	
	Max. tightening torque [Nm]	9	
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M6x1	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate	
	Weight [g]	11	


Holder type HF		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>	
		Direct	
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M14x1	
	Max. tightening torque [Nm]	21	
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M6x1	
	Height compensation [mm]	6	
	Min. spring force [N]	6	
	Max. spring force [N]	12	
	Temperature range [°C]	-10 ... +60	
	Materials	Steel, polyacetate, nitrile rubber	
	Weight [g]	52	

# Suction grippers ESG for suction cup Ø 20 ... 50/oval suction cup

FESTO

Technical data

Angle compensator ESWA		
Mounting thread		M6x1
	Design	Ball joint with ± 15° swivel angle
	Max. tightening torque [Nm]	2.4
	Temperature range [°C]	0 ... +60
	Materials	Housing: Nickel plated aluminium; Filter: Polyvinylfluoride; Seals: Nitrile rubber
	Weight [g]	19


Vacuum filter ESF			
Holder size		4A	4B
	Max. flow rate [l/min]	260	270
	Grade of filtration [µm]	10	
	Pressure range [bar]	−0.95 ... +4	
	Temperature range [°C]	0 ... +60	
	Materials	Housing: Nickel plated aluminium; Filter: Polyvinylfluoride; Seals: Nitrile rubber	
	Weight [g]	19	

# Suction grippers ESG for suction cup Ø 60 ... 100/oval suction cup

FESTO

Technical data

Function



Temperature range

–30 ... +200 °C

Suction cup type:

- Round, flat
- Round, extra deep
- Round, bellows 1.5 convolutions
- Round, bellows 1.5 convolutions, Vulkollan®
- Round, bell-shaped
- Oval, flat



General technical data – Suction cup						
Suction cup diameter	Suction cup connection	Holding force at nominal operating pressure –0.7 bar	Suction cup volume	Min. workpiece radius	Height compensation	Weight
[mm]	[mm]	[N]	[cm³]	[mm]	[mm]	[g]
Round, flat						
60	M10x1.5	166.1	3.953	350	–	49
80	M10x1.5	309.7	19.312	400	–	133
100	M10x1.5	503.6	29.779	460	–	222
Round, extra deep						
60	M10x1.5	162.5	19.770	120	–	48
80	M10x1.5	275	51.610	160	–	141
100	M10x1.5	440.8	84.660	200	–	228
Round, bellows 1.5 convolutions						
80	M10x1.5	213.9	63.900	430	10	139
Round, bellows 1.5 convolutions, Vulkollan®						
80	M10x1.5	237	–	100	10.5	84.5
Round, bell-shaped						
60	M10x1.5	134	–	75	6	20
80	M10x1.5	245	–	100	7.5	28
100	M10x1.5	375	–	135	9	86.5
Oval, flat						
15x45	M10x1.5	32	1.570	–	–	23.8
20x60	M10x1.5	62.2	3.690	–	–	30.8
25x75	M10x1.5	92.5	6.700	–	–	46.8
30x90	M10x1.5	134.4	10.170	–	–	55.3

# Suction grippers ESG for suction cup Ø 60 ... 100/oval suction cup

FESTO

Technical data

Material types – Suction cup					
Material	N	U	S	F	T
Shore hardness	60 ±5	60 ±5	50 ±5	60 ±5	72
Colour	Black	Blue	Transparent	Grey	Reddish brown
Material	Nitrile rubber	Polyurethane	Silicone	Fluoro rubber	Vulkollan®
Note on materials	RoHS-compliant				
	Free of copper and PTFE				

Ambient conditions – Suction cup					
Material	N	U	S	F	T
Ambient temperature [°C]	–10 ... +70	–20 ... +60	–30 ... +180	–10 ... +200	–10 ... +80
Corrosion resistance CRC <sup>1)</sup>	1				2

1) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.





Corrosion resistance class 2 according to Festo standard 940 070

Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a surrounding industrial atmosphere or media such as cooling or lubricating agents.

# Suction grippers ESG for suction cup Ø 60 ... 100/oval suction cup

FESTO

Technical data




Suction cup holder size 5		
Holder type HA		Vacuum port <b>1</b>
		G $\frac{1}{8}$
	Mounting thread <b>2</b>	M20x1
	Max. tightening torque [Nm]	21
	Suction cup connection <b>3</b>	M10x1.5
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	84
Holder type HB		
Holder type HB		Vacuum port <b>1</b>
		G $\frac{1}{8}$
	Mounting thread <b>2</b>	M8x1.25
	Suction cup connection <b>3</b>	M10x1.5
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	91
Holder type HC		
Holder type HC		Vacuum port <b>1</b>
		G $\frac{1}{8}$
	Mounting thread <b>2</b>	M22x1
	Max. tightening torque [Nm]	50
	Suction cup connection <b>3</b>	M10x1.5
	Height compensation [mm]	10
	Min. spring force [N]	8
	Max. spring force [N]	18
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	112
Holder type HCL		
Holder type HCL		Vacuum port <b>1</b>
		G $\frac{1}{8}$
	Mounting thread <b>2</b>	M22x1
	Max. tightening torque [Nm]	50
	Suction cup connection <b>3</b>	M10x1.5
	Height compensation [mm]	30
	Min. spring force [N]	10
	Max. spring force [N]	16
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	129



# Suction grippers ESG for suction cup Ø 60 ... 100/oval suction cup

FESTO


Technical data

Suction cup holder size 5		
Holder type HD		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>
		G $\frac{1}{8}$
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M22x1
	Max. tightening torque [Nm]	50
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M10x1.5
	Height compensation [mm]	10
	Min. spring force [N]	8
	Max. spring force [N]	18
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	195
Holder type HDL		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>
		G $\frac{1}{8}$
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M22x1
	Max. tightening torque [Nm]	50
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M10x1.5
	Height compensation [mm]	30
	Min. spring force [N]	10
	Max. spring force [N]	16
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	273
Holder type HE		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>
		Direct
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	G $\frac{1}{4}$
	Max. tightening torque [Nm]	14
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M10x1.5
	Temperature range [°C]	-10 ... +60
	Materials	Steel, polyacetate
	Weight [g]	24

## Suction grippers ESG for suction cup Ø 60 ... 100/oval suction cup

**FESTO**

Technical data


Angle compensator ESWA		
Mounting thread		M10x1.5
	Design	Ball joint with ± 15° swivel angle
	Max. tightening torque [Nm]	9.4
	Temperature range [°C]	0 ... +60
	Materials	Housing: Nickel plated aluminium; Filter: Polyvinylfluoride; Seals: Nitrile rubber
	Weight [g]	57

# Suction grippers ESG for suction cup Ø 150 and 200

FESTO

Technical data

Function



Temperature range

–30 ... +200 °C

Suction cup type:

- Round, flat



General technical data – Suction cup					
Suction cup diameter	Suction cup connection	Holding force at nominal operating pressure –0.7 bar	Suction cup volume	Min. workpiece radius	Weight
[mm]	[mm]	[N]	[cm <sup>3</sup> ]	[mm]	[g]
Round, flat					
150	M20x2	900	173.826	480	720
200	M20x2	1,610	245.454	680	1,198

Material types – Suction cup				
Material	N	U	S	F
Shore hardness	50 ±5	60 ±5	50 ±5	60 ±5
Colour	Black	Blue	Transparent	Grey
Material	Nitrile rubber	Polyurethane	Silicone	Fluoro rubber
Note on materials	RoHS-compliant			
	Free of copper and PTFE			

Ambient conditions – Suction cup				
Material	N	U	S	F
Ambient temperature [°C]	–10 ... +70	–20 ... +60	–30 ... +180	–10 ... +200
Corrosion resistance CRC <sup>1)</sup>	1			





1) Corrosion resistance class 1 according to Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

# Suction grippers ESG for suction cup Ø 150 and 200

FESTO



Technical data



Suction cup holder size 6		
Holder type HA		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>
		G $\frac{1}{4}$
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M24x2
	Max. tightening torque [Nm]	50
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M20x2
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	200
Holder type HB		
Holder type HB		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>
		G $\frac{1}{4}$
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M16x2
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M20x2
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	271
Holder type HC		
Holder type HC		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>
		G $\frac{1}{4}$
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M30x2
	Max. tightening torque [Nm]	50
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M20x2
	Height compensation [mm]	20
	Min. spring force [N]	12
	Max. spring force [N]	22
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	472
Holder type HCL		
Holder type HCL		Vacuum port <span style="border: 1px solid black; padding: 0 2px;">1</span>
		G $\frac{1}{4}$
	Mounting thread <span style="border: 1px solid black; padding: 0 2px;">2</span>	M30x2
	Max. tightening torque [Nm]	50
	Suction cup connection <span style="border: 1px solid black; padding: 0 2px;">3</span>	M20x2
	Height compensation [mm]	40
	Min. spring force [N]	15
	Max. spring force [N]	32
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	560

# Suction grippers ESG for suction cup Ø 150 and 200

FESTO

Technical data

Suction cup holder size 6		
	Holder type HD	Vacuum port <b>1</b>
		G1/4
	Mounting thread <b>2</b>	M30x2
	Max. tightening torque [Nm]	50
	Suction cup connection <b>3</b>	M20x2
	Height compensation [mm]	20
	Min. spring force [N]	12
	Max. spring force [N]	22
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	472

	Holder type HDL	Vacuum port <b>1</b>
		G1/4
	Mounting thread <b>2</b>	M30x2
	Max. tightening torque [Nm]	50
	Suction cup connection <b>3</b>	M20x2
	Height compensation [mm]	40
	Min. spring force [N]	15
	Max. spring force [N]	32
	Temperature range [°C]	-10 ... +60
	Materials	Steel
	Weight [g]	560

# Suction grippers ESG – Round design

Ordering data – Modular product system

**FESTO**

Mandatory data					→
Holder size	Module No.	Gripper function	Suction cup Ø	Suction cup design/suction cup material	
1	189167 189168	ESG	2	SN, SU, SS, SF, SNA	
			4	EN, EU, ES, EF	
2	189169 189170		6	BN, BU, BS, BT	
			8	CN, CS	
3	189171 189172		10	GT	
			15		
4	189173 189174 189175 189176		20		
			30		
			40		
			50		
5	189177 189178 189179		60		
			80		
			100		
6	189180 189181		150		
			200		
	Ord. example 189167	ESG	2	SN	

Ordering table – Suction cup Ø 2 ... 50 mm														
Size	Ø 2	Ø 4	Ø 6	Ø 8	Ø 10	Ø 15	Ø 20	Ø 30	Ø 40	Ø 50	Conditio ns	Code	Enter code	
Holder size	1		2		3		4							
M	Module No.	189167	189168	189169	189170	189171	189172	189173	189174	189175	189176			
	Gripper function	Vacuum suction gripper, round design											ESG	ESG
	Suction cup Ø [mm]	2	4	6	8	10	15	20	30	40	50		-...	
	Standard suction cup	Nitrile rubber (NBR)											-SN	
		Polyurethane (PU)											-SU	
		Silicone (SI)											-SS	
		Fluoro rubber (FPM)											-SF	
		Butadiene rubber (BR) anti-static											-SNA	
	Extra deep suction cup	–					Nitrile rubber (NBR)						-EN	
		–					Polyurethane (PU)						-EU	
		–					Silicone (SI)						-ES	
		–					Fluoro rubber (FPM)						-EF	
	Bellows, 1.5 convolutions	–				(NBR)	–	Nitrile rubber (NBR)					-BN	
		–				(PU)	–	Polyurethane (PU)					-BU	
		–				(SI)	–	Silicone (SI)					-BS	
		–				Thermoplastic							-BT	
	Bellows, 3.5 convolutions	–				(NBR)	–	Nitrile rubber (NBR)					-CN	
		–				(SI)	–	Silicone (SI)					-CS	
	Bell-shaped	–							Thermoplastic				-GT	
	Suction cup holder	Male thread, 2 nuts, connection on top											-HA	
		Female thread, connection on side											-HB	
		Male thread, 2 nuts, connection on top, short height compensator											-HC	
		–	Male thread, 2 nuts, connection on top, long height compensator										-HCL	
		Male thread, 2 nuts, connection on side, short height compensator											-HD	
		–	Male thread, 2 nuts, connection on side, long height compensator										-HDL	
		Male thread, connection on top, screw-in thread											-HE	
		Male thread, connection on top, short height compensator, screw-in thread											-HF	
	Connection	Push-in connector for plastic tubing										1	-QS	
		Barbed fitting connector for plastic tubing										1	-PK	
0	Angle compensator	–				Ball joint with ±30° deflection							-WA	
	Filter	–				Filter							-F	
	Suction cup insert	–				Sintered	–	Sintered				2	-ES	

1 QS, PK Not with suction cup holder HE, HF

2 ES Can only be selected in combination with CN, CS

# Suction grippers ESG – Round design

FESTO

Ordering data – Modular product system

M Mandatory data		O Options		
<b>Suction cup holder</b>	<b>Connection</b>	<b>Angle compensator</b>	<b>Filter</b>	<b>Suction cup insert</b>
HA HB HC HCL HD HDL HE HF	QS PK G	WA	F	ES
- HA	- QS	-	-	-

Ordering table – Suction cup Ø 60 ... 200 mm									
Size	Ø 60	Ø 80	Ø 100	Ø 150	Ø 200	Conditio ns	Code		Enter code
Holder size	5			6					
<b>M</b>	Module No.	<b>189177</b>	<b>189178</b>	<b>189179</b>	<b>189180</b>	<b>189181</b>			
	Gripper function	Vacuum suction gripper, round design						<b>ESG</b>	ESG
	Suction cup Ø [mm]	60	80	100	150	200		-...	
	Standard suction cup	Nitrile rubber (NBR)						<b>-SN</b>	
		Polyurethane (PU)						<b>-SU</b>	
		Silicone (SI)						<b>-SS</b>	
		Fluoro rubber (FPM)						<b>-SF</b>	
	Extra deep suction cup	Nitrile rubber (NBR)			–			<b>-EN</b>	
		Polyurethane (PU)			–			<b>-EU</b>	
		Silicone (SI)			–			<b>-ES</b>	
		Fluoro rubber (FPM)			–			<b>-EF</b>	
	Bellows, 1.5 convolutions	–	Nitrile rubber (NBR)	–				<b>-BN</b>	
		–	Polyurethane (PU)	–				<b>-BU</b>	
		–	Silicone (SI)	–				<b>-BS</b>	
		–	Thermoplastic	–				<b>-BT</b>	
	Bell-shaped	Thermoplastic			–			<b>-GT</b>	
	Suction cup holder	Male thread, 2 nuts, connection on top						<b>-HA</b>	
		Female thread, connection on side						<b>-HB</b>	
		Male thread, 2 nuts, connection on top, short height compensator						<b>-HC</b>	
		Male thread, 2 nuts, connection on top, long height compensator						<b>-HCL</b>	
		Male thread, 2 nuts, connection on side, short height compensator						<b>-HD</b>	
		Male thread, 2 nuts, connection on side, long height compensator						<b>-HDL</b>	
		Male thread, connection on top, screw-in thread			–			<b>-HE</b>	
		Connection	Threaded connection					<b>[3]</b>	<b>-G</b>
<b>O</b>	Angle compensator	Ball joint with ±30° deflection			–			<b>-WA</b>	

[3] Not in combination with HE

# Suction grippers ESG – Oval design

Ordering data – Modular product system

FESTO

[M] Mandatory data →				
Holder size	Module No.	Gripper function	Suction cup Ø	Suction cup design/suction cup material
4	189182 189183 189184 189185 189186 189187 189188	ESG	4x10 4x20 6x10 6x20 8x20 8x30 10x30	ON
5	189189 189190 189191 189192		15x45 20x60 25x75 30x90	
	Ord. example			
		ESG	-	ON

Order table – Suction cup dimensions 4x10 ... 10x30 mm										
Size (suction cup dimensions)	4x10	4x20	6x10	6x20	8x20	8x30	10x30	Condi- tions	Code	Enter code
Holder size	4									
[M] Module No.	189182	189183	189184	189185	189186	189187	189188			
Gripper function	Vacuum suction gripper, oval design								ESG	ESG
Size [mm]	4x10	4x20	6x10	6x20	8x20	8x30	10x30		-...	
Oval suction cup	Nitrile rubber (NBR)								-ON	-ON
Suction cup holder	Male thread, 2 nuts, connection on top								-HA	
	Female thread, connection on side								-HB	
	Male thread, 2 nuts, connection on top, short height compensator								-HC	
	Male thread, 2 nuts, connection on top, long height compensator								-HCL	
	Male thread, 2 nuts, connection on side, short height compensator								-HD	
	Male thread, 2 nuts, connection on side, long height compensator								-HDL	
	Male thread, connection on top, screw-in thread								-HE	
	Male thread, connection on top, short height compensator, screw-in thread								-HF	
Connection	Push-in connector for plastic tubing							1	-QS	
	Barbed fitting connector for plastic tubing							1	-PK	
[O] Filter	Filter								-F	

[1] QS, PK Not with suction cup holder HE, HF.

Transfer order code

ESG -  - ON



# Suction grippers ESG – Oval design

FESTO

Ordering data – Modular product system

M Mandatory data		O Options
<b>Suction cup holder</b>	<b>Connection</b>	<b>Filter</b>
HA HB HC HCL HD HDL HE HF	QS PK G	F
-	-	-

Order table – Suction cup dimensions 15x45 ... 30x90 mm							
Size (suction cup dimensions)	15x45	20x60	25x75	30x90	Conditio ns	Code	Enter code
Holder size	5						
M Module No.	189189	189190	189191	189192			
Gripper function	Vacuum suction gripper, oval design					ESG	ESG
Size [mm]	15x45	20x60	25x75	30x90		-...	
Oval suction cup	Nitrile rubber (NBR)					-ON	-ON
Suction cup holder	Male thread, 2 nuts, connection on top					-HA	
	Female thread, connection on side					-HB	
	Male thread, 2 nuts, connection on top, short height compensator					-HC	
	Male thread, 2 nuts, connection on top, long height compensator					-HCL	
	Male thread, 2 nuts, connection on side, short height compensator					-HD	
	Male thread, 2 nuts, connection on side, long height compensator					-HDL	
	Male thread, connection on top, screw-in thread					-HE	
	Threaded connection					-G	

Transfer order code

-		-		-	
---	--	---	--	---	--

## Product Range and Company Overview

### A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



**Custom Automation Components**  
Complete custom engineered solutions



**Custom Control Cabinets**  
Comprehensive engineering support and on-site services



**Complete Systems**  
Shipment, stocking and storage services

### The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



**Electromechanical**  
Electromechanical actuators, motors, controllers & drives



**Pneumatics**  
Pneumatic linear and rotary actuators, valves, and air supply



**PLCs and I/O Devices**  
PLC's, operator interfaces, sensors and I/O devices

### Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

### Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

# Festo North America

## Festo Regional Contact Center

5300 Explorer Drive  
Mississauga, Ontario L4W 5G4  
Canada

### USA Customers:

For ordering assistance,

**Call:** 1.800.99.FESTO (1.800.993.3786)

**Fax:** 1.800.96.FESTO (1.800.963.3786)

**Email:** [customer.service@us.festo.com](mailto:customer.service@us.festo.com)

For technical support,

**Call:** 1.866.GO.FESTO (1.866.463.3786)

**Fax:** 1.800.96.FESTO (1.800.963.3786)

**Email:** [product.support@us.festo.com](mailto:product.support@us.festo.com)

### Canadian Customers:

**Call:** 1.877.GO.FESTO (1.877.463.3786)

**Fax:** 1.877.FX.FESTO (1.877.393.3786)

**Email:** [festo.canada@ca.festo.com](mailto:festo.canada@ca.festo.com)

## USA Headquarters

Festo Corporation  
395 Moreland Road  
P.O. Box 18023  
Hauppauge, NY 11788, USA  
[www.festo.com/us](http://www.festo.com/us)

## USA Sales Offices

### Appleton

North 922 Tower View Drive, Suite N  
Greenville, WI 54942, USA

### Boston

120 Presidential Way, Suite 330  
Woburn, MA 01801, USA

### Chicago

1441 East Business Center Drive  
Mt. Prospect, IL 60056, USA

### Dallas

1825 Lakeway Drive, Suite 600  
Lewisville, TX 75057, USA

### Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320  
Auburn Hills, MI 48326, USA

### New York

395 Moreland Road  
Hauppauge, NY 11788, USA

### Silicon Valley

4935 Southfront Road, Suite F  
Livermore, CA 94550, USA

## United States



**USA Headquarters, East:** Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: [info@festo-usa.com](mailto:info@festo-usa.com)

[www.festo.com/us](http://www.festo.com/us)

## Canada



**Headquarters:** Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: [festo.canada@ca.festo.com](mailto:festo.canada@ca.festo.com)

[www.festo.ca](http://www.festo.ca)

## Mexico



**Headquarters:** Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,  
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: [festo.mexico@mx.festo.com](mailto:festo.mexico@mx.festo.com)

[www.festo.com/mx](http://www.festo.com/mx)

## Central USA

Festo Corporation  
1441 East Business  
Center Drive  
Mt. Prospect, IL 60056, USA  
Phone: 1.847.759.2600  
Fax: 1.847.768.9480



## Western USA

Festo Corporation  
4935 Southfront Road,  
Suite F  
Livermore, CA 94550, USA  
Phone: 1.925.371.1099  
Fax: 1.925.245.1286



## Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark  
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia  
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore  
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

[www.festo.com](http://www.festo.com)