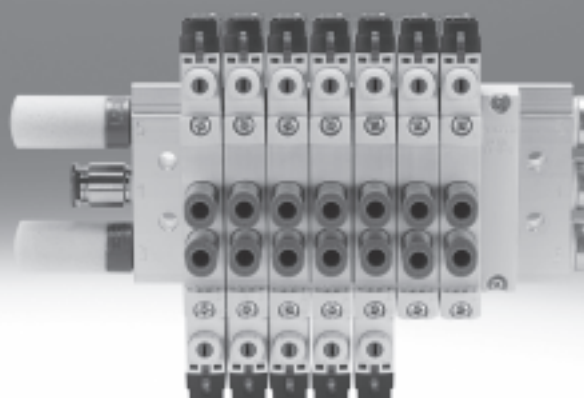


Solenoid valves VUVG/valve terminals VTUG

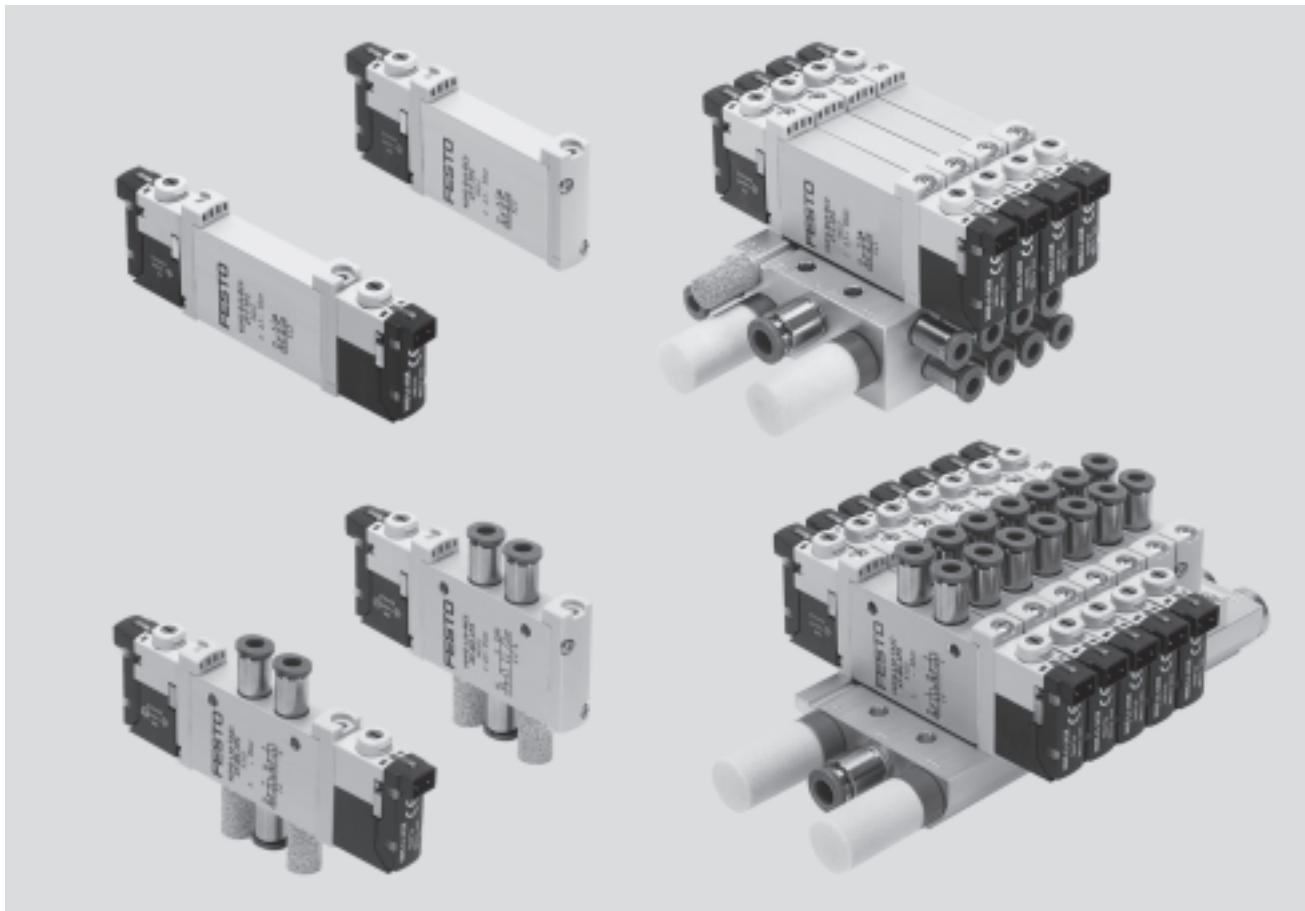
FESTO



Solenoid valves VUVG

Key features

FESTO



Innovative

- Both internal and external pilot air supply can be used for manifolds with sub-base valves
- Connection technology easy to change via the E-box
- Max. pressure 10 bar

Versatile

- Wide range of valve functions
- Choice of quick plug connectors
- In-line valves can be used as individual valves or manifold valves
- M5 and M7 in-line valves can be combined on one manifold rail
- Identical sub-base valves for M5 or M7 manifold rail
- Manifolds with pressure zones
- IP40, IP65

Reliable

- Sturdy and durable metal components
 - Valves
 - Manifold rails
- Fast troubleshooting thanks to 360° LED display
- Convenient servicing thanks to valves that can be replaced quickly and easily
- Choice of manual override: non-detenting, detenting or covered

Easy to mount

- Secure mounting on wall or H-rail
- Easy mounting thanks to captive screws and seal
- Connection technology easy to change via the E-box
- Inscription label holder for labelling

Valve terminal configurator

Download CAD Data → www.festo.com/us/cad

A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product. Valve terminals VTUG are ordered via an identcode.

Ordering system for valve terminal VTUG

- Individual electrical connection
- Internet: vtug


All valve terminals are supplied fully assembled and individually tested. This reduces assembly and installation time to a minimum.

Solenoid valves VUVG


Key features – Pneumatic components

FESTO


Individual valves and valve manifolds




In-line valve VUVG-L as individual valve




In-line valve VUVG-S for manifold assembly



Valve manifold VTUG consisting of in-line valves VUVG-S




Sub-base valve VUVG-B for manifold assembly



Valve manifold VTUG consisting of sub-base valves VUVG-B

Basic valves VUVG



- Width 10 mm and 14 mm
- In-line valves
- Sub-base valves
- 2x3/2-way, 5/2-way and 5/3-way valves

E-boxes



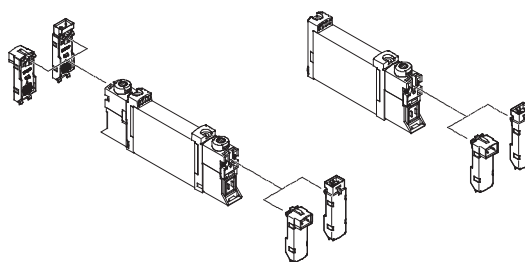
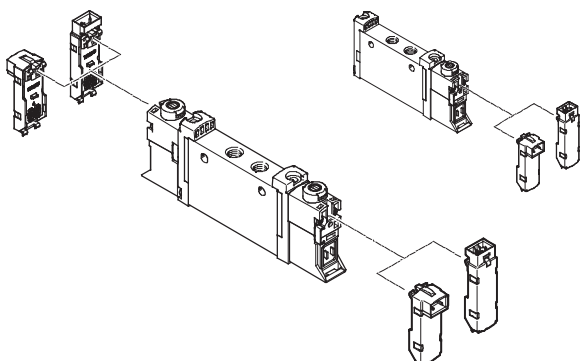
H2



H3

- 5, 12 and 24 V DC
- With or without holding current reduction
- LED

Basic valve and E-box combinations



Note


More E-boxes → page 61

Solenoid valves VUVG

Key features – Pneumatic components


FESTO

Cover caps for manual override



- Closed cover cap for covering the manual override
- Slotted cover cap for enabling only non-detenting operation of the manual override

Inscription label holder



- The inscription label holder can be used in place of the slotted cover cap
- The hinged inscription label holder covers the mounting screw and the manual override

Valve terminal configurator

Download CAD Data → www.festo.com/us/cad


A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product. Valve terminals VTUG are ordered via an identcode.

All valve terminals are supplied fully assembled and individually tested. This reduces assembly and installation time to a minimum.

Ordering system for valve terminal VTUG


- Individual electrical connection
- Internet: vtug

Manifold rail for in-line valves



- For in-line valves M3, M5, M7 and G $\frac{1}{8}$, width 10
- For 2x3/2-way, 5/2-way and 5/3-way valves
- 2 to 10 and 12, 14, 16 valve positions

Manifold rail for sub-base valves



- For sub-base valves 10, 10A and 14, width 10
- Manifold rail with M5 or M7 working ports
- For 2x3/2-way, 5/2-way and 5/3-way valves
- 2 to 10, 12, 14 and 16 valve positions
- The sub-base valves always have external pilot air. The pilot air is set via the manifold rail. A short and a long blanking plug are included with the manifold rail for this purpose.

Note

Pressurisation and exhaust at both ends is recommended for an optimised flow rate in cases where there are multiple valves switching simultaneously.

Blanking plate for vacant position



- Vacant position cover

Supply plate



- For additional air supply and exhaust via a valve position

Separator for pressure zones



- For creating multiple pressure zones in a valve manifold

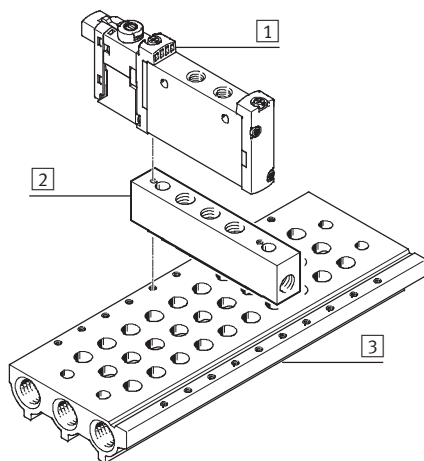
Solenoid valves VUVG

Key features – Pneumatic components

FESTO

Vertical pressure supply plate

For semi in-line valves M5/M7 and G1/8



- 1 Semi in-line valve VUVG
- 2 Vertical pressure supply plate
- 3 Manifold rail

The vertical pressure supply plate enables separate pressure supply and exhausting for the valve mounted on it.
If two vertical pressure supply plates are mounted one on top of the other, the valve mounted on top can be supplied with compressed air and exhausted completely independently of the valve terminal (terminal code CS).

Code		Type	Width		Description
			M5/M7	G1/8	
ZU		VABF-L1-P3A	■	■	Plate with port 1 for supplying an individual operating pressure or separate exhausting (reverse operation) for a valve position.
ZV		VABF-L1-P7A	■	■	Plate with ports 3 and 5 for exhausting the valve or supplying an individual operating pressure (reverse operation) for a valve position.

Solenoid valves VUVG

Key features – Pneumatic components

FESTO

Creating pressure zones and separating exhaust air

Compressed air is supplied and exhausted via the manifold rail and via supply plates.

The position of the supply plates and duct separations can be freely selected with the VUVG.

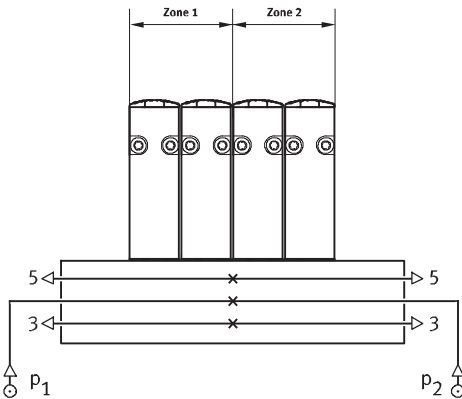

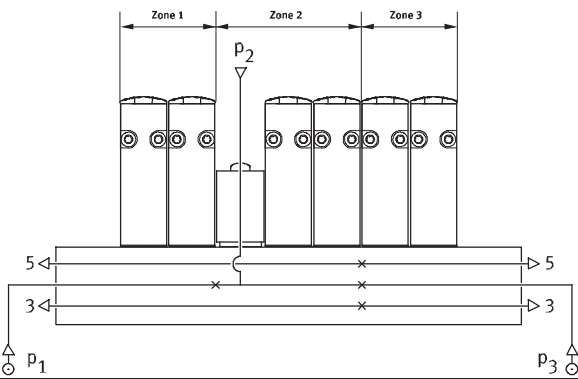
Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by means of appropriate duct separation.

Pressure zone separation can be used for the following ducts:


- Duct 1
- Duct 3
- Duct 5

Note

- Use a separator if the exhaust air pressures are high
- Use at least one supply plate/supply for each pressure zone
- Pressure zone separation is not possible with pilot air supply (duct 12/14)

Duct separation	Description	
	The pressure zones can be freely configured with the VUVG. The following duct separations are possible:	
	• Duct 1 closed	
	• Duct 1/3/5 closed	
	Duct 3/5 closed	
	The number of pressure zones with the VUVG is only limited by the number of valve positions on the manifold rail. Note that each supply plate occupies one valve position.	

Separator VABD



Note

As the separators are mounted from only one side using a slotted screwdriver, several pressure zones can be created in one profile.

Solenoid valves VUVG

Key features – Pneumatic components

FESTO

Pilot air supply

Internal pilot air supply

Internal pilot air supply can be chosen with an operating pressure in the range 1.5 ... 8 bar, 2.5 ... 8 bar or 3 ... 8 bar (depending on the valve used).

The pilot air supply is branched from duct 1 (compressed air supply) using an internal connection.

External pilot air supply

External pilot air supply is required for vacuum operation.

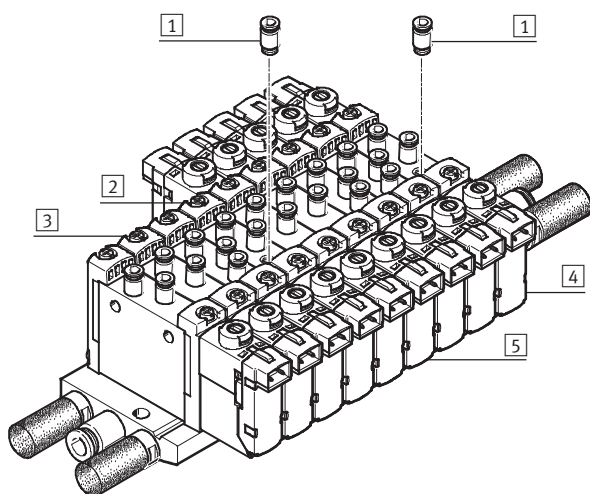
The port for external pilot air supply (port 12/14) is located on the valve in the case of in-line valves and on the manifold rail in the case of sub-base valves.

Pilot exhaust air port

With sub-base valves, the pilot air is exhausted via duct 82/84 of the manifold rail.

With in-line valves, the pilot exhaust air escapes via exhaust holes.

Pilot air supply with in-line and semi in-line valves



- 1 QS fitting for external pilot air at port 12/14
- 2 Single solenoid valve with external pilot air supply
- 3 Single solenoid valve with internal pilot air supply
- 4 Double solenoid valve with external pilot air supply
- 5 Double solenoid valve with internal pilot air supply

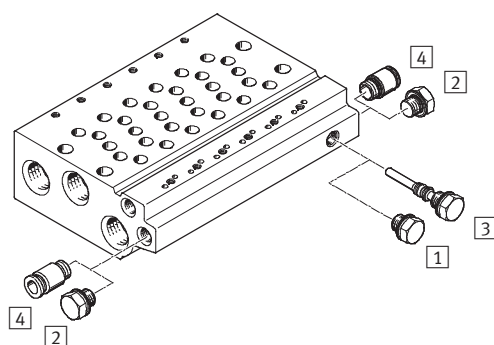
The internal pilot air is branched from port 1 in the valve body. The external pilot air (port 12/14) is supplied individually at each valve housing.

Note

Semi in-line valves cannot be supplied centrally with external

pilot air via the manifold rail.

Pilot air supply with sub-base valves



- 1 Blanking plug, short, with internal pilot air
- 2 Blanking plug for duct 12/14 with internal pilot air
- 3 Blanking plug, long, with external pilot air
- 4 QS fitting for duct 12/14 with external pilot air

The manifold rails for sub-base valves have an internal conduit between duct 12/14 and duct 1. Internal or external pilot air supply is selected by inserting a blanking plug into this conduit.

Solenoid valves VUVG

Key features – Pneumatic components

FESTO

Operation with different pressures

Vacuum operation

Points to note with 3/2-way valves

The 3/2-way valves are available in a design with two valves in one valve body and with pneumatic spring return. With these valves, the energy for the return movement is obtained from port 1.

Vacuum operation is therefore only possible at port 3 and 5, not at port 1.

With external pilot air supply, vacuum can be connected at port 1, 3, 5 with the 5/2-way and 5/3-way valves.

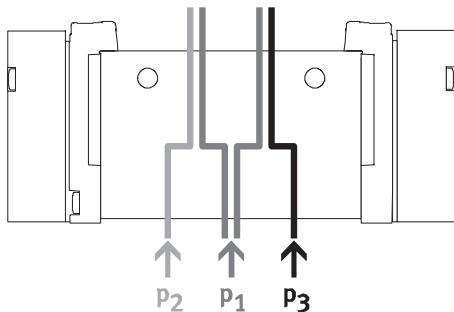
Reverse operation

The 3/2-way valves with pneumatic spring are not suitable for reverse operation, since at least the minimum pilot pressure must be present in duct 1.

Note

Pressure must be present at port 1.

Pressure deflector (internal pilot air)



- If two different pressures are required.

- Different pressures can be supplied at duct 1, 3 and 5.

Note

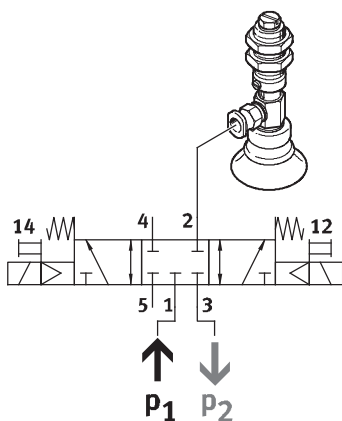
- With internal pilot air, the minimum pilot pressure must be adhered to in duct 1
- With 2x3/2-way valves without

spring return, the minimum pilot pressure must always be adhered to in duct 1

Advantages

- Any pressure or vacuum can be connected at duct 3 and 5 both with external and internal pilot air

Vacuum, ejector pulse and normal position





Vacuum, ejector pulse and normal position with internal pilot air can be achieved by connecting vacuum


at duct 3 and pressure for the ejector pulse at duct 1.



Solenoid valves VUVG

Product range overview

FESTO

Design	Working port	Type code	Functions and flow rate [l/min]												→ Page/ Internet
			T32C	T32U	T32H	T32C/M	T32U/M	T32H/M	M52	M52/M	B52	P53C	P53U	P53E	
In-line valve as individual valve, solenoid valve VUVG-L															
	M3	10A	–	–	–	–	–	–	■	■	■	■	■	■	16
	M5	10	■	■	■	■	■	■	■	■	■	■	■	■	22
	M7	10	■	■	■	■	■	■	■	■	■	■	■	■	24
	G1/8	14	■	■	■	■	■	■	■	■	■	■	■	■	29
	G1/4	18	■	■	■	■	■	■	■	■	■	■	■	■	34
In-line valve for manifold assembly, solenoid valve VUVG-S															
	M3	10A	–	–	–	–	–	–	■	■	■	■	■	■	16
	M5	10	■	■	■	■	■	■	■	■	■	■	■	■	22
	M7	10	■	■	■	■	■	■	■	■	■	■	■	■	24
	G1/8	14	■	■	■	■	■	■	■	■	■	■	■	■	29
	G1/4	18	■	■	■	■	■	■	■	■	■	■	■	■	34










Design	Working port	Type code	Functions and flow rate [l/min]												➔ Page/ Internet
			T32C	T32U	T32H	T32C/M	T32U/M	T32H/M	M52	M52/M	B52	P53C	P53U	P53E	
Sub-base valve, solenoid valve VUVG-B															
	M5	10A	–	–	–	–	–	–	■	■	■	■	■	■	39
	M5	10	■	■	■	■	■	■	■	■	■	■	■	■	44
	M7	10	■	■	■	■	■	■	■	■	■	■	■	■	44
	G1/8	14	■	■	■	■	■	■	■	■	■	■	■	■	49
	G1/4	18	■	■	■	■	■	■	■	■	■	■	■	■	54

Design	Working port	Type code	Description	→ Page/ Internet
Manifold rail VABM- ... -S- ... , for in-line valves (manifold assembly)				
	–	–	Valve size M3, M5, M7, G1/8, G1/4	vabm
Manifold rail VABM, for sub-base valves				
	–	10AW	Connection size M3	vabm
	–	10W	Connection size M5	
	–	10HW	Connection size M7	
	–	14W	Connection size G1/8	
	–	18W	Connection size G1/4	

Solenoid valves VUVG

Overview of valve functions










FESTO

Valve	Valve code	Description	Valve terminal/position function order code	Size			
				M3	M5/M7	G1/8	G1/4
2x3/2-way valve, normally closed, pneumatic spring							
	T32C-A	In-line valve, internal pilot air supply	K				
		In-line valve, external pilot air supply		–	■	■	■
		Sub-base valve, external pilot air supply					
2x3/2-way valve, normally open, pneumatic spring							
	T32U-A	In-line valve, internal pilot air supply	N				
		In-line valve, external pilot air supply		–	■	■	■
		Sub-base valve, external pilot air supply					
2x3/2-way valve, 1x normally open, 1x normally closed, pneumatic spring							
	T32H-A	In-line valve, internal pilot air supply	H				
		In-line valve, external pilot air supply		–	■	■	■
		Sub-base valve, external pilot air supply					

Solenoid valves VUVG

Overview of valve functions

FESTO

Valve	Valve code	Description	Valve terminal/position function order code	Size			
				M3	M5/M7	G1/8	G1/4
2x3/2-way valve, normally closed, mechanical spring							
	T32C-M	In-line valve, internal pilot air supply	VK	-	■	■	■
		In-line valve, external pilot air supply					
		Sub-base valve, external pilot air supply					
2x3/2-way valve, normally open, mechanical spring							
	T32U-M	In-line valve, internal pilot air supply	VN	-	■	■	■
		In-line valve, external pilot air supply					
		Sub-base valve, external pilot air supply					
2x3/2-way valve, 1x normally open, 1x normally closed, mechanical spring							
	T32H-M	In-line valve, internal pilot air supply	VH	-	■	■	■
		In-line valve, external pilot air supply					
		Sub-base valve, external pilot air supply					

Solenoid valves VUVG

Overview of valve functions










FESTO

Valve	Valve code	Description	Valve terminal/position function order code	Size			
				M3	M5/M7	G1/8	G1/4
5/2-way double solenoid valve							
	B52	In-line valve, internal pilot air supply	J				
		In-line valve, external pilot air supply		■	■	■	■
		Sub-base valve, external pilot air supply					
5/2-way single solenoid valve, pneumatic spring							
	M52-A	In-line valve, internal pilot air supply	M				
		In-line valve, external pilot air supply		-	-	■	-
		Sub-base valve, external pilot air supply					
5/2-way single solenoid valve, mechanical spring							
	M52-M	In-line valve, internal pilot air supply	A				
		In-line valve, external pilot air supply		■	■	■	■
		Sub-base valve, external pilot air supply					
5/2-way single solenoid valve, pneumatic/mechanical spring							
	M52-R	In-line valve, internal pilot air supply	P				
		In-line valve, external pilot air supply		■	■	-	■
		Sub-base valve, external pilot air supply					

Solenoid valves VUVG

Overview of valve functions

FESTO


Valve	Valve type code	Description	Valve terminal/position function order code	Size			
				M3	M5/M7	G1/8	G1/4
5/3-way valve, mid-position closed							
	P53C	In-line valve, internal pilot air supply	G				
		In-line valve, external pilot air supply		■	■	■	■
		Sub-base valve, external pilot air supply					
5/3-way valve, mid-position pressurised							
	P53U	In-line valve, internal pilot air supply	B				
		In-line valve, external pilot air supply		■	■	■	■
		Sub-base valve, external pilot air supply					
5/3-way valve, mid-position exhausted							
	P53E	In-line valve, internal pilot air supply	E				
		In-line valve, external pilot air supply		■	■	■	■
		Sub-base valve, external pilot air supply					

Solenoid valves VUVG

Sample system overview – VUVG-L10 and VUVG-S10, in-line valves M5/M7

FESTO

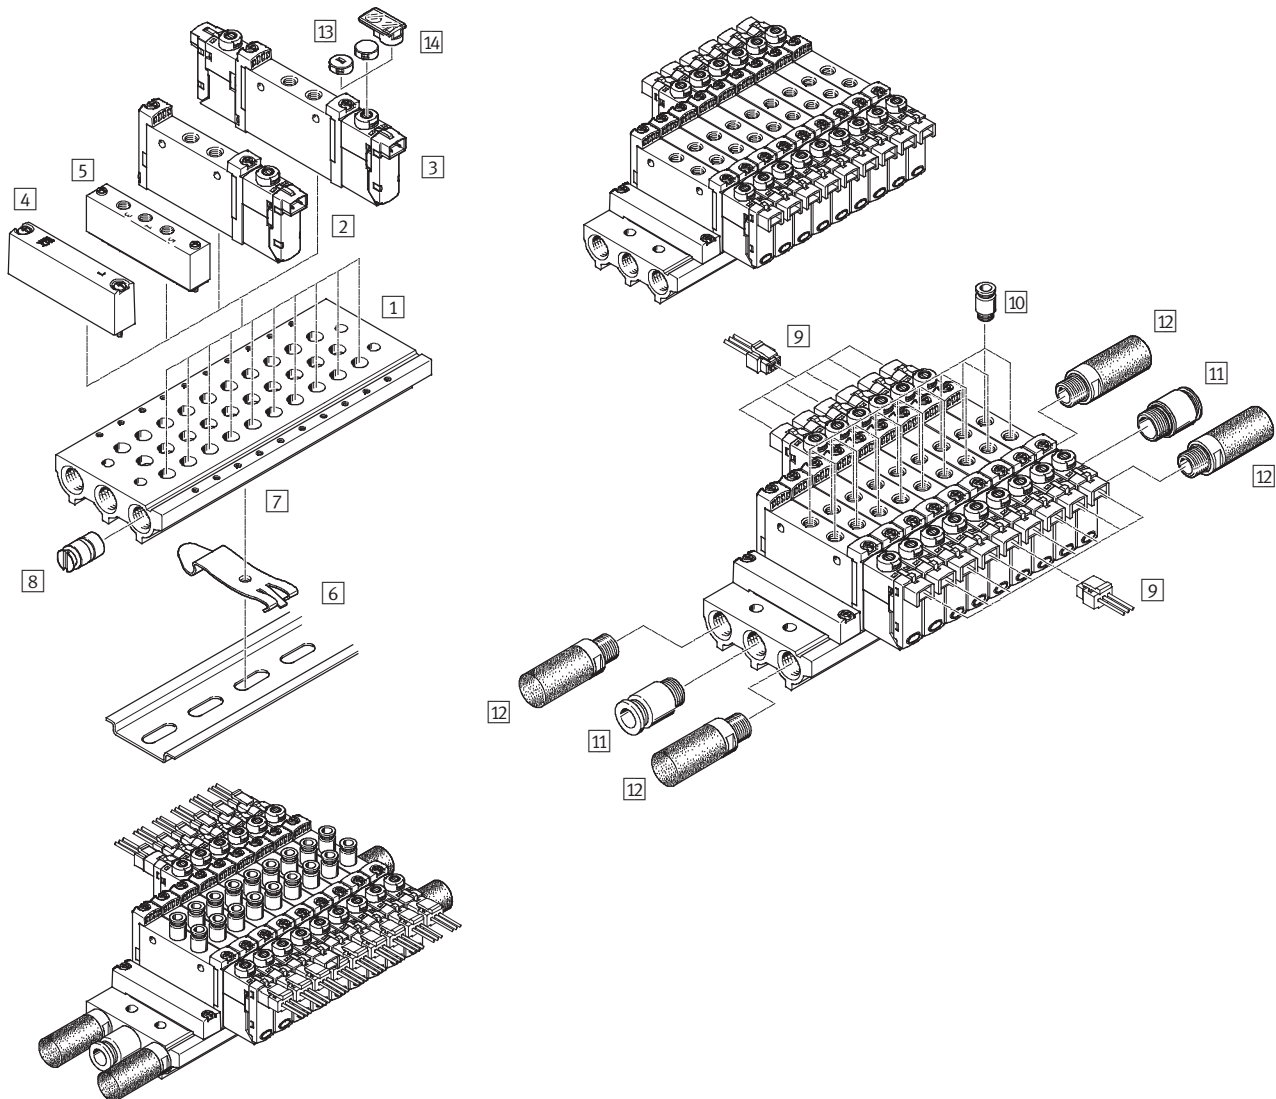Manifold assembly




Manifold assembly and accessories			
	Type	Brief description	→ Page/Internet
1	Manifold rail	VABM-L1-10S-G18-...	For 2 to 10, 12, 14 and 16 valve positions
2	Solenoid valve	VUVG- ...	In-line valve, 5/2-way single solenoid
3	Solenoid valve	VUVG- ...	In-line valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way valve
4	Blanking plate	VABB-L1-10-S	For covering an unused valve position
5	Supply plate	VABF-L1-10-P3A4- ...	For air supply port 1 and outlet port 3 and 5
6	H-rail	NRH-35-2000	For mounting the valve manifold
7	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve manifold on an H-rail
8	Separator	VABD-...	For creating pressure zones
9	Plug socket with cable	NEBV-H1G2-...-LE2	For E-box H2 and H3
10	Push-in fitting	QS...	Push-in fitting for outlet port 2 and 4
11	Push-in fitting	QS...	Push-in fitting for air supply port 1
12	Silencer	U...	For outlet port 3 and 5
13	Cover cap	VMPA-HB...-B	For manual override
14	Inscription label holder	ASLR-D	For labelling the valves, covering the mounting screw and the manual override

Solenoid valves VUVG

Sample system overview – VUVG-B10, sub-base valves

FESTO

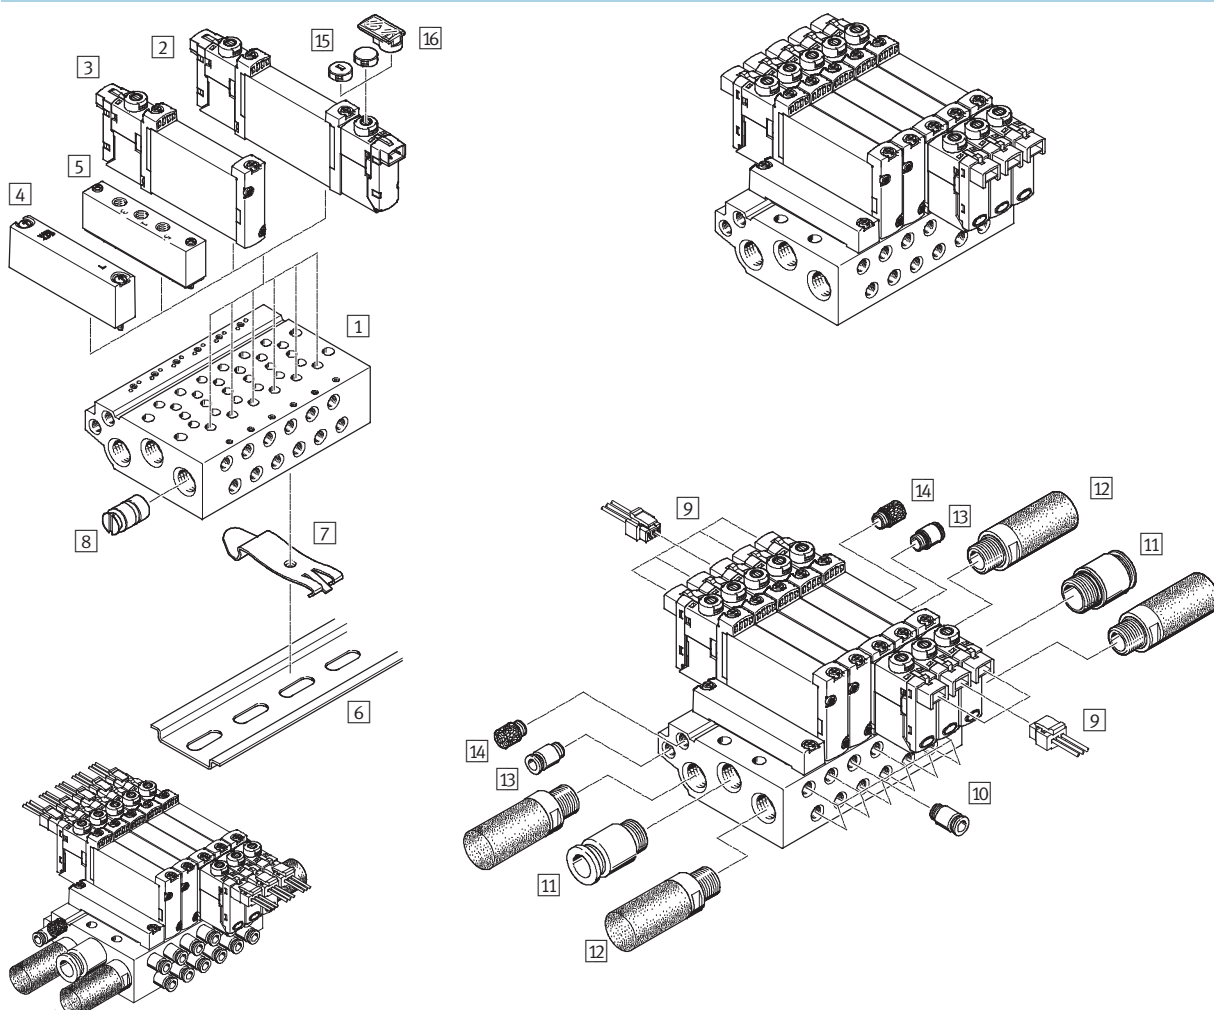Manifold assembly



Manifold assembly and accessories				
	Type	Brief description	➔ Page/Internet	
1	Manifold rail	VABM-L1-10 ...-G18- ...	For 2 to 10, 12, 14 and 16 valve positions	48
2	Solenoid valve	VUVG- ...	Sub-base valve, 5/2-way single solenoid	44
3	Solenoid valve	VUVG- ...	Sub-base valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way valve	44
4	Blanking plate	VABB-L1-10-W	For covering an unused valve position	48
5	Supply plate	VABF-L1-10-P3A4- ...	For air supply port 1 and outlet port 3 and 5	48
6	H-rail	NRH-35-2000	For mounting the valve manifold	65
7	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve manifold on an H-rail	65
8	Separator	VABD- ...	For creating pressure zones	48
9	Plug socket with cable	NEBV-H1G2-KN-....-LE2	For E-box H2 and H3	63
10	Push-in fitting	QS...	Push-in fitting for outlet port 2 and 4	quick star
11	Push-in fitting	QS...	Push-in fitting for air supply port 1	quick star
12	Silencer	U...	For outlet port 3 and 5	64
13	Push-in fitting	QS...	Push-in fitting for pilot air supply port 12/14	quick star
14	Silencer	U...	Silencer for pilot air outlet 82/84	64
15	Cover cap	VMPA-HB....-B	For manual override	65
16	Inscription label holder	ASLR-D	For labelling the valves, covering the mounting screw and the manual override	65

Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

FESTO

Technical data

Function	Width
5/2-way, single solenoid	
5/2-way, double solenoid	Flow rate
5/3C, 5/3U, 5/3E	90 ... 100 l/min
	Voltage
Circuit symbol → page 10	5, 12 and 24 V DC



General technical data						
Valve function	M52-R	B52	M52-M	P53		
Normal position	–	–	–	C ¹⁾	U ²⁾	E ³⁾
Stable position	Monostable	Bistable	Monostable	Monostable		
Pneumatic spring reset method	Yes ⁵⁾	–	No	No		
Mechanical spring reset method	Yes ⁵⁾	–	Yes	Yes		
Vacuum operation at port 1	Only with external pilot air supply					
Design	Piston spool valve					
Sealing principle	Soft					
Actuation type	Electric					
Type of control	Piloted					
Pilot air supply	Internal or external					
Exhaust function	With flow control					
Manual override	Choice of non-detenting, detenting or covered					
Type of mounting	Optionally via through-holes ⁷⁾ or on manifold rail					
Mounting position	Any					
Nominal size	[mm]	2		1.4	2	
Standard nominal flow rate	[l/min]	100		80	90	
Flow rate on manifold rail	[l/min]	100		80	90	
Switching time on/off	[ms]	7/15	–	7/21	8/25	
Changeover time	[ms]	–	5	–	14	
Width	[mm]	10				
Connection	1, 2, 3, 4, 5; 14	M3				
Product weight	[g]	38	49	37		
Corrosion resistance class	CRC	2 ⁶⁾				

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

FESTO

Technical data

Operating and environmental conditions				
Valve function		M52-R ²⁾	B52	M52-M ³⁾ P53
Operating medium		Compressed air in accordance with ISO 8573-2010 [7:4:4]		
Operating pressure	Internal [bar]	2.5 ... 8	1.5 ... 8	3 ... 8
	External [bar]	-0.9 ... 10		
Pilot pressure ⁴⁾ [bar]		2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature [°C]		-5 ... +50, -5 ... +60 with holding current reduction		
Temperature of medium [°C]		-5 ... +50, -5 ... +60 with holding current reduction		

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via E-box
Operating voltage [V DC]	5, 12 and 24 ±10%
Power [W]	1, reduced to 0.35 with holding current reduction
Duty cycle [%]	100
Protection class to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

FESTO

Technical data

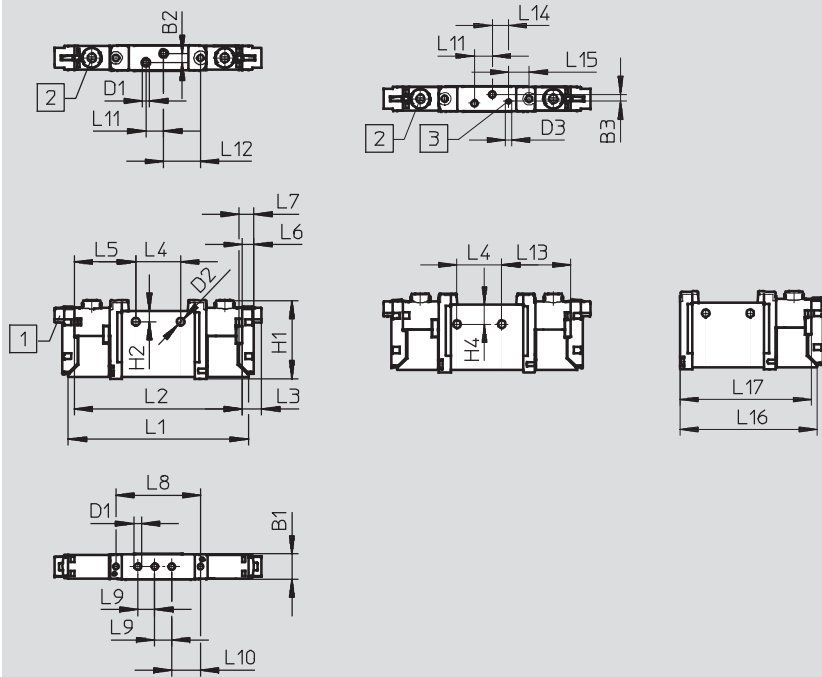
Dimensions

Download CAD Data → www.festo.com/us/cad

5/2-way and 5/3-way valve

Note

More dimensions
E-boxes
→ page 61








1 Horizontal electrical connection

2 Manual override

3 Port for external pilot air supply

Type												
VUVG-L-10 -...-M3 ...	B1	B2	B3	D1	D2	H1	H2	L1	L2	L3	L4	L5
VUVG-S-10 -...-M3 ...	10.2	3.6	2.83	M3	3.2	32.5	4.4	74.3	69.3	8	18.5	25.4
	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17
	4.85	6.15	34.9	7	11.9	7.3	15.25	28.5	6.7	8.54	57.06	54.56

FESTO

VUVG	-	10A	-						
Valve design									
	L								
In-line, individual valve									
	S								
In-line, manifold valve incl. seal and screws									
Width									
10 mm		10A							
Valve functions									
	M52								
	B52								
	P53C								
	P53U								
	P53E								
Reset method									
Mech. spring for M52								M	
Pneu./mech. spring for M52								R	
With B52 and P53								-	
Pilot air supply									
Internal								-	
External								Z	
Manual override									
 Non-detenting								H	
 Covered								S	
- Non-detenting, detenting								T	

19

Solenoid valves VUVG-S10A, in-line valves M3

Manifold assembly

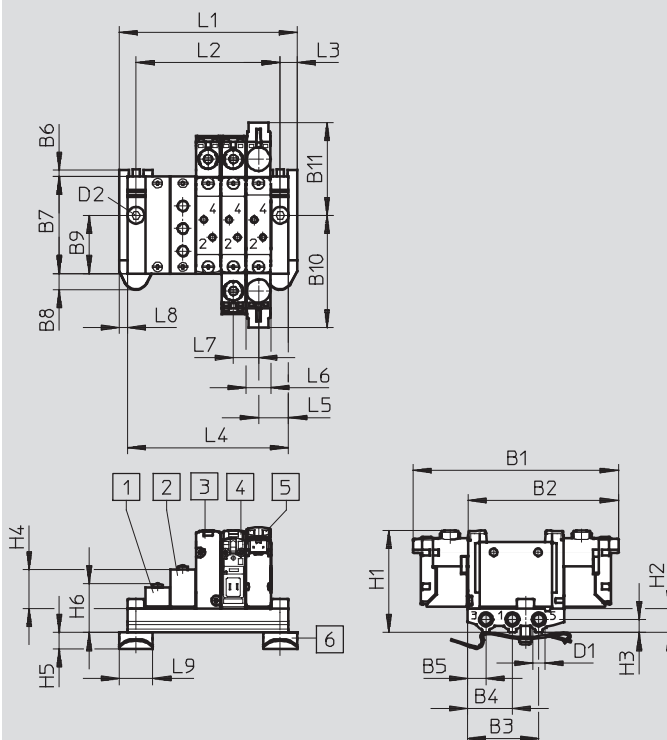
FESTO

In-line valves for
manifold assembly



Dimensions

Download CAD Data → www.festo.com/us/cad



Note

More dimensions
E-boxes
→ page 59

- | | | | |
|------------------------------------|---------------------------------------|---------------------------------------|---|
| 1 Blanking plate VABB-L1-10A-S | 3 Single solenoid valve without E-box | 4 Double solenoid valve without E-box | 5 Solenoid valve, vertical electrical connection |
| 2 Supply plate VABF-L1-10A-P3A4-M3 | | | 6 H-rail mounting (two M4x16 screws to DIN 912 are required for mounting) |

Type												
VUVG-S10A -...-M3 ...	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	D1
	85.3	62.6	29.7	18.7	7.7	3	40.3	6.8	24.2	46.7	38.6	M5
	D2	H1	H2	H3	H4	H5	H6	L3	L5	L6	L7	L8
	Ø 4.5	43.8	10	5.5	16.2	6.8	20.3	7	12.5	10.3	10.5	3.5
	L9											
	14											

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1 [mm]	42.5	53	63.5	74	84.5	95	105.5	116	126.5	147.5	168.5	189.5
L2 [mm]	28.5	39	49.5	60	70.5	81	91.5	102	112.5	133.5	154.5	175.5
L4 [mm]	35.5	46	56.5	67	77.5	88	98.5	109	119.5	140.5	161.5	182.5
VABM weight [g]	26	34	42	50	58	66	74	82	90	106	122	138

FESTO

Ordering data


Technical data – Manifold rails							
	Connection	CRC	Material ⁽²⁾	Operating pressure	Max. tightening torque for assembly [Nm]		
	1, 3, 5			[bar]	Valve	H-rail	Wall
	M5	2 ¹⁾	Wrought aluminium alloy	-0.9 ... 10	0.45	1.5	3

- 1) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Note on materials: RoHS-compliant

Order code – Manifold rails

VABM	-	L1	-	10A	S	-	M5	-	
Manifold assembly parts									Number of valve positions
Manifold rail		VABM							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		L1					M5	M5	
Valve width									
10 mm				10A					
Manifold rail with ports 1, 3, 5									
For M3 in-line valves					S				

Ordering data – Accessories

Blanking plate			Type
	For manifold rail for M3 in-line valves	Incl. screws and seal	Technical data → Internet: vabb VABB-L1-10A
Separator			Technical data → Internet: vabb
	For manifold rail for M3 in-line valves	Separator for pressure zones	VABD-4.2-B
Supply plate			Technical data → Internet: vabb
	For manifold rail for M3 in-line valves	Incl. screws and seal	VABF-L1-10A-P3A4-M5
Seals for in-line valves			Technical data → Internet: vabb
	M3	10 seals and 20 screws	VABD-L1-10AX-S-M3


Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5

FESTO

Technical data

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	150 ... 220 l/min
5/3C, 5/3U, 5/3E	Voltage
	5, 12 and 24 V DC

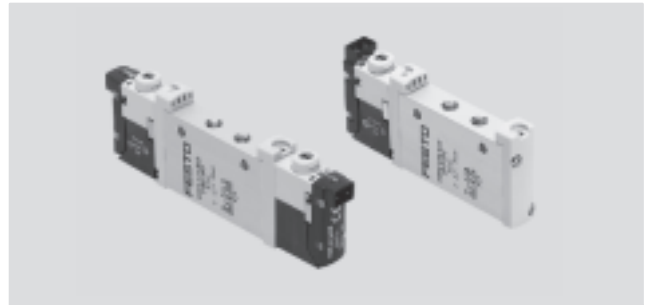Circuit symbol → page 10



General technical data														
Valve function			T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position			C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position			Monostable							Bistable	Monostable	Monostable		
Pneumatic spring reset method			Yes			No			Yes ⁵⁾	–	No	No		
Mechanical spring reset method			No			Yes			Yes ⁵⁾	–	Yes	Yes		
Vacuum operation at port 1			No			Only with external pilot air supply								
Design			Piston spool valve											
Sealing principle			Soft											
Actuation type			Electric											
Type of control			Piloted											
Pilot air supply			Internal or external											
Exhaust function			With flow control											
Manual override			Choice of non-detenting, detenting or covered											
Type of mounting			Optionally via through-holes ⁷⁾ or on manifold rail											
Mounting position			Any											
Nominal size			[mm]	2.7		1.9		1.8		3.2		2.2		3.2
Standard nominal flow rate			[l/min]	150		135		125		220		190		210
Flow rate on manifold rail			[l/min]	150		135		125		220		190		210
Switching time on/off			[ms]	6/16		8/11				7/19	–	8/24		10/30
Changeover time			[ms]	–						7		–		16
Width			[mm]	10										
Connection			1, 2, 3, 4, 5		M5									
			12, 14		M3									
Product weight			[g]	55		54				45	55	44		55
Corrosion resistance class			CRC	2 ⁶⁾										

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5

FESTO

Technical data

Operating and environmental conditions							
Valve function		T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾	P53
Operating medium		Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated					
Operating pressure	Internal	[bar]	1.5 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10		-0.9 ... 8	-0.9 ... 10
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, -5 ... +60 with holding current reduction				
Temperature of medium		[°C]	-5 ... +50, -5 ... +60 with holding current reduction				

1) Pneumatic spring

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via E-box
Operating voltage	[V DC] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle	[%] 100
Protection class to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Dimensions Download CAD Data → www.festo.com/us/cad

2x3/2-way, 5/2-way and 5/3-way valve

Note

More dimensions
E-boxes
→ page 59


Type	B1	B2	D1	D2	D3	H1	H2	H3	L1	L2	L3	L4
VUVG-L-10 ...-M5 ...	10.2	—	M5	3.2	M3	32.5	3.6	4.4	86.5	81.5	8	27
VUVG-S-10 ...-M5 ...	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14		
	4.85	6.15	47	14	11	12	19	—	69.2	66.7		

Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7

FESTO

Technical data

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	190 ... 380 l/min
5/3C, 5/3U, 5/3E	Voltage
	5, 12 and 24 V DC
Circuit symbol → page 10	

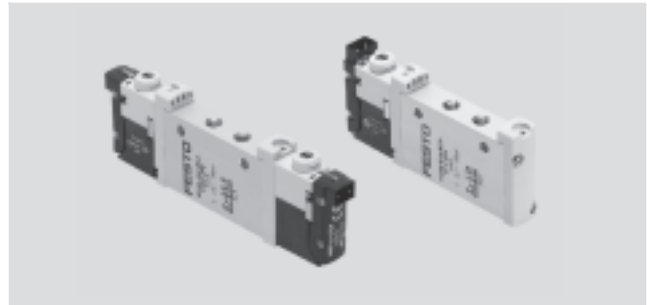

General technical data														
Valve function			T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position			C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position			Monostable							Bistable	Monostable	Monostable		
Pneumatic spring reset method			Yes			No			Yes ⁵⁾	–	No	No		
Mechanical spring reset method			No			Yes			Yes ⁵⁾	–	Yes	Yes		
Vacuum operation at port 1			No			Only with external pilot air supply								
Design			Piston spool valve											
Sealing principle			Soft											
Actuation type			Electric											
Type of control			Piloted											
Pilot air supply			Internal or external											
Exhaust function			With flow control											
Manual override			Choice of non-detenting, detenting or covered											
Type of mounting			Optionally via through-holes ⁷⁾ or on manifold rail											
Mounting position			Any											
Nominal size		[mm]	2.7		2.0	1.9	1.9	4.0	2.8		3.5			
Standard nominal flow rate		[l/min]	190		150	140	140	380	320		320			
Flow rate on manifold rail		[l/min]	170		140	130	130	340	290		300			
Switching time on/off		[ms]	6/16		8/11			7/19	–	8/24	10/30			
Changeover time		[ms]	–						7			16		
Width		[mm]	10											
Connection		1, 2, 3, 4, 5	M7											
		12, 14	M3											
Product weight		[g]	55		54			45	55	44	55			
Corrosion resistance class		CRC	2 ⁶⁾											

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7

FESTO

Technical data

Operating and environmental conditions									
Valve function			T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾	P53	
Operating medium			Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated						
Operating pressure	Internal	[bar]	1.5 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8		
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8	-0.9 ... 10	
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8	
Ambient temperature		[°C]	-5 ... +50, -5 ... +60 with holding current reduction						
Temperature of medium		[°C]	-5 ... +50, -5 ... +60 with holding current reduction						

1) Pneumatic spring

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data									
Electrical connection			Via E-box						
Operating voltage		[V DC]	5, 12, 24 ±10%						
Power		[W]	1, reduced to 0.35 with holding current reduction						
Duty cycle		[%]	100						
Protection class to EN 60529			IP40 (with plug socket), IP65 (with M8)						

Information on materials									
Housing			Wrought aluminium alloy						
Seals			HNBR, NBR						
Note on materials			RoHS-compliant						

Dimensions Download CAD Data → www.festo.com/us/cad

2x3/2-way, 5/2-way and 5/3-way valve

Note

More dimensions
E-boxes
→ page 59

1

Vertical electrical connection

2

Horizontal electrical connection

3








Manual override

4

Port for external pilot air supply

Type												
VUVG-L10 -...-M7 ...	B1	B2	D1	D2	D3	H1	H2	H3	L1	L2	L3	L4
VUVG-S10 -...-M7 ...	10.2	—	M7	3.2	M3	32.5	3.6	4.4	86.5	81.5	8	27
	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14		
	4.85	6.15	47	14	11	12	19	—	69.2	66.7		

FESTO

VUVG	-	10	-	-	-	-
Valve design						
 In-line, individual valve	L					
 In-line, manifold valve incl. seal and screws	S					
Width						
10 mm		10				
Valve functions						
			T32C			
			T32U			
			T32H			
			M52			
			B52			
			P53C			
			P53U			
			P53E			
Reset method						
Pneumatic spring for T32 and M52					A	
Mechanical spring for T32 and M52					M	
Pneu./mech. spring for M52					R	
With B52 and P53					-	
Pilot air supply						
Internal					-	
External					Z	
Manual override						
	Non-detenting					H
	Covered					S
-	Non-detenting, detenting					T

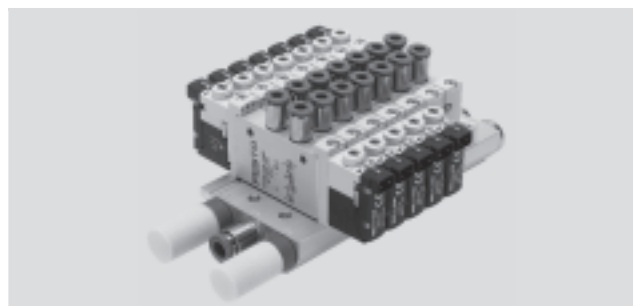
Subject to change – 2013/07

Solenoid valves VUVG-S10, in-line valves M5/M7

FESTO


Manifold assembly

In-line valves for
manifold assembly




Dimensions

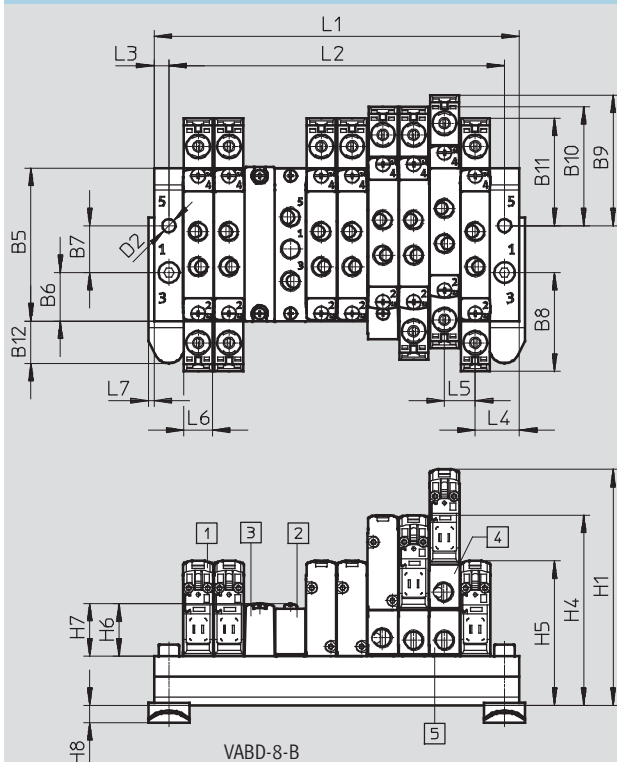Download CAD Data → www.festo.com/us/cad



Note

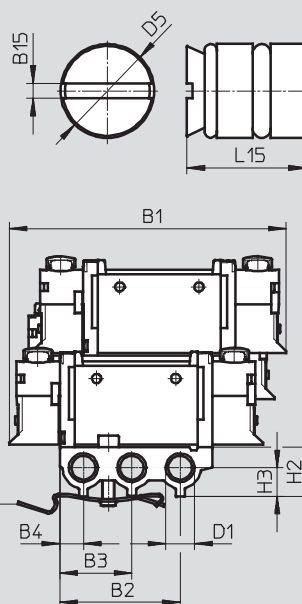More dimensions
E-boxes
→ page 59



1 Solenoid valve, vertical
electrical connection

3 Blanking plate
VABB-L1-10-S

5 Vertical pressure exhaust plate

6 H-rail mounting (two M4x20
screws to DIN 912 are
required)

2 Supply plate, ports 1, 3 and 5:
M5 or M7

4 Vertical pressure supply plate


Type												
VUVG-S10 -...-M5 ...	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
	94.3	41	24.5	8	52.1	16.5	16	33.7	44.6	40.7	36.7	14.4
	D1	D2	D5	H1	H2	H3	H4	H5	H6	H7	H8	L3
	G1/8	4.5	8	80.6	16.8	9.8	64.9	49.3	17.8	18	5.9	5
	L4	L5	L6	L7								
	15	10.5	10.3	2								

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16	22
L1 [mm]	40.5	51	61.5	72	82.5	93	103.5	114	124.5	145.5	166.5	187.5	250.5
L2 [mm]	30.5	41	51.5	62	72.5	83	93.5	104	114.5	135.5	156.5	177.5	240.5
VABM weight [g]	63	78	93	108	123	138	153	168	183	213	243	273	363

Solenoid valves VUVG-S10, in-line valves M5/M7

FESTO

Ordering data

Technical data – Manifold rails							
	Connection	CRC	Material ²⁾	Operating pressure	Max. tightening torque for assembly [Nm]		
	1, 3, 5			[bar]	Valve	H-rail	Wall
	G $\frac{1}{8}$	2 ¹⁾	Wrought aluminium alloy	-0.9 ... 10	0.45	1.5	3

- 1) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Note on materials: RoHS-compliant

Order code – Manifold rails							
VABM	-	L1	-	10	S	-	G18
Manifold assembly parts				Number of valve positions			
Manifold rail VABM				2 to 10, 12, 14 and 16			
Valve series				Ports 1, 3, 5			
VUVG L1				G18 G $\frac{1}{8}$			
Valve width							
10 mm 10							
Manifold rail with ports 1, 3, 5							
For M5 and M7 in-line valves S							

Ordering data – Accessories				Type
Blanking plate				Technical data → Internet: vabb
	For manifold rail for M5/M7 in-line valves	Incl. screws and seal	VABB-L1-10-S	
Separator				Technical data → Internet: vabd
	For manifold rail for M5/M7 in-line valves	Separator for pressure zones	VABD-8-B	
Supply plate				Technical data → Internet: vabf
	For manifold rail for M5 in-line valves	Incl. screws and seal	VABF-L1-10-P3A4-M5	
	For manifold rail for M7 in-line valves		VABF-L1-10-P3A4-M7	
Seals for in-line valves				Technical data → Internet: vabd
	M5	10 seals and 20 screws	VABD-L1-10X-S-M5	
	M7		VABD-L1-10X-S-M7	

Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

FESTO

Technical data

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	580 ... 780 l/min
5/3C, 5/3U, 5/3E	Voltage
	5, 12 and 24 V DC
Circuit symbol → page 10	



General technical data														
Valve function			T32-A			T32-M			M52-A	B52	M52-M	P53		
Normal position			C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	C ¹⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position			Monostable							Bistable		Monostable		
Pneumatic spring reset method			Yes			No			Yes	–	No	No		
Mechanical spring reset method			No			Yes			No	–	Yes	Yes		
Vacuum operation at port 1			No			Only with external pilot air supply								
Design			Piston spool valve											
Sealing principle			Soft											
Actuation type			Electric											
Type of control			Piloted											
Pilot air supply			Internal or external											
Exhaust function			With flow control											
Manual override			Choice of non-detenting, detenting or covered											
Type of mounting			Optionally via through-holes ⁷⁾ or on manifold rail											
Mounting position			Any											
Nominal size [mm]			4.6			4.3			5.6					
Standard nominal flow rate [l/min]			650	600	650	550	500	500	780			650	600	
Flow rate on manifold rail [l/min]			620	580		520	480	480	730			620	580	
Switching time on/off [ms]			8/23			11/15			14/28	–		13/40	12/40	
Changeover time [ms]			–							8		–		20
Width [mm]			14											
Connection 1, 2, 3, 4, 5 14			G1/8											
			M5											
Product weight [g]			89			80			78	89	70	89		
Corrosion resistance class CRC			2 ⁶⁾											

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

FESTO

Technical data

Operating and environmental conditions							
Valve function			T32-A ¹⁾	T32-M ³⁾	M52-A ¹⁾	B52	M52-M ³⁾ P53
Operating medium			Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated				
Operating pressure	Internal	[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 10
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, -5 ... +60 with holding current reduction				
Temperature of medium		[°C]	-5 ... +50, -5 ... +60 with holding current reduction				

1) Pneumatic spring

3) Mechanical spring


4) Minimum pilot pressure 50% of operating pressure

Electrical data		
Electrical connection		Via E-box
Operating voltage	[V DC]	5, 12 and 24 ±10%
Power	[W]	1, reduced to 0.35 with holding current reduction
Duty cycle	[%]	100
Protection class to EN 60529		IP40 (with plug socket), IP65 (with M8)

Information on materials		
Housing		Wrought aluminium alloy
Seals		HNBR, NBR
Note on materials		RoHS-compliant









Dimensions Download CAD Data → www.festo.com/us/cad

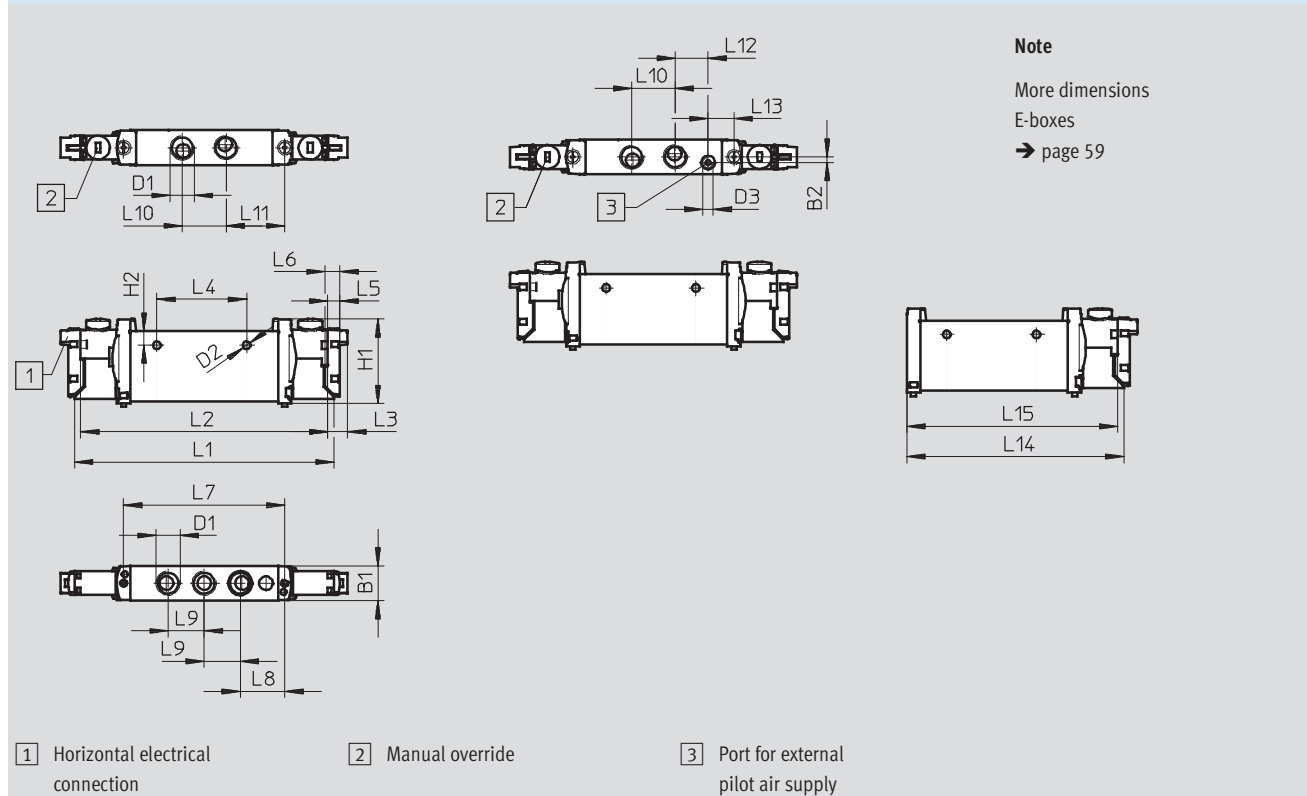2x3/2-way, 5/2-way and 5/3-way valve



Type	B1	B2	D1	D2	D3	H1	H2	L1	L2	L3	L4	L5	L6
VUVG-L-14 ...-G18 ...	14.4	2.3	G1/8	Ø 3.2	M5	34.8	5.8	107	102	8	37	4.85	6.15
VUVG-S-14 ...-G18 ...	L7	L8	L9	L10	L11	L12	L13	L14	L15				
	66.5	18.35	14.9	18	24.25	13.45	10.8	89.4	86.95				

FESTO

VUVG	-	14	-	-	-	-
Valve design						
	L					
In-line, individual valve						
	S					
In-line, manifold valve incl. seal and screws						
Width						
14 mm	14					
Valve functions						
			T32C			
			T32U			
			T32H			
			M52			
			B52			
			P53C			
			P53U			
			P53E			
Reset method						
Pneumatic spring for T32 and M52				A		
Mechanical spring for T32 and M52				M		
With B52 and P53				-		
Pilot air supply						
Internal				-		
External				Z		
Manual override						
	Non-detenting				H	
	Covered				S	
-	Non-detenting, detenting				T	

31

Solenoid valves VUVG-S14, in-line valves G1/8

Manifold assembly

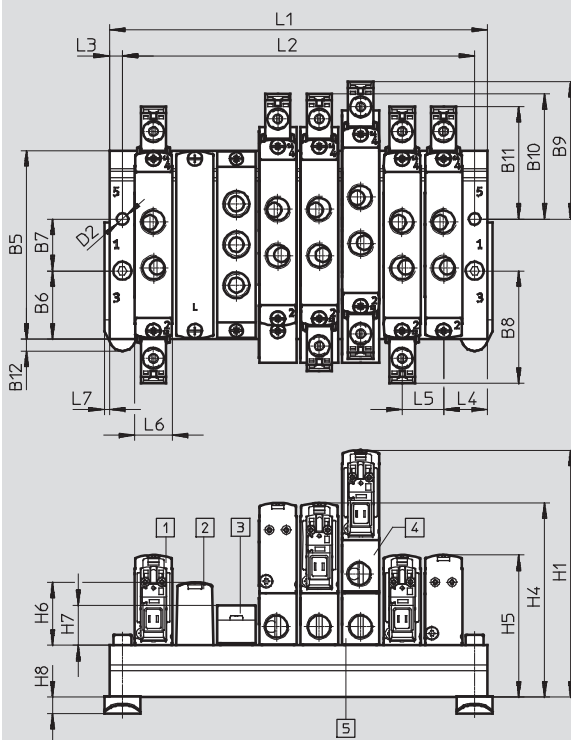
FESTO

In-line valves for
manifold assembly




Dimensions

Download CAD Data → www.festo.com/us/cad



Note

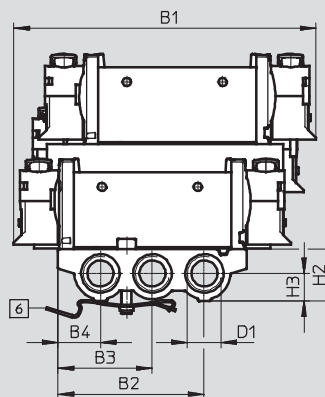More dimensions
E-boxes
→ page 59



- | | | | |
|--|--|-----------------------------------|---|
| 1 Solenoid valve, vertical electrical connection | 3 Supply plate, ports 1, 3 and 5: G1/8 | 5 Vertical pressure exhaust plate | 6 H-rail mounting (two M4x25 screws to DIN 912 are required for mounting) |
| 2 Blanking plate VABB-L1-14 | 4 Vertical pressure supply plate | | |

Type														
VUVG-S14 -...-G18 ...	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	D1	D2
	116.6	56.6	36.5	16.4	72.9	26.5	20	43.5	53.1	48.3	43.5	4.5	G1/4	4.5
	H1	H2	H3	H4	H5	H6	H7	H8	L3	L4	L5	L6	L7	
	95.3	20	10.6	74.9	54.8	23.9	15.4	6.5	5	17	16	14.5	2	


Valve positions	2	3	4	5	6	7	8	9	10	12	14	16	22
L1 [mm]	50	66	82	98	114	130	146	162	178	210	242	274	306
L2 [mm]	40	56	72	88	104	120	136	152	168	200	232	264	296
VABM weight [g]	118	159	200	241	282	323	364	405	446	528	610	692	938

1) Grid dimension

Solenoid valves VUVG-S14, in-line valves G1/8


FESTO

Ordering data

Technical data – Manifold rails							
	Connection	CRC	Material ²⁾	Operating pressure	Max. tightening torque for assembly [Nm]		
	1, 3, 5			[bar]	Valve	H-rail	Wall
	G1/4	2 ¹⁾	Wrought aluminium alloy	–0.9 ... 10	0.65	1.5	3

- 1) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Note on materials: RoHS-compliant

Order code – Manifold rails							
VABM	-	L1	-	14	S	-	G14
Manifold assembly parts							Number of valve positions
Manifold rail VABM							2 to 10, 12, 14 and 16
Valve series							Ports 1, 3, 5
VUVG		L1					G14 G1/4
Valve width							
14 mm				14			
Manifold rail with ports 1, 3, 5							
For G1/8 in-line valves					S		

Ordering data – Accessories				Type
Blanking plate				Technical data → Internet: vabb
	For manifold rail for G1/8 in-line valves	Incl. screws and seal		VABB-L1-14
Separator				Technical data → Internet: vabd
	For manifold rail for G1/8 in-line valves	Separator for pressure zones		VABD-10-B
Supply plate				Technical data → Internet: vabf
	For manifold rail for G1/8 in-line valves	Incl. screws and seal		VABF-L1-14-P3A4-G18
Seals for in-line valves				Technical data → Internet: vabd
	G1/8	10 seals and 20 screws		VABD-L1-14X-S-G18

Solenoid valves VUVG-L18 and VUVG-S18, in-line valves G $\frac{1}{4}$

FESTO

Technical data

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	1,000 ... 1,380 l/min
5/3C, 5/3U, 5/3E	Voltage
	5, 12 and 24 V DC

Circuit symbol → page 10



General technical data												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	C ¹⁾	–	–	–	C ¹⁾	U ²⁾	E ³⁾
Stable position	Monostable							Bistable	Monostable			
Pneumatic spring reset method	Yes			No			Yes ⁵⁾	–	No	No		
Mechanical spring reset method	No			Yes			Yes ⁵⁾	–	Yes	Yes		
Vacuum operation at port 1	No			Only with external pilot air supply								
Design	Piston spool valve											
Sealing principle	Soft											
Actuation type	Electric											
Type of control	Piloted											
Pilot air supply	Internal/external											
Exhaust function	With flow control											
Manual override	Choice of non-detenting, detenting or covered											
Type of mounting	Optionally via through-holes or on manifold rail											
Mounting position	Any											
Nominal size	[mm]	5.7					6.9	7.3	6.9	6.5	6.3	
Standard nominal flow rate	[l/min]	1,000					1,300			1,200		
Flow rate on manifold rail		1,000					1,300			1,200		
Switching time on/off	[ms]	13/25			15/20			14/33		12/45	18/55	
Changeover time	[ms]	–						12		–	29	
Width	[mm]	18										
Connection	1, 2, 3, 4, 5	G1/4										
	12/14	M5										
Product weight	[g]	164					154	164	154	160		
Corrosion resistance class	CRC	2 ⁶⁾										

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

Solenoid valves VUVG-L18 and VUVG-S18, in-line valves G1/4

FESTO

Technical data

Operating and environmental conditions						
Valve function		T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾ P53
Operating medium		Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated				
Operating pressure	Internal	[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8 3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10		
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8 3 ... 8
Ambient temperature		[°C]	-5 ... +50, -5 ... +60 with holding current reduction			
Temperature of medium		[°C]	-5 ... +50, -5 ... +60 with holding current reduction			

1) Pneumatic spring

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring


4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via E-box
Operating voltage	[V DC] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle	[%] 100
Protection class to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Dimensions Download CAD Data → www.festo.com/us/cad

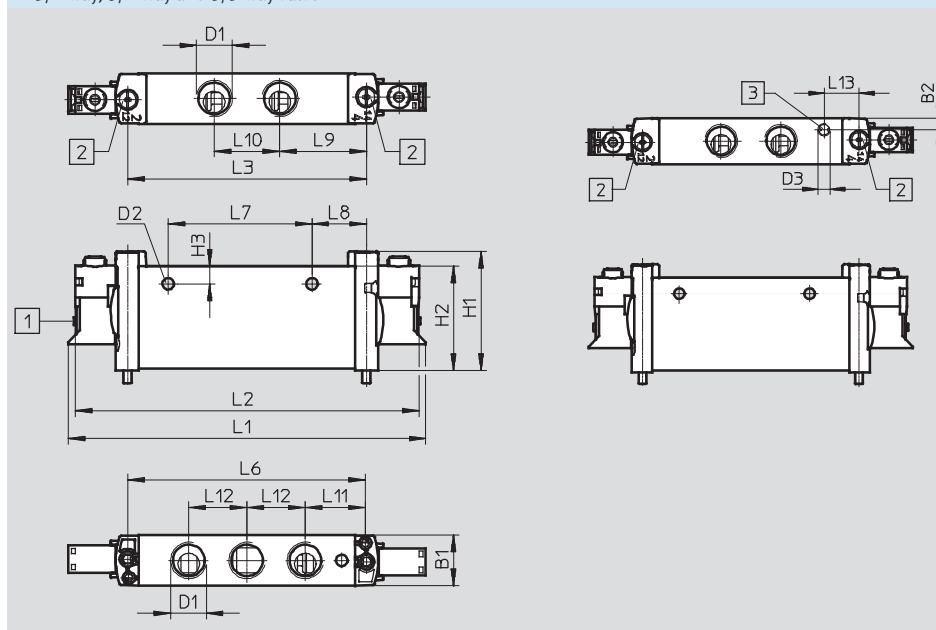2x3/2-way, 5/2-way and 5/3-way valve



Note

More dimensions
E-boxes
→ page 59



1 Electrical connection



2 Mounting screw



3 Port for external pilot air supply

Type	B1	B2	D1	D2	D3	H1	H2	H3	L1	L2	L3	L4	L5
VUVG-L-18 - ...	18.3	4.5	G1/4	Ø 4.2	M5	43.1	37.8	6.4	129.4	124.4	86.4	112.2	109.7
VUVG-S-18 - ...	L6	L7	L8	L9	L10	L11	L12	L13					
	86	52	19.7	31.3	23.8	21.7	21.1	14					

Solenoid valves VUVG-S18, in-line valves G $\frac{1}{4}$

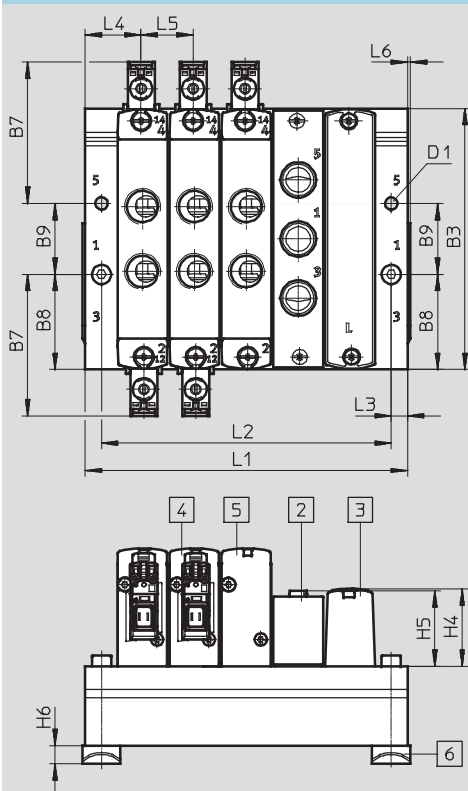
Manifold assembly

In-line valves for
manifold assembly




Dimensions

Download CAD Data → www.festo.com/us/cad



Note

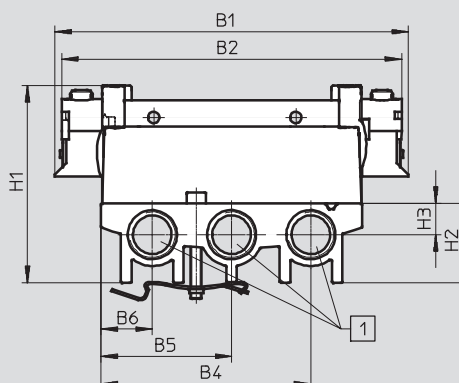More dimensions
E-boxes
→ page 59



- | | | | |
|---|---|--------------------------|--|
| 1) Ports 1, 3 and 5: G $\frac{3}{8}$ (at both ends) | 3) Supply plate, ports 1, 3 and 5: G $\frac{1}{4}$
VABF-L1-18-P3A4-G18 | 4) Single solenoid valve | 5) H-rail mounting (two M4x35 screws to DIN 912 are required for mounting) |
| 2) Blanking plate VABB-L1-18 | | | |

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	D1
VUVG-S18 -...-G14 ...	129.4	124.4	95.6	76.8	47.8	18.8	51.7	34.8	26	4.5
	H1	H2	H3	H4	H5	H6	L3	L4	L5	L6
	72.1	29	11.5	28.4	27.6	6.5	6	20.5	19	1


Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1 [mm]	61	80	99	118	137	156	175	194	213	251	289	327
L2 [mm]	49	68	87	106	125	144	163	182	201	239	277	315
VABM weight [g]	118	159	200	241	282	323	364	405	446	528	610	692

1) Grid dimension

Solenoid valves VUVG-S18, in-line valves G $\frac{1}{4}$

FESTO

Ordering data

Technical data – Manifold rails							
	Connection	CRC	Material ²⁾	Operating pressure	Max. tightening torque for assembly [Nm]		
	1, 3, 5			[bar]	Valve	H-rail	Wall
	G $\frac{3}{8}$	2 ¹⁾	Wrought aluminium alloy	-0.9 ... 10			


1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

2) Note on materials: RoHS-compliant

Order code – Manifold rails

VABM	-	L1	-	18	S	-	G38	-	
Manifold assembly parts								Number of valve positions	
Manifold rail		VABM						2 to 10, 12, 14 and 16	
Valve series								Ports 1, 3, 5	
VUVG		L1					G38	G $\frac{3}{8}$	
Valve width									
14 mm				18					
Manifold rail with ports 1, 3, 5									
For G $\frac{1}{4}$ in-line valves					S				

Ordering data – Accessories				Type
Blanking plate				Technical data → Internet: vabb
	For manifold rail for G $\frac{1}{4}$ in-line valves	Incl. screws and seal		VABB-L1-18
Separator				Technical data → Internet: vabd
	For manifold rail for G $\frac{1}{4}$ in-line valves	Separator for pressure zones		VABD-14-B
Supply plate				Technical data → Internet: vabf
	For manifold rail for G $\frac{1}{4}$ in-line valves	Incl. screws and seal		VABF-L1-18-P3A4-G14
Seals for in-line valves				Technical data → Internet: vabd
	G $\frac{1}{4}$	10 seals and 20 screws		VABD-L1-18X-S-G14

Solenoid valves VUVG-B10A, sub-base valves

FESTO

Technical data

Function	Width
5/2-way, single solenoid	
5/2-way, double solenoid	Flow rate
5/3C, 5/3U, 5/3E	90 ... 100 l/min
	Voltage
Circuit symbol → page 10	5, 12 and 24 V DC



General technical data						
Valve function		M52-R	B52	M52-M	P53	
Normal position		–	–	–	C ¹⁾	U ²⁾ E ³⁾
Stable position		Monostable	Bistable	Monostable	Monostable	
Pneumatic spring reset method		Yes ⁵⁾	–	No	No	
Mechanical spring reset method		Yes ⁵⁾	–	Yes	Yes	
Vacuum operation at port 1		Only with external pilot air supply				
Design		Piston spool valve				
Sealing principle		Soft				
Actuation type		Electric				
Type of control		Piloted				
Pilot air supply		External, internal; can be selected via sub-base				
Exhaust function		With flow control				
Manual override		Choice of non-detenting, detenting or covered				
Type of mounting		On manifold rail				
Mounting position		Any				
Nominal size	[mm]	2		1.4	2	
Standard nominal flow rate	[l/min]	100		80	90	
Flow rate on manifold rail M3	[l/min]	100		80	90	
Switching time on/off	[ms]	7/15	–	7/21	8/25	
Changeover time	[ms]	–	5	–	14	
Width	[mm]	10				
Connection	1, 3, 5	M7 in manifold rail				
	2, 4	M5 in manifold rail				
	12/14, 82/84	M5 in manifold rail				
Product weight	[g]	38	49	37	49	
Corrosion resistance class	CRC	2 ⁶⁾				

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Solenoid valves VUVG-B10A, sub-base valves

FESTO

Technical data

Operating and environmental conditions					
Valve function		M52-R ²⁾	B52	M52-M ³⁾	P53
Operating medium		Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated			
Operating pressure	Internal	[bar]	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	-0.9 ... 10		-0.9 ... 10
Pilot pressure ⁴⁾		[bar]	2.5 ... 8	1.5 ... 8	2 ... 8
Ambient temperature		[°C]	-5 ... +50, -5 ... +60 with holding current reduction		
Temperature of medium		[°C]	-5 ... +50, -5 ... +60 with holding current reduction		

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring


4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via E-box
Operating voltage	[V DC] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle	[%] 100
Protection class to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Dimensions Download CAD Data → www.festo.com/us/cad

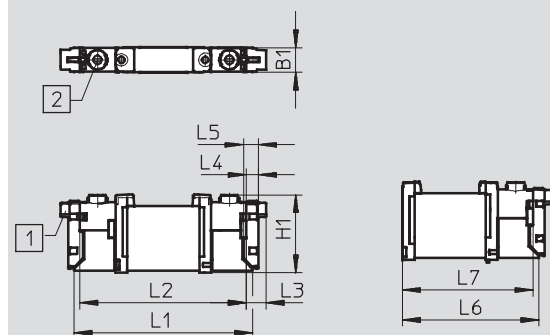5/2-way and 5/3-way valve



Note

More dimensions

E-boxes

→ page 59







- 1 Vertical electrical connection 2 Manual override

Type									
VUVG-B10A -...-F ...	B1	H1	L1	L2	L3	L4	L5	L6	L7
	10.2	32.5	73.9	68.9	8	4.85	6.15	56.9	54.4

Solenoid valves VUVG-B10A, sub-base valves

FESTO

Order code

VUVG	-	10A	-	-	-	-
Valve design						
 Sub-base, manifold valve incl. seal and screws						B
Width						
10 mm						10A
Valve functions						
						M52
						B52
						P53C
						P53U
						P53E
Reset method						
Mech. spring for M52						M
Pneu./mech. spring for M52						R
With B52 and P53						-
Pilot air supply						
External						Z
Manual override						
 Non-detenting						H
 Covered						S
- Non-detenting, detenting						T


	-			L	-	
						Connecting cables
		W1...4	Not sheathed			
		C1...4	Sheathed			for H
		WS1...4	Not sheathed			
		S1...4	Sheathed			for S
		N1...4	M8x1, 4-pin			
		N5...8	M8x1, 4-pin			
						Display
		L	LED			
						Protective circuit
		-	Without holding current reduction (HCR)			
		R	With holding current reduction (HCR)			
						E-box
		H2	Connection pattern H, horizontal plug			
		H3	Connection pattern H, vertical plug			
		S2	Connection pattern S, horizontal plug			
		S3	Connection pattern S, vertical plug			
		L1...4	With 2x flying leads L: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m			
		K6...9	Cable: K6 = 0.5 m, K7 = 1 m, K8 = 2.5 m, K9 = 5 m			
		R1	Individual plug M8, 4-pin			
		R8	Individual plug M8, 3-pin			
		P3	Without E-box			
						Operating voltage
		1	24 V DC			
		5	12 V DC			
		4	5 V DC			
						Pneumatic connection
		F	In the manifold rail			

Solenoid valves VUVG-B10A, sub-base valves

Manifold assembly


FESTO

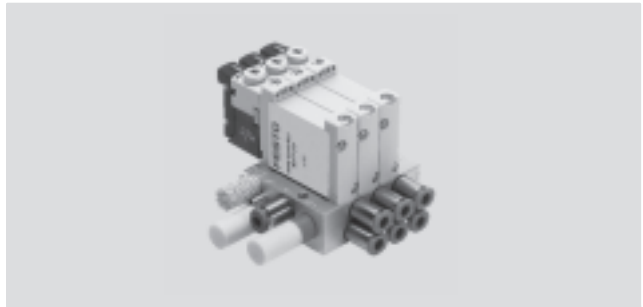Sub-base valve for
manifold assembly
M5 connection



Dimensions

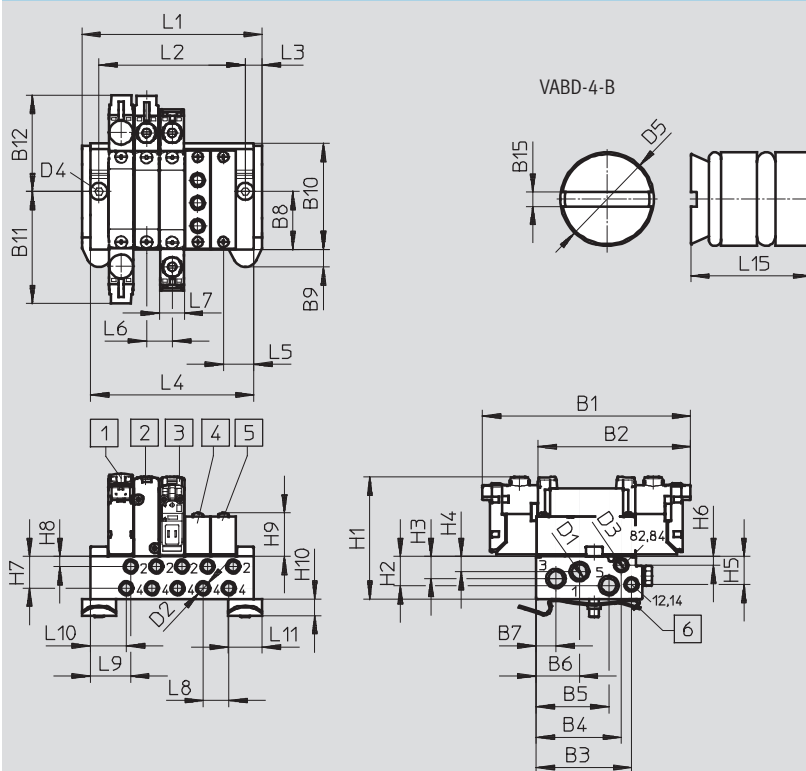Download CAD Data → www.festo.com/us/cad



Note

More dimensions
E-boxes
→ page 59

- | | | | |
|------------------|------------------|------------------------------|--|
| 1 Solenoid valve | 3 Solenoid valve | 5 Blanking plate VABB-L1-10A | 6 H-rail mounting
(two screws M4x25 to DIN 912
are required) |
| 2 Solenoid valve | 4 Supply plate | | |


Type												
VUVG-B10A -...-F- ...	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
	84.9	62.4	39.12	34.95	29.83	17.75	8.15	24	7.15	43.5	45.75	39.15
	B15	D1	D2	D3	D4	D5	H1	H2	H3	H4	H5	H6
	0.48	M7	M5	M5	Ø 4.5	Ø 4	53.1	12	9.1	6.3	11.57	3.6
	H7	H8	H9	H10	H15	L3	L5	L6	L7	L8	L9	L10
	13.1	4.2	16.2	6.8	1.9	7	12.5	10.5	10.2	10.5	16.5	14.7
	L11	L15										
	14	8.5										

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1 [mm]	42.5	53	63.5	74	84.5	96	106.5	116	126.5	147.5	168.5	189.5
L2 [mm]	28.5	39	49.5	60	70.5	81	91.5	102	112.5	133.5	154.5	175.5
L4 [mm]	35.5	46	56.5	67	77.5	89	99.5	109	119.5	140.5	161.5	182.5
VABM weight [g]	60	78	96	114	132	150	168	186	204	240	276	312

Solenoid valves VUVG-B10A, sub-base valves

FESTO

Ordering data

Technical data – Manifold rails ¹⁾									
	Connection			CRC	Material ³⁾	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	M5	M7	M5	2 ²⁾	Wrought aluminium alloy	-0.9 ... 10	0.45	1.5	1.5

1) Blanking plugs are included with the manifold rail.

2) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

3) Note on materials: RoHS-compliant

Order code – Manifold rails M3

VABM	-	L1	-	10A	-	M7	-	
Manifold assembly parts								Number of valve positions
Manifold rail		VABM						2 to 10, 12, 14 and 16
Valve series								Ports 1, 3, 5
VUVG		L1				M7	M7	
Valve width								
10 mm				10A				
Rail with ports 1, 2, 3, 4, 5, 12/14, 82/84								
Port 2 and 4 in M5					W			


Ordering data – Accessories				Type
Blanking plate				Technical data → Internet: vabb
	For manifold rail 10AW	Incl. screws and seal		VABB-L1-10A
Separator				Technical data → Internet: vabd
	For manifold rail 10AW	Separator for pressure zones		VABD-4.2-B
Supply plate				Technical data → Internet: vabf
	For manifold rail 10AW	Incl. screws and seal		VABF-L1-10A-P3A4-M5
Seals				Technical data → Internet: vabd
	For sub-base valves B10A	10 seals and 20 screws		VABD-L1-10AB-S-M3

Solenoid valves VUVG-B10, sub-base valves

FESTO

Technical data

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	160 ... 270 l/min
5/3C, 5/3U, 5/3E	Voltage
	5, 12 and 24 V DC
Circuit symbol → page 10	

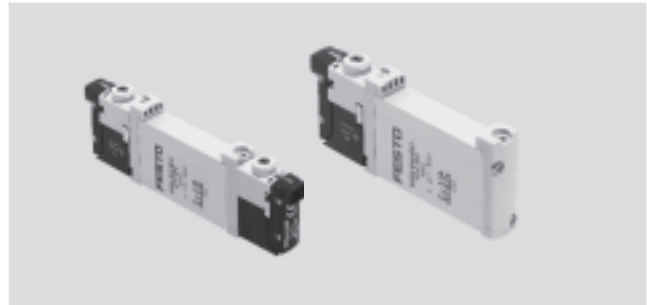

General technical data													
Valve function		T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position		C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–	–	C ¹⁾	U ²⁾	E ³⁾
Stable position		Monostable							Bistable	Monostable	Monostable		
Pneumatic spring reset method		Yes			No			Yes ⁵⁾	–	No	No		
Mechanical spring reset method		No			Yes			Yes ⁵⁾	–	Yes	Yes		
Vacuum operation at port 1		No			Only with external pilot air supply								
Design		Piston spool valve											
Sealing principle		Soft											
Actuation type		Electric											
Type of control		Piloted											
Pilot air supply		External, internal; can be selected via sub-base											
Exhaust function		With flow control											
Manual override		Choice of non-detenting, detenting or covered											
Type of mounting		On manifold rail											
Mounting position		Any											
Nominal size	[mm]	2.7			1.8	1.7		4		2.3		3.5	
Standard nominal flow rate	[l/min]	170			150	140	140	330		285		300	
Flow rate on manifold rail M5	[l/min]	150			130	120	120	210		180		200	
Flow rate on manifold rail M7	[l/min]	160			140	130	130	270		230		250	
Switching time on/off	[ms]	6/16			8/11			7/19		–	8/24		10/30
Changeover time	[ms]	–							7				16
Width	[mm]	10											
Connection	1, 3, 5	G1/8 in manifold rail											
	2, 4	M5 or M7 in manifold rail											
	12/14, 82/84	M5 in manifold rail											
Product weight	[g]	55			54			45	55	44	55		
Corrosion resistance class	CRC	2 ⁶⁾											

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Solenoid valves VUVG-B10, sub-base valves

FESTO

Technical data

Operating and environmental conditions						
Valve function		T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾ P53
Operating medium		Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated				
Operating pressure	Internal [bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External [bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8 -0.9 ... 10
Pilot pressure ⁴⁾	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature	[°C]	-5 ... +50, -5 ... +60 with holding current reduction				
Temperature of medium	[°C]	-5 ... +50, -5 ... +60 with holding current reduction				

1) Pneumatic spring

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via E-box
Operating voltage [V DC]	5, 12 and 24 ±10%
Power [W]	1, reduced to 0.35 with holding current reduction
Duty cycle [%]	100
Protection class to EN 60529	IP40 (with plug socket)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Dimensions

2x3/2-way, 5/2-way and 5/3-way valve

Download CAD Data → www.festo.com/us/cad









1 Vertical electrical connection 2 Horizontal electrical connection 3 Manual override

Note

More dimensions
E-boxes
→ page 59

Type											
VUVG-B10 -...-F ...	B1	H1	H2	L1	L2	L3	L4	L5	L6	L7	
	10.2	32.5	3.6	86.5	81.5	8	4.85	6.15	69.2	66.7	

FESTO

VUVG	-	10	-	-	-	-
Valve design			B			
Sub-base, manifold valve incl. seal and screws						
Width						
10 mm		10				
Valve functions						
			T32C			
			T32U			
			T32H			
			M52			
			B52			
			P53C			
			P53U			
			P53E			
Reset method						
Pneumatic spring for T32 and M52					A	
Mechanical spring for T32 and M52					M	
Pneu./mech. spring for M52					R	
With B52 and P53					-	
Pilot air supply						
External					Z	
Manual override						
 Non-detenting					H	
 Covered					S	
- Non-detenting, detenting					T	

Subject to change – 2013/07

Solenoid valves VUVG-B10, sub-base valves

FESTO

Manifold assembly

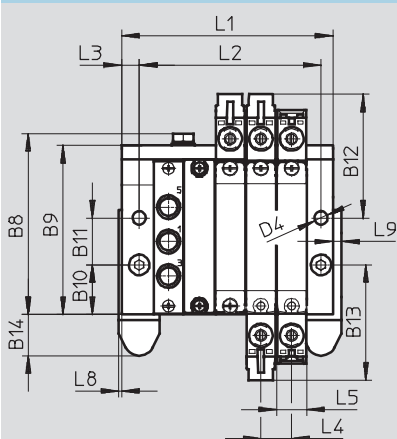
Sub-base valve for
manifold assembly

M5 or M7 connection




Dimensions

Download CAD Data → www.festo.com/us/cad





VABD-6-B



Note

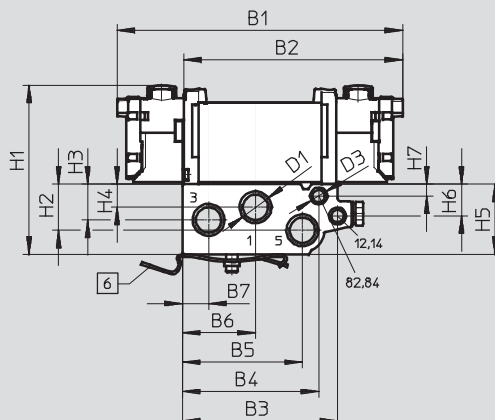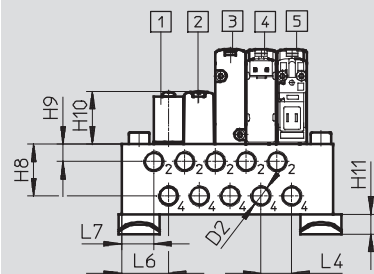More dimensions
E-boxes
→ page 59



1 Supply plate
VABF-L1-10

2 Blanking plate
VABB-L1-10-W

3 Solenoid valve
4 Solenoid valve
5 Solenoid valve

6 H-rail mounting
(two M4x30 screws to DIN 912
are required)


Type												
VUVG-B10 -...-F- ...	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
	97.5	74.8	52.9	46.5	40.9	24.9	8.9	62	57.7	16.9	16	42.2
	B13	B14	B15	D1	D2	D3	D4	D5	H1	H2	H3	H4
	39.3	14.05	1.2	G1/8	M5/M7	M5	4.5	Ø 6	56.4	15.7	12.17	7.87
	H5	H6	H7	H8	H9	H10	H11	L3	L4	L5	L6	L7
	23.9	10.8	4	17.6	5.9	18	6.8	4	10.5	10.2	16	11
	L8	L9	L15									
	1	3	10									

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16	22
L1 [mm]	48.5	59	69.5	80	90.5	101	111.5	122	132.5	153.5	174.5	195.5	258.5
L2 [mm]	30.5	41	51.5	62	72.5	83	93.5	104	114.5	135.5	156.5	177.5	240.5
VABM weight [g]	107	135	163	191	219	247	275	303	331	387	415	471	499

Solenoid valves VUVG-B10, sub-base valves

FESTO

Ordering data

Technical data – Manifold rails ¹⁾									
	Connection			CRC	Material ³⁾	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	M5 or M7	G1/8	M5	2 ²⁾	Wrought aluminium alloy	–0.9 ... 10	0.45	1.5	3

- 1) Blanking plugs are included with the manifold rail.
2) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
3) Note on materials: RoHS-compliant

Order code – Manifold rails M5 and M7

VABM	–	L1	–	10	–	G18	–	
Manifold assembly parts								Number of valve positions
Manifold rail		VABM						2 to 10, 12, 14 and 16
Valve series								Ports 1, 3, 5
VUVG		L1				G18	G1/8	
Valve width								
10 mm				10				
Manifold rail with ports 1, 2, 3, 4, 5, 12/14, 82/84								
Port 2 and 4 in M5								W
Port 2 and 4 in M7								HW

Ordering data – Accessories				
				Type
Blanking plate				Technical data ➔ Internet: vabb
	For manifold rail 10W/10HW, sub-base valves	Incl. screws and seal	VABB-L1-10-W	
Separator				Technical data ➔ Internet: vabd
	For manifold rail 10W and 10HW, sub-base valves	Separator for pressure zones	VABD-6-B	
Supply plate				Technical data ➔ Internet: vabf
	For manifold rail 10W	Incl. screws and seal	VABF-L1-10-P3A4-M5	
	For manifold rail 10HW		VABF-L1-10-P3A4-M7	
Seals				Technical data ➔ Internet: vabd
	For sub-base valves B10	10 seals and 20 screws	VABD-L1-10B-S-M7	

Solenoid valves VUVG-B14, sub-base valves

FESTO

Technical data

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	510 ... 700 l/min
5/3C, 5/3U, 5/3E	Voltage
	5, 12 and 24 V DC

Circuit symbol → page 10

General technical data													
Valve function		T32-A			T32-M			M52-A	B52	M52-M	P53		
Normal position		C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position		Monostable							Bistable	Monostable	Monostable		
Pneumatic spring reset method		Yes			No			Yes	–	No	No		
Mechanical spring reset method		No			Yes			No	–	Yes	Yes		
Vacuum operation at port 1		No			Only with external pilot air supply								
Design		Piston spool valve											
Sealing principle		Soft											
Actuation type		Electric											
Type of control		Piloted											
Pilot air supply		External, internal; can be selected via sub-base											
Exhaust function		With flow control											
Manual override		Choice of non-detenting, detenting or covered											
Type of mounting		On manifold rail											
Mounting position		Any											
Nominal size [mm]		4.6			4.3			5.4					
Standard nominal flow rate [l/min]		600	580		470	450	450	680			600	580	580
Flow rate on manifold rail G¼ [l/min]		540	510	540	430	410	410	580			540	510	510
Switching time on/off [ms]		8/23			11/15			14/28	–	13/40	12/40		
Changeover time [ms]		–							8			20	
Width [mm]		14											
Port	1, 3, 5	G¼ in manifold rail											
	2, 4	G½ in manifold rail											
	12/14, 82/84	M5 in manifold rail											
Product weight [g]		89			80			78	89	70	89		
Corrosion resistance class		CRC		2 ⁶⁾									

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Solenoid valves VUVG-B14, sub-base valves

FESTO

Technical data

Operating and environmental conditions							
Valve function		T32-A ¹⁾	T32-M ³⁾	M52-A ¹⁾	B52	M52-M ³⁾	P53
Operating medium		Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated					
Operating pressure	Internal [bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	
	External [bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8	-0.9 ... 10
Pilot pressure ⁴⁾ [bar]		1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	
Ambient temperature [°C]		-5 ... +50, -5 ... +60 with holding current reduction					
Temperature of medium [°C]		-5 ... +50, -5 ... +60 with holding current reduction					

1) Pneumatic spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via E-box
Operating voltage [V DC]	5, 12 and 24 ±10%
Power [W]	1, reduced to 0.35 with holding current reduction
Duty cycle [%]	100
Protection class to EN 60529	IP40 (with plug socket)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Dimensions	Download CAD Data → www.festo.com/us/cad
------------	--

2x3/2-way, 5/2-way and 5/3-way valve

Note
More dimensions
E-boxes
→ page 59










1 Horizontal electrical connection 2 Manual override

Type										
VUVG-B14 -...-F ...	B1	H1	L1	L2	L3	L4	L5	L6	L7	L8
	14.4	34.8	107	102	8	66.5	4.85	6.15	89.45	86.95

Solenoid valves VUVG-B14, sub-base valves

FESTO

Order code

VUVG	-	14	-					
Valve design								
	B							
Sub-base, manifold valve incl. seal and screws								
Width								
14 mm		14						
Valve functions								
	T32C							
	T32U							
	T32H							
	M52							
	B52							
	P53C							
	P53U							
	P53E							
Reset method								
Pneumatic spring for T32 and M52						A		
Mechanical spring for T32 and M52						M		
With B52 and P53						-		
Pilot air supply								
External						Z		
Manual override								
	Non-detenting						H	
	Covered						S	
-	Non-detenting, detenting						T	


	-			L	-	
						Connecting cables
						W1...4 Not sheathed 
						C1...4 Sheathed for H
						WS1...4 Not sheathed 
						S1...4 Sheathed for S
						N1...4 M8x1, 4-pin 
						N5...8 M8x1, 4-pin 
						Display
						L LED
						Protective circuit
						- Without holding current reduction (HCR)
						R With holding current reduction (HCR)
						E-box
						H2 Connection pattern H, horizontal plug 
						H3 Connection pattern H, vertical plug 
						S2 Connection pattern S, horizontal plug 
						S3 Connection pattern S, vertical plug 
						L1...4 With 2x flying leads L: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m 
						K6...9 Cable: K6 = 0.5 m, K7 = 1 m, K8 = 2.5 m, K9 = 5 m 
						R1 Individual plug M8, 4-pin 
						R8 Individual plug M8, 3-pin 
						P3 Without E-box 
						Operating voltage
						1 24 V DC
						5 12 V DC
						4 5 V DC
						Pneumatic connection
						F In the manifold rail

Solenoid valves VUVG-B14, sub-base valves

Manifold assembly


FESTO

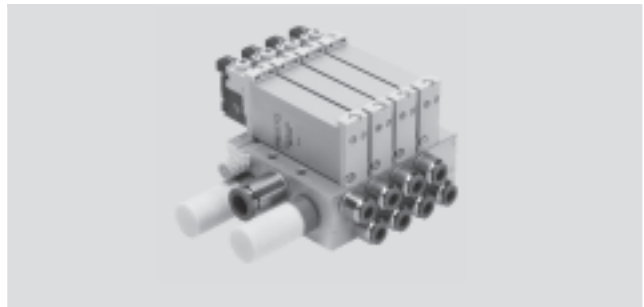Sub-base valve for
manifold assembly
G $\frac{1}{8}$ connection




Dimensions

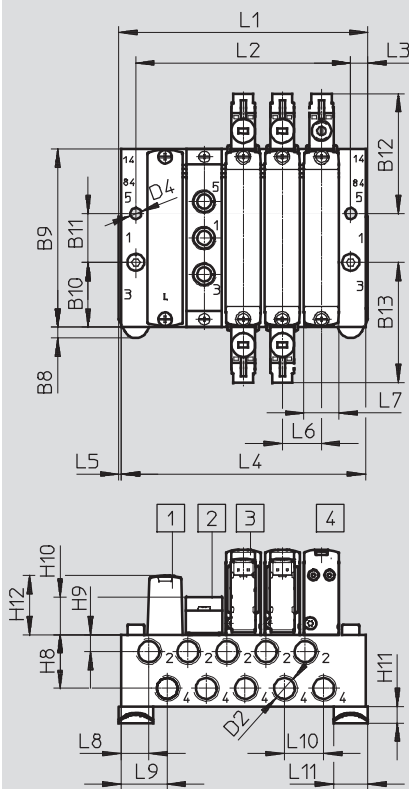Download CAD Data → www.festo.com/us/cad




VABD-10-B



Note

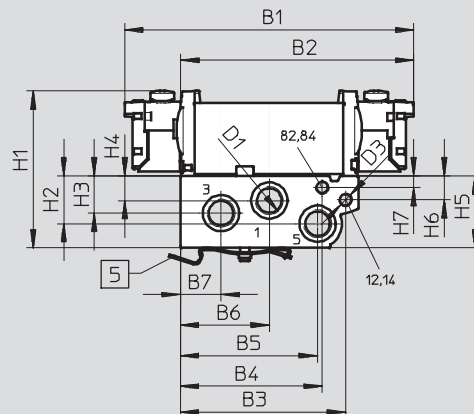More dimensions
E-boxes
→ page 59



1 Blanking plate VABB-L1-14

3 Double solenoid valve

4 Single solenoid valve

5 H-rail mounting
(two M4x25 screws to DIN 912
are required)

2 Supply plate

VABF-L1-14-P3A4-G18


Type												
VUVG-B14 -...-F- ...	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
	118.3	95.1	67.7	58.2	56.3	36.6	16.7	4.5	72.9	26.5	20	49.1
	B13	B15	D1	D2	D3	D4	D5	H1	H2	H3	H4	H5
	49.1	1.2	G $\frac{1}{4}$	G $\frac{1}{8}$	M5	Ø 4.5	Ø 9.8	64.3	19.6	15.3	10.1	29.5
	H6	H7	H8	H9	H10	H11	H12	L3	L5	L6	L7	L8
	9.83	4.8	22.1	7	15.4	6.8	23.9	6	1	16	14.4	11.3
	L9	L10	L11									
	18.5	16	14									

Solenoid valves VUVG-B14, sub-base valves

FESTO

Ordering data

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1 [mm]	56.3	72.3	88.3	104.3	120.3	136.3	152.3	168.3	184.3	216.3	248.3	280.3
L2 [mm]	40	56	72	88	104	120	136	152	168	200	232	264
L4 [mm]	54.3	70.3	86.3	102.3	118.3	134.3	150.3	166.3	182.3	214.3	246.6	278.3
VABM weight [g]	232	306	380	454	528	602	676	750	824	972	1,120	1,268

Technical data – Manifold rails ¹⁾									
	Connection			CRC	Material ³⁾	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	G $\frac{1}{8}$	G $\frac{1}{4}$	M5	2 ²⁾	Wrought aluminium alloy	-0.9 ... 10	0.65	1.5	3

1) Blanking plugs are included with the manifold rail.


2) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

3) Note on materials: RoHS-compliant

Order code – Manifold rails G $\frac{1}{8}$

VABM	-	L1	-	14	W	-	G14	-	
Manifold assembly parts									Number of valve positions
Manifold rail		VABM							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		L1					G14	G $\frac{1}{4}$	
Valve width									
14 mm				14					
Manifold rail with ports 1, 2, 3, 4, 5, 12/14, 82/84									
Port 2 and 4 in G $\frac{1}{8}$					W				

Ordering data – Accessories				Type
Blanking plate				Technical data → Internet: vabb
	For manifold rail 14W, sub-base valves	Incl. screws and seal		VABB-L1-14
Separator				Technical data → Internet: vabd
	For manifold rail 14W, sub-base valves	Separator for pressure zones		VABD-10-B
Supply plate				Technical data → Internet: vabf
	For manifold rail 14W	Incl. screws and seal		VABF-L1-14-P3A4-G18
Seals				Technical data → Internet: vabd
	For sub-base valves B14	10 seals and 20 screws		VABD-L1-14B-S-G18

Solenoid valves VUVG-B18, sub-base valves

FESTO

Technical data

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	900 ... 1,000 l/min
5/3C, 5/3U, 5/3E	Voltage
	5, 12 and 24 V DC

Circuit symbol → page 10



General technical data													
Valve function		T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position		C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position		Monostable							Bistable	Monostable	Monostable		
Pneumatic spring reset method		Yes			No			Yes ⁵⁾	–	No	No		
Mechanical spring reset method		No			Yes			Yes ⁵⁾	–	Yes	Yes		
Vacuum operation at port 1		No			Only with external pilot air supply								
Design		Piston spool valve											
Sealing principle		Soft											
Actuation type		Electric											
Type of control		Piloted											
Pilot air supply		External, internal; can be selected via sub-base											
Exhaust function		With flow control											
Manual override		Choice of non-detenting, detenting or covered											
Type of mounting		On manifold rail											
Mounting position		Any											
Nominal size [mm]		5.7						6.9	7.3	6.9	6.5		
Standard nominal flow rate [l/min]		1,040						1,150			1,080		
Flow rate on manifold rail		900						1,000			950		
Switching time on/off [ms]		13/25			15/20			14/33	–	12/45	18/55		
Changeover time [ms]		–						12		29			
Width [mm]		18											
Port	1, 3, 5	G3⁄8 in manifold rail											
	2, 4	G1⁄4 in manifold rail											
	12/14, 82/84	M5 in manifold rail											
Product weight [g]		164						154	160	154	160		
Corrosion resistance class CRC		2 ⁶⁾											

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Solenoid valves VUVG-B18, sub-base valves

Technical data

Operating and environmental conditions							
Valve function		T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾	P53
Operating medium		Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated					
Operating pressure	Internal	[bar]					
	External	[bar]	1.5 ... 10	-0.9 ... 10		-0.9 ... 8	-0.9 ... 10
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, -5 ... +60 with holding current reduction				
Temperature of medium		[°C]	-5 ... +50, -5 ... +60 with holding current reduction				

1) Pneumatic spring

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring


4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via E-box
Operating voltage	[V DC] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle	[%] 100
Protection class to EN 60529	IP40 (with plug socket)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Dimensions Download CAD Data → www.festo.com/us/cad

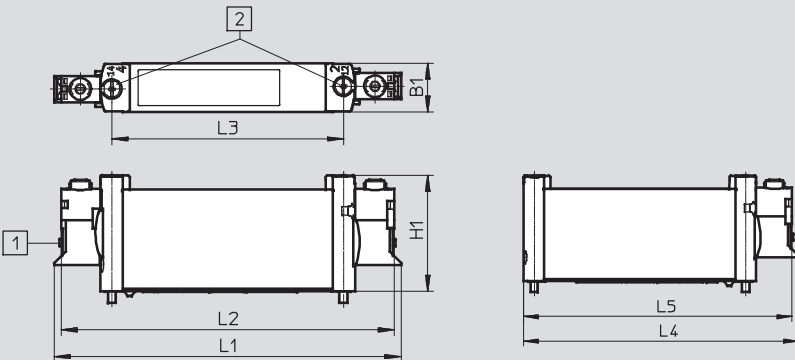2x3/2-way, 5/2-way and 5/3-way valve



1 Horizontal electrical connection

2 Manual override

Note


More dimensions
E-boxes
→ page 59

Type							
VUVG-B18 -...-F ...	B1	H1	L1	L2	L3	L4	L5
	18.3	43.1	129.4	124.4	86.4	112.2	109.7

Solenoid valves VUVG-B18, sub-base valves




Manifold assembly

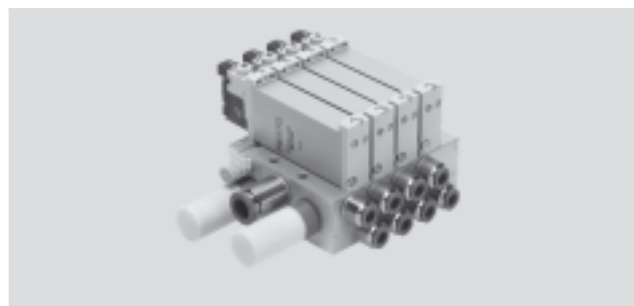Sub-base valve for
manifold assembly
G $\frac{3}{4}$ connection



Dimensions

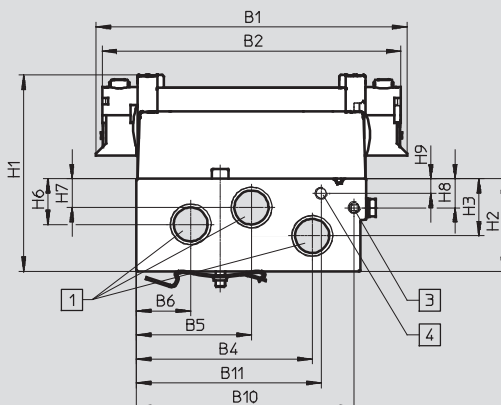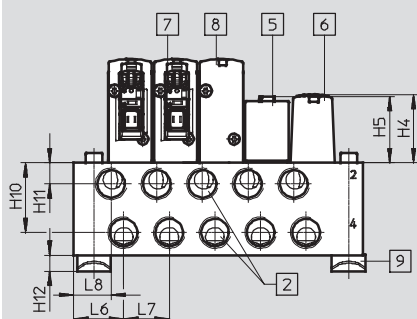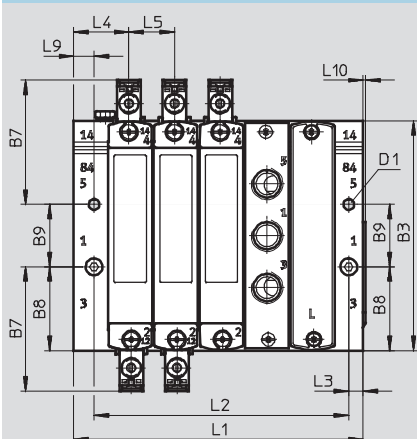Download CAD Data → www.festo.com/us/cad



Note

More dimensions
E-boxes
→ page 59

- | | | | |
|--|---|-------------------------|--|
| 1 Ports 1, 3 and 5: G $\frac{3}{8}$ (at both ends) | 4 Port 82/84 for external pilot air: M5 | 6 Blanking plate | 9 H-rail mounting (two M4x40 screws to DIN 912 are required) |
| 2 Ports 2 and 4: G $\frac{1}{4}$ | 5 Supply plate, ports 1, 3 and 5: G $\frac{1}{4}$ | 7 Double solenoid valve | |
| 3 Port 12/14 for external pilot air: M5 | VABF-L1-14-P3A4-G18 | 8 Single solenoid valve | |


Type												
VUVG-B18 -...-F- ...	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	D1
	129.4	124.41	95.6	73.1	47.8	22.5	51.7	34.8	26	90.6	76.8	4.5
	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12
	81.6	38.5	11.5	28.4	27.6	19	12	12.1	6.1	29.1	8.8	6.5
	L3	L4	L5	L6	L7	L8	L9	L10				
	6	23	19	20.8	19	15.6	8.5	1				

Solenoid valves VUVG-B18, sub-base valves

Ordering data

FESTO

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1 [mm]	63.5	82.5	101.5	120.5	139.5	158.5	177.5	196.5	215.5	253.5	291.5	329.5
L2 [mm]	49	68	87	106	125	144	163	182	201	239	277	315
VABM weight [g]	232	306	380	454	528	602	676	750	824	972	1,120	1,268

Technical data – Manifold rails ¹⁾									
	Connection			CRC	Material ³⁾	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	G $\frac{1}{4}$	G $\frac{3}{8}$	M5	2 ²⁾	Wrought aluminium alloy	-0.9 ... 10			

1) Blanking plugs are included with the manifold rail.



2) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

3) Note on materials: RoHS-compliant

Order code – Manifold rails G $\frac{1}{4}$

VABM	-	L1	-	18	W	-	G38	-	
Manifold assembly parts									Number of valve positions
Manifold rail		VABM							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		L1					G38	G $\frac{3}{8}$	
Valve width									
18 mm				18					
Manifold rail with ports 1, 2, 3, 4, 5, 12/14, 82/84									
Port 2 and 4 in G $\frac{1}{4}$					W				

Ordering data – Accessories				Type
Blanking plate				Technical data → Internet: vabb
	For manifold rail 18W, sub-base valves	Incl. screws and seal		VABB-L1-18
Separator				Technical data → Internet: vabd
	For manifold rail 18W, sub-base valves	Separator for pressure zones		VABD-14-B
Supply plate				Technical data → Internet: vabf
	For manifold rail 18W	Incl. screws and seal		VABF-L1-18-P3A4-G14
Seals				Technical data → Internet: vabd
	For sub-base valves B18	10 seals and 20 screws		VABD-L1-18B-S-G14

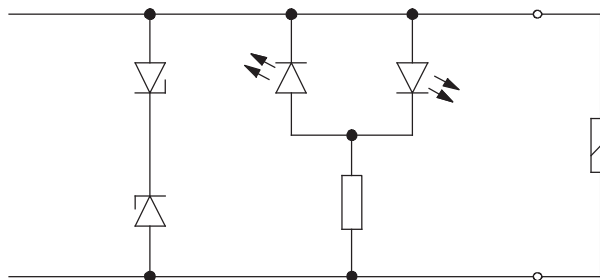
Solenoid valves VUVG

E-boxes

FESTO


Protective circuit without holding current reduction

The solenoid coils (P type) of the 5, 12 and 24 V designs are equipped with a protective circuit to arrest sparks and protect against polarity reversal.



Protective circuit with holding current reduction

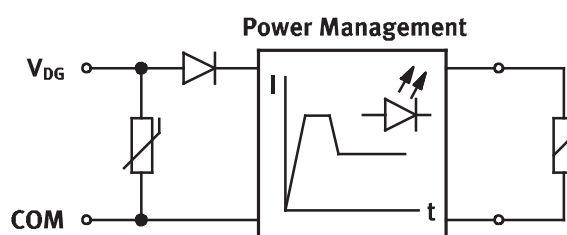The 24 V DC design (R type) additionally features holding current reduction. This reduces the power from 1 W to 0.35 W.





Pin allocation for E-box

	Pin		
Rectangular plug, pin spacing 4 mm, connection pattern H			
	VAVE-L1-1VH2-LP/VAVE-L1-1VH3-LP		
	1	+ or -	Without holding current reduction
	2	+ or -	
	VAVE-L1-1H2-LR/VAVE-L1-1H3-LR		
	1	-	With holding current reduction
	2	+	
Rectangular plug, pin spacing 2.5 mm, connection pattern S			
	VAVE-L1-1VS2-LP/VAVE-L1-1VS3-LP		
	1	+ or -	Without holding current reduction
	2	+ or -	
	VAVE-L1-1S2-LR/VAVE-L1-1S3-LR		
	1	-	With holding current reduction
	2	+	
Flying leads, 2-pin			
	VAVE-L1-1VL1...4-LP		
	1	+ or -	Without holding current reduction
	2	+ or -	
	VAVE-L1-1L1...4-LR		
	1	-	With holding current reduction
	2	+	

Solenoid valves VUVG

E-boxes



Pin allocation for E-box			
		Pin	
Round plug, M8, 3-pin			
	VAVE-L1-1VR8-LP		
	1	Not used	Without holding current reduction
	3	+ or -	
	4	+ or -	
Round plug, M8, 4-pin			
	VAVE-L1-1VR1-LP		
	1	Not used	Without holding current reduction
	2	Not used	
	3	+ or -	
	4	+ or -	

Solenoid valves VUVG


FESTO

E-boxes


General technical data							
Variants	H2	H3	S2	S3	L-	R1	R8
Mounting position	Any						
Electrical connection	2-pin, socket				Flying leads	Individual plug M8, 4-pin	Individual plug M8, 3-pin
Protection class	IP40					IP65	
Switching position display	LED						
Type of mounting	Clip					Self-tapping screw	
Note on materials	RoHS-compliant						
Housing colour	Black						
Information on housing materials	PA						

Dimensions

E-boxes, S2/H2



E-boxes, S3/H3




Download CAD Data → www.festo.com/us/cad

Type	B1	H1 ±0.5	L1	L2	L3
VAVE-L1-1VS2-LP	9.8	28.8	12.9	5.2	6.5
VAVE-L1-1S2-LR			10.8		
VAVE-L1-1VH2-LP					
VAVE-L1-H2-LR					


Type	B1	H1 ±0.5	L1	L2	L3
VAVE-L1-1VS3-LP	9.8	35	7.6	5.2	6.5
VAVE-L1-1S3-LR			7.5		
VAVE-L1-1VH3-LP					
VAVE-L1-1H3-LR					

Dimensions

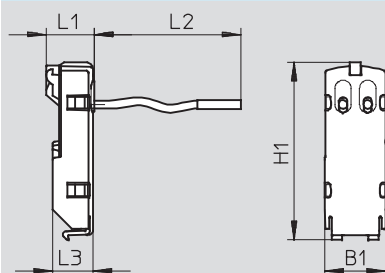E-boxes, VL11 ... 14



E-boxes, VK6 ... 9

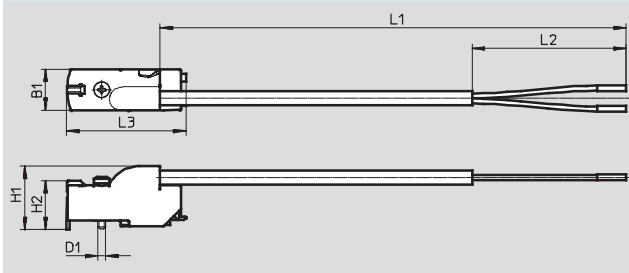

Download CAD Data → www.festo.com/us/cad

Type	B1	H1 ±0.5	L1	L2	L3	
VAVE-L1-1VL1-LP	9.8	28.8	7.9	0.5	6.5	
VAVE-L1-1L1-LR				1		
VAVE-L1-1VL2-LP						
VAVE-L1-1L2-LR						
VAVE-L1-1VL3-LP				2.5		
VAVE-L1-1L3-LR				5		
VAVE-L1-1VL4-LP						
VAVE-L1-1L4-LR						

Type	B1	H1	H2 ±0.3	L1	L2 ±5	L3 ±0.5	D1 Ø
VAVE-L1-1VK6-LP	9.8	15.3	11.8	0.5	50	28.7	1.8
VAVE-L1-1VK7-LP				1.0			
VAVE-L1-1VK8-LP				2.5			
VAVE-L1-1VK9-LP				5.0			
VAVE-L1-1K6-LR				0.5			
VAVE-L1-1K7-LR				1.0			
VAVE-L1-1K8-LR				2.5			
VAVE-L1-1K9-LR				5.0			

Solenoid valves VUVG

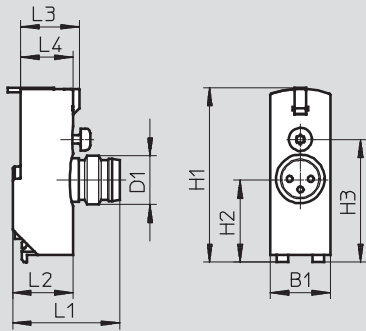
E-boxes

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

E-boxes, R8/R1



Type	B1	H1	H2	H3	L1	L2	L3	L4	D1
VAVE-L1-1VR8-LP	9.8	28.7	13.7	20.2	18.4	9.9	9.7	8.6	M8
VAVE-L1-1VR1-LP									






Ordering data – E-boxes

Design	Plug	Additional functions	Ambient temperature [°C]	Code	Power	Voltage	Type
					[W]	[V DC]	
	NEBV-H1 ...	Spark arresting, bipolar	-5 ... +50	H2	1	12/24	VAVE-L1-1VH2-LP
		Spark arresting, holding current reduction	-5 ... +60	H2R	0.35	24	VAVE-L1-1H2-LR
	NEBV-H1 ...	Spark arresting, bipolar	-5 ... +50	H3	1	12/24	VAVE-L1-1VH3-LP
		Spark arresting, holding current reduction	-5 ... +60	H3R	0.35	24	VAVE-L1-1H3-LR
	NEBV-HS ...	Spark arresting, bipolar	-5 ... +50	S2	1	12/24	VAVE-L1-1VS2-LP
		Spark arresting, holding current reduction	-5 ... +60	S2R	0.35	24	VAVE-L1-1S2-LR
	NEBV-HS ...	Spark arresting, bipolar	-5 ... +50	S3	1	12/24	VAVE-L1-1VS3-LP
		Spark arresting, holding current reduction	-5 ... +60	S3R	0.35	24	VAVE-L1-1S3-LR
	Open cable end	Spark arresting, bipolar	-5 ... +50	L1	1	12/24	VAVE-L1-1VL1-LP
				L2			VAVE-L1-1VL2-LP
				L3			VAVE-L1-1VL3-LP
				L4			VAVE-L1-1VL4-LP
		Spark arresting, holding current reduction	-5 ... +60	L1R	0.35	24	VAVE-L1-1L1-LR
				L2R			VAVE-L1-1L2-LR
				L3R			VAVE-L1-1L3-LR
				L4R			VAVE-L1-1L4-LR
	Open cable end	Spark arresting, bipolar	-5 ... +60	K6	1	12/24	VAVE-L1-1VK6-LP
				K7			VAVE-L1-1VK7-LP
				K8			VAVE-L1-1VK8-LP
				K9			VAVE-L1-1VK9-LP
		Spark arresting, holding current reduction	-5 ... +60	K6R	0.35	24	VAVE-L1-1K6-LR
				K7R			VAVE-L1-1K7-LR
				K8R			VAVE-L1-1K8-LR
				K9R			VAVE-L1-1K9-LR
	NEBU-M8 ...	Spark arresting, bipolar	-5 ... +60	R8	1	12/24	VAVE-L1-1VR8-LP
		Spark arresting, holding current reduction		R8R	0.35	24	VAVE-L1-1R8-LR
		Spark arresting, bipolar		R1	1	12/24	VAVE-L1-1VR1-LP
		Spark arresting, holding current reduction		R1R	0.35	24	VAVE-L1-1R1-LR

Solenoid valves VUVG

Accessories

FESTO

Ordering data			
	Description	Cable length [m]	Type
Plug socket with cable, not sheathed, open end		Technical data → Internet: nebv	
	For E-box code H2, H2R or H3, H3R, 2-pin socket	0.5	NEBV-H1G2-KN-0.5-N-LE2
		1	NEBV-H1G2-KN-1-N-LE2
		2.5	NEBV-H1G2-KN-2.5-N-LE2
		5	NEBV-H1G2-KN-5-N-LE2
Plug socket with cable, sheathed, open end		Technical data → Internet: nebv	
	For E-box code H2, H2R or H3, H3R, 2-pin socket	0.5	NEBV-H1G2-P-0.5-N-LE2
		1	NEBV-H1G2-P-1-N-LE2
		2.5	NEBV-H1G2-P-2.5-N-LE2
		5	NEBV-H1G2-P-5-N-LE2
Plug socket with cable, not sheathed, open end		Technical data → Internet: nebv	
	For E-box code S2, S2R or S3, S3R, 2-pin socket	0.5	NEBV-HSG2-KN-0.5-N-LE2
		1	NEBV-HSG2-KN-1-N-LE2
		2.5	NEBV-HSG2-KN-2.5-N-LE2
		5	NEBV-HSG2-KN-5-N-LE2
Plug socket with cable, sheathed, open end		Technical data → Internet: nebv	
	For E-box code S2, S2R or S3, S3R, 2-pin socket	0.5	NEBV-HSG2-P-0.5-N-LE2
		1	NEBV-HSG2-P-1-N-LE2
		2.5	NEBV-HSG2-P-2.5-N-LE2
		5	NEBV-HSG2-P-5-LE2
Connecting cable, open end		Technical data → Internet: nebu	
	For E-box code R8, 3-pin, straight socket, M8x1	2.5	NEBU-M8G3-K-2.5-LE3
		5	NEBU-M8G3-K-5-LE3
	For E-box code R1, 4-pin, straight socket, M8x1	2.5	NEBU-M8G4-K-2.5-LE4
		5	NEBU-M8G4-K-5-LE4
Connecting cable, open end		Technical data → Internet: nebu	
	For E-box code R8, 3-pin, angled socket, M8x1	2.5	NEBU-M8W3-K-2.5-LE3
		5	NEBU-M8W3-K-5-LE3
	For E-box code R1, 4-pin, angled socket, M8x1	2.5	NEBU-M8W4-K-2.5-LE4
		5	NEBU-M8W4-K-5-LE4
Connecting cable			
	For E-box code R8, 3-pin, straight socket, M8x1	0.5	NEBU-M8G3-K-0.5-M8G3
		1	NEBU-M8G3-K-1-M8G3
		2.5	NEBU-M8G3-K-2.5-M8G3
		5	NEBU-M8G3-K-5-M8G3
		10	NEBU-M8G3-K-10-M8G3
	For E-box code R1, 4-pin, straight socket, M8x1	2.5	NEBU-M8G3-K-2.5-M8G4
2.5		NEBU-M8G4-K-2.5-M8G4	

Solenoid valves VUVG

Accessories


FESTO

Ordering data			
	Description		Type
Blanking plug			Technical data → Internet: b
	For manifold rail and valve		B-M5-B
			B-M7
	For manifold rail		B-1/8
			B-1/4
Blanking plug			Technical data → Internet: qs
	For valve		QSC-F-G1/8-I
Reducing nipple			
	–		D-M5I-M7A-ISK
Fittings			Technical data → Internet: qsm
	For tubing Ø 3 mm	100 pieces	QSM-M3-3-I-R-100
	For tubing Ø 4 mm		QSM-M3-4-I-R-100
	For tubing Ø 3 mm		QSM-M5-3-I-R100
	For tubing Ø 4 mm		QSM-M5-4-I-R100
	For tubing Ø 6 mm		QSM-M5-6-I-R100
	For tubing Ø 6 mm		QSM-M7-6-I-R100
	For tubing Ø 3 mm	10 pieces	QSM-M5-3-I
	For tubing Ø 4 mm		QSM-M5-4-I
	For tubing Ø 6 mm		QSM-M5-6-I
	For tubing Ø 4 mm		QSM-M7-4-I
	For tubing Ø 6 mm		QSM-M7-6-I
	For tubing Ø 4 mm		10 pieces
	For tubing Ø 6 mm	QS-G1/8-6-I	
	For tubing Ø 8 mm	QS-G1/8-8-I	
	For tubing Ø 10 mm	QS-G1/8-10-I	
	For tubing Ø 6 mm	10 pieces	QS-G1/4-6-I
	For tubing Ø 8 mm		QS-G1/4-8-I
	For tubing Ø 10 mm		QS-G1/4-10-I
Silencer			Technical data → Internet: uc
	For thread M5	–	U-M5
	For thread M7		UC-M7
	For thread G1/8		UC-1/8
	For thread G1/4		UC-1/4

Solenoid valves VUVG

Accessories


FESTO

Ordering data			
	Description		Type
H-rail			Technical data → Internet: nrh
	To EN 60715, 35 x 7.5 (WxH)	2 m	NRH-35-2000
H-rail mounting			Technical data → Internet: vame
	–	2 pieces	VAME-T-M4
Covers for manual override			Technical data → Internet: vmpa
	Covered	10 pieces	VMPA-HBV-B
	Non-detenting		VMPA-HBT-B
Inscription label holder			Technical data → Internet: aslr
	Holder for an inscription label and cover for mounting screw and manual override	10 pieces	ASLR-D-L1

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

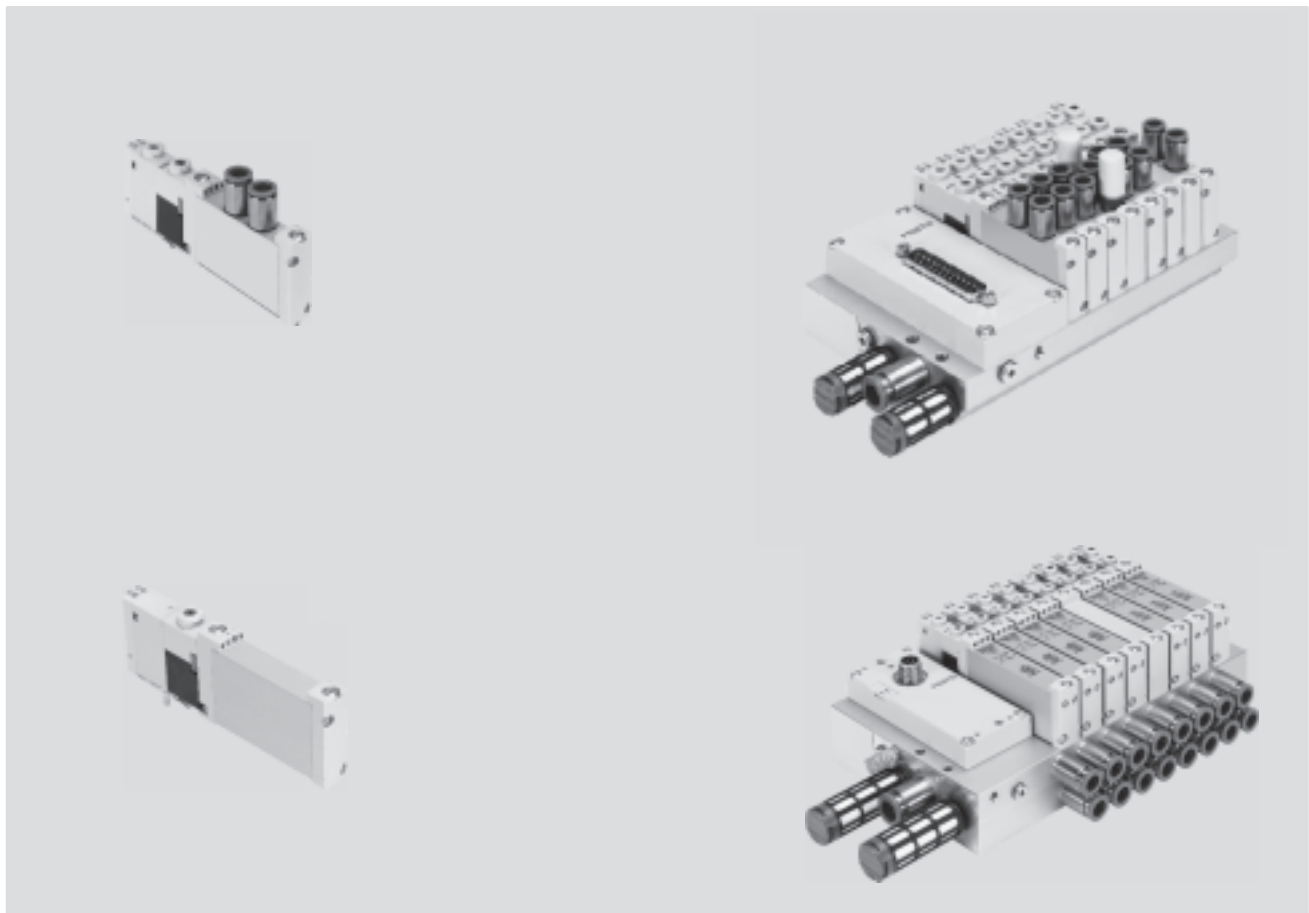Key features



Innovative

- I-Port interface for fieldbus nodes (CTEU)
- IO-Link mode for direct connection to a higher-level IO-Link master
- Variable multi-pin plug connection using Sub-D or flat cable
- Reversible piston spool valves, up to 24 valve positions
- Reduced power consumption
- Excellent price/performance ratio

Versatile

- Choice of quick plug connectors
- Multiple pressure zones possible
- Sub-D variant and fieldbus connection rated to IP67
- Internal or external pilot air with the same manifold rail possible through the use of blanking plugs
- Sub-base valves with working ports underneath for installation in control cabinets

Reliable

- Sturdy and durable metal components
 - Valves
 - Manifold rails
- Fast troubleshooting thanks to LED display
- Choice of manual override: non-detenting, detenting or covered

Easy to mount

- Easy mounting thanks to captive screws and seal
- Connection technology easy to change via the E-box
- Inscription label holder for labelling

Valve terminal configurator

A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product.

Valve terminals VTUG are ordered via an identcode. All valve terminals are supplied fully assembled and individually tested.

This reduces assembly and installation time to a minimum.


Download CAD Data → www.festo.com/us/cad

Ordering system for valve terminal VTUG
→ Internet: vtug


Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features


Sub-base and semi in-line valves



Sub-base valve
VUVG-B...1T1




VUVG-S...1T1
Semi in-line valve



Valve terminal VTUG
with variable electrical connection

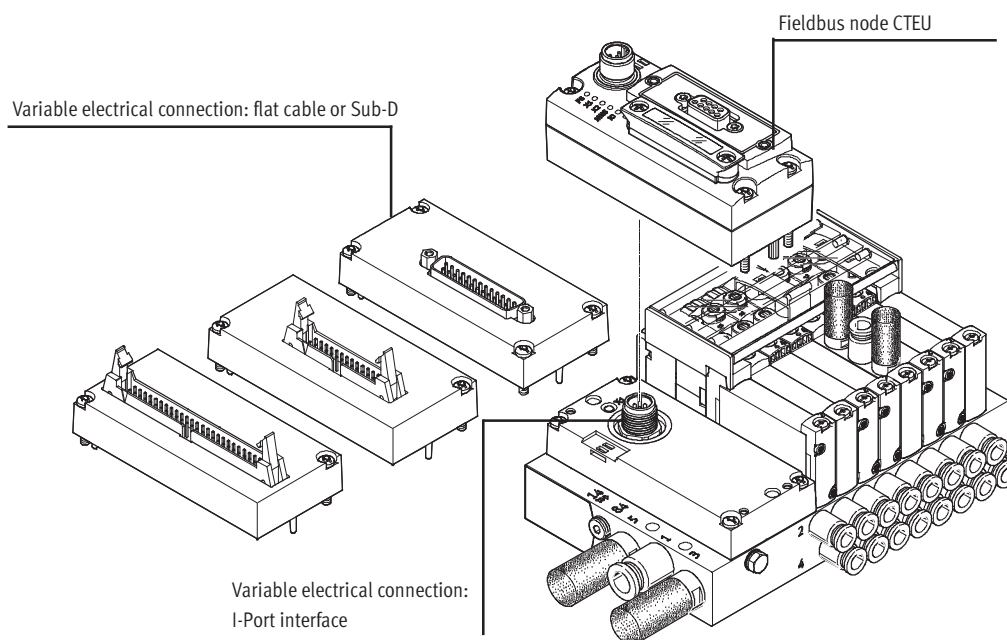Overview



Equipment options

Valve functions

- 2x3/2-way, 5/2-way, 5/3-way valves
- Reversible piston spool valves, up to 24 valve positions

Electrical connection options


- IO-Link mode for direct connection to a higher-level IO-Link master
- Fieldbus node CTEU
- Variable multi-pin plug connection using Sub-D or flat cable

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO


Key features

Basic valves VUVG




- Width 10 and 14 mm
- Semi in-line valves
- Sub-base valves
- 2x3/2-way, 5/2-way and 5/3-way valves

Valve functions




- 2x3/2-way valve, normally open, mechanical spring
- 2x3/2-way valve, normally open, pneumatic spring
- 2x3/2-way valve, normally closed, mechanical spring
- 2x3/2-way valve, normally closed, pneumatic spring
- 2x3/2-way valve, 1x normally closed, 1x normally open, pneumatic spring
- 2x3/2-way valve, 1x normally closed, 1x normally open, mechanical spring
- 5/2-way single solenoid valve, pneumatic/mechanical spring (size 10)
- 5/2-way single solenoid valve, mechanical spring
- 5/2-way single solenoid valve, pneumatic spring (size 14)
- 5/2-way double solenoid valve
- 5/3-way valve, mid-position pressurised
- 5/3-way valve, mid-position exhausted
- 5/3-way valve, mid-position closed

Cover caps for manual override




- Closed cover cap for covering the manual override
- Slotted cover cap for enabling only non-detenting operation of the manual override

Identification holder



- Identification holder ASLR-D-L1 for identifying the individual valves and as a cover for the manual overrides

Inscription label holder




- Inscription label holder ASCF-H-L1-... for identifying the valves on the valve terminal VTUG

Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features

Multi-pin plug connection




The signals are transmitted from the controller to the valve terminal via a pre-assembled or self-assembled multi-wire cable to the multi-pin plug connection,

which substantially reduces installation time. The valve terminal can be equipped with max. 48 solenoid coils.

Versions:

- Sub-D connection
- Flat cable

I-Port interface



Festo-specific interface as a basis for fieldbus nodes (CTEU) or in IO-Link mode for direct connection to a higher-level IO-Link master.

Transmission of communication data and the power supply takes place via an M12 plug on the terminal.

Connection options:

- As an I-Port interface for fieldbus nodes (CTEU)
- In IO-Link mode for direct connection to an IO-Link master

Valve terminal configurator

Download CAD Data → www.festo.com/us/cad

A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product.

Valve terminals VTUG are ordered via an identcode.
All valve terminals are supplied fully assembled and individually tested.

This reduces assembly and installation time to a minimum.

Ordering system for valve terminal VTUG


- Individual electrical connection
 - Electrical multi-pin plug connection
- Internet: vtug

Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatic components


FESTO

Manifold rail for semi in-line valves



- For semi in-line valves M5, M7, width 10 mm and G1/8, size 14 mm
- For 2x3/2-way, 5/2-way and 5/3-way valves
- 4 to 24 valve positions with electrical interlinking
- The semi in-line valves are always supplied with external pilot air. The pilot air is set via the manifold rail. A short and a long blanking plug are included with the manifold rail for this purpose.

Manifold rail for sub-base valves




- For sub-base valves M5/M7, width 10 mm and G1/8, width 14 mm
- For 2x3/2-way, 5/2-way and 5/3-way valves
- 4 to 24 valve positions with electrical interlinking
- The sub-base valves are always supplied with external pilot air. The pilot air is set via the manifold rail. A short and a long blanking plug are included with the manifold rail for this purpose.

Note


Pressurisation and exhaust at both ends is recommended for an optimised flow rate in cases where there are multiple valves switching simultaneously.

Blanking plate for vacant position



- Vacant position cover

Supply plate



- For additional air supply and exhaust via a valve position

Note

Supply plate
VABF-L1-14-P3A4-G18-T1
can only be used with G fittings.
R fittings are not permitted.

Separator for pressure zones



- For creating multiple pressure zones in a valve terminal

Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatic components

Creating pressure zones and separating exhaust air

Compressed air is supplied and exhausted via the manifold rail and via supply plates.

The position of the supply plates and duct separations can be freely selected with the VTUG.

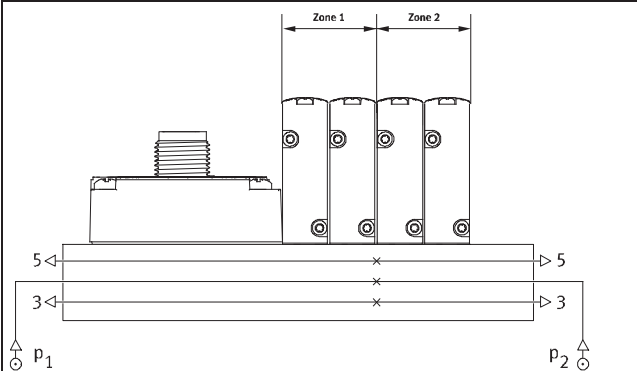
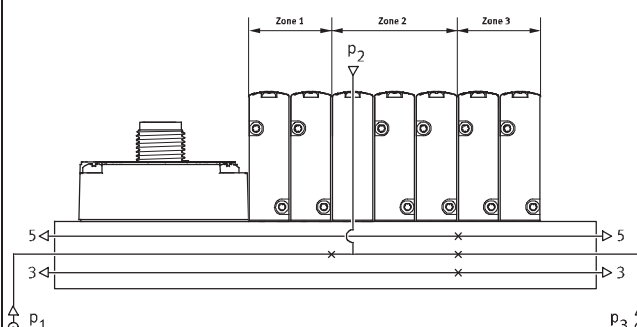
Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by means of appropriate duct separation.

Pressure zone separation can be used for the following ducts:


- Duct 1
- Duct 3
- Duct 5

Note

- Use a separator if the exhaust air pressures are high
- Use at least one supply plate/supply for each pressure zone
- Pressure zone separation is not possible with pilot air supply (duct 12/14)

Duct separation	
Description	
	The pressure zones can be freely configured with the VTUG. The following duct separations are possible: • Duct 1 closed
	
	• Duct 1/3/5 closed 
	• Duct 3/5 closed 
	The number of pressure zones with the VTUG is only limited by the number of valve positions on the manifold rail. Note that each supply plate occupies one valve position.

Separator VABD



Note

With the VTUG, several pressure zones can be created by mounting separators (VABD). The separators are mounted in the profile using a slotted screwdriver.

Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatic components

FESTO

Pilot air supply

Internal pilot air supply

Internal pilot air supply can be chosen with an operating pressure in the range 1.5 ... 8 bar, 2.5 ... 8 bar or 3 ... 8 bar (depending on the valve used).

The pilot air supply is branched from duct 1 (compressed air supply) using an internal connection.

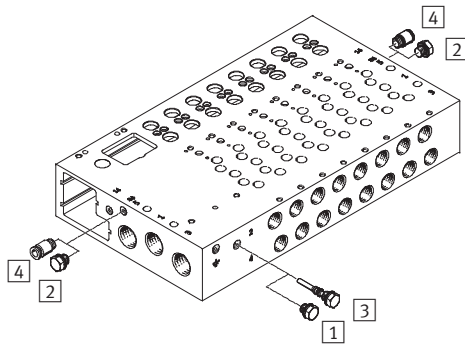
External pilot air supply

External pilot air supply is required for vacuum operation and operating pressures >8 bar.
The port for external pilot air supply (port 12/14) is located on the manifold rail.

Pilot exhaust air port

The pilot air is exhausted via duct 82/84 of the manifold rail.

Pilot air supply



- 1 Blanking plug, short, with internal pilot air
- 2 Blanking plug for duct 12/14 with internal pilot air
- 3 Blanking plug, long, with external pilot air
- 4 QS fitting for duct 12/14 with external pilot air

The manifold rails have an internal conduit between duct 12/14 and duct 1.

Internal or external pilot air supply is selected by inserting a blanking plug into this conduit.

Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatic components

Operation with different pressures

Vacuum operation

Points to note with 3/2-way valves with pneumatic spring return

The 3/2-way valves are available in a design with two valves in one valve body and with pneumatic spring return. With these valves, the energy for the return movement is obtained from port 1.

Vacuum operation is therefore only possible at port 3 and 5, not at port 1.

With external pilot air supply, vacuum can be connected at port 1, 3, 5 of the 5/2-way and 5/3-way valves.

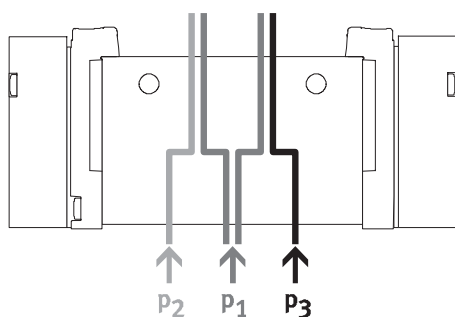
Reverse operation

The 3/2-way valves with pneumatic spring are not suitable for reverse operation, since at least the minimum pilot pressure must be present in duct 1.

Note

Pressure must be present at port 1.

Pressure deflector (internal pilot air)



- If two different pressures are required.

- Different pressures can be supplied at duct 1, 3 and 5.

Note

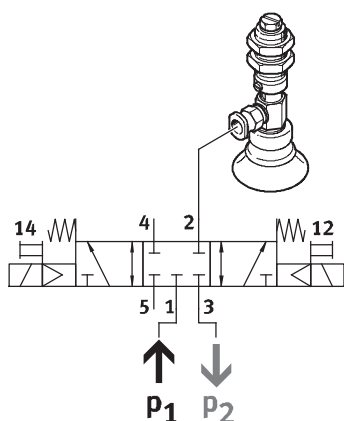
- With internal pilot air, the minimum pilot pressure must be adhered to in duct 1
- With 2x3/2-way valves without

spring return, the minimum pilot pressure must always be adhered to in duct 1

Advantages

- Any pressure or vacuum can be connected at duct 3 and 5 both with external and internal pilot air

Vacuum, ejector pulse and normal position



Vacuum, ejector pulse and normal position with internal pilot air can be achieved by connecting vacuum

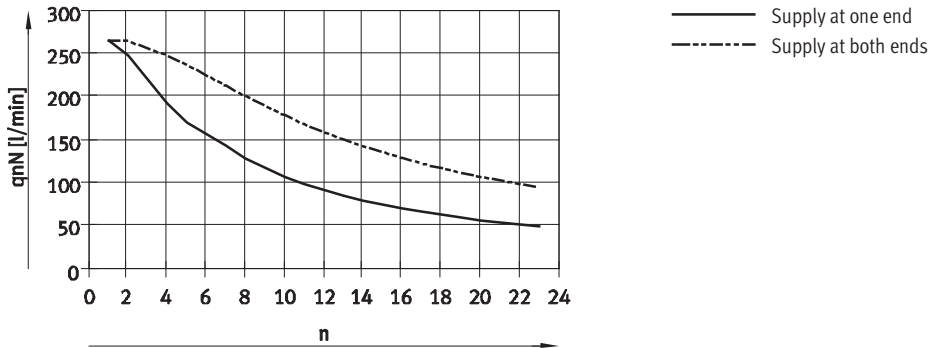
at duct 3 and pressure for the ejector pulse at duct 1.

Valve terminals VTUG with multi-pin plug and fieldbus connection


Key features – Pneumatic components

FESTO

Standard nominal flow rate q_{nN} with 5/2-way valve with multiple valves n switched simultaneously, size 10




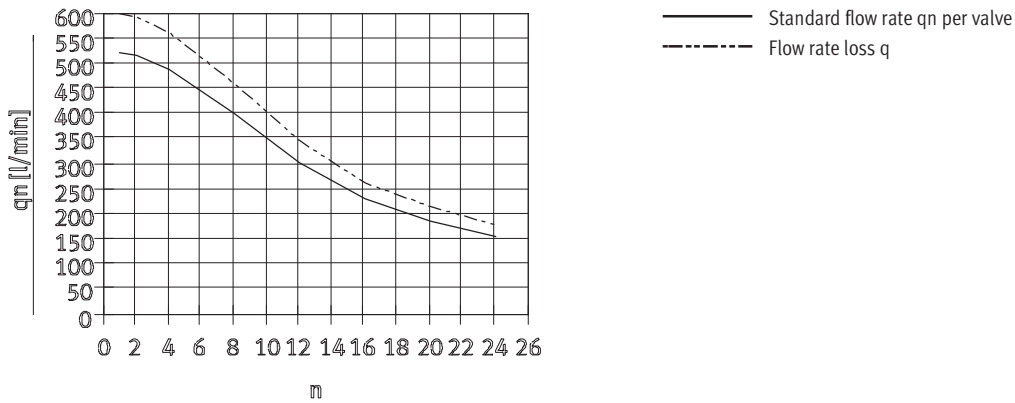Standard flow rate q_n as a function of the number of switched valves n , size 14




Pilot pressure p_2 as a function of operating pressure p_1

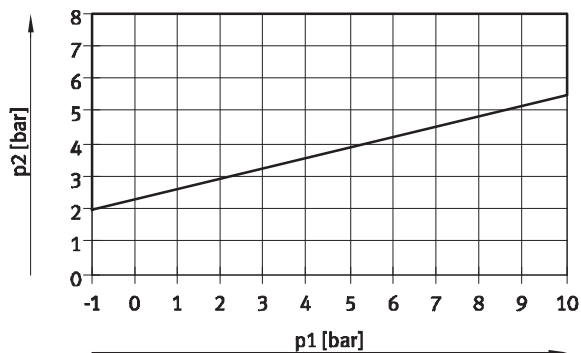
VUVG-...T32-MZT



VUVG-...T32-AZT

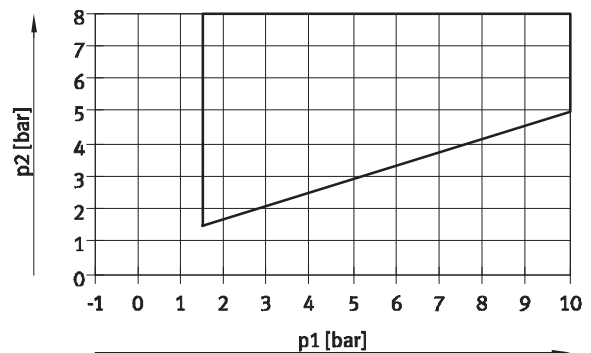

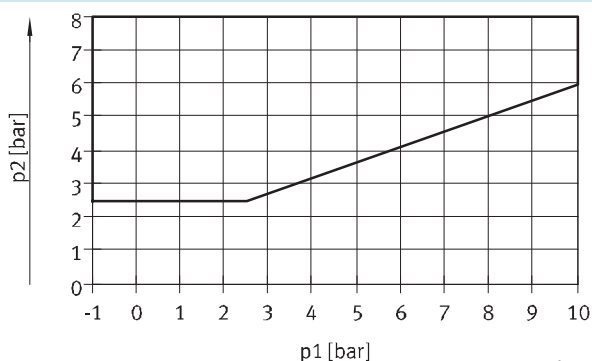VUVG-...10-M52-RZT-.../VUVG-...14-M52-AZT-...



Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Assembly

Valve terminal assembly

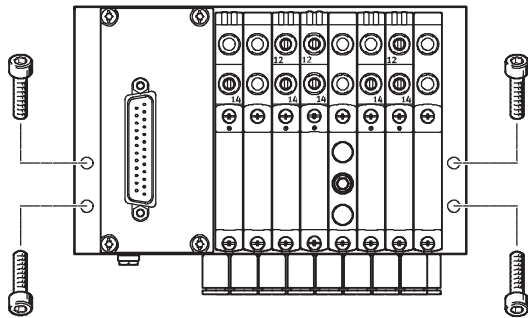
Sturdy terminal assembly thanks to:

- Four through-holes for wall mounting
- H-rail mounting

Note

The thread M5 on the manifold block is provided for earthing the valve terminal.


Wall mounting



The valve terminal VTUG is screwed onto the mounting surface using four M4 screws.

The mounting holes are on the left-hand and right-hand side of the manifold rail.

H-rail mounting



The valve terminal VTUG is attached to the H-rail (see arrow A).

The terminal is then swivelled around the H-rail and secured in place with the clamping component (see arrow B).

The manifold rails can be attached to an H-rail to DIN EN 60715-TH35 using the H-rail mounting kit VAME-T-M4.

The following screws must be used to attach the manifold rails:

- Size 10: M4x30 to DIN 912
- Size 14: M4x40 to DIN 912


Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Assembly

FESTO


Manual override (MO)

MO with automatic return, non-detenting



- 1 Press in the stem of the MO with a pointed object or screwdriver. Pilot valve switches and actuates the main valve.
- 2 Remove the pointed object or screwdriver. Spring force pushes the stem of the MO back. Pilot valve returns to its initial position and so too the single solenoid main valve (not with double solenoid valve code J).


MO set via turning, non-detenting/detenting (standard version)



- 1 Press in the stem of the MO with a pointed object or screwdriver until the valve switches and then turn the stem clockwise by 90° until the stop is reached. Valve remains switched.
- 2 Turn the stem anti-clockwise by 90° until the stop is reached and then remove the pointed object or screwdriver. Spring force pushes the stem of the MO back. Valve returns to its initial position (not with double solenoid valve code J).

Inscription system

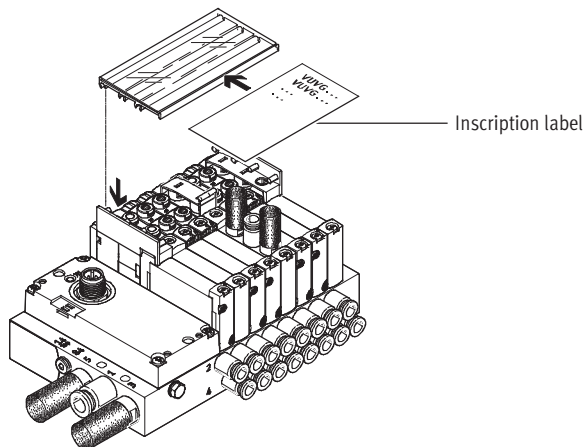Inscription label holder




An inscription label holder ASCF-H-L1 (code TT) can be mounted for labelling the valves. The inscription label holder can be opened for inserting the inscription label and for actuating the manual override. The inscription label holders are available in different sizes depending on the number of valves.

Note

The inscription label holder covers the manual override of the valves beneath it after mounting (manual override can only be actuated without detent). For this reason, the manual override for these valves must not be engaged/actuated when mounting the inscription label holder.

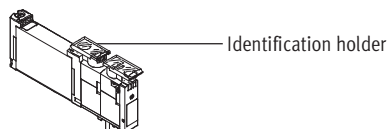Identification holder













The identification holder ASLR-D-L1 (code TV) can alternatively be used to label the individual valves. This identification holder is placed directly on the manual override.

Note

After mounting the holder, the manual override can only be actuated without detent. For this reason, the manual override must not be actuated/engaged when mounting the identification holder.

Valve terminals VTUG with multi-pin plug and fieldbus connection




Overview of valve functions

Valve	Valve code	Description	Valve terminal/position function order code	Size		
				M5/M7	G1/8	G1/4
2x3/2-way valve, normally closed, pneumatic spring						
	T32C-A	In-line valve, internal pilot air supply	K	■	■	■
2x3/2-way valve, normally open, pneumatic spring						
	T32U-A	Sub-base valve, external pilot air supply	N	■	■	■
2x3/2-way valve, 1x normally open, 1x normally closed, pneumatic spring						
	T32H-A	Sub-base valve, external pilot air supply	H	■	■	■
2x3/2-way valve, normally closed, mechanical spring						
	T32C-M	Sub-base valve, external pilot air supply	VK	■	■	■
2x3/2-way valve, normally open, mechanical spring						
	T32U-M	Sub-base valve, external pilot air supply	VN	■	■	■
2x3/2-way valve, 1x normally open, 1x normally closed, mechanical spring						
	T32H-M	Sub-base valve, external pilot air supply	VH	■	■	■
5/2-way double solenoid valve						
	B52	Sub-base valve, external pilot air supply	J	■	■	■
5/2-way single solenoid valve, pneumatic spring						
	M52-A	Sub-base valve, external pilot air supply	M	-	■	-
5/2-way single solenoid valve, mechanical spring						
	M52-M	Sub-base valve, external pilot air supply	A	■	■	■
5/2-way single solenoid valve, pneumatic/mechanical spring						
	M52-R	Sub-base valve, external pilot air supply	P	■	-	■

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO


Overview of valve functions

Valve	Valve type code	Description	Valve terminal/position function order code	Size		
				M5/M7	G1/8	G1/4
5/3-way valve, mid-position closed						
	P53C	Sub-base valve, external pilot air supply	G	■	■	■
5/3-way valve, mid-position pressurised						
	P53U	Sub-base valve, external pilot air supply	B	■	■	■
5/3-way valve, mid-position exhausted						
	P53E	Sub-base valve, external pilot air supply	E	■	■	■

Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview – Semi in-line valves

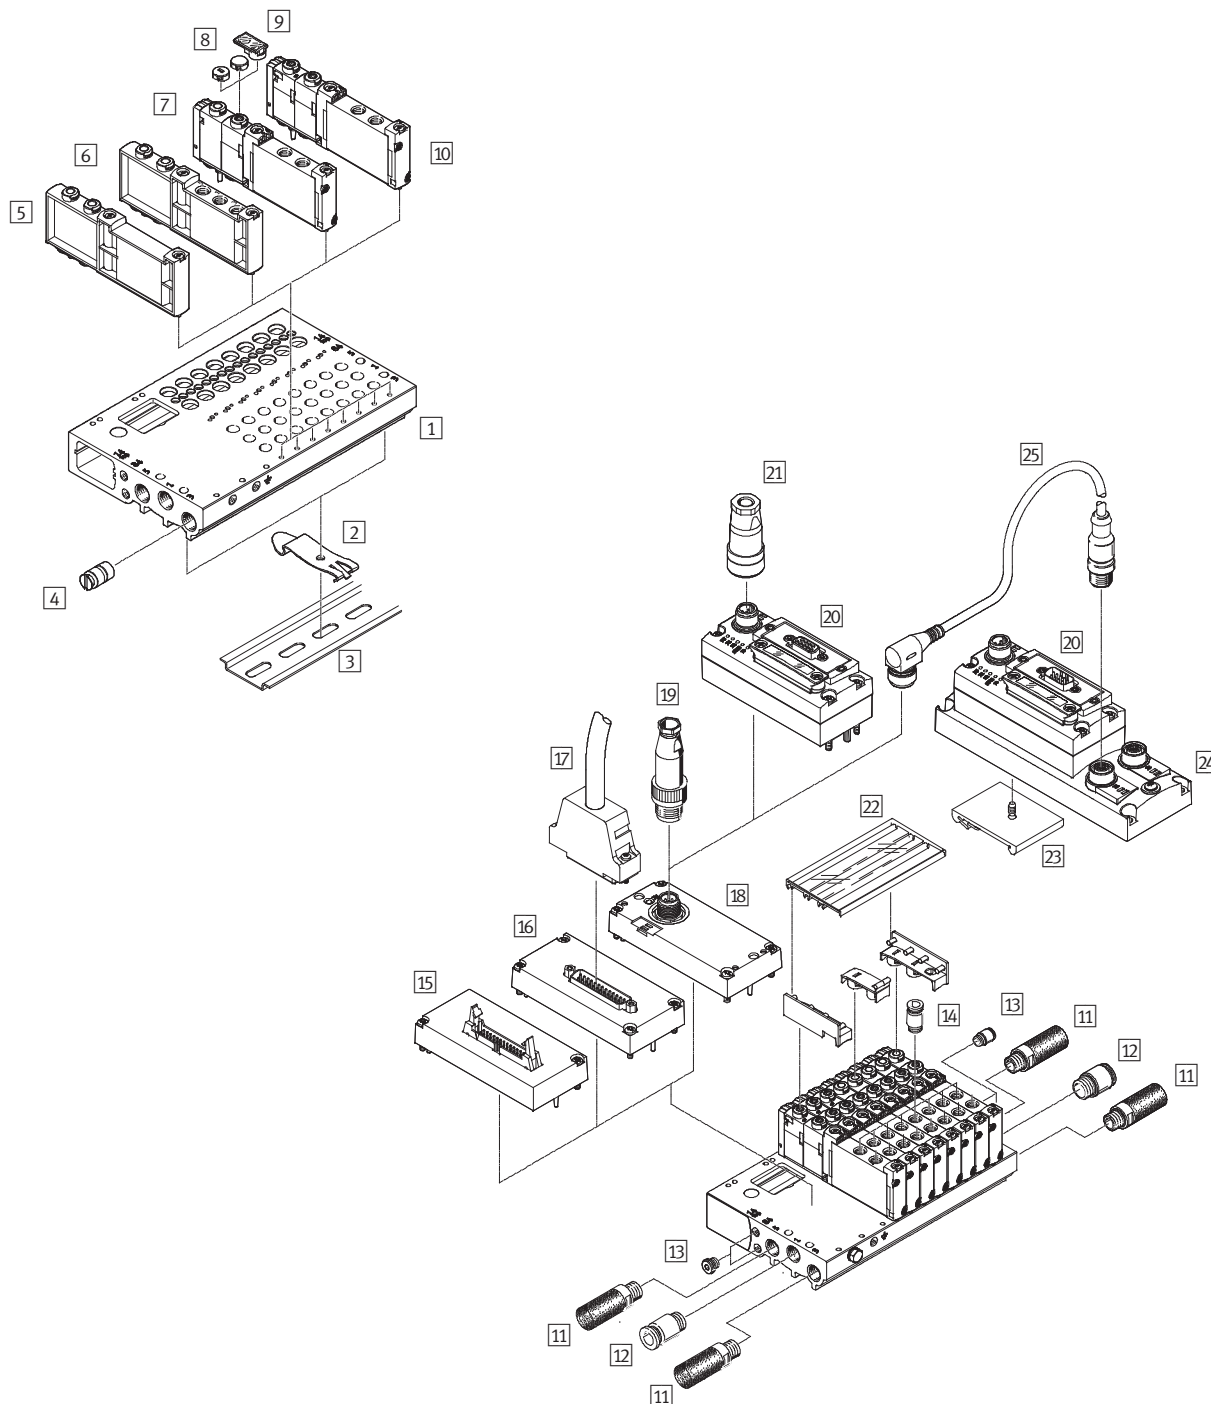Valve terminal overview – Semi in-line valves



Accessories				
	Type	Brief description	➔ Page/Internet	
1	Manifold rail	VABM-L1-...	For 4 to 10, 12, 14, 16, 20 and 24 valve positions	108
2	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve terminal on an H-rail	122
3	H-rail	NRH-35-2000	For mounting the valve terminal	122
4	Separator	VABD-...	For creating pressure zones	122
5	Blanking plate	VABB-L1-...	For covering an unused valve position	122
6	Supply plate	VABF-L1-...	For air supply port 1 and outlet port 3 and 5	122
7	Solenoid valve	VUVG-...	Semi in-line valve, 5/2-way single solenoid	83/87/91/95

Valve terminals VTUG with multi-pin plug and fieldbus connection


Peripherals overview – Semi in-line valves

Accessories				
	Type	Brief description	➔ Page/Internet	
8	Cover cap	VMPA-HB...-B	Cover cap for manual override	122
9	Identification holder	ASLR-D-L1	For inscription label and covering the mounting screw/manual override	123
10	Solenoid valve	VUVG-...	Semi in-line valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way	83/87
11	Silencer	U-...	For outlet port 3 and 5	121
12	Push-in fitting	QS-...	Push-in fitting for air supply port 1	121
13	Blanking plug	B-...	For internal/external pilot air	121
14	Push-in fitting	QS-...	For port 2/4	121
15	Electrical interface	VAEM-L1-S-M3-...	Flat cable	114
16	Electrical interface	VAEM-L1-S-M1-...	Sub-D	114
17	Connecting cable	NEBV-...	Sub-D cable	114
18	I-Port interface	VAEM-L1-S-...-PT	IO-Link	117
19	Plug	SEA-M12-5GS-PG7	Straight plug for I-Port interface/IO-Link	117
20	Fieldbus	CTEU-...	Fieldbus node	120
21	Power supply socket	NTSD/FBSD	Power supply for fieldbus node CTEU	121
22	Inscription label holder	ASCF-H-L1	For identifying the valves	123
23	H-rail	CAFM-F1-H	For E-box CAPC	119
24	E-box	CAPC-F1-E-M12	For connecting a second device with I-Port interface	119
25	Connecting cable	NEBU	–	nebu

Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview – Sub-base valves

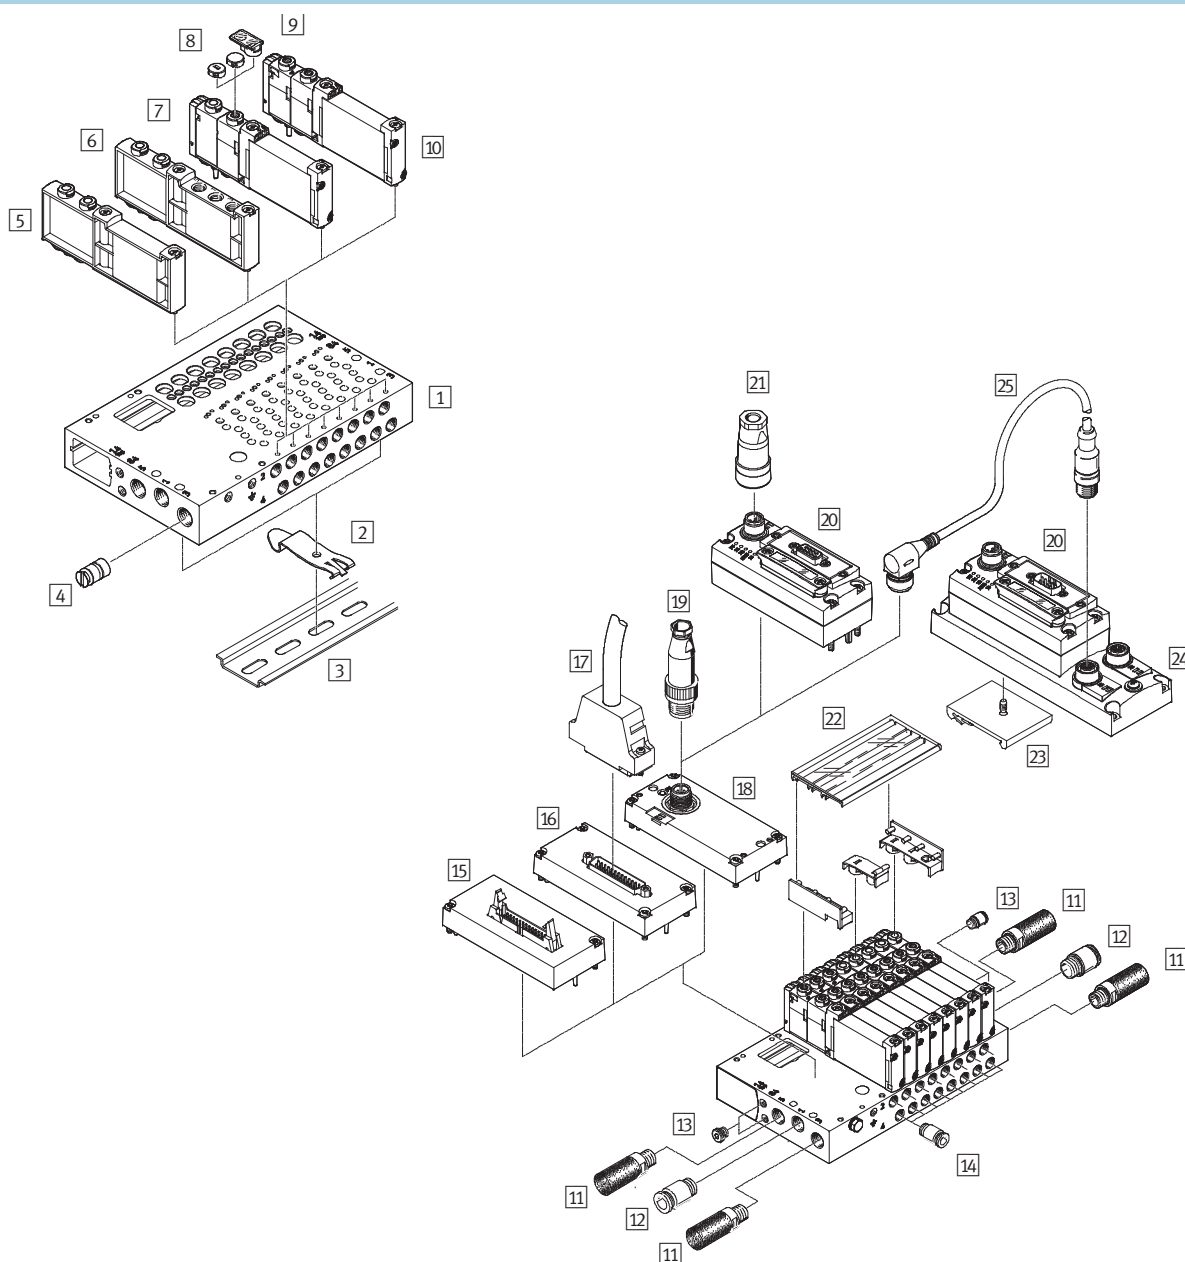Valve terminal overview – Sub-base valves



Accessories				
	Type	Brief description	➔ Page/Internet	
1	Manifold rail	VABM-L1-...	For 4 to 10, 12, 14, 16, 20 and 24 valve positions	108
2	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve terminal on an H-rail	122
3	H-rail	NRH-35-2000	For mounting the valve terminal	122
4	Separator	VABD-...	For creating pressure zones	122
5	Blanking plate	VABB-L1-...	For covering an unused valve position	122
6	Supply plate	VABF-L1-...	For air supply port 1 and outlet port 3 and 5	122
7	Solenoid valve	VUVG- ...	Sub-base valve, 5/2-way single solenoid	91/95
8	Cover cap	VMPA-HB...-B	Cover cap for manual override	122
9	Identification holder	ASLR-D-L1	For inscription label and covering the mounting screw/manual override	123

Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview – Sub-base valves

Accessories			
	Type	Brief description	→ Page/Internet
10	Solenoid valve	VUVG- ...	Sub-base valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way
11	Silencer	U...	For outlet port 3 and 5
12	Push-in fitting	QS...	Push-in fitting for air supply port 1
13	Blanking plug	B-...	For internal/external pilot air
14	Push-in fitting	QS...	For port 2/4
15	Electrical interface	VAEM-L1-S-M3-...	Flat cable
16	Electrical interface	VAEM-L1-S-M1-...	Sub-D
17	Connecting cable	NEBV-...	Sub-D cable
18	I-Port interface	VAEM-L1-S-...-PT	IO-Link
19	Plug	SEA-M12-5GS-PG7	Straight plug for I-Port interface/IO-Link
20	CTEU	CTEU-...	Fieldbus node
21	Power supply socket	NTSD	Power supply for fieldbus node CTEU
22	Inscription label holder	ASCF-H-L1	For identifying the valves
23	H-rail	CAFM-F1-H	For E-box CAPC
24	E-box	CAPC-F1-E-M12	For connecting a second device with I-Port interface
25	Connecting cable	NEBU	–
			nebu

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Semi in-line valves M5/M7

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	130 ... 330 l/min
5/3C, 5/3U, 5/3E	Voltage
	24 V DC

Circuit symbol → page 10



General technical data												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position	Monostable							Bistable	Monostable			
Pneumatic spring reset method	Yes			No			Yes ⁵⁾	–	No	–		
Mechanical spring reset method	No			Yes			Yes ⁵⁾	–	Yes	–		
Vacuum operation at port 1	No			With external pilot air								
Design	Piston spool valve											
Sealing principle	Soft											
Actuation type	Electric											
Type of control	Piloted											
Pilot air supply	External											
Exhaust function	With flow control											
Manual override	Choice of non-detenting/detenting (standard), non-detenting or covered											
Type of mounting	On manifold rail											
Mounting position	Any											
Switching position display	LED											
Standard nominal flow rate M5	[l/min]	150			130			230			210	
Standard nominal flow rate M7	[l/min]	160			140			330			290	
Flow rate on manifold rail M5	[l/min]	150			130			230			210	
Flow rate on manifold rail M7	[l/min]	160			140			330			290	
Width	[mm]	10										
Port 1, 3, 5	On manifold rail											
Port 2, 4	VUVG-S10-...-M5	M5										
Port 2, 4	VUVG-S10-...-M7	M7										
Port 12, 14	On manifold rail											
Product weight	[g]	59					53	60	53	58		
Corrosion resistance class	CRC	2 ⁶⁾										

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Semi in-line valves M5/M7

Operating and environmental conditions							
Valve function		T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾	P53
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:4:4]					
Operating pressure	Internal	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8 -0.9 ... 10
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60				
Temperature of medium		[°C]	-5 ... +60				

- 1) Pneumatic spring
 2) Mixed, pneumatic/mechanical spring
 3) Mechanical spring
 4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via manifold rail
Operating voltage	[V DC] 24 ±10%
Power consumption per valve solenoid	[W] 1/0.4 (after 25 ms)
Duty cycle	[%] 100
Protection class to EN 60529	IP40 as standard (optionally IP67 with Sub-D and IO-Link interface with feature "S8" ¹⁾)

- 1) S8= IP67 protection class for electrics

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant


Valve switching times [ms]						
Valve function	T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾	P53
Switching time on	[ms] 8	10	9	–	12	12
Switching time off	[ms] 20	20	21	–	30	38
Changeover time	[ms] –	–	–	9	–	16

- 1) Pneumatic spring
 2) Mixed, pneumatic/mechanical spring
 3) Mechanical spring

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Semi in-line valves M5/M7

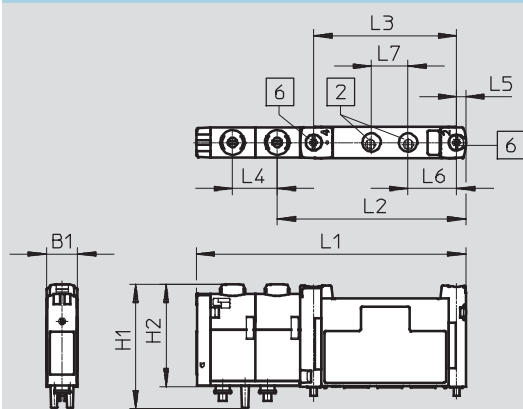Dimensions – Semi in-line valves M5/M7










2 Ports 2 and 4: M5/M7

6 Mounting screw

Type	B1	H1	H2	L1	L2	L3	L4	L5	L6	L7
VUVG-S10-...-M5-1T1L	10.3	40.9	33.6	88.6	62	47	14.7	3	16	12
VUVG-S10-...-M7-1T1L										

Valve terminals VTUG with multi-pin plug and fieldbus connection

Order code – Semi in-line valves M5/M7


VUVG		-	10	-					
Valve design									
Semi in-line valves		S						Display	
								L	LED
Width								Electrical connection	
10 mm		10						T1	Plug-in
Valve functions								Nominal operating voltage	
					M52		1		
					B52		24 V DC		
					P53C		Pneumatic connection		
					P53U		M5		
					P53E		M7		
					T32C		Q3		
					T32H		Q4		
					T32U		QH4		
							Q6		
							QH6		
							T14		
							TH14		
							T18		
							T316		
							TH316		
							T532		
					Manual override				
					H				
					S				
					T				
					Pilot air				
					Z				
					Reset method				
					A				
					M				
					R				
					-				

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Semi in-line valves G1/8

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	520 ... 630 l/min
5/3C, 5/3U, 5/3E	Voltage
	24 V DC
Circuit symbol → page 10	

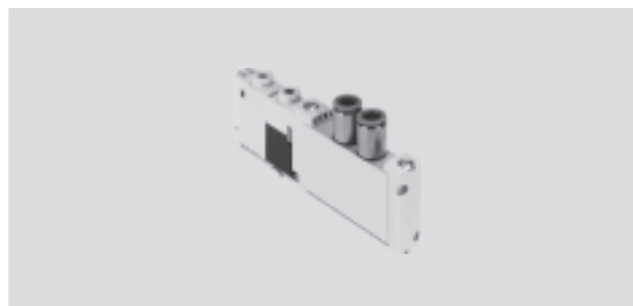

General technical data												
Valve function	T32-A			T32-M			M52-A	B52	M52-M	P53		
Normal position	C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position	Monostable							Bistable	Monostable			
Pneumatic spring reset method	Yes			No			Yes	–	No	–		
Mechanical spring reset method	No			Yes			No	–	Yes	–		
Vacuum operation at port 1	No			With external pilot air								
Design	Piston spool valve											
Sealing principle	Soft											
Actuation type	Electric											
Type of control	Piloted											
Pilot air supply	External											
Exhaust function	With flow control											
Manual override	Choice of non-detenting/detenting (standard), non-detenting or covered											
Type of mounting	On manifold rail											
Mounting position	Any											
Switching position display	LED											
Standard nominal flow rate G ¹ / ₈	[l/min]	610			520			620	630	620	590	
Flow rate on manifold rail G ¹ / ₈	[l/min]	610			520			620	630	620	590	
Width	[mm]	14										
Port 1, 3, 5	On manifold rail											
Port 2, 4	G ¹ / ₈											
Port 12, 14	On manifold rail											
Product weight	[g]	102			100			91	98	89	95	
Corrosion resistance class	CRC	2 ⁶⁾										

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Semi in-line valves G1/8

Operating and environmental conditions							
Valve function			T32-A ¹⁾	T32-M ³⁾	M52-A ¹⁾	B52	M52-M ³⁾ P53
Operating medium			Compressed air in accordance with ISO 8573-1:2010 [7:4:4]				
Operating pressure	Internal	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	–0.9 ... 10			–0.9 ... 8 –0.9 ... 10
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	–5 ... +60				
Temperature of medium		[°C]	–5 ... +60				

1) Pneumatic spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via sub-base
Operating voltage	[V DC] 24 ±10%
Power	[W] 1/0.4 (after 25 ms)
Duty cycle	[%] 100
Protection class to EN 60529	IP67

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times [ms]							
Valve function			T32-A ¹⁾	T32-M ³⁾	M52-A ¹⁾	B52	M 52-M ³⁾ P53
Switching time on		[ms]	10	13	13	–	10 15
Switching time off		[ms]	29	21	26	–	38 42
Changeover time		[ms]	–	–	–	9	– 25

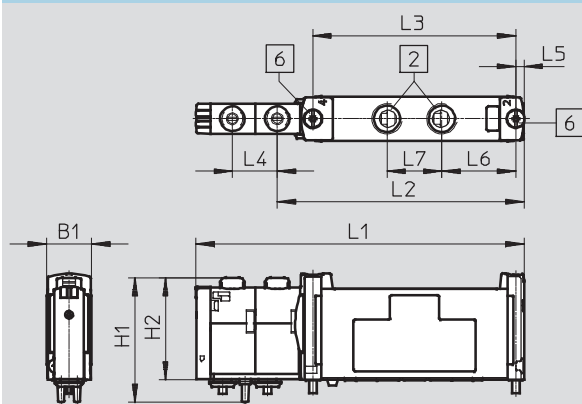
1) Pneumatic spring

3) Mechanical spring

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Semi in-line valves G1/8

Dimensions – Semi in-line valves G1/8



2 Ports 2 and 4: G1/8

6 Mounting screw

Type	B1	H1	H2	L1	L2	L3	L4	L5	L6	L7
VUVG-S14-...-G18-1T1L	14.7	40.9	33.5	107.6	81	66.5	14.7	2.8	24.3	18

Valve terminals VTUG with multi-pin plug and fieldbus connection

Order code – Semi in-line valves G1/8


[illegible]

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves M5/M7

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	130 ... 300 l/min
5/3C, 5/3U, 5/3E	Voltage
	24 V DC

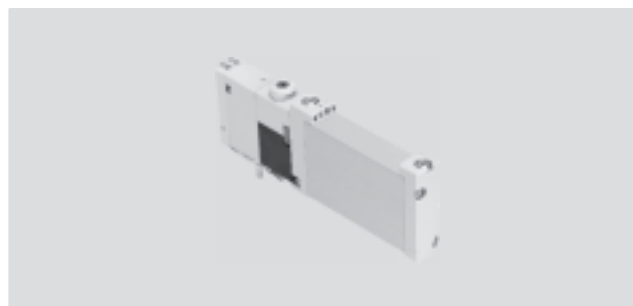Circuit symbol → page 10



General technical data												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²	E ³⁾
Stable position	Monostable							Bistable	Monostable			
Pneumatic spring reset method	Yes			No			Yes ⁵⁾	–	No	–		
Mechanical spring reset method	No			Yes			Yes ⁵⁾	–	Yes	–		
Vacuum operation at port 1	No			With external pilot air								
Design	Piston spool valve											
Sealing principle	Soft											
Actuation type	Electric											
Type of control	Piloted											
Pilot air supply	External											
Exhaust function	With flow control											
Manual override	Choice of non-detenting/detenting (standard), non-detenting or covered											
Type of mounting	On manifold rail											
Mounting position	Any											
Switching position display	LED											
Standard nominal flow rate M5/M7	[l/min]	160			140			300		260		
Flow rate on manifold rail M5, front	[l/min]	150			130			220				200
Flow rate on manifold rail M7, front	[l/min]	160			140			270		240		250
Flow rate on manifold rail M7, underneath	[l/min]	160			140			300		260		
Width	[mm]	10										
Port 1, 3, 5	On manifold rail											
Port 2, 4	M5/M7											
Port 12, 14	On manifold rail											
Product weight	[g]	59					53	60	53	58		
Corrosion resistance class	CRC	2 ⁶⁾										

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves M5/M7

Operating and environmental conditions							
Valve function			T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾ P53
Operating medium			Compressed air in accordance with ISO 8573-1:2010 [7:4:4]				
Operating pressure	Internal	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8 -0.9 ... 10
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60				
Temperature of medium		[°C]	-5 ... +60				

1) Pneumatic spring

2) Mixed, pneumatic/mechanical spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via manifold rail
Operating voltage [V DC]	24 ±10%
Power consumption per valve solenoid [W]	1/0.4 (after 25 ms)
Duty cycle [%]	100
Protection class to EN 60529	IP40 as standard (optionally IP67 with Sub-D and IO-Link interface with feature "S8" ¹⁾)

1) S8= IP67 protection class for electrics

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times [ms]							
Valve function			T32-A ¹⁾	T32-M ³⁾	M52-R ²⁾	B52	M52-M ³⁾ P53
Switching time on		[ms]	8	10	9	–	12 12
Switching time off		[ms]	20	20	21	–	30 38
Changeover time		[ms]	–	–	–	9	– 16

1) Pneumatic spring

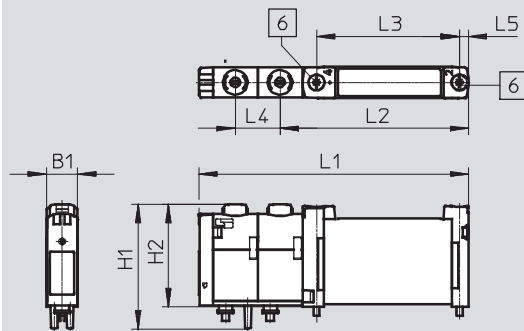
2) Mixed, pneumatic/mechanical spring

3) Mechanical spring

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves M5/M7

Dimensions – Sub-base valves M5/M7











 Mounting screw

Type								
	B1	H1	H2	L1	L2	L3	L4	L5
VUVG-B10-...-F-1T1L	10.3	40.9	33.6	88.6	62	47	14.7	3

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Order code – Sub-base valves M5/M7

VUVG	10
Valve design	
Sub-base valves	B
Width	
10 mm	10
Valve functions	
	M52
	B52
	P53C
	P53U
	P53E
	T32C
	T32H
	T32U

Display	L LED
Electrical connection	T1 Plug-in
Nominal operating voltage	1 24 V DC
Pneumatic connection	F Flange/sub-base
Manual override	
H	Non-detenting
S	Covered
T	Non-detenting, detenting
Pilot air	
Z	External
Reset method	
A	Pneumatic spring for 2x3/2-way
M	Mechanical spring for M52 and 2x3/2-way
R	Pneu./mech. spring for M52
–	With B52 and P53

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves G1/8

Function	Width
2x3/2C, 2x3/2U, 2x3/2H	
5/2-way, single solenoid	Flow rate
5/2-way, double solenoid	440 ... 560 l/min
5/3C, 5/3U, 5/3E	Voltage
	24 V DC

Circuit symbol → page 10



General technical data												
Valve function	T32-A			T32-M			M52-A	B52	M52-M	P53		
Normal position	C ¹⁾	U ²⁾	H ⁴⁾	C ¹⁾	U ²⁾	H ⁴⁾	–	–		C ¹⁾	U ²⁾	E ³⁾
Stable position	Monostable							Bistable	Monostable			
Pneumatic spring reset method	Yes			No			Yes	–	No	–		
Mechanical spring reset method	No			Yes			No	–	Yes	–		
Vacuum operation at port 1	No			With external pilot air								
Design	Piston spool valve											
Sealing principle	Soft											
Actuation type	Electric											
Type of control	Piloted											
Pilot air supply	External											
Exhaust function	With flow control											
Manual override	Choice of non-detenting/detenting (standard), non-detenting or covered											
Type of mounting	On manifold rail											
Mounting position	Any											
Switching position display	LED											
Standard nominal flow rate G18	[l/min]	530			470			550	560	550	510	
Flow rate on manifold rail G18, front	[l/min]	490			440			500	510	500	470	
Flow rate on manifold rail G18, underneath	[l/min]	530			470			550	560	550	510	
Width	[mm]	14										
Port 1, 3, 5	On manifold rail											
Port 2, 4	G1/8											
Port 12, 14	On manifold rail											
Product weight	[g]	102			100			91	98	89	95	
Corrosion resistance class	CRC	2 ⁶⁾										

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves G1/8

Operating and environmental conditions							
Valve function			T32-A ¹⁾	T32-M ³⁾	M52-A ¹⁾	B52	M52-M ³⁾ P53
Operating medium			Compressed air in accordance with ISO 8573-1:2010 [7:4:4]				
Operating pressure	Internal	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8 -0.9 ... 10
Pilot pressure ⁴⁾		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60				
Temperature of medium		[°C]	-5 ... +60				

1) Pneumatic spring

3) Mechanical spring

4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via sub-base
Operating voltage	[V DC] 24 ±10%
Power	[W] 1/0.4 (after 25 ms)
Duty cycle	[%] 100
Protection class to EN 60529	IP67

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times [ms]							
Valve function			T32-A ¹⁾	T32-M ²⁾	M52-A ¹⁾	B52	M52-M ²⁾ P53
Switching time on		[ms]	10	13	13	–	10 15
Switching time off		[ms]	29	21	26	–	38 42
Changeover time		[ms]	–	–	–	9	– 25

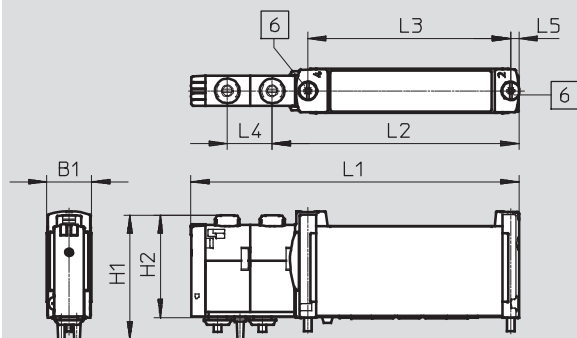
1) Pneumatic spring

2) Mechanical spring

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves G1/8

Dimensions – Sub-base valves G1/8



6 Mounting screw

Type	B1	H1	H2	L1	L2	L3	L4	L5
VUVG-B14-...-F-1T1L	14.7	40.9	33.5	107.6	81	66.5	14.7	2.8

Valve terminals VTUG with multi-pin plug and fieldbus connection

Order code – Sub-base valves G1/8

[illegible]

Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM


General technical data			
Manifold rail		Size 10	Size 14
Type code		VABM	
Grid dimension	[mm]	10.5	16
Mounting position		Any	
Connection type		Semi in-line/sub-base	
Max. number of valve positions		24	
Pneumatic interfaces			
	Port 12/14	M5	
	Port 82/84	M5	
	Port 2, 4	M5/M7	G $\frac{1}{8}$
	Port 1, 3, 5	G $\frac{1}{8}$	G $\frac{1}{4}$
Storage temperature	[°C]	-20 ... 60	

Information on materials	
Manifold rail material	Wrought aluminium alloy
Note on materials	RoHS-compliant

Dimensions – Example of a valve terminal with I-Port interface

Download CAD Data → www.festo.com/us/cad

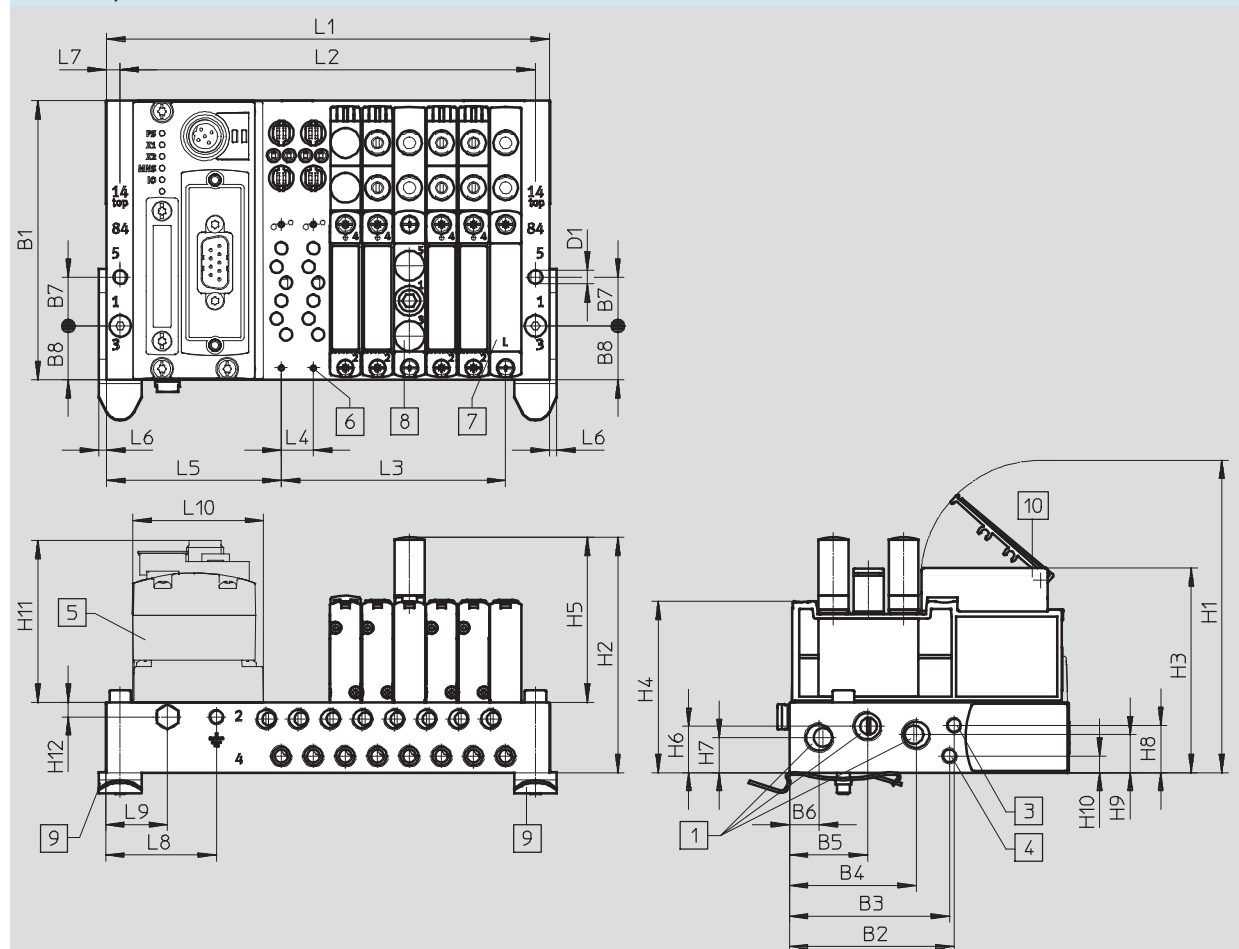Outlet on top



- | | | | |
|--|--|---|-----------------------------|
| 1 Ports 1, 3 and 5: G $\frac{1}{8}$ /G $\frac{1}{4}$
(at both ends) | 5 CTEU-CANopen | 7 Blanking plate | 9 H-rail mounting |
| 3 Ports 12/14: M5 (at both ends) | 6 For mounting valves/blanking
plates/supply plates on
manifold block: M2/M2.5 | 8 Supply plate, ports 1, 3 and 5:
M7/G $\frac{1}{8}$ | 10 Inscription label holder |
| 4 Ports 82/84: M5 (at both ends) | | | |

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Manifold rail VABM

Type	No. of valve positions	Size 10																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	91.5	54	52.4	41.5	25.6	9.8	16	17.7	4.5	102.3	77.1	67	56.1	54.1	15.2	11.5	15.5

Type	No. of valve positions	Size 10										
		H9	H10	H11	H12	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	12.4	5.5	54.8	4.8	10.5	57.3	2.5	4.5	36	20	42.5

Type	No. of valve positions	Size 14																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	110	70	59.3	56.5	36.5	16	20	26.5	4.5	113.1	95.1	77.7	68.6	61.3	18.7	15.7	28.7

Type	No. of valve positions	Size 14										
		H9	H10	H11	H12	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	13.2	23.7	54.8	5.1	16	60.6	2	5	10	25.5	42.5

Type	No. of valve positions	Size 10						Size 14					
		L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3
VABM	4	103	94	31.5	128	118	48	128	118	48	128	118	48
	5	113.5	104.5	42	144	134	64	144	134	64	144	134	64
	6	124	115	52.5	160	150	80	160	150	80	160	150	80
	7	134.5	125.5	63	176	166	96	176	166	96	176	166	96
	8	145	136	73.5	192	182	112	192	182	112	192	182	112
	9	155.5	146.5	84	208	198	128	208	198	128	208	198	128
	10	166	157	94.5	224	214	144	224	214	144	224	214	144
	12	187	178	115.5	256	246	176	256	246	176	256	246	176
	16	229	220	157.5	320	310	240	320	310	240	320	310	240
	20	271	262	199.5	384	374	304	384	374	304	384	374	304
	24	313	304	241.5	448	438	368	448	438	368	448	438	368

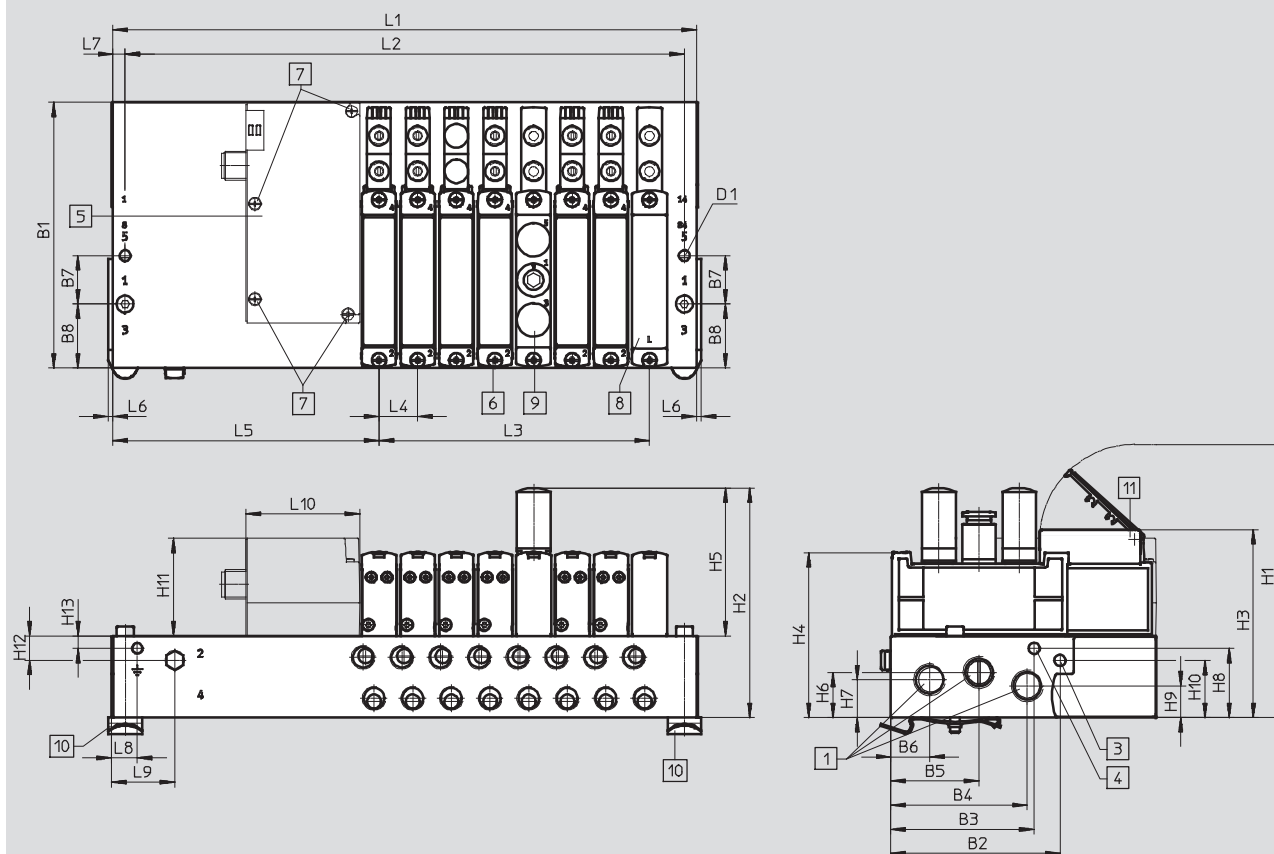
Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

Dimensions – Example of a valve terminal with I-Port interface

Download CAD Data → www.festo.com/us/cad

Outlet on the side



- | | | | |
|--|---|--|---|
| 1 Ports 1, 3 and 5: G $\frac{3}{8}$ /G $\frac{1}{4}$
(at both ends) | 4 Ports 82/84: M5 (at both ends) | 7 Electrical interface - mounting
on manifold block: M3 | 9 Supply plate, ports 1, 3 and 5:
M7/G $\frac{1}{8}$ |
| 3 Ports 12/14: M5 (at both ends) | 5 Electrical connection for I-Port
interface/IO-Link | 8 Blanking plate | 10 H-rail mounting |
| 6 Mounting screw | | | 11 Inscription label holder |

Type	No. of valve positions	Size 10																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	91.5	54	52.4	41.5	25.6	9.8	16	17.7	4.5	102.3	77.1	67	56.1	54.1	15.2	11.5	15.5

Type	No. of valve positions	Size 10											
		H9	H10	H11	H12	H13	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	12.4	5.5	40.8	10.1	5.1	10.5	106.8	2.5	4.5	36	75	47.1

Type	No. of valve positions	Size 14																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	110	70	59.3	56.5	36.5	16	20	26.5	4.5	113.1	95.1	77.7	68.6	61.3	18.7	15.7	28.7

Type	No. of valve positions	Size 14											
		H9	H10	H11	H12	H13	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	13.2	23.7	40.8	10.1	5.1	16	110.1	2	5	10	75	47.1

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Manifold rail VABM

Type	No. of valve positions	Size 10			Size 14		
		L1	L2	L3	L1	L2	L3
VABM	4	152.5	143.5	31.5	177.5	167.5	48
	5	163	154	42	193.5	183.5	64
	6	173.5	164.5	52.5	209.5	199.5	80
	7	184	175	63	225.5	215.5	96
	8	194.5	185.5	73.5	241.5	231.5	112
	9	205	196	84	257.5	247.5	128
	10	215.5	206.5	94.5	273.5	263.5	144
	12	236.5	227.5	115.5	305.5	295.5	176
	16	278.5	269.5	157.5	369.5	359.5	240
	20	321	311.5	199.5	433.5	423.5	304
	24	362.5	353.5	241.5	497.5	487.5	368

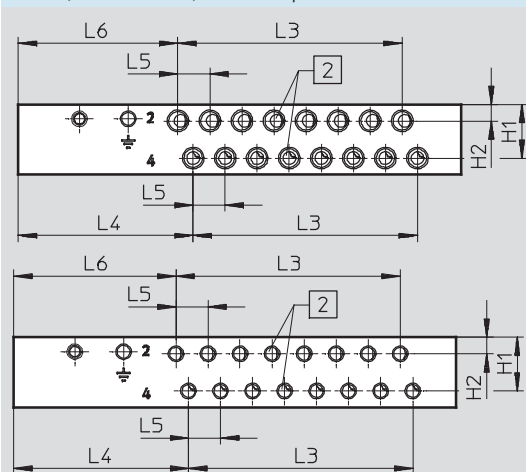
Valve terminals VTUG with multi-pin plug and fieldbus connection

Dimensions – Example of a valve terminal

Dimensions – Front manifold rail


Download CAD Data → www.festo.com/us/cad

Size 10, I-Port interface, outlet on top



[2] Ports 2 and 4: M7 [2] Ports 2/4: M5

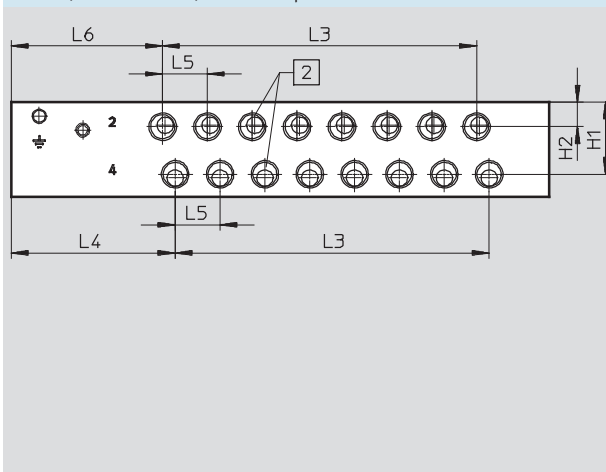Size 14, I-Port interface, outlet on top




[2] Ports 2/4: G1/8

Dimensions – Front manifold rail

Download CAD Data → www.festo.com/us/cad

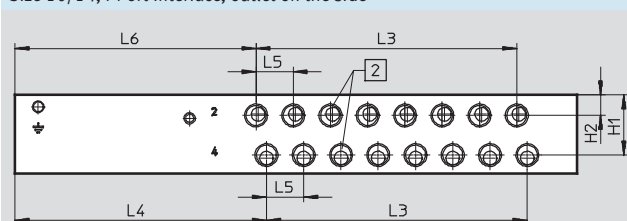Size 10/14, I-Port interface, outlet on the side



[2] Ports 2 and 4: M5, M7, G1/8

Type	Manifold rail with I-Port interface, outlet on top				
	H1	H2	L4	L5	L6
Connection M7	17.6	5.4	57.3	10.5	52.3
Connection M5					53.2
Connection G1/8	25.8	8.8	58.5	16	54

Type	Manifold rail with I-Port interface, outlet on the side				
	H1	H2	L4	L5	L6
Connection M7	17.6	5.4	106.8	10.5	101.8
Connection M5					102.7
Connection G1/8	25.8	8.8	108	16	103.5

Type	No. of valve positions	Size 10	Size 14
		L3	L3
VABM	4	31.5	48
	5	42	64
	6	52.5	80
	7	63	96
	8	73.5	112
	9	84	128
	10	94.5	144
	12	115.5	176
	16	157.5	240
	20	199.5	304
	24	241.5	368

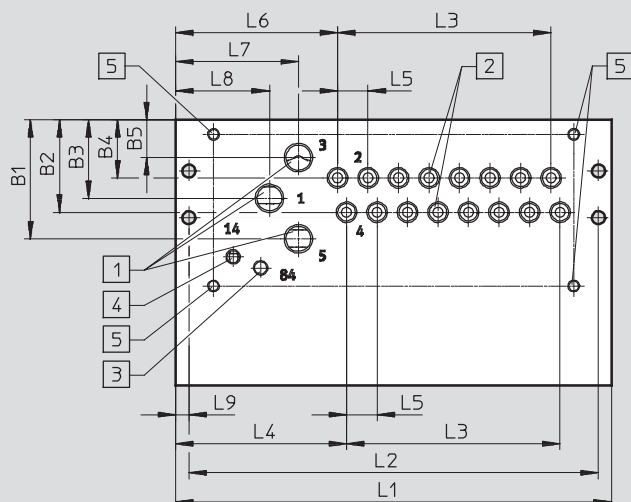
Valve terminals VTUG with multi-pin plug and fieldbus connection

Dimensions – Example of control cabinet installation

Dimensions – Manifold rail, outlet underneath

Download CAD data → www.festo.com

Control cabinet installation



Note

Dimensions of the manifold rail with I-Port interface, outlet on side for control cabinet installation (→ 105)

- 1 Ports 1, 3 and 5: G $\frac{3}{8}$ /G $\frac{1}{4}$ (at both ends)
- 2 Ports 2 and 4: M5/M7/G $\frac{1}{8}$ (at both ends)
- 3 Ports 12/14: M5 (at both ends)
- 4 Ports 8/2/8/4: M5 (at both ends)
- 5 Mounting holes, outlet direction underneath: M4x8

Type	Manifold rail with I-Port interface, outlet on top, size 10										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	41	31.8	27	20	13	58.8	10.5	55.7	42.3	32.3	4.5

Type	Manifold rail with I-Port interface, outlet on top, size 14										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	53.5	45.1	35.2	27.8	17	58.5	16	58.5	43	33	5

Type	No. of valve positions	Size 10			Size 14		
		L1 +5	L2 +5	L3	L1	L2	L3
VABM	4	103	94	31.5	128	118	48
	5	113.5	104.5	42	144	134	64
	6	124	115	52.5	160	150	80
	7	134.5	125.5	63	176	166	96
	8	145	136	73.5	192	182	112
	9	155.5	146.5	84	208	198	128
	10	166	157	94.5	224	214	144
	12	187	178	115.5	256	246	176
	16	229	220	157.5	320	310	240
	20	271	262	199.5	384	374	304
	24	313	304	241.5	448	438	368

Valve terminals VTUG with multi-pin plug and fieldbus connection

Dimensions


Type	Manifold rail with I-Port interface, outlet on the side, size 10										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	41	31.8	27	20	13	108.3	10.5	105.2	91.8	81.8	4.5

Type	Manifold rail with I-Port interface, outlet on the side, size 14										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	53.5	45.1	35.2	27.8	17	108	16	108	92.5	82.5	5


Type	No. of valve positions	Manifold rail with I-Port interface, outlet on the side size 10			Manifold rail with I-Port interface, outlet on the side size 14		
		L1 +5	L2 +5	L3	L1	L2	L3
VABM	4	152.5	143.5	31.5	177.5	167.5	48
	5	163	154	42	193.5	183.5	64
	6	173.5	164.5	52.5	209.5	199.5	80
	7	184	175	63	225.5	215.5	96
	8	194.5	185.5	73.5	241.5	231.5	112
	9	205	196	84	257.5	247.5	128
	10	215.5	206.5	94.5	273.5	263.5	144
	12	236.5	227.5	115.5	305.5	295.5	176
	16	278.5	269.5	157.5	369.5	359.5	240
	20	320.5	311.5	199.5	433.5	423.5	304
	24	362.5	353.5	241.5	497.5	487.5	368

Dimensions – Recess for control cabinet installation, outlet underneath, size 10

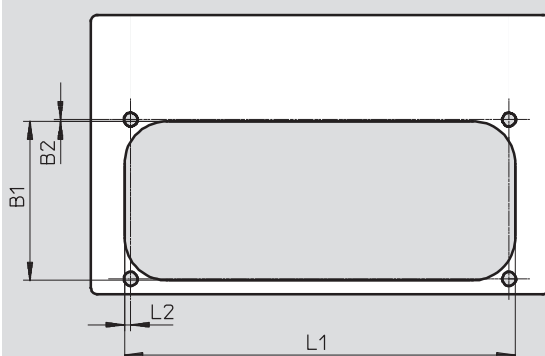Up to 8 valves



9 valves or more

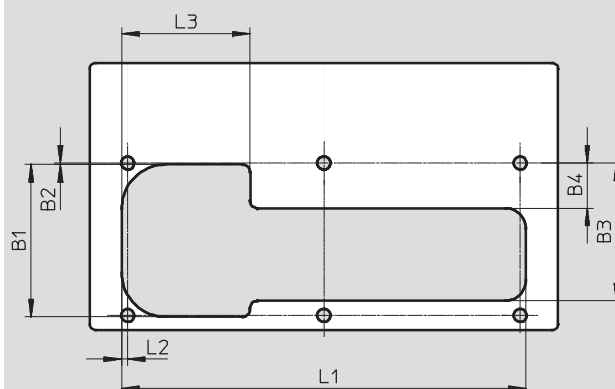

Type	B1	B2	L1	L2
VABM-L-10...G18-4	52.7	0.5	86	2
VABM-L-10...G18-5			96.5	
VABM-L-10...G18-6			107	
VABM-L-10...G18-7			117.5	
VABM-L-10...G18-8			128	

Type	B1	B2	B3	B4	L1	L2	L3
VABM-L-10...G18-9	52.7	0.5	47.2	15.4	138.5	2	44
VABM-L-10...G18-10					149		
VABM-L-10...G18-12					170		
VABM-L-10...G18-16					212		
VABM-L-10...G18-20					254		
VABM-L-10...G18-24					296		

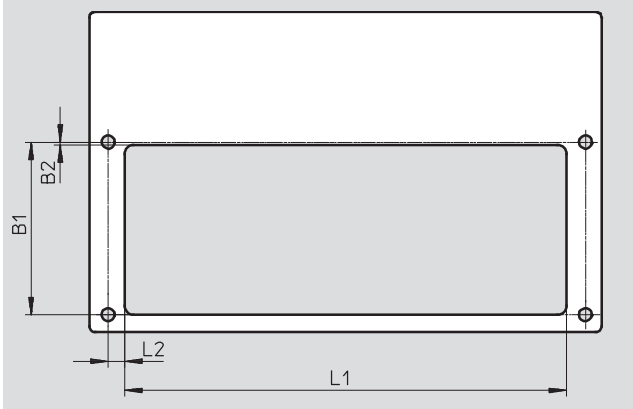
Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO


Dimensions

Dimensions – Recess for control cabinet installation, outlet underneath, size 14

Up to 7 valves



8 valves or more

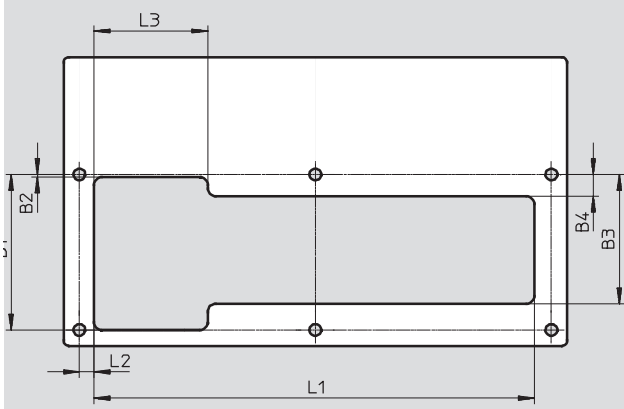


Type	B1	B2	L1	L2
VABM-L-14...G14-4	59.3	1	130.9	
VABM-L-14...G14-5			119.9	
VABM-L-14...G14-6			135	
VABM-L-14...G14-7				

Type	B1	B2	B3	B4	L1	L2	L3
VABM-L-14...G14-8	59.3	1	49.3	8.3	167.9	56	43.4
VABM-L-14...G14-9					183.9		
VABM-L-14...G14-10					199.9		
VABM-L-14...G14-12					231.9		
VABM-L-14...G14-16					295.9		
VABM-L-14...G14-20					359.9		
VABM-L-14...G14-24					423.9		

Dimensions – Mounting holes, size 10

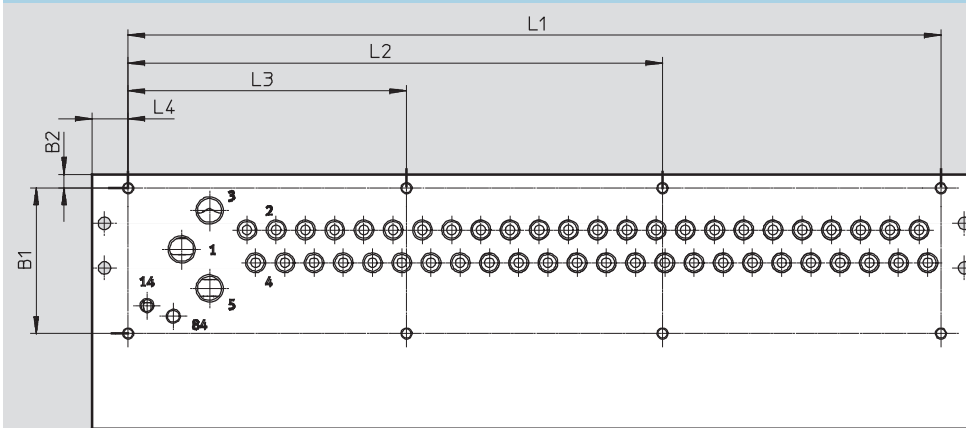Download CAD Data → www.festo.com/us/cad



Type		B1	B2	L1	L2	L3	L4	I-Port interface, outlet on the side L4
VABM-L1-10...-G18-4	Up to 8 valves	52.2	5	82	–	–	13	62.5
VABM-L1-10...-G18-5				92.5	–	–		
VABM-L1-10...-G18-6				103	–	–		
VABM-L1-10...-G18-7				113.5	–	–		
VABM-L1-10...-G18-8	Up to 20 valves	52.2	5	124	–	–	13	62.5
VABM-L1-10...-G18-9				134.5	–	67.25		
VABM-L1-10...-G18-10				145	–	72.5		
VABM-L1-10...-G18-12				166	–	83		
VABM-L1-10...-G18-16				208	–	104		
VABM-L1-10...-G18-20				250	–	125		
VABM-L1-10...-G18-24	24 valves			292	192	100		

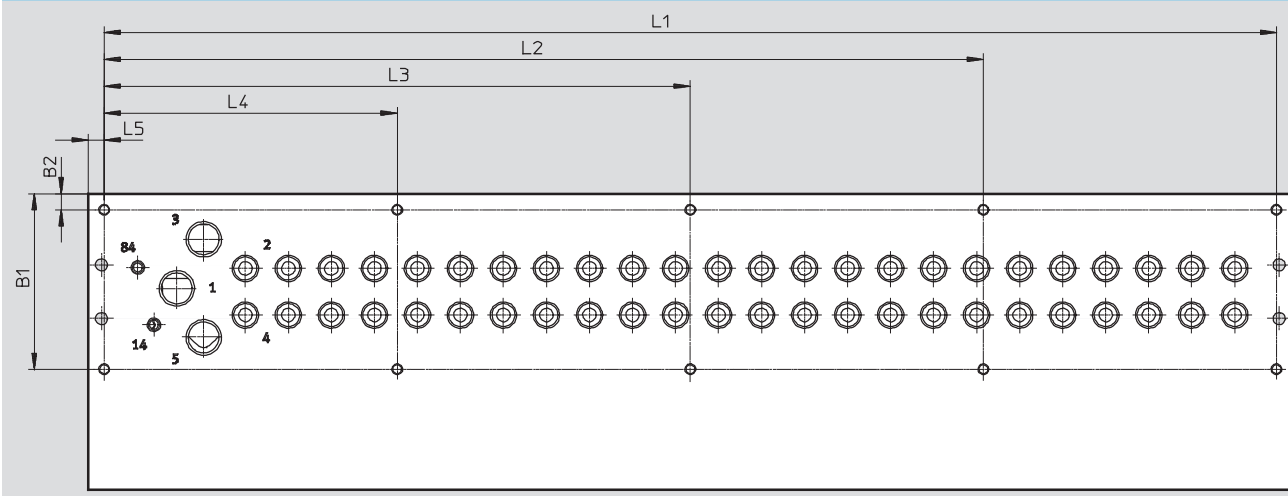
Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Dimensions

Dimensions – Mounting holes, size 14

Download CAD Data → www.festo.com/us/cad



Type									
		B1	B2	L1	L2	L3	L4	L5	I-Port interface, outlet on the side L4
VABM-L1-14...-G14-4	Up to 8 valves	59.3	6	116	–	–	–	6	55.5
VABM-L1-14...-G14-5				132	–	–	–		
VABM-L1-14...-G14-6				148	–	–	–		
VABM-L1-14...-G14-7				164	–	–	–		
VABM-L1-14...-G14-8	8 to 10 valves			180	–	–	90		
VABM-L1-14...-G14-9				196	–	–	98		
VABM-L1-14...-G14-10				212	–	–	106		
VABM-L1-14...-G14-12	12 valves and 16 valves			244	–	162	82		
VABM-L1-14...-G14-16				308	–	204	104		
VABM-L1-14...-G14-20	20 valves and 24 valves			372	279	186	93		
VABM-L1-14...-G14-24				436	327	218	109		

Order code – Manifold rail

FESTO

VABM	-	-	-	-	-	-
Designation						
Manifold rail		L1				
Size						
Size 10			10			
Size 14			14			
Version						
Standard			-			
High flow rate			H			
Connection type						
Semi in-line				G		
Sub-base				W		
Connection direction						
Side					-	
Underneath					B	
Pneumatic connection						
G1/8						G18
G1/4						G14

-	-	-			
					Outlet direction of electrical components
				-	Top
					Circuitry
			-		None
			R		Holding current reduction with protective circuit
					Electrical connection
			-		None
			G		Preparation for electrical connection
					Connection for valve function
			-		5/2-way
			M		5/2-way, single solenoid
Valve positions					
4	4 valve positions				
5	5 valve positions				
6	6 valve positions				
7	7 valve positions				
8	8 valve positions				
9	9 valve positions				
10	10 valve positions				
12	12 valve positions				
16	16 valve positions				
20	20 valve positions				
24	24 valve positions				

Valve terminals VTUG with multi-pin plug connection

Technical data – Multi-pin plug connection

The following multi-pin plug connections are available for the valve terminal VTUG:

- Sub-D (25-pin)
- Sub-D (44-pin)
- Flat cable (26-pin)
- Flat cable (50-pin)



Electrical multi-pin plug

Each pin on the multi-pin plug can actuate exactly one solenoid coil.

If the maximum configurable number of valve positions is 24, this means that 48 valve functions can be addressed.

The valves can be switched by means of positive or negative logic (positive switching or negative switching).

Mixed operation is generally not possible, however an exception is made for certain variants (V22 ... 25) with 25-pin Sub-D. In this case, a specific range of valve positions (e.g. Com 16...19) is supplied with

common voltage. This allows these ranges to be switched with positive or negative logic and valve groups to be switched off independently of the other ranges. Mixed operation within a range is not permitted.

Note


A double solenoid valve occupies one valve position and two pins on the multi-pin plug. This means that the number of double solenoid valves per manifold rail is limited (→ pin allocation page 110)

General technical data

Type	VAEM-L1-S-M1-25	VAEM-L1-S-M1-44	VAEM-L1-S-M3-26	VAEM-L1-S-M3-50
Number of pins	25-pin	44-pin	26-pin	50-pin
Electrical connection	Sub-D plug		Flat cable plug	
Max. number of valve positions	24		24	
Protection class to EN 60529	IP67		IP40	
Material	Polyamide		Polyamide	
Note on materials	RoHS-compliant		RoHS-compliant	
Weight	53		45	48

Valve terminals VTUG with multi-pin plug connection

Technical data – Multi-pin plug connection

Pin allocation – Sub-D plug, 25-pin									
	M1-25 (V20)								
	Pin	12x double solenoid		8x double solenoid 8x single solenoid		4x double solenoid 16x single solenoid		24x single solenoid	
	1	VP0	14	VP0	14	VP0	14	VP0	14
	2	VP0	12	VP0	12	VP0	12	VP23	14
	3	VP1	14	VP1	14	VP1	14	VP1	14
	4	VP1	12	VP1	12	VP1	12	VP22	14
	5	VP2	14	VP2	14	VP2	14	VP2	14
	6	VP2	12	VP2	12	VP2	12	VP21	14
	7	VP3	14	VP3	14	VP3	14	VP3	14
	8	VP3	12	VP3	12	VP3	12	VP20	14
	9	VP4	14	VP4	14	VP4	14	VP4	14
	10	VP4	12	VP4	12	VP19	14	VP19	14
	11	VP5	14	VP5	14	VP5	14	VP5	14
	12	VP5	12	VP5	12	VP18	14	VP18	14
	13	VP6	14	VP6	14	VP6	14	VP6	14
	14	VP6	12	VP6	12	VP17	14	VP17	14
	15	VP7	14	VP7	14	VP7	14	VP7	14
	16	VP7	12	VP7	12	VP16	14	VP16	14
	17	VP8	14	VP8	14	VP8	14	VP8	14
	18	VP8	12	VP15	14	VP15	14	VP15	14
	19	VP9	14	VP9	14	VP9	14	VP9	14
Note A grey field means that a double solenoid valve can be used, while a white field means that only single solenoid valves can be used.	20	VP9	12	VP14	14	VP14	14	VP14	14
	21	VP10	14	VP10	14	VP10	14	VP10	14
	22	VP10	12	VP13	14	VP13	14	VP13	14
	23	VP11	14	VP11	14	VP11	14	VP11	14
	24	VP11	12	VP12	14	VP12	14	VP12	14
	25	Com		Com		Com	Com	Com	

VP Valve position

Valve terminals VTUG with multi-pin plug connection



Technical data – Multi-pin plug connection

Pin allocation – Sub-D plug, 25-pin										Pin allocation – Sub-D plug, 44-pin				
		M1-25V1 (V22)		M1-25V2 (V23)		M1-25V3 (V24)		M1-25V4 (V25)				M1-44 (V21)		
		Pin										Pin	18x double solenoid, 6x single solenoid	
14+ + 1 15+ + 2 16+ + 3 17+ + 4 18+ + 5 19+ + 6 20+ + 7 21+ + 8 22+ + 9 23+ +10 24+ +11 25+ +12 25+ +13	1	VP0	14	VP0	14	VP0	14	VP0	14	31+ + 16+ + 1 + + + <				

Valve terminals VTUG with multi-pin plug connection

FESTO

Technical data – Multi-pin plug connection

Pin allocation – Flat cable, 26-pin										Pin allocation – Flat cable, 50-pin			
	M3-26 (V20)										M3-50 (V26)		
	Pin	12x double solenoid	8x double solenoid 8x single solenoid	4x double solenoid 16x single solenoid	24x single solenoid					Pin			
	1	VP0	14	VP0	14	VP0	14	VP0	14		1	VP0	14
	2	VP0	12	VP0	12	VP0	12	VP23	14		2	VP0	12
	3	VP1	14	VP1	14	VP1	14	VP1	14		3	VP1	14
	4	VP1	12	VP1	12	VP1	12	VP22	14		4	VP1	12
	5	VP2	14	VP2	14	VP2	14	VP2	14		5	VP2	14
	6	VP2	12	VP2	12	VP2	12	VP21	14		6	VP2	12
	7	VP3	14	VP3	14	VP3	14	VP3	14		7	VP3	14
	8	VP3	12	VP3	12	VP3	12	VP20	14		8	VP3	12
	9	VP4	14	VP4	14	VP4	14	VP4	14		9	VP4	14
	10	VP4	12	VP4	12	VP19	14	VP19	14		10	VP4	12
	11	VP5	14	VP5	14	VP5	14	VP5	14		11	VP5	14
	12	VP5	12	VP5	12	VP18	14	VP18	14		12	VP5	12
	13	VP6	14	VP6	14	VP6	14	VP6	14		13	VP6	14
	14	VP6	12	VP6	12	VP17	14	VP17	14		14	VP6	12
	15	VP7	14	VP7	14	VP7	14	VP7	14		15	VP7	14
	16	VP7	12	VP7	12	VP16	14	VP16	14		16	VP7	12
	17	VP8	14	VP8	14	VP8	14	VP8	14		17	VP8	14
	18	VP8	12	VP15	14	VP15	14	VP15	14		18	VP8	12
	19	VP9	14	VP9	14	VP9	14	VP9	14		19	VP9	14
	20	VP9	12	VP14	14	VP14	14	VP14	14		20	VP9	12
	21	VP10	14	VP10	14	VP10	14	VP10	14		21	VP10	14
	22	VP10	12	VP13	14	VP13	14	VP13	14		22	VP10	12
	23	VP11	14	VP11	14	VP11	14	VP11	14		23	VP11	14
	24	VP11	12	VP12	14	VP12	14	VP12	14		24	VP11	12
Note A grey field means that a double solenoid valve can be used, while a white field means that only single solenoid valves can be used.	25	Com		Com		Com	Com	Com			25	VP12	14
	26	Com		Com		Com		Com			26	VP12	12
	–										27	VP13	14
	–										28	VP13	12
	–										29	VP14	14
	–										30	VP14	12
	–										31	VP15	14
	–										32	VP15	12
	–										33	VP16	14
	–										34	VP16	12
	–										35	VP17	14
	–										36	VP17	12
	–										37	VP18	14
	–										38	VP18	12
	–										39	VP19	14
	–										40	VP19	12
	–										41	VP20	14
	–										42	VP20	12
	–										43	VP21	14
	–										44	VP21	12
	–										45	VP22	14
	–										46	VP22	12
	–										47	VP23	14
	–										48	VP23	12
	–										49	Com	
	–										50		

VP Valve position


Valve terminals VTUG with multi-pin plug connection

Technical data – Multi-pin plug connection

Dimensions

Download CAD Data → www.festo.com/us/cad

Multi-pin plug connection, Sub-D



Note


Dimensions of the manifold rail with electrical connection
(→ 99)

Type	B1	L1	H1
VAEM-L1-S-M3-...	90.5	41.9	18.9

Dimensions

Download CAD Data → www.festo.com/us/cad

Multi-pin plug connection, flat cable plug



Note




Dimensions of the manifold rail with electrical connection
(→ 99)

Type	B1	L1	H1
VAEM-L1-S-M3-...	90.5	41.9	32.7

Valve terminals VTUG with multi-pin plug connection

FESTO

Accessories – Multi-pin plug connection

Ordering data – Multi-pin plug connection			
	Description		Type
Electrical interface, Sub-D			
	25-pin	For variant M1-25 (V20)	VAEM-L1-S-M1-25
		For variant M1-25V1 (V22)	VAEM-L1-S-M1-25V1
		For variant M1-25V2 (V23)	VAEM-L1-S-M1-25V2
		For variant M1-25V3 (V24)	VAEM-L1-S-M1-25V3
		For variant M1-25V4 (V25)	VAEM-L1-S-M1-25V4
	44-pin	For variant M1-44 (V21)	VAEM-L1-S-M1-44
Electrical interface, flat cable plug			
	26-pin	For variant M3-26 (V20)	VAEM-L1-S-M3-26
	50-pin	For variant M3-50 (V26)	VAEM-L1-S-M3-50
Connecting cable for multi-pin plug, 25-pin, IP40		Cable length [m]	Technical data ➔ Internet: kmp
	Sub-D, 25-wire, straight socket, up to 24 coils	2.5	KMP6-25P-20-2,5
		5	KMP6-25P-20-5
		10	KMP6-25P-20-10
Connecting cable for multi-pin plug, 25-pin, IP67			Technical data ➔ Internet: nebv
	Sub-D, 25-wire, straight socket, up to 24 coils	2.5	NEBV-S1G25-K-2.5-N-LE25
		5	NEBV-S1G25-K-5-N-LE25
		10	NEBV-S1G25-K-10-N-LE25
Connecting cable for multi-pin plug, 44-pin, IP40			Technical data ➔ Internet: nebv
	Sub-D, 44-wire, straight socket, up to 35 coils	2.5	NEBV-S1G44-K-2.5-N-LE44-S6
		5	NEBV-S1G44-K-5-N-LE44-S6
		10	NEBV-S1G44-K-10-N-LE44-S6

Valve terminals VTUG, IO-Link interface

Technical data – IO-Link interface

Festo-specific, standardised interface for direct connection to the fieldbus via the bus node CTEU or to an IO-Link master via a cable (in IO-Link mode).



I-Port interface/IO-Link

Versions:

- I-Port interface for fieldbus nodes (CTEU)
- IO-Link mode for direct connection to a higher-level IO-Link master

The following protocols are supported in connection with the associated CTEU node:

- CANopen
- DeviceNet
- PROFIBUS
- CC-LINK
- EtherCAT

The electrical supply/transmission of communication data takes place via an M12 plug.

The valve terminal can be equipped with 4 ... 24 (double solenoid) valves.


General technical data

Communication types	IO-Link		
Electrical connection	• M12 plug, 5-pin • A-coded • Metal thread for screening		
Baud rates	COM3	[kbps]	230.4
	COM2	[kbps]	38.4
Intrinsic current consumption, logic supply PS		[mA]	30
Intrinsic current consumption, valve supply PL		[mA]	30
Max. number of solenoid coils	VAEM-L1-S-8-PT		16
	VAEM-L1-S-16-PT		32
	VAEM-L1-S-24-PT		48
Max. number of valve positions	VAEM-L1-S-8-PT		8
	VAEM-L1-S-16-PT		16
	VAEM-L1-S-24-PT		24
Ambient temperature		[°C]	–5 ... +50
Protection class to EN 60529			IP67

LED display

	Colour	Status	Function
Status LED X1	Red/green	Off	No 24 V logic
		Static green	Everything OK
		Flashing green	Communication error (in the I-Port or IO-Link protocol)
		Flashing red/green	Load supply error (undervoltage or no load supply)
		Static red	Load supply error and communication error

Pin allocation – I-Port interface/IO-Link


	Pin	Designation corresponds to IO-Link
	1	Supply PS (+24 V)
	2	Load supply PL (+24 V)
	3	Supply PS (0 V)
	4	Communication signal C/Q
	5	Load supply PL (0V)

Valve terminals VTUG, IO-Link interface

Technical data – I-Port interface/IO-Link

FESTO

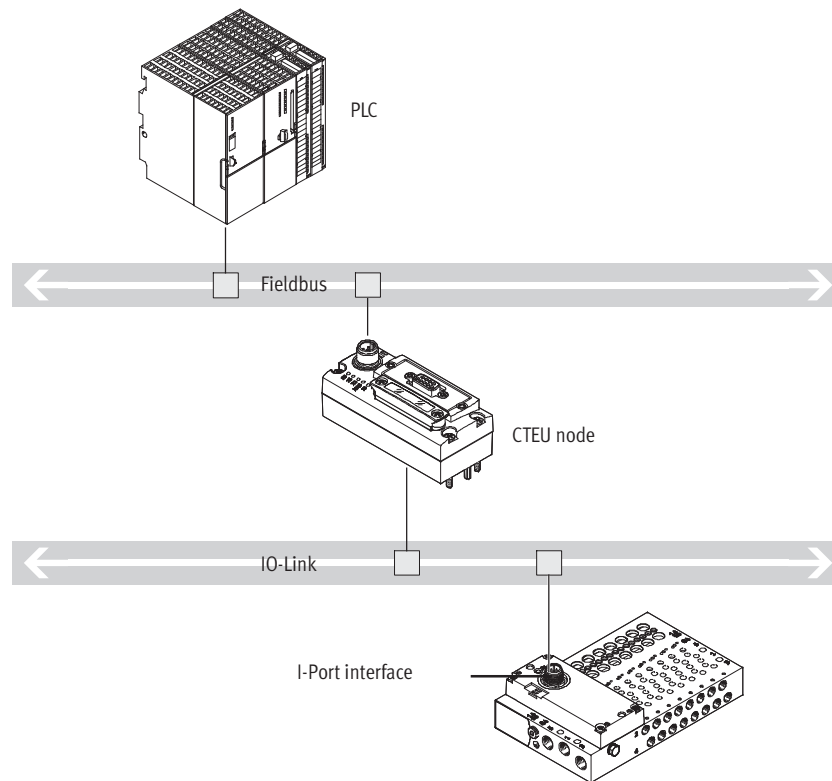System overview – IO-Link



- Communication with the higher-order controller via fieldbus
- Use a fieldbus node CTEU compatible with the fieldbus protocol
- Up to 64 inputs/outputs (solenoid coils), depending on the valve terminal
- No preprocessing


Valve terminals VTUG, IO-Link interface

Technical data – I-Port interface/IO-Link

Dimensions

Download CAD Data → www.festo.com/us/cad

I-Port interface, outlet on top




Note

Dimensions of the manifold rail with electrical connection
(→ 99)

Dimensions

Download CAD Data → www.festo.com/us/cad

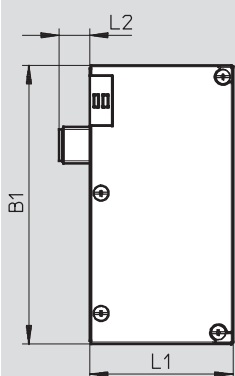I-Port interface, outlet on the side



Note

Dimensions of the manifold rail with electrical connection
(→ 99)

Type	Outlet on top			Outlet on the side		
	B1	L1	H1	B1	L1	L2
VAEM-L1-S-...	91	42.5	25	91.5	47.1	10

Ordering data – I-Port interface/IO-Link

	Description	Type
Electrical interface for I-Port interface/IO-Link, outlet on top		
	Actuation of up to 8 double solenoid valve positions	VAEM-L1-S-8-PT
	Actuation of up to 16 double solenoid valve positions	VAEM-L1-S-16-PT
	Actuation of up to 24 double solenoid valve positions	VAEM-L1-S-24-PT
Electrical interface for I-Port interface/IO-Link, outlet on the side		
	Actuation of up to 8 double solenoid valve positions	VAEM-L1-S-8-PTL
	Actuation of up to 16 double solenoid valve positions	VAEM-L1-S-16-PTL
	Actuation of up to 24 double solenoid valve positions	VAEM-L1-S-24-PTL
Connection technology for IO-Link		
	T-adapter M12, 5-pin for IO-Link and load supply	FB-TA-M12-5POL
Straight plug, for I-Port interface/IO-Link		
	Straight plug, M12, 5-pin (in combination with adapter for separate load supply)	SEA-M12-5GS-PG7
Inscription label for I-Port interface/IO-Link		
	40 pieces in frame	ASLR-C-E4

Valve terminals VTUG, decentralised adapter CAPC

FESTO

Technical data – CAPC

Function

The E-box CAPC enables the decentralised installation of fieldbus nodes CTEU on a valve terminal or input modules with I-Port interface.

Application

- M12 connection technology (two interfaces)
- Enables the installation of valve terminals or other devices over a distance of 20 metres
- Accessory CAFM enables the E-box to be installed on an H-rail



General technical data		
Type	CAPC-F1-E-M12	
Dimensions W x L x H	[mm]	50 x 148 x 28
Fieldbus interface		2 x M12 socket, 5-pin
Operating voltage range	[V DC]	18 ... 30
Max. power supply	[A]	2
Nominal operating voltage	[V DC]	24
Product weight	[g]	85
Cable length	[m]	20

Materials	
Housing	PA reinforced
Note on materials	RoHS-compliant


Operating and environmental conditions	
Protection class to EN 60529	IP65, IP67
Ambient temperature	[°C] -5 ... +50
Storage temperature	[°C] -20 ... +70
Corrosion resistance class CRC ¹⁾	2 ¹⁾
CE marking (see declaration of conformity)	To EU EMC Directive ²⁾

1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Pin allocation – Power supply/IO-Link interfaces			
	Pin	Designation	Function
	1	Supply PS (+24 V)	Power supply for system +24 V
	2	Load supply PL (+24 V)	Power supply for load +24 V
	3	Supply PS (0 V)	Power supply for system +24 V
	4	Communication signal C/Q	Communication signal C/Q
	5	Load supply PL (0V)	Power supply for load 0 V
		Metal thread for FE	Functional earth

Valve terminals VTUG, decentralised adapter CAPC

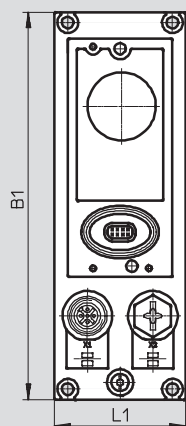
FESTO

Technical data – CAPC


Dimensions

Download CAD Data → www.festo.com/us/cad

CAPC





CAPC with mounted fieldbus node CTEU-CO

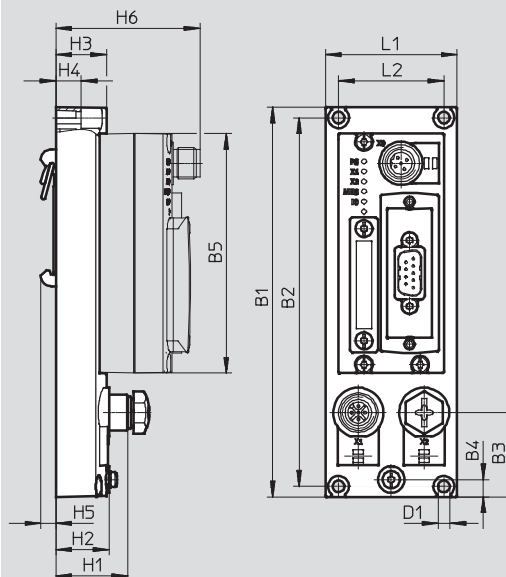

Type														
CAPC	B1	B2	B3	B4	B5	D1-Ø	H1	H2	H3	H4	H5	H6	L1	L2
	148	140	32	6.6	91	4.4	27.3	20.3	19.3	9.6	5.7	54.8	50	40








Accessory CAPC

Ordering data		Part No.	Type
E-box			
	–	570042	CAPC-F1-E-M12
H-rail mounting			
	–	570043	CAFM-F1-H

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Accessories – Valve terminal

Ordering data – CTEU		
	Description	Type
Bus node		
	CANopen bus node	CTEU-CO
	CC-Link bus node	CTEU-CC
	PROFIBUS bus node	CTEU-PB
	DeviceNet bus node	CTEU-DN
	EtherCAT bus node	CTEU-EC
Bus connection		
	Sub-D plug, straight, for CANopen	FBS-SUB-9-BU-2x5POL-B
	Sub-D plug, straight, for CC-Link	FBS-SUB-9-GS-2x4POL-B
	Sub-D plug, straight, for PROFIBUS	FFBS-SUB-9-GS-DP-B
	Sub-D plug, angled, for CANopen, 9-pin	FBS-SUB-9-WS-CO-K
	Sub-D plug, angled, for PROFIBUS, 9-pin	FBS-SUB-9-WS-PB-K
	M12x1, 5-pin, A-coded, for CANopen	FBA-2-M12-5POL
	M12x1, 5-pin, B-coded, for PROFIBUS	FBA-2-M12-5POL-RK
	For 5-pin terminal strip for CANopen	FBA-1-SL-5POL
	Terminal strip, 5-pin, for DeviceNet/CANopen	FBSD-KL-2x5POL
	Screw terminal for CC-Link	FBA-1-KL-5POL
	Fieldbus socket, M12x1, 5-pin, for CANopen	FBSD-GD-9-5POL
	Plug, M12x1, 5-pin, for CANopen	FBS-M12-5GS-PG9
	Straight socket, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK for PROFIBUS	NECU-M-B12G5-C2-PB
	Straight plug, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK for PROFIBUS	NECU-M-S-B12G5-C2-PB
	Terminating resistor, M12, B-coded for PROFIBUS	CACR-S-B12G5-220-PB
	Plug M12x1, 4-pin, D-coded for EtherCAT	NECU-M-S-D12G4-C2-ET

Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Accessories – Valve terminal

Ordering data – CTEU		
	Description	Type
Plug socket		
	For power supply, M12x1, 5-pin, B-coded for CANopen/DeviceNet	NTSD-GD-9-M12-5POL-RK
	For power supply, M12x1, 5-pin for CC-Link, PROFIBUS, EtherCAT	FBSD-GD-9-5POL
Inscription label		
	For bus node	ASLR-C-E4

Ordering data		
	Description	Type
Silencer		Technical data → Internet: u
	For thread M5	U-M5
		UC-M5
	For thread M7	UC-M7
	For thread G $\frac{1}{8}$	U-1/8-50
		UC-1/8
	For thread G $\frac{1}{4}$	U-1/4-20
		UC-1/4-20


Fittings		
		Technical data → Internet: qs
	For tubing Ø 3 mm	QSM-M5-3-I-R-100
	For tubing Ø 4 mm	QSM-M5-4-I-R-100
	For tubing Ø 4 mm	QSM-M5-4-I-R-100
	For tubing Ø 6 mm	QSM-M7-6-I-R-100
	For tubing Ø 3 mm	QSM-M5-3-I
	For tubing Ø 4 mm	QSM-M5-4-I
	For tubing Ø 4 mm	QSM-M7-4-I
	For tubing Ø 4 mm	QS-G1/8-4-I
	For tubing Ø 6 mm	QS-G1/8-6-I
	For tubing Ø 8 mm	QS-G1/8-8-I
	For tubing Ø 8 mm	QS-B-1/4-8-I-20
	For tubing Ø 10 mm	QS-B-1/4-10-I-20
	For tubing Ø 12 mm	QS-B-1/4-12-I-20
	For tubing Ø 10 mm	QS-B-1/8-10-I-20
	For tubing Ø 6 mm	QSL-G1/8-6
	For tubing Ø 8 mm	QSL-G1/8-8
	For tubing Ø 12 mm	QSL-B-1/4-8-20
	For tubing Ø 10 mm	QSL-B-1/4-10-20
	For tubing Ø 12 mm	QSL-B-1/4-12-20
	For tubing Ø 10 mm	QSL-B-1/8-10-20
	For tubing Ø 6 mm	QSLL-G1/8-6
	For tubing Ø 8 mm	QSLL-G1/8-8
	For tubing Ø 6 mm	QSML-G1/8-6-20
	For tubing Ø 3 mm	QSML-M5-3
	For tubing Ø 4 mm	QSML-M5-4
	For tubing Ø 4 mm	QSML-M7-4
	For tubing Ø 3 mm	QSMLL-M5-3
	For tubing Ø 4 mm	QSMLL-M5-4
	For tubing Ø 4 mm	QSMLL-M7-4

Blanking plug		
		Technical data → Internet: b
	For thread M5	B-M5-B
	For thread M7	B-M7
	For thread G $\frac{1}{8}$	B-1/8
	For thread G $\frac{1}{4}$	B-1/4

Valve terminals VTUG with multi-pin plug and fieldbus connection


FESTO

Accessories – Valve terminal

Ordering data			
	Description		Type
Blanking plate			
	Vacant position 10 mm		VABB-L1-10-T
	Vacant position 14 mm		VABB-L1-14-T
Supply plate			
	Supply ports 1, 3, 5 10 mm		VABF-L1-10-P3A4-M7-T1
	Supply ports 1, 3, 5 14 mm		VABF-L1-14-P3A4-G18-T1
Separator			
	Separator for sub-base manifold rail 10		VABD-6-B
	Separator for semi in-line manifold rail 10		VABD-8-B
	Separator for all manifold rails 14		VABD-10-B
H-rail Technical data → Internet: nrh			
	To EN 60715, 35 x 7.5 (WxH)	2 m	NRH-35-2000
H-rail mounting Technical data → Internet: vame			
	Use the following screws for mounting: Size 10: DIN 912 M4x30 Size 14: DIN 912 M4x40	2 pieces	VAME-T-M4
Cover cap for manual override Technical data → Internet: vmpa			
	Covered	10 pieces	VMPA-HBV-B
	Non-detenting		VMPA-HBT-B

Valve terminals VTUG with multi-pin plug and fieldbus connection

Accessories – Valve terminal

Ordering data		
	Description	Type
Inscription label holder		Technical data → Internet: aslr
	Holder for an inscription label and covering the mounting screw and manual override	10 pieces ASLR-D-L1
Inscription label holder for valve terminal		
	For 4 valve positions, size 10	ASCF-H-L1-10-4V
	For 5 valve positions, size 10	ASCF-H-L1-10-5V
	For 6 valve positions, size 10	ASCF-H-L1-10-6V
	For 7 valve positions, size 10	ASCF-H-L1-10-7V
	For 8 valve positions, size 10	ASCF-H-L1-10-8V
	For 9 valve positions, size 10	ASCF-H-L1-10-9V
	For 10 valve positions, size 10	ASCF-H-L1-10-10V
	For 12 valve positions, size 10	ASCF-H-L1-10-12V
	For 16 valve positions, size 10	ASCF-H-L1-10-16V
	For 20 valve positions, size 10	ASCF-H-L1-10-20V
	For 24 valve positions, size 10	ASCF-H-L1-10-24V
	For 4 valve positions, size 14	ASCF-H-L1-14-4V
	For 5 valve positions, size 14	ASCF-H-L1-14-5V
	For 6 valve positions, size 14	ASCF-H-L1-14-6V
	For 7 valve positions, size 14	ASCF-H-L1-14-7V
	For 8 valve positions, size 14	ASCF-H-L1-14-8V
	For 9 valve positions, size 14	ASCF-H-L1-14-9V
	For 10 valve positions, size 14	ASCF-H-L1-14-10V
	For 12 valve positions, size 14	ASCF-H-L1-14-12V
	For 16 valve positions, size 14	ASCF-H-L1-14-16V
	For 20 valve positions, size 14	ASCF-H-L1-14-20V
	For 24 valve positions, size 14	ASCF-H-L1-14-24V

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com