

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Compact cylinders for maximum productivity in confined spaces, combining innovative technology, high performance and reduced installation space requirements

- More than the standard: Piston \varnothing 1/2" to 5"
- Variable strokes up to 20"
- Compact cylinder with standard port pattern, dimensions based on ISO 21287
- Innovative technology for maximum speeds
- Flexible in use thanks to customised variants
- Spare parts service

Product Range Overview																
Function	Type	Piston \varnothing [in]	Stroke [in]	Force [lbf]	Variants											
					A	I	P	A	Q	S2	S20	K2	K8	S6	S1	R3
Basic version																
Double-acting	ADN	1/2, 5/8, 3/4, 1, 1 1/4, 1 5/8, 2, 2 1/2, 3, 4, 5	0.04 ... 19.7	15 ... 1,655	■	■	■	■	■	■	■	■	■	■	■	■
Single-acting	AEN	1/2, 5/8, 3/4, 1, 1 1/4, 1 5/8, 2, 2 1/2, 3, 4	0.04 ... 1	15 ... 1,655	■	■	■	■	■	-	-	■	■	■	-	-
Non-rotating, with yoke																
Double-acting	ADNGF	1/2, 5/8, 3/4, 1, 1 1/4, 1 5/8, 2, 2 1/2, 3, 4	0.04 ... 15.75	15 ... 1,060	-	-	■	■	-	■	-	-	-	-	-	-


Variants				
A Male thread	A Position sensing	K2 Extended male piston rod thread	S1 Reinforced piston rod	
I Female thread	Q Square piston rod	K8 Extended piston rod	R3 High corrosion protection	
P Flexible cushioning rings/pads at both ends	S2 Through piston rod	S6 Heat resistant seals up to max. 248 °F		
	S20 Through, hollow piston rod			

- ### Features
- Sensor slots on three sides for flush mounting of proximity sensors
 - Integrated cushioning rings for absorbing residual energy at high speeds and machine cycles
 - Centering hole in the end cap matches centering pins ZBS
- More features → 2

Contents		
Basic Version, Double-acting	Basic Version, Single-acting	Non-rotating, with Yoke, Double-acting
- Technical Data → 5	- Technical Data → 23	- Technical Data → 34
- Dimensional Drawings → 11	- Dimensional Drawings → 26	- Dimensional Drawings → 36
- Ordering Data → 16	- Ordering Data → 30	- Ordering Data → 38
- Accessories Overview → 32	- Accessories Overview → 32	- Accessories Overview → 41
- Accessories → 42	- Accessories → 42	- Accessories → 42
→ www.festo.com/catalog/ADN	→ www.festo.com/catalog/AEN	→ www.festo.com/catalog/ADNGF

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287

Key Features

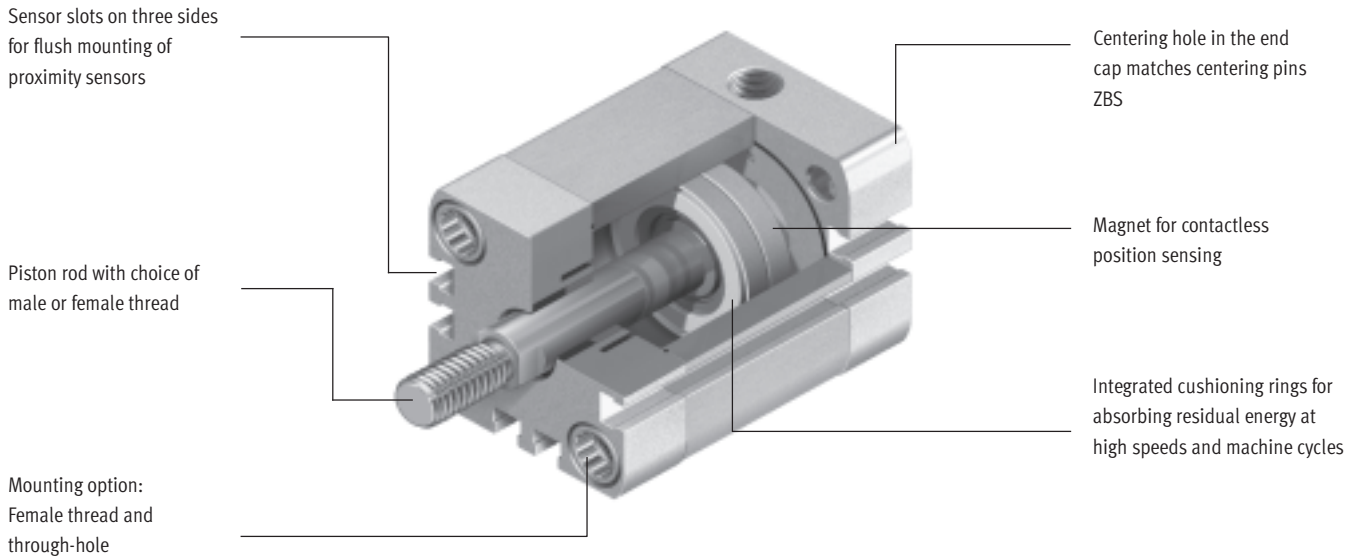

More than the standard

- Series ADN/AEN compact cylinders are based on the standard ISO 21287
- The ADN/AEN is distinguished by its compact design and broad area of application thanks to the large number of variants
- The variants can be configured according to individual needs thanks to the modular product system

Powerful

- Flexible cushioning rings as standard for absorbing the residual energy facilitate high speeds and machine cycles
- Long service life thanks to exceptional cushioning characteristics and minimal friction factors

Convenient


- Easy to mount with a comprehensive range of mounting accessories for just about every type of installation
- Highly flexible thanks to the wide range of variants
- Contactless position sensing using proximity sensors

Reliable


- Optimised manufacturing methods, patented technology and more than 40 years of experience in the field of cylinders make Festo and ADN/AEN a great team

Mounting options


With through screw



Direct mounting



Size



- Space savings of up to 50% compared with the standard ISO 15552

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Key Features

Variants from the Modular System					
Symbol	Key features	Description	ADN	AEN	ADNGF
	Q Square piston rod	Protection against torsion. For correctly oriented feeding	■	■	-
	S2 Through piston rod	For working at both ends with the same forces in the advance and return stroke, for attaching external stops	■	-	■
	S20 Through, hollow piston rod	For carrying vacuum, small parts, media, etc.	■	-	-
	K2 Extended male piston rod thread	-	■	■	-
	K8 Extended piston rod	-	■	■	-
	S6 Heat-resistant seals	Temperature resistance up to max. 248 °F	■	■	-
	S1 Reinforced piston rod	Increased lateral forces. Absorbs many times more lateral force than a basic cylinder	■	-	-
	R3 High corrosion protection	All external cylinder surfaces comply with corrosion resistance class 3 to Festo standard 940 070. The piston rod is made from corrosion and acid resistant steel	■	-	-



Software tools on CD-ROM:
 Configuration of Festo product
 modules
www.festo.com

Compact Cylinders ADN – Inch Series, Based on ISO 21287

Type Codes

ADN – 1/2" – 1/2" – A – P – A – S2

Type	
ADN	Double-acting Compact cylinder

Piston Ø [in]	
---------------	--

Stroke [in]	
-------------	--

Piston Rod Thread	
A	Male thread
I	Female thread

Cushioning	
P	Flexible cushioning rings/pads at both ends

Position Sensing	
A	Via proximity sensor

Variant	
Q	Square piston rod
S2	Through piston rod
S20	Through, hollow piston rod
K2	Extended male piston rod thread
K8	Extended piston rod
S6	Heat-resistant seals up to max. 248 °F
S1	Reinforced piston rod
R3	High corrosion protection


Compact Cylinders ADN – Inch Series, Based on ISO 21287



Technical Data

Function



Variants → 3



Diameter 1/2 ... 5 inch

Stroke length 0.04 ... 19.7 inch

www.festo.com/en/Spare_parts_service

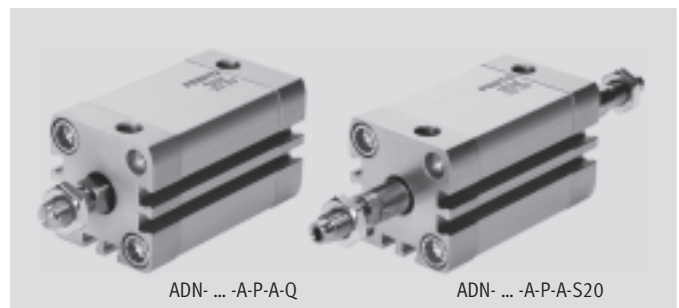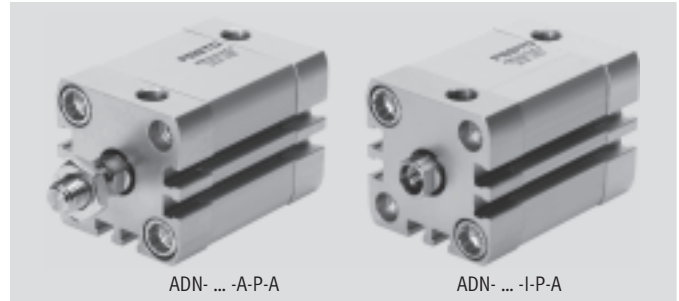

General Technical Data												
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4	5
Constructional design		Piston										
		Piston rod										
		Cylinder barrel										
Cushioning		Flexible cushioning rings/pads at both ends										
Position sensing		Via proximity sensor										
Type of mounting		Via through-holes										-
		Via female threads										
		Via accessories										
Mounting position		Any										

Technical Data – Basic Version and Variants							
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8
Pneumatic connection		10-32 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	1/8-27 NPT	1/8-27 NPT
Female piston rod thread		4-48 UNF-2B	8-36 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	5/16-24 UNF-2B	5/16-24 UNF-2B
Female piston rod thread Q variant		4-48 UNF-2B	8-36 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	10-32 UNF-2B
Male piston rod thread		10-32 UNF-2A	10-32 UNF-2A	5/16-24 UNF-2A	5/16-24 UNF-2A	3/8-24 UNF-2A	3/8-24 UNF-2A
Max. torsional backlash of piston rod [°]	Q variant	2	1.8	1.6	1.6	1.2	1.2

Piston Ø	[in]	2	2 1/2	3	4	5
Pneumatic connection		1/8-27 NPT	1/8-27 NPT	1/8-27 NPT	1/8-27 NPT	1/4-18 NPT
Female piston rod thread		3/8-24 UNF-2B	3/8-24 UNF-2B	1/2-20 UNF-2B	1/2-20 UNF-2B	5/8-18 UNF-2B
Female piston rod thread Q variant		5/16-24 UNF-2B	5/16-24 UNF-2B	3/8-24 UNF-2B	3/8-24 UNF-2B	1/2-20 UNF-2B
Male piston rod thread		1/2-20 UNF-2A	1/2-20 UNF-2A	5/8-18 UNF-2A	5/8-18 UNF-2A	3/4-16 UNF-2A
Max. torsional backlash of piston rod [°]	Q variant	1	1	0.8	0.8	0.8

Compact Cylinders ADN – Inch Series, Based on ISO 21287

Technical Data



Technical Data – Variant S1					
Piston Ø	[in]	1	1½	2½	4
Pneumatic connection		10-32 UNF-2B	10-32 UNF-2B	½-27 NPT	½-27 NPT
Piston rod thread	Female	10-32 UNF-2B	¾-24 UNF-2B	½-20 UNF-2B	⅝-18 UNF-2B
	Male	⅝-24 UNF-2A	½-20 UNF-2A	⅝-18 UNF-2A	¾-16 UNF-2A

Operating and Environmental Conditions														
Piston Ø	[in]	½	⅝	¾	1	1¼	1½	2	2½	3	4	5		
Operating medium		Filtered compressed air, lubricated or unlubricated												
Operating pressure [psi]		14.5 ... 145			8.7 ... 145									
	Q	19 ... 145			14.5 ... 145			11.8 ... 145			8.8 ... 145			
	S1	–			14.5 ... 145			–			14.5 ... 145			
	S2, S20	22 ... 145		19 ... 145		17.6 ... 145			14.5 ... 145			11.8 ... 145		
	S6	14.5 ... 145			8.8 ... 145									
Ambient temperature ¹⁾ [°F]		–4 ... +176												
	S6	32 ... +248												
	R3	–4 ... +176												
Corrosion resistance class CRC ²⁾		2												
	R3	3												

1) Note operating range of proximity sensors

2) Corrosion resistance class 2 to Festo standard 940 070; Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents
Corrosion resistance class 3 to Festo standard 940 070; Components with heavy corrosion exposure. Externally visible components in direct contact with normal industrial atmosphere or media such as solvents and cleaning agents, where the surface requirement is predominantly functional.

Forces [lbf] and Impact Energy [ft-lbf]												
Piston Ø	[in]	½	⅝	¾	1	1¼	1½	2	2½	3	4	5
Theoretical force at 90 psi, advancing		15.3	27.2	42.3	66.3	108.6	169.5	264.8	420.4	678	1059.3	1655.2
	S1	–	–	–	66.3	–	169.5	–	420.4	–	1059.3	–
	S2	11.5	20.2	31.7	55.5	93.3	154.2	237.6	393.4	635.5	1017	1589.1
Theoretical force at 90 psi, retracting		11.5	20.2	31.7	55.5	93.3	154.2	237.6	393.4	635.5	1017	1589.1
	S1	–	–	–	55.5	–	142.3	–	377.9	–	992.9	–
	S2	11.5	20.2	31.7	55.5	93.3	154.2	237.6	393.4	635.5	1017	1589.1
Max. impact energy at the end positions		0.052	0.111	0.148	0.221	0.295	0.516	0.738	0.959	1.327	1.844	2.43
	S1	–	–	–	0.22	–	0.52	–	0.96	–	1.84	–
	S6	0.03	0.06	0.07	0.11	0.15	0.26	0.37	0.48	0.66	0.92	1.29
	K10	–	–	0.12	0.18	0.24	0.41	0.59	0.74	1.03	1.48	1.92
	S20	–	0.01	0.02	0.06	0.11	0.29	0.35	0.46	0.59	0.66	0.7

Permissible impact velocity:

$$v_{\text{perm.}} = \sqrt{\frac{2 \times 32.2 \times E_{\text{perm.}}}{m_{\text{piston}} + m_{\text{load}}}}$$

Maximum permissible load:

$$m_{\text{load}} = \frac{2 \times 32.2 \times E_{\text{perm.}}}{v^2} - m_{\text{piston}}$$

Notes

m_{piston} equals mass of cylinder moving parts
 m_{load} equals mass of external load

This data represents the maximum values that can be achieved. Values fluctuate in practice relative to the size of the effective load. Allowance must also be made for the limits of the cushioning capacity of the drive and the permissible impact energy.


Compact Cylinders ADN – Inch Series, Based on ISO 21287

Technical Data




Max. Lateral Force F_q as a Function of the Projection x

$\varnothing 1/2 \dots 2 1/2$

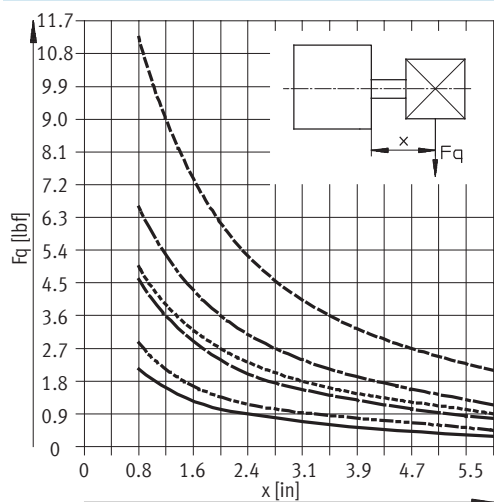

- $\varnothing 1/2$
- - - $\varnothing 5/8$
- $\varnothing 3/4$
- - - $\varnothing 1$
- $\varnothing 1 1/4 / 1 5/8$
- - - $\varnothing 2 / 2 1/2$

$\varnothing 3 \dots 5$

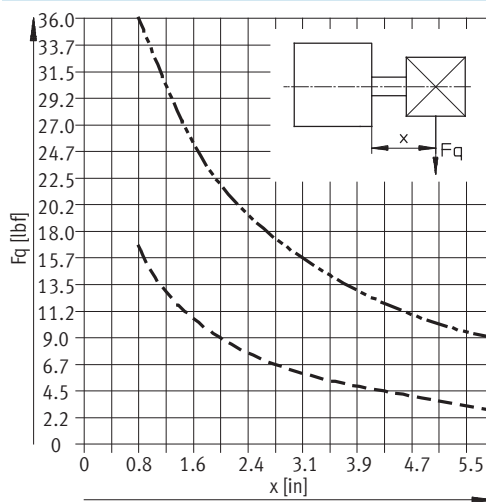

- - - $\varnothing 3/4$
- - - $\varnothing 5$


Compact Cylinders ADN – Inch Series, Based on ISO 21287

Technical Data

Max. Lateral Force F_q as a Function of the Projection x and the Lever Arm a


Q – Square piston rod

$\varnothing 1/2$

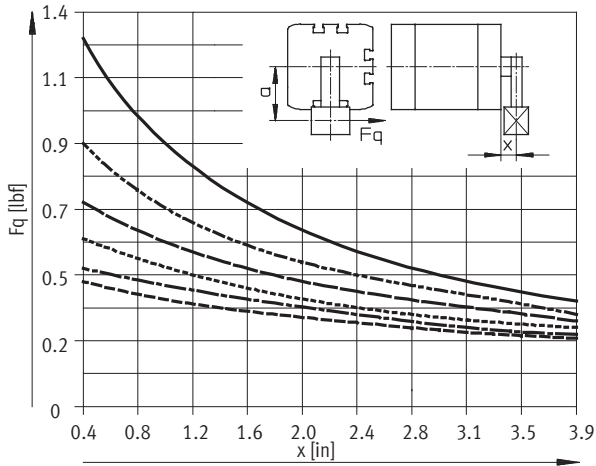


- a = 0.2 in
- - - a = 0.4 in
- a = 0.6 in
- · - a = 0.8 in
- - - a = 1.0 in
- · - a = 1.2 in

$\varnothing 5/8$

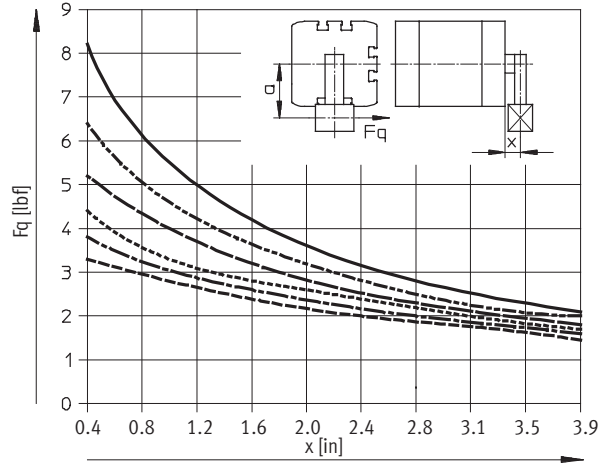


- a = 0.2 in
- - - a = 0.4 in
- a = 0.6 in
- · - a = 0.8 in
- - - a = 1.0 in
- · - a = 1.2 in

$\varnothing 3/4/1$

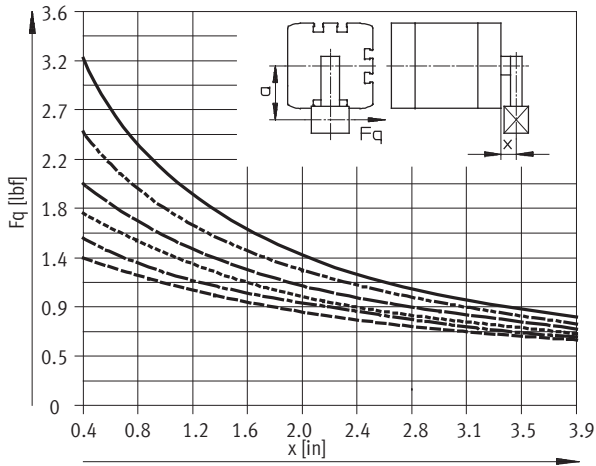

- a = 0.2 in
- - - a = 0.4 in
- a = 0.6 in
- · - a = 0.8 in
- - - a = 1.0 in
- · - a = 1.2 in

$\varnothing 1 1/4/1 5/8$

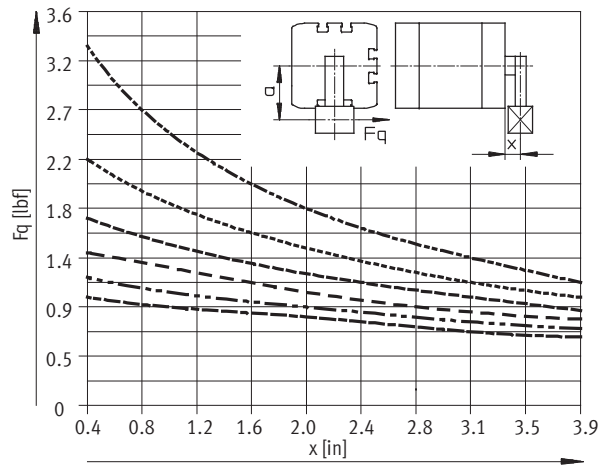

- - - a = 0.4 in
- · - a = 0.8 in
- - - a = 1.2 in
- · - a = 1.6 in
- - - a = 2.0 in
- · - a = 2.4 in

Note

• Torques on the piston rod are to be excluded with projections greater than those shown in the graphs.

• If $a = 0$, the corresponding lateral load line of the basic ADN version can be used (→ 7).


Compact Cylinders ADN – Inch Series, Based on ISO 21287

Technical Data

Max. Lateral Force F_q as a Function of the Projection x and the Lever Arm a


Q – Square piston rod

$\varnothing 2/2\frac{1}{2}$

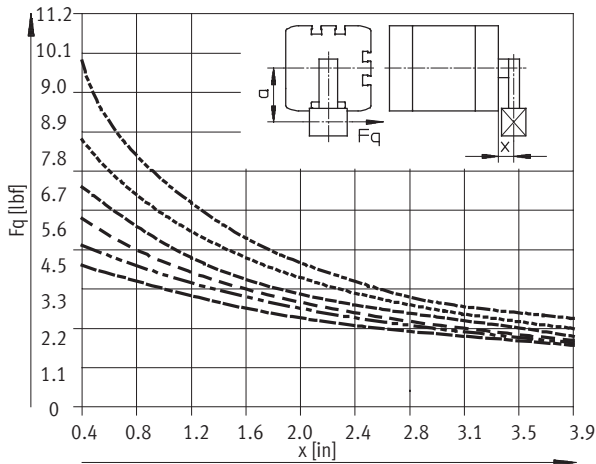


- a = 0.2 in
- a = 0.4 in
- a = 0.6 in
- a = 0.8 in
- a = 1.0 in
- a = 1.2 in

$\varnothing 3/4$

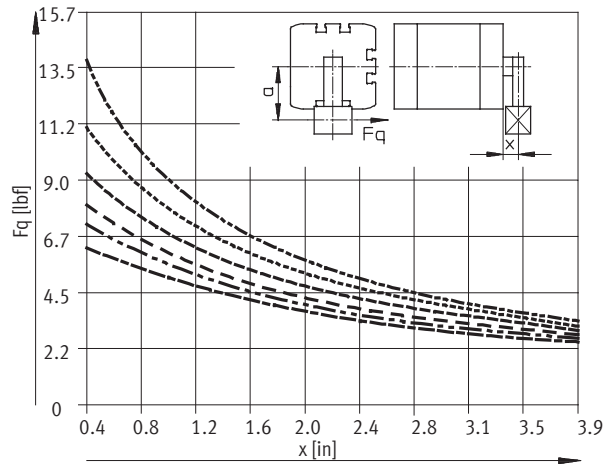

- a = 0.2 in
- a = 0.4 in
- a = 0.6 in
- a = 0.8 in
- a = 1.0 in
- a = 1.2 in

$\varnothing 5$

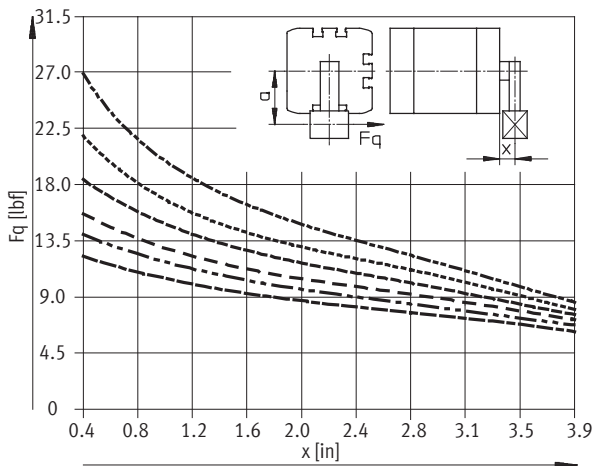

- a = 0.2 in
- a = 0.4 in
- a = 0.6 in
- a = 0.8 in
- a = 1.0 in
- a = 1.2 in

Note


- Torques on the piston rod are to be excluded with projections greater than those shown in the graphs.
- If $a = 0$, the corresponding lateral load line of the basic ADN version can be used (→ 7).

Compact Cylinders ADN – Inch Series, Based on ISO 21287

Technical Data

Max. Lateral Force F_Q as a Function of the Projection x

S1 – Reinforced piston rod

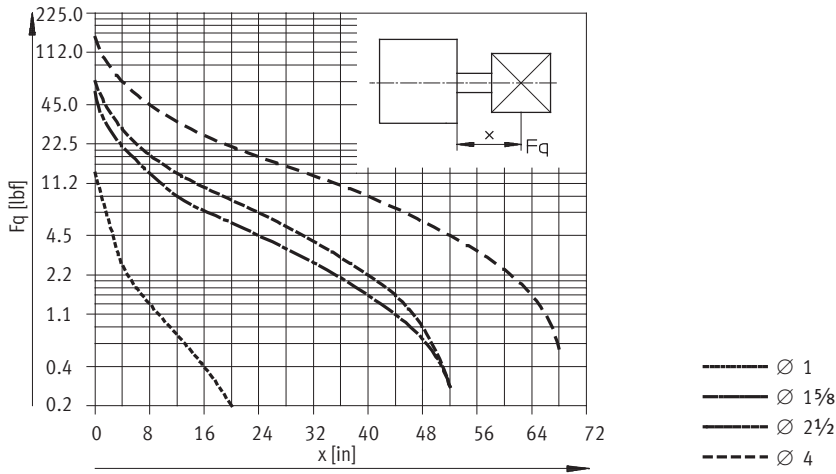


Weight [lb]

Piston Ø	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4	5
Product weight with 0 in stroke	0.15	0.16	0.26	0.31	0.53	0.69	1.08	1.44	2.6	4.31	5.76
Additional weight per 0.4 in stroke	0.02	0.03	0.04	0.05	0.06	0.07	0.1	0.12	0.16	0.2	0.23
Moving load with 0 in stroke	0.02	0.03	0.06	0.1	0.12	0.16	0.28	0.36	0.8	1.14	2.16
Additional load per 0.4 in stroke	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.05	0.05	0.08

Materials

Sectional view

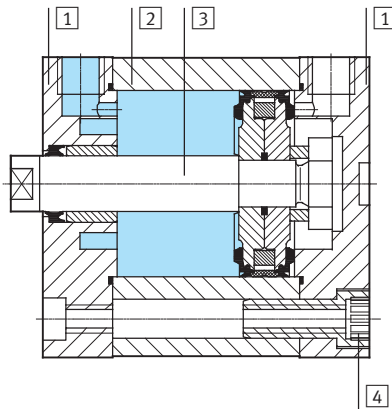

Compact cylinder	Basic version, Q	S6	R3
1 Cover	Anodised aluminum		
2 Cylinder barrel	Anodised aluminum		
3 Piston rod	High-alloy steel		
4 Flange screws	Ø 1/2 ... 5/8	High-alloy steel	High-alloy steel
	Ø 3/4 ... 1	Galvanised steel	High-alloy steel
	Ø 1 1/4 ... 2 1/2	Galvanised steel	Steel, zinc flake coating
	Ø 3 ... 5	Standard screws, galvanised steel	Standard screws, high-alloy steel
– Seals	Polyurethane	Fluoro elastomer	Polyurethane

Compact Cylinders ADN – Inch Series, Based on ISO 21287



Dimensional Drawings

Dimensions – Basic Version¹⁾


Download CAD Data → www.festo.com/us/cad

∅ 1/2 ... 2 1/2


∅ 1/2

∅ 1/2 ... 1

∅ 1 1/4 ... 2 1/2

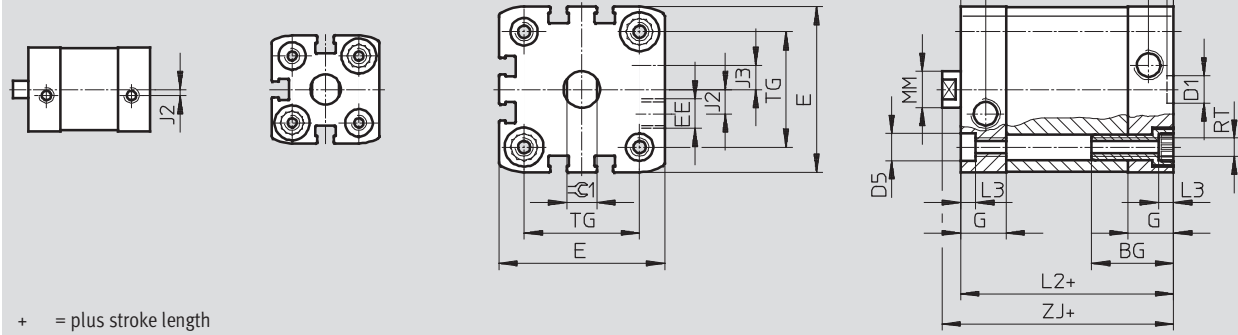

∅ 3 ... 5

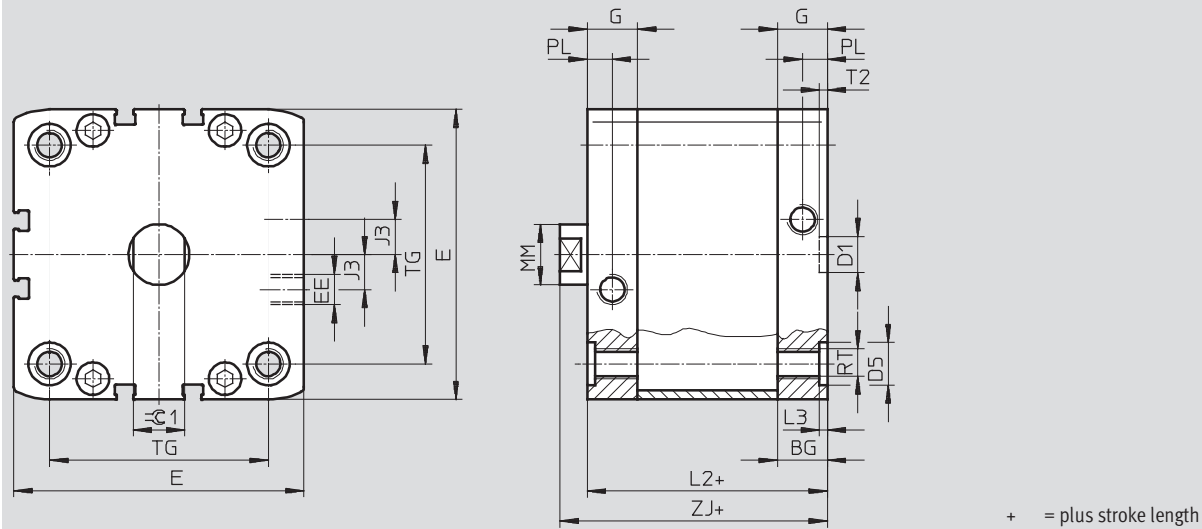

∅ [in]	BG	D1 ∅ H9	D5 ∅ F9	E	EE	G	J2	J3	L2 max.	L3 +0.01	MM ∅	PL +0.01	RT	T2 +0.1	TG ±0.01	ZJ +0.04	⊖C1 h13 [mm]		
1/2	0.67	0.35	0.24	1.08+0.01	10-32 UNF-2B	0.41	0.08	-	1.38	0.14	0.24	0.24	M4	0.08	0.63	1.54	5		
5/8				1.14+0.01		0.43	-	0.31			0.71				1.57	7			
3/4	0.77		0.35	1.4+0.01		0.47	-	0.1	1.46	0.39	0.2				0.32	M5	0.87	1.68	9
1				1.56+0.01		-	0.24	1.54	1.02								1.76		
1 1/4	1.06	0.47	0.35	1.85+0.01	1/8-27 NPT	-	0.24	1.73	0.2	0.47	0.32	M6	0.1	1.28	1.98	10			
1 5/8				2.15+0.01		-	0.31	1.77						1.5	2.02				
2				2.58+0.01		0.45	1.93	1.83						2.09					
2 1/2	2.97+0.01		-	2.13		2.22	2.25												
3	0.67		0.59	0.47		3.76+0.02	0.65	-	0.79	2.64	0.1	0.79	0.41	M10	0.1	2.83	2.48	17	
4	0.85					4.47+0.02	0.85	-	0.79	2.64	0.1	0.79				3.5	2.99		
5	0.79	-	-	5.3+0.01	0.79	-	0.83	3.19	-	0.98	0.41	M12	-	4.33	3.62	21			

1) Dimensions are in inches, unless otherwise noted.

Compact Cylinders ADN – Inch Series, Based on ISO 21287




Dimensional Drawings


Dimensions – Variants¹⁾

Download CAD Data → www.festo.com/us/cad


Basic version

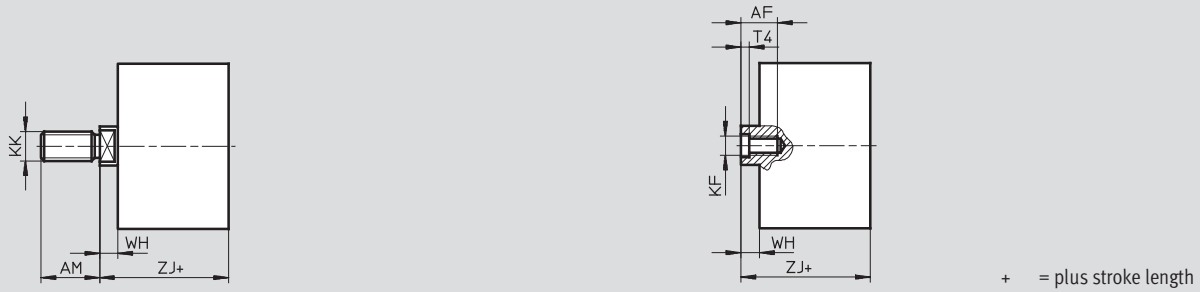

S2 – Through piston rod

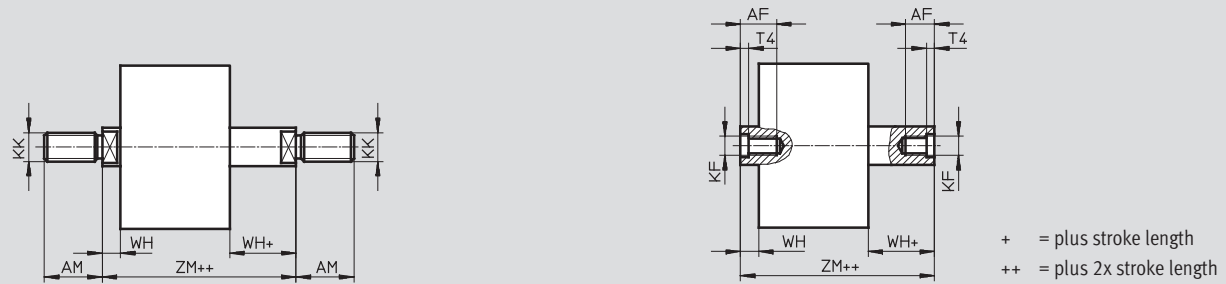

S20 – Through, hollow piston rod

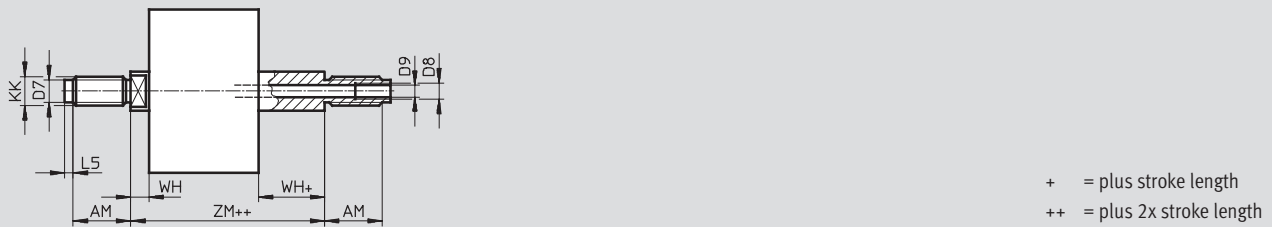

∅ [in]	AF min.	AM -0.02	B ∅	D7 ∅	D8	D9	L5	KF	KK	T4	VD	WH +0.04	ZJ	ZM
1/2	0.31	0.39	-	-	-	-	-	4-48 UNF-2B	10-32 UNF-2A	0.06	-	0.16	1.54	1.71
5/8	0.39	0.47	-	0.18		3.2	0.12	8-36 UNF-2B				0.19	1.57	1.76
3/4	0.55	0.63	0.71	0.24		3.8	0.08	10-32 UNF-2B	5/16-24 UNF-2A	0.1	0.2	0.22	1.68	1.91
1													1.76	1.98
1 1/4	0.63	0.75	1.06	0.31		4.5	0.12	5/16-24 UNF-2B	3/8-24 UNF-2A	0.13	0.25	0.24	1.98	2.22
1 5/8													2.02	2.26
2	0.79	0.87	1.22	0.39		6	0.14	5/16-24 UNF-2B	1/2-20 UNF-2A	0.19	0.32	2.09	2.42	
2 1/2												2.25	2.57	
3	0.79	1.1	1.38	-		G1/8	8	-	1/2-20 UNF-2B	5/8-18 UNF-2A	0.24	0.35	2.48	2.8
4						G1/4							2.99	3.31
5	0.98	1.57	-	-	G1/4	11.7	-	5/8-18 UNF-2B	3/4-16 UNF-2A	0.28	-	0.43	3.62	4.06

1) Dimensions are in inches, unless otherwise noted.


Compact Cylinders ADN – Inch Series, Based on ISO 21287

Dimensional Drawings

Dimensions – Variants¹⁾



Download CAD Data → www.festo.com/us/cad

K2 – Extended male piston rod thread



+ = plus stroke length

K8 – Extended piston rod



Note

Piston rod extension is performed at one end in combination with the S2/S20 variants (at the square piston rod in combination with the Q variant).

+ = plus stroke length

∅ [in]	A1	A2	A3 min.	AM -0.02	KK	T3	WH +0.04	ZJ +0.04
1/2	0.04 ... 0.4	0.04 ... 11.8	-	0.4	10-32 UNF-2A	-	0.16	1.57
5/8				0.47			0.19	
3/4	0.04 ... 0.79	0.04 ... 15.75	0.47	0.63	5/16-24 UNF-2A	0.08	0.22	1.69
1				0.75	3/8-24 UNF-2A	0.1	0.24	1.77
1 1/4				0.87	1/2-20 UNF-2A	0.13	0.32	1.97
1 5/8				1.1	5/8-18 UNF-2A	0.19	0.35	2.01
2				1.57	3/4-16 UNF-2A	-	0.43	2.09
2 1/2	0.04 ... 1.18	0.04 ... 19.7	0.79	1.1	5/8-18 UNF-2A	0.19	0.35	2.24
3								2.48
4	0.04 ... 1.57	0.04 ... 19.7	-	1.57	3/4-16 UNF-2A	-	0.43	2.99
5								3.62

1) Dimensions are in inches, unless otherwise noted.

Compact Cylinders ADN – Inch Series, Based on ISO 21287




Dimensional Drawings


Dimensions – Variants¹⁾

Download CAD Data → www.festo.com/us/cad


Q – Square piston rod

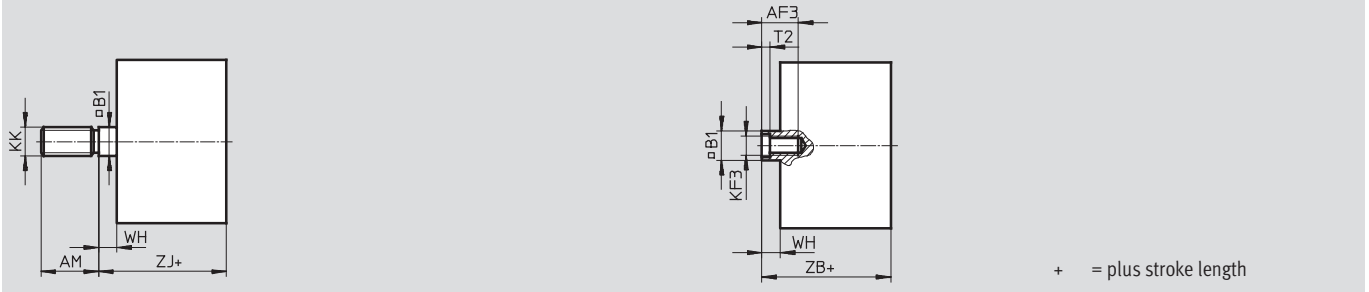

Q-S2 – Square, through piston rod

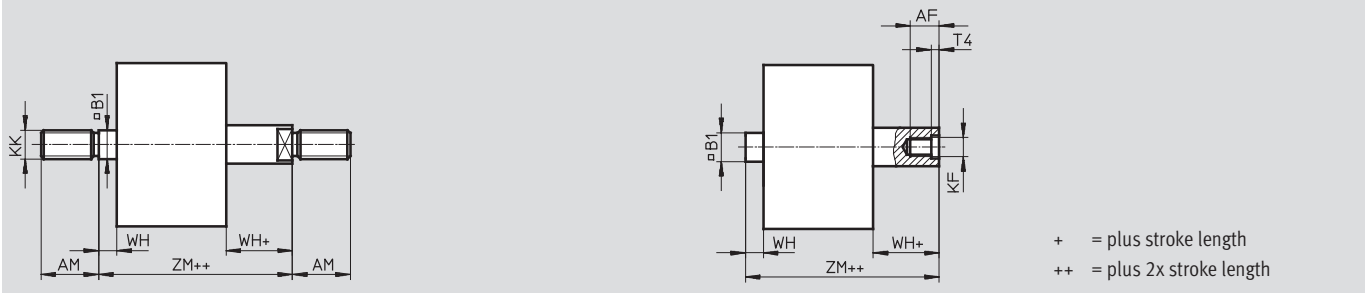

Q-S20 – Square, through, hollow piston rod

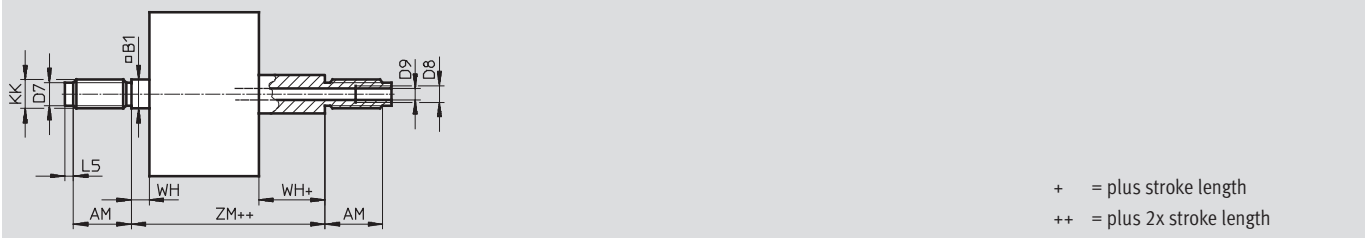

∅	AF	AM	B1	D7	D8	D9	KF	KF3	KK	L5	T4	WH	ZJ	ZM
[in]	min.	-0.02	□	∅								+0.04		
1/2	0.31	0.39	0.22	-	-	-	4-48 UNF-2B	4-48 UNF-2B	10-32 UNF-2A	0.12	0.06	0.17	1.54	1.71
5/8	0.39	0.47	0.28	0.18		0.13	8-36 UNF-2B	8-36 UNF-2B				0.19	1.57	1.76
3/4	0.47	0.63	0.35	0.24		0.15	10-32 UNF-2B	10-32 UNF-2B	5/16-24 UNF-2A	0.08	0.08	0.22	1.68	1.91
1														
1 1/4						0.55	0.75	0.39	0.31	0.18	5/16-24 UNF-2B	10-32 UNF-2B	3/8-24 UNF-2A	0.12
1 5/8											2.02	2.26		
2	0.63	0.87	0.47	0.39						0.24	5/16-24 UNF-2B	5/16-24 UNF-2B	1/2-20 UNF-2A	0.14
2 1/2											2.25	2.57		
3	0.79	1.1	0.63	-	G1/8	0.33	1/2-20 UNF-2B	3/8-24 UNF-2B	5/8-18 UNF-2A	-	0.19	0.35	2.48	2.8
4						0.35								
5						0.94	1.57	0.79		G1/4	0.45	5/16-24 UNF-2B	1/2-20 UNF-2B	3/4-16 UNF-2A

1) Dimensions are in inches, unless otherwise noted.

Compact Cylinders ADN – Inch Series, Based on ISO 21287


Dimensional Drawings

Dimensions – Variants¹⁾

Download CAD Data → www.festo.com/us/cad


S1 – Reinforced piston rod

Ø 1

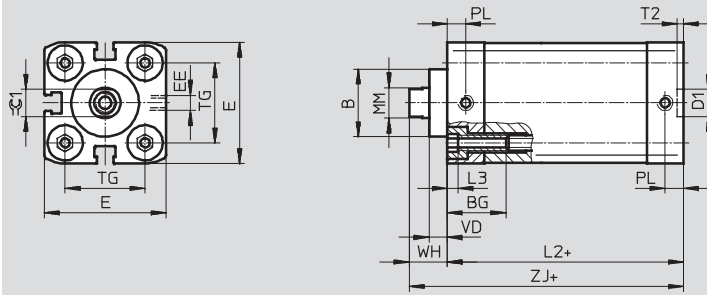

+ = plus stroke length


Ø 1 5/8 ... 4

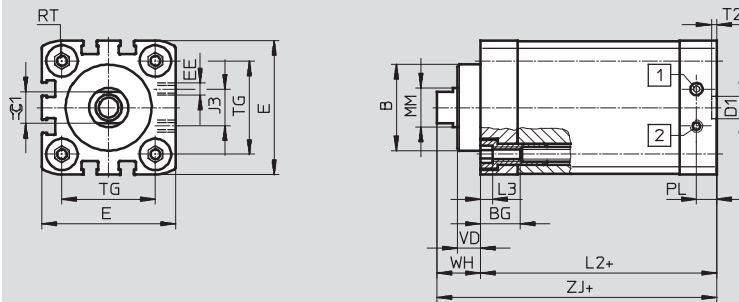

- 1 Cylinder advancing
- 2 Cylinder retracting

+ = plus stroke length

S1 – Reinforced piston rod

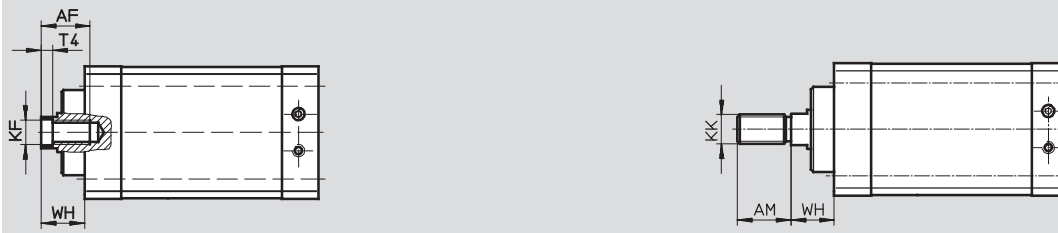

Ø	A3	AF	AM	B	BG	D1	E	EE	J3	KF	KK	L2
[in]	min.	min.	-0.5	Ø F8	min.	Ø H9	+0.01					
1	0.47	0.55	0.63	0.87	0.59	0.35	1.56	10-32 UNF-2B	-	10-32 UNF-2B	5/16-24 UNF-2B	1.54
1 5/8	0.63	0.79	0.87	1.38	0.63		2.15		0.59	3/8-24 UNF-2B	1/2-20 UNF-2B	1.77
2 1/2	0.79	0.98	1.1	1.65	0.67	0.47	2.97	1/8-27 NPT-2B	0.91	1/2-20 UNF-2B	5/8-18 UNF-2B	1.93
4	-		1.57	2.17			0.67		4.47	1.57	5/8-18 UNF-2B	3/4-16 UNF-2B

Ø	L3	MM	PM	RT	T2	T3	T4	TG	VD	WH	ZJ	≈S1
[in]		Ø								+1.3		h13 [mm]
1	0.2	0.39	0.24	M5	0.08	0.08	0.1	1.02	0.24	0.46	1.99	9
1 5/8		0.63		M6		0.13	0.19	1.5	0.37	0.7	2.47	13
2 1/2		0.79	0.32	M8	0.1	0.19	0.24	2.22	0.47	0.83	2.76	17
4		0.98		M10		-	0.28	3.5	0.61	1.04	3.67	21

1) Dimensions are in inches, unless otherwise noted.

Compact Cylinders ADN – Inch Series, Based on ISO 21287

Ordering Data – Pre-configured Products




Ordering Data						
Type	Piston Ø [in]	Stroke [in]	Female piston rod thread		Male piston rod thread	
			Part No.	Type	Part No.	Type
	1/2	1/4	557025	ADN-1/2"-1/4"-I-P-A	557019	ADN-1/2"-1/4"-A-P-A
		1/2	557026	ADN-1/2"-1/2"-I-P-A	557020	ADN-1/2"-1/2"-A-P-A
		3/4	557027	ADN-1/2"-3/4"-I-P-A	557021	ADN-1/2"-3/4"-A-P-A
		1	557028	ADN-1/2"-1"-I-P-A	557022	ADN-1/2"-1"-A-P-A
		1 1/4	557029	ADN-1/2"-1 1/4"-I-P-A	557023	ADN-1/2"-1 1/4"-A-P-A
		1 1/2	557030	ADN-1/2"-1 1/2"-I-P-A	557024	ADN-1/2"-1 1/2"-A-P-A
	5/8	1/4	557039	ADN-5/8"-1/4"-I-P-A	557032	ADN-5/8"-1/4"-A-P-A
		1/2	557040	ADN-5/8"-1/2"-I-P-A	557033	ADN-5/8"-1/2"-A-P-A
		3/4	557041	ADN-5/8"-3/4"-I-P-A	557034	ADN-5/8"-3/4"-A-P-A
		1	557042	ADN-5/8"-1"-I-P-A	557035	ADN-5/8"-1"-A-P-A
		1 1/4	557043	ADN-5/8"-1 1/4"-I-P-A	557036	ADN-5/8"-1 1/4"-A-P-A
		1 1/2	557044	ADN-5/8"-1 1/2"-I-P-A	557037	ADN-5/8"-1 1/2"-A-P-A
	3/4	1/4	557055	ADN-3/4"-1/4"-I-P-A	557047	ADN-3/4"-1/4"-A-P-A
		1/2	557056	ADN-3/4"-1/2"-I-P-A	557048	ADN-3/4"-1/2"-A-P-A
		3/4	557057	ADN-3/4"-3/4"-I-P-A	557049	ADN-3/4"-3/4"-A-P-A
		1	557058	ADN-3/4"-1"-I-P-A	557050	ADN-3/4"-1"-A-P-A
		1 1/4	557059	ADN-3/4"-1 1/4"-I-P-A	557051	ADN-3/4"-1 1/4"-A-P-A
		1 1/2	557060	ADN-3/4"-1 1/2"-I-P-A	557052	ADN-3/4"-1 1/2"-A-P-A
	1	1/4	557072	ADN-1"-1/4"-I-P-A	557064	ADN-1"-1/4"-A-P-A
		1/2	557073	ADN-1"-1/2"-I-P-A	557065	ADN-1"-1/2"-A-P-A
		3/4	557074	ADN-1"-3/4"-I-P-A	557066	ADN-1"-3/4"-A-P-A
		1	557075	ADN-1"-1"-I-P-A	557067	ADN-1"-1"-A-P-A
		1 1/4	557076	ADN-1"-1 1/4"-I-P-A	557068	ADN-1"-1 1/4"-A-P-A
		1 1/2	557077	ADN-1"-1 1/2"-I-P-A	557069	ADN-1"-1 1/2"-A-P-A
1 1/4	1/4	557090	ADN-1 1/4"-1/4"-I-P-A	557081	ADN-1 1/4"-1/4"-A-P-A	
	1/2	557091	ADN-1 1/4"-1/2"-I-P-A	557082	ADN-1 1/4"-1/2"-A-P-A	
	3/4	557092	ADN-1 1/4"-3/4"-I-P-A	557083	ADN-1 1/4"-3/4"-A-P-A	
	1	557093	ADN-1 1/4"-1"-I-P-A	557084	ADN-1 1/4"-1"-A-P-A	
	1 1/4	557094	ADN-1 1/4"-1 1/4"-I-P-A	557085	ADN-1 1/4"-1 1/4"-A-P-A	
	1 1/2	557095	ADN-1 1/4"-1 1/2"-I-P-A	557086	ADN-1 1/4"-1 1/2"-A-P-A	
	2	557096	ADN-1 1/4"-2"-I-P-A	557087	ADN-1 1/4"-2"-A-P-A	
	2 1/2	557097	ADN-1 1/4"-2 1/2"-I-P-A	557088	ADN-1 1/4"-2 1/2"-A-P-A	
	3	557098	ADN-1 1/4"-3"-I-P-A	557089	ADN-1 1/4"-3"-A-P-A	

Compact Cylinders ADN – Inch Series, Based on ISO 21287



Ordering Data – Pre-configured Products

Ordering Data							
Type	Piston Ø [in]	Stroke [in]	Female piston rod thread		Male piston rod thread		
			Part No.	Type	Part No.	Type	
	1 5/8	1/4	557109	ADN-1 5/8"-1/4"-I-P-A	557100	ADN-1 5/8"-1/4"-A-P-A	
		1/2	557110	ADN-1 5/8"-1/2"-I-P-A	557101	ADN-1 5/8"-1/2"-A-P-A	
		3/4	557111	ADN-1 5/8"-3/4"-I-P-A	557102	ADN-1 5/8"-3/4"-A-P-A	
		1	557112	ADN-1 5/8"-1"-I-P-A	557103	ADN-1 5/8"-1"-A-P-A	
		1 1/4	557113	ADN-1 5/8"-1 1/4"-I-P-A	557104	ADN-1 5/8"-1 1/4"-A-P-A	
		1 1/2	557114	ADN-1 5/8"-1 1/2"-I-P-A	557105	ADN-1 5/8"-1 1/2"-A-P-A	
		2	557115	ADN-1 5/8"-2"-I-P-A	557106	ADN-1 5/8"-2"-A-P-A	
		2 1/2	557116	ADN-1 5/8"-2 1/2"-I-P-A	557107	ADN-1 5/8"-2 1/2"-A-P-A	
		3	557117	ADN-1 5/8"-3"-I-P-A	557108	ADN-1 5/8"-3"-A-P-A	
		2	1/4	557128	ADN-2"-1/4"-I-P-A	557119	ADN-2"-1/4"-A-P-A
			1/2	557129	ADN-2"-1/2"-I-P-A	557120	ADN-2"-1/2"-A-P-A
			3/4	557130	ADN-2"-3/4"-I-P-A	557121	ADN-2"-3/4"-A-P-A
			1	557131	ADN-2"-1"-I-P-A	557122	ADN-2"-1"-A-P-A
			1 1/4	557132	ADN-2"-1 1/4"-I-P-A	557123	ADN-2"-1 1/4"-A-P-A
			1 1/2	557133	ADN-2"-1 1/2"-I-P-A	557124	ADN-2"-1 1/2"-A-P-A
			2	557134	ADN-2"-2"-I-P-A	557125	ADN-2"-2"-A-P-A
			2 1/2	557135	ADN-2"-2 1/2"-I-P-A	557126	ADN-2"-2 1/2"-A-P-A
		3	557136	ADN-2"-3"-I-P-A	557127	ADN-2"-3"-A-P-A	
		2 1/2	1/2	557146	ADN-2 1/2"-1/2"-I-P-A	557138	ADN-2 1/2"-1/2"-A-P-A
			3/4	557147	ADN-2 1/2"-3/4"-I-P-A	557139	ADN-2 1/2"-3/4"-A-P-A
			1	557148	ADN-2 1/2"-1"-I-P-A	557140	ADN-2 1/2"-1"-A-P-A
			1 1/4	557149	ADN-2 1/2"-1 1/4"-I-P-A	557141	ADN-2 1/2"-1 1/4"-A-P-A
			1 1/2	557150	ADN-2 1/2"-1 1/2"-I-P-A	557142	ADN-2 1/2"-1 1/2"-A-P-A
			2	557151	ADN-2 1/2"-2"-I-P-A	557143	ADN-2 1/2"-2"-A-P-A
			2 1/2	557152	ADN-2 1/2"-2 1/2"-I-P-A	557144	ADN-2 1/2"-2 1/2"-A-P-A
		3	557153	ADN-2 1/2"-3"-I-P-A	557145	ADN-2 1/2"-3"-A-P-A	
		3	1/2	557163	ADN-3"-1/2"-I-P-A	557155	ADN-3"-1/2"-A-P-A
			3/4	557164	ADN-3"-3/4"-I-P-A	557156	ADN-3"-3/4"-A-P-A
	1		557165	ADN-3"-1"-I-P-A	557157	ADN-3"-1"-A-P-A	
	1 1/4		557166	ADN-3"-1 1/4"-I-P-A	557158	ADN-3"-1 1/4"-A-P-A	
	1 1/2		557167	ADN-3"-1 1/2"-I-P-A	557159	ADN-3"-1 1/2"-A-P-A	
	2		557168	ADN-3"-2"-I-P-A	557160	ADN-3"-2"-A-P-A	
	2 1/2		557169	ADN-3"-2 1/2"-I-P-A	557161	ADN-3"-2 1/2"-A-P-A	
	3	557170	ADN-3"-3"-I-P-A	557162	ADN-3"-3"-A-P-A		
	4	1/2	557180	ADN-4"-1/2"-I-P-A	557172	ADN-4"-1/2"-A-P-A	
		3/4	557181	ADN-4"-3/4"-I-P-A	557173	ADN-4"-3/4"-A-P-A	
		1	557182	ADN-4"-1"-I-P-A	557174	ADN-4"-1"-A-P-A	
		1 1/4	557183	ADN-4"-1 1/4"-I-P-A	557175	ADN-4"-1 1/4"-A-P-A	
		1 1/2	557184	ADN-4"-1 1/2"-I-P-A	557176	ADN-4"-1 1/2"-A-P-A	
		2	557185	ADN-4"-2"-I-P-A	557177	ADN-4"-2"-A-P-A	
		2 1/2	557186	ADN-4"-2 1/2"-I-P-A	557178	ADN-4"-2 1/2"-A-P-A	
	3	557187	ADN-4"-3"-I-P-A	557179	ADN-4"-3"-A-P-A		

Compact Cylinders ADN – Inch Series, Based on ISO 21287



Ordering Data – Configurable Products, Basic Version and Variants

M Mandatory Data →						
Module No.	Function		Stroke		Cushioning	
	Piston Ø		Piston rod thread		Position sensing	
557018	ADN	1/2	0.04 ... 19.7	A	P	A
557031		5/8		I		
557046		3/4				
557063		1				
557080		1 1/4				
557099		1 5/8				
Order example						
557031	ADN	- 5/8"	- 10"	- A	- P	- A

Ordering Table									
Size	1/2	5/8	3/4	1	1 1/4	1 5/8	Conditions	Code	Enter Code
M Module No.	557018	557031	557046	557063	557080	557099			
Function	Compact cylinder, double-acting, based on ISO 21287							ADN	ADN
Piston Ø [in]	1/2	5/8	3/4	1	1 1/4	1 5/8		-...	
Stroke [in]	0.04 ... 11.8				0.04 ... 15.75			-...	
Piston rod thread	Male thread							-A	
	Female thread						1	-I	
Cushioning	Flexible cushioning rings/pads at both ends							-P	-P
Position sensing	Via proximity sensor							-A	-A

- 1 I Not with piston rod type S20
- Not with extended male thread K2

Transfer order code

	ADN	-		-		-		-	P	-	A	
--	------------	---	--	---	--	---	--	---	----------	---	----------	--

Compact Cylinders ADN – Inch Series, Based on ISO 21287



Ordering Data – Configurable Products, Basic Version and Variants

Options

Protection against torsion		Male thread extended		Temperature resistance		Corrosion protection	
Type of piston rod		Piston rod extended		Reinforced piston rod			
Q	S2 S20	...K2	...K8	S6	S1	R3	
- Q	- S2	- 0.2"K2		- S6			

Ordering Table

Size	1/2	5/8	3/4	1	1 1/4	1 1/2	Conditions	Code	Enter Code	
0	Protection against torsion						Square piston rod		-Q	-Q
	Type of piston rod						Through piston rod	[2]	-S2	
							Through, hollow piston rod	[2]	-S20	
	[in]						Restricted stroke			
	0.04 ... 7.9		0.04 ... 11.8							
	Male thread extended						Extended male piston rod thread			
	[in] 0.04 ... 0.4		0.04 ... 0.8						-...K2	
	Piston rod extended						Extended piston rod			
	[in]						0.04 ... 11.8	[3]	-...K8	
	Temperature resistance						Heat-resistant seals up to max. 248 °F		-S6	
	Reinforced piston rod						Reinforced piston rod or extended piston rod bearing		-S1	
							Reinforced piston rod or extended piston rod bearing			
	Corrosion protection						High corrosion protection		-R3	

- [2] **S2, S20** Not with corrosion protection R3
- [3] **K8** The sum of the stroke length and piston rod extension must not exceed the maximum permissible stroke length

Transfer order code

- [] - [] - [] - [] - [] - [] - []

Compact Cylinders ADN – Inch Series, Based on ISO 21287



Ordering Data – Configurable Products, Basic Version and Variants

M Mandatory Data →

Module No.	Function	Stroke	Cushioning
	Piston Ø	Piston rod thread	Position sensing
557118	ADN	2	P
557137		2½	A
557154		3	
557171		4	
557395		5	
Order example			
557118	ADN	2"	A

Ordering Table									
Size	2	2½	3	4	5	Conditions	Code	Enter Code	
M Module No.	557118	557137	557154	557171	557395				
Function	Compact cylinder, double-acting, based on ISO 21287						ADN		ADN
Piston Ø [in]	2	2½	3	4	5		-...		
Stroke [in]	0.04 ... 15.75		0.04 ... 19.7				-...		
Piston rod thread	Male thread						-A		
	Female thread					1	-I		
Cushioning	Flexible cushioning rings/pads at both ends						-P		-P
Position sensing	Via proximity sensor						-A		-A

1 I Not with piston rod type S20
Not with extended male thread K2

Transfer order code

Compact Cylinders ADN – Inch Series, Based on ISO 21287



Ordering Data – Configurable Products, Basic Version and Variants

→ **0 Options**

Protection against torsion		Male thread extended		Temperature resistance		Corrosion protection	
Type of piston rod		Piston rod extended		Reinforced piston rod			
Q	S2 S20	...K2	...K8	S6	S1	R3	
- Q	- S2	- 0.5"K2		- S6			

Ordering Table									
Size	2	2½	3	4	5	Conditions	Code	Enter Code	
0	Protection against torsion					Square piston rod		-Q	-Q
	Type of piston rod					Through piston rod	[2]	-S2	
						Through, hollow piston rod			
	Restricted stroke								
	[in]	0.04 ... 11.8		0.04 ... 15.75					
	Male thread extended					Extended male piston rod thread			
	[in]	0.04 ... 0.79		0.04 ... 1.18		0.04 ... 1.57		-...K2	
	Piston rod extended					Extended piston rod			
	[in]	0.04 ... 15.75		0.04 ... 19.7		[3]	-...K8		
	Temperature resistance					Heat-resistant seals up to max. 248 °F			-S6
	Reinforced piston rod					Reinforced piston rod or extended piston rod bearing			
							-S1		
	Corrosion protection					High corrosion protection			-R3


- [2] **S2, S20** Not with improved running performance K10
Not with corrosion protection R3
- [3] **K8** The sum of the stroke length and piston rod extension must not exceed the maximum permissible stroke length

Transfer order code

- [] - [] - [] - [] - [] - [] - []

Compact Cylinders AEN – Inch Series, Based on ISO 21287

Type Codes

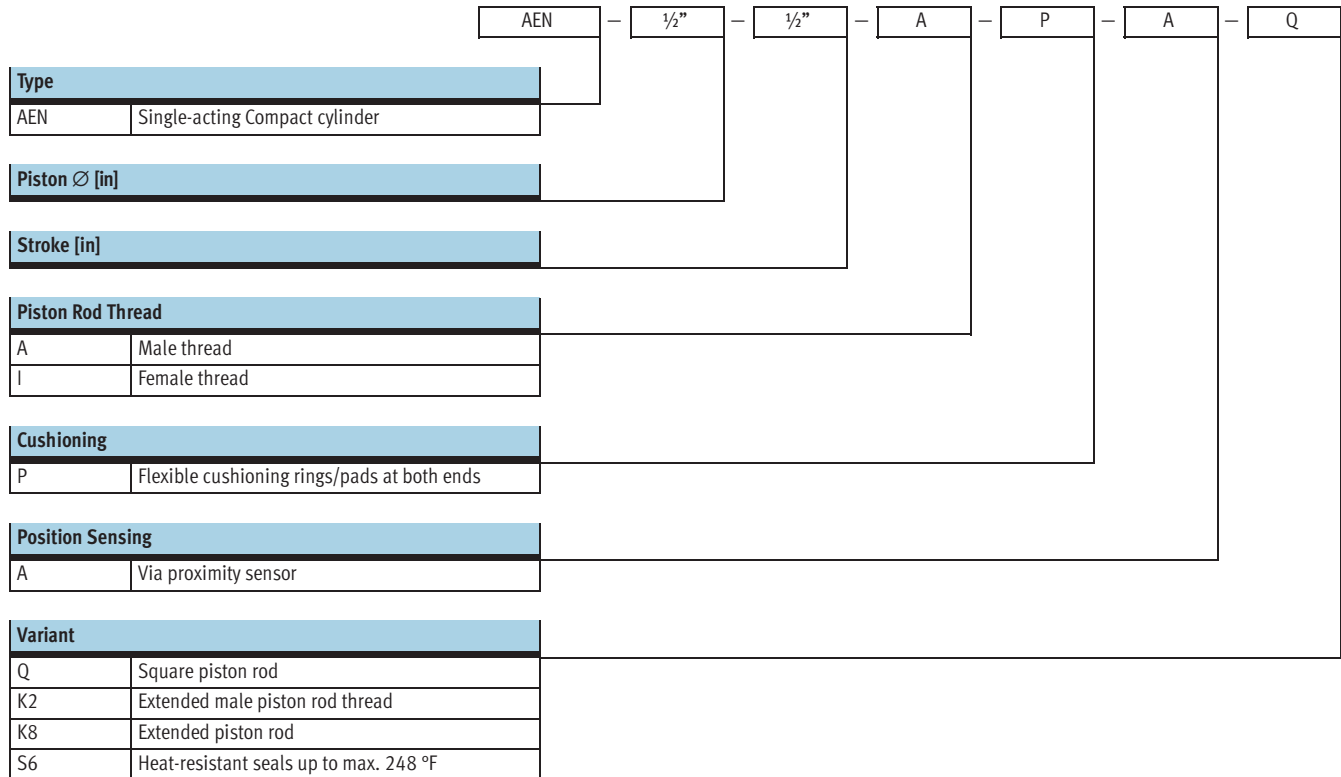

Compact Cylinders AEN – Inch Series, Based on ISO 21287



Technical Data

Function



Variants



S6




K2



K8



Q

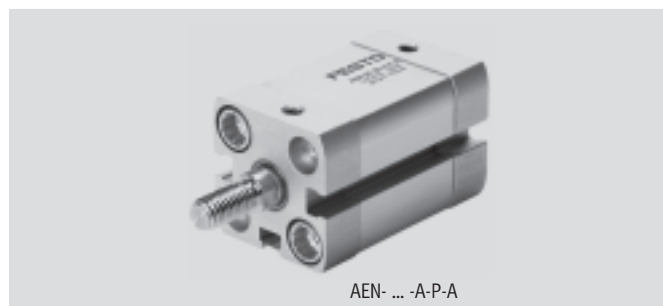

AEN- ... -A-P-A

Diameter 1/2 ... 4 in

Stroke length 0.04 ... 1 in

www.festo.com/en/Spare_parts_service

General Technical Data											
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4
Constructional design		Piston									
		Piston rod									
		Cylinder barrel									
Cushioning		Flexible cushioning rings/pads at both ends									
Position sensing		Via proximity sensor									
Type of mounting		Via through-holes									
		Via female threads									
		Via accessories									
Mounting position		Any									

Technical Data – Basic Version and Variants						
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4
Pneumatic connection		10-32 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	1/8-27 NPT
Female piston rod thread		4-48 UNF-2B	8-36 UNF-2B	10-32 UNF-2B	10-32 UNF-2B	5/16-24 UNF-2B
Male piston rod thread		10-32 UNF-2B	10-32 UNF-2B	5/16-24 UNF-2B	5/16-24 UNF-2B	3/8-24 UNF-2B

Piston Ø	[in]	1 5/8	2	2 1/2	3	4
Pneumatic connection		1/8-27 NPT	1/8-27 NPT	1/8-27 NPT	1/8-27 NPT	1/8-27 NPT
Female piston rod thread		5/16-24 UNF-2B	3/8-24 UNF-2B	3/8-24 UNF-2B	1/2-20 UNF-2B	1/2-20 UNF-2B
Male piston rod thread		3/8-24 UNF-2B	1/2-20 UNF-2B	1/2-20 UNF-2B	5/8-18 UNF-2B	5/8-18 UNF-2B

Operating and Environmental Conditions												
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4	
Operating medium		Filtered compressed air, lubricated or unlubricated										
Operating pressure		22 ... 145		14.5 ... 145								
	[psi]	Q		Q								
Ambient temperature ¹⁾		-4 ... +176										
	[°F]	S6										
Corrosion resistance class CRC ²⁾		2										

1) Note operating range of proximity sensors

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

Compact Cylinders AEN – Inch Series, Based on ISO 21287

Technical Data

Forces [lbf] and Impact Energy [ft-lbf]											
Piston Ø [in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4	
Theoretical force at 90 psi, advancing	59	95	161	260	440	700	1100	1780	2870	4510	
Max. impact energy at the end positions	0.03	0.03	0.03	0.06	0.07	0.11	0.13	0.21	0.26	0.51	

Permissible impact velocity:
$$V_{perm.} = \sqrt{\frac{2 \times 32.2 E_{perm.}}{m_{piston} + m_{load}}}$$

Maximum permissible load:
$$m_{load} = \frac{2 \times 32.2 E_{perm.}}{v^2} - m_{piston}$$


Notes

m_{piston} equals mass of cylinder moving parts
 m_{load} equals mass of external load


This data represents the maximum values that can be achieved. Values fluctuate in practice relative to the size of the effective load. Allowance must also be made for the limits of the cushioning capacity of the drive and the permissible impact energy.

Spring Return Force F as a Function of the Stroke l

Ø 1/2 ... 3/4

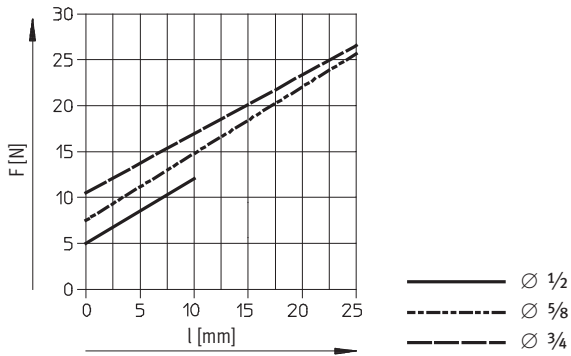

Ø 1 ... 4

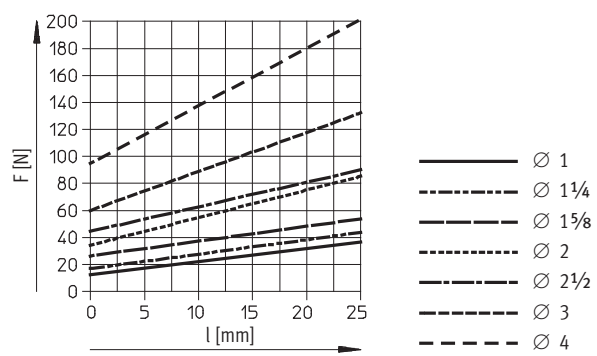

Note

The degree of friction depends upon the assembly position and the type of load involved. Single-acting cylinders should as far as possible be operated without lateral forces.

Compact Cylinders AEN – Inch Series, Based on ISO 21287




Technical Data

Weight [lb]											
Piston \varnothing	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4
Product weight with 0 in stroke		0.15	0.16	0.26	0.31	0.53	0.69	1.08	1.44	2.6	4.31
Additional weight per 0.4 in stroke		0.02	0.03	0.04	0.05	0.06	0.07	0.1	0.12	0.16	0.2
Moving load with 0 in stroke		0.02	0.03	0.06	0.1	0.12	0.16	0.28	0.36	0.8	1.14
Additional load per 0.4 in stroke		0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.05	0.05

Materials

Sectional view

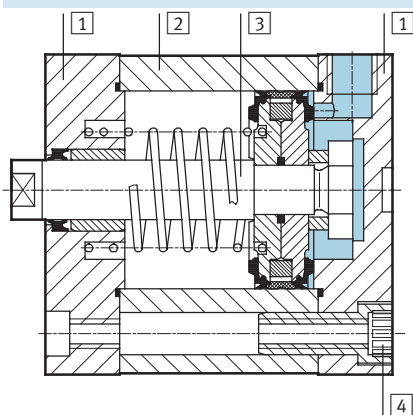

Compact cylinder	Basic version	S6
1 Cover	Anodised aluminum	
2 Cylinder barrel	Anodised aluminum	
3 Piston rod	High-alloy steel	
4 Flange screws	\varnothing 1/2 ... 5/8	High-alloy steel
	\varnothing 3/4 ... 1 1/4	Galvanised steel
	\varnothing 1 5/8 ... 4	Standard screws, galvanised steel
- Seals	Polyurethane	Fluoro elastomer

Compact Cylinders AEN – Inch Series, Based on ISO 21287



Dimensional Drawings

Dimensions – Basic Version¹⁾


Download CAD Data → www.festo.com/us/cad

∅ 1/2 ... 2 1/2

∅ 1/2


∅ 1/2 ... 1

∅ 1 1/4 ... 2 1/2

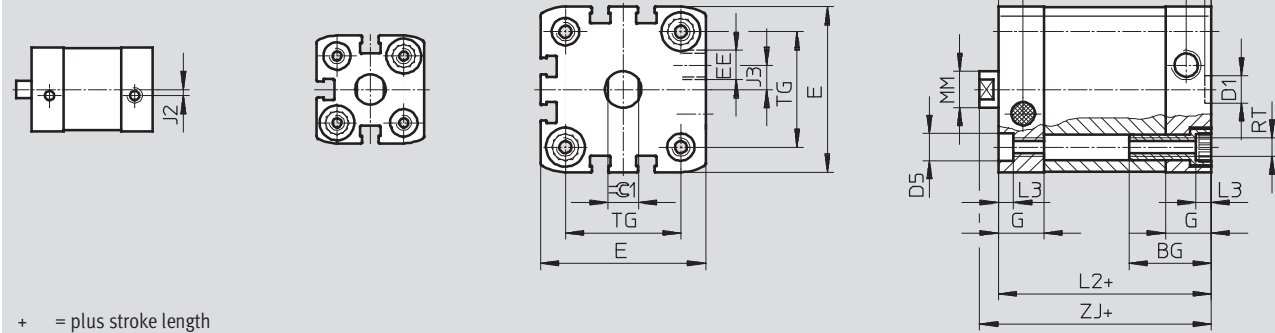

+ = plus stroke length

∅ 80 ... 100

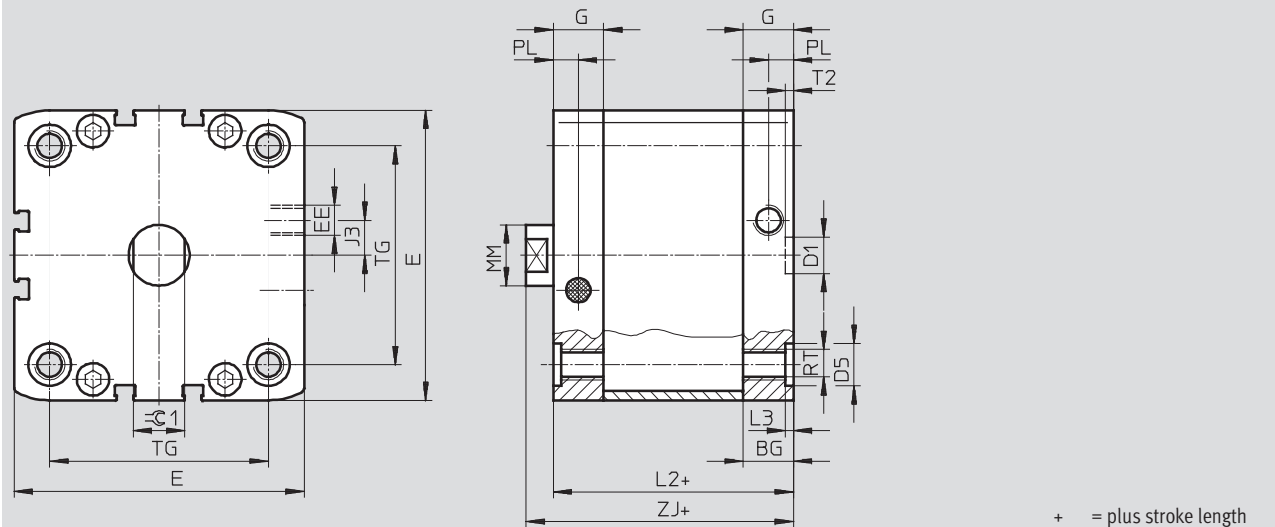

+ = plus stroke length

∅	BG	D1	D5	E	EE	G	J2	J3	L2	L3	MM	PL	RT	T2	TG	ZJ	≈ 1
[in]		∅ H9	∅ F9						max.	+0.01	∅	+0.01		+0.1	±0.01	+0.04	h13 [mm]
1/2	0.67	0.35	0.24	1.08+0.01	10-32 UNF	0.41	0.08	-	1.38	0.14	0.24	0.24	M4	0.08	0.63	1.54	5
5/8				1.14+0.01		0.43	-	0.31			0.71				1.57	7	
3/4	1.4+0.01		0.47	-		0.1	0.39	M5	0.87	1.68	9						
1	1.56+0.01			-		0.24	1.73		1.02	1.76							
1 1/4	1.06	0.47	0.35	1.85+0.01	1/8-27 NPT	0.59	-	0.31	1.77	0.2	0.47	0.32	M6	0.1	1.28	1.98	10
1 5/8				2.15+0.01			-	0.31			1.93				1.5	2.02	
2			2.58+0.01	0.45			1.93	0.1	0.63	M8	1.83				2.09	13	
2 1/2	2.97+0.01		-				0.45		2.22		2.25						
3	0.67		0.59	0.65			0.1	0.79	M10	2.83	2.48				17		
4	0.85			0.85				-		0.79	2.64					0.1	0.41

1) Dimensions are in inches, unless otherwise noted.


Compact Cylinders AEN – Inch Series, Based on ISO 21287

Dimensional Drawings


Dimensions – Variants¹⁾

Download CAD Data → www.festo.com/us/cad

Basic version

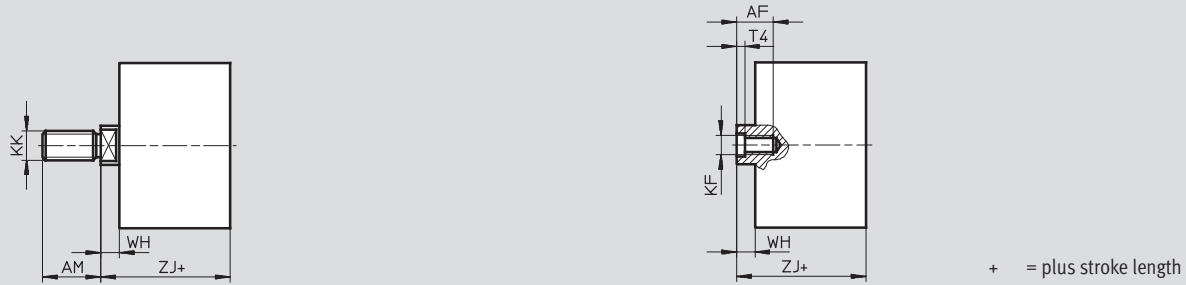

Z – Pulling

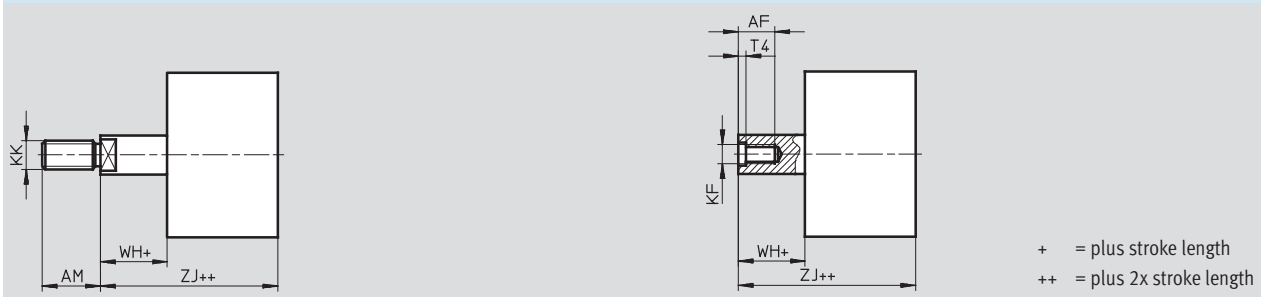

∅	AF	AM	KF	KK	T4	WH	ZJ
[in]	min.	-0.02				+0.04	
1/2	0.31	0.39	4-48 UNF	10-32 UNF	0.06	0.16	1.54
5/8	0.39	0.47	8-36 UNF			0.19	1.57
3/4	0.55	0.63	10-32 UNF	5/16-24 UNF	0.1	0.22	1.68
1							1.76
1 1/4	0.63	0.75	5/16-24 UNF	3/8-24 UNF	0.13	0.24	1.98
1 5/8							2.02
2	0.79	0.87	5/16-24 UNF	1/2-20 UNF	0.19	0.32	2.09
2 1/2							2.25
3	0.79	1.1	1/2-20 UNF	5/8-18 UNF	0.24	0.35	2.48
4							2.99

1) Dimensions are in inches, unless otherwise noted.

Compact Cylinders AEN – Inch Series, Based on ISO 21287




Dimensional Drawings

Dimensions – Variants¹⁾


Download CAD Data → www.festo.com/us/cad

K2 – Extended male piston rod thread



+ = plus stroke length

K8 – Extended piston rod

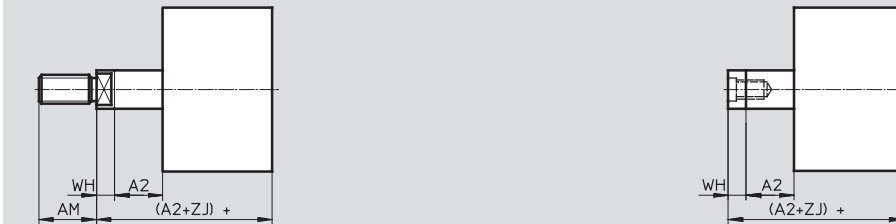

∅ [in]	A1	A2	AM -0.02	KK	WH +0.04	ZJ +0.04
1/2	0.04 ... 0.4	0.04 ... 11.8	0.4	10-32 UNF	0.16	1.57
5/8			0.47		0.19	
3/4	0.04 ... 0.79	0.04 ... 15.75	0.63	5/16-24 UNF	0.22	1.69
1			0.75	3/8-24 UNF	0.24	1.77
1 1/4			0.87	1/2-20 UNF	0.32	1.97
1 5/8			1.1	5/8-18 UNF	0.35	2.01
2	0.04 ... 1.18	0.04 ... 19.7	1.1	5/8-18 UNF	0.35	2.09
2 1/2						2.24
3	0.04 ... 1.18	0.04 ... 19.7	1.1	5/8-18 UNF	0.35	2.48
4						2.99

1) Dimensions are in inches, unless otherwise noted.


Compact Cylinders AEN – Inch Series, Based on ISO 21287

Dimensional Drawings

Dimensions – Variants¹⁾

Download CAD Data → www.festo.com/us/cad

Q – Square piston rod

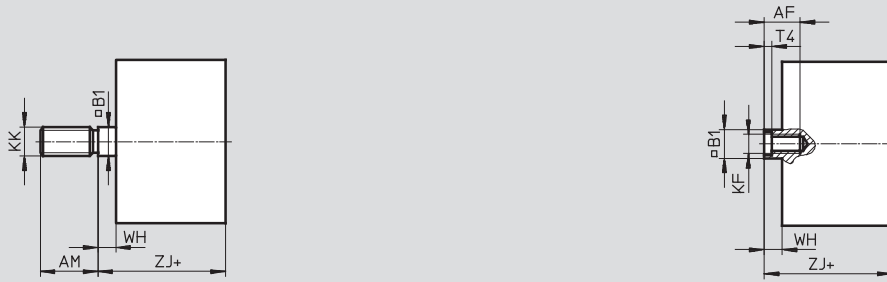

+ = plus stroke length

∅	AF	AM	B1	KF	KK	T4	WH	ZJ
[in]	min.	-0.02	□				+0.04	
5/8	0.39	0.47	0.28	8-36 UNF	10-32 UNF	0.06	0.19	1.57
3/4	0.47	0.63	0.35	10-32 UNF	5/16-24 UNF	0.08	0.22	1.68
1					3/8-24 UNF			1.76
1 1/4	0.55	0.75	0.39	5/16-24 UNF	3/8-24 UNF	0.1	0.24	1.98
1 5/8								2.02
2	0.63	0.87	0.47	3/8-24 UNF	1/2-20 UNF	0.13	0.32	2.09
2 1/2								2.25
3	0.79	1.1	0.63	1/2-20 UNF	5/8-18 UNF	0.19	0.35	2.48
4								2.99

1) Dimensions are in inches, unless otherwise noted.

Compact Cylinders AEN – Inch Series, Based on ISO 21287



Ordering Data – Configurable Products, Basic Version and Variants

M Mandatory Data →						
Module No.	Function	Piston Ø	Stroke	Type of thread	Cushioning	Position sensing
557188	AEN	1/2	0.04 ... 1	A	P	A
557189		5/8		I		
557190		3/4				
557191		1				
557192		1 1/4				
557193		1 5/8				
557194		2				
557195		2 1/2				
557196		3				
557197		4				
Order example						
557188	AEN	1/2"	0.4"	A	P	A

Ordering Table								
Size	1/2	5/8	3/4	1	1 1/4	Conditions	Code	Enter code
M Module No.	557188	557189	557190	557191	557192			
Function	Compact cylinder, single-acting – inch series, based on ISO 21287						AEN	AEN
Piston Ø [in]	1/2	5/8	3/4	1	1 1/4		-...	
Stroke [in]	0.04 ... 0.4	0.04 ... 1					-...	
Type of thread	Male thread						-A	
	Female thread						-I	
Cushioning	Flexible cushioning rings/pads at both ends						-P	-P
Position sensing	Via proximity sensor						-A	-A
O Protection against torsion	-	Square piston rod					-Q	
Male thread extended [in]	Extended male piston rod thread		0.04 ... 0.8				-...K2	
Piston rod extended [in]	Extended piston rod		0.04 ... 1				-...K8	
Temperature resistance	Heat-resistant seals up to max. 248 °F						-S6	

Transfer order code

	AEN	-		-		-	P	-	A
--	------------	---	--	---	--	---	----------	---	----------

Compact Cylinders AEN – Inch Series, Based on ISO 21287



Ordering Data – Configurable Products, Basic Version and Variants

→ **0 Options**

Protection against torsion	Male thread extended	Piston rod extended	Temperature resistance
Q	...K2	...K8	S6
-	- 0.3"K2	- 0.6"K8	- S6


Ordering Table									
Size	1 5/8	2	2 1/2	3	4	Conditions	Code	Enter code	
[M] Module No.	557193	557194	557195	557196	557197				
Function	Compact cylinder, single-acting – inch series, based on ISO 21287						AEN		AEN
Piston Ø [in]	1 5/8	2	2 1/2	3	4		-...		
Stroke [in]	1 ... 2.5						-...		
Type of thread	Male thread						-A		
	Female thread						-I		
Cushioning	Flexible cushioning rings/pads at both ends						-P		-P
Position sensing	Via proximity sensor						-A		-A
[O] Protection against torsion	Square piston rod						-Q		
Male thread extended [in]	Extended male piston rod thread			0.04 ... 0.8		0.04 ... 1.2		-...K2	
Piston rod extended [in]	Extended piston rod							-...K8	
Temperature resistance	Heat-resistant seals up to max. 248 °F						-S6		

Transfer order code

- - - -

Compact Cylinders ADN/AEN – Inch Series, Based on ISO 21287


Accessories Overview

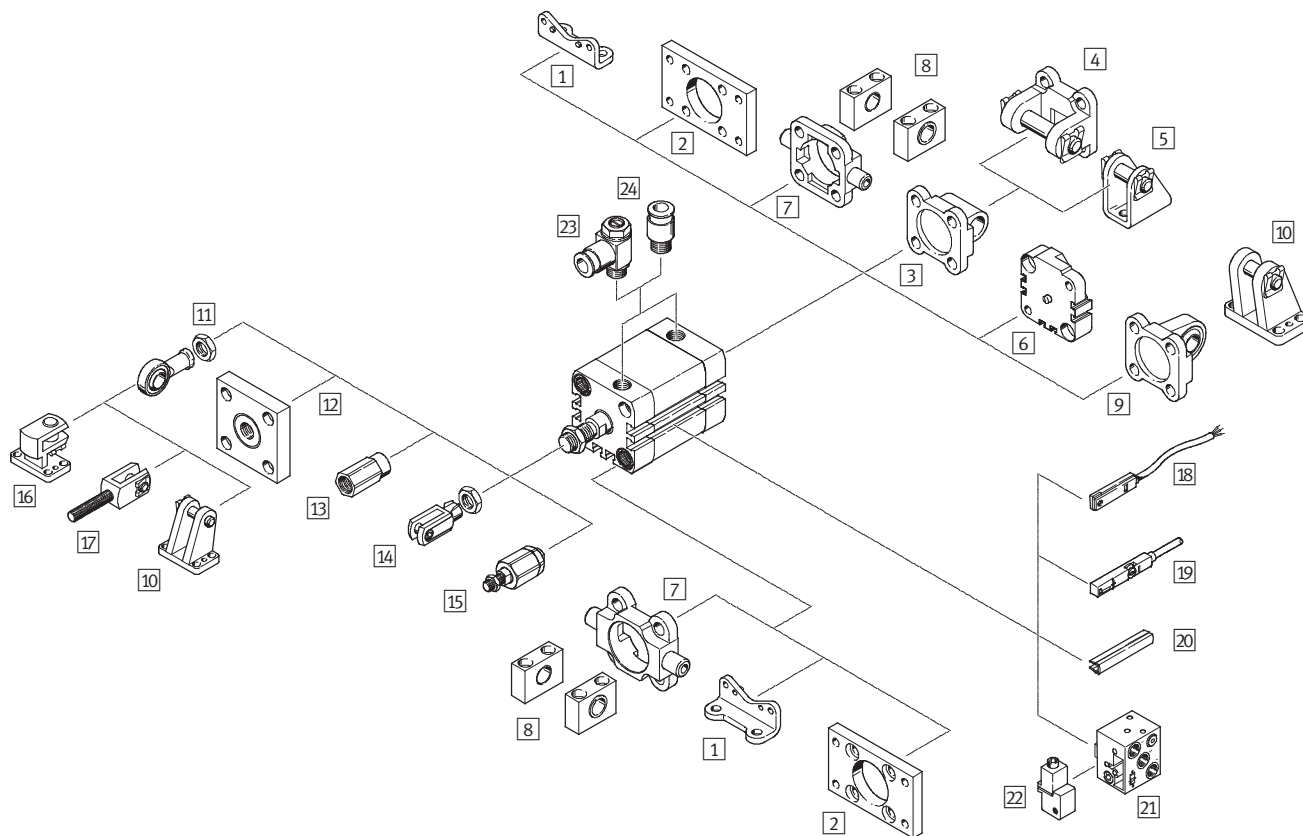


Mounting Attachments and Accessories			→ Page
	Brief description		
1	Foot mounting HNA	For bearing or end caps	42
2	Flange mounting FNC	For bearing or end caps	43
3	Swivel flange SNCL	For end caps	44
4	Swivel flange SNCB	For swivel flange SNCL	47
5	Clevis foot LBN/CRLBN	For swivel flange SNCL	46
6	Multi-position kit DPNA	For connecting two cylinders with identical piston \varnothing to form a multi-position cylinder	46
7	Trunnion flange ZNCF/CRZNG	For bearing caps	48
8	Trunnion support LN2G	For trunnion flange ZNCF/CRZNG	48
9	Swivel flange SNCS	For end caps	45
10	Clevis foot LBG	For swivel flange SNCS	45
11	Rod eye SGS/CRSGS	With spherical bearing	49
12	Coupling piece KSG/KSZ	For compensating radial deviations	49
13	Adapter AD	For mounting a vacuum suction cup on a hollow cylinder piston rod	49
14	Rod clevis SG/CRSG	Permits a swivelling movement of the cylinder in one plane	49
15	Self-aligning rod coupler FK	For compensating radial and angular deviations	49
16	Right-angle clevis foot LQG	For rod eye SGS	49
17	Rod clevis SGA	With male thread	49
18	Proximity sensor SME/SMT-8	Can be integrated in the sensor slot of the cylinder profile barrel	52
19	Proximity sensor SME/SMT-8M	Can be integrated in the sensor slot of the cylinder profile barrel	52
20	Slot cover ABP-5-S	For protecting the sensor cable and keeping dirt out of the sensor slots	52
21	Proximity sensor SMPO-8E	Pneumatic output signal	51
22	Mounting kit SMB-8E	For proximity sensor SMPO-8E	51
23	One-way flow control valve GRLA/GRLZ	For speed regulation	50
24	Push-in fitting QS	For connecting compressed air tubing with standard external diameters	50

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287


Type Codes

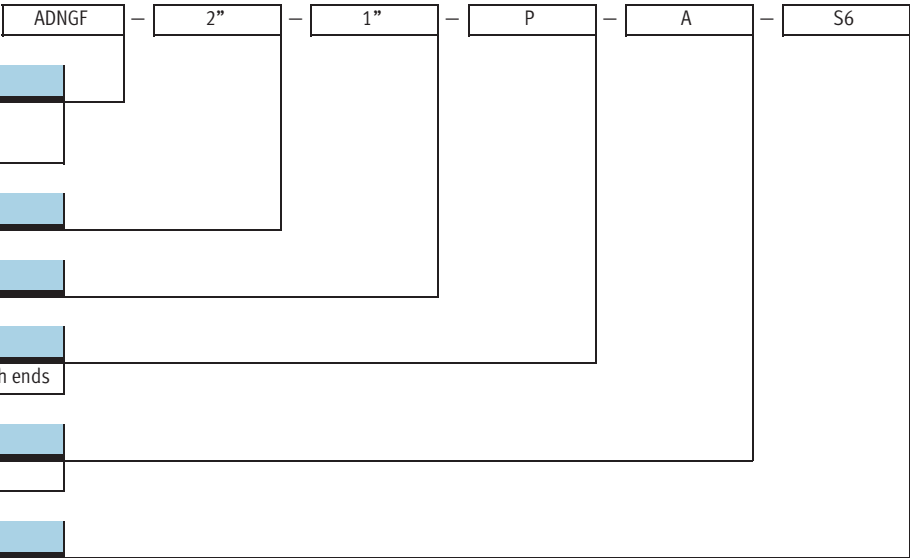

With Guide Rods and Yoke Plate
ADNGF-...



With Guide Rods, Yoke Plate and through Piston Rod
ADNGF-...-S2




Compact Cylinders ADNGF – Inch Series, Based on ISO 21287



Technical Data

Function



Diameter 1/2 ... 4 inch

Stroke length 0.04 ... 15.75 inch


Variants



S2



S6

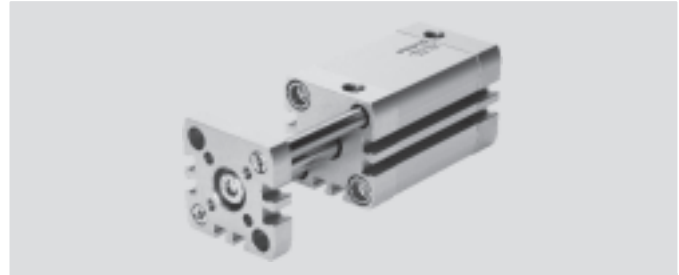

General Technical Data											
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4
Pneumatic connection		10-32 UNF	10-32 UNF	10-32 UNF	10-32 UNF	1/8-27 NPT	1/8-27 NPT	1/8-27 NPT	1/8-27 NPT	1/8-27 NPT	1/8-27 NPT
Constructional design	Piston										
	Piston rod										
	Cylinder barrel										
Cushioning		Flexible cushioning rings/pads at both ends									
Position sensing		Via proximity sensor									
Type of mounting	Via through-holes										
	Via female threads										
	Via accessories										
Mounting position		Any									

Operating and Environmental Conditions											
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4
Operating medium		Filtered compressed air, lubricated or unlubricated									
Operating pressure [psi]		22 ... 145				14.5 ... 145					
	S2	22 ... 145				14.5 ... 145					
Ambient temperature ¹⁾ [°F]		-4 ... +176									
	S6	32 ... +248									
Corrosion resistance class CRC ²⁾		2									

1) Note operating range of proximity sensors

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

Forces [lbf] and Impact Energy [lbf-in]											
Piston Ø	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4
Theoretical force at 90 psi, advancing		15.3	27.2	42.3	66.3	108.6	169.5	264.8	420.4	678	1059.3
	S2	11.5	20.2	31.7	55.5	92.6	154.2	237.6	393.4	635.5	1017
Theoretical force at 90 psi, retracting		11.5	20.2	31.7	55.5	92.6	154.2	237.6	393.4	635.5	1017
	S2	11.5	20.2	31.7	55.5	92.6	154.2	237.6	393.4	635.5	1017
Max. impact energy at the end positions		0.6	1.3	1.8	2.7	3.5	6.2	8.9	11.5	15.9	22.1

Permissible impact velocity:

$$v_{\text{perm.}} = \sqrt{\frac{2 \times 32.2 E_{\text{perm.}}}{m_{\text{piston}} + m_{\text{load}}}}$$

Maximum permissible load:

$$m_{\text{load}} = \frac{2 \times 32.2 E_{\text{perm.}}}{v^2} - m_{\text{piston}}$$

Notes

m_{piston} equals mass of cylinder moving parts
 m_{load} equals mass of external load


This data represents the maximum values that can be achieved. Values fluctuate in practice relative to the size of the effective load. Allowance must also be made for the limits of the cushioning capacity of the drive and the permissible impact energy.

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287

Technical Data




Max. Lateral Force F_q as a Function of the Projection x

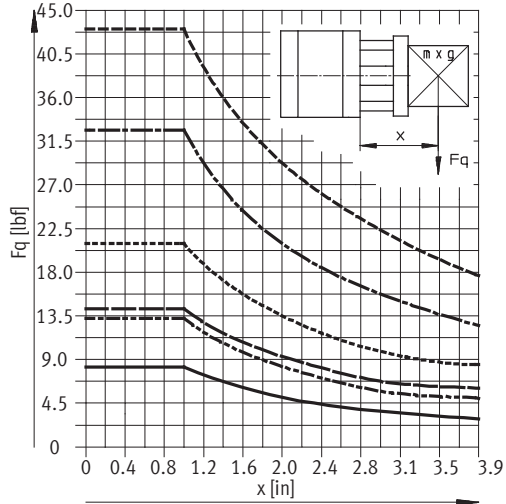

- $\varnothing 1/2/5/8$
- - - $\varnothing 3/4/1$
- · - $\varnothing 1 1/4$
- · · - $\varnothing 1 5/8$
- · · · - $\varnothing 2/2 1/2$
- · · · · - $\varnothing 3/4$

Torque M as a Function of the Stroke Length l

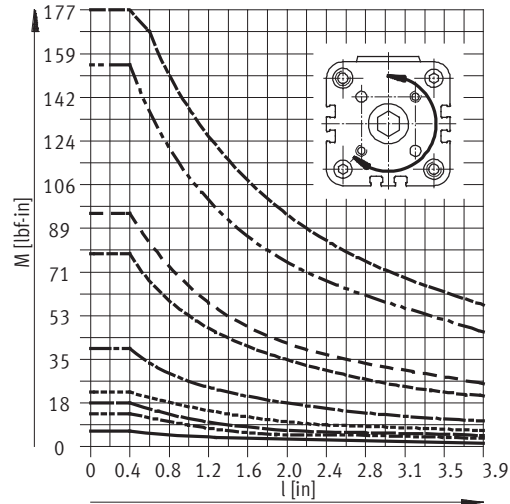


- $\varnothing 1/2/5/8$
- - - $\varnothing 3/4$
- · - $\varnothing 1$
- · · - $\varnothing 1 1/4$
- · · · - $\varnothing 1 5/8$
- · · · · - $\varnothing 2$
- · · · · · - $\varnothing 2 1/2$
- · · · · · · - $\varnothing 3$
- · · · · · · · - $\varnothing 4$

Weight [lb]											
Piston \varnothing	[in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4
Product weight with 0 in stroke		0.18	0.19	0.32	0.38	0.65	0.86	1.37	1.83	3.36	5.35
Additional weight per 0.4 in stroke		0.03	0.03	0.05	0.06	0.08	0.09	0.13	0.14	0.19	0.23
Moving load with 0 in stroke		0.04	0.06	0.12	0.17	0.24	0.33	0.57	0.75	1.56	2.18
Additional load per 0.4 in stroke		0.01	0.01	0.02	0.02	0.03	0.03	0.06	0.06	0.09	0.09

Materials

Sectional view

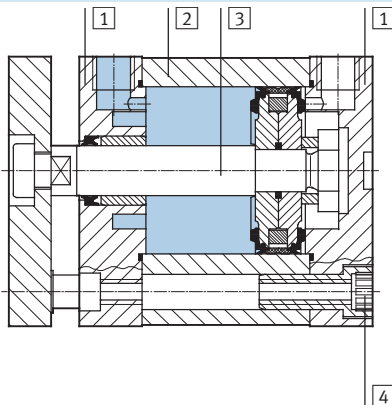



Compact cylinder	Basic version	S6
1 Cover	Anodised aluminum	
2 Cylinder barrel	Anodised aluminum	
3 Piston rod	High-alloy steel	
4 Flange screws	$\varnothing 1/2 \dots 5/8$	High-alloy steel
	$\varnothing 3/4 \dots 2 1/2$	Galvanised steel
	$\varnothing 3 \dots 4$	Standard screws, galvanised steel
- Seals	Polyurethane	Fluoro elastomer

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287



Dimensional Drawings

Dimensions – Basic Version¹⁾ Download CAD Data → www.festo.com/us/cad

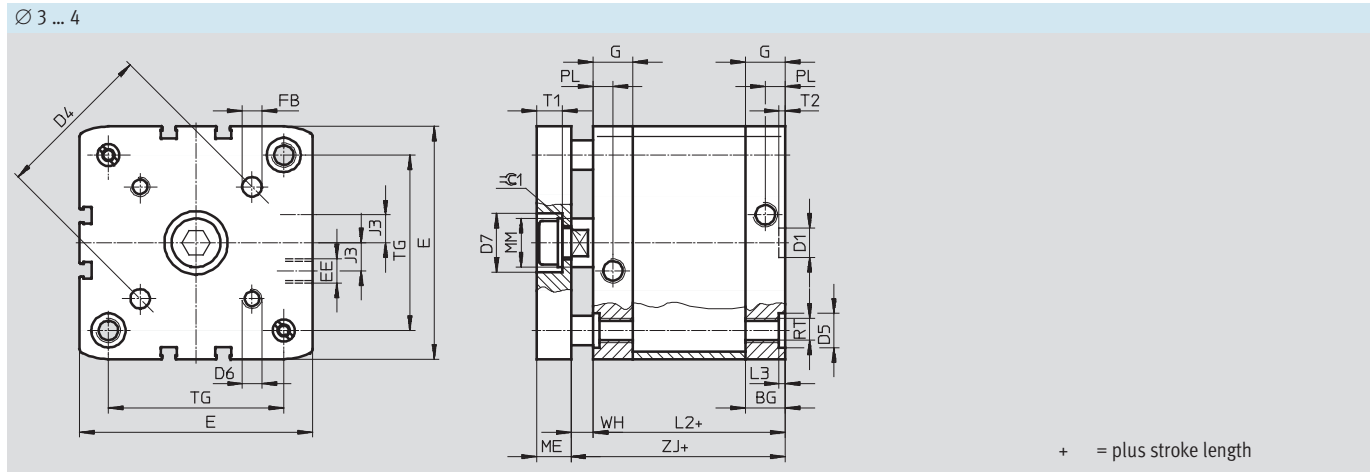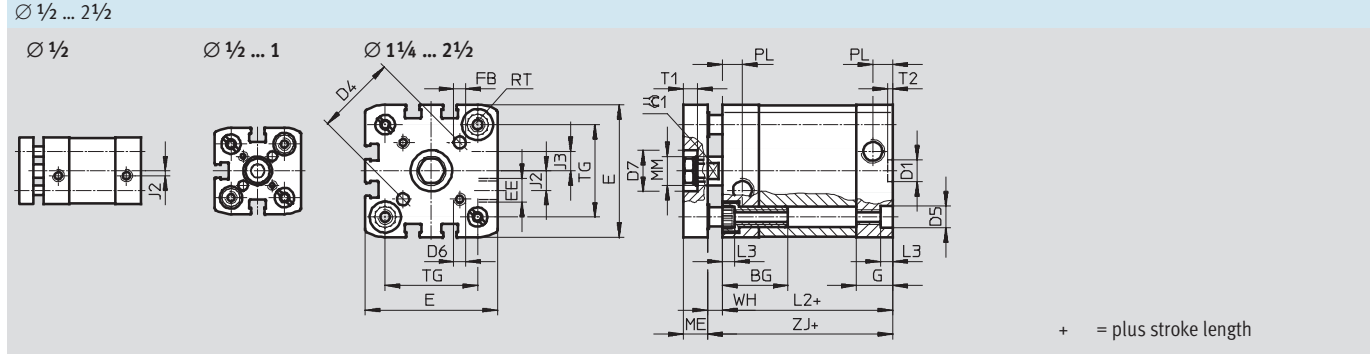

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287



Dimensional Drawings

∅ [in]	BG	D1 ∅ H9	D4 ∅	D5 ∅ F9	D6	D7 ∅ H9	E	EE	FB ∅ H8	G	J2	J3
1/2	0.67	0.35	0.47	0.24	M3	-	1.08+0.01	10-32 UNF	0.12	0.41	0.08	-
5/8			0.55				1.14+0.01			0.43		
3/4	0.77		0.67	0.35	M4	0.55	1.4+0.01		0.16	0.47	-	0.1
1			0.87		M5		1.56+0.01					
1 1/4	1.06		1.1		0.47	M6	0.87		1.85+0.01	0.20	0.59	-
1 5/8		1.3	2.15+0.01					-	0.31			
2		1.65	M8	0.94	3.76+0.02	0.31	0.65	-	0.45			
2 1/2	0.67	0.47	1.97	0.59	M10	0.94	2.97+0.01	1/8-27 NPT	0.24	0.65	-	0.45
3			2.56				3.76+0.02		0.31			
4	0.85		3.15				4.47+0.02		0.39	0.85	-	0.79

∅ [in]	L2 max.	L3 +0.01	ME	MM ∅	PL +0.01	RT	T1	T2 +0.01	TG ±0.01	WH +0.04	ZJ +0.04	≈∅1 h13 [mm]
1/2	1.38	0.14	0.24	0.24	0.24	M4	-	0.08	0.63	0.17	1.54	5
5/8				0.31								0.71
3/4	1.46		0.31	0.39	M5	0.2	1.02		0.22	1.68	1.76	9
1	1.54											
1 1/4	1.73		0.39	0.47	M6	0.24	1.5		0.24	1.83	0.24	2.09
1 5/8	1.77	2.02										
2		2.09										
2 1/2	1.93	0.47	0.63	M8	0.3	0.1	0.1	2.22	0.32	2.25	13	
3	2.13											0.1
4	2.64	0.1	0.41	0.41	0.41	0.41	0.41	3.5	0.35	2.99	17	

1) Dimensions are in inches, unless otherwise noted.

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287



Ordering Data – Pre-configured Products

Ordering Data				
Type	Piston Ø [in]	Stroke [in]	Non-rotating with yoke	
			Part No.	Type
	1/2	1/4	557199	ADNGF-1/2"-1/4"-P-A
		1/2	557200	ADNGF-1/2"-1/2"-P-A
		3/4	557201	ADNGF-1/2"-3/4"-P-A
		1	557202	ADNGF-1/2"-1"-P-A
		1 1/4	557203	ADNGF-1/2"-1 1/4"-P-A
		1 1/2	557204	ADNGF-1/2"-1 1/2"-P-A
	5/8	1/4	557206	ADNGF-5/8"-1/4"-P-A
		1/2	557207	ADNGF-5/8"-1/2"-P-A
		3/4	557208	ADNGF-5/8"-3/4"-P-A
		1	557209	ADNGF-5/8"-1"-P-A
		1 1/4	557210	ADNGF-5/8"-1 1/4"-P-A
		1 1/2	557211	ADNGF-5/8"-1 1/2"-P-A
	3/4	1/4	557214	ADNGF-3/4"-1/4"-P-A
		1/2	557215	ADNGF-3/4"-1/2"-P-A
		3/4	557216	ADNGF-3/4"-3/4"-P-A
		1	557217	ADNGF-3/4"-1"-P-A
		1 1/4	557218	ADNGF-3/4"-1 1/4"-P-A
		1 1/2	557219	ADNGF-3/4"-1 1/2"-P-A
		2	557220	ADNGF-3/4"-2"-P-A
	1	1/4	557223	ADNGF-1"-1/4"-P-A
		1/2	557224	ADNGF-1"-1/2"-P-A
		3/4	557225	ADNGF-1"-3/4"-P-A
		1	557226	ADNGF-1"-1"-P-A
		1 1/4	557227	ADNGF-1"-1 1/4"-P-A
		1 1/2	557228	ADNGF-1"-1 1/2"-P-A
		2	557229	ADNGF-1"-2"-P-A
		2 1/2	557230	ADNGF-1"-2 1/2"-P-A
	1 1/4	1/4	557232	ADNGF-1 1/4"-1/4"-P-A
		1/2	557233	ADNGF-1 1/4"-1/2"-P-A
		3/4	557234	ADNGF-1 1/4"-3/4"-P-A
1		557235	ADNGF-1 1/4"-1"-P-A	
1 1/4		557236	ADNGF-1 1/4"-1 1/4"-P-A	
1 1/2		557237	ADNGF-1 1/4"-1 1/2"-P-A	
2		557238	ADNGF-1 1/4"-2"-P-A	
2 1/2		557239	ADNGF-1 1/4"-2 1/2"-P-A	
3		557240	ADNGF-1 1/4"-3"-P-A	

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287



Ordering Data – Pre-configured Products

Ordering Data				
Type	Piston Ø [in]	Stroke [in]	Non-rotating with yoke	
			Part No.	Type
	1 5/8	1/4	557242	ADNGF-1 5/8"-1/4"-P-A
		1/2	557243	ADNGF-1 5/8"-1/2"-P-A
		3/4	557244	ADNGF-1 5/8"-3/4"-P-A
		1	557245	ADNGF-1 5/8"-1"-P-A
		1 1/4	557246	ADNGF-1 5/8"-1 1/4"-P-A
		1 1/2	557247	ADNGF-1 5/8"-1 1/2"-P-A
		2	557248	ADNGF-1 5/8"-2"-P-A
		2 1/2	557249	ADNGF-1 5/8"-2 1/2"-P-A
		3	557250	ADNGF-1 5/8"-3"-P-A
	2	1/4	557252	ADNGF-2"-1/4"-P-A
		1/2	557253	ADNGF-2"-1/2"-P-A
		3/4	557254	ADNGF-2"-3/4"-P-A
		1	557255	ADNGF-2"-1"-P-A
		1 1/4	557256	ADNGF-2"-1 1/4"-P-A
		1 1/2	557257	ADNGF-2"-1 1/2"-P-A
		2	557258	ADNGF-2"-2"-P-A
		2 1/2	557259	ADNGF-2"-2 1/2"-P-A
		3	557260	ADNGF-2"-3"-P-A
	2 1/2	1/2	557262	ADNGF-2 1/2"-1/2"-P-A
		3/4	557263	ADNGF-2 1/2"-3/4"-P-A
		1	557264	ADNGF-2 1/2"-1"-P-A
		1 1/4	557265	ADNGF-2 1/2"-1 1/4"-P-A
		1 1/2	557266	ADNGF-2 1/2"-1 1/2"-P-A
		2	557267	ADNGF-2 1/2"-2"-P-A
		2 1/2	557268	ADNGF-2 1/2"-2 1/2"-P-A
	3	1/2	557271	ADNGF-3"-1/2"-P-A
		3/4	557272	ADNGF-3"-3/4"-P-A
		1	557273	ADNGF-3"-1"-P-A
		1 1/4	557274	ADNGF-3"-1 1/4"-P-A
		1 1/2	557275	ADNGF-3"-1 1/2"-P-A
		2	557276	ADNGF-3"-2"-P-A
		2 1/2	557277	ADNGF-3"-2 1/2"-P-A
	4	1/2	557280	ADNGF-4"-1/2"-P-A
		3/4	557281	ADNGF-4"-3/4"-P-A
		1	557282	ADNGF-4"-1"-P-A
		1 1/4	557283	ADNGF-4"-1 1/4"-P-A
1 1/2		557284	ADNGF-4"-1 1/2"-P-A	
2		557285	ADNGF-4"-2"-P-A	
2 1/2		557286	ADNGF-4"-2 1/2"-P-A	
3	557287	ADNGF-4"-3"-P-A		

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287



Ordering Data – Configurable Products


M Mandatory Data						O Options
Module No.	Function	Size	Stroke	Cushioning	Position sensing	Type of piston rod
557198	ADNGF	1/2	0.04 ... 19.7	P	A	S2
557205		5/8				
557213		3/4				
557222		1				
557231		1 1/4				
557241		1 5/8				
557251		2				
557261		2 1/2				
557270		3				
557279		4				
Order example						
557198	ADNGF	- 1/2"	- 4"	- P	- A	- S2

Ordering Table													
Size	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4	Conditions	Code	Enter code
M Module No.	557198	557205	557213	557222	557231	557241	557251	557261	557270	557279			
Function	Compact cylinder, double-acting, NPT										ADNGF	ADNGF	
Size [in]	1/2	5/8	3/4	1	1 1/4	1 5/8	2	2 1/2	3	4		- ...	
Stroke [in]	0.04 ... 7.9		0.12 ... 7.9		0.2 ... 11.8					0.2 ... 15.75		- ...	
Cushioning	Flexible cushioning rings/pads at both ends										-P	-P	
Position sensing	Via proximity sensor										-A	-A	
O Type of piston rod	Through piston rod										-S2		

Transfer order code

Compact Cylinders ADNGF – Inch Series, Based on ISO 21287

Accessories Overview

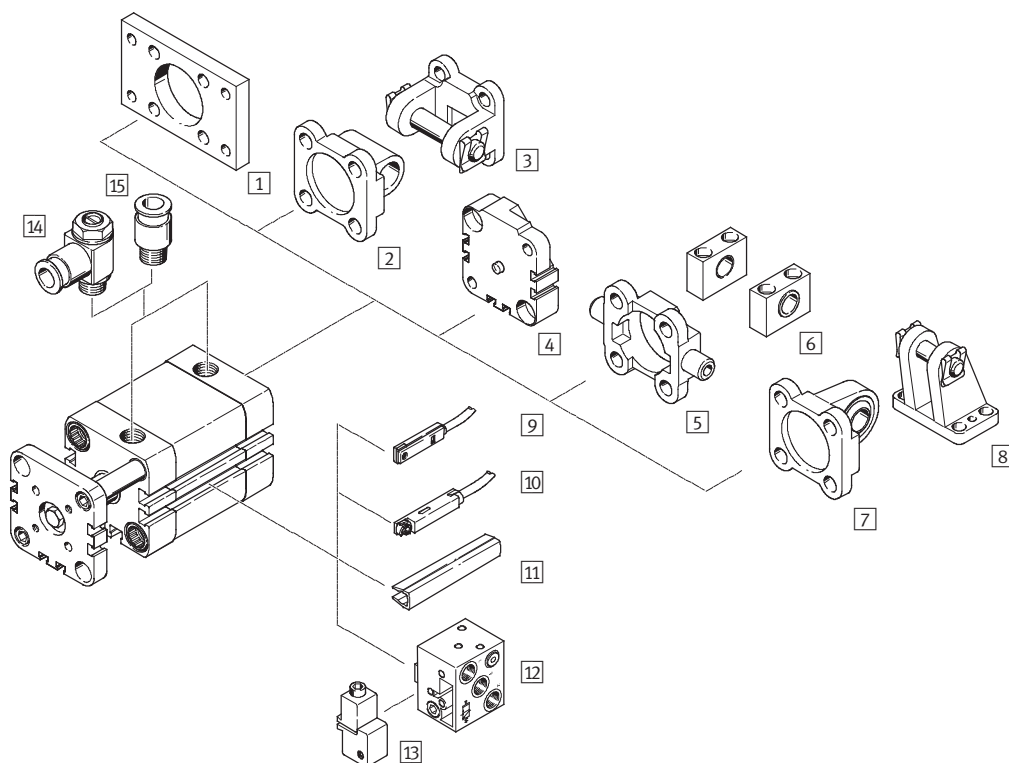

Mounting Attachments and Accessories			
	Brief description	→ Page	
1	Flange mounting FNC	For end caps	43
2	Swivel flange SNCL	For end caps	44
3	Swivel flange SNCB	For end caps	47
4	Multi-position kit DPNA	For connecting two cylinders with identical piston \varnothing to form a multi-position cylinder	46
5	Trunnion flange ZNCF/CRZNG	For end caps	48
6	Trunnion support LNZG	For trunnion flange ZNCF/CRZNG	48
7	Swivel flange SNCS	For end caps	45
8	Clevis foot LBG	For swivel flange SNCS	45
9	Proximity sensor SME/SMT-8	Can be integrated in the sensor slot of the cylinder profile barrel	52
10	Proximity sensor SME/SMT-8M	Can be integrated in the sensor slot of the cylinder profile barrel	52
11	Slot cover ABP-5-S	To protect the sensor cable and keep dirt out of the sensor slots	52
12	Proximity sensor SMPO-8E	Pneumatic output signal	51
13	Mounting kit SMB-8E	For proximity sensor SMPO-8E	51
14	One-way flow control valve GRLA/GRLZ	For speed regulation	50
15	Push-in fitting QS	For connecting compressed air tubing with standard external diameters	50

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories


Foot mounting HNA

Material:

HNA: Galvanised steel

HNA-...-R3: Steel with protective coating

Free of copper, PTFE and silicone

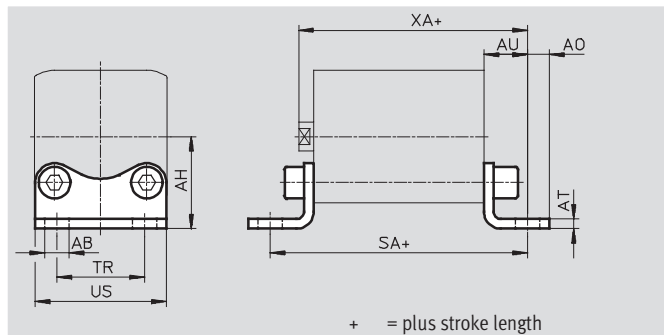

Dimensions and Ordering Data ¹⁾																								
For \varnothing [in]	AB \varnothing H14	AH JS14	AO	AT ± 0.02	AU ± 0.01	SA	TR ± 0.01	US -0.02	XA	Basic version				R3 – High corrosion protection										
										CRC ²⁾	Weight [lb]	Part No.	Type	CRC ²⁾	Weight [lb]	Part No.	Type							
1/2	0.23	0.83	0.2	0.12	0.51	2.4	0.63	1.02	2.06	2	0.05	537237	HNA-12	3	0.05	537252	HNA-12-R3							
5/8		0.87	0.19				0.71	1.08	2.08									0.06	537238	HNA-16	3	0.06	537253	HNA-16-R3
3/4	0.28	1.06	0.25	0.16	0.63	2.72	0.87	1.36	2.31	2	0.1	537239	HNA-20	3	0.1	537254	HNA-20-R3							
1		1.14					1.02	1.52	2.39									0.11	537240	HNA-25	3	0.11	537255	HNA-25-R3
1 1/4		1.32	0.28				1.26	1.81	2.61									0.14	537241	HNA-32	3	0.14	537256	HNA-32-R3
1 5/8		1.5	0.35				1.42	2.13	2.72									0.18	537242	HNA-40	3	0.18	537257	HNA-40-R3
2	0.39	1.77	0.31	0.2	0.83	3.43	1.77	2.52	2.92	2	0.32	537243	HNA-50	3	0.32	537258	HNA-50-R3							
2 1/2		1.97				1.97	2.95	3.08	0.36									537244	HNA-63	3	0.36	537259	HNA-63-R3	
3	0.47	2.48	0.41	0.24	1.02	4.17	2.48	2.48	3.5	2	0.76	537249	HNA-80	3	0.76	537260	HNA-80-R3							
4					1.06	4.76	2.95	4.33	4.06									0.94	537250	HNA-100	3	0.94	537261	HNA-100-R3

1) Dimensions are in inches, unless otherwise noted.

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 3 to Festo standard 940 070

Components requiring higher corrosion resistance. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface


Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories

Flange mounting FNC

Material:
Galvanised steel
Free of copper, PTFE and silicone

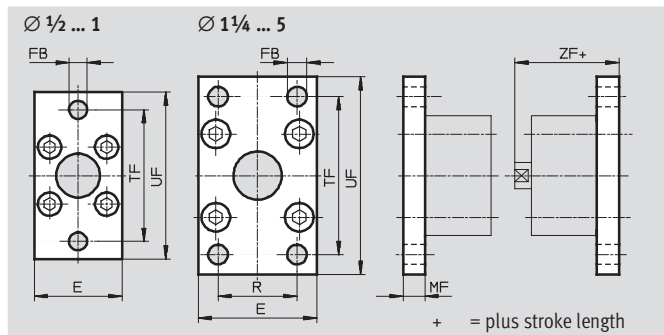

Dimensions and Ordering Data ¹⁾											
For Ø [in]	E	FB Ø	MF	R	TF	UF ±0.4	ZF	CRC ²⁾	Weight [lb]	Part No.	Type
1/2	1.1	0.22	0.31	-	1.57	1.97	1.86	2	0.16	537245	FNC-12
5/8	1.14				1.69	2.17	1.89	2	0.18	537246	FNC-16
3/4	1.42	0.26			2.17	2.76	2.0	2	0.29	537247	FNC-20
1	1.57				2.36	2.99	2.07	2	0.34	537248	FNC-25
1 1/4	1.77	0.28	0.39	1.26	2.52	3.15	2.37	2	0.48	174376	FNC-32
1 5/8	2.13	0.35		1.42	2.83	3.54	2.41	2	0.56	174377	FNC-40
2	2.56		0.47	1.77	3.54	4.33	2.57	2	1.04	174378	FNC-50
2 1/2	2.95			1.97	3.94	4.72	2.72	2	1.38	174379	FNC-63
3	3.66	0.47	0.63	2.48	4.96	5.91	3.11	2	3.3	174380	FNC-80
4	4.33	0.55		2.95	5.91	6.89	3.62	2	4.8	174381	FNC-100
5	5.2	0.63		0.79	3.54	7.09	8.27	4.41	2	7.5	174382

1) Dimensions are in inches, unless otherwise noted.

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories



Swivel flange SNCL

Material:

SNCL: Die-cast aluminum

SNCL-...-R3: Die-cast aluminum with protective coating

Free of copper, PTFE and silicone

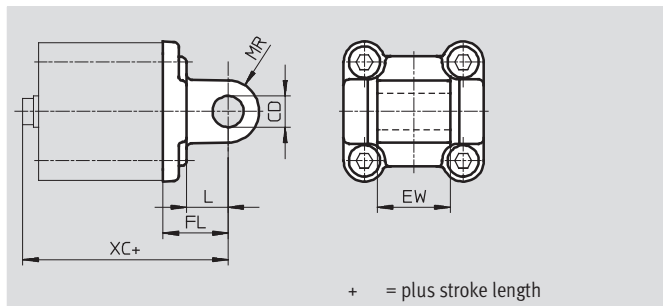

Dimensions and Ordering Data ¹⁾														
For \varnothing [in]	CD \varnothing H9	EW	FL ± 0.01	L	MR	XC	Basic version				R3 – High corrosion protection			
							CRC ²⁾	Weight [lb]	Part No.	Type	CRC ²⁾	Weight [lb]	Part No.	Type
1/2	0.24	0.47 _{h12}	0.63	0.39	0.24	2.17	2	0.04	537790	SNCL-12	3	0.04	537794	SNCL-12-R3
5/8							2	0.05	537791	SNCL-16	3	0.05	537795	SNCL-16-R3
3/4	0.31	0.63 _{h12}	0.79	0.55	0.31	2.47	2	0.08	537792	SNCL-20	3	0.08	537796	SNCL-20-R3
1							2	0.09	537793	SNCL-25	3	0.09	537797	SNCL-25-R3
1 1/4	0.39	1.02 _{-0.01/-0.02}	0.87	0.51	0.39	2.84	2	0.17	174404	SNCL-32	–	–	–	–
1 5/8	0.47	1.1 _{-0.01/-0.02}	0.98	0.63	0.47	2.96	2	0.23	174405	SNCL-40	–	–	–	–
2		1.26 _{-0.01/-0.02}	1.06			3.16	2	0.36	174406	SNCL-50	–	–	–	–
2 1/2	0.63	1.57 _{-0.01/-0.02}	1.26	0.83	0.63	3.51	2	0.54	174407	SNCL-63	–	–	–	–
3		1.97 _{-0.01/-0.02}	1.42	0.87		3.9	2	0.96	174408	SNCL-80	–	–	–	–
4	0.79	2.36 _{-0.01/-0.02}	1.61	1.06	0.79	4.61	2	1.4	174409	SNCL-100	–	–	–	–
5	0.98	2.76 _{-0.01/-0.02}	1.97	1.18		5.59	2	2.6	174410	SNCL-125	–	–	–	–

1) Dimensions are in inches, unless otherwise noted.

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 3 to Festo standard 940 070

Components requiring higher corrosion resistance. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface



Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories

Swivel flange SNCS

Material:
Die-cast aluminum

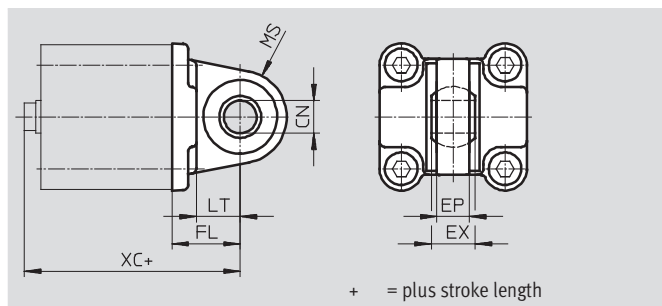

Dimensions and Ordering Data ¹⁾											
For Ø	CN	EP	EX	FL	LT	MS	XC	CRC ²⁾	Weight	Part No.	Type
[in]	Ø	±0.01		±0.01					[lb]		
1¼	0.39	0.41	0.55	0.87	0.51	0.59	2.84	2	0.17	174397	SNCS-32
1⅝	0.47	0.47	0.63	0.98	0.63	0.67	2.96	2	0.25	174398	SNCS-40
2	0.63	0.59	0.83	1.06	0.63	0.79	3.16	2	0.42	174399	SNCS-50
2½	0.63	0.59	0.83	1.26	0.83	0.87	3.51	2	0.56	174400	SNCS-63
3	0.79	0.71	0.98	1.42	0.87	1.06	3.9	2	1.08	174401	SNCS-80
4	0.79	0.71	0.98	1.61	1.06	1.14	4.61	2	1.4	174402	SNCS-100
5	1.18	0.98	1.46	1.97	1.18	1.54	5.59	2	2.82	174403	SNCS-125

1) Dimensions are in inches, unless otherwise noted.


2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Clevis foot LBG

The clevis foot is secured against rotation with a dowel pin.

Material:
Nodular graphite cast iron
Free of copper, PTFE and silicone

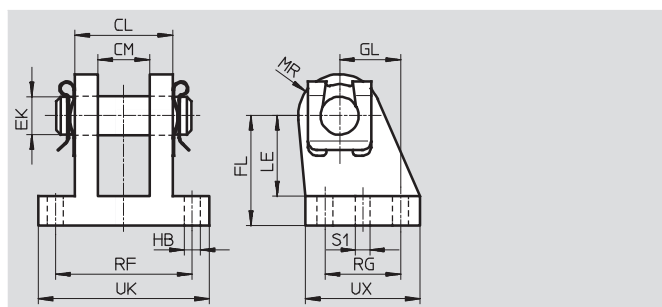

Dimensions and Ordering Data ¹⁾																	
For Ø	CL	CM	EK	FL	GL	HB	LE	MR	RF	RG	S1	UK	UX	CRC ²⁾	Weight	Part No.	Type
[in]			Ø			Ø					Ø				[lb]		
1¼	1.1	0.56	0.39	1.26	0.63	0.27	0.94	0.47	1.65	0.79	0.19	2.2	1.42	2	0.44	31761	LBG-32
1⅝	1.18	0.63	0.47	1.42	0.79	0.27	1.02	0.55	1.73	1.02	0.23	2.28	1.63	2	0.6	31762	LBG-40
2	1.57	0.83	0.63	1.77	0.98	0.36	1.3	0.59	2.2	1.22	0.23	2.76	1.85	2	1.08	31763	LBG-50
2½	1.57	0.83	0.63	1.97	0.98	0.35	1.5	0.67	2.2	1.22	0.31	2.76	1.85	2	1.16	31764	LBG-63
3	1.97	0.99	0.79	2.48	1.18	0.43	1.93	0.71	2.76	1.42	0.31	3.5	2.24	2	2.1	31765	LBG-80
4	1.97	0.99	0.79	2.8	1.61	0.43	2.2	0.87	2.76	1.81	0.39	3.5	2.66	2	2.75	31766	LBG-100
5	3.15	1.46	1.18	3.54	2.36	0.55	2.76	1.02	4.17	2.76	0.46	5.04	3.78	2	8.28	31767	LBG-125

1) Dimensions are in inches, unless otherwise noted.

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.


Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories

Multi-position kit DPNA

Material:
 Flange: Aluminum
 Screws: Galvanised steel
 Free of copper, PTFE and silicone

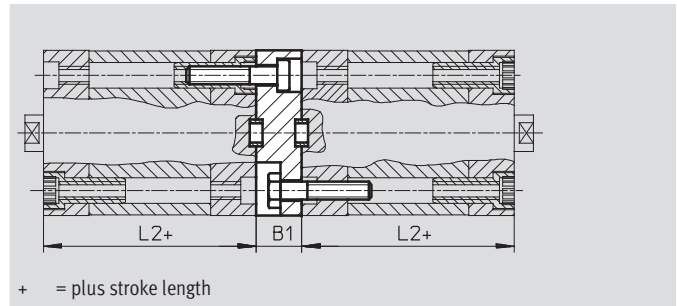

Dimensions and Ordering Data ¹⁾						
For \varnothing [in]	Max. overall stroke length [in]	L2	B1	CRC ²⁾	Part No.	Type
1/2	23.6	1.38	0.51	2	537263	DPNA-12
5/8	23.6			2	537264	DPNA-16
3/4	23.6			2	537265	DPNA-20
1	23.6			2	537266	DPNA-25
1 1/4	31.5	1.73	0.59	2	537267	DPNA-32
1 5/8	31.5			2	537268	DPNA-40
2	31.5	1.77		2	537269	DPNA-50
2 1/2	31.5	1.93		2	537270	DPNA-63
3	39.4	2.13	0.67	2	537271	DPNA-80
4	39.4	2.64	0.77	2	537272	DPNA-100


Note

The maximum overall stroke length may not be exceeded when combining cylinders and multi-position kits.

- Dimensions are in inches, unless otherwise noted.
- Corrosion resistance class 2 to Festo standard 940 070
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Clevis foot LBN

Material:
 Galvanised steel
 Free of copper, PTFE and silicone

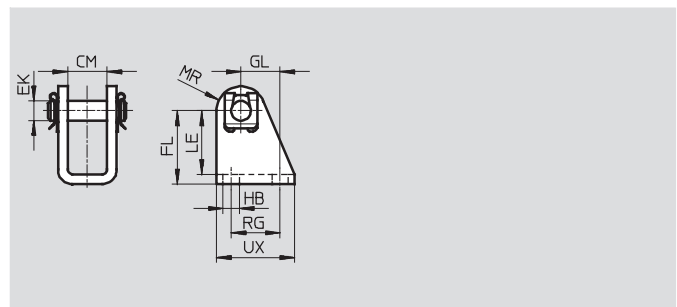

Dimensions and Ordering Data ¹⁾													
For \varnothing [in]	CM	EK \varnothing	FL	GL	HB \varnothing	LE	MR	RG	UX	CRC ¹⁾	Weight [lb]	Part No.	Type
1/2, 5/8	0.48	0.24	1.06 +0.01/-0.01	0.51	0.22	0.94	0.28	0.59	0.98	2	0.08	6058	LBN-12/16
3/4, 1	0.63	0.31	1.18 +0.02/-0.01	0.63	0.26	1.02	0.39	0.79	1.26	2	0.16	6059	LBN-20/25

- Dimensions are in inches, unless otherwise noted.
- Corrosion resistance class 2 to Festo standard 940 070
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.


Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories

Clevis foot CRLBN, stainless steel

Material:
High-alloy steel
Free of copper, PTFE and silicone

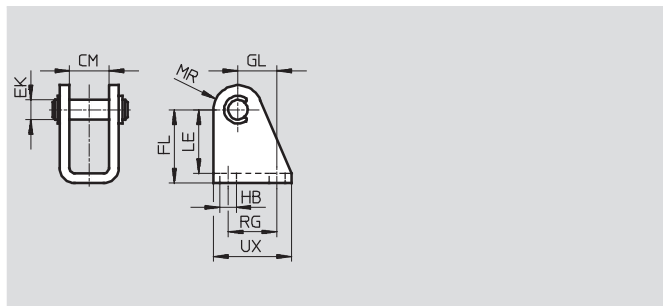


Dimensions and Ordering Data ¹⁾													
For Ø	CM	EK Ø	FL	GL	HB Ø	LE	MR	RG	UX	CRC ¹⁾	Weight [lb]	Part No.	Type
[in]													
1/2, 5/8	0.48	0.24	1.06 +0.01/-0.01	0.51	0.22	0.94	0.28	0.59	0.98	4	0.11	161862	CRLBN-12/16
3/4, 1	0.63	0.31	1.18 +0.02/-0.01	0.63	0.26	1.02	0.39	0.79	1.26	4	0.12	161863	CRLBN-20/25

- 1) Dimensions are in inches, unless otherwise noted.
CRC4: Corrosion resistance class to Festo standard 940070
Components with very heavy corrosion exposure. Components in contact with aggressive media, e.g. in food or chemical industries. These applications must, if necessary, be verified by special tests with the media concerned.

Swivel flange SNCB/SNCB-...-R3

Material:
SNCB: Die-cast aluminum
SNCB-...-R3: Die-cast aluminum with
protective coating, high corrosion
protection
Free of copper, PTFE and silicone

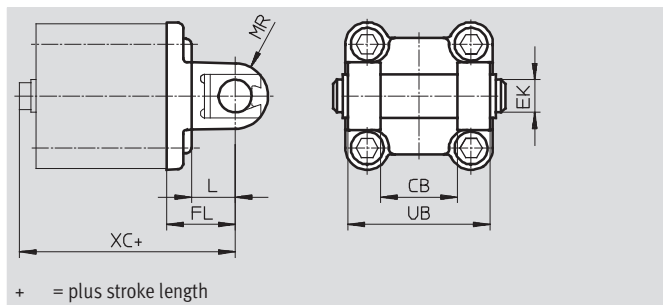

Dimensions and Ordering Data ¹⁾																
For Ø	CB	EK Ø	FL ±0.01	L	MR	UB h14	XC	Basic version				R3 – High corrosion protection				
								CRC ²⁾	Weight [lb]	Part No.	Type	CRC ²⁾	Weight [lb]	Part No.	Type	
[in]	H14	e8														
1 1/4	1.02	0.39	0.87	0.51	0.33	1.77	2.83	2	0.2	174390	SNCB-32	3	0.2	176944	SNCB-32-R3	
1 5/8	1.1	0.47	0.98	0.63	0.47	2.05	2.99	2	0.3	174391	SNCB-40	3	0.3	176945	SNCB-40-R3	
2	1.26	0.47	1.06	0.63	0.47	2.36	3.15	2	0.45	174392	SNCB-50	3	0.45	176946	SNCB-50-R3	
2 1/2	1.57	0.63	1.26	0.83	0.63	2.76	3.5	2	0.73	174393	SNCB-63	3	0.73	176947	SNCB-63-R3	
3	1.97	0.63	1.42	0.87	0.63	3.54	3.9	2	1.22	174394	SNCB-80	3	1.22	176948	SNCB-80-R3	
4	2.36	0.79	1.61	1.06	0.79	4.33	4.61	2	1.85	174395	SNCB-100	3	1.85	176949	SNCB-100-R3	
5	2.76	0.98	1.97	1.18	0.98	5.12	5.59	2	3.57	174396	SNCB-125	3	3.57	176950	SNCB-125-R3	

- 1) Dimensions are in inches, unless otherwise noted.
2) Corrosion resistance class 2 to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
CRC3: Corrosion resistance class to Festo standard 940 070
Components with heavy corrosion exposure. Externally visible components in direct contact with normal industrial atmosphere or media such as solvents and cleaning agents, where the surface requirement is predominantly functional.

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories


Trunnion flange ZNCF/CRZNG

Material:

ZNCF: Special steel casting

CRZNG: Electrolytically polished special steel casting

Free of copper, PTFE and silicone

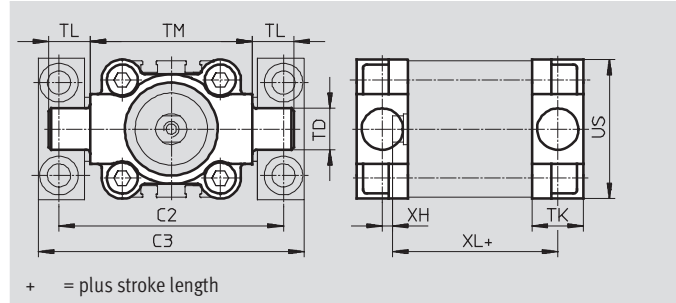

Dimensions and Ordering Data¹⁾

For Ø [in]	C2	C3	TD Ø e9	TK	TL	TM	US	XH	XL	Basic version				R3 – High corrosion protection			
										CRC ¹⁾	Weight [lb]	Part No.	Type	CRC ¹⁾	Weight [lb]	Part No.	Type
1¼	2.8	3.39	0.47	0.63	0.47	1.97	1.77	0.08	2.05	2	0.26	174411	ZNCF-32	4	0.3	161852	CRZNG-32
1⅝	3.43	4.13	0.63	0.79	0.63	2.48	2.13	0.16	2.17	2	0.48	174412	ZNCF-40	4	0.52	161853	CRZNG-40
2	.39	4.61	0.63	0.94	0.63	2.95	2.52	0.16	2.24	2	0.78	174413	ZNCF-50	4	0.86	161854	CRZNG-50
2½	4.57	5.35	0.79	0.94	0.79	3.54	2.95	0.16	2.4	2	1.2	174414	ZNCF-63	4	1.28	161855	CRZNG-63
3	5.35	6.14	0.79	1.1	0.79	4.33	3.66	0.2	3.19	2	2.3	174415	ZNCF-80	4	2.6	161856	CRZNG-80
4	6.46	7.44	0.98	1.5	0.98	5.2	4.33	0.39	3.39	2	4.06	174416	ZNCF-100	4	4.8	161857	CRZNG-100
5	7.56	8.54	0.98	3.39	0.98	6.3	5.13	0.55	4.17	2	6.98	174417	ZNCF-125	4	7.2	185362	CRZNG-125

1) Dimensions are in inches, unless otherwise noted.

2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

CRC4: Corrosion resistance class to Festo standard 940070

Components with very heavy corrosion exposure. Components in contact with aggressive media, e.g. in food or chemical industries. These applications must, if necessary, be verified by special tests with the media concerned.


Trunnion support LNZG

Material:

Trunnion support: Anodised aluminum

Plain bearing: Plastic

Free of copper, PTFE and silicone

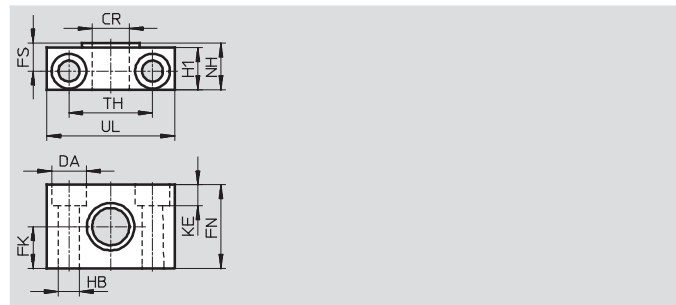

Dimensions and Ordering Data¹⁾

For Ø [in]	CR Ø	DA Ø	FK Ø ±0.01	FN	FS	H1	HB Ø H13	KE	NH	TH ±0.01	UL	CRC ²⁾	Weight [lb]	Part No.	Type
1¼	0.47	0.43	0.59	1.18	0.41	0.59	0.26	0.27	0.71	1.26	1.81	2	0.25	32959	LNZG-32
1⅝, 2	0.63	0.59	0.71	1.42	0.47	0.71	0.35	0.35	0.83	1.42	2.17	2	0.8	32960	LNZG-40/50
2½, 3	0.79	0.71	0.79	1.57	0.51	0.79	0.43	0.43	0.91	1.65	2.56	2	0.96	32961	LNZG-63/80
4, 5	0.98	0.79	0.98	1.97	0.63	0.96	0.55	0.51	1.12	1.97	2.95	2	1.92	32962	LNZG-100/125

1) Dimensions are in inches, unless otherwise noted.







2) Corrosion resistance class 2 to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287





Accessories


Ordering Data – Piston Rod Attachments				Technical data → <a href="http://www.festo.com/catalog/<type> or <order code>">www.festo.com/catalog/<type> or <order code>			
Designation	For Ø [in]	Part No.	Type	Designation	For Ø [in]	Part No.	Type
Rod eye SGS				Rod clevis SGA used in combination with rod eye SGS			
	1/2, 5/8	532694	SGS-10-32		SGS-10-32,	–	
	3/4, 1	532695	SGS-5/16-24		SGS-5/16-24		
	1 1/4, 1 5/8	532696	SGS-3/8-24		SGS-3/8-24	32954	SGA-M10x1,25
	2, 2 1/2	532697	SGS-1/2-20		SGS-1/2-20	10767	SGA-M12x1,25
	3, 4	532698	SGS-5/8-18		SGS-5/8-18	10768	SGA-M16x1,25
5	532699	SGS-3/4-16	SGS-3/4-16	10769	SGA-M20x1,25		
Rod clevis SG				Self-aligning rod coupler FK			
	1/2, 5/8	546552	SG-UNF10-32-B		1/2, 5/8	532703	FK-10-32
	3/4, 1	546574	SG-UNF5/16"-24-B		3/4, 1	532704	FK-5/16-24
	1 1/4, 1 5/8	546540	SG-UNF3/8"-24-B		1 1/4, 1 5/8	532705	FK-3/8-24
	2, 2 1/2	546545	SG-UNF1/2"-20-B		2, 2 1/2	532706	FK-1/2-20
	3, 4	546575	SG-UNF5/8"-18-B		3, 4	532707	FK-5/8-18
5	546576	SG-UNF3/4"-16-B	5	532708	FK-3/4-16		
Right-angle clevis foot LQG used in combination with rod eye SGS				Coupling piece KSZ			
	1 1/4, 1 5/8	31768	LQG-32		1/2, 5/8	–	
	2, 2 1/2	31769	LQG-40		3/4, 1	–	
	3, 4	31770	LQG-50		1 1/4, 1 5/8	36129	KSZ-3/8-24-UNF
		31771	LQG-63		2, 2 1/2	36130	KSZ-1/2-20-UNF
	5	31772	LQG-80		3, 4	36131	KSZ-5/8-18-UNF
31773		LQG-100	5	36132	KSZ-3/4-16-UNF		

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories

Ordering Data – One-way Flow Control Valves				Technical data → <a href="http://www.festo.com/catalog/<type> or <order code>">www.festo.com/catalog/<type> or <order code>				
Connection	Material		Part No.	Type				
	For Ø [in]	For tubing O.D. [in]						
For exhaust air								
	1/2, 5/8, 3/4, 1	5/32	Metal design	165008	GRLA-10-32-UNF-QS-5/32-U			
		1/4		192753	GRLA-10-32-UNF-QS-1/4-U			
	1 1/4, 1 5/8, 2, 2 1/2, 3, 4	5/32		165009	GRLA-1/8-NPT-QS-5/32-U			
		3/16		190941	GRLA-1/8-NPT-QS-3/16-U			
		1/4		165010	GRLA-1/8-NPT-QS-1/4-U			
		5/16		165013	GRLA-1/8-NPT-QS-5/16-U			
		3/16		190944	GRLA-1/4-NPT-QS-3/16-U			
	5	1/4		165011	GRLA-1/4-NPT-QS-1/4-U			
		5/16		165014	GRLA-1/4-NPT-QS-5/16-U			
		3/8		190947	GRLA-1/4-NPT-QS-3/8-U			
		For supply air						
				1/2, 5/8, 3/4, 1	3/16	Metal design	151577	GRLZ-10-UNF-3/16-B
1/4	151578		GRLZ-10-UNF-1/4-B					
1 1/4, 1 5/8, 2, 2 1/2, 3, 4	1/4		151562	GRLZ-1/8-NPT-1/4-B				
	3/8		151563	GRLZ-1/8-NPT-3/8-B				
	–		151198	GRLZ-1/4-RS-B				
5	–		–	–				

Ordering Data – Push-in Fittings QB, NPT Thread					Technical Data → www.festo.com/catalog/QB		
For tubing O.D. [in]	10/32 UNF		1/8NPT		1/4NPT		
	Part No.	Type	Part No.	Type	Part No.	Type	
With external hex							
	1/8	533266	QB-10-32-UNF-1/8-U	533270	QB-1/8-1/8-U	–	
	5/32	533267	QB-10-32-UNF-5/32-U	533271	QB-1/8-5/32-U	–	
	3/16	533268	QB-10-32-UNF-3/16-U	533272	QB-1/8-3/16-U	533275	QB-1/4-3/16-U
	1/4	533269	QB-10-32-UNF-1/4-U	533273	QB-1/8-1/4-U	533276	QB-1/4-1/4-U
	5/16	–	–	533274	QB-1/8-5/16-U	533277	QB-1/4-5/16-U
	3/8	–	–	–	–	533278	QB-1/4-3/8-U

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories

Ordering data – Proximity sensors for T-slot, magneto-resistive					Technical data → Internet: smt	
Type of mounting	Switch output	Electrical connection	Cable length [m]	Part No.	Type	
N/O contact						
	Insertable in the slot from above, flush with cylinder profile, short design	PNP	Cable, 3-wire	2.5	574335	SMT-8M-A-PS-24V-E-2,5-OE
			Plug M8x1, 3-pin	0.3	574334	SMT-8M-A-PS-24V-E-0,3-M8D
			Plug M12x1, 3-pin	0.3	574337	SMT-8M-A-PS-24V-E-0,3-M12
	NPN	Cable, 3-wire	2.5	574338	SMT-8M-A-NS-24V-E-2,5-OE	
		Plug M8x1, 3-pin	0.3	574339	SMT-8M-A-NS-24V-E-0,3-M8D	
N/C contact						
	Insertable in the slot from above, flush with cylinder profile, short design	PNP	Cable, 3-wire	7.5	574340	SMT-8M-A-PO-24V-E-7,5-OE

Ordering Data – Proximity Sensors for T-slot, Magnetic Reed					Technical data → www.festo.com/catalog/sm		
Type of mounting	Switch output	Electrical connection	Cable length [ft]	Part No.	Type		
N/O contact							
	Insertable in the slot from above, flush with cylinder profile	Contacting	Cable, 3-wire	8.2	543862	SME-8M-DS-24V-K-2,5-OE	
				16.4	543863	SME-8M-DS-24V-K-5,0-OE	
			Cable, 3-wire	8.2	543872	SME-8M-ZS-24V-K-2,5-OE	
			Plug M8x1, 3-pin	1.0	543861	SME-8M-DS-24V-K-0,3-M8D	
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	8.2	150855	SME-8-K-LED-24	
			Plug M8x1, 3-pin	1.0	150857	SME-8-S-LED-24	
N/C contact							
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	24.6	160251	SME-8-O-K-LED-24	

Ordering Data – Rectangular Proximity Sensors, Pneumatic			Technical data → www.festo.com/catalog/sm	
Pneumatic connection	Part No.	Type		
3/2-way valve, normally closed				
	Female thread M5	178563	SMPO-8E	



Ordering Data – Mounting Kit for Proximity Sensor SMPO-8E		Technical data → www.festo.com/catalog/smb	
Assembly	Part No.	Type	
	Clamped in T-slot	178230	SMB-8E

Ordering Data – Slot Cover for T-slot			
Assembly	Length	Part No.	Type
	Insertable from above	2x 0.5 m	151680 ABP-5-S

Compact Cylinders ADN/AEN/ADNGF – Inch Series, Based on ISO 21287



Accessories

Ordering Data – Connecting Cables				Technical data → www.festo.com/catalog/nebu	
	Electrical connection, left	Electrical connection, right	Cable length [ft]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	8.2	541333	NEBU-M8G3-K-2.5-LE3
			16.4	541334	NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-wire	8.2	541363	NEBU-M12G5-K-2.5-LE3
			16.4	541364	NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	8.2	541338	NEBU-M8W3-K-2.5-LE3
			16.4	541341	NEBU-M8W3-K-5-LE3
	Angled socket, M12x1, 5-pin	Cable, open end, 3-wire	8.2	541367	NEBU-M12W5-K-2.5-LE3
			16.4	541370	NEBU-M12W5-K-5-LE3

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,
Call: 1.800.99.FESTO (1.800.993.3786)
Fax: 1.800.96.FESTO (1.800.963.3786)
Email: customer.service@us.festo.com

For technical support,
Call: 1.866.GO.FESTO (1.866.463.3786)
Fax: 1.800.96.FESTO (1.800.963.3786)
Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)
Fax: 1.877.FX.FESTO (1.877.393.3786)
Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788
Phone: 1.631.435.0800; Fax: 1.631.435.8026;
Email: info@festo-usa.com www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4
Phone: 1.905.624.9000; Fax: 1.905.624.9001;
Email: festo.canada@ca.festo.com www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquihuac,
54020 Tlalnepantla, Edo. de México
Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;
Email: festo.mexico@mx.festo.com www.festo.com/mx