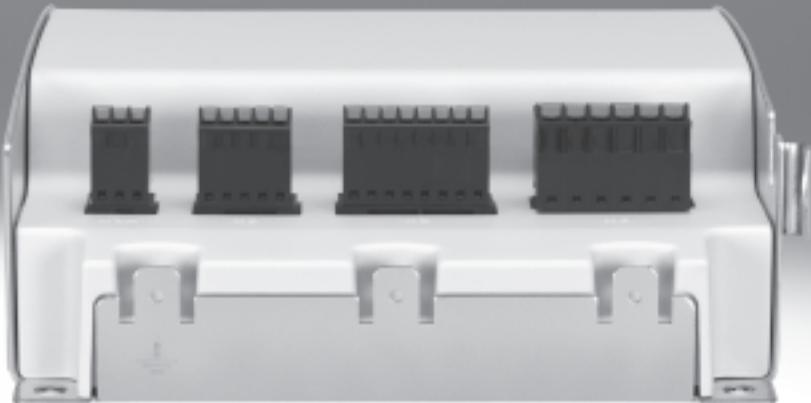


Motor controllers CMMO-ST



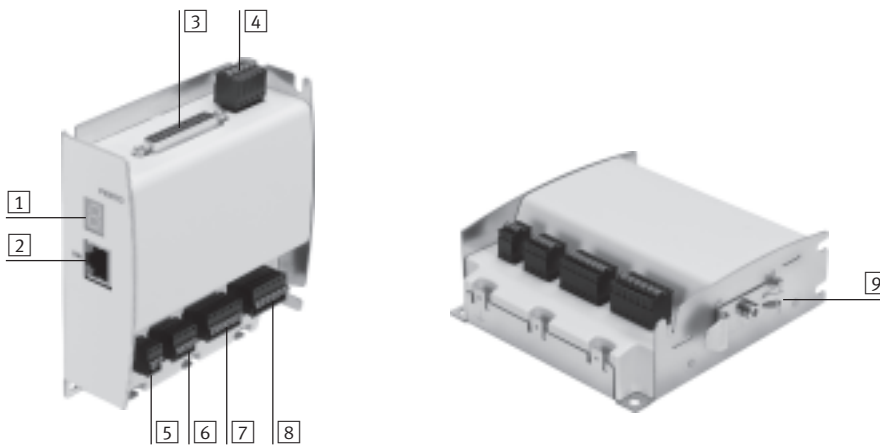
Motor controllers CMMO-ST

Key features

At a glance

- The motor controller CMMO-ST serves as a closed-loop and open-loop position controller
 - Separate load and logic supply
 - Supports the "Safe Torque Off" (STO) safety function
 - Easy actuation via:
 - I/O interface
 - Monitoring of freely definable position zones
 - Backup file enables seamless device replacement
 - H-rail mounting possible
 - Encoder option (closed loop), in other words no step losses, following errors are corrected
- Parameterisation possible via:
- FCT (Festo Configuration Tool) configuration package
 - Ethernet interface with integrated web server

Description of the interfaces



- 1 7-segment display
- 2 Ethernet interface (RJ45)
- 3 I/O interface
- 4 Power supply
- 5 Reference switch
- 6 STO safety function
- 7 Encoder
- 8 Motor
- 9 Mounting bracket to fit onto an H-rail

For actuating

Electric cylinder EPCO

Stepper motor EMMS-ST



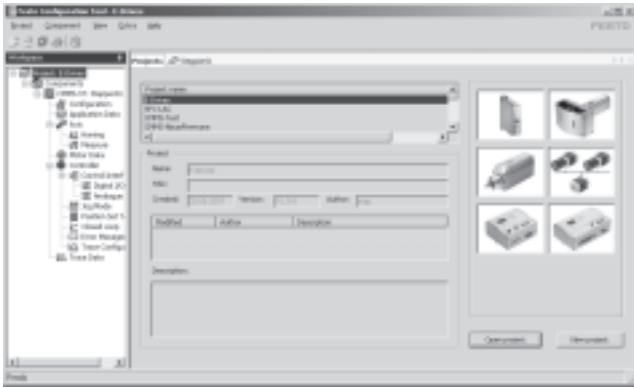
Motor controllers CMMO-ST

Key features




FCT software – Festo Configuration Tool

Software platform for electric drives from Festo



- All drives in a system can be managed and saved in a common project
- Project and data management for all supported device types
- Simple to use thanks to graphically-supported parameter entry
- Universal mode of operation for all drives
- Work offline at your desk or online at the machine

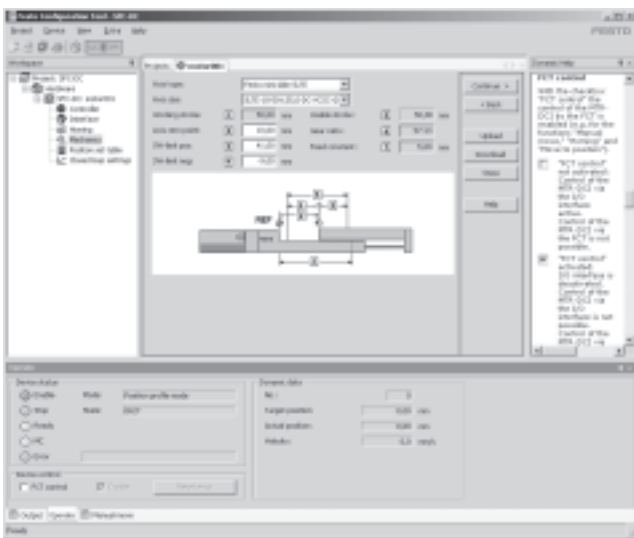Mechanical reference positions and limit positions



- Reference positions can be either edited or taught in
- Flexible adaptation to installation conditions
- Settings are displayed clearly

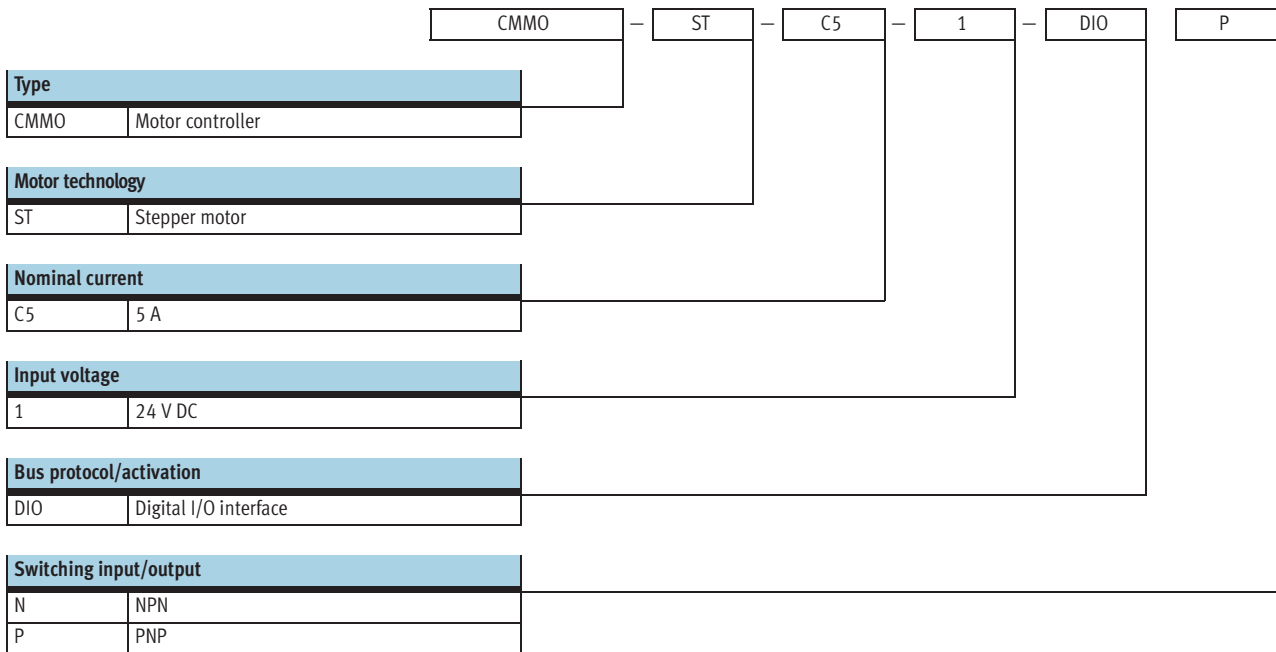
Positioning record table



- 31 positioning records ensure flexibility in positioning
- Absolute or relative positioning values can be used
- The following parameters can be set flexibly for each application:
 - Position
 - Speed
 - Acceleration
 - Braking ramps
- Force control
- Complete function test

Motor controllers CMMO-ST


Type codes



Motor controllers CMMO-ST

Technical data

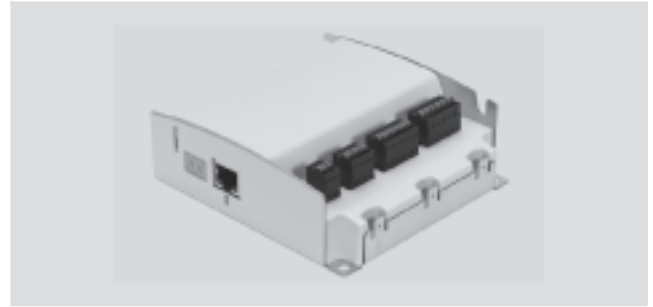FESTO



General technical data		
Mode	Cascade controller with	
	PI speed controller	
	PI current controller	
	P position controller	
	PWM MOSFET power end stage	
Operating mode		
Open-loop operation	Micro step, 12,800 steps/rev	
Closed-loop operation	Sinusoidal current control, within the cascade controller	
Rotary position encoder	Encoder	
Display	7-segment display	
Parameterisation interface	Ethernet	
Ethernet, supported protocols	TCP/IP	
Encoder interface input	RS422	
Process coupling	I/O coupling for 32 positioning records	
Number of digital logic inputs	11	
Number of digital logic outputs	11	
Characteristics of digital logic outputs	Freely configurable in some cases	
Adjustable current reduction	Via software	
Nominal current setting	Via software	
Braking resistor	[Ω]	15
Pulse power of braking resistor	[kVA]	0.1
Mains filter	Integrated	
Type of mounting	Screwed onto connecting plate, lying down or upright	
	Via H-rail	
Product weight	[g]	290

Electrical data		
General		
Max. intermediate circuit voltage	[V DC]	28
Nominal output current	[A]	5.7
Load supply		
Nominal voltage	[V DC]	24 ±15%
Nominal current	[A]	6
Peak current	[A]	8
Logic supply		
Nominal voltage	[V DC]	24 ±15%
Nominal current	[A]	0.3
Operating range of logic input	[V]	24
Max. current per output (digital logic outputs)	[mA]	100
Switching logic, input/output		
CMMO-ST-...-DIOP	PNP	
CMMO-ST-...-DION	NPN	

Motor controllers CMMO-ST

Technical data

Safety characteristics	
Conforms to	EN ISO 13849-1
Safety function	Safe Torque Off (STO)
Performance level (PL)	STO / Cat. 3, PLe
Safety integrity level (SIL)	STO / SIL 3
CE marking (see declaration of conformity)	To EU EMC Directive ¹⁾
	To EU Machinery Directive
Shock resistance	As per EN 60068-2-29
Vibration resistance	As per EN 60068-2-6

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.


Operating and environmental conditions	
Characteristics of digital logic outputs	Not galvanically isolated
Characteristics of logic inputs	Galvanically connected to logic potential
Logic input specification	Based on IEC 61131-2
Protection class	IP40
Protective function	I ² t monitoring
	Following error monitoring
	Software end-position detection
	Voltage failure detection
	Current monitoring
	Temperature monitoring
Ambient temperature [°C]	0 ... +50
UL ambient temperature [°C]	0 ... +40
Storage temperature [°C]	-25 ... +75
Relative air humidity [%]	0 ... 90 (non-condensing)
Certification	cULus listed (OL)
	C-Tick
Note on materials	Contains PWIS (paint-wetting impairment substances)
	RoHS-compliant

Motor controllers CMMO-ST

Technical data

FESTO

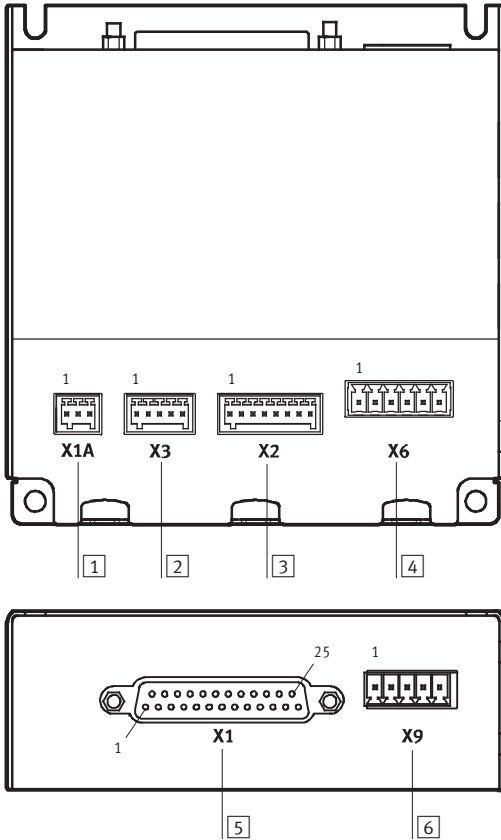Pin allocation



1 Reference switch

Pin	Function
1	+24 V (logic output)
2	Signal
3	0 V

2 STO safety function

Pin	Function
1	+24 V (logic output)
2	STO 1
3	STO 2
4	Diagnostics 1
5	Diagnostics 2

3 Encoder

Pin	Function
1	A
2	A/
3	B
4	B/
5	N
6	N/
7	+5 V (output)
8	0 V

4 Motor

Pin	Function
1	String A
2	String A/
3	String B
4	String B/
5	Brake +24 V (switched output)
6	Brake 0 V

5 I/O interface, 25-pin Sub-D plug

Pin	Function
1	Input 1
2	Input 2
3	Input 3
4	Input 4
5	Input 5
6	Input 6
7	Input 7
8	Input 8
9	Input 9
10	Input 10
11	Input 11
12	Output 1
13	Output 2
14	Output 3
15	Output 4
16	Output 5
17	Output 6
18	Output 7
19	Output 8
20	Output 9
21	Output 10
22	Output 11
23	n.c.
24	+24 V (logic output)
25	0 V


6 Power supply

Pin	Function
1	n.c.
2	n.c.
3	+24 V (logic)
4	0 V
5	+24 V (load)

Motor controllers CMMO-ST

Technical data

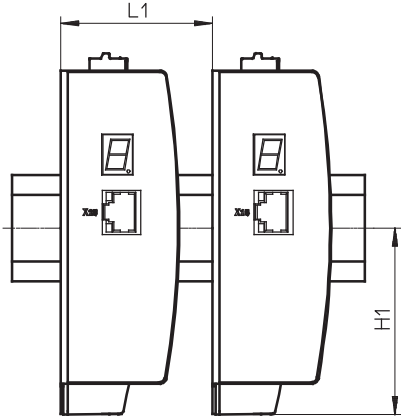
Minimum distance between two motor controllers



Type	L1	H1
CMMO-ST-...	41	61.35


Dimensions

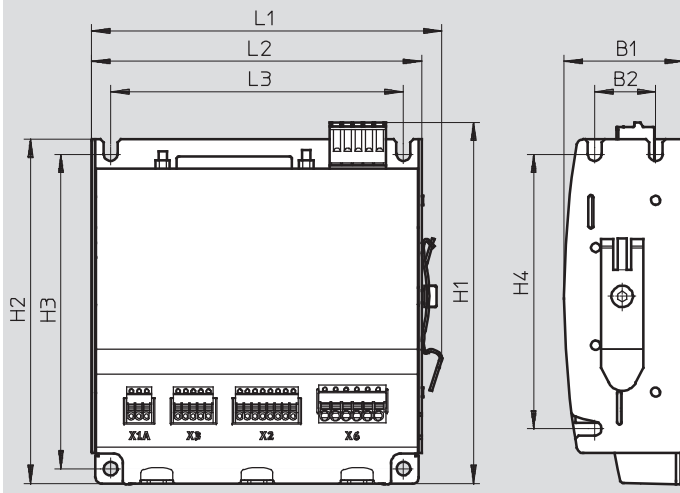Download CAD Data → www.festo.com/us/cad



Type	B1	B2	H1	H2	H3	H4	L1	L2	L3
CMMO-ST-...	39	20	118.7	113.1	103.1	90	115	108.8	96

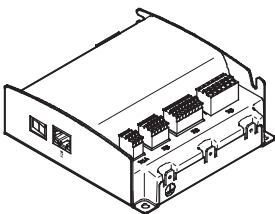
Ordering data

Motor controller	Brief description	Part No.	Type
	With I/O interface		
	Switching input/output PNP	1512316	CMMO-ST-C5-1-DIOP
	Switching input/output NPN	1512317	CMMO-ST-C5-1-DION

Motor controllers CMMO-ST





Accessories

FESTO

Ordering data		Description	Part No.	Type
Plug				
	Plug assortment for motor cable, encoder cable, power supply, reference switch, STO safety function		576005	NEKM-C-10²⁾






1) Comprising plug for power supply and plug for motor connection. The plug assortment is included in the scope of delivery of the motor controller.

2) Plugs are included in the scope of delivery of the motor controller.

Ordering data – Connection options from I/O interface to controller				
	Description	Cable length [m]	Part No.	Type
Connection block				
	Ensures simple and clear wiring. The connection to the motor controller is established via the connecting cable NEBC-S1G25-K-...	–	8001371	NEBC-S1G25-C2W25-S7
Connecting cable				
	Connects the motor controller to the connection block	1.0	8001374	NEBC-S1G25-K-1.0-N-S1G25
		2.0	8001375	NEBC-S1G25-K-2.0-N-S1G25
		5.0	8001376	NEBC-S1G25-K-5.0-N-S1G25
Control cable				
	Is connected to the motor controller. The other end comprises individual flying leads	3.2	8001373	NEBC-S1G25-K-3.2-N-LE25
Plug				
	25-pin sub-D plug. Each wire can be individually assembled using screw terminals	–	8001372	NEBC-S1G25-C2W25-S6

Motor controllers CMMO-ST

Accessories

Ordering data – Cables ¹⁾					
	For type	Description	Cable length [m]	Part No.	Type
Motor cable					
	EPCO-16 EMMS-ST-28	Straight plug – Min. bending radius: 62 mm – Suitable for use with energy chains – Ambient temp.: –40 ... +80 °C	1.5	1449600	NEBM-M12G8-E-1.5-Q5-LE6
			2.5	1449601	NEBM-M12G8-E-2.5-Q5-LE6
			5	1449602	NEBM-M12G8-E-5-Q5-LE6
			7	1449603	NEBM-M12G8-E-7-Q5-LE6
			10	1449604	NEBM-M12G8-E-10-Q5-LE6
	EPCO-25/-40 EMMS-ST-42/-57	Angled plug – Min. bending radius: 62 mm – Suitable for use with energy chains – Ambient temp.: –40 ... +80 °C	1.5	1450736	NEBM-S1W9-E-1.5-Q5-LE6
			2.5	1450737	NEBM-S1W9-E-2.5-Q5-LE6
			5	1450738	NEBM-S1W9-E-5-Q5-LE6
			7	1450739	NEBM-S1W9-E-7-Q5-LE6
			10	1450740	NEBM-S1W9-E-10-Q5-LE6
	EMMS-ST-87	Angled plug – Min. bending radius: 80 mm – Suitable for use with energy chains – Ambient temp.: –40 ... +80 °C	1.5	1450943	NEBM-S1W15-E-1.5-Q7-LE6
			2.5	1450944	NEBM-S1W15-E-2.5-Q7-LE6
			5	1450945	NEBM-S1W15-E-5-Q7-LE6
			7	1450946	NEBM-S1W15-E-7-Q7-LE6
			10	1450947	NEBM-S1W15-E-10-Q7-LE6
Encoder cable					
	EPCO-16/-25/-40 EMMS-ST-28/-42/ -57/-87	Straight plug – Min. bending radius: 68 mm – Suitable for use with energy chains – Ambient temp.: –40 ... +80 °C	1.5	1451586	NEBM-M12G8-E-1.5-LE8
			2.5	1451587	NEBM-M12G8-E-2.5-LE8
			5	1451588	NEBM-M12G8-E-5-LE8
			7	1451589	NEBM-M12G8-E-7-LE8
			10	1451590	NEBM-M12G8-E-10-LE8
	EPCO-25/-40 EMMS-ST-42/-57/-87	Angled plug – Min. bending radius: 68 mm – Suitable for use with energy chains – Ambient temp.: –40 ... +80 °C	1.5	1451674	NEBM-M12W8-E-1.5-LE8
			2.5	1451675	NEBM-M12W8-E-2.5-LE8
			5	1451676	NEBM-M12W8-E-5-LE8
			7	1451677	NEBM-M12W8-E-7-LE8
			10	1451678	NEBM-M12W8-E-10-LE8

1) Other cable lengths on request.

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com