

Passive guide axes FDG-ZR-RF, without drive

FESTO



Passive guide axes FDG-ZR-RF, without drive


Key features

FESTO

At a glance

- Driveless linear guide unit with guide and freely movable slide
- The passive guide axis is designed to increase force and torque capacities in multi-axis applications
- Higher torsional resistance
- Reduced vibrations with dynamic loads
- Drive axis and passive guide axis can be arranged adjacent to or above one another

System product for handling and assembly technology

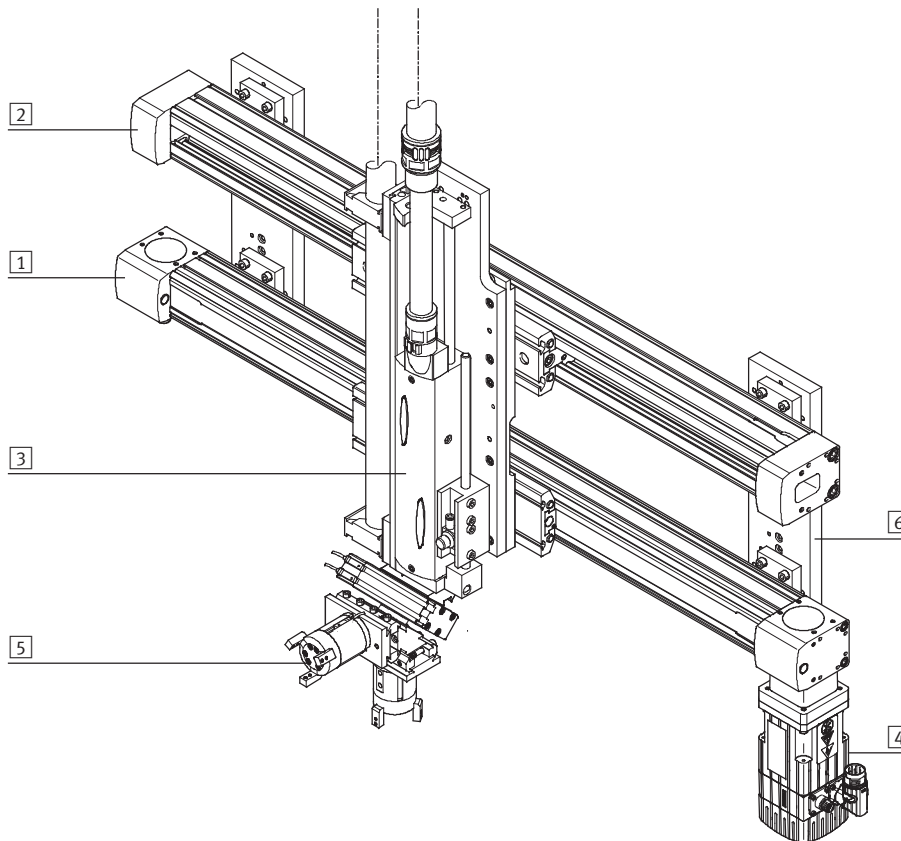

System components and accessories

	Brief description	→ Page/Internet
1 Axes	Wide range of combinations possible within handling and assembly technology	axis
2 Passive guide axes	For increasing force and torque capacity in multi-axis applications	guide axis
3 Drives	Wide range of combinations possible within handling and assembly technology	drive
4 Motors	Servo and stepper motors, with or without gearing	motor
5 Grippers	Wide range of variations possible within handling and assembly technology	gripper
6 Adapters	For drive/drive and drive/gripper combinations	adapter kit

Passive guide axes FDG-ZR-RF, without drive

Key features

FESTO

Guide axes and the corresponding drives

Passive guide axis DGC-FA



- Can be combined with:
 - Linear drive DGC-KF
- For size 8 ... 63
- Load capacity to max. 6,890 N or 380 Nm

Passive guide axis EGC-FA



- Can be combined with:
 - Toothed belt axis EGC-TB
 - Spindle axis EGC-BS
- For size 70 ... 185
- Load capacity to max. 15,200 N or 1,820 Nm

Passive guide axis FDG-ZR-RF



- Can be combined with:
 - Toothed belt axis DGE-ZR-RF
- For size 25 ... 63
- Load capacity to max. 1,500 N or 600 Nm

Passive guide axis FDG-P/-ZR/-SP




- Can be combined with:
 - Linear drive DGPL
 - Toothed belt axis DGE-ZR-KF
 - Spindle axis DGE-SP-KF
- For size 18 ... 63
- Load capacity to max. 14,050 N or 1,820 Nm

Passive guide axes FDG-ZR-RF, without drive

Peripherals overview

FESTO

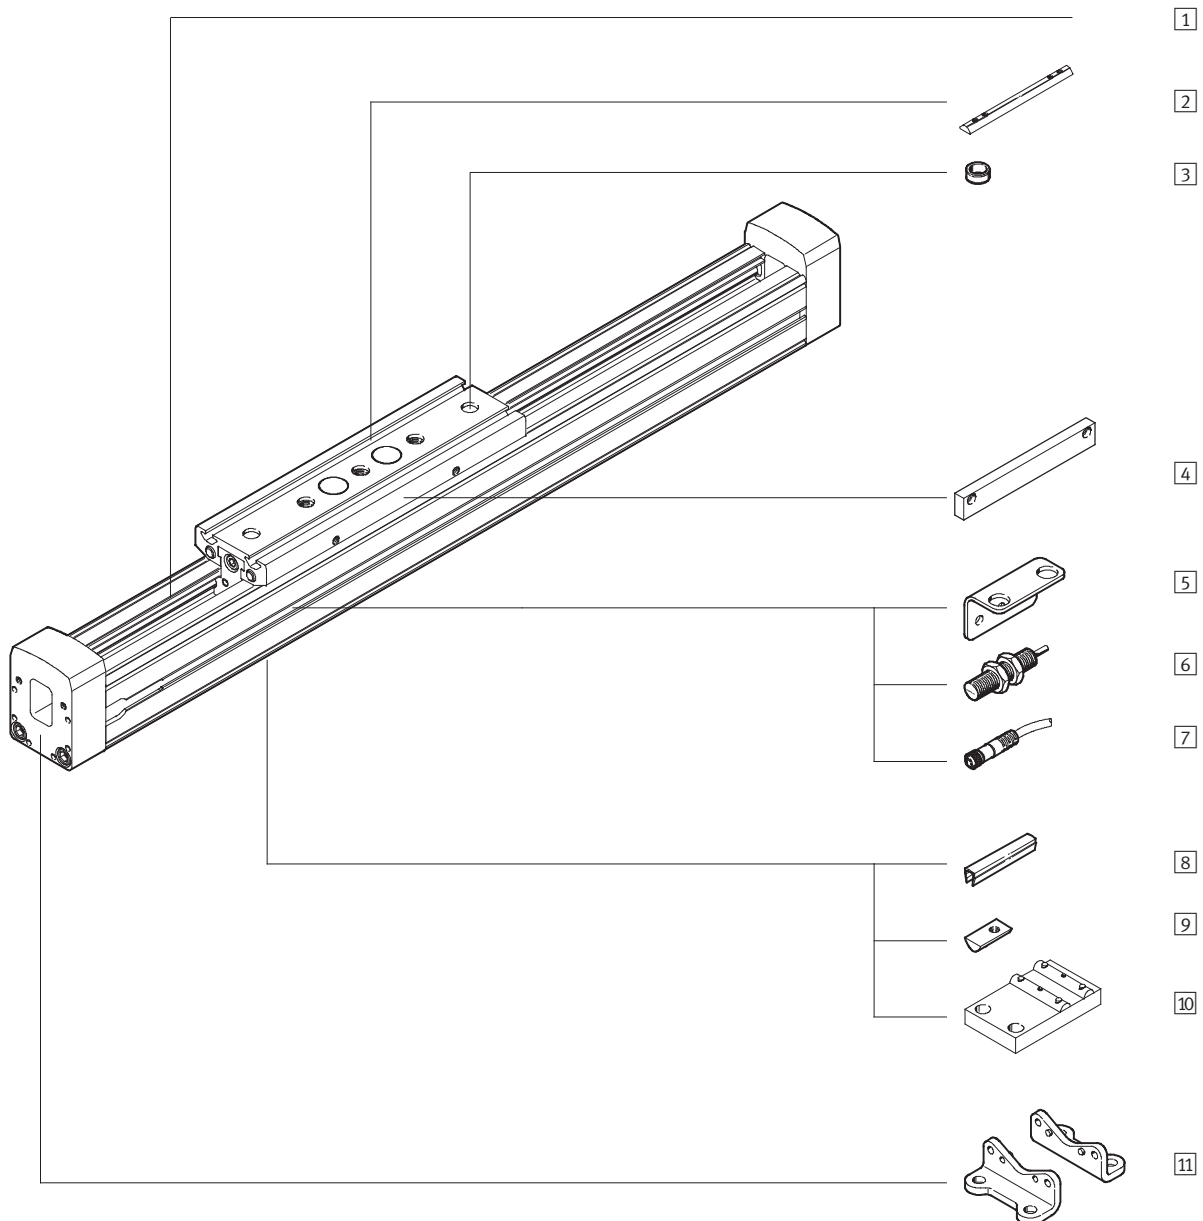

Passive guide axes FDG-ZR-RF, without drive

Peripherals overview

FESTO

Variants and accessories		
Type	Brief description	→ Page/Internet
1 Passive guide axis FDG-ZR-RF	Guide without drive	8
2 Slot nut for slide X	For mounting loads and attachments on the slide	17
3 Centring sleeve Z	For centring loads and attachments on the slide	17
4 Switching lug L	For sensing the slide position	18
5 Mounting bracket T	Adapter for mounting the sensors on the axis	18
6 Inductive proximity sensor O/P/W/R	For use as a proximity signal and safety monitor	19
7 Cable with socket V	For proximity sensors	19
8 Slot cover B	For protecting against ingress of dirt	17
9 Slot nut for profile slot Y	For mounting attachments	17
10 Central support M	For mounting the axis	16
11 Foot mounting F	For mounting the axis	16

Passive guide axes FDG-ZR-RF, without drive

FESTO

Type codes

		FDG	-	25	-	500	-	ZR	-	RF	-	GK
Type												
FDG	Guide unit without drive											
Size												
Stroke [mm]												
Guide axis												
ZR	For toothed belt axis DGE-ZR-RF											
Guide												
RF	Roller guide											
Slide												
GK	Standard slide											
GV	Extended slide											

Passive guide axes FDG-ZR-RF, without drive

FESTO

Type codes

➔	+ ZUB	-	-	-	-	F	Z		T	L	20
Accessories											
ZUB	Accessories supplied loose										
Slot cover											
...B	Mounting slot										
Slot nut											
...Y	For profile slot										
...X	For slide										
Central support											
...M	Central support										
Foot mounting											
...F	Foot mounting										
Centring sleeve											
...Z	For slide										
Cable with socket											
...V	2.5 m										
Mounting bracket											
...T	For inductive proximity sensors										
Switching lug											
L	Switching lug										
Inductive proximity sensor											
...O	NO contact, cable										
...P	NC contact, cable										
...W	NO contact, plug										
...R	NC contact, plug										

Passive guide axes FDG-ZR-RF, without drive

Technical data

FESTO

- \varnothing - Size
25 ... 63
- I - Stroke length
1 ... 5000 mm



General technical data				
Size		25	40	63
Design		Guide unit without drive		
Guide		Internal roller guide		
Assembly position		Any		
Max. working stroke ¹⁾	[mm]	1 ... 5000	1 ... 5000	1 ... 5000 ²⁾
Max. working load	[kg]	15	30	60
Thrust	[N]	5 ... 12	5 ... 35	5 ... 30
Max. speed	[m/s]	10		
Max. acceleration	[m/s ²]	50		
Ambient temperature	[°C]	0 ... +60		


1) Total stroke = working stroke + 2x stroke reserve

2) The max. working stroke for the variant with extended slide (GV) is 4,800 mm.

Weights [kg]						
Size	25		40		63	
Slide design	GK	GV	GK	GV	GK	GV
Basic weight with 0 mm stroke	2.0	2.5	6.1	7.6	20.4	25.4
Additional weight per 100 mm stroke	0.29		0.59		1.38	
Moving load	0.5	0.8	1.8	2.5	4.6	6.4

Materials

Sectional view

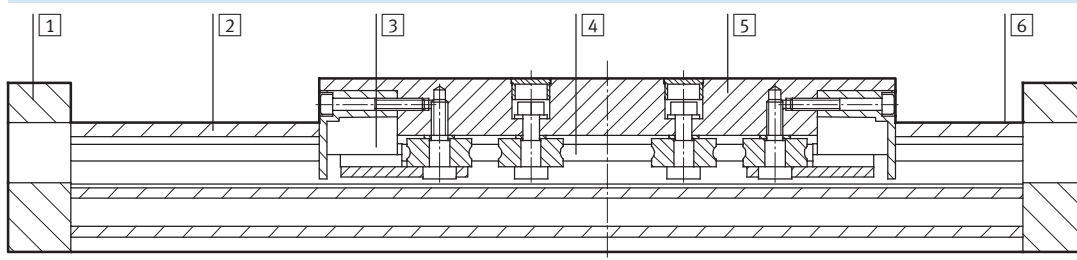

Axis	
1	End cap
2	Housing
3	Cover cap
4	Guide rail
5	Slide
6	Guide element
-	Note on materials
	Free of copper, PTFE and silicone

Passive guide axes FDG-ZR-RF, without drive

FESTO

Technical data

Stroke reserve

L9 The stroke reserve is a safety distance available on both sides of the axis in addition to the stroke.


The indicated values only apply in combination with the toothed belt axis DGE-ZR-RF.

L6 Slide length

L8 Stop element

L1+ Overall length of axis

1 Working stroke

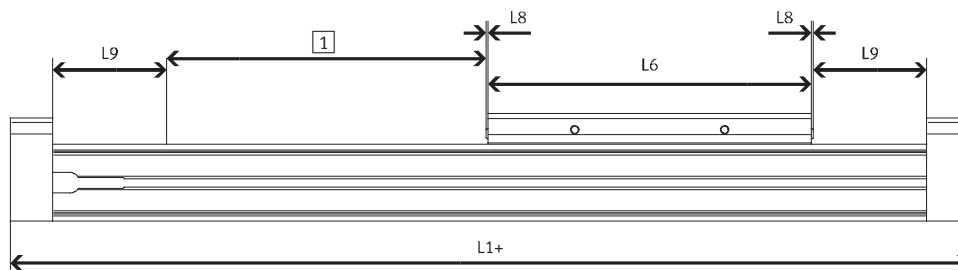

Example:

Type FDG-25-500-ZR-RF

Working stroke = 500 mm

Stroke reserve = (2x 86 mm)

= 172 mm

Total stroke = 500 mm + 172 mm

= 672 mm

Size	25	40	63
L9 per end position [mm]	86	136	244



Passive guide axes FDG-ZR-RF, without drive

Technical data

FESTO

Characteristic load values

The indicated forces and torques refer to the centre of the guide. They must not be exceeded in the dynamic range. Special attention must be paid to the cushioning phase.

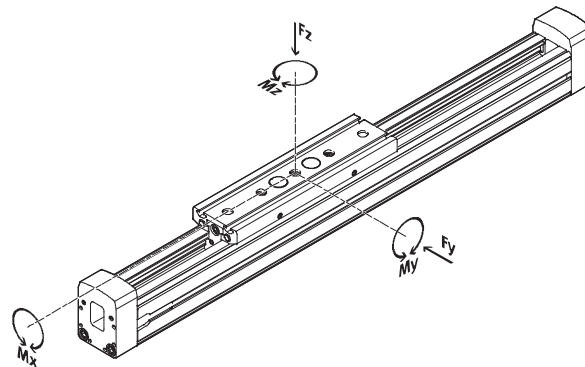

Size	a in [mm]
25	30
40	37
63	44.6



If the drive is subjected to more than two of the indicated forces and torques simultaneously, the following equations must be satisfied in addition to the indicated maximum loads:

$$\frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} + \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} \leq 1$$

Permissible forces and torques

Size	25		40		63	
	GK	GV	GK	GV	GK	GV
F _y _{max.} [N]	150		300		600	
F _z _{max.} [N]	150		300		600	
M _x _{max.} [Nm]	7		18		65	
M _y _{max.} [Nm]	15	30	60	120	170	340
M _z _{max.} [Nm]	15	30	90	180	300	600

2nd moment of area



Size	25	40	63
I _y [mm ⁴]	5.947x10 ⁵	2.479x10 ⁶	1.664x10 ⁷
I _z [mm ⁴]	2.372x10 ⁵	9.463x10 ⁵	5.997x10 ⁶

Passive guide axes FDG-ZR-RF, without drive

FESTO

Technical data


Maximum permissible support span l as a function of the applied load m

The axis may need to be supported with central supports MUP in order to limit deflection in the case of large strokes. The following diagrams serve


to determine the maximum permissible support span as a function of the applied load acting upon the axis.

A distinction is made here between forces acting upon the surface of the slide and forces acting upon the front of the slide.

1 Load on the surface of the slide

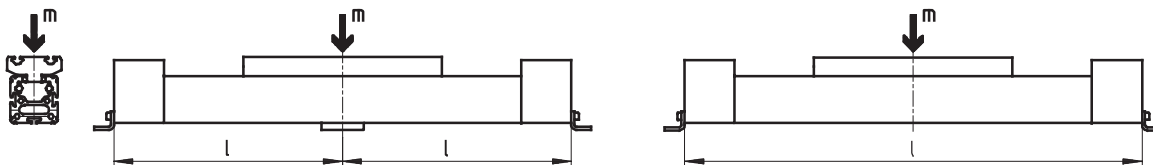

2 Load on the front of the slide



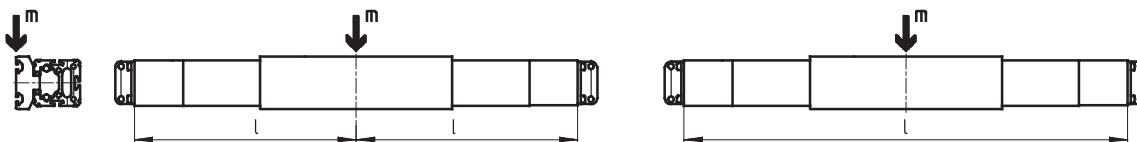


Maximum support span l (without central support) as a function of the applied load m

FDG-25

FDG-40

FDG-63

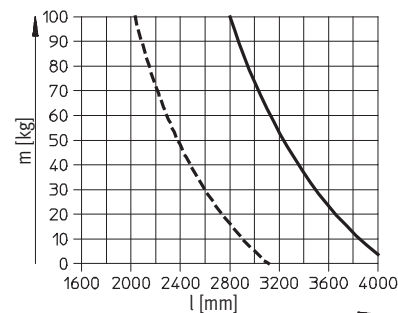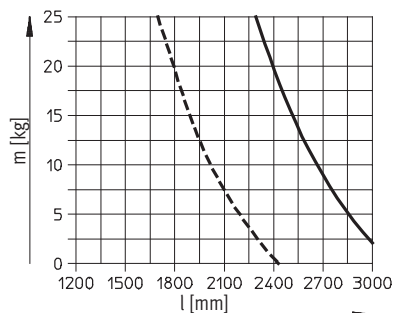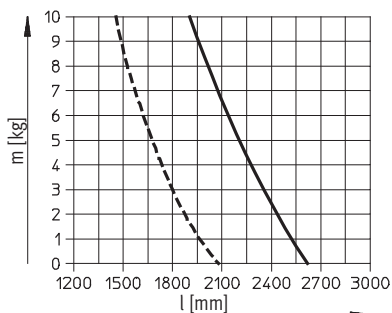


— 1
- - - 2

Technical data

Dimensions


Download CAD Data → www.festo.com/us/cad

FDG-25/-40/-63

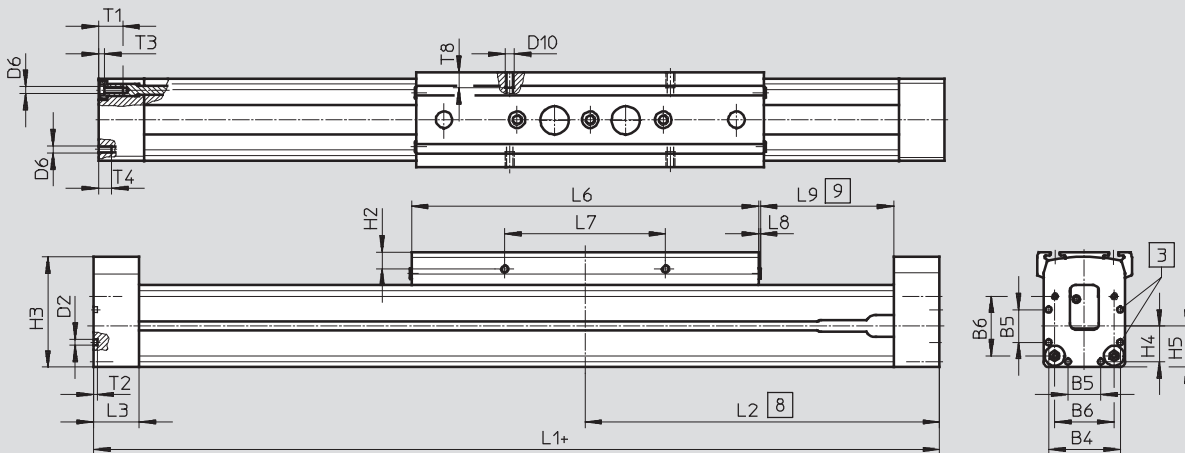


- | | | | |
|----------|---|----------|----------------------------|
| 3 | Centring hole for foot mounting | 9 | Recommended stroke reserve |
| 8 | Driver in end position of the working stroke (including L9) | + | = plus stroke length |

FDG-25




- 2 Slot for slot nuts
 5 Hole for centring sleeve
 ZBH-9 and mounting
 thread


FDG-40




FDG-63

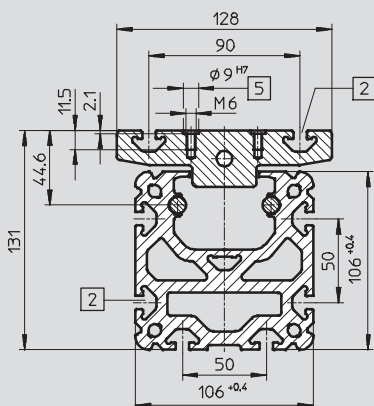


FDG-25-GK

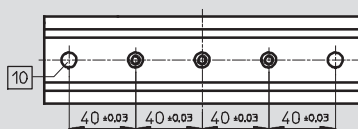


FDG-40-GK

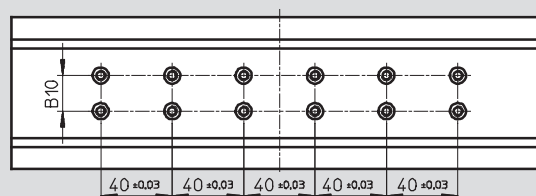

FDG-25-GV

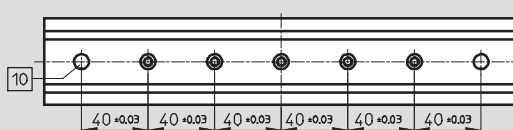

FDG-40-GV, FDG-63-GK

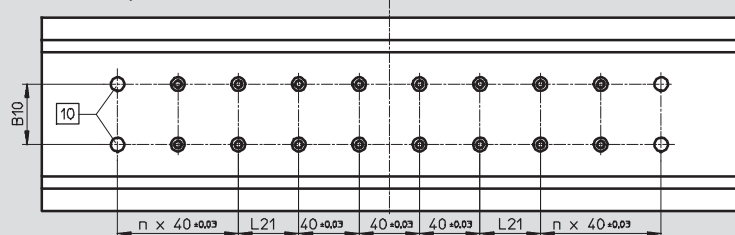


- 10 Hole for centring sleeve
ZBH-9

Passive guide axes FDG-ZR-RF, without drive

Technical data

FESTO

FDG-63-GV

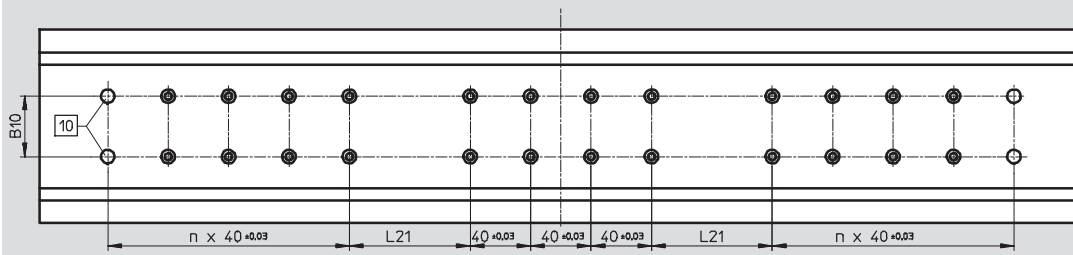

Size		B4	B5	B6	B10 ±0.03	D2	D6	D10	H2	H3
25	GK GV	39.1	18	32.5	–	3.3 _{+0.1}	M4	M5	9.3	60.4
40	GK GV	53	28	49	20	4.4 _{H13}	M5	M5	9.5	83.8
63	GK GV	89	44	83	40	6.4 _{+0.1}	M8	M8	10.5	129.3

Size		H4	H5	L1	L2	L3	L6	L7	L8
25	GK GV	19.6	22.5	414 509	207 254.5	25	190 285	88 _{±0.2}	1
40	GK GV	26.5	32	638 778	319 389	31	300 440	58 _{±0.1}	2
63	GK GV	44.5	52.8	1020 1250	510 625	34	460 690	72 _{±0.1}	2

Size		L9	L21 ±0.03	n	T1	T2	T3	T4	T8
25	GK GV	86	–	–	13	2	3	8	8.5
40	GK GV	136	40	– 2	13	3	5	12	8.5
63	GK GV	244	40 80	2 4	21	4	6	–	12

Passive guide axes FDG-ZR-RF, without drive


Ordering data – Modular products

FESTO


Ordering code

Mandatory data

GK Standard slide

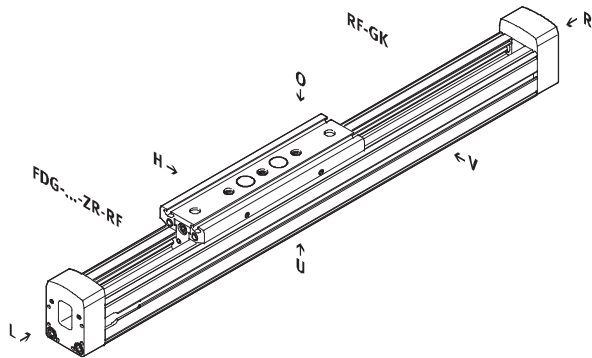


GV Extended slide

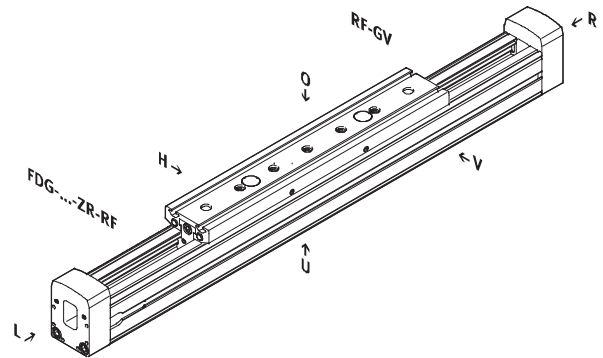

Ordering code

Options

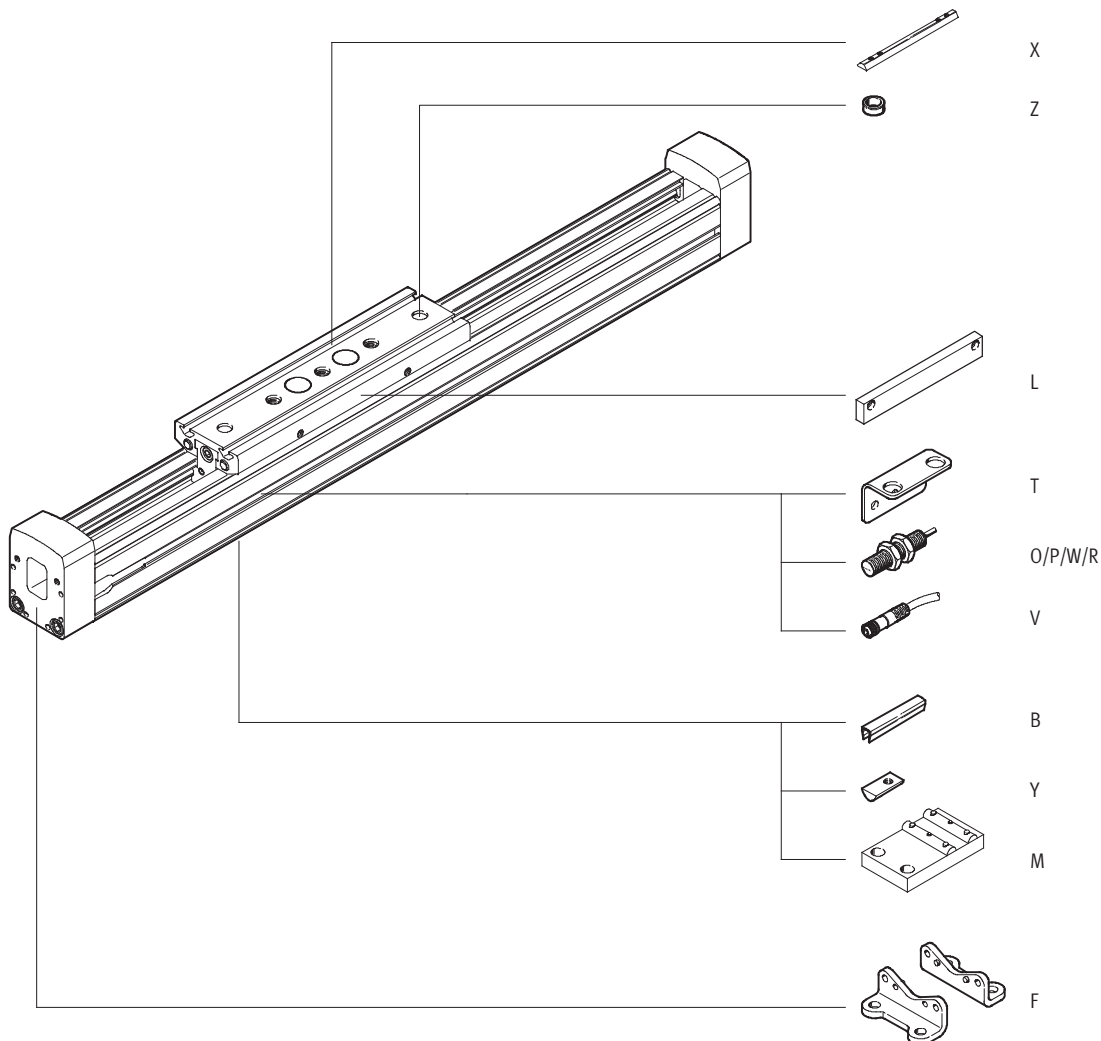

Passive guide axes FDG-ZR-RF, without drive

FESTO

Ordering data – Modular products

M Mandatory data							O Options	
Module No.	Function	Size	Stroke	Guide axis	Guide	Slide	Accessories	
538 791	FDG	25	1 ... 5 000	ZR	RF	GK	...B, ...Y, ...X, ...M, ...F, ...Z, ...V, ...T, L, ...O, ...P, ...W, ...R	
538 792		40				GV		
538 793		63						
Ordering example								
538 791	FDG	- 25	- 300	- ZR	- RF	- GK	- ZUB	- 2B

Ordering table								
Size		25	40	63	Conditions	Code	Enter code	
M	Module No.		538 791	538 792	538 793			
	Function		Guide axis without drive				FDG	FDG
	Size		25	40	63		*...	
	Stroke [mm]		1 ... 5 000				*...	
	Guide axis		for DGE-ZR-RF				-ZR	-ZR
	Guide		Roller guide				-RF	-RF
	Slide		Standard slide				-GK	
			Extended slide			1	-GV	
O	Accessories		Accessories supplied loose				-ZUB-	-ZUB-
	Slot cover for mounting slot		1 ... 10				...B	
	Slot nut	Mounting slot	1 ... 10				...Y	
		For slide	1 ... 10				...X	
	Central support		1 ... 10				...M	
	Foot mounting		1 ... 10				...F	
	Centring sleeve (pack of 10)		10, 20, 30, 40, 50, 60, 70, 80, 90				...Z	
	Cable with socket, M8, 2.5 m		1 ... 10				...V	
	Mounting bracket for inductive proximity sensors		1 ... 5				...T	
	Switching lug		1				L	
	Inductive proximity sensor	NO contact, cable 2.5 m	1 ... 5				...O	
		NC cable, cable 2.5 m	1 ... 5				...P	
		NO contact, plug M8	1 ... 5				...W	
		NC contact, plug M8	1 ... 5				...R	

- 1 GV Maximum stroke Size 25: 4 905 mm
Size 40: 4 860 mm
Size 63: 4 770 mm

Passive guide axes FDG-ZR-RF, without drive

FESTO


Accessories

Foot mounting HP
(order code: F)

Material:
Galvanised steel
Free of copper, PTFE and silicone



HP-25

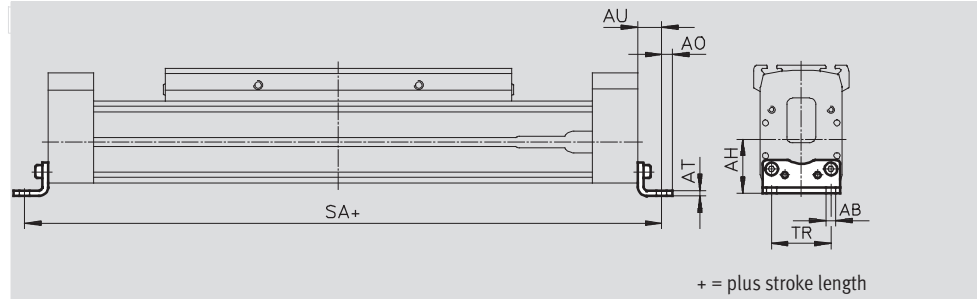

Dimensions and ordering data

For size	AB Ø	AH	AO	AT	AU
25	5.5	29.5	6	3	13
40	6.6	46	8.5	5	17.5
63	11	69	13.5	6	28


For size	SA		TR	Weight [g]	Part No.	Type
	GK	GV				
25	440	535	32.5	61	150 731	HP-25
40	673	813	45	188	150 733	HP-40
63	1076	1306	75	305	150 735	HP-63

Central support MUP
(order code: M)

Material:
Galvanised steel
Free of copper, PTFE and silicone



MUP-40

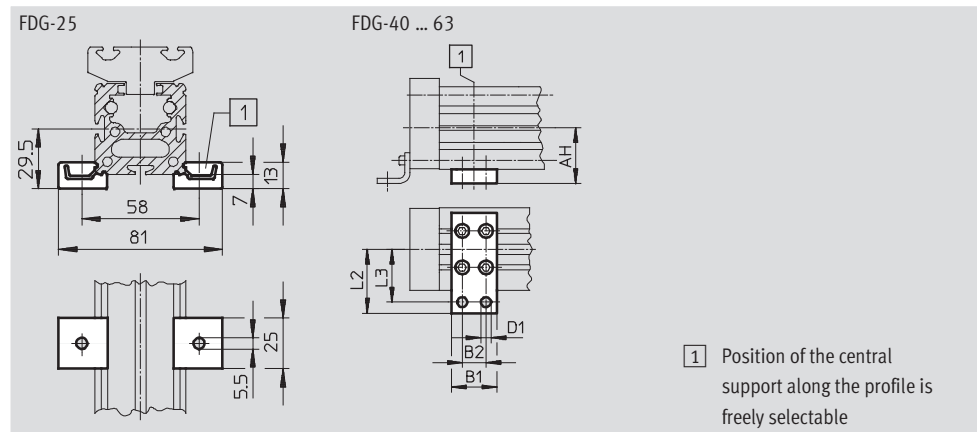






Dimensions and ordering data

For size	AH	B1	B2	D1 Ø	L2	L3	Weight [g]	Part No.	Type
25	–	–	–	–	–	–	33	150 736	MUP-18/25
40	46	35	22	6.6	47	40	126	150 738	MUP-40
63	69	50	26	11	77	65	340	150 800	MUP-63

Passive guide axes FDG-ZR-RF, without drive

Accessories

FESTO

Ordering data						
	For size	Remarks	Ordering code	Part No.	Type	PU ¹⁾
Slot nut NST Technical data → Internet: nst						
	25	For mounting slot/profile slot	Y	526 091	NST-HMV-M4	1
	40			150 914	NST-5-M5	1
	63			150 915	NST-8-M6	1
Slot nut NSTL Technical data → Internet: nstl						
	25	For slide	X	158 410	NSTL-25	1
	40			158 412	NSTL-40	1
	63			158 414	NSTL-63	1
Centring pin/sleeve ZBH Technical data → Internet: zbh						
	25, 40, 63	For slide	Z	150 927	ZBH-9	10
Slot cover ABP-S Technical data → Internet: abp						
	25	For mounting slot every 0.5 m	B	151 680	ABP-5-S	2
Slot cover ABP Technical data → Internet: abp						
	40	For mounting slot every 0.5 m	B	151 681	ABP-5	2
	63			151 682	ABP-8	

1) Packaging unit quantity

Passive guide axes FDG-ZR-RF, without drive

Accessories

FESTO

Sensor bracket HWS

for inductive proximity sensors

(order code: T)

Material:

Galvanised steel



Switching lug SF


(order code: L)

Material:


Galvanised steel



FDG-25

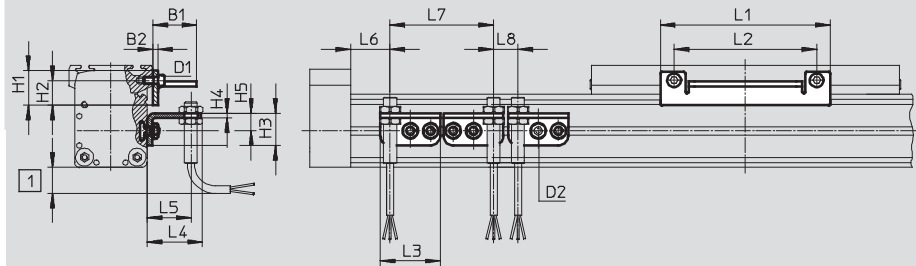

FDG-40 ... 63

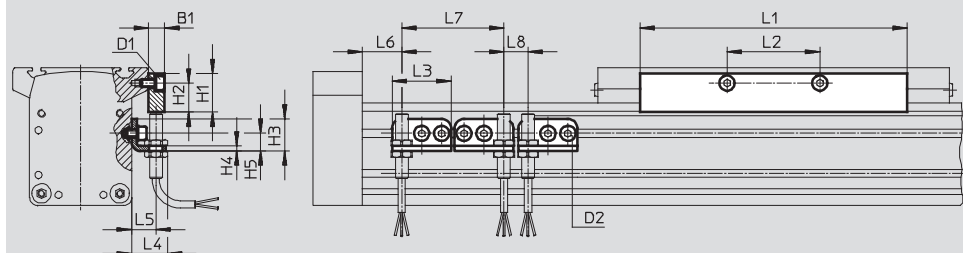

- 1 Protruding sensor cable, ensure sufficient installation space

Dimensions and ordering data





For size	D1	D2	B1	B2	H1	H2	H3	H4	H5	L1	L2	L3	L4	L5
25	M5	M5	27	3	20.5	15.3	20	3	11	105	88	37	34.5	27
40	M5	M5	10	–	24	18	20	3	11	167	58	37	22.5	15
63	M8	M5	10	–	35	25	20	3	11	230	72	37	22.5	15



For size	L6		L7	L8	Weight [g]	Part No.	Type
	GK	GV					
25	43.5	91	64	15	30	540 780	HWS-25-MAB-M8
					80	540 430	SF-25-MAB
40	68.5	138.5	64	15	40	188 969	HWS-40-M8
					310	188 966	SF-40
63	117	232	64	15	40	188 970	HWS-63-M8
					630	188 967	SF-63

Passive guide axes FDG-ZR-RF, without drive

Accessories

FESTO

Ordering data – Inductive proximity sensors M8						Technical data ➔ Internet: sien	
	Electrical connection		Switch output	LED	Cable length [m]	Part No.	Type
	Cable	Plug M8					
NO contact							
	3-core	–	PNP	■	2.5	150 386	SIEN-M8B-PS-K-L
	–	3-pin	PNP	■	–	150 387	SIEN-M8B-PS-S-L
NC contact							
	3-core	–	PNP	■	2.5	150 390	SIEN-M8B-PO-K-L
	–	3-pin	PNP	■	–	150 391	SIEN-M8B-PO-S-L

Ordering data – Connecting cables					Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type	
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 333	NEBU-M8G3-K-2.5-LE3	
			5	541 334	NEBU-M8G3-K-5-LE3	
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 338	NEBU-M8W3-K-2.5-LE3	
			5	541 341	NEBU-M8W3-K-5-LE3	

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com