




- Compact short-stroke cylinders with standard port pattern from \varnothing 32 mm
- Optimised fitting space and height
- Adaptable housing and piston rod variants for individual applications

Short-stroke cylinders ADVC/AEVC

Key features

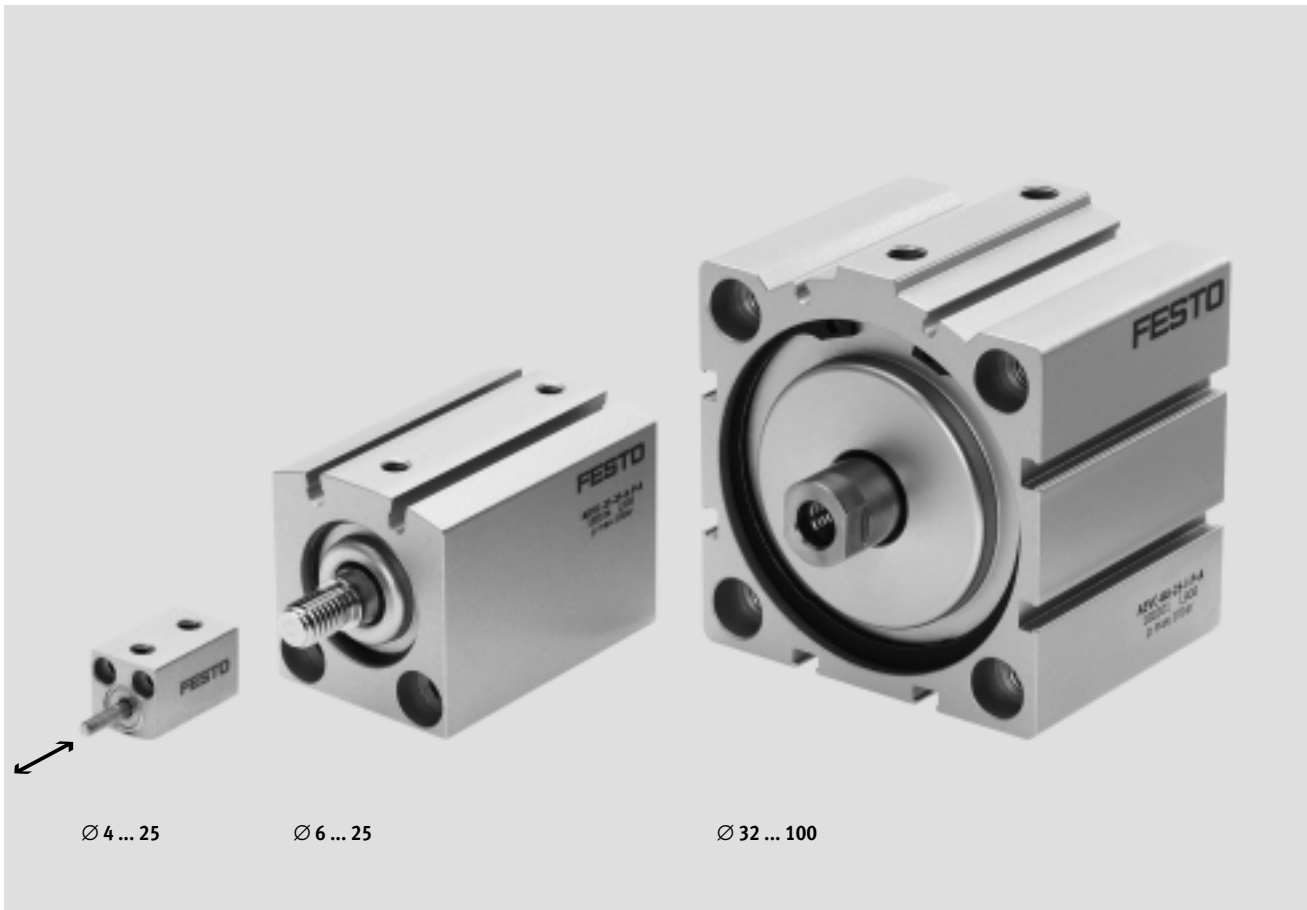

Brief description

- Diameter
4 ... 100 mm
- Stroke length
2.5 ... 25 mm


Short-stroke cylinders are ideal for clamping tasks with short strokes, e.g. in retaining devices.

The cylinders offer:


- Rapid response with applied pressure
- Large clamping forces in comparison to their size
- Minimal installation space

- Integrated sensor slots for contacting or contactless proximity sensors
- Mounting hole pattern to VDMA 24 562 for Ø 32 ... 100 mm


Fitting space comparison with 10 mm stroke

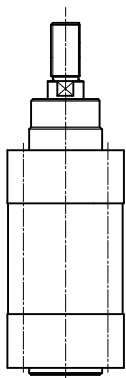

100%
Standard cylinder
DNC




45%
Compact cylinder
ADVU




33%
Short-stroke cylinder
ADVC

Sensor slots




T-slot for proximity sensor
SME/SMT-8



C-slot for proximity sensor SME/
SMT-10

Short-stroke cylinders ADVC/AEVC

Type codes

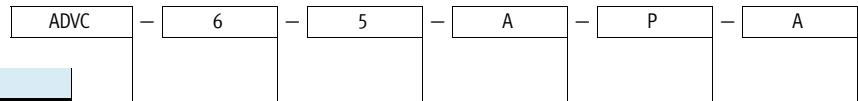

Type

| | |
|------|-------------------------------------|
| ADVC | Double acting short stroke cylinder |
| AEVC | Single-acting short stroke cylinder |

Piston Ø [mm]

Stroke [mm]

Piston rod thread

| | |
|---|----------------|
| A | Male thread |
| I | Female thread |
| | Without thread |

Cushioning









| | |
|---|---|
| P | Flexible cushioning rings/plates at both ends |
|---|---|

Position sensing

| | |
|---|-----------------------|
| | No position sensing |
| A | For proximity sensing |

Short-stroke cylinders ADVC/AEVC

Product range overview

| Function | Version | Type | Piston Ø [mm] | Stroke [mm] | Position sensing |
|---------------------|---|----------------------------|---------------------|-------------------|------------------|
| Double-acting | Without position sensing | | | | |
| |  | ADVC Ø 4 ... 25 | 4 | 2.5; 5 | - |
| | | | 6, 10, 12 | 5, 10 | |
| | | | 16, 20, 25 | 5, 10, 15, 20, 25 | |
| |  | ADVC Ø 32 ... 100 | 32, 40 | 5, 10, 15, 20, 25 | - |
| | | | 50, 63, 80, 100 | 10, 15, 20, 25 | |
| | With position sensing | | | | |
| |  | ADVC-...-A Ø 6 ... 25 | 6, 10, 12 | 5, 10 | ■ |
| | | | 16, 20, 25 | 5, 10, 15, 20, 25 | |
| |  | ADVC-...-A Ø 32 ... 100 | 32, 40 | 5, 10, 15, 20, 25 | ■ |
| 50, 63, 80, 100 | | | 10, 15, 20, 25 | | |
| Single-acting | Without position sensing | | | | |
| |  | AEVC Ø 4 ... 25 | 4 | 2.5; 5 | - |
| | | | 6, 10, 12 | 5, 10 | |
| | | | 16, 20, 25 | 5, 10, 25 | |
| |  | AEVC Ø 32 ... 100 | 32 | 5, 10, 25 | - |
| | | | 40, 50, 63, 80, 100 | 10, 25 | |
| | With position sensing | | | | |
| |  | AEVC-...-A Ø 6 ... 25 | 6, 10, 12 | 5, 10 | ■ |
| | | | 16, 20, 25 | 5, 10, 25 | |
| |  | AEVC-...-A Ø 32 ... 100 | 32 | 5, 10, 25 | ■ |
| 40, 50, 63, 80, 100 | | | 10, 25 | | |

Short-stroke cylinders ADVC/AEVC

Product range overview


| Type | Piston rod | | | Cushioning | → Page/Internet |
|---------------------------------|------------------|--------------------|-----------------|------------|-----------------|
| | With male thread | With female thread | Without thread | | |
| Without position sensing | | | | | |
| ADVC Ø 4 ... 25 | ■ | ■ From Ø 12 | ■ Ø 4 ... 12 | ■ | 8 |
| ADVC Ø 32 ... 100 | ■ | ■ | - | ■ | 8 |
| With position sensing | | | | | |
| ADVC-...-A Ø 6 ... 25 | ■ | ■ From Ø 12 | ■ Ø 6 ... 12 | ■ | 16 |
| ADVC-...-A Ø 32 ... 100 | ■ | ■ | - | ■ | 16 |
| Without position sensing | | | | | |
| AEVC Ø 4 ... 25 | ■ | ■ From Ø 12 | ■ Ø 4 ... 12 | ■ | 24 |
| AEVC Ø 32 ... 100 | ■ | ■ | - | ■ | 24 |
| With position sensing | | | | | |
| AEVC-...-A Ø 6 ... 25 | ■ | ■ From Ø 12 | ■ Ø 6 ... 12 | ■ | 30 |
| AEVC-...-A Ø 32 ... 100 | ■ | ■ | - | ■ | 30 |

Short-stroke cylinders ADVC/AEVC

Peripherals overview



Ø 32 ... 100 mm

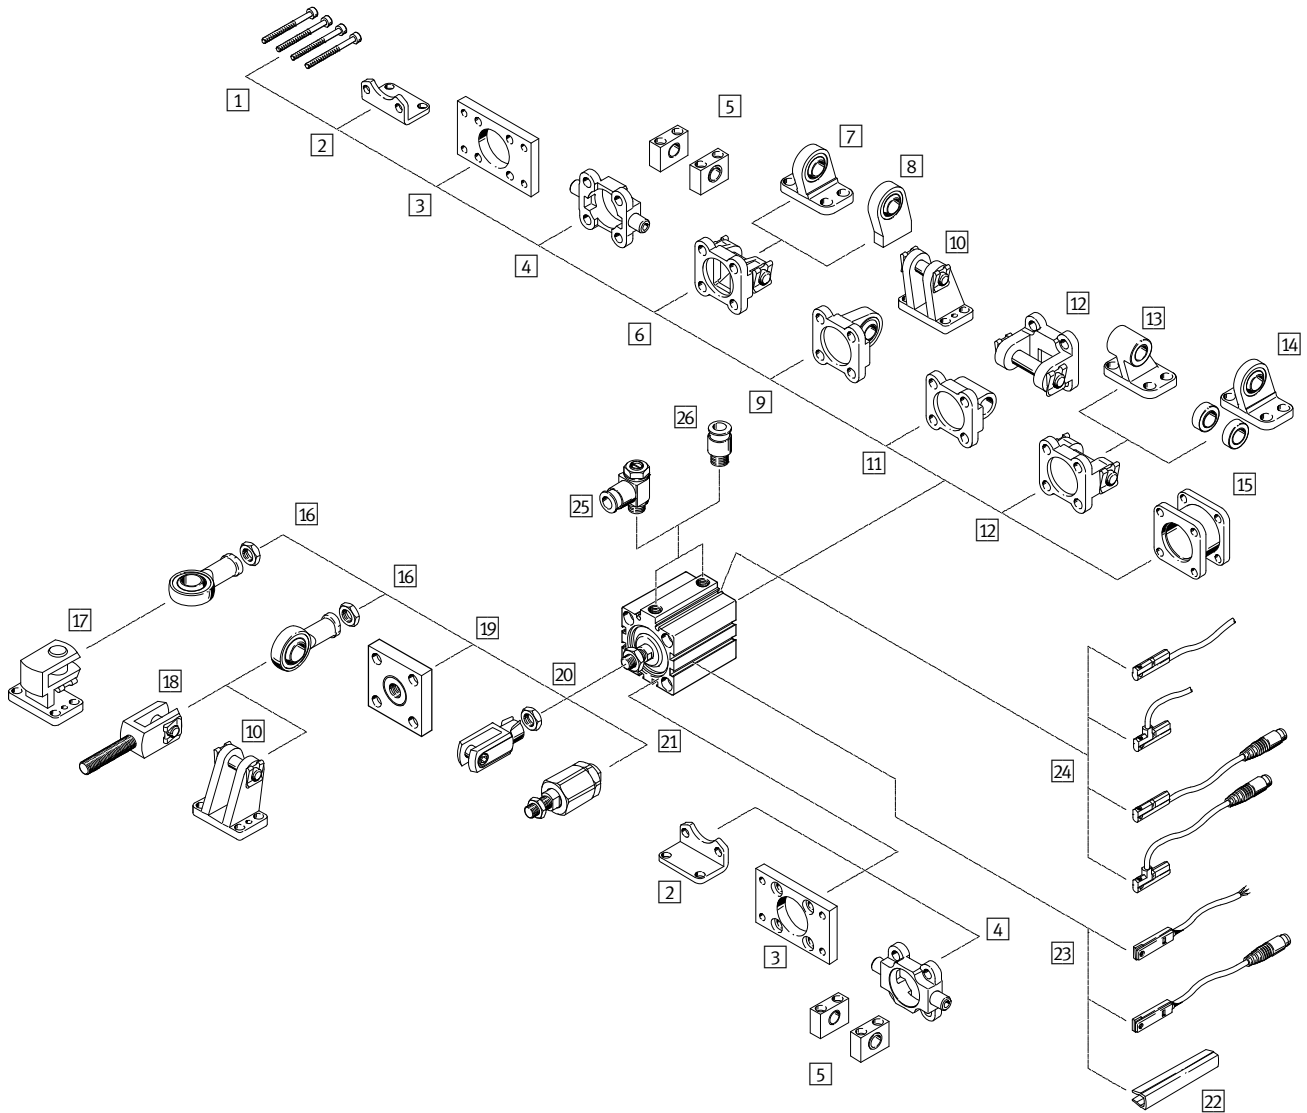


Ø 4 ... 25 mm

Without position sensing



Ø 6 ... 25 mm

With position sensing




Short-stroke cylinders ADVC/AEVC

Peripherals overview


| Mounting attachments and accessories | | | | | | |
|--------------------------------------|---------------------------------|---|---------------|--------------|-----------------|------------|
| | Brief description | Piston Ø | | | → Page/Internet | |
| | | 4, 6, 12 | 10, 16 ... 25 | 32 ... 100 | | |
| 1 | Mounting screws | Not included in scope of delivery | ■ DIN 84 | ■ DIN 912 | ■ DIN 912 | – |
| 1 | Mounting screws for Ø 80, 100 | Not included in scope of delivery | – | – | ■ | 45 |
| 2 | Foot mounting HNC | For bearing and end caps | – | – | ■ | 37 |
| 3 | Flange mounting FNC | For bearing or end caps | – | – | ■ | 38 |
| 4 | Trunnion flange ZNCF | For bearing or end caps | – | – | ■ | 39 |
| 5 | Trunnion support LNZZ | – | – | – | ■ | 40 |
| 6 | Swivel flange SNC | For end caps | – | – | ■ | 41 |
| 7 | Clevis foot LSNG | With spherical bearing | – | – | ■ | 45 |
| 8 | Clevis foot LSNSG | Weld-on, with spherical bearing | – | – | ■ | 45 |
| 9 | Swivel flange SNCS | With spherical bearing for end caps | – | – | ■ | 43 |
| 10 | Clevis foot LBG | – | – | – | ■ | 45 |
| 11 | Swivel flange SNCL | For end caps | – | – | ■ | 44 |
| 12 | Swivel flange SNCB | For end caps | – | – | ■ | 42 |
| 13 | Clevis foot LNG | – | – | – | ■ | 45 |
| 14 | Clevis foot LSN | With spherical bearing | – | – | ■ | 45 |
| 15 | Adapter kit DPNC | For connecting two cylinders with identical piston diameter to form a multi-position cylinder | – | – | ■ | 36 |
| 16 | Rod eye SGS | With spherical bearing | – | ■ | ■ | 46 |
| 17 | Right-angle clevis foot LQG | – | – | ■ | ■ | 45 |
| 18 | Rod clevis SGA | With male thread | – | – | ■ | 46 |
| 19 | Coupling piece KSG | For compensating radial deviations | – | – | ■ | 46 |
| 20 | Rod clevis SG | Permits a swivelling movement of the cylinder in one plane | – | ■ | ■ | 46 |
| 21 | Self-aligning rod coupler FK | For compensating radial and angular deviations | ■ Ø 12 | ■ | ■ | 46 |
| 22 | Slot cover ABP-5-S | To protect the sensor cable and keep dirt out of the sensor slots | – | – | ■ | 47 |
| 23 | Proximity sensors SME/SMT-8 | Can be integrated in the cylinder profile barrel | – | – | ■ | 47 |
| 24 | Proximity sensors SME/SMT-10 | Can be integrated in the cylinder profile barrel | – | ■ | ■ | 48 |
| 25 | One-way flow control valve GRLA | To regulate speed | ■ | ■ | ■ | 48 |
| 26 | Push-in fitting QS | For connecting compressed air tubing with standard external diameters | ■ | ■ | ■ | quick star |

Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing



- - Diameter
4 ... 100 mm
- - Stroke length
2.5 ... 25 mm

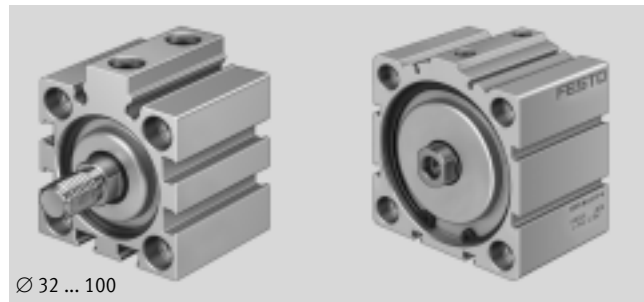

| General technical data | | | | | | | | | | | | | |
|--------------------------------|--|----|----|----|----|----|----|------|-------------------|------|------|------|------|
| Piston Ø | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Pneumatic connection | M3 | M3 | M5 | M5 | M5 | M5 | M5 | G1/8 | G1/8 | G1/8 | G1/8 | G1/8 | G1/4 |
| Piston rod with female thread | - | - | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod with male thread | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod without thread | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | - |
| Operating medium | Compressed air in accordance with ISO 8573-1:2010 [7:4:4] | | | | | | | | | | | | |
| Note on operating/pilot medium | Operation with lubricated medium possible (in which case lubricated operation will always be required) | | | | | | | | | | | | |
| Constructional design | Piston | | | | | | | | | | | | |
| | Piston rod | | | | | | | | | | | | |
| Cushioning | Flexible cushioning rings/plates at both ends | | | | | | | | | | | | |
| Type of mounting | Via through-holes | | | | | | | | Via through-holes | | | | |
| | - | | | | | | | | Via accessories | | | | |
| Mounting position | Any | | | | | | | | | | | | |

| Operating conditions | | | | | | | | | | | | | |
|--|-------------|-----------|---------|----------|----|----|----|------------|----|----|----|----|-----|
| Piston Ø | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Operating pressure [bar] | 2 ... 8 | 1.5 ... 8 | 1 ... 8 | 1 ... 10 | | | | 0.6 ... 10 | | | | | |
| Ambient temperature [°C] | -20 ... +80 | | | | | | | | | | | | |
| Corrosion resistance class CRC ¹⁾ | 1 | | | | | | | | | | | | |

1) Corrosion resistance class 1 according to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers

Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing


| Forces [N] and impact energy [J] | | | | | | | | | | | | | |
|---------------------------------------|-------|-------|------|------|------|------|------|------|------|-------|-------|-------|-------|
| Piston Ø | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Theoretical force at 6 bar, advancing | 7.5 | 17 | 47 | 68 | 121 | 189 | 295 | 483 | 754 | 1,178 | 1,870 | 3,016 | 4,712 |
| Theoretical force at 6 bar, returning | 5.7 | 13 | 40 | 51 | 91 | 141 | 247 | 415 | 686 | 1,056 | 1,750 | 2,847 | 4,418 |
| Max. impact energy at end positions | 0.003 | 0.005 | 0.03 | 0.06 | 0.10 | 0.14 | 0.18 | 0.26 | 0.36 | 0.60 | 0.64 | 0.90 | 1.20 |

| Product weight [g] | | | | | | | | | | | | | |
|--------------------|----------|------|----|----|-----|-----|-----|-----|-----|-----|-----|-------|-------|
| Stroke [mm] | Piston Ø | | | | | | | | | | | | |
| | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 2.5 | 4 | – | – | – | – | – | – | – | – | – | – | – | – |
| 5 | 4.5 | 12.5 | 23 | 34 | 68 | 112 | 135 | 280 | 350 | – | – | – | – |
| 10 | – | 16 | 26 | 42 | 76 | 124 | 150 | 300 | 380 | 470 | 600 | 1,570 | 2,480 |
| 15 | – | – | – | – | 84 | 136 | 165 | 320 | 410 | 505 | 650 | 1,655 | 2,570 |
| 20 | – | – | – | – | 92 | 148 | 180 | 340 | 440 | 540 | 700 | 1,740 | 2,660 |
| 25 | – | – | – | – | 100 | 160 | 195 | 360 | 470 | 575 | 750 | 1,825 | 2,750 |

| Moving load [g] | | | | | | | | | | | | | |
|-----------------|----------|-----|-----|-----|----|----|----|----|----|-----|-----|-----|-----|
| Stroke [mm] | Piston Ø | | | | | | | | | | | | |
| | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 2.5 | 0.2 | – | – | – | – | – | – | – | – | – | – | – | – |
| 5 | 0.25 | 1.2 | 2.8 | 6.6 | 11 | 22 | 27 | 46 | 69 | – | – | – | – |
| 10 | – | 1.5 | 3.3 | 7.7 | 13 | 25 | 30 | 51 | 74 | 127 | 178 | 339 | 719 |
| 15 | – | – | – | – | 15 | 28 | 33 | 56 | 79 | 135 | 186 | 351 | 739 |
| 20 | – | – | – | – | 17 | 31 | 36 | 61 | 84 | 143 | 194 | 363 | 759 |
| 25 | – | – | – | – | 19 | 34 | 39 | 66 | 89 | 151 | 202 | 375 | 779 |

Materials

Sectional view

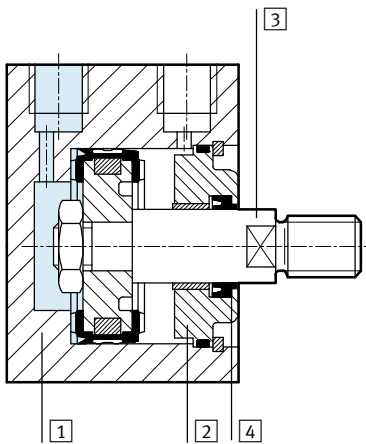

| Short-stroke cylinder | Ø 4 | Ø 6 ... 100 |
|-----------------------|-----------------------------------|-----------------------------------|
| 1 Cylinder barrel | Anodised aluminium | Anodised aluminium |
| 2 Cover cap | Anodised aluminium | Anodised aluminium |
| 3 Piston rod | Anodised aluminium | High-alloy steel |
| 4 Rod seal | Nitrile rubber | Polyurethane |
| Note on material | Free of copper, PTFE and silicone | Free of copper, PTFE and silicone |

Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing


Dimensions

Download CAD data → www.festo.com

∅ 4 ... 25 mm


ADVC-...-I-P

Piston rod with female thread

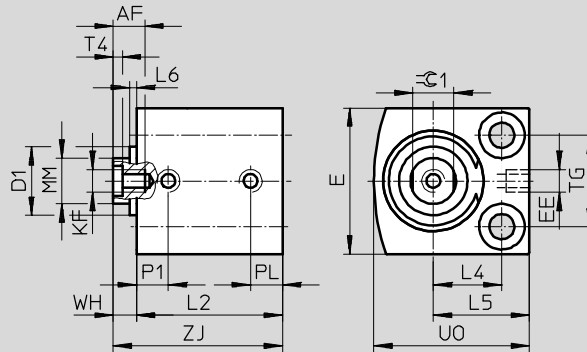


ADVC-...-A-P

Piston rod with male thread

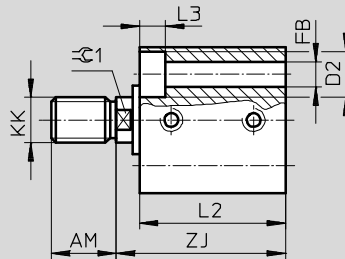

ADVC-...-P

Piston rod without thread



 Note

∅ 4 mm

Do not exceed maximum screw-in depth of 3 mm and maximum tightening torque of 0.7 Nm.

∅ 10 mm

Depending on tolerance, the bearing cap may project by up to 0.65 mm.

∅ 12 mm

Depending on tolerance, the bearing cap may project by up to 0.35 mm.

Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing

| ∅ [mm] | Stroke [mm] | AF min. | AM -0.5 | D1 ∅ max. | D2 ∅ | E max. | EE | FB ∅ | KF | KK | L2 +0.2 | L3 |
|-----------|----------------|------------|------------|-----------------|----------|-----------|----|---------|----|----|------------|-----|
| 4 | 2.5 | - | 6 | - | 3.3 +0.1 | 10 | M3 | 1.8 | - | M2 | 13 | 1.8 |
| | 5 | | | | | | | | | | 15.5 | |
| 6 | 5 | - | 6 | - | 5 +0.1 | 13 | M3 | 2.9 | - | M3 | 16 | 2.9 |
| | 10 | | | | | | | | | | 21 | |
| 10 | 5 | - | 8 | 7.5 | 5.8 +0.1 | 18 | M5 | 3.4 | - | M4 | 21 | 3.4 |
| | 10 | | | | | | | | | | 24 | |
| 12 | 5 | 8 | 8 | 10.7 | 6 H13 | 20 | M5 | 3.4 | M3 | M5 | 23 | 3.4 |
| | 10 | | | | | | | | | | 28 | |
| 16 | 5 | 10 | 12 | - | 8 H13 | 25 | M5 | 4.5 | M4 | M6 | 23 | 4.6 |
| | 10 | | | | | | | | | | 28 | |
| | 15 | | | | | | | | | | 33 | |
| | 20 | | | | | | | | | | 38 | |
| | 25 | | | | | | | | | | 43 | |
| 20 | 5 | 12 | 12 | - | 10 H13 | 32 | M5 | 5.5 | M5 | M8 | 27 | 5.7 |
| | 10 | | | | | | | | | | 32 | |
| | 15 | | | | | | | | | | 37 | |
| | 20 | | | | | | | | | | 42 | |
| | 25 | | | | | | | | | | 47 | |
| 25 | 5 | 12 | 12 | - | 10 H13 | 38 | M5 | 5.5 | M5 | M8 | 27.5 | 5.7 |
| | 10 | | | | | | | | | | 32.5 | |
| | 15 | | | | | | | | | | 37.5 | |
| | 20 | | | | | | | | | | 42.5 | |
| | 25 | | | | | | | | | | 47.5 | |

| ∅ [mm] | Stroke [mm] | L4 | L5 | L6 max. | MM ∅ | P1 | PL | T4 | TG ±0.1 | UO max. | WH | ZJ ±0.8 | ≙C1 |
|-----------|----------------|------|------|------------|---------|------|------|-----|------------|------------|-----|------------|-----|
| 4 | 2.5 | 4 | 6.5 | - | 2 | 3.7 | 3.2 | - | 5.8 | 10 | 1 | 14 | - |
| | 5 | | | | | | | | | | | 16.5 | |
| 6 | 5 | 6 | 9 | - | 3 | 4.7 | 3 | - | 7 | 14 | 1 | 17 | - |
| | 10 | | | | | | | | | | | 22 | |
| 10 | 5 | 8 | 11.5 | 0.7 | 4 | 5.2 | 5.2 | - | 11 | 19 | 1.5 | 22.5 | - |
| | 10 | | | | | 6 | 5.5 | | | | | 25.5 | |
| 12 | 5 | 9 | 13 | 0.4 | 6 | 5.75 | 5.75 | 1.5 | 13 | 22 | 4 | 27 | 5 |
| | 10 | | | | | 9 | 6 | | | | | 32 | |
| 16 | 5 | 11.5 | 16.5 | - | 8 | 6 | 6 | 2 | 15 | 27 | 4 | 27 | 7 |
| | 10 | | | | | 32 | | | | | | | |
| | 15 | | | | | 37 | | | | | | | |
| | 20 | | | | | 42 | | | | | | | |
| | 25 | | | | | 47 | | | | | | | |
| 20 | 5 | 15 | 21 | - | 10 | 7.5 | 7 | 2 | 20 | 34 | 5 | 32 | 9 |
| | 10 | | | | | | | | | | | 37 | |
| | 15 | | | | | | | | | | | 42 | |
| | 20 | | | | | | | | | | | 47 | |
| | 25 | | | | | | | | | | | 52 | |
| 25 | 5 | 15.5 | 21.5 | - | 10 | 8 | 6.5 | 2 | 26 | 37 | 5 | 32.5 | 9 |
| | 10 | | | | | | | | | | | 37.5 | |
| | 15 | | | | | | | | | | | 42.5 | |
| | 20 | | | | | | | | | | | 47.5 | |
| | 25 | | | | | | | | | | | 52.5 | |

Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing




Dimensions

Download CAD data → www.festo.com

∅ 32 ... 100 mm


ADVC-...-I-P

Piston rod with female thread

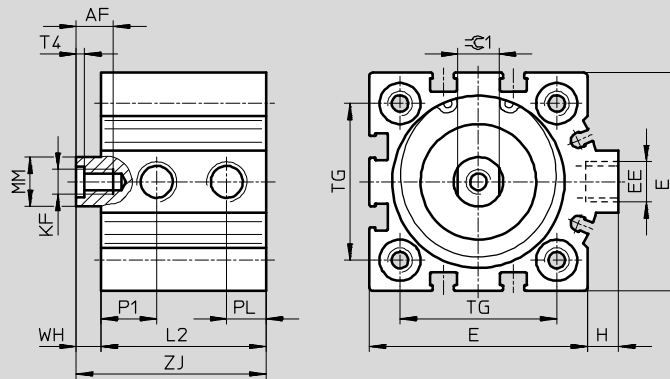

ADVC-...-A-P**

Piston rod with male thread

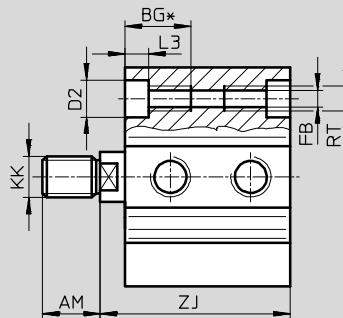

| ∅ | AF | AM | BG* | D2 | E | EE | FB | H | KF | KK |
|------|------|------|------|---------|------|-----------------|-----|-----|-----|----------|
| [mm] | min. | -0.5 | min. | ∅ F9 | max. | | ∅ | | | |
| 32 | 12 | 14 | 21.7 | 9 | 45 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 |
| 40 | 12 | 14 | 21.7 | 9 | 53.5 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 |
| 50 | 16 | 16 | 22.8 | 11 | 63.5 | G $\frac{1}{8}$ | 6.8 | 7 | M8 | M12x1.25 |
| 63 | 16 | 16 | 22.8 | 11 | 75 | G $\frac{1}{8}$ | 6.8 | 7.5 | M8 | M12x1.25 |
| 80 | 20 | 22 | 25 | 14 | 93 | G $\frac{1}{8}$ | 8.5 | 7 | M10 | M16x1.5 |
| 100 | 24 | 28 | 25 | 14 | 113 | G $\frac{1}{4}$ | 8.5 | 13 | M12 | M20x1.5 |

* Continuous thread with short overall length

** Nut for piston rod thread included in scope of delivery


Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing

| ∅ [mm] | Stroke [mm] | L2 +0.2 | L3 | MM ∅ | P1 | PL | RT | T4 | TG ±0.1 | WH | ZJ ±0.8 | ≈G1 |
|-----------|----------------|------------|-----|---------|------|------|-----|-----|------------|----|------------|-----|
| 32 | 5 | 34 | 5.7 | 12 | 9 | 8.5 | M6 | 2.6 | 32.5 | 6 | 40 | 10 |
| | 10 | 39 | | | | | | | | | 45 | |
| | 15 | 44 | | | | | | | | | 50 | |
| | 20 | 49 | | | | | | | | | 55 | |
| | 25 | 54 | | | | | | | | | 60 | |
| 40 | 5 | 34.5 | 5.7 | 12 | 11 | 9 | M6 | 2.6 | 38 | 6 | 40.5 | 10 |
| | 10 | 39.5 | | | | | | | | | 45.5 | |
| | 15 | 44.5 | | | | | | | | | 50.5 | |
| | 20 | 49.5 | | | | | | | | | 55.5 | |
| | 25 | 54.5 | | | | | | | | | 60.5 | |
| 50 | 10 | 38 | 6.8 | 16 | 11.3 | 9.5 | M8 | 3.3 | 46.5 | 8 | 46 | 13 |
| | 15 | 43 | | | | | | | | | 51 | |
| | 20 | 48 | | | | | | | | | 56 | |
| | 25 | 53 | | | | | | | | | 61 | |
| 63 | 10 | 45 | 6.8 | 16 | 12.5 | 11.5 | M8 | 3.3 | 56.5 | 8 | 53 | 13 |
| | 15 | 50 | | | | | | | | | 58 | |
| | 20 | 55 | | | | | | | | | 63 | |
| | 25 | 60 | | | | | | | | | 68 | |
| 80 | 10 | 50 | 9 | 20 | 15 | 15 | M10 | 4.7 | 72 | 8 | 58 | 17 |
| | 15 | 55 | | | | | | | | | 63 | |
| | 20 | 60 | | | | | | | | | 68 | |
| | 25 | 65 | | | | | | | | | 73 | |
| 100 | 10 | 59 | 9 | 25 | 16.5 | 19 | M10 | 6.1 | 89 | 10 | 69 | 22 |
| | 15 | 64 | | | | | | | | | 74 | |
| | 20 | 69 | | | | | | | | | 79 | |
| | 25 | 74 | | | | | | | | | 84 | |


Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing

| Ordering data | | | | | | | | |
|---|------------------|----------------|--------------------------------|----------------|----------------------------------|----------------|------------------------------|--------------|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | | Piston rod without thread | |
| | | | Part No. | Type | Part No. | Type | Part No. | Type |
|  | 4 | 2.5 | 188 054 | ADVC-4-2,5-A-P | – | | 526 897 | ADVC-4-2,5-P |
| | | 5 | 188 055 | ADVC-4-5-A-P | | | 526 898 | ADVC-4-5-P |
| | 6 | 5 | 188 066 | ADVC-6-5-A-P | – | | 526 899 | ADVC-6-5-P |
| | | 10 | 188 067 | ADVC-6-10-A-P | | | 526 900 | ADVC-6-10-P |
| | 10 | 5 | 188 078 | ADVC-10-5-A-P | – | | 526 903 | ADVC-10-5-P |
| | | 10 | 188 079 | ADVC-10-10-A-P | | | 526 904 | ADVC-10-10-P |
| | 12 | 5 | 188 094 | ADVC-12-5-A-P | 188 090 | ADVC-12-5-I-P | 530 568 | ADVC-12-5-P |
| | | 10 | 188 095 | ADVC-12-10-A-P | 188 091 | ADVC-12-10-I-P | 530 569 | ADVC-12-10-P |
| | 16 | 5 | 188 123 | ADVC-16-5-A-P | 188 113 | ADVC-16-5-I-P | – | |
| | | 10 | 188 124 | ADVC-16-10-A-P | 188 114 | ADVC-16-10-I-P | | |
| | | 15 | 188 125 | ADVC-16-15-A-P | 188 115 | ADVC-16-15-I-P | | |
| | | 20 | 188 126 | ADVC-16-20-A-P | 188 116 | ADVC-16-20-I-P | | |
| | | 25 | 188 127 | ADVC-16-25-A-P | 188 117 | ADVC-16-25-I-P | | |
| | 20 | 5 | 188 155 | ADVC-20-5-A-P | 188 145 | ADVC-20-5-I-P | – | |
| | | 10 | 188 156 | ADVC-20-10-A-P | 188 146 | ADVC-20-10-I-P | | |
| | | 15 | 188 157 | ADVC-20-15-A-P | 188 147 | ADVC-20-15-I-P | | |
| | | 20 | 188 158 | ADVC-20-20-A-P | 188 148 | ADVC-20-20-I-P | | |
| | | 25 | 188 159 | ADVC-20-25-A-P | 188 149 | ADVC-20-25-I-P | | |
| | 25 | 5 | 188 187 | ADVC-25-5-A-P | 188 177 | ADVC-25-5-I-P | – | |
| | | 10 | 188 188 | ADVC-25-10-A-P | 188 178 | ADVC-25-10-I-P | | |
| 15 | | 188 189 | ADVC-25-15-A-P | 188 179 | ADVC-25-15-I-P | | | |
| 20 | | 188 190 | ADVC-25-20-A-P | 188 180 | ADVC-25-20-I-P | | | |
| 25 | | 188 191 | ADVC-25-25-A-P | 188 181 | ADVC-25-25-I-P | | | |


Short-stroke cylinders ADVC

Technical data, double-acting – without position sensing



| Ordering data | | | | | | |
|---|------------------|----------------|--------------------------------|-----------------|----------------------------------|-----------------|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | |
| | | | Part No. | Type | Part No. | Type |
|  | 32 | 5 | 188 219 | ADVC-32-5-A-P | 188 209 | ADVC-32-5-I-P |
| | | 10 | 188 220 | ADVC-32-10-A-P | 188 210 | ADVC-32-10-I-P |
| | | 15 | 188 221 | ADVC-32-15-A-P | 188 211 | ADVC-32-15-I-P |
| | | 20 | 188 222 | ADVC-32-20-A-P | 188 212 | ADVC-32-20-I-P |
| | | 25 | 188 223 | ADVC-32-25-A-P | 188 213 | ADVC-32-25-I-P |
| | 40 | 5 | 188 247 | ADVC-40-5-A-P | 188 237 | ADVC-40-5-I-P |
| | | 10 | 188 248 | ADVC-40-10-A-P | 188 238 | ADVC-40-10-I-P |
| | | 15 | 188 249 | ADVC-40-15-A-P | 188 239 | ADVC-40-15-I-P |
| | | 20 | 188 250 | ADVC-40-20-A-P | 188 240 | ADVC-40-20-I-P |
| | | 25 | 188 251 | ADVC-40-25-A-P | 188 241 | ADVC-40-25-I-P |
| | 50 | 10 | 188 272 | ADVC-50-10-A-P | 188 264 | ADVC-50-10-I-P |
| | | 15 | 188 273 | ADVC-50-15-A-P | 188 265 | ADVC-50-15-I-P |
| | | 20 | 188 274 | ADVC-50-20-A-P | 188 266 | ADVC-50-20-I-P |
| | | 25 | 188 275 | ADVC-50-25-A-P | 188 267 | ADVC-50-25-I-P |
| | 63 | 10 | 188 296 | ADVC-63-10-A-P | 188 288 | ADVC-63-10-I-P |
| | | 15 | 188 297 | ADVC-63-15-A-P | 188 289 | ADVC-63-15-I-P |
| | | 20 | 188 298 | ADVC-63-20-A-P | 188 290 | ADVC-63-20-I-P |
| | | 25 | 188 299 | ADVC-63-25-A-P | 188 291 | ADVC-63-25-I-P |
| | 80 | 10 | 188 320 | ADVC-80-10-A-P | 188 312 | ADVC-80-10-I-P |
| | | 15 | 188 321 | ADVC-80-15-A-P | 188 313 | ADVC-80-15-I-P |
| | | 20 | 188 322 | ADVC-80-20-A-P | 188 314 | ADVC-80-20-I-P |
| | | 25 | 188 323 | ADVC-80-25-A-P | 188 315 | ADVC-80-25-I-P |
| | 100 | 10 | 188 344 | ADVC-100-10-A-P | 188 336 | ADVC-100-10-I-P |
| | | 15 | 188 345 | ADVC-100-15-A-P | 188 337 | ADVC-100-15-I-P |
| | | 20 | 188 346 | ADVC-100-20-A-P | 188 338 | ADVC-100-20-I-P |
| | | 25 | 188 347 | ADVC-100-25-A-P | 188 339 | ADVC-100-25-I-P |

Short-stroke cylinders ADVC

Technical data, double-acting – with position sensing



- Diameter
6 ... 100 mm
- Stroke length
5 ... 25 mm

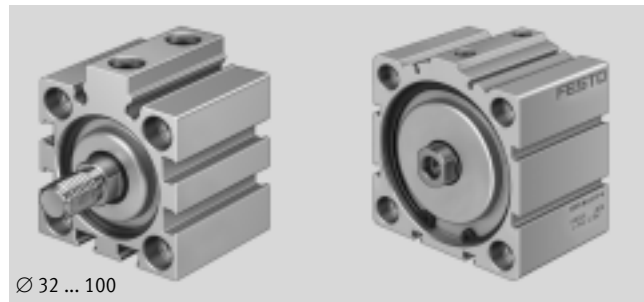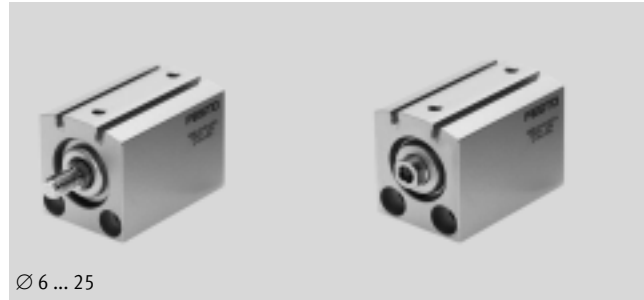

| General technical data | | | | | | | | | | | | |
|--------------------------------|--|----|----|----|----|----|-------------------|------|------|------|------|------|
| Piston Ø | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Pneumatic connection | M3 | M5 | M5 | M5 | M5 | M5 | G1/8 | G1/8 | G1/8 | G1/8 | G1/8 | G1/4 |
| Piston rod with female thread | – | – | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod with male thread | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod without thread | ■ | ■ | ■ | – | – | – | – | – | – | – | – | – |
| Operating medium | Compressed air in accordance with ISO 8573-1:2010 [7:4:4] | | | | | | | | | | | |
| Note on operating/pilot medium | Operation with lubricated medium possible (in which case lubricated operation will always be required) | | | | | | | | | | | |
| Constructional design | Piston | | | | | | | | | | | |
| | Piston rod | | | | | | | | | | | |
| Cushioning | Flexible cushioning rings/plates at both ends | | | | | | | | | | | |
| Position sensing | For proximity sensing | | | | | | | | | | | |
| Type of mounting | Via through-holes | | | | | | Via through-holes | | | | | |
| | – | | | | | | Via accessories | | | | | |
| Mounting position | Any | | | | | | | | | | | |

| Operating conditions | | | | | | | | | | | | |
|--|---|---------|----------|----|----|----|------------|----|----|----|----|-----|
| Piston Ø | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Operating pressure [bar] | 1.5 ... 8 | 1 ... 8 | 1 ... 10 | | | | 0.6 ... 10 | | | | | |
| Ambient temperature [°C] | –20 ... +80 (note operating range of proximity sensors) | | | | | | | | | | | |
| Corrosion resistance class CRC ¹⁾ | 1 | | | | | | | | | | | |

1) Corrosion resistance class 1 according to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers

Short-stroke cylinders ADVC

Technical data, double-acting – with position sensing


| Forces [N] and impact energy [J] | | | | | | | | | | | | |
|---------------------------------------|-------|------|------|------|------|------|------|------|-------|-------|-------|-------|
| Piston Ø | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Theoretical force at 6 bar, advancing | 17 | 47 | 68 | 121 | 189 | 295 | 483 | 754 | 1,178 | 1,870 | 3,016 | 4,712 |
| Theoretical force at 6 bar, returning | 13 | 40 | 51 | 91 | 141 | 247 | 415 | 686 | 1,056 | 1,750 | 2,847 | 4,418 |
| Max. impact energy at end positions | 0.005 | 0.03 | 0.06 | 0.10 | 0.14 | 0.18 | 0.26 | 0.36 | 0.60 | 0.64 | 0.90 | 1.20 |

| Product weight [g] | | | | | | | | | | | | |
|--------------------|----------|----|----|-----|-----|-----|-----|-----|-----|-----|-------|-------|
| Stroke [mm] | Piston Ø | | | | | | | | | | | |
| | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 5 | 20 | 37 | 70 | 98 | 162 | 195 | 320 | 460 | – | – | – | – |
| 10 | 23 | 45 | 79 | 106 | 174 | 210 | 340 | 490 | 630 | 710 | 1,940 | 2,970 |
| 15 | – | – | – | 114 | 186 | 225 | 360 | 520 | 665 | 760 | 2,025 | 3,060 |
| 20 | – | – | – | 122 | 198 | 240 | 380 | 550 | 700 | 810 | 2,110 | 3,150 |
| 25 | – | – | – | 130 | 210 | 255 | 400 | 580 | 735 | 860 | 2,195 | 3,240 |

| Moving load [g] | | | | | | | | | | | | |
|-----------------|----------|-----|-----|----|----|----|----|----|-----|-----|-----|-----|
| Stroke [mm] | Piston Ø | | | | | | | | | | | |
| | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 5 | 1.7 | 3.2 | 8.5 | 15 | 26 | 32 | 50 | 66 | – | – | – | – |
| 10 | 2 | 3.7 | 9.6 | 17 | 29 | 35 | 55 | 71 | 116 | 158 | 289 | 555 |
| 15 | – | – | – | 19 | 32 | 38 | 60 | 76 | 124 | 166 | 301 | 575 |
| 20 | – | – | – | 21 | 35 | 41 | 65 | 81 | 132 | 174 | 313 | 595 |
| 25 | – | – | – | 23 | 38 | 44 | 70 | 86 | 140 | 182 | 325 | 615 |

Materials

Sectional view

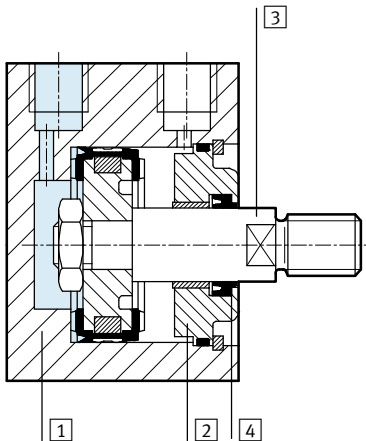

| Short-stroke cylinder | |
|---|---------------------------------------|
| 1 | Cylinder barrel Anodised aluminium |
| 2 | Cover cap Anodised aluminium |
| 3 | Piston rod High-alloy steel |
| 4 | Rod seal Polyurethane |
| Note on material Free of copper, PTFE and silicone | |

Short-stroke cylinders ADVC

Technical data, double-acting – with position sensing



Dimensions Download CAD data → www.festo.com

∅ 6 ... 25 mm

ADVC-...-I-P-A
Piston rod with female thread

ADVC-...-A-P-A
Piston rod with male thread

ADVC-...-P-A
Piston rod without thread

Note
∅ 10 mm
Depending on tolerance, the bearing cap may project by up to 0.65 mm.
∅ 12 mm
Depending on tolerance, the bearing cap may project by up to 0.35 mm.

1 Slot for proximity sensor SME/SMT-10

| ∅ [mm] | Stroke [mm] | AF min. | AM -0.5 | D1 ∅ max. | D2 ∅ | E max. | EE | FB ∅ | KF | KK | L2 +0.2 | L3 |
|-----------|----------------|------------|------------|-----------------|----------|-----------|----|---------|----|----|------------|-----|
| 6 | 5 | - | 6 | - | 5 +0.1 | 16 | M3 | 2.9 | - | M3 | 25.5 | 2.9 |
| | 10 | | | | | | | | | | 30.5 | |
| 10 | 5 | - | 8 | 7.5 | 5.8 +0.1 | 21 | M5 | 3.4 | - | M4 | 27 | 3.4 |
| | 10 | | | | | | | | | | 32 | |
| 12 | 5 | 8 | 8 | 10.7 | 6 H13 | 24 | M5 | 3.4 | M3 | M5 | 36 | 3.4 |
| | 10 | | | | | | | | | | 41 | |
| 16 | 5 | 10 | 12 | - | 8 H13 | 28 | M5 | 4.5 | M4 | M6 | 35 | 4.6 |
| | 10 | | | | | | | | | | 40 | |
| | 15 | | | | | | | | | | 45 | |
| | 20 | | | | | | | | | | 50 | |
| 20 | 5 | 12 | 12 | - | 10 H13 | 32 | M5 | 5.5 | M5 | M8 | 55 | 5.7 |
| | 10 | | | | | | | | | | 37 | |
| | 15 | | | | | | | | | | 42 | |
| | 20 | | | | | | | | | | 47 | |
| 25 | 5 | 12 | 12 | - | 10 H13 | 38 | M5 | 5.5 | M5 | M8 | 52 | 5.7 |
| | 10 | | | | | | | | | | 37 | |
| | 15 | | | | | | | | | | 42 | |
| | 20 | | | | | | | | | | 47 | |
| 25 | 20 | 12 | 12 | - | 10 H13 | 38 | M5 | 5.5 | M5 | M8 | 57 | 5.7 |
| | 25 | | | | | | | | | | 57 | |

Short-stroke cylinders ADVC

Technical data, double-acting – with position sensing

| ∅ [mm] | Stroke [mm] | L4 | L5 | L6 max. | MM ∅ | P1 | PL | T4 | TG ±0.1 | U0 max. | WH | ZJ ±0.8 | ⊖1 |
|-----------|----------------|------|------|------------|---------|-----|----|-----|------------|------------|-----|------------|----|
| 6 | 5 | 5 | 8 | - | 3 | 5.2 | 3 | - | 10 | 16 | 1 | 26.5 | - |
| | 10 | | | | | | | | | | | 31.5 | |
| 10 | 5 | 7 | 10.5 | 0.7 | 4 | 6 | 6 | - | 14 | 22 | 1.5 | 28.5 | - |
| | 10 | | | | | | | | | | | 33.5 | |
| 12 | 5 | 8 | 12 | 0.4 | 6 | 7 | 6 | 1.5 | 16 | 26 | 4 | 40 | 5 |
| | 10 | | | | | | | | | | | 45 | |
| 16 | 5 | 12 | 17 | - | 8 | 8 | 6 | 2 | 18 | 32 | 4 | 39 | 7 |
| | 10 | | | | | | | | | | | 44 | |
| | 15 | | | | | | | | | | | 49 | |
| | 20 | | | | | | | | | | | 54 | |
| | 25 | | | | | | | | | | | 59 | |
| 20 | 5 | 15 | 21 | - | 10 | 7.5 | 7 | 2 | 20 | 39 | 5 | 42 | 9 |
| | 10 | | | | | | | | | | | 47 | |
| | 15 | | | | | | | | | | | 52 | |
| | 20 | | | | | | | | | | | 57 | |
| | 25 | | | | | | | | | | | 62 | |
| 25 | 5 | 15.5 | 21.5 | - | 10 | 10 | 6 | 2 | 26 | 42 | 5 | 42 | 9 |
| | 10 | | | | | | | | | | | 47 | |
| | 15 | | | | | | | | | | | 52 | |
| | 20 | | | | | | | | | | | 57 | |
| | 25 | | | | | | | | | | | 62 | |

Short-stroke cylinders ADVC

Technical data, double-acting – with position sensing


Dimensions

Download CAD data → www.festo.com

∅ 32 ... 100 mm


ADVC-...-I-P-A

Piston rod with female thread

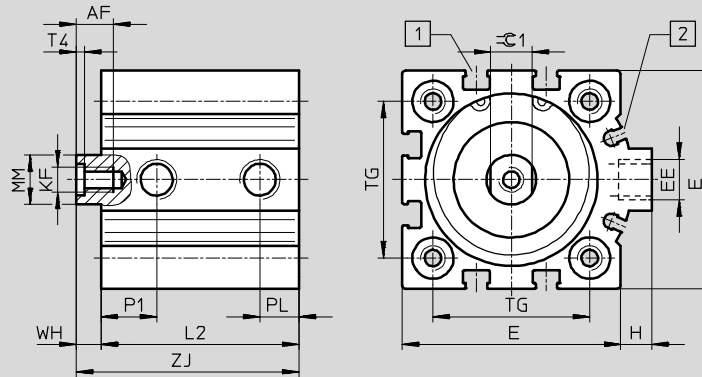

ADVC-...-A-P-A**

Piston rod with male thread

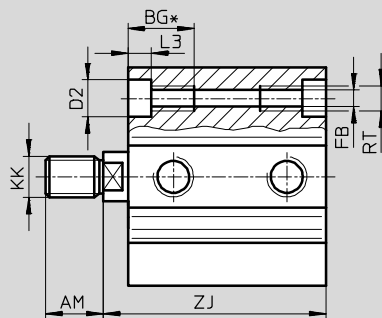

- 1 Slot for proximity sensor SME/SMT-8
- 2 Slot for proximity sensor SME/SMT-10

| ∅ | AF | AM | BG* | D2 | E | EE | FB | H | KF | KK |
|------|------|------|------|------|------|-----------------|-----|-----|-----|----------|
| [mm] | min. | -0.5 | min. | ∅ F9 | max. | | ∅ | | | |
| 32 | 12 | 14 | 21.7 | 9 | 45 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 |
| 40 | 12 | 14 | 21.7 | 9 | 53.5 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 |
| 50 | 16 | 16 | 22.8 | 11 | 63.5 | G $\frac{1}{8}$ | 6.8 | 7 | M8 | M12x1.25 |
| 63 | 16 | 16 | 22.8 | 11 | 75 | G $\frac{1}{8}$ | 6.8 | 7.5 | M8 | M12x1.25 |
| 80 | 20 | 22 | 25 | 14 | 93 | G $\frac{1}{8}$ | 8.5 | 7 | M10 | M16x1.5 |
| 100 | 24 | 28 | 25 | 14 | 113 | G $\frac{1}{4}$ | 8.5 | 13 | M12 | M20x1.5 |

* Continuous thread with short overall length

** Nut for piston rod thread included in scope of delivery

Short-stroke cylinders ADVC


Technical data, double-acting – with position sensing

| ∅ [mm] | Stroke [mm] | L2 +0.2 | L3 | MM ∅ | P1 | PL | RT | T4 | TG ±0.1 | WH | ZJ ±0.8 | ≈1 |
|-----------|----------------|------------|-----|---------|------|------|-----|-----|------------|----|------------|----|
| 32 | 5 | 38 | 5.7 | 12 | 9 | 8.5 | M6 | 2.6 | 32.5 | 6 | 44 | 10 |
| | 10 | 43 | | | | | | | | | 49 | |
| | 15 | 48 | | | | | | | | | 54 | |
| | 20 | 53 | | | | | | | | | 59 | |
| | 25 | 58 | | | | | | | | | 64 | |
| 40 | 5 | 43 | 5.7 | 12 | 13.5 | 9.5 | M6 | 2.6 | 38 | 6 | 49 | 10 |
| | 10 | 48 | | | | | | | | | 54 | |
| | 15 | 53 | | | | | | | | | 59 | |
| | 20 | 58 | | | | | | | | | 64 | |
| | 25 | 63 | | | | | | | | | 69 | |
| 50 | 10 | 48 | 6.8 | 16 | 11.3 | 9.5 | M8 | 3.3 | 46.5 | 8 | 56 | 13 |
| | 15 | 53 | | | | | | | | | 61 | |
| | 20 | 58 | | | | | | | | | 66 | |
| | 25 | 63 | | | | | | | | | 71 | |
| 63 | 10 | 51 | 6.8 | 16 | 12.5 | 10.5 | M8 | 3.3 | 56.5 | 8 | 59 | 13 |
| | 15 | 56 | | | | | | | | | 64 | |
| | 20 | 61 | | | | | | | | | 69 | |
| | 25 | 66 | | | | | | | | | 74 | |
| 80 | 10 | 59 | 9 | 20 | 15 | 8.5 | M10 | 4.7 | 72 | 8 | 67 | 17 |
| | 15 | 64 | | | | | | | | | 72 | |
| | 20 | 69 | | | | | | | | | 77 | |
| | 25 | 74 | | | | | | | | | 82 | |
| 100 | 10 | 68 | 9 | 25 | 16.5 | 10.5 | M10 | 6.1 | 89 | 10 | 78 | 22 |
| | 15 | 73 | | | | | | | | | 83 | |
| | 20 | 78 | | | | | | | | | 88 | |
| | 25 | 83 | | | | | | | | | 93 | |

Short-stroke cylinders ADVC

Technical data, double-acting – with position sensing


FESTO

| Ordering data | | | | | | | | |
|---|------------------|----------------|--------------------------------|------------------|----------------------------------|------------------|------------------------------|----------------|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | | Piston rod without thread | |
| | | | Part No. | Type | Part No. | Type | Part No. | Type |
|  | 6 | 5 | 188 064 | ADVC-6-5-A-P-A | – | | 526 901 | ADVC-6-5-P-A |
| | | 10 | 188 065 | ADVC-6-10-A-P-A | | | 526 902 | ADVC-6-10-P-A |
| | 10 | 5 | 188 076 | ADVC-10-5-A-P-A | – | | 526 905 | ADVC-10-5-P-A |
| | | 10 | 188 077 | ADVC-10-10-A-P-A | | | 526 906 | ADVC-10-10-P-A |
| | 12 | 5 | 188 092 | ADVC-12-5-A-P-A | 188 088 | ADVC-12-5-I-P-A | 530 572 | ADVC-12-5-P-A |
| | | 10 | 188 093 | ADVC-12-10-A-P-A | 188 089 | ADVC-12-10-I-P-A | 530 573 | ADVC-12-10-P-A |
| | 16 | 5 | 188 118 | ADVC-16-5-A-P-A | 188 108 | ADVC-16-5-I-P-A | – | |
| | | 10 | 188 119 | ADVC-16-10-A-P-A | 188 109 | ADVC-16-10-I-P-A | | |
| | | 15 | 188 120 | ADVC-16-15-A-P-A | 188 110 | ADVC-16-15-I-P-A | | |
| | | 20 | 188 121 | ADVC-16-20-A-P-A | 188 111 | ADVC-16-20-I-P-A | | |
| | | 25 | 188 122 | ADVC-16-25-A-P-A | 188 112 | ADVC-16-25-I-P-A | | |
| | 20 | 5 | 188 150 | ADVC-20-5-A-P-A | 188 140 | ADVC-20-5-I-P-A | – | |
| | | 10 | 188 151 | ADVC-20-10-A-P-A | 188 141 | ADVC-20-10-I-P-A | | |
| | | 15 | 188 152 | ADVC-20-15-A-P-A | 188 142 | ADVC-20-15-I-P-A | | |
| | | 20 | 188 153 | ADVC-20-20-A-P-A | 188 143 | ADVC-20-20-I-P-A | | |
| | | 25 | 188 154 | ADVC-20-25-A-P-A | 188 144 | ADVC-20-25-I-P-A | | |
| | 25 | 5 | 188 182 | ADVC-25-5-A-P-A | 188 172 | ADVC-25-5-I-P-A | – | |
| | | 10 | 188 183 | ADVC-25-10-A-P-A | 188 173 | ADVC-25-10-I-P-A | | |
| | | 15 | 188 184 | ADVC-25-15-A-P-A | 188 174 | ADVC-25-15-I-P-A | | |
| | | 20 | 188 185 | ADVC-25-20-A-P-A | 188 175 | ADVC-25-20-I-P-A | | |
| 25 | | 188 186 | ADVC-25-25-A-P-A | 188 176 | ADVC-25-25-I-P-A | | | |

Short-stroke cylinders ADVC

Technical data, double-acting – with position sensing




| Ordering data | | | | | | |
|---|------------------|----------------|--------------------------------|-------------------|----------------------------------|-------------------|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | |
| | | | Part No. | Type | Part No. | Type |
|  | 32 | 5 | 188 214 | ADVC-32-5-A-P-A | 188 204 | ADVC-32-5-I-P-A |
| | | 10 | 188 215 | ADVC-32-10-A-P-A | 188 205 | ADVC-32-10-I-P-A |
| | | 15 | 188 216 | ADVC-32-15-A-P-A | 188 206 | ADVC-32-15-I-P-A |
| | | 20 | 188 217 | ADVC-32-20-A-P-A | 188 207 | ADVC-32-20-I-P-A |
| | | 25 | 188 218 | ADVC-32-25-A-P-A | 188 208 | ADVC-32-25-I-P-A |
| | 40 | 5 | 188 242 | ADVC-40-5-A-P-A | 188 232 | ADVC-40-5-I-P-A |
| | | 10 | 188 243 | ADVC-40-10-A-P-A | 188 233 | ADVC-40-10-I-P-A |
| | | 15 | 188 244 | ADVC-40-15-A-P-A | 188 234 | ADVC-40-15-I-P-A |
| | | 20 | 188 245 | ADVC-40-20-A-P-A | 188 235 | ADVC-40-20-I-P-A |
| | | 25 | 188 246 | ADVC-40-25-A-P-A | 188 236 | ADVC-40-25-I-P-A |
| | 50 | 10 | 188 268 | ADVC-50-10-A-P-A | 188 260 | ADVC-50-10-I-P-A |
| | | 15 | 188 269 | ADVC-50-15-A-P-A | 188 261 | ADVC-50-15-I-P-A |
| | | 20 | 188 270 | ADVC-50-20-A-P-A | 188 262 | ADVC-50-20-I-P-A |
| | | 25 | 188 271 | ADVC-50-25-A-P-A | 188 263 | ADVC-50-25-I-P-A |
| | 63 | 10 | 188 292 | ADVC-63-10-A-P-A | 188 284 | ADVC-63-10-I-P-A |
| | | 15 | 188 293 | ADVC-63-15-A-P-A | 188 285 | ADVC-63-15-I-P-A |
| | | 20 | 188 294 | ADVC-63-20-A-P-A | 188 286 | ADVC-63-20-I-P-A |
| | | 25 | 188 295 | ADVC-63-25-A-P-A | 188 287 | ADVC-63-25-I-P-A |
| | 80 | 10 | 188 316 | ADVC-80-10-A-P-A | 188 308 | ADVC-80-10-I-P-A |
| | | 15 | 188 317 | ADVC-80-15-A-P-A | 188 309 | ADVC-80-15-I-P-A |
| | | 20 | 188 318 | ADVC-80-20-A-P-A | 188 310 | ADVC-80-20-I-P-A |
| | | 25 | 188 319 | ADVC-80-25-A-P-A | 188 311 | ADVC-80-25-I-P-A |
| | 100 | 10 | 188 340 | ADVC-100-10-A-P-A | 188 332 | ADVC-100-10-I-P-A |
| | | 15 | 188 341 | ADVC-100-15-A-P-A | 188 333 | ADVC-100-15-I-P-A |
| | | 20 | 188 342 | ADVC-100-20-A-P-A | 188 334 | ADVC-100-20-I-P-A |
| | | 25 | 188 343 | ADVC-100-25-A-P-A | 188 335 | ADVC-100-25-I-P-A |

Short-stroke cylinders AEVC

Technical data, single-acting – without position sensing



- \varnothing - Diameter
4 ... 100 mm
- | - Stroke length
2.5 ... 25 mm

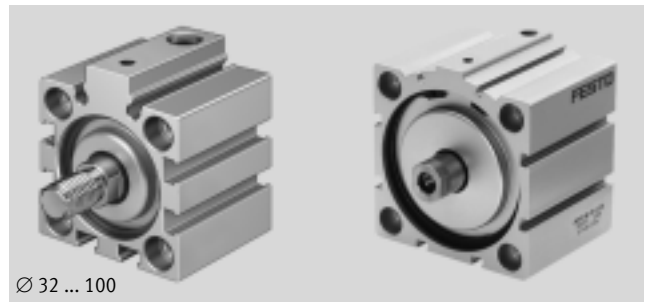

| General technical data | | | | | | | | | | | | | |
|--------------------------------|--|----|----|----|----|----|----|------|-------------------|------|------|------|------|
| Piston Ø | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Pneumatic connection | M3 | M3 | M5 | M5 | M5 | M5 | M5 | G1/8 | G1/8 | G1/8 | G1/8 | G1/8 | G1/4 |
| Piston rod with female thread | - | - | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod with male thread | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod without thread | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | - |
| Operating medium | Compressed air in accordance with ISO 8573-1:2010 [7:4:4] | | | | | | | | | | | | |
| Note on operating/pilot medium | Operation with lubricated medium possible (in which case lubricated operation will always be required) | | | | | | | | | | | | |
| Constructional design | Piston | | | | | | | | | | | | |
| | Piston rod | | | | | | | | | | | | |
| Cushioning | Flexible cushioning rings/plates at both ends | | | | | | | | | | | | |
| Type of mounting | Via through-holes | | | | | | | | Via through-holes | | | | |
| | - | | | | | | | | Via accessories | | | | |
| Mounting position | Any | | | | | | | | | | | | |

| Operating conditions | | | | | | | | | | | | | |
|--|-------------|---------|-----------|------------|----------|----|----|----|----|----|----|----|-----|
| Piston Ø | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Operating pressure [bar] | 2.5 ... 8 | 2 ... 8 | 1.5 ... 8 | 1.5 ... 10 | 1 ... 10 | | | | | | | | |
| Ambient temperature [°C] | -20 ... +80 | | | | | | | | | | | | |
| Corrosion resistance class CRC ¹⁾ | 1 | | | | | | | | | | | | |


1) Corrosion resistance class 1 according to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers

Short-stroke cylinders AEVC

Technical data, single-acting – without position sensing

| Forces [N] and impact energy [J] | | | | | | | | | | | | | |
|---------------------------------------|-------|-------|------|------|------|------------------|------|------|------|-------|-------|-------|-------|
| Piston \varnothing | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Theoretical force at 6 bar, advancing | 5 | 11 | 41 | 59 | 105 | 170 | 270 | 450 | 700 | 1,120 | 1,800 | 2,900 | 4,500 |
| Theoretical force at 6 bar, returning | 1 | 3 | 3 | 4 | 5 | 10 ¹⁾ | 15 | 22 | 28 | 40 | 50 | 85 | 140 |
| Max. impact energy at end positions | 0.003 | 0.005 | 0.03 | 0.06 | 0.10 | 0.14 | 0.18 | 0.26 | 0.36 | 0.60 | 0.64 | 0.90 | 1.20 |

1) AEVC-20-5-... = 5 N


 Note The degree of friction depends upon the mounting position, and the type of load involved. Single-acting cylinders should as far as possible be operated without lateral forces.

| Product weight [g] | | | | | | | | | | | | | |
|--------------------|----------------------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-------|-------|
| Stroke [mm] | Piston \varnothing | | | | | | | | | | | | |
| | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 2.5 | 3.7 | – | – | – | – | – | – | – | – | – | – | – | – |
| 5 | 4.5 | 12 | 17 | 24 | 60 | 85 | 130 | 220 | – | – | – | – | – |
| 10 | – | 18 | 24 | 40 | 80 | 130 | 160 | 290 | 370 | 410 | 490 | 1,900 | 2,850 |
| 25 | – | – | – | – | 150 | 200 | 250 | 400 | 560 | 680 | 770 | 2,400 | 3,500 |

| Moving load [g] | | | | | | | | | | | | | |
|-----------------|----------------------|-----|-----|-----|----|----|----|----|----|-----|-----|-----|-----|
| Stroke [mm] | Piston \varnothing | | | | | | | | | | | | |
| | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 2.5 | 0.15 | – | – | – | – | – | – | – | – | – | – | – | – |
| 5 | 0.2 | 1 | 2 | 4.4 | 8 | 14 | 22 | 40 | – | – | – | – | – |
| 10 | – | 1.4 | 2.6 | 6.9 | 11 | 21 | 25 | 48 | 65 | 105 | 157 | 327 | 678 |
| 25 | – | – | – | – | 19 | 32 | 37 | 62 | 83 | 140 | 191 | 365 | 739 |

Materials

Sectional view

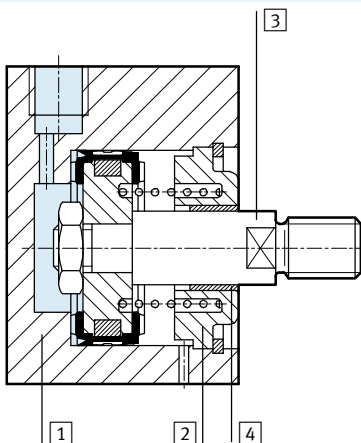

| Short-stroke cylinder | \varnothing 4 | \varnothing 6 ... 100 |
|-----------------------|-----------------------------------|-----------------------------------|
| 1 Cylinder barrel | Anodised aluminium | Anodised aluminium |
| 2 Cover cap | Anodised aluminium | Anodised aluminium |
| 3 Piston rod | Anodised aluminium | High-alloy steel |
| 4 Rod seal | Nitrile rubber | Polyurethane |
| Note on material | Free of copper, PTFE and silicone | Free of copper, PTFE and silicone |

Short-stroke cylinders AEVC

Technical data, single-acting – without position sensing




Dimensions

Download CAD data → www.festo.com

Ø 4 ... 25 mm

AEVC...-I-P

Piston rod with female thread

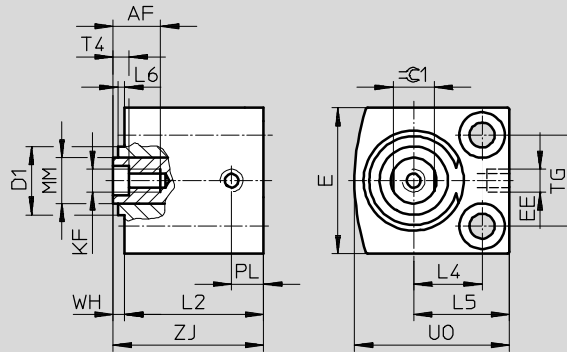

- - Note

Ø 10 mm


Depending on tolerance, the bearing cap may project by up to 0.65 mm.

Ø 12 mm

Depending on tolerance, the bearing cap may project by up to 0.35 mm.


AEVC...-A-P

Piston rod with male thread

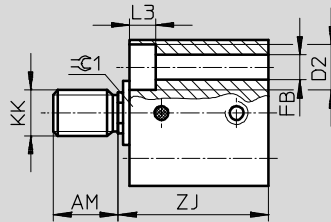

AEVC...-P

Piston rod without thread



Short-stroke cylinders AVEC

Technical data, single-acting – without position sensing

| ∅ [mm] | Stroke [mm] | AF min. | AM -0.5 | D1 ∅ max. | D2 ∅ | E max. | EE | FB ∅ | KF | KK | L2 +0.2 | L3 |
|-----------|----------------|------------|------------|-----------------|---------------------|-----------|----|---------|----|----|------------|-----|
| 4 | 2.5 | - | 6 | - | 3.3 ^{+0.1} | 10 | M3 | 1.8 | - | M2 | 13 | 1.8 |
| | 5 | | | | | | | | | | 15.5 | |
| 6 | 5 | - | 6 | - | 5 ^{+0.1} | 13 | M3 | 2.9 | - | M3 | 16 | 2.9 |
| | 10 | | | | | | | | | | 23.4 | |
| 10 | 5 | - | 8 | 7.5 | 5.8 ^{+0.1} | 18 | M5 | 3.4 | - | M4 | 16 | 3.4 |
| | 10 | | | | | | | | | | 23 | |
| 12 | 5 | 8 | 8 | 10.7 | 6 ^{H13} | 20 | M5 | 3.4 | M3 | M5 | 16 | 3.4 |
| | 10 | | | | | | | | | | 27.5 | |
| 16 | 5 | 10 | 12 | - | 8 ^{H13} | 25 | M5 | 4.5 | M4 | M6 | 20 | 4.6 |
| | 10 | | | | | | | | | | 27.5 | |
| | 25 | | | | | | | | | | 47 | |
| 20 | 5 | 8 | 12 | - | 10 ^{H13} | 32 | M5 | 5.5 | M5 | M8 | 20 | 5.7 |
| | 10 | 12 | | | | | | | | | 30.5 | |
| | 25 | | | | | | | | | | 48.5 | |
| 25 | 5 | 12 | 12 | - | 10 ^{H13} | 38 | M5 | 5.5 | M5 | M8 | 26.1 | 5.7 |
| | 10 | | | | | | | | | | 31.1 | |
| | 25 | | | | | | | | | | 50.2 | |

| ∅ [mm] | Stroke [mm] | L4 | L5 | L6 max. | MM ∅ | PL | T4 | TG ±0.1 | UO max. | WH | ZJ ±0.8 | ≈C1 |
|-----------|----------------|------|------|------------|---------|-----|-----|------------|------------|----|------------|-----|
| 4 | 2.5 | 4 | 6.5 | - | 2 | 3.2 | - | 5.8 | 10 | 1 | 14 | - |
| | 5 | | | | | | | | | | 16.5 | |
| 6 | 5 | 6 | 9 | - | 3 | 3 | - | 7 | 14 | 1 | 17 | - |
| | 10 | | | | | | | | | | 24.4 | |
| 10 | 5 | 8 | 11.5 | 0.7 | 4 | 5.5 | - | 11 | 19 | 1 | 17 | - |
| | 10 | | | | | | | | | | 24 | |
| 12 | 5 | 9 | 13 | 0.4 | 6 | 6 | 1.5 | 13 | 22 | 1 | 17 | - |
| | 10 | | | | | | | | | | 28.5 | |
| 16 | 5 | 11.5 | 16.5 | - | 8 | 6 | 2 | 15 | 27 | 1 | 21 | 7 |
| | 10 | | | | | | | | | | 28.5 | |
| | 25 | | | | | | | | | | 48 | |
| 20 | 5 | 15 | 21 | - | 10 | 7 | 2 | 20 | 34 | 1 | 21 | 9 |
| | 10 | | | | | | | | | | 31.5 | |
| | 25 | | | | | | | | | | 49.5 | |
| 25 | 5 | 15.5 | 21.5 | - | 10 | 6.5 | 2 | 26 | 37 | 1 | 27.1 | 9 |
| | 10 | | | | | | | | | | 32.1 | |
| | 25 | | | | | | | | | | 51.2 | |

Short-stroke cylinders AEVC

Technical data, single-acting – without position sensing




Dimensions

Download CAD data → www.festo.com

∅ 32 ... 100 mm


AEVC-...-I-P

Piston rod with female thread

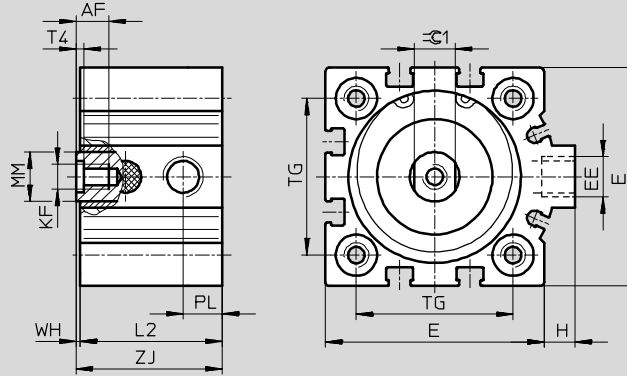

AEVC-...-A-P**

Piston rod with male thread

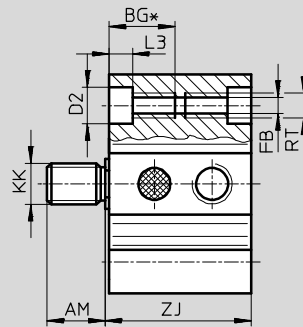


| ∅ | Stroke | AF | AM | BG* | D2 | E | EE | FB | H | KF | KK | L2 | L3 | MM | PL | RT | T4 | TG | WH | ZJ | $\approx \varnothing 1$ |
|------|--------|------|------|------|----|------|-----------------|-----|-----|-----|----------|------|-----|----|------|-----|-----|------|-----|------|-------------------------|
| [mm] | [mm] | min. | -0.5 | min. | F9 | max. | | ∅ | | | | +0.2 | | ∅ | | | | ±0.1 | | ±0.8 | |
| 32 | 5 | 12 | 14 | 21.7 | 9 | 45 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 | 26 | 5.7 | 12 | 9.5 | M6 | 2.6 | 32.5 | 1 | 27 | 10 |
| | 35 | | | | | | | | | | | 36 | | | | | | | | | |
| | 50 | | | | | | | | | | | 51 | | | | | | | | | |
| 40 | 10 | 12 | 14 | 21.7 | 9 | 53.5 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 | 34.5 | 5.7 | 12 | 9.5 | M6 | 2.6 | 38 | 1 | 35.5 | 10 |
| | 54.5 | | | | | | | | | | | 55.5 | | | | | | | | | |
| 50 | 10 | 16 | 16 | 22.8 | 11 | 63.5 | G $\frac{1}{8}$ | 6.8 | 7 | M8 | M12x1.25 | 30.6 | 6.8 | 16 | 9.5 | M8 | 3.3 | 46.5 | 0.5 | 31.1 | 13 |
| | 53 | | | | | | | | | | | 53.5 | | | | | | | | | |
| 63 | 10 | 16 | 16 | 22.8 | 11 | 75 | G $\frac{1}{8}$ | 6.8 | 7.5 | M8 | M12x1.25 | 35 | 6.8 | 16 | 11.5 | M8 | 3.3 | 56.5 | 1 | 36 | 13 |
| | 57 | | | | | | | | | | | 58 | | | | | | | | | |
| 80 | 10 | 20 | 22 | 25 | 14 | 93 | G $\frac{1}{8}$ | 8.5 | 7 | M10 | M16x1.5 | 52 | 9 | 20 | 15 | M10 | 4.7 | 72 | 1 | 53 | 17 |
| | 67 | | | | | | | | | | | 68 | | | | | | | | | |
| 100 | 10 | 24 | 28 | 25 | 14 | 113 | G $\frac{1}{4}$ | 8.5 | 13 | M12 | M20x1.5 | 59 | 9 | 25 | 19 | M10 | 6.1 | 89 | 1 | 60 | 22 |
| | 74 | | | | | | | | | | | 75 | | | | | | | | | |


* Continuous thread with short overall length

** Nut for piston rod thread included in scope of delivery

Short-stroke cylinders AEVC

Technical data, single-acting – without position sensing

| Ordering data | | | | | | |
|---|------------------|----------------|--------------------------------|----------------|----------------------------------|----------------------|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | |
| | | | Part No. | Type | Part No. | Type |
|  | 4 | 2.5 | 188 052 | AEVC-4-2,5-A-P | - | 188 050 AEVC-4-2,5-P |
| | | 5 | 188 053 | AEVC-4-5-A-P | | 188 051 AEVC-4-5-P |
| | 6 | 5 | 188 062 | AEVC-6-5-A-P | - | 188 058 AEVC-6-5-P |
| | | 10 | 188 063 | AEVC-6-10-A-P | | 188 059 AEVC-6-10-P |
| | 10 | 5 | 188 074 | AEVC-10-5-A-P | - | 188 070 AEVC-10-5-P |
| | | 10 | 188 075 | AEVC-10-10-A-P | | 188 071 AEVC-10-10-P |
| | 12 | 5 | 188 086 | AEVC-12-5-A-P | 188 082 AEVC-12-5-I-P | 530 566 AEVC-12-5-P |
| | | 10 | 188 087 | AEVC-12-10-A-P | 188 083 AEVC-12-10-I-P | 530 567 AEVC-12-10-P |
| | 16 | 5 | 188 105 | AEVC-16-5-A-P | 188 099 AEVC-16-5-I-P | - |
| | | 10 | 188 106 | AEVC-16-10-A-P | 188 100 AEVC-16-10-I-P | |
| | | 25 | 188 107 | AEVC-16-25-A-P | 188 101 AEVC-16-25-I-P | |
| | 20 | 5 | 188 137 | AEVC-20-5-A-P | 188 131 AEVC-20-5-I-P | - |
| | | 10 | 188 138 | AEVC-20-10-A-P | 188 132 AEVC-20-10-I-P | |
| | | 25 | 188 139 | AEVC-20-25-A-P | 188 133 AEVC-20-25-I-P | |
| | 25 | 5 | 188 169 | AEVC-25-5-A-P | 188 163 AEVC-25-5-I-P | - |
| | | 10 | 188 170 | AEVC-25-10-A-P | 188 164 AEVC-25-10-I-P | |
| | | 25 | 188 171 | AEVC-25-25-A-P | 188 165 AEVC-25-25-I-P | |



| Ordering data | | | | | | |
|---|------------------|----------------|--------------------------------|-----------------|----------------------------------|------|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | |
| | | | Part No. | Type | Part No. | Type |
|  | 32 | 5 | 188 201 | AEVC-32-5-A-P | 188 195 AEVC-32-5-I-P | |
| | | 10 | 188 202 | AEVC-32-10-A-P | 188 196 AEVC-32-10-I-P | |
| | | 25 | 188 203 | AEVC-32-25-A-P | 188 197 AEVC-32-25-I-P | |
| | 40 | 10 | 188 230 | AEVC-40-10-A-P | 188 226 AEVC-40-10-I-P | |
| | | 25 | 188 231 | AEVC-40-25-A-P | 188 227 AEVC-40-25-I-P | |
| | 50 | 10 | 188 258 | AEVC-50-10-A-P | 188 254 AEVC-50-10-I-P | |
| | | 25 | 188 259 | AEVC-50-25-A-P | 188 255 AEVC-50-25-I-P | |
| | 63 | 10 | 188 282 | AEVC-63-10-A-P | 188 278 AEVC-63-10-I-P | |
| | | 25 | 188 283 | AEVC-63-25-A-P | 188 279 AEVC-63-25-I-P | |
| | 80 | 10 | 188 306 | AEVC-80-10-A-P | 188 302 AEVC-80-10-I-P | |
| | | 25 | 188 307 | AEVC-80-25-A-P | 188 303 AEVC-80-25-I-P | |
| | 100 | 10 | 188 330 | AEVC-100-10-A-P | 188 326 AEVC-100-10-I-P | |
| | | 25 | 188 331 | AEVC-100-25-A-P | 188 327 AEVC-100-25-I-P | |

Short-stroke cylinders AEVC

Technical data, single-acting – with position sensing



- Diameter
6 ... 100 mm
- Stroke length
5 ... 25 mm

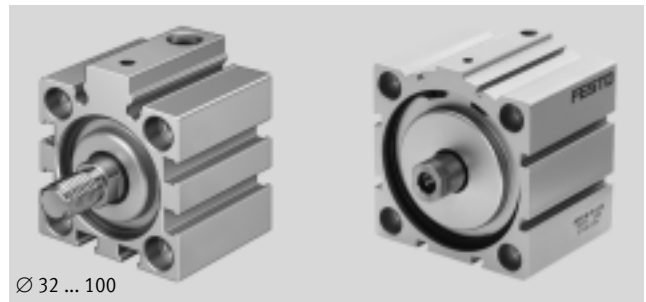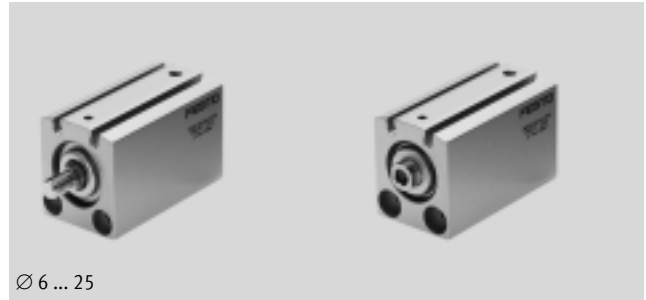

| General technical data | | | | | | | | | | | | |
|--------------------------------|--|----|----|----|----|----|-------------------|------|------|------|------|------|
| Piston Ø | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Pneumatic connection | M3 | M5 | M5 | M5 | M5 | M5 | G1/8 | G1/8 | G1/8 | G1/8 | G1/8 | G1/4 |
| Piston rod with female thread | – | – | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod with male thread | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Piston rod without thread | ■ | ■ | ■ | – | – | – | – | – | – | – | – | – |
| Operating medium | Compressed air in accordance with ISO 8573-1:2010 [7:4:4] | | | | | | | | | | | |
| Note on operating/pilot medium | Operation with lubricated medium possible (in which case lubricated operation will always be required) | | | | | | | | | | | |
| Constructional design | Piston | | | | | | | | | | | |
| | Piston rod | | | | | | | | | | | |
| Cushioning | Flexible cushioning rings/plates at both ends | | | | | | | | | | | |
| Position sensing | For proximity sensing | | | | | | | | | | | |
| Type of mounting | Via through-holes | | | | | | Via through-holes | | | | | |
| | – | | | | | | Via accessories | | | | | |
| Mounting position | Any | | | | | | | | | | | |

| Operating conditions | | | | | | | | | | | | |
|--|---|-----------|------------|----|----|----|----------|----|----|----|----|-----|
| Piston Ø | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Operating pressure [bar] | 2 ... 8 | 1.5 ... 8 | 1.5 ... 10 | | | | 1 ... 10 | | | | | |
| Ambient temperature [°C] | –20 ... +80 (note operating range of proximity sensors) | | | | | | | | | | | |
| Corrosion resistance class CRC ¹⁾ | 1 | | | | | | | | | | | |


1) Corrosion resistance class 1 according to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers

Short-stroke cylinders AEVC

Technical data, single-acting – with position sensing

| Forces [N] and impact energy [J] | | | | | | | | | | | | |
|---------------------------------------|-------|------|------|------|------------------|------|------|------|-------|-------|-------|-------|
| Piston Ø | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| Theoretical force at 6 bar, advancing | 11 | 41 | 59 | 105 | 170 | 270 | 450 | 700 | 1,120 | 1,800 | 2,900 | 4,500 |
| Theoretical force at 6 bar, returning | 3 | 3 | 4 | 5 | 10 ¹⁾ | 15 | 22 | 28 | 40 | 50 | 85 | 140 |
| Max. impact energy at end positions | 0.005 | 0.03 | 0.06 | 0.10 | 0.14 | 0.18 | 0.26 | 0.36 | 0.60 | 0.64 | 0.90 | 1.20 |

1) AEVC-20-5-... = 5 N


 Note The degree of friction depends upon the mounting position, and the type of load involved. Single-acting cylinders should as far as possible be operated without lateral forces.

| Product weight [g] | | | | | | | | | | | | |
|--------------------|----------|----|----|-----|-----|-----|-----|-----|-----|-----|-------|-------|
| Stroke [mm] | Piston Ø | | | | | | | | | | | |
| | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 5 | 19 | 37 | 70 | 95 | 160 | 195 | 320 | – | – | – | – | – |
| 10 | 23 | 44 | 79 | 105 | 170 | 205 | 340 | 490 | 630 | 720 | 1,940 | 2,970 |
| 25 | – | – | – | 130 | 200 | 250 | 390 | 580 | 730 | 870 | 3,290 | 3,220 |

| Moving load [g] | | | | | | | | | | | | |
|-----------------|----------|-----|-----|----|----|----|----|----|-----|-----|-----|-----|
| Stroke [mm] | Piston Ø | | | | | | | | | | | |
| | 6 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| 5 | 1.5 | 3 | 8.5 | 15 | 26 | 32 | 49 | – | – | – | – | – |
| 10 | 1.8 | 3.5 | 9.5 | 17 | 29 | 35 | 54 | 70 | 116 | 155 | 284 | 546 |
| 25 | – | – | – | 26 | 40 | 47 | 67 | 83 | 140 | 179 | 321 | 604 |

Materials

Sectional view

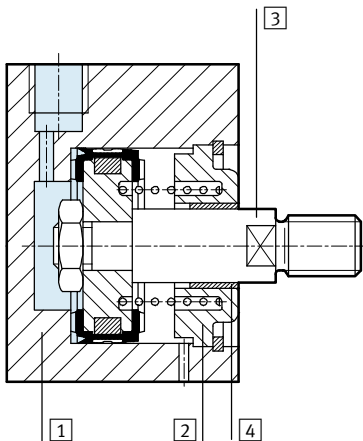

| Short-stroke cylinder | |
|---|---------------------------------------|
| 1 | Cylinder barrel Anodised aluminium |
| 2 | Cover cap Anodised aluminium |
| 3 | Piston rod High-alloy steel |
| 4 | Rod seal Polyurethane |
| Note on material Free of copper, PTFE and silicone | |

Short-stroke cylinders AEVC

Technical data, single-acting – with position sensing


Dimensions

Download CAD data → www.festo.com

∅ 6 ... 25 mm

AEVC-...-I-P-A

Piston rod with female thread

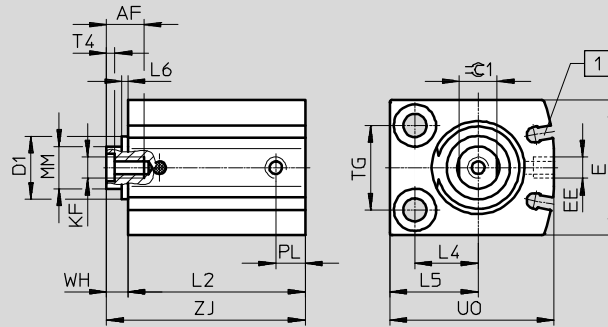

- Note

∅ 10 mm


Depending on tolerance, the bearing cap may project by up to 0.65 mm.

∅ 12 mm

Depending on tolerance, the bearing cap may project by up to 0.35 mm.


AEVC-...-A-P-A

Piston rod with male thread

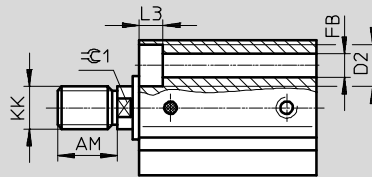

AEVC-...-P-A

Piston rod without thread

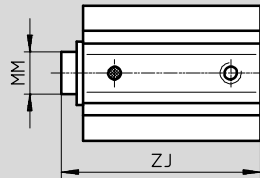

1 Slot for proximity sensor
SME/SMT-10

Short-stroke cylinders AVEC

FESTO

Technical data, single-acting – with position sensing

| ∅ [mm] | Stroke [mm] | AF min. | AM -0.5 | D1 ∅ max. | D2 ∅ | E max. | EE | FB ∅ | KF | KK | L2 +0.2 | L3 |
|-----------|----------------|------------|------------|-----------------|----------|-----------|----|---------|----|----|------------|-----|
| 6 | 5 | - | 6 | - | 5 +0.1 | 16 | M3 | 2.9 | - | M3 | 25.5 | 2.9 |
| | 10 | | | | | | | | | | 30.5 | |
| 10 | 5 | - | 8 | 7.5 | 5.8 +0.1 | 21 | M5 | 3.4 | - | M4 | 27 | 3.4 |
| | 10 | | | | | | | | | | 32 | |
| 12 | 5 | 8 | 8 | 10.7 | 6 H13 | 24 | M5 | 3.4 | M3 | M5 | 36 | 3.4 |
| | 10 | | | | | | | | | | 41 | |
| 16 | 5 | 10 | 12 | - | 8 H13 | 28 | M5 | 4.5 | M4 | M6 | 35 | 4.6 |
| | 10 | | | | | | | | | | 40 | |
| | 25 | | | | | | | | | | 59.5 | |
| 20 | 5 | 12 | 12 | - | 10 H13 | 32 | M5 | 5.5 | M5 | M8 | 37 | 5.7 |
| | 10 | | | | | | | | | | 42 | |
| | 25 | | | | | | | | | | 60 | |
| 25 | 5 | 12 | 12 | - | 10 H13 | 38 | M5 | 5.5 | M5 | M8 | 37 | 5.7 |
| | 10 | | | | | | | | | | 42 | |
| | 25 | | | | | | | | | | 61.1 | |

| ∅ [mm] | Stroke [mm] | L4 | L5 | L6 max. | MM ∅ | PL | T4 | TG ±0.1 | U0 max. | WH | ZJ ±0.8 | ≈C1 |
|-----------|----------------|------|------|------------|---------|----|-----|------------|------------|-----|------------|-----|
| 6 | 5 | 5 | 8 | - | 3 | 3 | - | 10 | 16 | 1 | 26.5 | - |
| | 10 | | | | | | | | | | 31.5 | |
| 10 | 5 | 7 | 10.5 | 0.7 | 4 | 6 | - | 14 | 22 | 1.5 | 28.5 | - |
| | 10 | | | | | | | | | | 33.5 | |
| 12 | 5 | 8 | 12 | 0.4 | 6 | 6 | 1.5 | 16 | 26 | 4 | 40 | 5 |
| | 10 | | | | | | | | | | 45 | |
| 16 | 5 | 12 | 17 | - | 8 | 6 | 2 | 18 | 32 | 4 | 39 | 7 |
| | 10 | | | | | | | | | | 44 | |
| | 25 | | | | | | | | | | 63.5 | |
| 20 | 5 | 15 | 21 | - | 10 | 7 | 2 | 20 | 39 | 5 | 42 | 9 |
| | 10 | | | | | | | | | | 47 | |
| | 25 | | | | | | | | | | 65 | |
| 25 | 5 | 15.5 | 21.5 | - | 10 | 6 | 2 | 26 | 42 | 5 | 42 | 9 |
| | 10 | | | | | | | | | | 47 | |
| | 25 | | | | | | | | | | 66.1 | |

Short-stroke cylinders AEVC

Technical data, single-acting – with position sensing




Dimensions

Download CAD data → www.festo.com

∅ 32 ... 100 mm


AEVC...-I-P-A

Piston rod with female thread

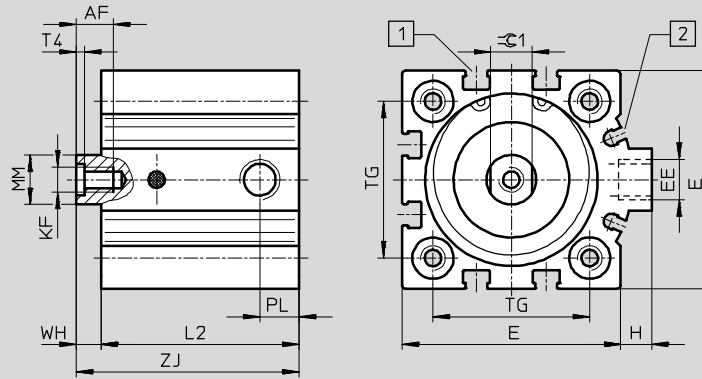

AEVC...-A-P-A**

Piston rod with male thread

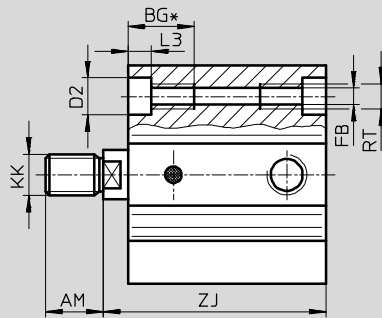

- 1 Slot for proximity sensor SME/SMT-8
- 2 Slot for proximity sensor SME/SMT-10

| ∅ | Stroke [mm] | AF min. | AM -0.5 | BG* min. | D2 ∅ F9 | E max. | EE ∅ | FB ∅ | H | KF | KK | L2 | L3 | MM ∅ | PL | RT | T4 | TG | WH | ZJ | ≈C1 |
|-----|----------------|------------|------------|-------------|---------------|-----------|-----------------|---------|-----|-----|----------|----|-----|---------|------|-----|-----|------|----|----|-----|
| | | | | | | | | | | | | | | | | | | | | | |
| 32 | 5 | 12 | 14 | 21.7 | 9 | 45 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 | 38 | 5.7 | 12 | 8.5 | M6 | 2.6 | 32.5 | 6 | 44 | 10 |
| | 43 | | | | | | | | | | | 49 | | | | | | | | | |
| | 58 | | | | | | | | | | | 64 | | | | | | | | | |
| 40 | 10 | 12 | 14 | 21.7 | 9 | 53.5 | G $\frac{1}{8}$ | 5.2 | 7 | M6 | M10x1.25 | 48 | 5.7 | 12 | 9.5 | M6 | 2.6 | 38 | 6 | 54 | 10 |
| | 63 | | | | | | | | | | | 69 | | | | | | | | | |
| 50 | 10 | 16 | 16 | 22.8 | 11 | 63.5 | G $\frac{1}{8}$ | 6.8 | 7 | M8 | M12x1.25 | 50 | 6.8 | 16 | 9.5 | M8 | 3.3 | 46.5 | 8 | 58 | 13 |
| | 65 | | | | | | | | | | | 73 | | | | | | | | | |
| 63 | 10 | 16 | 16 | 22.8 | 11 | 75 | G $\frac{1}{8}$ | 6.8 | 7.5 | M8 | M12x1.25 | 51 | 6.8 | 16 | 10.5 | M8 | 3.3 | 56.5 | 8 | 59 | 13 |
| | 66 | | | | | | | | | | | 74 | | | | | | | | | |
| 80 | 10 | 20 | 22 | 25 | 14 | 93 | G $\frac{1}{8}$ | 8.5 | 7 | M10 | M16x1.5 | 59 | 9 | 20 | 8.5 | M10 | 4.7 | 72 | 8 | 67 | 17 |
| | 74 | | | | | | | | | | | 82 | | | | | | | | | |
| 100 | 10 | 24 | 28 | 25 | 14 | 113 | G $\frac{1}{4}$ | 8.5 | 13 | M12 | M20x1.5 | 68 | 9 | 25 | 10.5 | M10 | 6.1 | 89 | 10 | 78 | 22 |
| | 83 | | | | | | | | | | | 93 | | | | | | | | | |


* Continuous thread with short overall length


** Nut for piston rod thread included in scope of delivery

Short-stroke cylinders AEVC

Technical data, single-acting – with position sensing



| Ordering data | | | | | | | | |
|---|------------------|----------------|--------------------------------|------------------|----------------------------------|------------------|------------------------------|----------------|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | | Piston rod without thread | |
| | | | Part No. | Type | Part No. | Type | Part No. | Type |
|  | 6 | 5 | 188 060 | AEVC-6-5-A-P-A | – | | 188 056 | AEVC-6-5-P-A |
| | | 10 | 188 061 | AEVC-6-10-A-P-A | | | 188 057 | AEVC-6-10-P-A |
| | 10 | 5 | 188 072 | AEVC-10-5-A-P-A | – | | 188 068 | AEVC-10-5-P-A |
| | | 10 | 188 073 | AEVC-10-10-A-P-A | | | 188 069 | AEVC-10-10-P-A |
| | 12 | 5 | 188 084 | AEVC-12-5-A-P-A | 188 080 | AEVC-12-5-I-P-A | 530 570 | AEVC-12-5-P-A |
| | | 10 | 188 085 | AEVC-12-10-A-P-A | 188 081 | AEVC-12-10-I-P-A | 530 571 | AEVC-12-10-P-A |
| | 16 | 5 | 188 102 | AEVC-16-5-A-P-A | 188 096 | AEVC-16-5-I-P-A | – | |
| | | 10 | 188 103 | AEVC-16-10-A-P-A | 188 097 | AEVC-16-10-I-P-A | | |
| | | 25 | 188 104 | AEVC-16-25-A-P-A | 188 098 | AEVC-16-25-I-P-A | | |
| | 20 | 5 | 188 134 | AEVC-20-5-A-P-A | 188 128 | AEVC-20-5-I-P-A | – | |
| | | 10 | 188 135 | AEVC-20-10-A-P-A | 188 129 | AEVC-20-10-I-P-A | | |
| | | 25 | 188 136 | AEVC-20-25-A-P-A | 188 130 | AEVC-20-25-I-P-A | | |
| | 25 | 5 | 188 166 | AEVC-25-5-A-P-A | 188 160 | AEVC-25-5-I-P-A | – | |
| | | 10 | 188 167 | AEVC-25-10-A-P-A | 188 161 | AEVC-25-10-I-P-A | | |
| | | 25 | 188 168 | AEVC-25-25-A-P-A | 188 162 | AEVC-25-25-I-P-A | | |

| Ordering data | | | | | | | | |
|---|------------------|----------------|--------------------------------|-------------------|----------------------------------|-------------------|--|--|
| Type | Piston Ø [mm] | Stroke [mm] | Piston rod with male thread | | Piston rod with female thread | | | |
| | | | Part No. | Type | Part No. | Type | | |
|  | 32 | 5 | 188 198 | AEVC-32-5-A-P-A | 188 192 | AEVC-32-5-I-P-A | | |
| | | 10 | 188 199 | AEVC-32-10-A-P-A | 188 193 | AEVC-32-10-I-P-A | | |
| | | 25 | 188 200 | AEVC-32-25-A-P-A | 188 194 | AEVC-32-25-I-P-A | | |
| | 40 | 10 | 188 228 | AEVC-40-10-A-P-A | 188 224 | AEVC-40-10-I-P-A | | |
| | | 25 | 188 229 | AEVC-40-25-A-P-A | 188 225 | AEVC-40-25-I-P-A | | |
| | 50 | 10 | 188 256 | AEVC-50-10-A-P-A | 188 252 | AEVC-50-10-I-P-A | | |
| | | 25 | 188 257 | AEVC-50-25-A-P-A | 188 253 | AEVC-50-25-I-P-A | | |
| | 63 | 10 | 188 280 | AEVC-63-10-A-P-A | 188 276 | AEVC-63-10-I-P-A | | |
| | | 25 | 188 281 | AEVC-63-25-A-P-A | 188 277 | AEVC-63-25-I-P-A | | |
| | 80 | 10 | 188 304 | AEVC-80-10-A-P-A | 188 300 | AEVC-80-10-I-P-A | | |
| | | 25 | 188 305 | AEVC-80-25-A-P-A | 188 301 | AEVC-80-25-I-P-A | | |
| | 100 | 10 | 188 328 | AEVC-100-10-A-P-A | 188 324 | AEVC-100-10-I-P-A | | |
| | | 25 | 188 329 | AEVC-100-25-A-P-A | 188 325 | AEVC-100-25-I-P-A | | |

Short-stroke cylinders ADVC/AEVC



Accessories



Adapter kit DPNC

Material:

- Flange: Wrought aluminium alloy
- Threaded studs, hex nuts: Galvanised steel
- Free of copper and PTFE
- RoHS-compliant

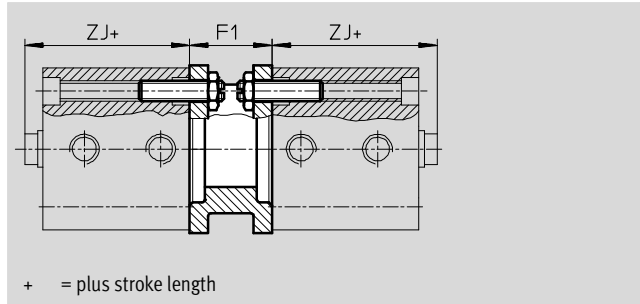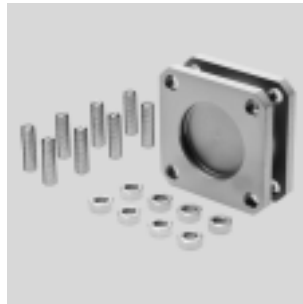

| Dimensions and ordering data | | | | | | | | | |
|------------------------------|----------------|----|----------------------------------|------|-------------------------------|----|---------------|----------|----------|
| For \varnothing [mm] | Stroke [mm] | F1 | ZJ | | | | Weight [g] | Part No. | Type |
| | | | without position sensing ADVC | | with position sensing AEVC | | | | |
| 32 | 5 | 27 | 35 | 22 | 39 | 39 | 85 | 174 418 | DPNC-32 |
| | 10, 15, 20, 25 | | | 26 | | | | | |
| 40 | 5, 10 | 27 | 35.5 | 25.5 | 44 | 44 | 115 | 174 419 | DPNC-40 |
| | 15, 20, 25 | | | 30.5 | | | | | |
| 50 | 10 | 32 | 36 | 21.1 | 46 | 48 | 210 | 174 420 | DPNC-50 |
| | 15, 20, 25 | | | 28.5 | | | | | |
| 63 | 10 | 28 | 43 | 26 | 49 | 49 | 360 | 174 421 | DPNC-63 |
| | 15, 20, 25 | | | 33 | | | | | |
| 80 | 10, 15, 20, 25 | 38 | 48 | 43 | 57 | 57 | 620 | 174 422 | DPNC-80 |
| 100 | 10, 15, 20, 25 | 38 | 59 | 50 | 68 | 68 | 1,190 | 174 423 | DPNC-100 |

Connecting two cylinders with identical piston \varnothing as a 3 or 4-position cylinder

A 3 or 4-position cylinder consists of two separate cylinders whose piston rods advance in opposing directions.


This means that depending upon actuation and stroke pattern, this type of cylinder can assume up to four

positions. In each case the cylinder is driven precisely against a stop. Note that when one end of the piston rod is

fixed, the cylinder barrel executes the movement. The cylinder must be connected with flexible line connections.


To achieve 3 positions

Two cylinders with identical stroke length must be connected together.

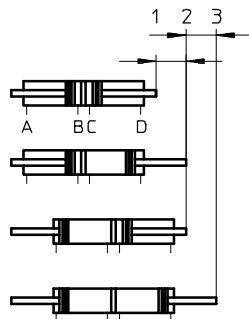

To achieve 4 positions

Two cylinders with different stroke lengths must be connected together.

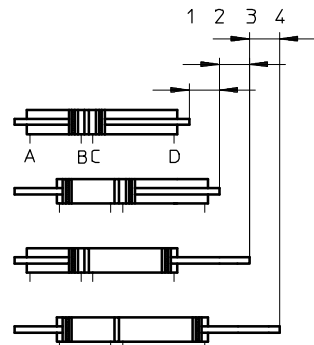


Short-stroke cylinders ADVC/AEVC

Accessories

Foot mounting HNC


Material:
Galvanised steel
Free of copper and PTFE

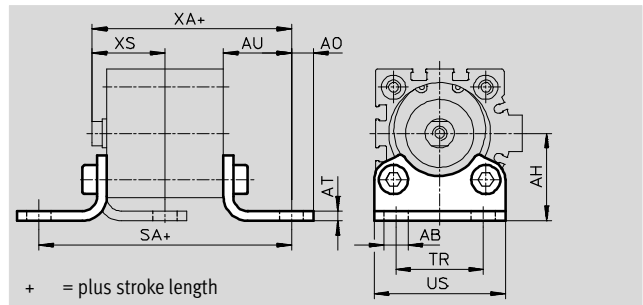

| Dimensions and ordering data | | | | | | | | | | | | |
|------------------------------|----------------|---------|----|------|----|----|--------------------------|------|-----------------------|------|----|-----|
| For Ø [mm] | Stroke [mm] | AB Ø | AH | AO | AT | AU | SA | | | | TR | US |
| | | | | | | | without position sensing | | with position sensing | | | |
| | | | | | | | ADVC | AEVC | ADVC | AEVC | | |
| 32 | 5 | 7 | 32 | 6.5 | 4 | 24 | 77 | 69 | 81 | 81 | 32 | 45 |
| | 10, 15, 20, 25 | | | | | | 73 | | | | | |
| 40 | 5, 10 | 10 | 36 | 9 | 4 | 28 | 85.5 | 80.5 | 94 | 94 | 36 | 54 |
| | 15, 20, 25 | | | | | | | 85.5 | | | | |
| 50 | 10 | 10 | 45 | 9.5 | 5 | 32 | 92 | 84.6 | 102 | 104 | 45 | 64 |
| | 15, 20, 25 | | | | | | | 92 | | | | |
| 63 | 10 | 10 | 50 | 12.5 | 5 | 32 | 99 | 89 | 105 | 105 | 50 | 75 |
| | 15, 20, 25 | | | | | | | 96 | | | | |
| 80 | 10, 15, 20, 25 | 12 | 63 | 15 | 6 | 41 | 122 | 124 | 131 | 131 | 63 | 93 |
| 100 | 10, 15, 20, 25 | 14.5 | 71 | 17.5 | 6 | 41 | 131 | 131 | 140 | 140 | 75 | 110 |

| For Ø [mm] | Stroke [mm] | XA | | | | XS | | | | CRC ¹⁾ | Weight [g] | Part No. | Type |
|---------------|----------------|--------------------------|------|-----------------------|------|--------------------------|------|-----------------------|------|-------------------|---------------|----------|---------|
| | | without position sensing | | with position sensing | | without position sensing | | with position sensing | | | | | |
| | | ADVC | AEVC | ADVC | AEVC | ADVC | AEVC | ADVC | AEVC | | | | |
| 32 | 5 | 59 | 46 | 63 | 63 | 26 | 21 | 26 | 26 | 2 | 144 | 174 369 | HNC-32 |
| | 50 | | | | | | | | | | | | |
| 40 | 5, 10 | 63.5 | 53.5 | 72 | 72 | 30 | 25 | 30 | 30 | 2 | 193 | 174 370 | HNC-40 |
| | 15, 20, 25 | | 58.5 | | | | | | | | | | |
| 50 | 10 | 68 | 53.1 | 78 | 80 | 35 | 27.5 | 35 | 35 | 2 | 353 | 174 371 | HNC-50 |
| | 15, 20, 25 | | 60.5 | | | | | | | | | | |
| 63 | 10 | 75 | 58 | 81 | 81 | 35 | 28 | 35 | 35 | 2 | 436 | 174 372 | HNC-63 |
| | 15, 20, 25 | | 65 | | | | | | | | | | |
| 80 | 10, 15, 20, 25 | 89 | 84 | 98 | 98 | 43 | 36 | 43 | 43 | 2 | 829 | 174 373 | HNC-80 |
| 100 | 10, 15, 20, 25 | 100 | 91 | 109 | 109 | 45 | 36 | 45 | 45 | 2 | 1,009 | 174 374 | HNC-100 |

1) Corrosion resistance class 2 according to Festo standard 940 070
Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

 Note
Screws with special lengths are required to fit the sizes Ø 80 mm and Ø 100 mm. →45


Short-stroke cylinders ADVC/AEVC

Accessories



Flange mounting FNC

Material:
Galvanised steel
Free of copper and PTFE
RoHS-compliant

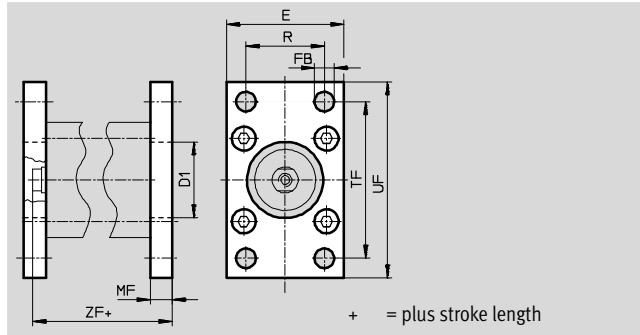

| Dimensions and ordering data | | | | | | | | |
|------------------------------|----------------|----------------------|-----|----------------------|----|----|-----|-----|
| For \varnothing | Stroke | D1 | E | FB | MF | R | TF | UF |
| [mm] | [mm] | \varnothing H11 | | \varnothing H13 | | | | |
| 32 | 5 | 30 | 45 | 7 | 10 | 32 | 64 | 80 |
| | 10, 15, 20, 25 | | | | | | | |
| 40 | 5, 10 | 35 | 54 | 9 | 10 | 36 | 72 | 90 |
| | 15, 20, 25 | | | | | | | |
| 50 | 10 | 40 | 65 | 9 | 12 | 45 | 90 | 110 |
| | 15, 20, 25 | | | | | | | |
| 63 | 10 | 45 | 75 | 9 | 12 | 50 | 100 | 120 |
| | 15, 20, 25 | | | | | | | |
| 80 | 10, 15, 20, 25 | 45 | 93 | 12 | 16 | 63 | 126 | 150 |
| 100 | 10, 15, 20, 25 | 55 | 110 | 14 | 16 | 75 | 150 | 175 |

| For \varnothing | Stroke | ZF | | | | CRC ¹⁾ | Weight | Part No. | Type |
|-------------------|----------------|--------------------------|------|-----------------------|------|-------------------|--------|----------|---------|
| | | without position sensing | | with position sensing | | | | | |
| [mm] | [mm] | ADVC | AEVC | ADVC | AEVC | | [g] | | |
| 32 | 5 | 45 | 32 | 49 | 49 | 1 | 221 | 174 376 | FNC-32 |
| | 10, 15, 20, 25 | | 36 | | | | | | |
| 40 | 5, 10 | 45.5 | 35.5 | 54 | 54 | 1 | 291 | 174 377 | FNC-40 |
| | 15, 20, 25 | | 40.5 | | | | | | |
| 50 | 10 | 48 | 33.5 | 58 | 60 | 1 | 536 | 174 378 | FNC-50 |
| | 15, 20, 25 | | 40.5 | | | | | | |
| 63 | 10 | 55 | 38 | 61 | 61 | 1 | 679 | 174 379 | FNC-63 |
| | 15, 20, 25 | | 45 | | | | | | |
| 80 | 10, 15, 20, 25 | 64 | 59 | 73 | 73 | 1 | 1,495 | 174 380 | FNC-80 |
| 100 | 10, 15, 20, 25 | 75 | 66 | 84 | 84 | 1 | 2,041 | 174 381 | FNC-100 |

1) Corrosion resistance class 1 according to Festo standard 940 070
Components with light corrosion exposure. Protection for transport and storage. Components without significant decorative function or surface, e.g. installed out of sight internally or behind covers.


- - Note
Screws with special lengths are required to fit the sizes \varnothing 80 mm and \varnothing 100 mm. →45

Short-stroke cylinders ADVC/AEVC

Accessories

Trunnion flange ZNCF

Material:
Special steel casting
Free of copper and PTFE
RoHS-compliant

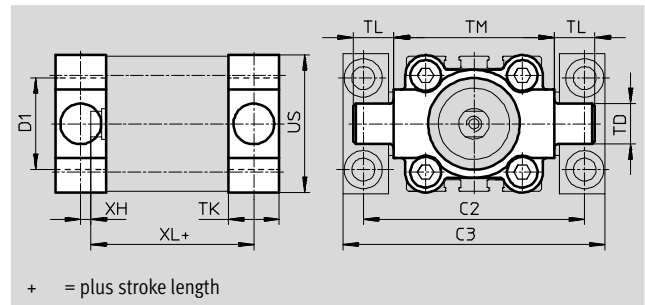

| Dimensions and ordering data | | | | | | | | | | |
|------------------------------|----------------|-----|-----|----------------------|---------------------|----|----|-----|-----|----|
| For \varnothing | Stroke | C2 | C3 | D1 | TD | TK | TL | TM | US | XH |
| [mm] | [mm] | | | \varnothing H11 | \varnothing e9 | | | | | |
| 32 | 5 | 71 | 86 | 30 | 12 | 16 | 12 | 50 | 45 | 2 |
| | 10, 15, 20, 25 | | | | | | | | | |
| 40 | 5, 10 | 87 | 105 | 35 | 16 | 20 | 16 | 63 | 54 | 4 |
| | 15, 20, 25 | | | | | | | | | |
| 50 | 10 | 99 | 117 | 40 | 16 | 24 | 16 | 75 | 64 | 4 |
| | 15, 20, 25 | | | | | | | | | |
| 63 | 10 | 116 | 136 | 45 | 20 | 24 | 20 | 90 | 75 | 4 |
| | 15, 20, 25 | | | | | | | | | |
| 80 | 10, 15, 20, 25 | 136 | 156 | 45 | 20 | 28 | 20 | 110 | 93 | 6 |
| 100 | 10, 15, 20, 25 | 164 | 189 | 55 | 25 | 38 | 25 | 132 | 110 | 9 |

| For \varnothing | Stroke | XL | | | | CRC ¹⁾ | Weight | Part No. | Type |
|-------------------|----------------|--------------------------|------|-----------------------|------|-------------------|--------|----------|----------|
| | | without position sensing | | with position sensing | | | | | |
| [mm] | [mm] | ADVC | AEVC | ADVC | AEVC | | [g] | | |
| 32 | 5 | 43 | 30 | 47 | 47 | 2 | 150 | 174 411 | ZNCF-32 |
| | 10, 15, 20, 25 | | 34 | | | | | | |
| 40 | 5, 10 | 45.5 | 35.5 | 54 | 54 | 2 | 285 | 174 412 | ZNCF-40 |
| | 15, 20, 25 | | 40.5 | | | | | | |
| 50 | 10 | 48 | 33.1 | 58 | 60 | 2 | 473 | 174 413 | ZNCF-50 |
| | 15, 20, 25 | | 40.5 | | | | | | |
| 63 | 10 | 55 | 38 | 61 | 61 | 2 | 687 | 174 414 | ZNCF-63 |
| | 15, 20, 25 | | 45 | | | | | | |
| 80 | 10, 15, 20, 25 | 62 | 57 | 71 | 71 | 2 | 1,296 | 174 415 | ZNCF-80 |
| 100 | 10, 15, 20, 25 | 78 | 69 | 87 | 87 | 2 | 2,254 | 174 416 | ZNCF-100 |

1) Corrosion resistance class 2 according to Festo standard 940 070
Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

- Note
Screws with special lengths are required to fit the sizes \varnothing 80 mm and \varnothing 100 mm. → 45

Short-stroke cylinders ADVC/AEVC

Accessories



Trunnion support LN2G

Material:



Trunnion support:

Anodised aluminium

Plain bearing: Plastic

Free of copper and PTFE

RoHS-compliant

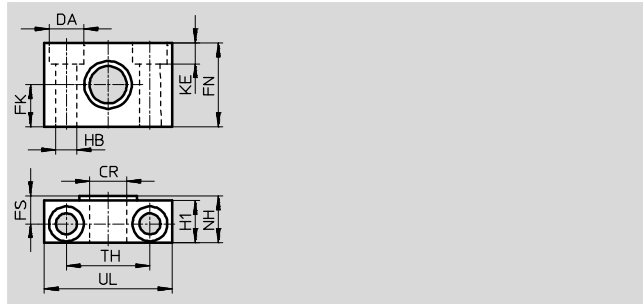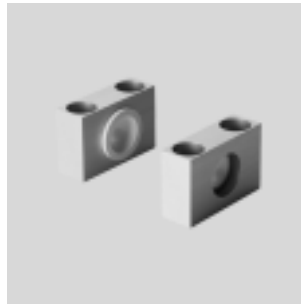

| Dimensions and ordering data | | | | | | | | | | | | | | | |
|------------------------------|---------------|---------------|---------------|----|------|------|---------------|-----|------|-----------|----|-------------------|--------|---------------|---------------------|
| For \varnothing | CR | DA | FK | FN | FS | H1 | HB | KE | NH | TH | UL | CRC ¹⁾ | Weight | Part No. | Type |
| [mm] | \varnothing | \varnothing | \varnothing | | | | \varnothing | | | ± 0.2 | | | [g] | | |
| 32 | 12 | 11 | 15 | 30 | 10.5 | 15 | 6.6 | 6.8 | 18 | 32 | 46 | 2 | 90 | 32 959 | LN2G-32 |
| 40, 50 | 16 | 15 | 18 | 36 | 12 | 18 | 9 | 9 | 21 | 36 | 55 | 2 | 140 | 32 960 | LN2G-40/50 |
| 63, 80 | 20 | 18 | 20 | 40 | 13 | 20 | 11 | 11 | 23 | 42 | 65 | 2 | 190 | 32 961 | LN2G-63/80 |
| 100 | 25 | 20 | 25 | 50 | 16 | 24.5 | 14 | 13 | 28.5 | 50 | 75 | 2 | 320 | 32 962 | LN2G-100/125 |


1) Corrosion resistance class 2 according to Festo standard 940 070
 Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

Short-stroke cylinders ADVC/AEVC

Accessories

Swivel flange SNC

Material:
Die-cast aluminium
Free of copper and PTFE
RoHS-compliant

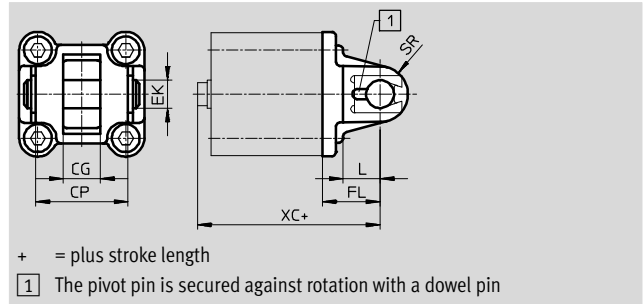

| Dimensions and ordering data | | | | | | | |
|------------------------------|----------------|-----|-----|------------------|-----------|----|----|
| For \varnothing | Stroke | CG | CP | EK | FL | L | SR |
| [mm] | [mm] | H14 | h14 | \varnothing h9 | ± 0.2 | | |
| 32 | 5 | 14 | 34 | 10 | 22 | 13 | 10 |
| | 10, 15, 20, 25 | | | | | | |
| 40 | 5, 10 | 16 | 40 | 12 | 25 | 16 | 12 |
| | 15, 20, 25 | | | | | | |
| 50 | 10 | 21 | 45 | 16 | 27 | 16 | 12 |
| | 15, 20, 25 | | | | | | |
| 63 | 10 | 21 | 51 | 16 | 32 | 21 | 16 |
| | 15, 20, 25 | | | | | | |
| 80 | 10, 15, 20, 25 | 25 | 65 | 20 | 36 | 22 | 16 |
| 100 | 10, 15, 20, 25 | 25 | 75 | 20 | 41 | 27 | 20 |

| For \varnothing | Stroke | XC | | | | CRC ¹⁾ | Weight [g] | Part No. | Type |
|-------------------|----------------|--------------------------|------|-----------------------|------|-------------------|------------|----------|---------|
| | | without position sensing | | with position sensing | | | | | |
| [mm] | [mm] | ADVC | AEVC | ADVC | AEVC | | | | |
| 32 | 5 | 57 | 44 | 61 | 61 | 2 | 90 | 174 383 | SNC-32 |
| | 10, 15, 20, 25 | | 48 | | | | | | |
| 40 | 5, 10 | 60.5 | 50.5 | 69 | 69 | 2 | 120 | 174 384 | SNC-40 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 50 | 10 | 63 | 48.1 | 73 | 75 | 2 | 240 | 174 385 | SNC-50 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 63 | 10 | 75 | 58 | 81 | 81 | 2 | 320 | 174 386 | SNC-63 |
| | 15, 20, 25 | | 65 | | | | | | |
| 80 | 10, 15, 20, 25 | 84 | 79 | 93 | 93 | 2 | 625 | 174 387 | SNC-80 |
| 100 | 10, 15, 20, 25 | 100 | 91 | 109 | 109 | 2 | 830 | 174 388 | SNC-100 |

1) Corrosion resistance class 2 according to Festo standard 940 070
Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents

- Note
Screws with special lengths are required to fit the sizes \varnothing 80 mm and \varnothing 100 mm. → 45


Short-stroke cylinders ADVC/AEVC

Accessories



Swivel flange SNCB

Material:
Die-cast aluminium
Free of copper and PTFE
RoHS-compliant

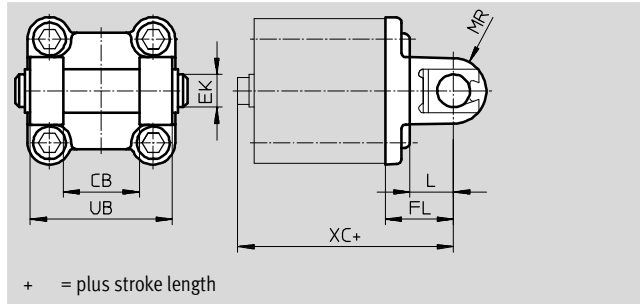

| Dimensions and ordering data | | | | | | | | |
|------------------------------|----------------|-----|---------------------|-----------|----|-----|-----|-----|
| For \varnothing | Stroke | CB | EK | FL | L | ML | MR | UB |
| [mm] | [mm] | H14 | \varnothing e8 | ± 0.2 | | | | h14 |
| 32 | 5 | 26 | 10 | 22 | 13 | 55 | 8.5 | 45 |
| | 10, 15, 20, 25 | | | | | | | |
| 40 | 5, 10 | 28 | 12 | 25 | 16 | 63 | 12 | 52 |
| | 15, 20, 25 | | | | | | | |
| 50 | 10 | 32 | 12 | 27 | 16 | 71 | 12 | 60 |
| | 15, 20, 25 | | | | | | | |
| 63 | 10 | 40 | 16 | 32 | 21 | 83 | 16 | 70 |
| | 15, 20, 25 | | | | | | | |
| 80 | 10, 15, 20, 25 | 50 | 16 | 36 | 22 | 103 | 16 | 90 |
| 100 | 10, 15, 20, 25 | 60 | 20 | 41 | 27 | 127 | 20 | 110 |

| For \varnothing | Stroke | XC | | | | CRC ¹⁾ | Weight | Part No. | Type |
|-------------------|----------------|--------------------------|------|-----------------------|------|-------------------|--------|----------|----------|
| | | without position sensing | | with position sensing | | | | | |
| [mm] | [mm] | ADVC | AEVC | ADVC | AEVC | | [g] | | |
| 32 | 5 | 57 | 44 | 61 | 61 | 2 | 103 | 174 390 | SNCB-32 |
| | 10, 15, 20, 25 | | 48 | | | | | | |
| 40 | 5, 10 | 60.5 | 50.5 | 69 | 69 | 2 | 155 | 174 391 | SNCB-40 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 50 | 10 | 63 | 48.1 | 73 | 75 | 2 | 232 | 174 392 | SNCB-50 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 63 | 10 | 75 | 58 | 81 | 81 | 2 | 375 | 174 393 | SNCB-63 |
| | 15, 20, 25 | | 65 | | | | | | |
| 80 | 10, 15, 20, 25 | 84 | 79 | 93 | 93 | 2 | 636 | 174 394 | SNCB-80 |
| 100 | 10, 15, 20, 25 | 100 | 91 | 109 | 109 | 2 | 1,035 | 174 395 | SNCB-100 |

1) Corrosion resistance class 2 according to Festo standard 940 070
Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents



- Note
Screws with special lengths are required to fit the sizes \varnothing 80 mm and \varnothing 100 mm. → 45

Short-stroke cylinders ADVC/AEVC

Accessories

Swivel flange SNCS

Material:
 SNCS 32 ... 80:
 Die-cast aluminium
 SNCS 100:
 Wrought aluminium alloy
 Free of copper and PTFE
 RoHS-compliant

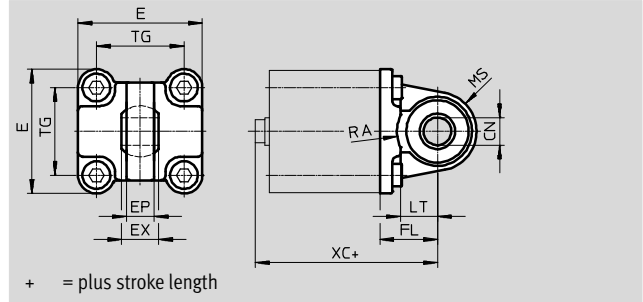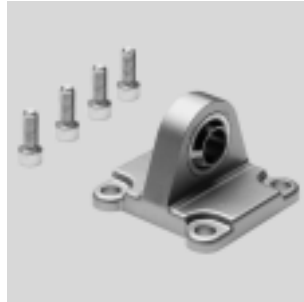

| Dimensions and ordering data | | | | | | | | | | |
|------------------------------|----------------|----------------------|-------------------------|-----------------|----|-----------------|----|--------------------|------------|------|
| For \varnothing | Stroke | CN \varnothing | E | EP ± 0.2 | EX | FL ± 0.2 | LT | MS | RA $+1$ | TG |
| [mm] | [mm] | | | | | | | | | |
| 32 | 5 | 10 ^{+0.013} | 45 ^{+0.2/-0.5} | 10.5 | 14 | 22 | 13 | 15 ^{+0.5} | 14.5 | 32.5 |
| | 10, 15, 20, 25 | | | | | | | | | |
| 40 | 5, 10 | 12 ^{+0.015} | 54 _{-0.5} | 12 | 16 | 25 | 16 | 17 ^{+0.5} | 17.5 | 38 |
| | 15, 20, 25 | | | | | | | | | |
| 50 | 10 | 16 ^{+0.015} | 64 _{-0.6} | 15 | 21 | 27 | 16 | 20 ^{+0.5} | 18.5 | 46.5 |
| | 15, 20, 25 | | | | | | | | | |
| 63 | 10 | 16 ^{+0.015} | 75 _{-0.6} | 15 | 21 | 32 | 21 | 23 _{-0.5} | 23 | 56.5 |
| | 15, 20, 25 | | | | | | | | | |
| 80 | 10, 15, 20, 25 | 20 ^{+0.018} | 93 _{-0.8} | 18 | 25 | 36 | 22 | 28 _{-0.5} | 25 | 72 |
| 100 | 10, 15, 20, 25 | 20 ^{+0.018} | 109 ^{+1/-0.7} | 18 | 25 | 41 | 27 | 30 ± 0.5 | 95 | 89 |

| For \varnothing | Stroke | XC | | | | CRC ¹⁾ | Weight [g] | Part No. | Type |
|-------------------|----------------|--------------------------|------|-----------------------|------|-------------------|---------------|----------|----------|
| | | without position sensing | | with position sensing | | | | | |
| [mm] | [mm] | ADVC | AEVC | ADVC | AEVC | | | | |
| 32 | 5 | 57 | 44 | 61 | 61 | 2 | 86 | 174 397 | SNCS-32 |
| | 10, 15, 20, 25 | | 48 | | | | | | |
| 40 | 5, 10 | 60.5 | 50.5 | 69 | 69 | 2 | 122 | 174 398 | SNCS-40 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 50 | 10 | 63 | 48.1 | 73 | 75 | 2 | 216 | 174 399 | SNCS-50 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 63 | 10 | 75 | 58 | 81 | 81 | 2 | 281 | 174 400 | SNCS-63 |
| | 15, 20, 25 | | 65 | | | | | | |
| 80 | 10, 15, 20, 25 | 84 | 79 | 93 | 93 | 2 | 557 | 174 401 | SNCS-80 |
| 100 | 10, 15, 20, 25 | 100 | 91 | 109 | 109 | 2 | 690 | 174 402 | SNCS-100 |

1) Corrosion resistance class 2 according to Festo standard 940 070
 Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents


- Note
 Screws with special lengths are required to fit the sizes $\varnothing 80$ mm and $\varnothing 100$ mm. → 45

Short-stroke cylinders ADVC/AEVC

Accessories

Swivel flange SNCL

Material:
Die-cast aluminium
Free of copper and PTFE
RoHS-compliant

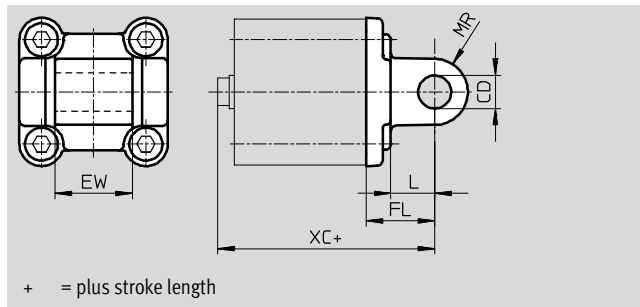

| Dimensions and ordering data | | | | | | |
|------------------------------|----------------|---------------------|-----------|-----------|----|----|
| For \varnothing | Stroke | CD | EW | FL | L | MR |
| [mm] | [mm] | \varnothing H9 | -0.2/-0.6 | ± 0.2 | | |
| 32 | 5 | 10 | 26 | 22 | 13 | 10 |
| | 10, 15, 20, 25 | | | | | |
| 40 | 5, 10 | 12 | 28 | 25 | 16 | 12 |
| | 15, 20, 25 | | | | | |
| 50 | 10 | 12 | 32 | 27 | 16 | 12 |
| | 15, 20, 25 | | | | | |
| 63 | 10 | 16 | 40 | 32 | 21 | 16 |
| | 15, 20, 25 | | | | | |
| 80 | 10, 15, 20, 25 | 16 | 50 | 36 | 22 | 16 |
| 100 | 10, 15, 20, 25 | 20 | 60 | 41 | 27 | 20 |

| For \varnothing | Stroke | XC | | | | CRC ¹⁾ | Weight | Part No. | Type |
|-------------------|----------------|--------------------------|------|-----------------------|------|-------------------|--------|----------|----------|
| | | without position sensing | | with position sensing | | | | | |
| [mm] | [mm] | ADVC | AEVC | ADVC | AEVC | [g] | | | |
| 32 | 5 | 57 | 44 | 61 | 61 | 2 | 75 | 174 404 | SNCL-32 |
| | 10, 15, 20, 25 | | 48 | | | | | | |
| 40 | 5, 10 | 60.5 | 50.5 | 69 | 69 | 2 | 100 | 174 405 | SNCL-40 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 50 | 10 | 63 | 48.1 | 73 | 75 | 2 | 160 | 174 406 | SNCL-50 |
| | 15, 20, 25 | | 55.5 | | | | | | |
| 63 | 10 | 75 | 58 | 81 | 81 | 2 | 250 | 174 407 | SNCL-63 |
| | 15, 20, 25 | | 65 | | | | | | |
| 80 | 10, 15, 20, 25 | 84 | 79 | 93 | 93 | 2 | 405 | 174 408 | SNCL-80 |
| 100 | 10, 15, 20, 25 | 100 | 91 | 109 | 109 | 2 | 655 | 174 409 | SNCL-100 |








1) Corrosion resistance class 2 according to Festo standard 940 070
Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents


- Note
Screws with special lengths are required to fit the sizes \varnothing 80 mm and \varnothing 100 mm. → 45

Short-stroke cylinders ADVC/AEVC

Accessories

FESTO

| Ordering data – Mounting attachments | | | | Technical data → Internet: clevis foot | | | |
|---|--------|----------------|-----------------|--|--------|---------------|------------------|
| Designation | For Ø | Part No. | Type | Designation | For Ø | Part No. | Type |
| Clevis foot mounting LNG | | | | Clevis foot mounting LSN | | | |
|  | 32 | 33 890 | LNG-32 |  | 32 | 5 561 | LSN-32 |
| | 40 | 33 891 | LNG-40 | | 40 | 5 562 | LSN-40 |
| | 50 | 33 892 | LNG-50 | | 50 | 5 563 | LSN-50 |
| | 63 | 33 893 | LNG-63 | | 63 | 5 564 | LSN-63 |
| | 80 | 33 894 | LNG-80 | | 80 | 5 565 | LSN-80 |
| | 100 | 33 895 | LNG-100 | | 100 | 5 566 | LSN-100 |
| Clevis foot mounting LSNG | | | | Weld-on clevis foot mounting LSNSG | | | |
|  | 32 | 31 740 | LSNG-32 |  | 32 | 31 747 | LSNSG-32 |
| | 40 | 31 741 | LSNG-40 | | 40 | 31 748 | LSNSG-40 |
| | 50 | 31 742 | LSNG-50 | | 50 | 31 749 | LSNSG-50 |
| | 63 | 31 743 | LSNG-63 | | 63 | 31 750 | LSNSG-63 |
| | 80 | 31 744 | LSNG-80 | | 80 | 31 751 | LSNSG-80 |
| | 100 | 31 745 | LSNG-100 | | 100 | 31 752 | LSNSG-100 |
| Clevis foot LBG on swivel flange SNCS | | | | Clevis foot LBG on rod eye SGS | | | |
|  | 32 | 31 761 | LBG-32 |  | 32, 40 | 31 761 | LBG-32 |
| | 40 | 31 762 | LBG-40 | | 50, 63 | 31 762 | LBG-40 |
| | 50 | 31 763 | LBG-50 | | 80 | 31 763 | LBG-50 |
| | 63 | 31 764 | LBG-63 | | | 31 764 | LBG-63 |
| | 80 | 31 765 | LBG-80 | | 100 | 31 765 | LBG-80 |
| | 100 | 31 766 | LBG-100 | | | 31 766 | LBG-100 |
| Clevis foot, right-angled LQG | | | | | | | |
|  | 32, 40 | 31 768 | LQG-32 | | | | |
| | 50, 63 | 31 769 | LQG-40 | | | | |
| | 80 | 31 770 | LQG-50 | | | | |
| | | 31 771 | LQG-63 | | | | |
| | 100 | 31 772 | LQG-80 | | | | |
| 31 773 | | LQG-100 | | | | | |






| Ordering data | | | | |
|---|---------|---------------------------------------|-----------------------|------------------|
| Special screw | For Ø | For accessory | Part No. | PU ¹⁾ |
|  | 80, 100 | HNC, FNC, SNC, SNCS, SNCL, SNCB | 238 600 M10x30 | 1 |
| | 80 | ZNCF | 204 138 M10x40 | |
| | 100 | ZNCF | 370 524 M10x50 | |

1) Packaging unit quantity

Short-stroke cylinders ADVC/AEVC



Accessories




FESTO



| Ordering data – Piston rod attachments | | | | Technical data → Internet: piston-rod attachment | | | |
|---|-------|------------|--------------|---|-------------|--------------|--------------|
| Designation | For Ø | Part No. | Type | Designation | For Ø | Part No. | Type |
| Rod eye SGS | | | | Rod clevis SGA | | | |
|  | 10 | 9 253 | SGS-M4 |  | 32 | – | – |
| | 16 | 9 254 | SGS-M6 | | 40 | | |
| | 20 | 9 255 | SGS-M8 | | 50 | | |
| | 25 | | | | | | |
| | 32 | | | | 9 261 | SGS-M10x1,25 | |
| | 40 | | | | 32 | 32 954 | SGA-M10x1,25 |
| | 50 | 9 262 | SGS-M12x1,25 | | 40 | | |
| | 63 | | | | 50 | 10 767 | SGA-M12x1,25 |
| | 80 | 9 263 | SGS-M16x1,5 | | 63 | | |
| | 100 | 9 264 | SGS-M20x1,5 | | 80 | 10 768 | SGA-M16x1,5 |
| | | | 100 | 10 769 | SGA-M20x1,5 | | |
| Rod clevis SG | | | | Self-aligning rod coupler FK | | | |
|  | 10 | 6 532 | SG-M4 |  | 10 | 6 528 | FK-M4 |
| | 12 | – | – | | 12 | 30 984 | FK-M5 |
| | 16 | 3 110 | SG-M6 | | 16 | 2 061 | FK-M6 |
| | 20 | 3 111 | SG-M8 | | 20 | 2 062 | FK-M8 |
| | 25 | | | | 25 | | |
| | 32 | 6 144 | SG-M10x1,25 | | 32 | 6 140 | FK-M10x1,25 |
| | 40 | | | | 40 | | |
| | 50 | 6 145 | SG-M12x1,25 | | 50 | 6 141 | FK-M12x1,25 |
| | 63 | | | | 63 | | |
| | 80 | 6 146 | SG-M16x1,5 | | 80 | 6 142 | FK-M16x1,5 |
| 100 | 6 147 | SG-M20x1,5 | 100 | 6 143 | FK-M20x1,5 | | |
| Coupling piece KSG | | | | | | | |
|  | 32 | 32 963 | KSG-M10x1,25 | | | | |
| | 40 | | | | | | |
| | 50 | 32 964 | KSG-M12x1,25 | | | | |
| | 63 | | | | | | |
| | 80 | 32 965 | KSG-M16x1,5 | | | | |
| | 100 | 32 966 | KSG-M20x1,5 | | | | |

Short-stroke cylinders ADVC/AEVC

Accessories

| Ordering data – Proximity sensors for T-slot, magneto-resistive | | | | | | Technical data → Internet: smt |
|---|--|---------------|-----------------------|------------------|---------------|----------------------------------|
| | Type of mounting | Switch output | Electrical connection | Cable length [m] | Part No. | Type |
| N/O contact | | | | | | |
|  | Insertable in the slot from above, flush with cylinder profile, short design | PNP | Cable, 3-wire | 2.5 | 574335 | SMT-8M-A-PS-24V-E-2,5-OE |
| | | | Plug M8x1, 3-pin | 0.3 | 574334 | SMT-8M-A-PS-24V-E-0,3-M8D |
| | | | Plug M12x1, 3-pin | 0.3 | 574337 | SMT-8M-A-PS-24V-E-0,3-M12 |
| | | NPN | Cable, 3-wire | 2.5 | 574338 | SMT-8M-A-NS-24V-E-2,5-OE |
| | | | Plug M8x1, 3-pin | 0.3 | 574339 | SMT-8M-A-NS-24V-E-0,3-M8D |
| N/C contact | | | | | | |
|  | Insertable in the slot from above, flush with cylinder profile, short design | PNP | Cable, 3-wire | 7.5 | 574340 | SMT-8M-A-PO-24V-E-7,5-OE |

| Ordering data – Proximity sensors for T-slot, magnetic reed | | | | | | Technical data → Internet: sme | |
|---|--|---------------|-----------------------|------------------|----------------|--------------------------------|-------------------------------|
| | Type of mounting | Switch output | Electrical connection | Cable length [m] | Part No. | Type | |
| N/O contact | | | | | | | |
|  | Insertable in the slot from above, flush with cylinder profile | Contacting | Cable, 3-wire | 2.5 | 543 862 | SME-8M-DS-24V-K-2,5-OE | |
| | | | | 5.0 | 543 863 | SME-8M-DS-24V-K-5,0-OE | |
| | | | Plug M8x1, 3-pin | Cable, 2-wire | 2.5 | 543 872 | SME-8M-ZS-24V-K-2,5-OE |
| | | | | 0.3 | 543 861 | SME-8M-DS-24V-K-0,3-M8D | |
|  | Insertable in the slot lengthwise, flush with the cylinder profile | Contacting | Cable, 3-wire | 2.5 | 150 855 | SME-8-K-LED-24 | |
| | | | | 0.3 | 150 857 | SME-8-S-LED-24 | |
| N/C contact | | | | | | | |
|  | Insertable in the slot lengthwise, flush with the cylinder profile | Contacting | Cable, 3-wire | 7.5 | 160 251 | SME-8-0-K-LED-24 | |


| Ordering data – Connecting cables | | | | | Technical data → Internet: nebu |
|---|-------------------------------|------------------------------|------------------|----------------|---------------------------------|
| | Electrical connection, left | Electrical connection, right | Cable length [m] | Part No. | Type |
|  | Straight socket, M8x1, 3-pin | Cable, open end, 3-wire | 2.5 | 541 333 | NEBU-M8G3-K-2.5-LE3 |
| | | | 5 | 541 334 | NEBU-M8G3-K-5-LE3 |
| | Straight socket, M12x1, 5-pin | Cable, open end, 3-wire | 2.5 | 541 363 | NEBU-M12G5-K-2.5-LE3 |
| | | | 5 | 541 364 | NEBU-M12G5-K-5-LE3 |
|  | Angled socket, M8x1, 3-pin | Cable, open end, 3-wire | 2.5 | 541 338 | NEBU-M8W3-K-2.5-LE3 |
| | | | 5 | 541 341 | NEBU-M8W3-K-5-LE3 |
| | Angled socket, M12x1, 5-pin | Cable, open end, 3-wire | 2.5 | 541 367 | NEBU-M12W5-K-2.5-LE3 |
| | | | 5 | 541 370 | NEBU-M12W5-K-5-LE3 |


| Ordering data – Slot cover for T-slot | | | | |
|---|-----------------------|----------|----------------|----------------|
| | Mounting | Length | Part No. | Type |
|  | Insertable from above | 2x 0.5 m | 151 680 | ABP-5-S |



Short-stroke cylinders ADVC/AEVC



Accessories

FESTO

| Ordering data – Proximity switches for C-slot, magneto-resistive | | | | | | Technical data → Internet: smt | |
|---|-----------------------------------|---------------|---|------------------|----------|--------------------------------|--|
| | Type of mounting | Switch output | Electrical connection, connection direction | Cable length [m] | Part No. | Type | |
| N/O contact | | | | | | | |
|  | Insertable in the slot from above | PNP | Plug M8x1, 3-pin, in-line | 0,3 | 551 375 | SMT-10M-PS-24V-E-0,3-L-M8D | |
| | | | Cable, 3-wire, in-line | 2,5 | 551 373 | SMT-10M-PS-24V-E-2,5-L-OE | |

| Ordering data – Proximity switches for C-slot, magnetic reed | | | | | | Technical data → Internet: sme | |
|---|-----------------------------------|---------------|---|------------------|----------|--------------------------------|--|
| | Type of mounting | Switch output | Electrical connection, connection direction | Cable length [m] | Part No. | Type | |
| N/O contact | | | | | | | |
|  | Insertable in the slot lengthwise | Contacting | Plug M8x1, 3-pin, in-line | 0,3 | 173 212 | SME-10-SL-LED-24 | |
| | | | Cable, 3-wire, in-line | 2,5 | 173 210 | SME-10-KL-LED-24 | |

| Ordering data – Connecting cables | | | | | Technical data → Internet: nebu | |
|--|------------------------------|------------------------------|------------------|----------|---------------------------------|--|
| | Electrical connection, left | Electrical connection, right | Cable length [m] | Part No. | Type | |
|  | Straight socket, M8x1, 3-pin | Cable, open end, 3-wire | 2,5 | 541 333 | NEBU-M8G3-K-2.5-LE3 | |
| | | | 5 | 541 334 | NEBU-M8G3-K-5-LE3 | |
|  | Angled socket, M8x1, 3-pin | Cable, open end, 3-wire | 2,5 | 541 338 | NEBU-M8W3-K-2.5-LE3 | |
| | | | 5 | 541 341 | NEBU-M8W3-K-5-LE3 | |

| Ordering data – One-way flow control valves | | | | | Technical data → Internet: grl | | | |
|---|---|-----------------|--------------|-----------------|--------------------------------|----------------|--------------|--|
| | Connection | | Material | Part No. | Type | | | |
| | Thread | For tubing O.D. | | | | | | |
| For exhaust air | | | | | | | | |
|  | M3 | 3 | Metal design | 175 041 | GRLA-M3-QS-3 | | | |
| | | M5 | | 3 | 193 137 | GRLA-M5-QS-3-D | | |
| | | | | 4 | 193 138 | GRLA-M5-QS-4-D | | |
| | 6 | | | 193 139 | GRLA-M5-QS-6-D | | | |
| | G1/8 | 3 | | 193 142 | GRLA-1/8-QS-3-D | | | |
| | | 4 | | 193 143 | GRLA-1/8-QS-4-D | | | |
| | | 6 | | 193 144 | GRLA-1/8-QS-6-D | | | |
| | | 8 | | 193 145 | GRLA-1/8-QS-8-D | | | |
| | G1/4 | 6 | | 193 146 | GRLA-1/4-QS-6-D | | | |
| | | 8 | | 193 147 | GRLA-1/4-QS-8-D | | | |
| | | 10 | | 193 148 | GRLA-1/4-QS-10-D | | | |
| | For supply air | | | | | | | |
| |  | M3 | | 3 | Metal design | 175 043 | GRLZ-M3-QS-3 | |
| M5 | | | 3 | 193 153 | | GRLZ-M5-QS-3-D | | |
| | | | 4 | 193 154 | | GRLZ-M5-QS-4-D | | |
| | | 6 | 193 155 | GRLZ-M5-QS-6-D | | | | |
| G1/8 | | 3 | 193 156 | GRLZ-1/8-QS-3-D | | | | |
| | | 4 | 193 157 | GRLZ-1/8-QS-4-D | | | | |
| | | 6 | 193 158 | GRLZ-1/8-QS-6-D | | | | |
| | | 8 | 193 159 | GRLZ-1/8-QS-8-D | | | | |