Accessories for valves and valve terminals VAME, mounting attachments
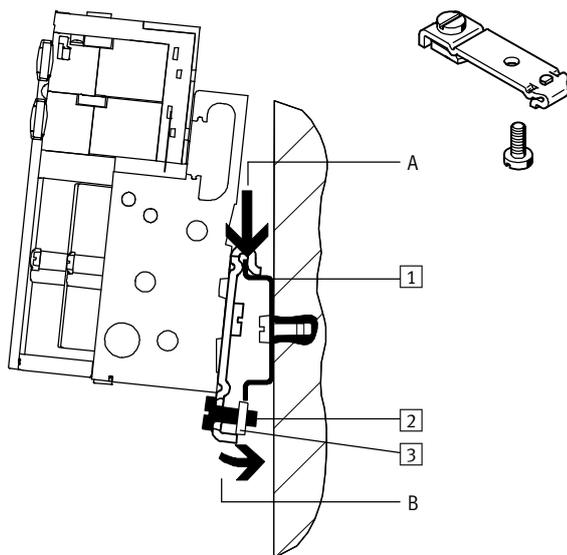
Technical data

Mounting attachments enable valve terminals to be attached to walls and machine parts.

Examples illustrating H-rail mounting
Via mounting rail

The valve terminal is attached to the H-rail (see arrow A)
and then swivelled onto the H-rail and secured in place with the clamping component (see arrow B).

1 Holes for wall mounting
2 Self-tapping M4x10 screw of the H-rail clamping unit
3 Clamping component of the H-rail clamping unit

Ordering data

	Weight [g]	Material	Function	Dimensions [mm]	Part No.	Type
	35.1	Steel/polymer	Base for H-rail mounting. Is screwed onto the component and the entire unit can then be placed on an H-rail.	47x12x18.1 (LxWxH)	**170169**	**CP-TS-HS-35**
	29.9	Cold rolled steel	Mounting accessories (set) for H-rail mounting. Is screwed onto the component and the entire unit can then be placed on an H-rail. Includes M4x10 screw (combi cross-slot screws).	49.1x13x8.7 (LxWxH) Material thickness: 2	**527392**	**CPASC-BG-NRH**
	8.8	Fine grained cold pressed steel	Mounting bracket for mounting valve terminals on even surfaces. Includes 2 M3x9 screws (2.5 A/F internal hexagon socket).	18 x 15 (LxW) Material thickness: 2	**534416**	**VMPA-BG-RW**
	–	Galvanised steel	Screw available as spare part, to DIN 912.	L: 45; Thread: M3	**527643**	**M3x45**

Accessories for valves and valve terminals VAME, mounting attachments

Technical data

Mounting rail NR	Mounting rails for manifold mounting of components.

- G rail to DIN EN 50035
- H-rail to EN 60715

Dimensions

Download CAD data ➜ **www.festo.com**

NRC-32-2000

NRH-35-2000
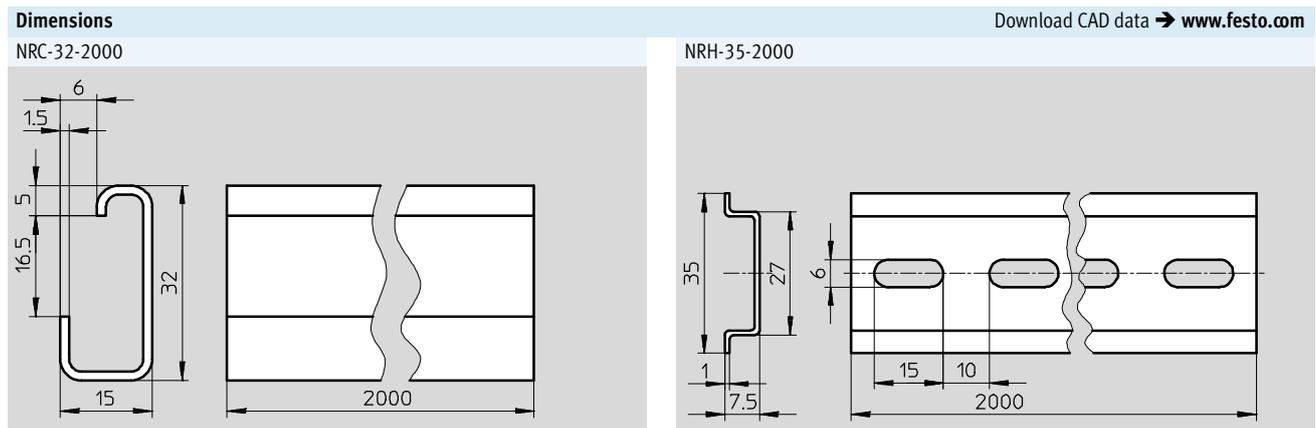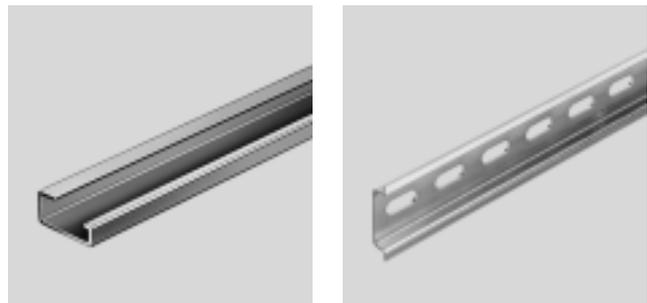
Ordering data

	Description	Length [m]	Product weight [g]	Material	Part No.	Type
	G-rail to DIN EN 50 035	2	1400	Galvanised steel	**6756**	**NRC-32-2000**
	H-rail to EN 60715	2	600	Galvanised steel	**35430**	**NRH-35-2000**[1]

1) Free of copper, PTFE and silicone