

Linear/swivel clamp CLR



Linear/swivel clamp CLR


Key features

FESTO


Functional description

The linear/swivel clamp CLR is used for all types of clamping. Through the combination of the linear and swivel motion of the piston rod, it is possible to insert and remove workpieces even beyond the clamping range. It is

possible to choose between versions swivelling to the right or to the left, while the CLR also boasts a linear stroke with diameters of 40 and larger.



Clamping finger:
Can be ordered as an accessory

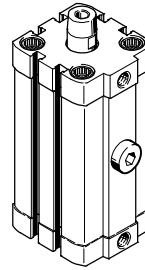

Optimal range

- Uncomplicated mechanical system
- Sturdy design
- Long service life
- Low purchasing, assembly and maintenance costs
- New: CLR with dust and welding spatter protection

Flexible

- Swivel direction can be adjusted subsequently
- Compact dimensions for tight installation spaces

Easy to install

- The port pattern corresponds to ISO 21287, meaning that foot and flange mountings from the standard accessories range can be used
- Female threads in the bearing and end caps enable easy assembly of the cylinder either directly or using mounting accessories

Practical

- Clamping finger including plug-on rubber cap to protect sensitive surfaces available as accessory
- Clamping finger can be freely adjusted across a full 360°
- Can be repaired using set of wearing parts
- Corresponding accessories such as tubing, flow control valves and push-in fittings

Swivel direction




Swivel motion to the right

View from above of the piston rod side with the piston rod retracted. Clockwise swivel direction.



Swivel motion to the left


View from above of the piston rod side with the piston rod retracted. Anticlockwise swivel direction.

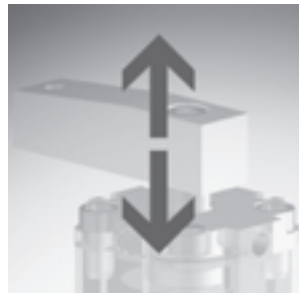

Straight

Linear/swivel clamp CLR

Peripherals overview

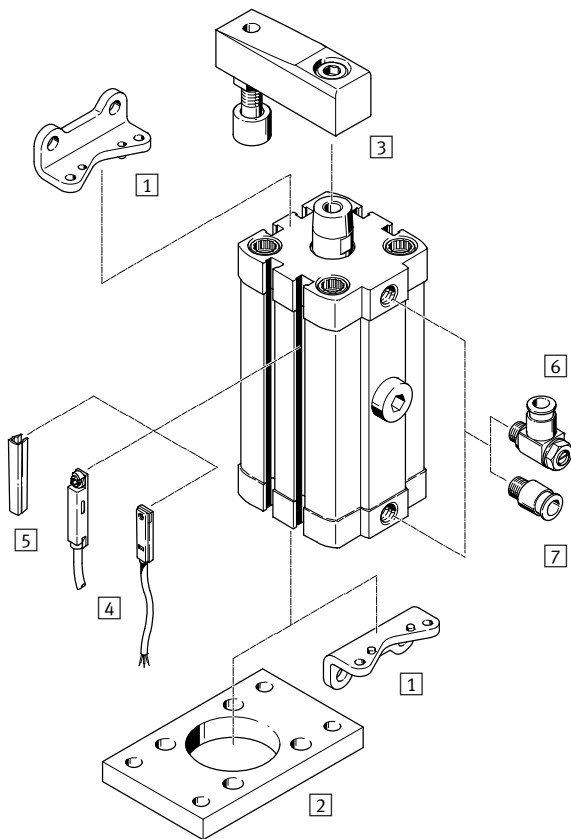


Mounting components and accessories		
	Brief description	→ Page/Internet
1	Foot mounting HNA	For bearing or end caps 14
2	Flange mounting FNC	For end caps 15
3	Clamping finger CLR...-FS	Comprising clamping finger, mounting screw, tightening bolt, lock nut and dust cap 15
4	Proximity sensor SME/SMT	Can be integrated in the cylinder profile barrel 17
5	Slot cover ABP-5-S	For protecting the sensor cable and keeping dirt out of the sensor slots 17
6	One-way flow control valve GRLA	For speed regulation 16
7	Push-in fitting QS	For connecting compressed air tubing with standard O.D. quick star

Linear/swivel clamp CLR

Type codes

FESTO

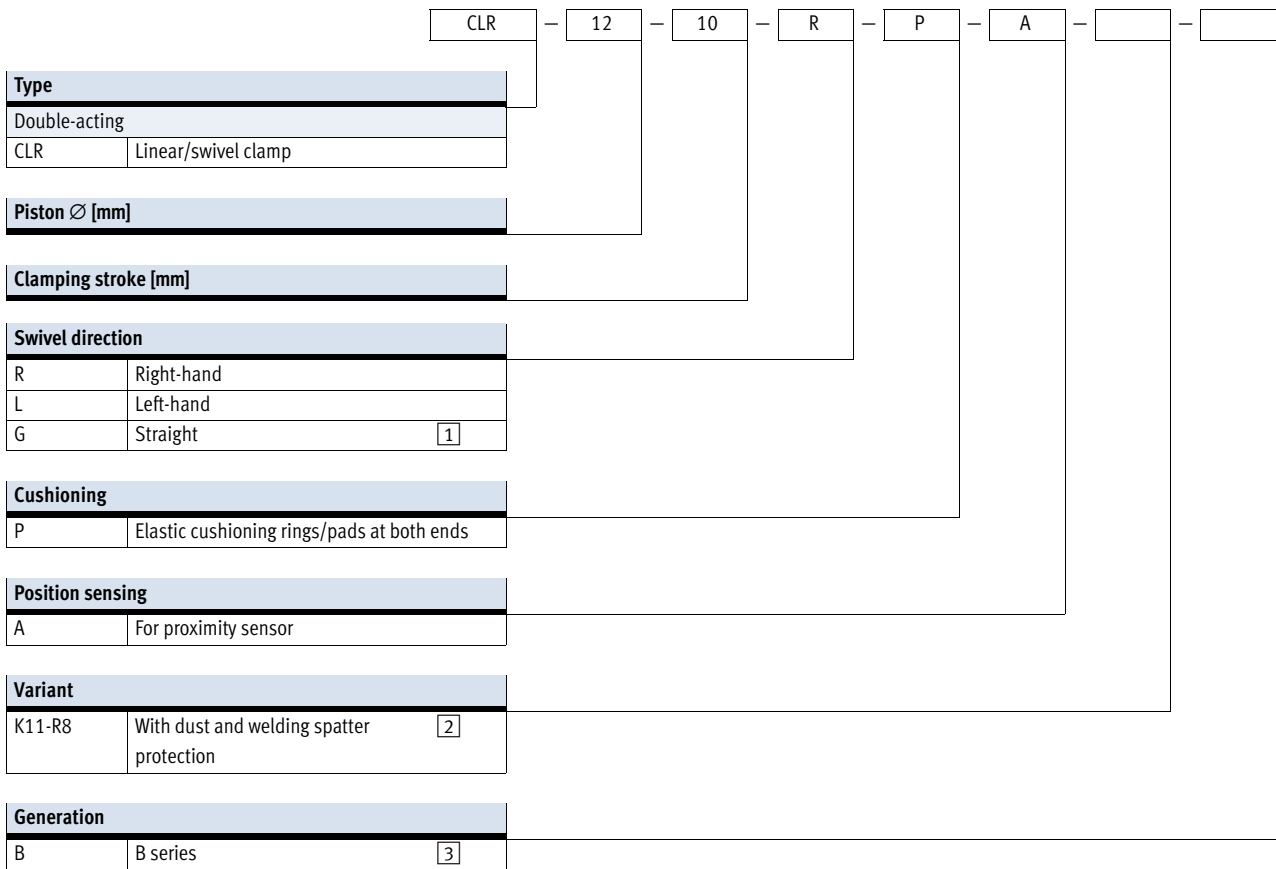

1 Only with piston Ø 40 ... 63 mm


2 Only with piston Ø 25 ... 63 mm

3 Only with piston Ø 32 mm

Linear/swivel clamp CLR

Technical data

Function



- Diameter
12 ... 63 mm
- Clamping stroke
10, 20, 50 mm
- www.festo.com



General technical data																	
Piston Ø	12	16	20	25	32	40	50	63									
Pneumatic connection	M5	M5	M5	M5	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$									
Piston rod thread	M3	M4	M6	M6	M8	M8	M10	M10									
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]																
Note on operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)																
Design	Piston																
	Piston rod																
	Cylinder barrel																
Cushioning	Elastic cushioning rings/pads at both ends																
Position sensing	For proximity sensor																
Type of mounting	With through-hole																
	With female thread																
	Via accessories																
Mounting position	Any																
Clamping range	≥ 2 mm before the end position is reached																
Clamping stroke ¹⁾	[mm]	10	20	10	20	10	20	10	20	10	20	10	20	20	50	20	50
Total stroke ²⁾	[mm]	19	29	20	30	22	32	23	33	28	38	28	38	41	71	43	73
Swivel direction	Right, left												Right, left, straight				
Swivel angle	[°]	90 \pm 4			90 \pm 3			90 \pm 2									

- 1) The clamping stroke corresponds to the linear stroke used for clamping
- 2) The total stroke comprises the clamping stroke and the swivel stroke

Operating and environmental conditions	
Operating pressure	[bar] 2 ... 10
Ambient temperature ¹⁾	[°C] -10 ... +80
Corrosion resistance class CRC ²⁾	2

- 1) Note operating range of proximity sensors
- 2) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Linear/swivel clamp CLR

FESTO

Technical data


Forces [N] without clamping finger								
Piston Ø	12	16	20	25	32	40	50	63
Theoretical clamping force at 6 bar	51	90	121	227	362	633	990	1,682

Forces [N] with clamping finger CLR-...-FS, 5 mm before end of stroke									
Piston Ø	12	16	20	25	32	40	50	63	
Effective clamping force at	2 bar	12	17	35	63	111	176	271	441
	4 bar	23	36	73	127	216	355	508	823
	6 bar	34	53	109	188	313	536	716	1,386


Materials

Sectional view

Basic design

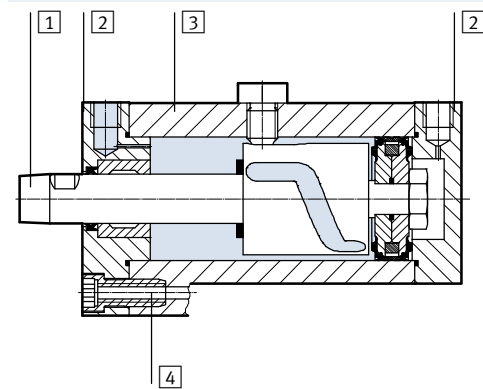

K11-R8 With dust and welding spatter protection

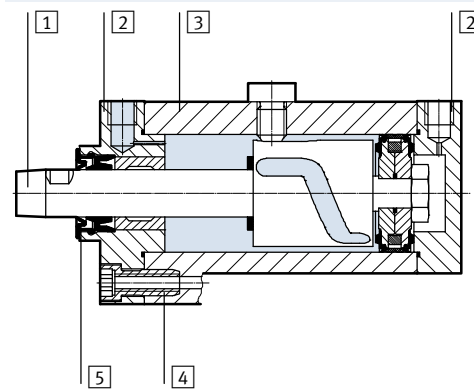


Linear/swivel clamp	Basic design	K11-R8
1 Piston rod	High-alloy stainless steel	Surface-treated high-alloy stainless steel
2 Bearing and end caps	Coated wrought aluminium alloy	
3 Cylinder barrel	Smooth anodised wrought aluminium alloy	
4 Flange screws	Galvanised steel	
5 Hard scraper	-	Polyphenylene sulphide, flame-retardant
- Seals	Nitrile rubber, polyurethane	

Weight [g]									
Piston Ø	12	16	20	25	32	40	50	63	
Basic design									
Product weight at stroke	10 mm	135	160	335	395	685	880	-	-
	20 mm	160	190	385	455	765	985	1,650	2,100
	50 mm	-	-	-	-	-	-	2,115	2,635
Variant K11-R8									
Product weight at stroke	10 mm	-	-	-	410	700	895	-	-
	20 mm	-	-	-	470	785	1,010	1,690	2,100
	50 mm	-	-	-	-	-	-	2,155	2,625

Linear/swivel clamp CLR

Technical data

Maximum permissible mass moment of inertia J_0



- m_1 = mass of the clamping finger
- l_1 = length of the clamping finger
- m_2 = mass of the screw
- l_2 = centre distance between screw and piston rod


Note
 The permissible mass moment of inertia at the piston rod depends on the cylinder's speed. The moment can easily be calculated using this formula. The software program "mass moments of inertia", available on the electronic catalogue, can also be used for calculation purposes.

Maximum permissible mass moment of inertia:

$$J_0 = \frac{m_1 \times l_1^2}{3} + m_2 \times l_2^2$$


Mass moment of inertia J as a function of the time t required for a single stroke

Ø 12

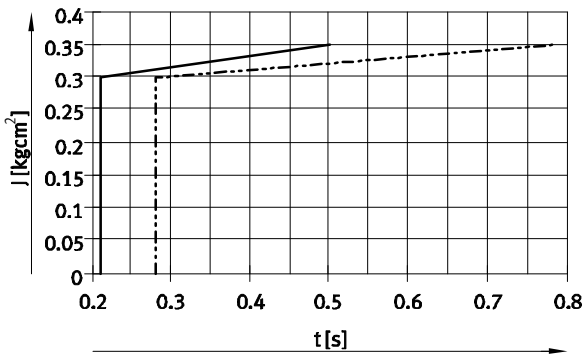


- 10 mm stroke
- - - 20 mm stroke

Ø 16

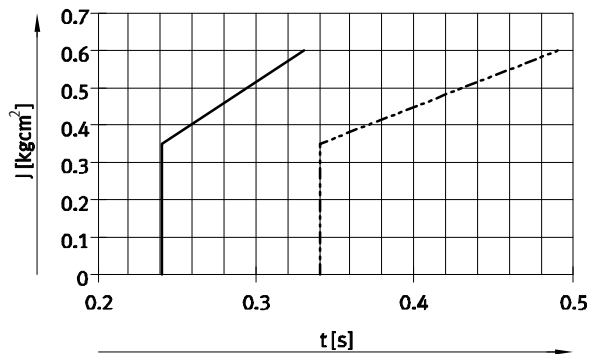


Ø 20

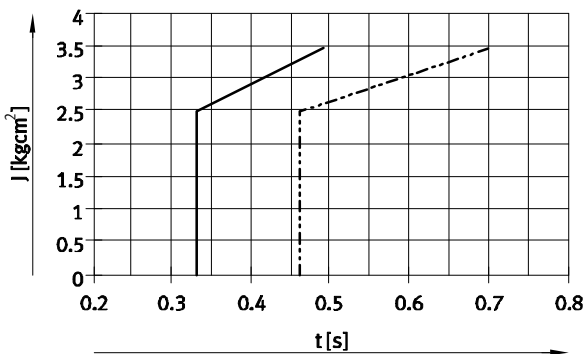

- 10 mm stroke
- - - 20 mm stroke


Ø 25

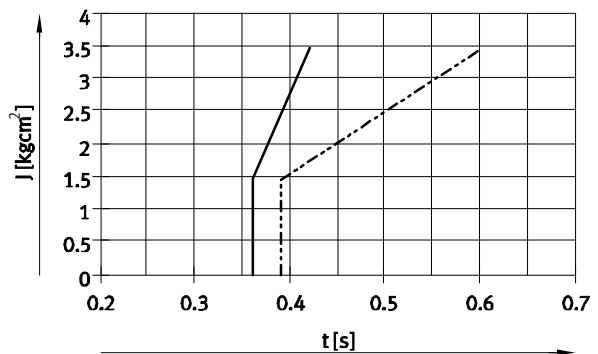

Linear/swivel clamp CLR

Technical data

Maximum permissible mass moment of inertia J_0



- m_1 = mass of the clamping finger
- l_1 = length of the clamping finger
- m_2 = mass of the screw
- l_2 = centre distance between screw and piston rod



Note

The permissible mass moment of inertia at the piston rod depends on the cylinder's speed. The moment can easily be calculated using this


formula. The software program "mass moments of inertia", available on the electronic catalogue, can also be used for calculation purposes.

Maximum permissible mass moment of inertia:

$$J_0 = \frac{m_1 \times l_1^2}{3} + m_2 \times l_2^2$$


Mass moment of inertia J as a function of the time t required for a single stroke

Ø 32

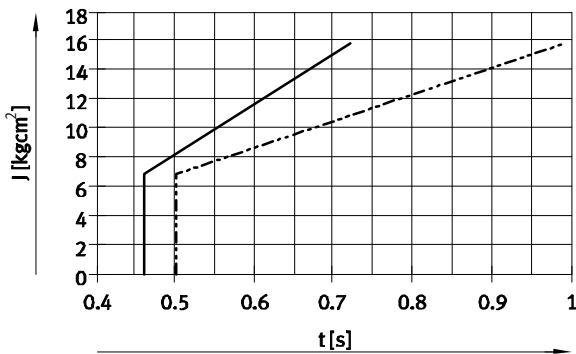


- 10 mm stroke
- - - 20 mm stroke

Ø 40

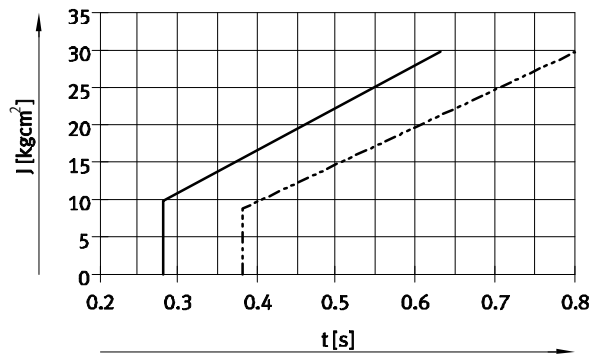


Ø 50

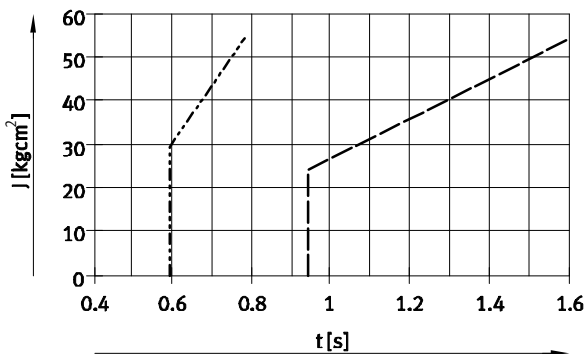

- - - 20 mm stroke
- 50 mm stroke

Ø 63

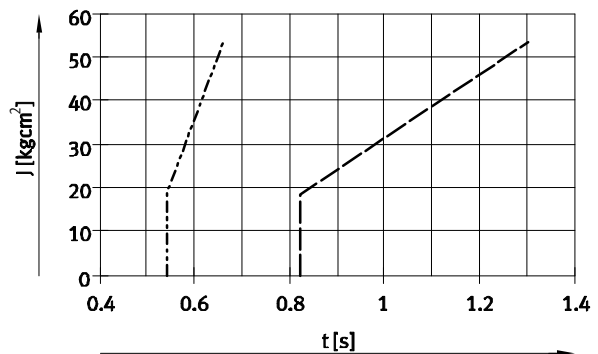


Linear/swivel clamp CLR

Technical data

Assembling a clamping finger


Step 1

- Place the clamping finger on the cone of the piston rod
- Screw the mounting screw into the threaded hole of the piston rod until the clamping finger can still just be turned




Step 2

- Hold the piston rod in place at the spanner flat using a spanner
- Turn the clamping finger with a second spanner until the alignment corresponds to the application



Step 3

- Tighten the mounting screw using the tightening torque below



Tightening torques [Nm]


Piston \varnothing	12	16	20	25	32	40	50	63
Max. tightening torque clamping finger screw	1.2	3	12	12	24	24	47	47

Note

No calculations are required when using the Festo clamping finger. The accessory is matched to the cylinder and can be operated without flow control at the maximum permissible

pressure. When manufacturing the clamping finger in-house, the following values must be checked and calculations performed.

Maximum permissible clamping arm length l as a function of the operating pressure p

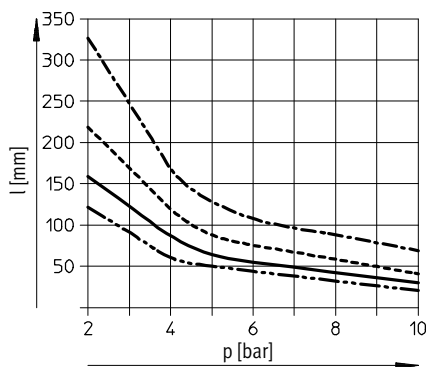

$\varnothing 12/16$
 $\varnothing 20/25$
 $\varnothing 32/40$
 $\varnothing 50/63$

Linear/swivel clamp CLR


Technical data

FESTO

Dimensions


Download CAD data → www.festo.com

Basic design Ø 12 ... 63

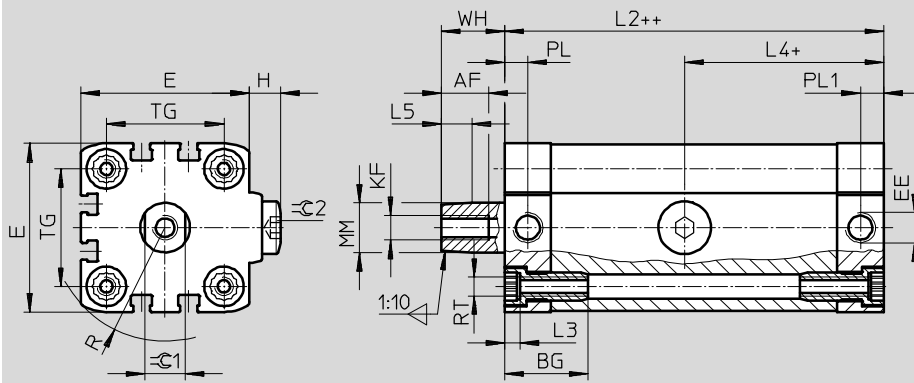

+ = plus clamping stroke length
++ = plus 2x clamping stroke length

Variant K11-R8 Ø 25 ... 63

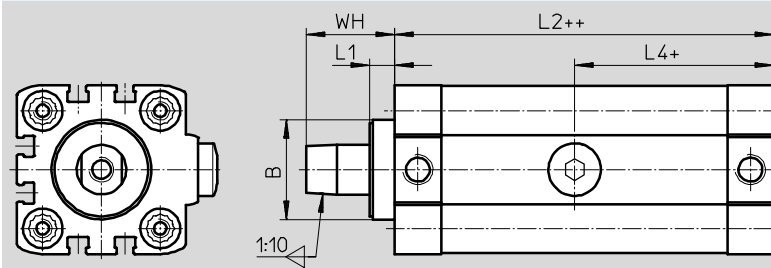

+ = plus clamping stroke length
++ = plus 2x clamping stroke length


Ø	AF	BG	B	E	EE	H	KF	L1	L2	L3	L4
[mm]											
12	10	17	-	27.5	M5	3.25	M3	-	60.6	3.5	21.8
16	12			29			M4		62.5		23.5
20	15			19.5			35.5		M6		8.1
25		28.4	39.5		82.5	46.55					
32		26	32.2	47	M8	7.65	101	4.6	53.05		
40				54.5			102.5		54.3		
50	27	38.2	65.5	G1/8	7.65	117.9	4.6	58.8			
63			75.5			124.9		62.75			


Ø	L5	MM Ø	PL	PL1	R	RT	TG	WH		⊖C1	⊖C2
[mm]									K11-R8		
12	4.9	6	6	15.1	18.2	M4	16	10.9	-	5	3
16		8	6.5	15			19.3			18	
20	7.4	12	6	6	23.7	M5	22	16.4	24.5	10	5
25							26.3				
32	9.9	16	7.5	7.5	31.5	M6	32.5	20.4	28.5	13	6
40							36.7				
50	10.3	20	7.5	7.5	44.3	M8	46.5	20.8	28.5	17	8
63							51.5				

Linear/swivel clamp CLR

Technical data


FESTO


Ordering data – Swivel direction right				
Type	Piston Ø [mm]	Stroke [mm]	Part No.	Type
	12	10	535431	CLR-12-10-R-P-A
		20	535433	CLR-12-20-R-P-A
	16	10	535435	CLR-16-10-R-P-A
		20	535437	CLR-16-20-R-P-A
	20	10	535439	CLR-20-10-R-P-A
		20	535441	CLR-20-20-R-P-A
	25	10	535443	CLR-25-10-R-P-A
		20	535445	CLR-25-20-R-P-A
	32	10	543177	CLR-32-10-R-P-A-B
		20	543179	CLR-32-20-R-P-A-B
	40	10	535453	CLR-40-10-R-P-A
		20	535456	CLR-40-20-R-P-A
	50	20	535459	CLR-50-20-R-P-A
		50	535462	CLR-50-50-R-P-A
	63	20	535465	CLR-63-20-R-P-A
		50	535468	CLR-63-50-R-P-A

Ordering data – Swivel direction right, with dust and welding spatter protection				
Type	Piston Ø [mm]	Stroke [mm]	Part No.	Type
	25	10	535483	CLR-25-10-R-P-A-K11-R8
		20	535485	CLR-25-20-R-P-A-K11-R8
	32	10	535487	CLR-32-10-R-P-A-B-K11-R8
		20	535490	CLR-32-20-R-P-A-B-K11-R8
	40	10	535493	CLR-40-10-R-P-A-K11-R8
		20	535496	CLR-40-20-R-P-A-K11-R8
	50	20	535499	CLR-50-20-R-P-A-K11-R8
		50	535502	CLR-50-50-R-P-A-K11-R8
	63	20	535505	CLR-63-20-R-P-A-K11-R8
		50	535508	CLR-63-50-R-P-A-K11-R8

Linear/swivel clamp CLR

Technical data


Ordering data – Swivel direction left				
Type	Piston Ø [mm]	Stroke [mm]	Part No.	Type
	12	10	535432	CLR-12-10-L-P-A
		20	535434	CLR-12-20-L-P-A
	16	10	535436	CLR-16-10-L-P-A
		20	535438	CLR-16-20-L-P-A
	20	10	535440	CLR-20-10-L-P-A
		20	535442	CLR-20-20-L-P-A
	25	10	535444	CLR-25-10-L-P-A
		20	535446	CLR-25-20-L-P-A
	32	10	543178	CLR-32-10-L-P-A-B
		20	543180	CLR-32-20-L-P-A-B
	40	10	535454	CLR-40-10-L-P-A
		20	535457	CLR-40-20-L-P-A
	50	20	535460	CLR-50-20-L-P-A
		50	535463	CLR-50-50-L-P-A
	63	20	535466	CLR-63-20-L-P-A
		50	535469	CLR-63-50-L-P-A


Ordering data – Swivel direction left, with dust and welding spatter protection				
Type	Piston Ø [mm]	Stroke [mm]	Part No.	Type
	25	10	535484	CLR-25-10-L-P-A-K11-R8
		20	535486	CLR-25-20-L-P-A-K11-R8
	32	10	535488	CLR-32-10-L-P-A-B-K11-R8
		20	535491	CLR-32-20-L-P-A-B-K11-R8
	40	10	535494	CLR-40-10-L-P-A-K11-R8
		20	535497	CLR-40-20-L-P-A-K11-R8
	50	20	535500	CLR-50-20-L-P-A-K11-R8
		50	535503	CLR-50-50-L-P-A-K11-R8
	63	20	535506	CLR-63-20-L-P-A-K11-R8
		50	535509	CLR-63-50-L-P-A-K11-R8


Linear/swivel clamp CLR

Technical data

FESTO

Ordering data – Swivel direction straight				
Type	Piston Ø [mm]	Stroke [mm]	Part No.	Type
	40	10	535455	CLR-40-10-G-P-A
		20	535458	CLR-40-20-G-P-A
	50	20	535461	CLR-50-20-G-P-A
		50	535464	CLR-50-50-G-P-A
	63	20	535467	CLR-63-20-G-P-A
		50	535470	CLR-63-50-G-P-A

Ordering data – Swivel direction straight, with dust and welding spatter protection				
Type	Piston Ø [mm]	Stroke [mm]	Part No.	Type
	40	10	535495	CLR-40-10-G-P-A-K11-R8
		20	535498	CLR-40-20-G-P-A-K11-R8
	50	20	535501	CLR-50-20-G-P-A-K11-R8
		50	535504	CLR-50-50-G-P-A-K11-R8
	63	20	535507	CLR-63-20-G-P-A-K11-R8
		50	535510	CLR-63-50-G-P-A-K11-R8

 Note

The swivel direction can easily be adjusted subsequently.
 E.g.: A CLR-12-10-R-P-A with right-hand swivel can be converted to the left-hand swivel variant CLR-12-10-L-P-A by loosening the guide pin and rotating the slotted guide plate.

Linear/swivel clamp CLR

Accessories




Foot mounting HNA

Materials:

Galvanised steel

Free of copper and PTFE


RoHS-compliant

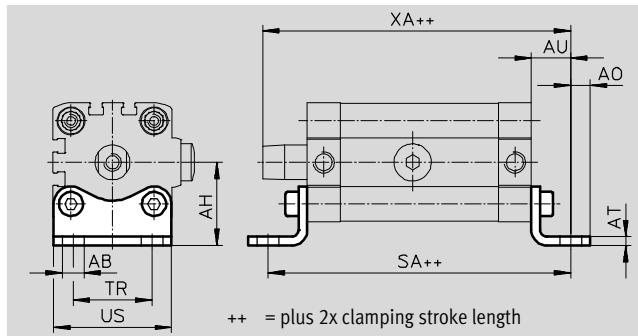

Dimensions and ordering data													
For \varnothing [mm]	AB \varnothing H14	AH	AO	AT	AU	SA	TR	US	XA	CRC ¹⁾	Weight [g]	Part No.	Type
12	5.8	21	5	3	13	86.6	16	26	84.5	1	39	537237	HNA-12
16		22	4.75			88.5	18	27.5	86.4	1	42	537238	HNA-16
20	7	27	6.25	4	16	111.5	22	34.5	111.9	1	84	537239	HNA-20
25		29				114.5	26	38.5	114.9	1	90	537240	HNA-25
32		33.5				133	32	46	137.4	1	123	537241	HNA-32
40	10	38	9	5	21	138.5	36	54	140.9	1	157	537242	HNA-40
50		45	159.5			45	64	159.7	1	278	537243	HNA-50	
63		50	166.9			50	75	166.7	1	328	537244	HNA-63	

1) Corrosion resistance class 1 according to Festo standard 940 070

Components subject to low corrosion stress. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

 - Note
The foot mounting HNA can only be used for the variant K11-R8 with a diameter of 40 or over.


Linear/swivel clamp CLR

Accessories



Flange mounting FNC

Materials:
Galvanised steel
Free of copper and PTFE
RoHS-compliant

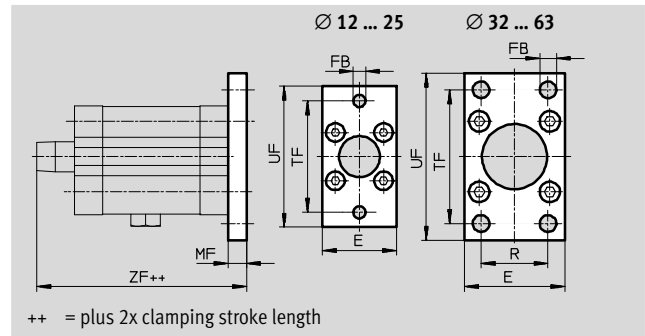


Dimensions and ordering data											
For Ø	E	FB	MF	R	TF	UF	ZF	CRC ¹⁾	Weight	Part No.	Type
[mm]		Ø H13							[g]		
12	28	5.5	8	-	40	50	79.5	1	79	537245	FNC-12
16	29				43	55	81.4	1	88	537246	FNC-16
20	36				55	70	103.9	1	141	537247	FNC-20
25	40	6.6			60	76	106.9	1	165	537248	FNC-25
32	45	7	10	32	64	80	131.4	1	221	174376	FNC-32
40	54	9		36	72	90	132.9	1	291	174377	FNC-40
50	65	12		45	90	110	150.7	1	536	174378	FNC-50
63	75		50	100	120	157.7	1	679	174379	FNC-63	

1) Corrosion resistance class 1 according to Festo standard 940 070
Components subject to low corrosion stress. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Clamping finger CLR....-FS

Materials: clamping finger:
12 ... 40: anodised aluminium
50 ... 63: high-alloy stainless steel
Mounting screw, tightening bolt, lock
nut: galvanised steel
Dust cap: neoprene

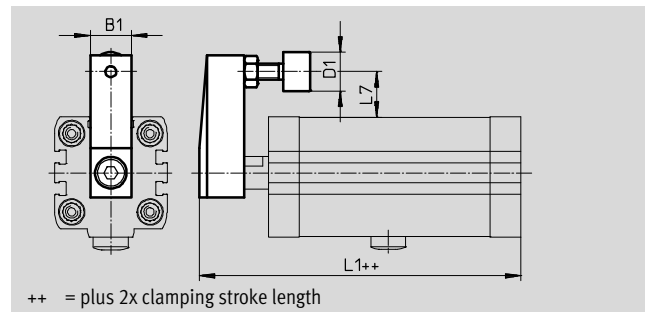






For Ø	B1	D1	L1		L7	Part No.	Type
[mm]		Ø	Basic design	K11-R8			
12	10	11	76.5	-	11.8	535551	CLR-12-FS
16	11		79.4		12.25	535552	CLR-16-FS
20	16		104.4		17.5	535553	CLR-20/25-FS
25		107.4	115.5	15.5	535554	CLR-32/40-FS	
32	20	133.3	141.4	25.75			
40		134.8	142.9	22			
50	25	24	153.2	160.85	32.5	535555	CLR-50/63-FS
63			160.2	167.85	27.5		

Linear/swivel clamp CLR


Accessories

FESTO

Ordering data – One-way flow control valves				Technical data → Internet: grl			
	Connection		Material	Part No.	Type		
	Thread	For tubing O.D. [mm]					
For exhaust air							
	M5	3	Metal design	193137	GRLA-M5-QS-3-D		
		4		193138	GRLA-M5-QS-4-D		
		6		193139	GRLA-M5-QS-6-D		
	G $\frac{1}{8}$	3		193142	GRLA- $\frac{1}{8}$ -QS-3-D		
		4		193143	GRLA- $\frac{1}{8}$ -QS-4-D		
		6		193144	GRLA- $\frac{1}{8}$ -QS-6-D		
		8		193145	GRLA- $\frac{1}{8}$ -QS-8-D		
				G $\frac{1}{8}$	4	578797	VFOH-LE-A-G18-Q4
					6	578798	VFOH-LE-A-G18-Q6
8	578799		VFOH-LE-A-G18-Q8				
	G $\frac{1}{8}$	6	162965	GRLA- $\frac{1}{8}$ -QS-6-RS-B			
		8	162966	GRLA- $\frac{1}{8}$ -QS-8-RS-B			
For supply air							
	M5	3	Metal design	193153	GRLZ-M5-QS-3-D		
		4		193154	GRLZ-M5-QS-4-D		
		6		193155	GRLZ-M5-QS-6-D		
	G $\frac{1}{8}$	3		193156	GRLZ- $\frac{1}{8}$ -QS-3-D		
		4		193157	GRLZ- $\frac{1}{8}$ -QS-4-D		
		6		193158	GRLZ- $\frac{1}{8}$ -QS-6-D		
		8		193159	GRLZ- $\frac{1}{8}$ -QS-8-D		

Ordering data – One-way flow control valves				Technical data → Internet: grla	
	Connection		Material	Part No.	Type
	Thread ¹⁾	For tubing I.D. [mm]			
For exhaust air					
	M5	3	Metal design	151161	GRLA-M5-PK-3-B
		4		151162	GRLA-M5-PK-4-B
	G $\frac{1}{8}$	3		151166	GRLA-1/8-PK-3-B
		4		151167	GRLA-1/8-PK-4-B
		6		151168	GRLA-1/8-PK-6-B



1) Union nut for barbed connector only with screw-in thread G $\frac{1}{8}$




Ordering data – Tubing			Technical data → Internet: pun	
	Flame-retardant	Material		
	Standard O.D. tubing	For use in the immediate vicinity of welding applications	Polyurethane	PUN-V0



Linear/swivel clamp CLR


Accessories

FESTO

Ordering data – Proximity sensor for T-slot, magneto-resistive					Technical data → Internet: smt	
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part No.	Type
N/O contact						
	Inserted in the slot from above, flush with the cylinder profile, short design	PNP	Cable, 3-wire	2.5	574335	SMT-8M-A-PS-24V-E-2,5-OE
			Plug M8x1, 3-pin	0.3	574334	SMT-8M-A-PS-24V-E-0,3-M8D
			Plug M12x1, 3-pin	0.3	574337	SMT-8M-A-PS-24V-E-0,3-M12
		NPN	Cable, 3-wire	2.5	574338	SMT-8M-A-NS-24V-E-2,5-OE
Plug M8x1, 3-pin	0.3		574339	SMT-8M-A-NS-24V-E-0,3-M8D		
N/C contact						
	Inserted in the slot from above, flush with the cylinder profile, short design	PNP	Cable, 3-wire	7.5	574340	SMT-8M-A-PO-24V-E-7,5-OE

Ordering data – Proximity sensors for T-slot, magnetic reed					Technical data → Internet: sme		
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part No.	Type	
N/O contact							
	Inserted in the slot from above, flush with the cylinder profile	Contacting	Cable, 3-wire	2.5	543862	SME-8M-DS-24V-K-2,5-OE	
				5.0	543863	SME-8M-DS-24V-K-5,0-OE	
			Plug M8x1, 3-pin	Cable, 2-wire	2.5	543872	SME-8M-ZS-24V-K-2,5-OE
				0.3	543861	SME-8M-DS-24V-K-0,3-M8D	
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	2.5	150855	SME-8-K-LED-24	
			Plug M8x1, 3-pin	0.3	150857	SME-8-S-LED-24	
N/C contact							
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	7.5	160251	SME-8-O-K-LED-24	


Ordering data – Connecting cables				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
			5	541334	NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541363	NEBU-M12G5-K-2.5-LE3
			5	541364	NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3
	Angled socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541367	NEBU-M12W5-K-2.5-LE3
			5	541370	NEBU-M12W5-K-5-LE3

Ordering data – Slot cover for T-slot				
	Mounting	Length [m]	Part No.	Type
	Inserted from above	2x 0.5	151680	ABP-5-S

Product Range and Company Overview

A Complete Suite and Company Overview

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.

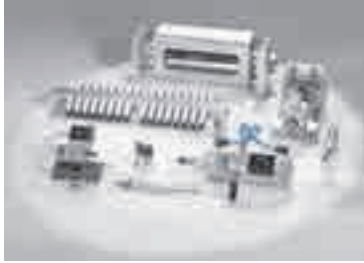

Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drivers



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 16,000 employees in 60 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.




© Copyright 2013, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmental friendly printing plant.

Festo North America

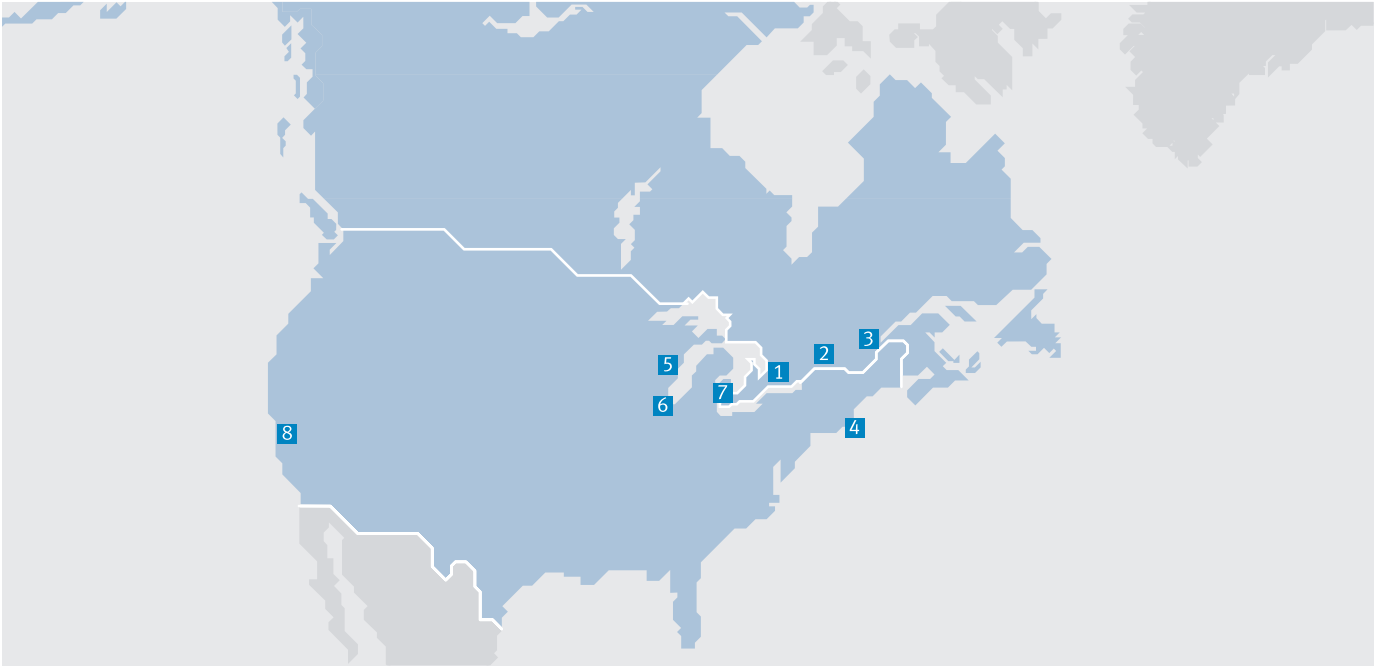

**1 Festo Canada
Headquarters
Festo Inc.**
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters
Festo Corporation**
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:
Tel: 1 877 GO FESTO (1 877 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: festo.canada@ca.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: technical.support@ca.festo.com

USA Customers

Commercial Support:
Tel: 1 800 99 FESTO (1 800 993 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: customer.service@us.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: product.support@us.festo.com