

Cylinders DSBG to ISO 15552



Cylinders DSBG to ISO 15552

Key features

At a glance



DIN










VDMA

- Cylinders to ISO 15552 (corresponds to the withdrawn standards ISO 6431, DIN ISO 6431, VDMA 24 562, NF E 49 003.1 and UNI 10290)

- Sturdy tie rod design
- Double-acting
- For contactless position sensing
- EX4: for use in potentially explosive areas
- Extensive range of accessories makes it possible to install the cylinder virtually anywhere

- Choice of two cushioning types:
 - P cushioning: elastic cushioning rings/pads at both ends
 - PPV cushioning: pneumatic cushioning, adjustable at both ends


- The variants can be configured according to individual needs using a modular product system
- High flexibility thanks to the wide range of variants

Variants from the modular product system		
Symbol	Features	Description
	T Through piston rod	For working at both ends, equal force in the forward and return stroke, for attaching external stops
	R3 High corrosion protection	All external cylinder surfaces comply with corrosion resistance class 3 to Festo standard 940 070. The piston rod is made from corrosion and acid-resistant steel
	T1 Heat-resistant seals	Temperature range 0 ... +120 °C
	T4 Heat-resistant seals	Temperature range 0 ... +150 °C
	...E Piston rod extension	1 ... 500 mm
	...L Piston rod thread extension	1 ... 100 mm
	M36 Piston rod thread	Piston rod thread version M36 (standard: precision thread M36x2)
	M42 Piston rod thread	Piston rod thread version M42 (standard: precision thread M42x2)
	M48 Piston rod thread	Piston rod thread version M48 (standard: precision thread M48x2)
	V Central swivel mounting	Swivel mounting, clamped centrally between end caps
	...Y Swivel mounting position	Swivel mounting, position freely selectable, positive-locking screw connection
	B Integrated stud bolts	<ul style="list-style-type: none"> • B1: At both ends • B2: On the bearing cap • B3: On the end cap

Cylinders DSBG to ISO 15552

Peripherals overview

FESTO

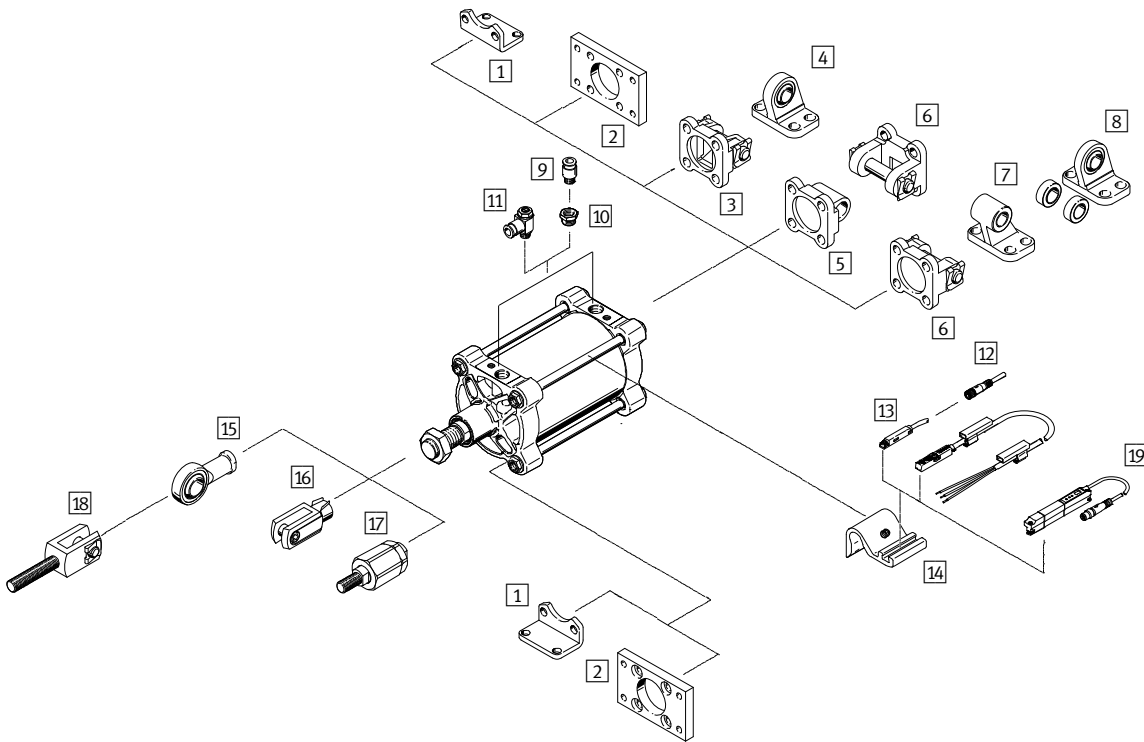

Mounting components and accessories		For Ø	Description	→ Page/Internet
1	Foot mounting HNG	160 ... 320	For bearing and end cap, corresponds to MS1 to ISO 15552	15
2	Flange mounting FNG	160 ... 320	For bearing or end cap, corresponds to MF1/MF2 to ISO 15552	15
3	Swivel flange SNG	160, 200	For end caps	16
4	Clevis foot LSNG	160, 200	With spherical bearing	18
5	Swivel flange SNGL	160, 200	For end cap, corresponds to MP2 to ISO 15552	17
6	Swivel flange SNGB	160 ... 320	For end cap, corresponds to MP2 to ISO 15552	16
7	Clevis foot LN/LNG	160 ... 320	For swivel flange SNGB	18
8	Clevis foot LSN	160 ... 320	With spherical bearing	18
9	Push-in fitting QS	160, 200	For connecting compressed air tubing with standard O.D.	quick star
10	Reducing nipple NPFC	160, 200	For connecting QS fittings with thread G $\frac{1}{2}$ to cylinders with thread G $\frac{3}{4}$	19
	Reducing nipple D	250, 320	For connecting QS fittings with thread G $\frac{1}{2}$ to cylinders with thread G1	
11	One-way flow control valve GRLA	160, 200	For regulating speed	gla
12	Connecting cable NEBU	160 ... 320	–	19
13	Proximity sensor SME/SMT-8	160 ... 320	For sensing the piston position	18
14	Sensor bracket DASP	160 ... 320	For proximity sensors SME/SMT-8	19
15	Rod eye SGS	160 ... 320	With spherical bearing	18
16	Rod clevis SG	160 ... 320	Permits a swivelling movement of the cylinder in one plane	18
17	Self-aligning rod coupler FK	160, 200	For compensating radial and angular misalignments	18
18	Rod clevis SGA	160, 200	Suitable for spherical mounting of cylinders in conjunction with rod eye SGS	18
19	Position transmitter SDAT	160, 200	– Continuously senses the position of the piston – Has an analogue output	19
–	Trunnion support LNZG	160 ... 320	For mounting the cylinder in combination with central swivel mounting or swivel mounting position	17


Cylinders DSBG to ISO 15552

Type codes

		DSBG	-		-	160	-	50	-		-	PPV		A
Type														
Double-acting														
DSBG	ISO cylinder													
Central swivel mounting														
-	Without													
V	Centrally clamped													
Piston Ø [mm]														
Stroke [mm]														
Piston rod type														
-	Single-ended piston rod													
T	Through piston rod													
Cushioning														
P	Elastic cushioning rings/pads at both ends													
PPV	Pneumatic cushioning, adjustable at both ends													
Position sensing														
A	Via proximity sensor													

Cylinders DSBG to ISO 15552


Type codes

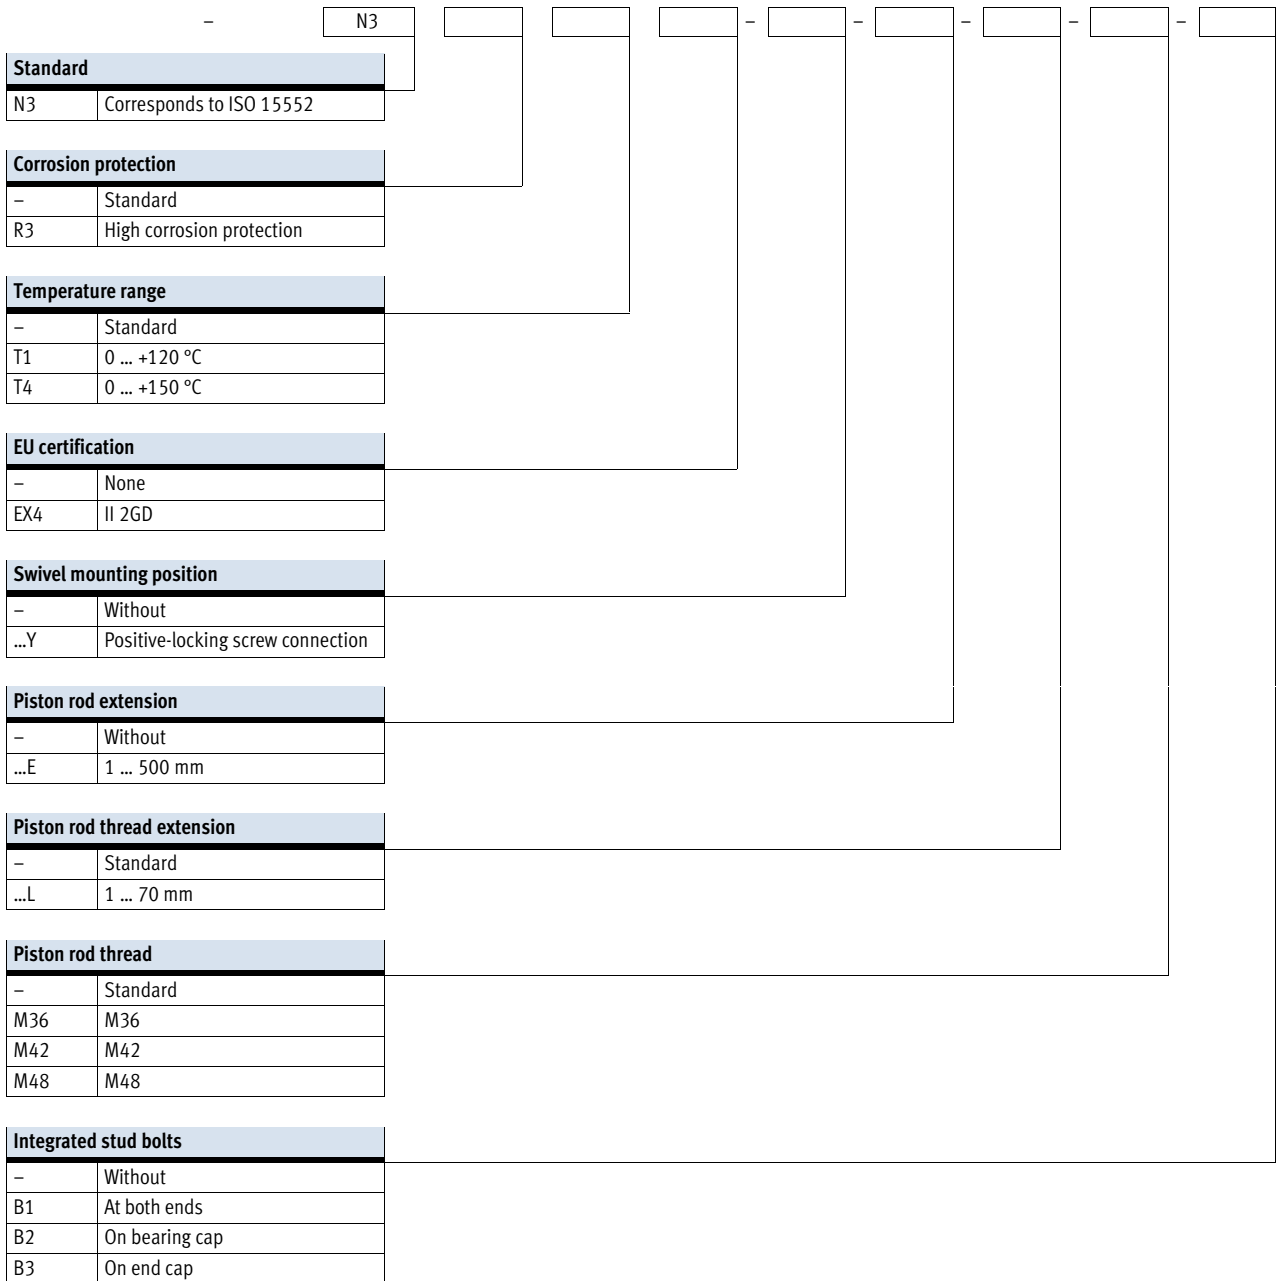


Cylinders DSBG to ISO 15552

Technical data

Function
P cushioning





PPV cushioning



DIN

VDMA

-  - Diameter
160 ... 320 mm

-  - Stroke length
1 ... 2700 mm

-  - www.festo.com



General technical data				
Piston Ø	160	200	250	320
Design	Piston/piston rod/cylinder barrel			
Mode of operation	Double-acting			
Pneumatic connection	G $\frac{3}{4}$	G $\frac{3}{4}$	G1	G1
Stroke ¹⁾				
DSBG-... [mm]	1 ... 2700		1 ... 2250	
DSBG-...-...E [mm]	1 ... 2000			
DSBG-...-...L [mm]	1 ... 2000			
Cushioning				
DSBG-...-P	Elastic cushioning rings/pads at both ends			
DSBG-...-PPV	Pneumatic cushioning, adjustable at both ends			
Cushioning length [mm]	48		55	65
Position sensing	Via proximity sensor			
Type of mounting	Via internal thread/accessories			
Mounting position	Any			

1) In combination with the position sensing option, the minimum stroke is 10 mm

Operating and environmental conditions		
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	
Operating pressure [bar]	0.6 ... 10	
Ambient temperature ¹⁾		
DSBG-... [°C]	-20 ... +80	
DSBG-...-T1 [°C]	0 ... +120	
DSBG-...-T4 [°C]	0 ... +150	
DSBC-...-EX4 [°C]	-20 ... +60	
Corrosion resistance class CRC		
DSBG-... [2 ²⁾		
DSBG-...-R3 [3 ³⁾		

1) Note operating range of proximity sensors

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

3) Corrosion resistance class CRC 3 to Festo standard FN 940070

High corrosion stress. Outdoor exposure under moderate corrosive conditions. External visible parts with primarily functional requirements for the surface and which are in direct contact with a normal industrial environment.

Cylinders DSBG to ISO 15552

Technical data

FESTO

ATEX ¹⁾	
Explosion-proof ambient temperature	-20°C ≤ Ta ≤ +60°C
CE marking (see declaration of conformity)	To EU Explosion Protection Directive (ATEX)
ATEX category for gas	II 2G
Explosion ignition protection type for gas	c T4
ATEX category for dust	II 2D
Explosion ignition protection type for dust	c T120°C

1) Note the ATEX certification of the accessories.

Forces [N] and impact energy [J]				
Piston Ø	160	200	250	320
Theoretical force at 6 bar, advancing	12,064	18,850	29,452	48,255
Theoretical force at 6 bar, retracting	11,310	18,096	28,274	46,385
Max. impact energy in the end positions				
DSBG-...	3.3	4.8	7.2	12.6
DSBG-...-T1/-T4	2.3	4	4.2	6

Permissible impact velocity

$$v_{perm.} = \sqrt{\frac{2 \times E_{perm.}}{m_{intrinsic} + m_{Load}}}$$

Maximum permissible load:

$$m_{Load} = \frac{2 \times E_{perm.}}{v^2} - m_{intrinsic}$$



$v_{perm.}$ Permissible impact velocity
 $E_{perm.}$ Maximum impact energy
 $m_{intrinsic}$ Moving mass (drive)
 m_{Load} Moving payload

Weight [g]				
Piston Ø	160	200	250	320
DSBG-...				
Product weight with 0 mm stroke	11,751	15,493	29,313	50,231
Additional weight per 10 mm stroke	208	246	384	623
Moving mass with 0 mm stroke	4292	5348	9978	16,912
Moving mass per 10 mm stroke	97	97	157	249
DSBG-...-T				
Product weight with 0 mm stroke	13,487	17,356	31,979	54,775
Additional weight per 10 mm stroke	304	343	541	872
Moving mass with 0 mm stroke	6028	7210	12,643	21,455
Moving mass per 10 mm stroke	194	194	314	499

Cylinders DSBG to ISO 15552

Technical data


Max. lateral force F_q as a function of stroke length l

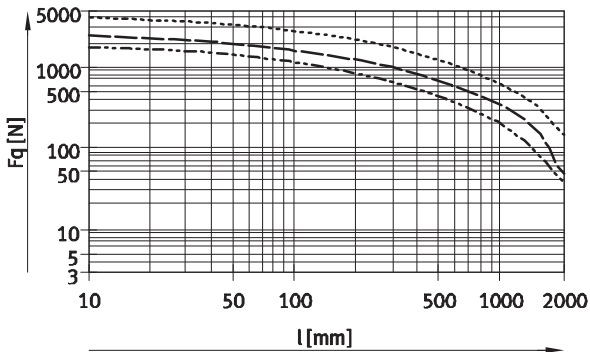

- \varnothing 160/200
- \varnothing 250
- \varnothing 320

Materials

Sectional view

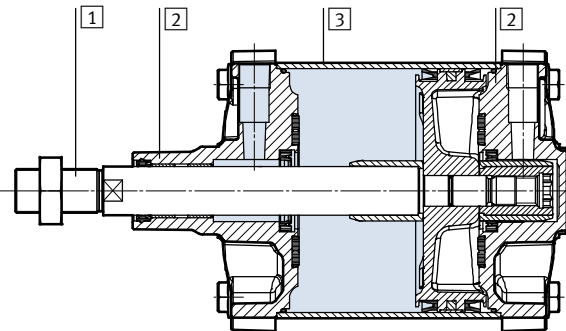


ISO cylinder		
1	Piston rod, tie rod	
	DSBG-... DSBG-...-R3	High-alloy steel High-alloy stainless steel
2	Cover	Coated die-cast aluminium
3	Cylinder barrel	Anodised wrought aluminium alloy
-	Piston rod seal	
	DSBG-... DSBG-...-T1/-T4	NBR FPM
-	Cushioning seal	
	DSBG-... DSBG-...-T1/-T4	PUR FPM
-	Cushioning boss	
	DSBG-... DSBG-...-T1/-T4	POM Wrought aluminium alloy
-	Note on materials	
	DSBG-... DSBG-...-T4	RoHS-compliant Contains PWIS (paint-wetting impairment substances)

Cylinders DSBG to ISO 15552

Technical data

Dimensions

Download CAD data → www.festo.com

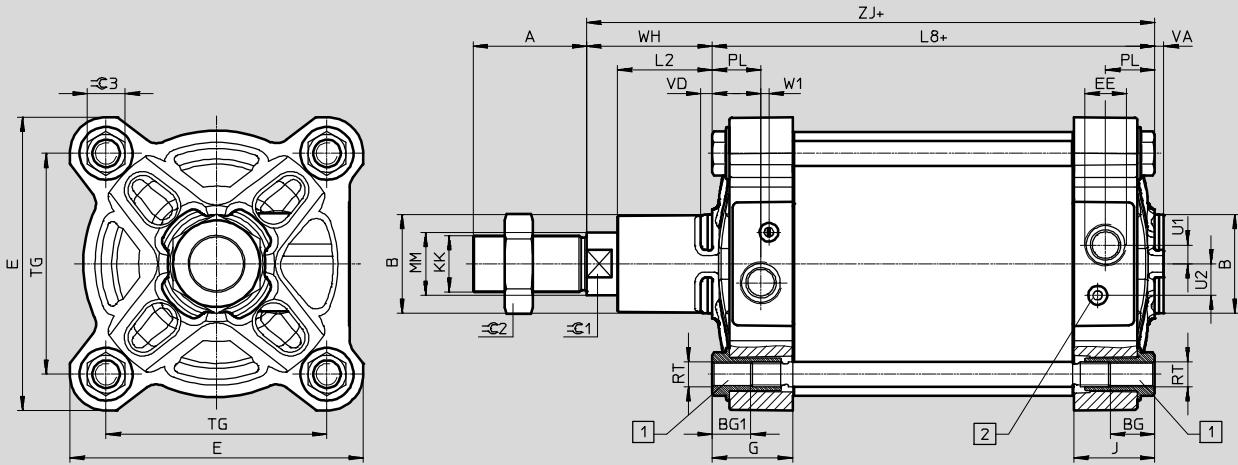

+ = plus stroke length

1 Special outer hex nut with female thread for mounting attachments

2 Regulating screw for adjustable end-position cushioning (PPV)

∅	A	B	BG	BG1	E	EE	G	J
[mm]	-0.5	∅ d11	min.	±0.5	±0.9			
160	72	65	24	25	186	G3/4	52	52
200	72	75	24	25	230	G3/4	48.2	50.2
250	84	90	25	26	284	G1	53	53
320	96	110	28	29	347	G1	60	60

∅	KK		L2	L8	MM	PL	RT	TG	U1
	DSBG-...	-M...							
[mm]								±1.1	
160	M36x2	M36	60	180±1.1	40	31	M16	140	12
200	M36x2	M36	70	180±1	40	30	M16	175	12
250	M42x2	M42	80	200±1	50	32	M20	220	25
320	M48x2	M48	90	220±2.2	63	37.5	M24	270	25

∅	U2	VA	VD	W1	WH	ZJ	∅C1	∅C2	∅C3
[mm]		-1				±1			
160	20	6	7.5	5	80±1.3	260	36	55	24 _{h13}
200	20	6	7.5	5	95±1.4	275	36	55	24 _{h13}
250	25	10	13.7	3	105±1.5	305	46	65	41 _{h14}
320	25	10	10.7	1.5	120±1.5	340	55	75	50 _{h14}


Cylinders DSBG to ISO 15552

Technical data

Dimensions – Variants


Download CAD data → www.festo.com

T – Through piston rod

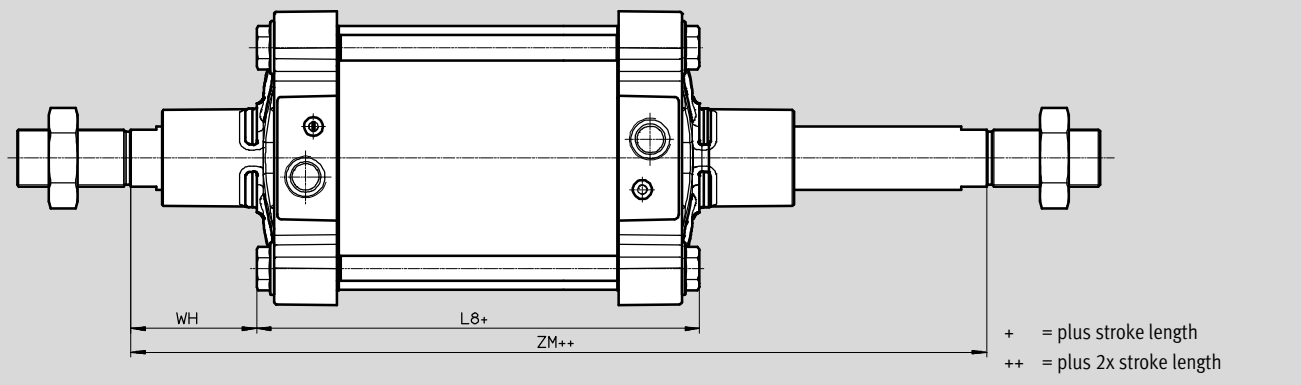


∅	L8	WH	ZM
[mm]			
160	180±1.1	80±1.3	342±1
200	180±1	95±1.4	372±1.2
250	200±1	105±1.5	410±1.6
320	220±2.2	120±1.5	462±1

...E – Piston rod extension

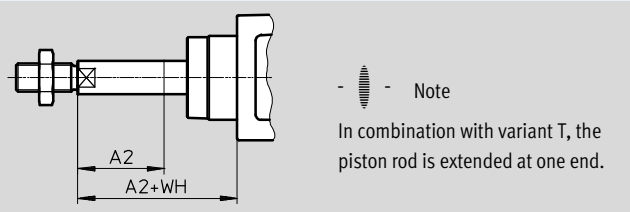

...L – Piston rod thread extension

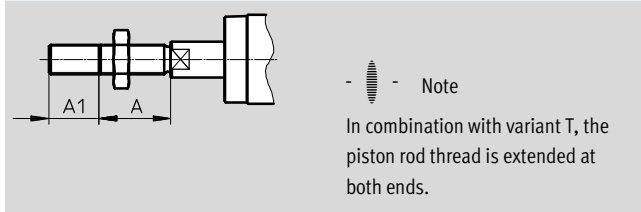

∅	A	A1		A2		WH
		min.	max.	min.	max.	
[mm]						
160	72	1	70	1	500	80±1.3
200	72	1	70	1	500	95±1.4
250	84	1	100	1	500	105±1.5
320	96	1	100	1	500	120±1.5


Cylinders DSBG to ISO 15552

Technical data

Dimensions – Variants

Download CAD data → www.festo.com


V – Central swivel mounting

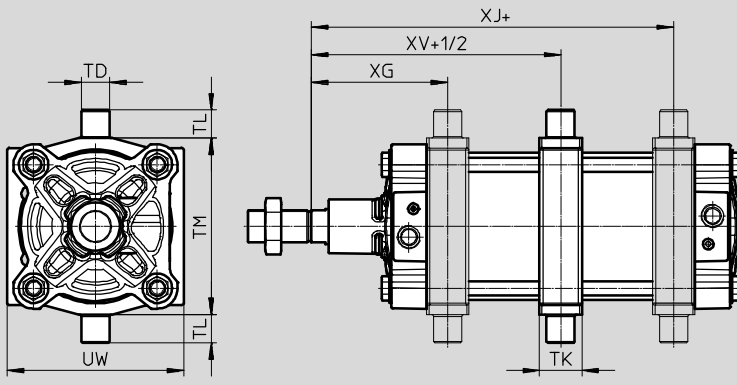


+ = plus stroke length
+1/2 = plus half stroke length

∅	TD	TK	TL	TM	UW	XG	XJ	XV
[mm]	∅ e8		h14	h14		±0.5	±0.5	
160	32	48	32	200	200	157.5	182.5	170
200	32	48	32	250	240	169	200.5	185

...Y – Swivel mounting position

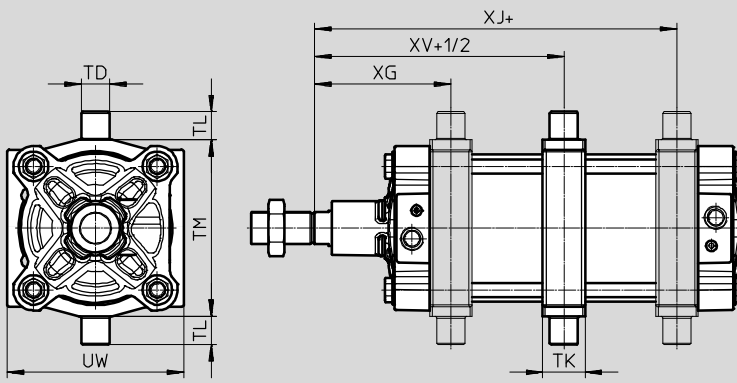

 Note
The swivel mounting has a positive-locking screw connection.

+ = plus stroke length
+1/2 = plus half stroke length

∅	TD	TK	TL	TM	UW	XG	XJ	XV
[mm]	∅ e8		h14	h14		±2.4	±2.4	±2.4
250	40	60	40	320	319	198	209	205
320	50	70	50	400	385	226	233	230


Cylinders DSBG to ISO 15552

Technical data

Dimensions – Variants

Download CAD data → www.festo.com

B1/B2/B3 – Integrated stud bolt

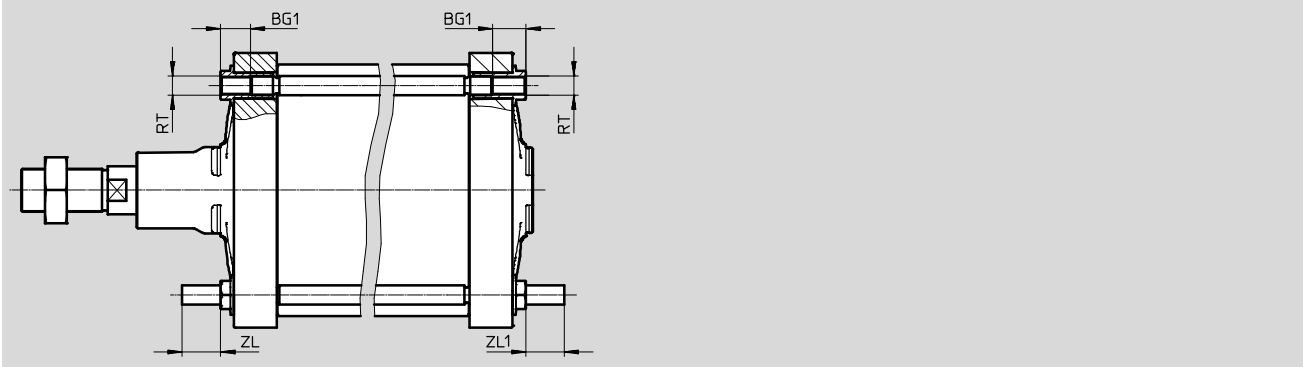

∅	BG	BG1	RT	ZL	ZL1 ¹⁾
[mm]	min.	±0.5		±0.5	
160	24	25	M16	32	32
200	24	25	M16	32	32
250	25	26	M20	40	40
320	28	29	M24	50	50


1) Tolerances depending on variant:
 B1: ZL1 = +1/-2; B3: ZL1 = ±0.5

Cylinders DSBG to ISO 15552

Technical data

Ordering data					
Piston Ø [mm]	Stroke [mm]	With PPV cushioning		With P cushioning	
		Part No.	Type	Part No.	Type
160	25	2029462	DSBG-160-25-PPVA-N3	2536747	DSBG-160-25-P-N3
	40	2029463	DSBG-160-40-PPVA-N3	2536748	DSBG-160-40-P-N3
	50	2029464	DSBG-160-50-PPVA-N3	2536749	DSBG-160-50-P-N3
	80	2029465	DSBG-160-80-PPVA-N3	2536750	DSBG-160-80-P-N3
	100	2029466	DSBG-160-100-PPVA-N3	2536751	DSBG-160-100-P-N3
	125	2029467	DSBG-160-125-PPVA-N3	2536752	DSBG-160-125-P-N3
	160	2029468	DSBG-160-160-PPVA-N3	2536753	DSBG-160-160-P-N3
	200	2029469	DSBG-160-200-PPVA-N3	2536754	DSBG-160-200-P-N3
	250	2029470	DSBG-160-250-PPVA-N3	2536755	DSBG-160-250-P-N3
	320	2029471	DSBG-160-320-PPVA-N3	2536756	DSBG-160-320-P-N3
	400	2029472	DSBG-160-400-PPVA-N3	2536758	DSBG-160-400-P-N3
	500	2029473	DSBG-160-500-PPVA-N3	2536759	DSBG-160-500-P-N3
	1 ... 2700 ¹⁾	2035926	DSBG-160-...-PPVA-N3	2537196	DSBG-160-...-P-N3
200	25	2390139	DSBG-200-25-PPVA-N3	2537448	DSBG-200-25-P-N3
	40	2390140	DSBG-200-40-PPVA-N3	2537449	DSBG-200-40-P-N3
	50	2390141	DSBG-200-50-PPVA-N3	2537450	DSBG-200-50-P-N3
	80	2390142	DSBG-200-80-PPVA-N3	2537451	DSBG-200-80-P-N3
	100	2390143	DSBG-200-100-PPVA-N3	2537452	DSBG-200-100-P-N3
	125	2390144	DSBG-200-125-PPVA-N3	2537454	DSBG-200-125-P-N3
	160	2390145	DSBG-200-160-PPVA-N3	2537455	DSBG-200-160-P-N3
	200	2390146	DSBG-200-200-PPVA-N3	2537456	DSBG-200-200-P-N3
	250	2390147	DSBG-200-250-PPVA-N3	2537457	DSBG-200-250-P-N3
	320	2390148	DSBG-200-320-PPVA-N3	2537458	DSBG-200-320-P-N3
	400	2390149	DSBG-200-400-PPVA-N3	2537459	DSBG-200-400-P-N3
	500	2390150	DSBG-200-500-PPVA-N3	2537460	DSBG-200-500-P-N3
	1 ... 2700 ¹⁾	2389803	DSBG-200-...-PPVA-N3	2537445	DSBG-200-...-P-N3
250	1 ... 2250 ¹⁾	2865078	DSBG-250-...-PPVA-N3	2865145	DSBG-250-...-P-N3
320	1 ... 2250 ¹⁾	3150987	DSBG-320-...-PPVA-N3	3178601	DSBG-320-...-P-N3

1) In combination with the position sensing option, the minimum stroke is 10 mm.

 Note
Other variants in the modular product system → 14

Cylinders DSBG to ISO 15552

Ordering data – Modular products

Ordering table							
Size	160	200	250	320	Condi- tions	Code	Enter code
M Module No.	2036032	2344936	2732003	2776472			
Function	ISO cylinder, double-acting, based on ISO 15552					DSBG	DSBG
O Central swivel mounting	Without						
	Centrally clamped		-			-V	
M Piston ∅ [mm]	160	200	250	320		-...	
Stroke [mm]	1 ... 2700		1 ... 2250		1	-...	
O Piston rod type	Single-ended piston rod						
	Through piston rod					-T	
M Cushioning	Elastic cushioning rings/pads at both ends					-P	
	Pneumatic cushioning, adjustable at both ends					-PPV	
O Position sensing	Without						
	Via proximity sensor					A	
Standard	Corresponds to ISO 15552					-N3	N3
Corrosion protection	Standard						
	High corrosion protection				2	R3	
Temperature range	Standard						
	[°C]	Heat-resistant seals up to max. 120					T1
	[°C]	0 ... +150		-			T4
EU certification	None						
	II 2GD				3	EX4	
Swivel mounting position [mm] (positive-locking)	Without						
			198 ... 2459	226 ... 2483			-...Y
Piston rod extension [mm]	Without						
	1 ... 500				4	-...E	
Piston rod thread extension [mm]	Without						
	1 ... 70		1 ... 100		4	-...L	
Piston rod thread	Standard						
	M36		-			-M36	
	-		M42	-		-M42	
	-		M48			-M48	
Integrated stud bolts	Without						
	At both ends					-B1	
	On bearing cap					-B2	
	On end cap					-B3	

- 1** ... In combination with the position sensing option A, the minimum stroke is 10 mm
- 2** **R3** Not with V, ...Y
- 3** **EX4** Not with V, P, T1, T4, B1, B2, B3
- 4** **...E, ...L** Only up to strokes of 2000 mm

M Mandatory data
O Options

Transfer order code


DSBG - - - - - - - - **N3** - - - - -

Standard cylinders DSBG, to ISO 15552

Accessories

Foot mounting HNG

Material:
Galvanised steel
Free of copper and PTFE


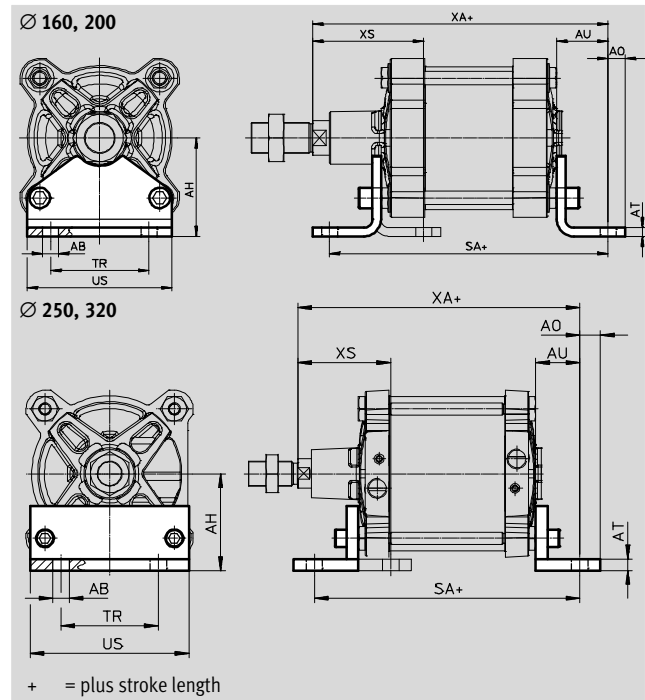


Dimensions and ordering data														
For Ø	AB	AH	AO	AT	AU	SA	TR	US	XA	XS	CRC ¹⁾	Weight	Part No.	Type
[mm]	Ø											[g]		
160	18.5	115	20	10	60	300	115	169	320	130	2	3931	34476	HNG-160
200	24	135	30	12	70	320	135	214	345	153	2	6896	34477	HNG-200
250	28	165	35	20	75	350	165	270	380	160	2	17084	157510	HNG-250
320	35	200	40	25	85	390	200	340	425	180	2	29968	157511	HNG-320

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Flange mounting FNG

Material:
Painted spheroidal graphite cast iron
Free of copper and PTFE
RoHS-compliant

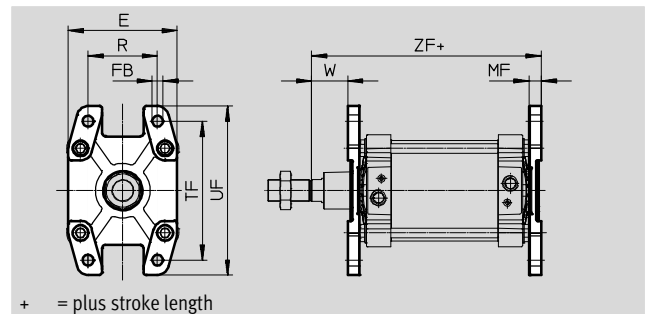

Dimensions and ordering data												
For Ø	E	FB	MF	R	TF	UF	W	ZF	CRC ¹⁾	Weight	Part No.	Type
[mm]		Ø H13								[g]		
160	180	18	20	115	230	280	60	280	1	3550	34478	FNG-160
200	220	22	25	135	270	320	70	300	1	5321	34479	FNG-200
250	270	26	25	165	330	390	80	330	1	8657	157508	FNG-250
320	340	33	30	200	400	470	90	370	1	15109	157509	FNG-320


1) Corrosion resistance class CRC 1 to Festo standard FN 940070
Low corrosion stress. For dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Standard cylinders DSBG, to ISO 15552

Accessories

Swivel flange SNG

Material:
Die-cast aluminium
Free of copper and PTFE
RoHS-compliant

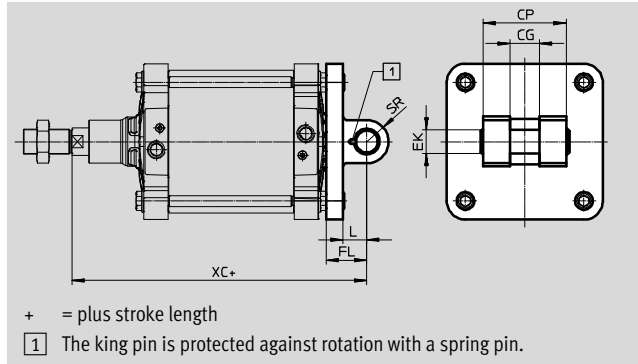


Dimensions and ordering data												
For Ø	CG	CP	EK Ø	FL	L	SR	XC	CRC ¹⁾	Weight	Part No.	Type	
[mm]	H14	d12	F7 h9	±0.2		max.			[g]			
160	43	122	35	55	35	32	315	2	3577	152597	SNG-160	
200	43	122	35	60	35	32	335	2	5160	152598	SNG-200	

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Swivel flange SNGB

Material:
Ø160: Die-cast aluminium
Ø200: Galvanised steel
Ø250/320: Spheroidal graphite cast iron
Free of copper and PTFE
RoHS-compliant

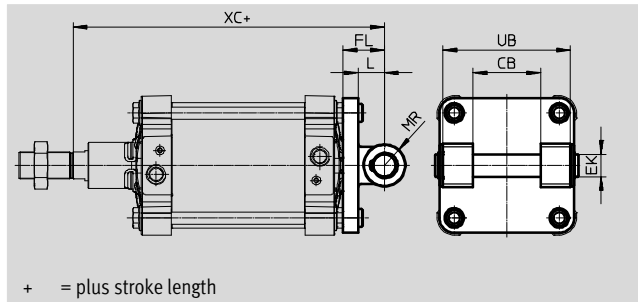

Dimensions and ordering data												
For Ø	CB	CD	FL	L	MR	UB	XC	CRC ¹⁾	Weight	Part No.	Type	
[mm]	H14 Ø	E10 Ø	±0.2			h14			[g]			
160	90	30	55	37	30	170	315	2	3438	34547	SNGB-160	
200	90	30	60	40	25	170	335	2	10013	562455	SNGB-200-B	
250	110	40	70	47	40	200	375	2	16141	157512	SNGB-250	
320	120	45	80	52	45	220	420	2	26636	157513	SNGB-320	


1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Standard cylinders DSBG, to ISO 15552

Accessories

Swivel flange SNGL

Material:
Die-cast aluminium
Free of copper and PTFE

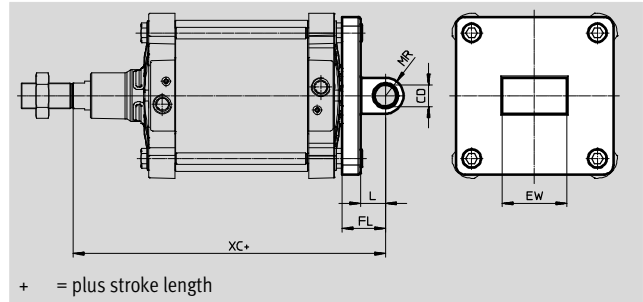


Dimensions and ordering data										
For \varnothing	CD \varnothing	EW	FL	L	MR	XC	CRC ¹⁾	Weight	Part No.	Type
[mm]	H9	-0.5/-1.2	± 0.2					[g]		
160	30	90	55	35	25	315	2	2358	151534	SNGL-160
200	30	90	60	35	25	335	2	3713	151535	SNGL-200

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Trunnion support LNZG

Material:
Mounting: Galvanised steel
Plain bearing: Plastic
Free of copper and PTFE
RoHS-compliant

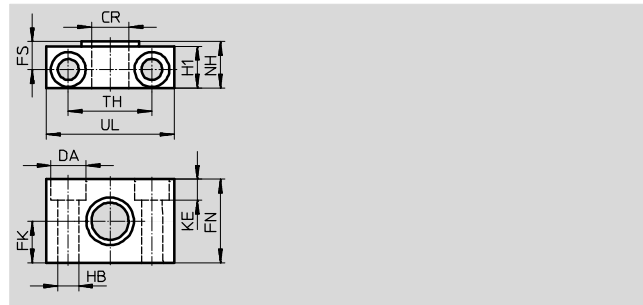




Dimensions and ordering data								
For \varnothing	CR \varnothing	DA \varnothing	FK \varnothing	FN	FS	H1	HB \varnothing	KE
[mm]		H13	± 0.2				H13	
160, 200	32 ^{D11}	26	30	60	22.5	36	18	17
250	40 ^{G7}	33	35	70	27.5	45	22	21.5
320	50 ^{G7}	40	40	80	32.5	55	26	25.5





For \varnothing	NH	TH	UL	CRC ¹⁾	Weight	Part No.	Type
[mm]		± 0.3			[g]		
160, 200	40	60	92	2	659	35780	LNZG-160/200
250	50	90	140	2	2218	157516	LNZG-250
320	60	100	150	2	2934	157517	LNZG-320



1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



Standard cylinders DSBG, to ISO 15552

Accessories

Ordering data – Mounting components				Technical data → Internet: mounting component			
Designation	For Ø	Part No.	Type	Designation	For Ø	Part No.	Type
Clevis foot LN/LNG				Clevis foot LSN			
	160	9037	LN-160		160	6988	LSN-160
	200	33898	LNG-200		200	6989	LSN-200
	250	9039	LN-250		250	6990	LSN-250
	320	9040	LN-320		320	6991	LSN-320
Clevis foot LSNG							
	160	152599	LSNG-160				
	200	152600	LSNG-200				

Ordering data – Piston rod attachments				Technical data → Internet: piston rod attachment			
Designation	For Ø	Part No.	Type	Designation	For Ø	Part No.	Type
Rod eye SGS				Rod clevis SGA			
	160, 200	10775	SGS-M36x2		160, 200	10771	SGA-M36x2
	250	10776	SGS-M42x2				
	320	10777	SGS-M48x2				
Rod eye SG				Self-aligning rod coupler FK			
	160, 200	9581	SG-M36x2		160, 200	10746	FK-M36x2
	250	9582	SG-M42x2				
	320	9583	SG-M48x2				

Ordering data – Proximity sensors for T-slot, magneto-resistive				Technical data → Internet: smt				
Type of mounting	Switching output	Electrical connection	Cable length [m]	Part No.	Type			
N/O contact								
	Insertable in the slot from above, flush with the cylinder profile, short design	PNP	Cable, 3-wire	2.5	574335	SMT-8M-A-PS-24V-E-2,5-OE		
			Plug connector M8x1, 3-pin	0.3	574334	SMT-8M-A-PS-24V-E-0,3-M8D		
		NPN	Plug connector M12x1, 3-pin	0.3	574337	SMT-8M-A-PS-24V-E-0,3-M12		
			Cable, 3-wire	2.5	574338	SMT-8M-A-NS-24V-E-2,5-OE		
Plug connector M8x1, 3-pin	0.3	574339	SMT-8M-A-NS-24V-E-0,3-M8D					
N/C contact								
	Insertable in the slot from above, flush with the cylinder profile, short design	PNP	Cable, 3-wire	7.5	574340	SMT-8M-A-PO-24V-E-7,5-OE		

Ordering data – Proximity sensors for T-slot, magnetic reed				Technical data → Internet: sme				
Type of mounting	Switching output	Electrical connection	Cable length [m]	Part No.	Type			
N/O contact								
	Insertable in the slot from above, flush with the cylinder profile	Contacting	Cable, 3-wire	2.5	543862	SME-8M-DS-24V-K-2,5-OE		
				5.0	543863	SME-8M-DS-24V-K-5,0-OE		
			Cable, 2-wire	2.5	543872	SME-8M-ZS-24V-K-2,5-OE		
				Plug connector M8x1, 3-pin	0.3	543861	SME-8M-DS-24V-K-0,3-M8D	
N/C contact								
	Insertable in the slot from above, flush with the cylinder profile	Contacting	Cable, 3-wire	7.5	546799	SME-8M-DO-24V-K-7,5-OE		

Standard cylinders DSBG, to ISO 15552


Accessories



FESTO


Position transmitter


The position transmitter continuously senses the position of the piston.

It has an analogue output with an output signal in proportion to the piston position.

Ordering data – Position transmitter for T-slot							Technical data → Internet: position transmitter	
	For Ø	Position measuring range	Analogue output	Type of mounting	Electrical connection	Cable length [m]	Part No.	Type
			[mA]					
	160, 200	0 ... 50	0 ... 20	Insertable in the slot from above	Plug connector M8x1, 4-pin, in-line	0.3	1531265	SDAT-MHS-M50-1L-SA-E-Q3-M8
		0 ... 80					1531266	SDAT-MHS-M80-1L-SA-E-Q3-M8
		0 ... 100					1531267	SDAT-MHS-M100-1L-SA-E-Q3-M8
		0 ... 125					1531268	SDAT-MHS-M125-1L-SA-E-Q3-M8
		0 ... 160					1531269	SDAT-MHS-M160-1L-SA-E-Q3-M8

Ordering data – Connecting cables				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
			5	541334	NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541363	NEBU-M12G5-K-2.5-LE3
			5	541364	NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3
	Angled socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541367	NEBU-M12W5-K-2.5-LE3
			5	541370	NEBU-M12W5-K-5-LE3

Ordering data – Sensor bracket for proximity sensor SME/SMT-8			
	For Ø	Materials	Part No. Type
	160, 200	Rail: Anodised wrought aluminium alloy	1553813 DASP-M4-160-A
	250	Screws: High-alloy stainless steel	1456781 DASP-M4-250-A
	320		3015256 DASP-M4-320-A

Ordering data – Reducing nipple			
	For Ø	Description	Part No. Type
	Reducing nipple NPFC		
	160, 200	For connecting QS fittings with thread G $\frac{1}{2}$ to cylinders with thread G $\frac{3}{4}$	8030313 NPFC-R-G34-G12-MF
	Reducing nipple D		
	250, 320	For connecting QS fittings with thread G $\frac{1}{2}$ to cylinders with thread G1	197634 D-1/2l-1A

Product Range and Company Overview

A Complete Suite and Company Overview

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drivers



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 16,000 employees in 60 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.




© Copyright 2013, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmental friendly printing plant.

Festo North America

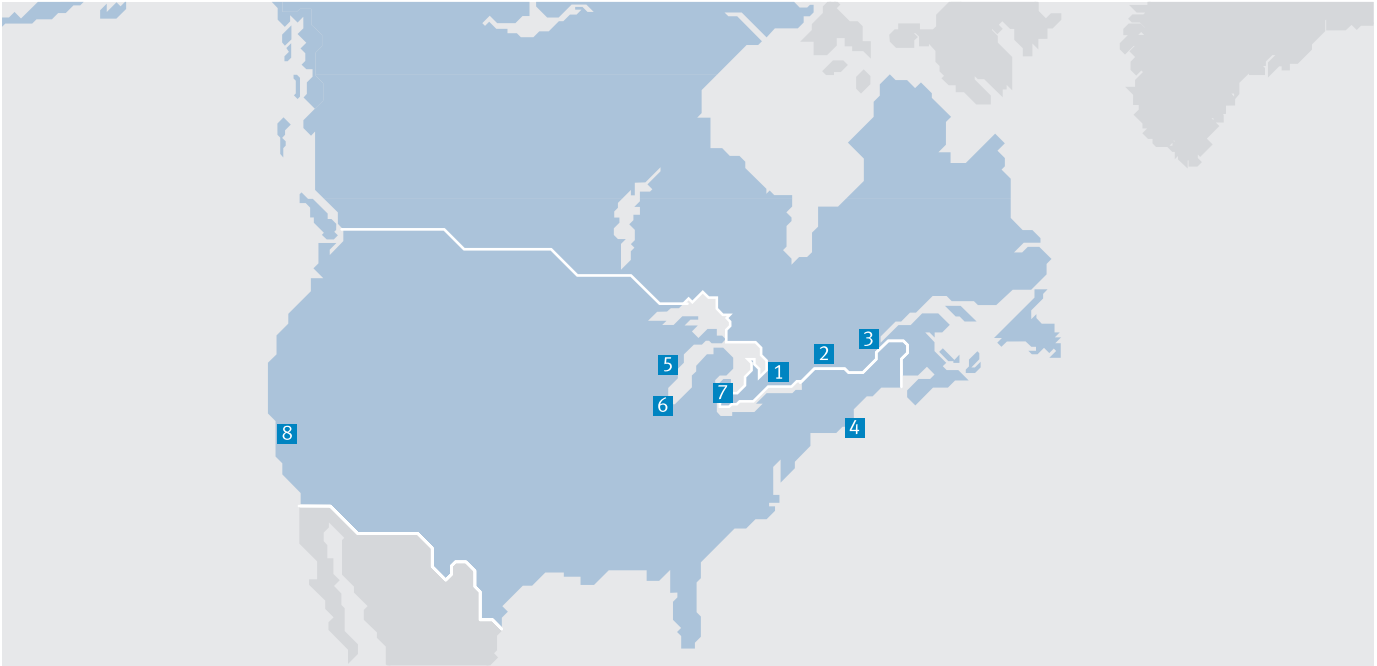

**1 Festo Canada
Headquarters
Festo Inc.**
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters
Festo Corporation**
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:
Tel: 1 877 GO FESTO (1 877 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: festo.canada@ca.festo.com

Technical Support:

Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: technical.support@ca.festo.com

USA Customers

Commercial Support:
Tel: 1 800 99 FESTO (1 800 993 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: customer.service@us.festo.com

Technical Support:

Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: product.support@us.festo.com