


Proportional pressure regulators VPPM



Proportional pressure regulators VPPM

General information

FESTO

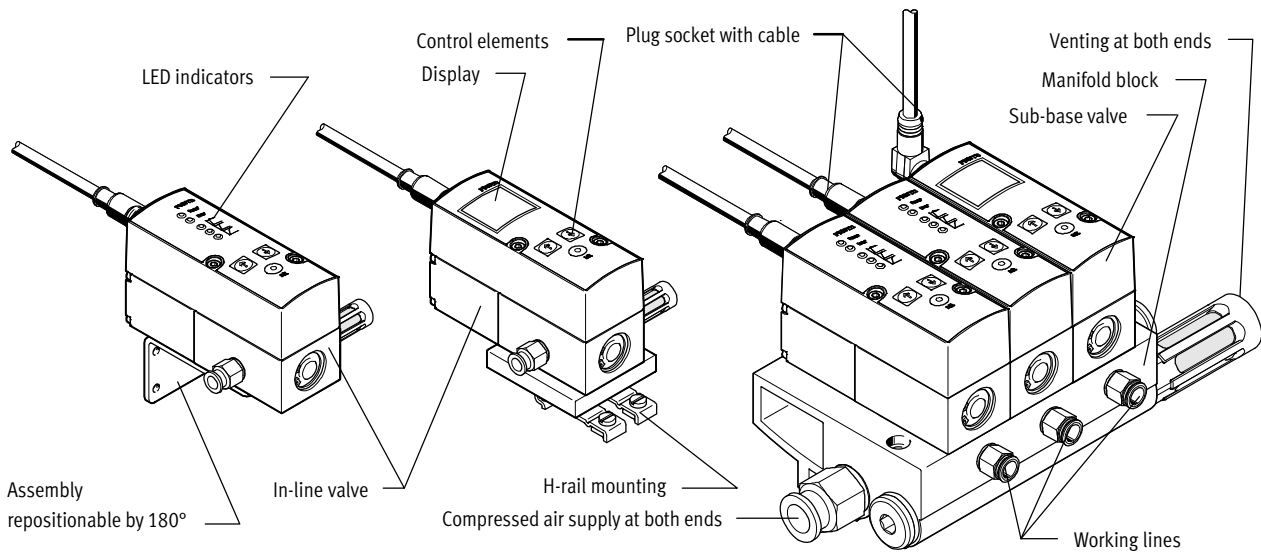

Innovative

- Multi-sensor control (cascade control)
- Diagnostics
- Choice of regulation characteristics
- Temperature compensated
- High dynamic response
- High repetition accuracy
- Modular product system
- IO-Link, for direct connection to a higher-level IO-Link/I-Port master

Versatile

- Individual valves (in-line valve)
- Manifold valves (sub-base/flange valve)
- Various user interfaces
 - LED indicators
 - LCD display
 - Adjustment/selection buttons
- A choice of valves with different pressure ranges
- Pressure range can be modified on the valve
- Choice of different setpoint specifications
 - Current input
 - Voltage input


Reliable

- Integrated pressure sensor with independent output
- Open circuit monitoring
- Pressure is maintained if the controller fails

Easy to mount

- Manifold block
- H-rail mounting
- Individually via mounting bracket
- QS fittings

Overview, VPPM IO-Link

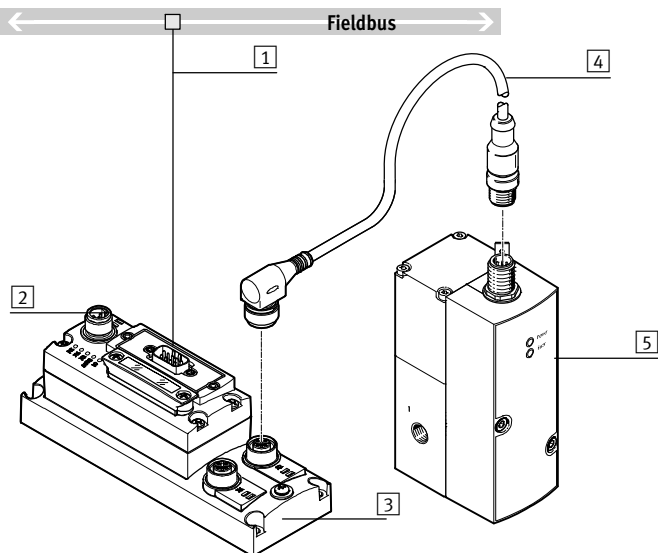


- 1 Diagnostics via fieldbus
- 2 Fieldbus node
- 3 Connecting block CAPC
- 4 Connecting cable NEBU
- 5 Proportional pressure regulator VPPM with IO-Link

Proportional pressure regulators VPPM

General information

FESTO

VPPM on the valve terminal MPA-S

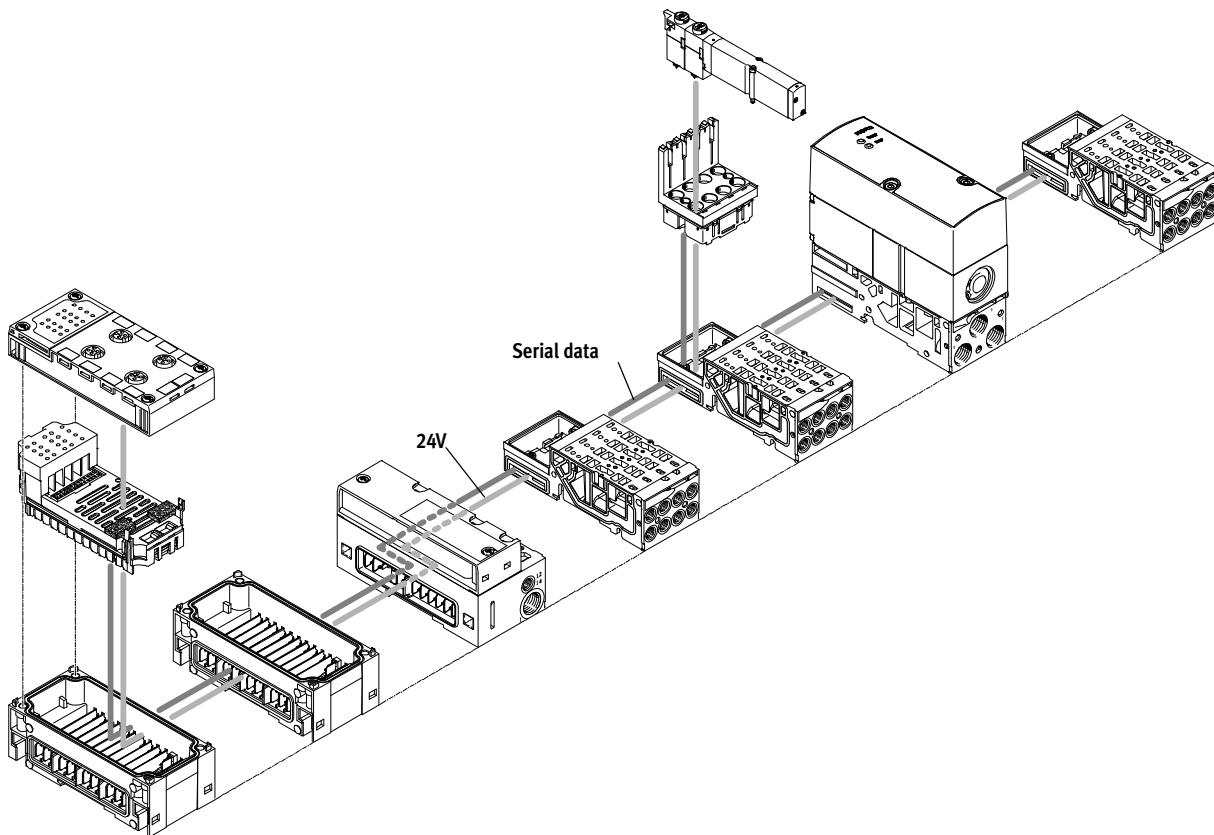

Innovative

- Multi-sensor control
- Diagnostics via bus
- Choice of regulation characteristics
- High dynamic response
- 2 accuracy levels

Versatile

- For all common protocols
- As an individual pressure regulator
- As a pressure zone regulator
- Choice of 3 valves with different pressure ranges
- 3 pressure ranges (presets) can be set via the bus
- Internal or external compressed air supply possible

Reliable

- Long service life
- LED display for the operating status
- Pressure is maintained if the supply voltage fails
- Fast troubleshooting thanks to LEDs on the valves and diagnostics via fieldbus
- Ease of servicing through replaceable valves

Easy to mount

- Simple replacement of the valves
- Tested units
- Easy extension of the valve terminal

-  - Note


More information on the VPPM valves for MPA-S

→ [mpas](#)

Proportional pressure regulators VPPM

General information

Layout of a control circuit

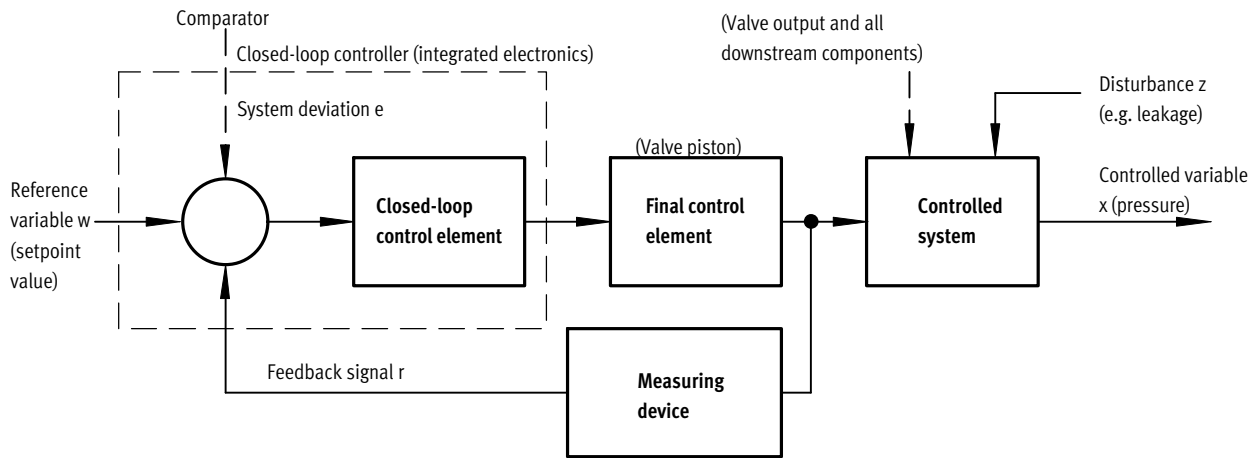

Layout

The figure shows a closed-loop control circuit. The reference variable w (setpoint value, e.g. 5 volts or 8 mA) initially acts on a comparator. The measuring device sends the controlled variable x value (actual value, e.g. 3 bar) to the comparator as a feedback signal r . The closed-loop control element detects the system


deviation e and actuates the final control element. The output of the final control element acts on the controlled system. The closed-loop control element thus attempts to compensate for the difference between the reference variable w and the controlled variable x by using the final control element.

Method of operation

This process runs continuously so changes in the reference variable are always detected. However, a system deviation will also appear if the reference variable is constant but the controlled variable changes. This happens when the flow through the valve changes in response to a switching action, a cylinder movement

or a change in load. The disturbance variable z will also cause a system deviation. An example of this is when the pressure drops in the air supply. The disturbance variable z acts on the controlled variable x unintentionally. In all cases, the regulator attempts to readjust the controlled variable x to the reference variable w .

Multi-sensor control (cascade control) of the VPPM

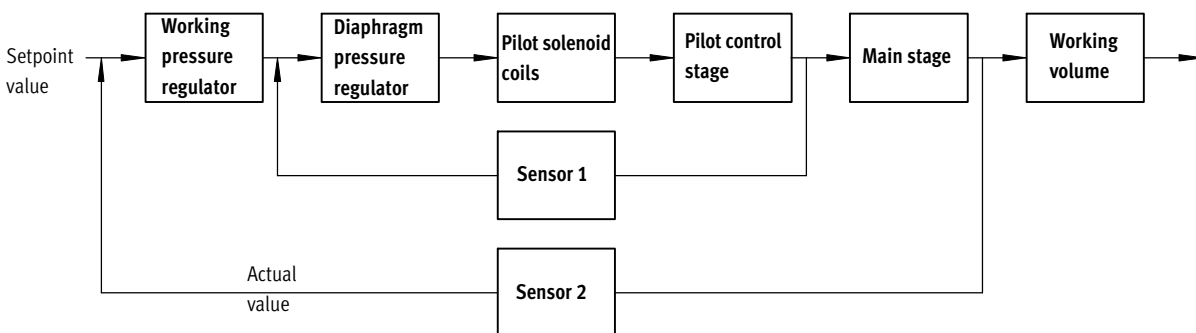

Cascade control

Unlike conventional direct-acting regulators, with multi-sensor control several control circuits are nested inside each other. The overall controlled

system is divided into smaller sub-controlled circuits that are easier to control for the specific task.

Control precision

Multi-sensor control significantly improves control precision and dynamic


response in comparison with single-acting regulators.

Proportional pressure regulators VPPM

General information


Terms related to the proportional pressure regulator

Hysteresis




There is always a linear relationship within a certain tolerance between the setpoint value entered and the pressure output. Nevertheless it makes a difference whether the setpoint value is entered as rising or falling. The difference between the maximum deviations is referred to as hysteresis.

Linearity error




A perfectly linear progression of the control characteristic of the output pressure is theoretical. The maximum percentage deviation from this theoretical control characteristic is referred to as the linearity error. The percentage value refers to the maximum output pressure (full scale).

Response sensitivity




The response sensitivity of the device determines how sensitively one can change, i.e. adjust, a pressure. The smallest setpoint value difference that results in a change in the output pressure is referred to as the response sensitivity. In this case, 0.01 bar.

Repetition accuracy (reproducibility)




The repetition accuracy is the margin within which the fluid output variables are scattered when the same electrical input signal coming from the same direction is repeatedly adjusted. The repetition accuracy is expressed as a percentage of the maximum fluid output signal.

Zero offset




If, for example, a VPPM cannot be vented for safety reasons, the minimum pressure can be increased from the zero point. The smallest setpoint value is then assigned an output pressure of 5 bar, for example, and the largest setpoint value an output pressure of 10 bar. Zero suppression is automatically switched off if zero offsetting is used.

Pressure range adaptation



In the delivery condition, 100% setpoint value equals 100% fluid output signal. Pressure range adaptation or adjustment enables the fluid output variable to be matched to the setpoint value.



Zero point suppression



In practice there exists the possibility of residual voltage or residual current at the setpoint input of the VPPM via the setpoint generator. Zero point suppression is used so that the valve is reliably vented at a setpoint value of zero.



Proportional pressure regulators VPPM

Product range overview

Function	Version	Design	Pneumatic connection 1, 2, 3	Nominal width for pressurisation/ exhaust [mm]	Pressure regulation range [bar]	Setpoint value input			→ Page/ Internet
						Voltage type 0 ... 10 V	Current type 4 ... 20 mA	Digital –	
Pressure regulators	LED operator unit (standard)								
		Piloted diaphragm valve	G1/8	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	14
			Sub-base	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
				8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
			G1/4	8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
			G1/2	12/12	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
	LED operator unit with IO-Link								
		Piloted diaphragm valve	G1/8	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	–	–	■	15
			Sub-base	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	–	–	■	
				8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	–	–	■	
G1/4			8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	–	–	■		
G1/2			12/12	0.02 ... 2 0.06 ... 6 0.1 ... 10	–	–	■		

Proportional pressure regulators VPPM


Product range overview

Function	Version	Design	Pneumatic connection 1, 2, 3	Nominal width for pressurisation/ exhaust [mm]	Pressure regulation range [bar]	Setpoint value input			→ Page/ Internet
						Voltage type 0 ... 10 V	Current type 4 ... 20 mA	Digital –	
Pressure regulators	Operator unit with LCD, pressure unit variable								
		Piloted diaphragm valve	G1/8	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	14
			Sub-base	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
				8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
			G1/4	8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
			G1/2	12/12	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
	Operator unit with LED, for valve terminal MPA-S								
		Piloted diaphragm valve	Sub-base MPA	6/4.5, 8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	–	–	■	mpas

Proportional pressure regulators VPPM

Peripherals overview

Individual valve VPPM-6L ... , VPPM-8L ...

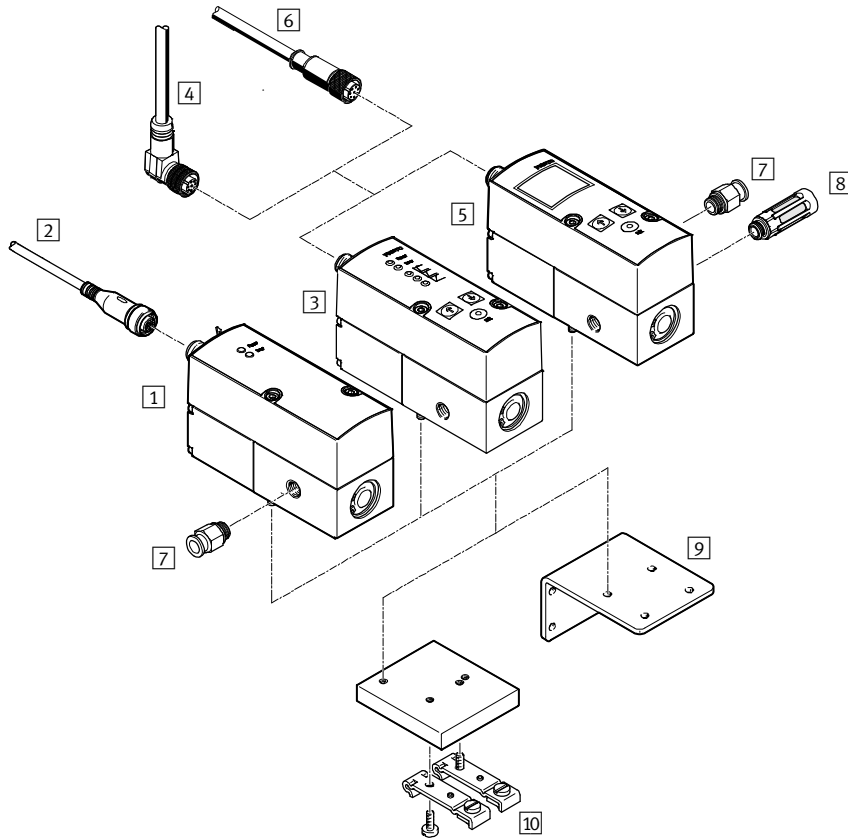


Accessories		
	Description	→ Page/Internet
1	Proportional pressure regulator VPPM Operator unit with LED, IO-Link	15
2	Connecting cable NEBU-M12G5-...	38
3	Proportional pressure regulator VPPM Operator unit with LED	38
4	Angled plug socket with cable NEBU-M12W8-...	38
5	Proportional pressure regulator VPPM Operator unit with LCD	14
6	Straight plug socket with cable SIM-M12-8GD-...	14
7	Push-in fitting QS	qs
8	Silencer	u
9	Angle bracket VAME-P1-A	35
10	H-rail mounting VAME-P1-T	33

Proportional pressure regulators VPPM

Peripherals overview

Individual valve VPPM-12L ...

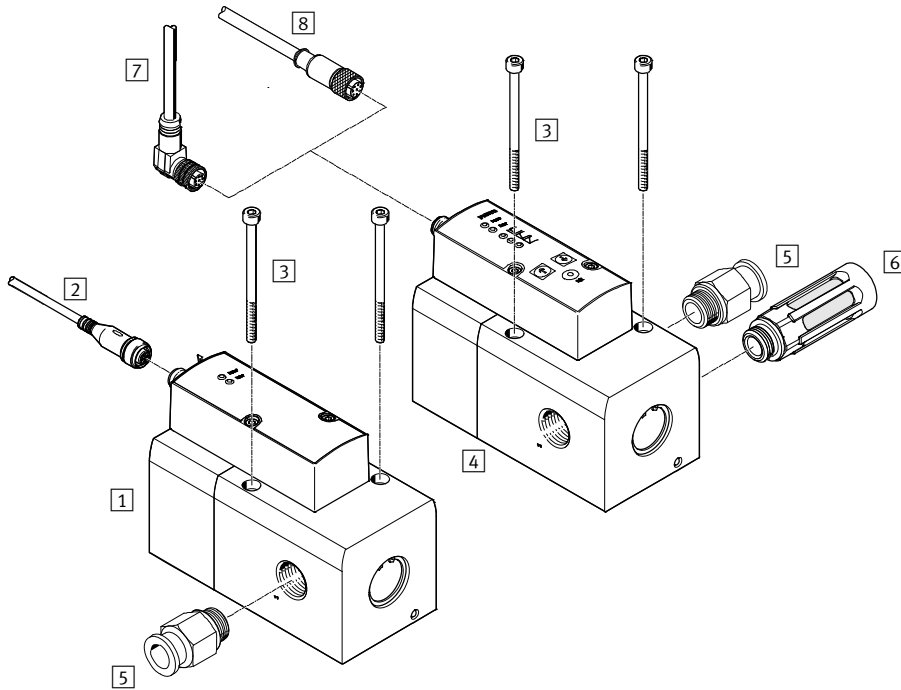


Accessories		Description	→ Page/Internet
1	Proportional pressure regulator VPPM	Operator unit with LED, IO-Link	15
2	Connecting cable NEBU-M12G5-...	-	38
3	Mounting screws	-	-
4	Proportional pressure regulator VPPM	Operator unit with LED or LCD	14
5	Push-in fitting QS	For connecting compressed air tubing with standard O.D.	qs
6	Silencer	For installation in exhaust ports	u
7	Angled plug socket with cable NEBU-M12W8-...	-	38
8	Straight plug socket with cable SIM-M12-8GD-...	-	38

Proportional pressure regulators VPPM

Peripherals overview

FESTO

Manifold assembly with VPPM-6F ... , VPPM-8F ...

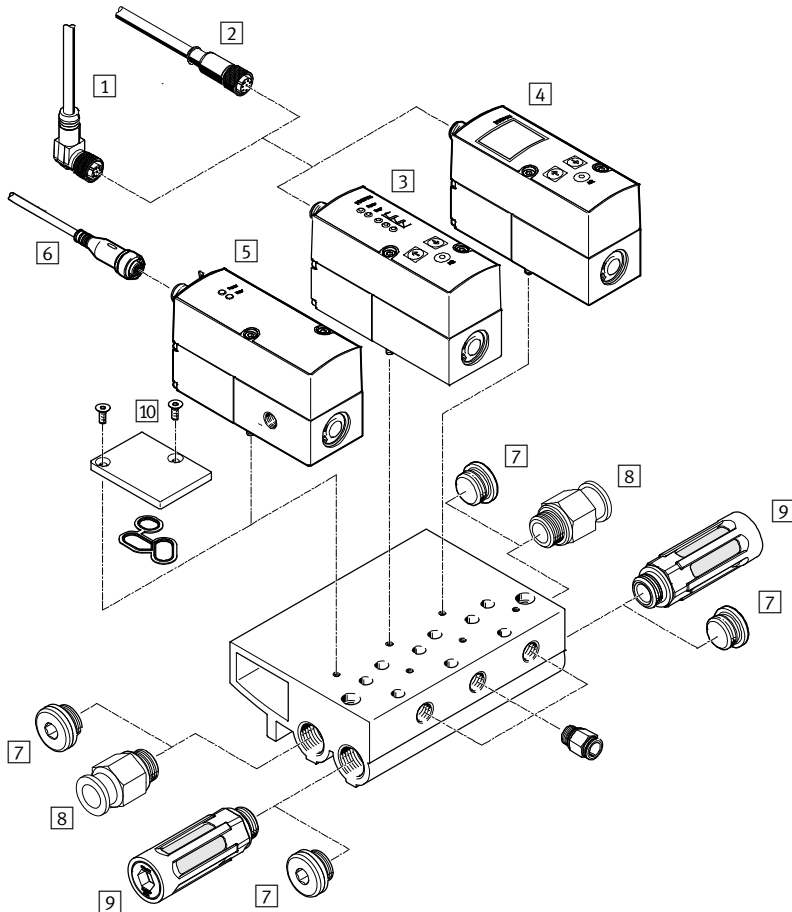


Accessories		
	Description	→ Page/Internet
1	Angled plug socket with cable NEBU-M12W8-...	38
2	Straight plug socket with cable SIM-M12-8GD-...	38
3	Proportional pressure regulator VPPM	Operator unit with LED 14
4	Proportional pressure regulator VPPM	Operator unit with LCD 14
5	Proportional pressure regulator VPPM	Operator unit with LED, IO-Link 15
6	Connecting cable NEBU-M12G5-...	38
7	Blanking plug B	b
8	Push-in fitting QS	For connecting compressed air tubing with standard O.D. qs
9	Silencer	For installation in exhaust ports u
10	Cover plate VABB-P1	For vacant position; seal and countersunk screws included in the scope of delivery 34
	Manifold block VABM	33

Proportional pressure regulators VPPM

System overview

VPPM-6TA ... , VPPM-8TA ... for valve terminal MPA-S

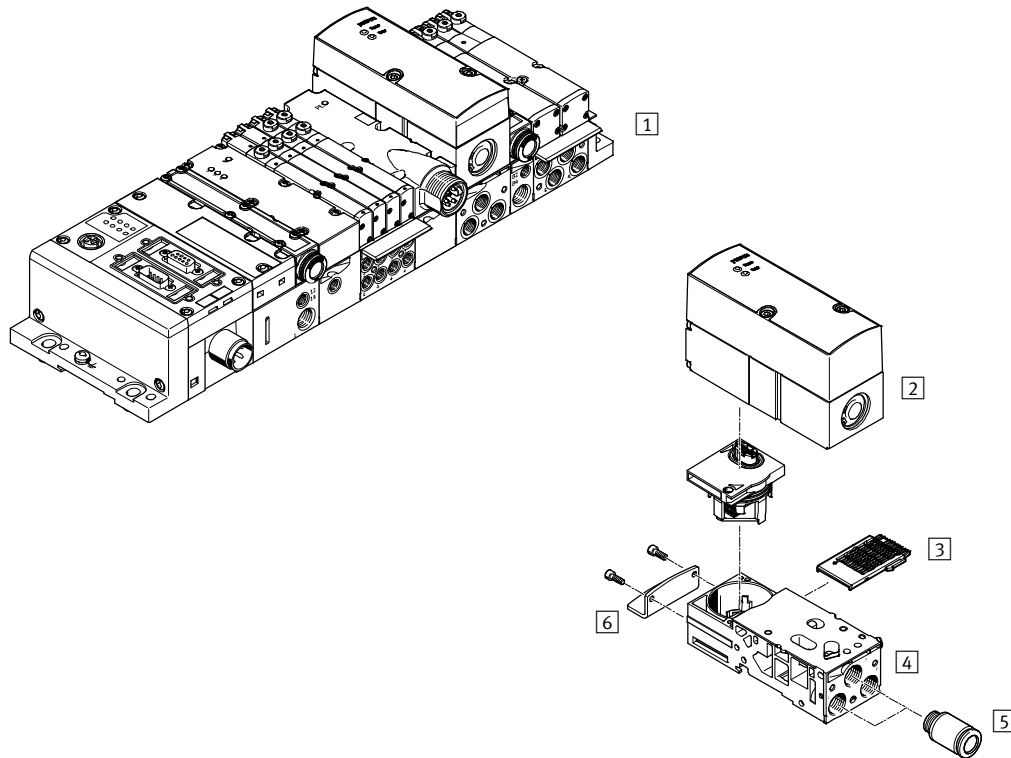

Accessories		
	Description	→ Page/Internet
1	Valve terminal MPA-S	With fieldbus connection and VPPM mpas
2	Proportional pressure regulator VPPM	For valve terminal MPA-S mpas
3	Electrical interlinking module VMPA1-FB-EV-AB	For sub-base of the proportional pressure regulator mpas
4	Sub-base VMPA-FB-AP-P1	Without electrical interlinking module or electrical module mpas
5	Push-in fitting QS	– qs
6	Mounting component VMPA-BG	– mpas

Proportional pressure regulators VPPM

Type codes

VPPM – 6 L – L – 1 – G18 – 0L 6H – 1L – 6H

Type

VPPM	Modular proportional pressure regulator
------	---

Nominal diameter

6	6 mm
8	8 mm
12	12 mm

Design

L	In-line valve
F	Flanged valve
T	Flanged valve for valve terminal

Mounting method

–	Freely mountable
A	Valve terminal MPA
G	H-rail
P	Manifold PR

Dynamic response class

L	Low
---	-----

Valve function

1	3/2-way valve, normally closed
---	--------------------------------

Pneumatic connection

G18	Thread G $\frac{1}{8}$
G14	Thread G $\frac{1}{4}$
G12	Thread G $\frac{1}{2}$
F	Flange/sub-base

Lower pressure value of regulation range

0L	0 bar
----	-------

Upper pressure value of regulation range

2H	2 bar
6H	6 bar
10H	10 bar

Alternative lower pressure value of regulation range


...L	0 ... 9 bar
------	-------------

Alternative upper pressure value of regulation range

...H	0.2 ... 10 bar
------	----------------

Proportional pressure regulators VPPM

Type codes

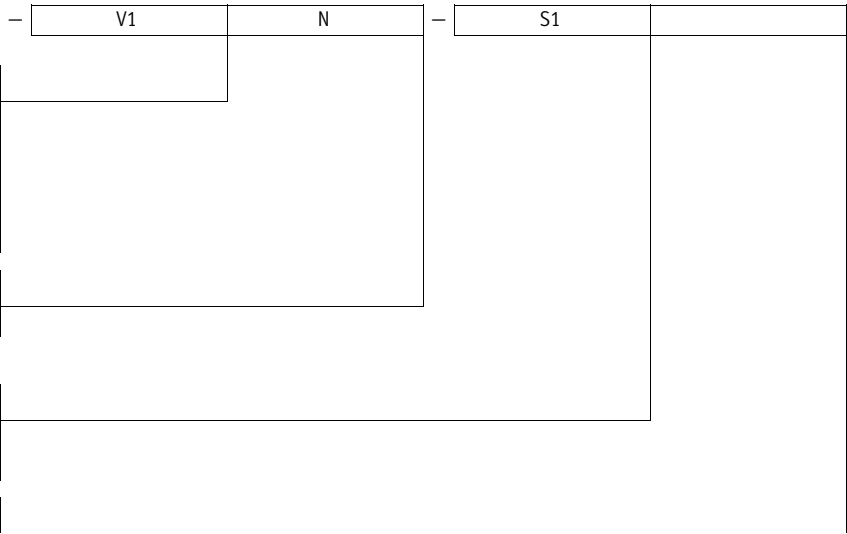

Setpoint specification for individual valve

-	For valve terminals / servo pneumatics
V1	0 ... 10 V
LK	IO-Link
A4	4 ... 20 mA

Switching output

N	Negative switching
P	Positive switching

Accuracy




-	2% (standard)
S1	1%

Operator unit


-	LED (standard)
C1	With LCD, pressure unit variable

Proportional pressure regulators VPPM

Technical data


-  Flow rate
380 ... 7,000 l/min
-  Voltage
21.6 ... 26.4 V DC
-  Pressure regulation range
0.02 ... 10 bar

- Variants
- Setpoint input as analogue voltage signal 0 ... 10 V
 - Setpoint input as analogue current signal 4 ... 20 mA
 - LED version
 - With LCD display
 - NPN or PNP switching output

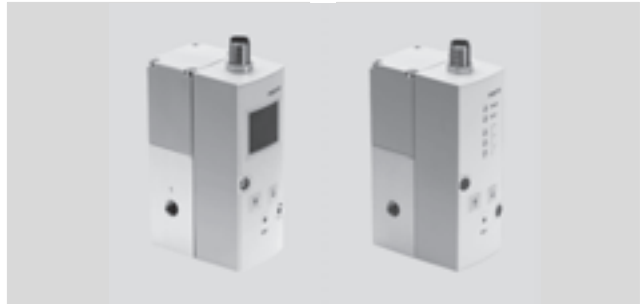

General technical data			G1/8	G1/4	G1/2	Sub-base	
Constructional design			Pilot actuated diaphragm regulator				
Sealing principle			Soft				
Actuation type			Electric				
Type of control			Pilot actuated via 2/2-way valves				
Type of mounting			Via through-hole, via accessories				
Mounting position			Any				
Nominal diameter	Pressurisation	[mm]	6	8	12	6	8
	Exhaust	[mm]	4.5	7	12	4.5	7
Standard nominal flow rate		[l/min]	→ Graphs				
Product weight		[g]	400	560	2,050	400	560




Electrical data			VPPM-6	VPPM-8	VPPM-12
Electrical connection			Plug, round design, 8-pin, M12		
Operating voltage range		[V DC]	24 ± 10% = 21.6 ... 26.4		
Residual ripple		[%]	10		
Duty cycle		[%]	100		
Max. electrical power consumption		[W]	7	7	12
Signal setpoint input	Voltage	[V DC]	0 ... 10		
	Current	[mA]	4 ... 20		
Protection against short circuit			For all electrical connections		
Protection against polarity reversal			For all electrical connections		
Protection class			IP65		

-  - Note

If the power supply cable is interrupted, output pressure is maintained unregulated.

Proportional pressure regulators VPPM, IO-Link


Technical data – VPPM IO-Link

-  Flow rate
380 ... 7,000 l/min
-  Voltage
18 ... 30 V DC
-  Pressure regulation range
0.02 ... 10 bar
- Digital setpoint and actual value transfer
- For connection to an I/O-Link/I-Port master
- LED version
- Comparator output (digital)




General technical data							
Port		G1/8	G1/4	G1/2	Sub-base		
Valve function		3-way proportional pressure regulator					
Design		Piloted diaphragm regulator					
Sealing principle		Soft					
Actuation type		Electric					
Type of control		Piloted					
Reset method		Mechanical spring					
Type of mounting		Via through-hole, via accessories					
Mounting position		Any					
Nominal width	Pressurisation	[mm]	6	8	12	6	8
	Exhaust	[mm]	4.5	7	12	4.5	7
Standard nominal flow rate		[l/min.]	→ Graphs				
Product weight		[g]	400	560	2,050	400	560
IO-Link	Protocol		IO-Link, I-Port				
	Protocol version		Device V1.1				
	Port type		A				
	Process data width OUT		[byte]	2			
	Process data width IN		[byte]	2			
Communication mode	COM1		[kBaud]	4.8			
	COM2		[kBaud]	38.4			
	COM3		[kBaud]	230.4			
IO-Link	Minimum cycle time		[ms]	0.5			


Electrical data			
Type	VPPM-6	VPPM-8	VPPM-12
Electrical connection	M12 plug connector, 5-pin		
Operating voltage range	[V DC]	18 ... 30	
Max. electrical power consumption	[W]	7	12
Protection against short circuit	For all electrical connections		
Protection against incorrect polarity	For all electrical connections		
Residual ripple	[%]	10	
Duty cycle	[%]	100	
Degree of protection	IP65		

-  Note
Output pressure remains unregulated if the power supply cable is interrupted.

Proportional pressure regulators VPPM

Technical data

Pin allocation of IO-Link interface			
	Pin	Allocation	Function
	1	24 V DC ($U_{EL/SEN}$)	Operating voltage supply (PS)
	2	n.c.	Not connected
	3	0 V DC ($U_{EL/SEN}$)	Operating voltage supply (PS)
	4	C/Q I-PORT	Data communication
	5	n.c.	Not connected
	-	FE	Functional earth


Pin allocation M12, electrical connection		
	Pin	Function
	1	Digital input D1
	2	+24 V DC supply voltage
	3	Analogue input W-
	4	Analogue input W+
	5	Digital input D2
	6	Analogue output X
	7	0 V DC or GND
	8	Digital output D3

Proportional pressure regulators VPPM


Technical data

Flow rate q_{n1} from 1 → 2 as a function of output excess pressure p_2


VPPM-6L/F-...-0L2H-... (2 bar)

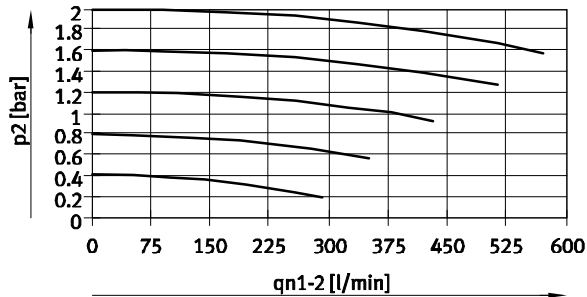

VPPM-6L/F-...-0L6H-... (6 bar)

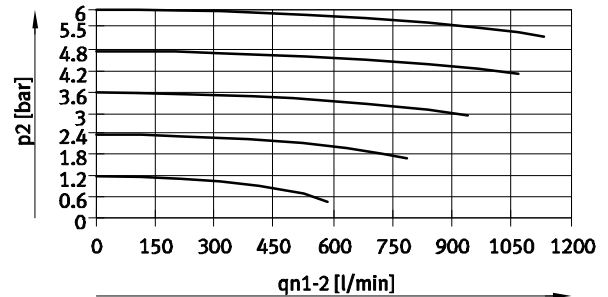


VPPM-6L/F-...-0L10H-... (10 bar)

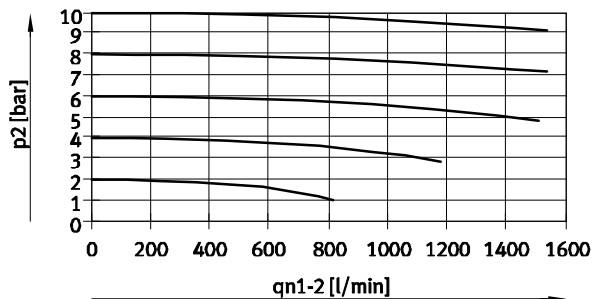

Flow rate q_{n2} from 2 → 3 as a function of output excess pressure p_2


VPPM-6L/F-...-0L2H-... (2 bar)

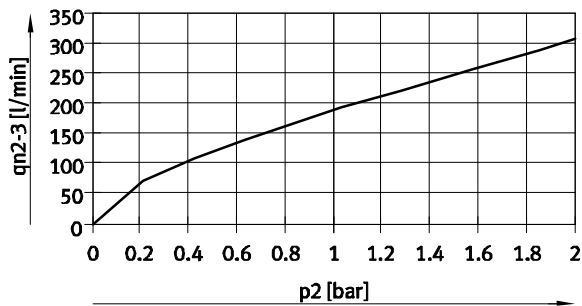

VPPM-6L/F-...-0L6H-... (6 bar)



VPPM-6L/F-...-0L10H-... (10 bar)

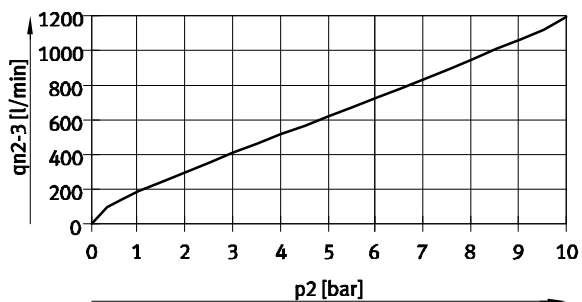


Proportional pressure regulators VPPM

Technical data


FESTO

Flow rate q_n from 1 → 2 as a function of output excess pressure p_2


VPPM-8L-...-0L2H-... (2 bar)

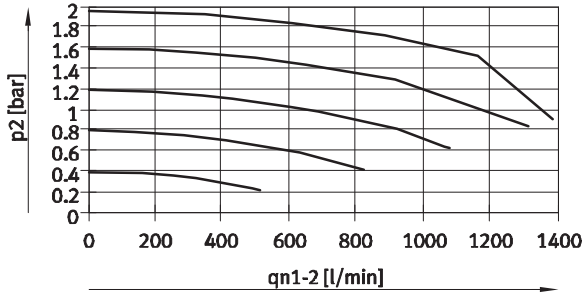

VPPM-8L-...-0L6H-... (6 bar)

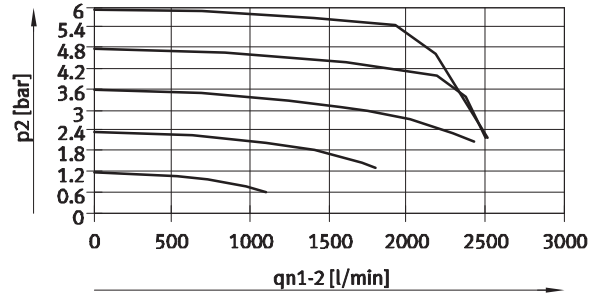


VPPM-8L-...-0L10H-... (10 bar)

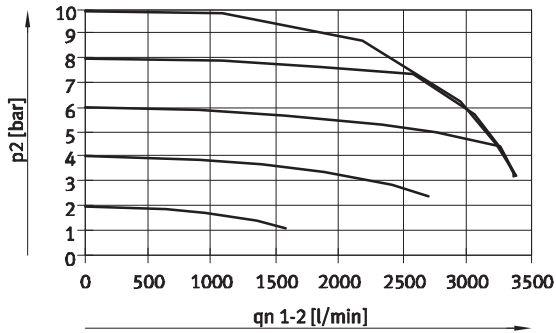

Flow rate q_n from 2 → 3 as a function of output excess pressure p_{2+}


VPPM-8L-...-0L2H-... (2 bar)

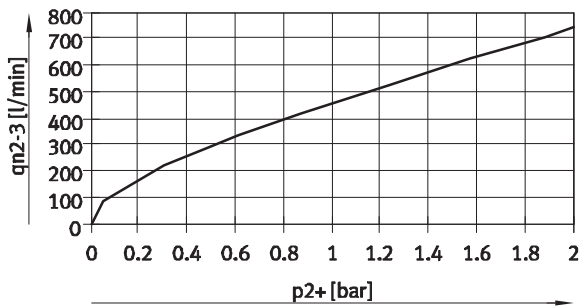

VPPM-8L-...-0L6H-... (6 bar)



VPPM-8L-...-0L10H-... (10 bar)

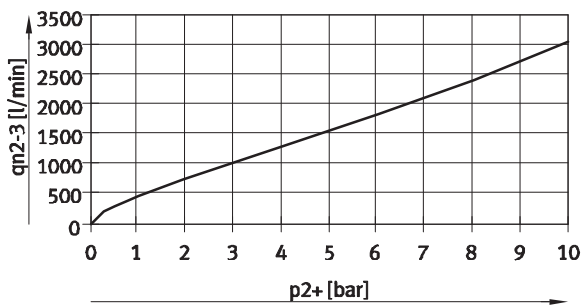


Proportional pressure regulators VPPM


Technical data

Flow rate q_n from 1 → 2 as a function of output excess pressure p_2


VPPM-8F/8TA-...-0L2H-... (2 bar)

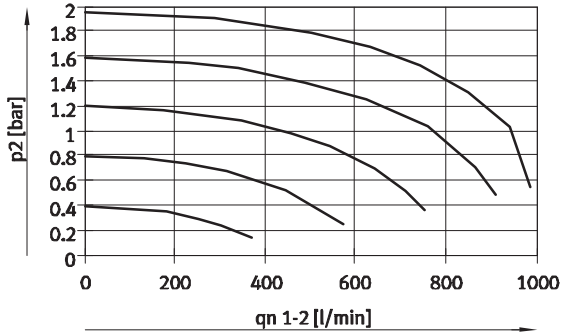

VPPM-8F/8TA-...-0L6H-... (6 bar)

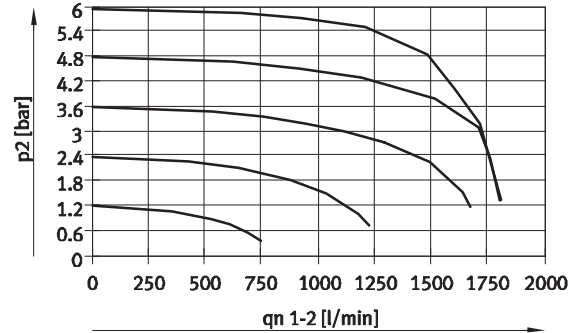


VPPM-8F/8TA-...-0L10H-... (10 bar)

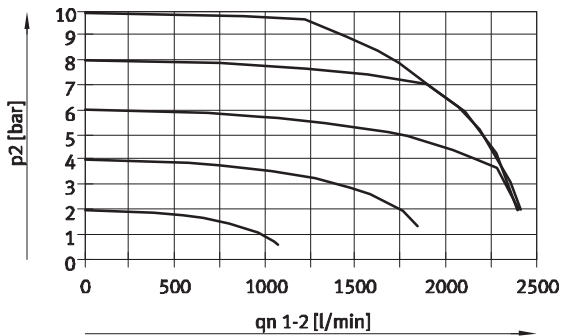


Flow rate q_n from 2 → 3 as a function of output excess pressure p_2

VPPM-8F/8TA-...-0L2H-... (2 bar)

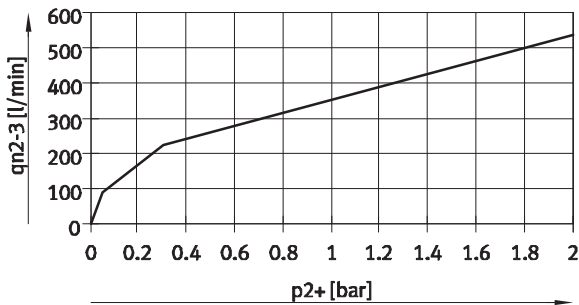

VPPM-8F/8TA-...-0L6H-... (6 bar)

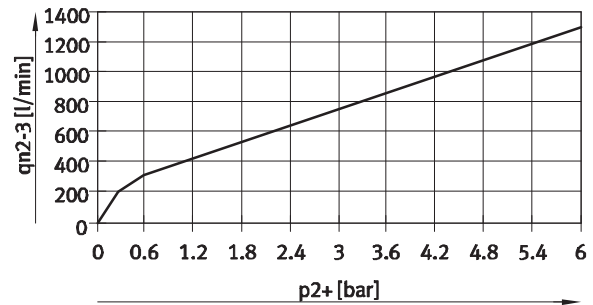

VPPM-8F/8TA-...-0L10H-... (10 bar)




Proportional pressure regulators VPPM

Technical data


FESTO

Flow rate q_n from 1 → 2 as a function of output excess pressure p_2


VPPM-12L-...-0L2H-... (4 bar)

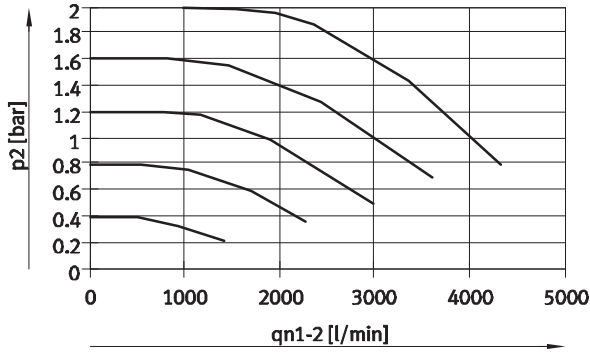

VPPM-12L-...-0L6H-... (8 bar)

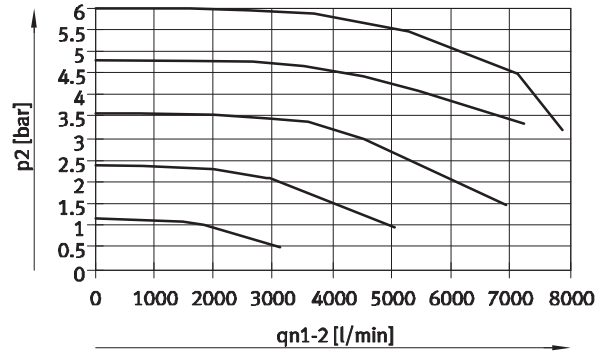


VPPM-12L-...-0L10H-... (11 bar)

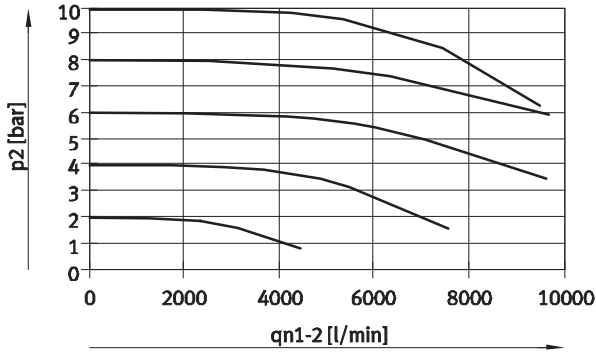


Flow rate q_n from 2 → 3 as a function of output excess pressure p_2

VPPM-12L-...-0L2H-... (4 bar)

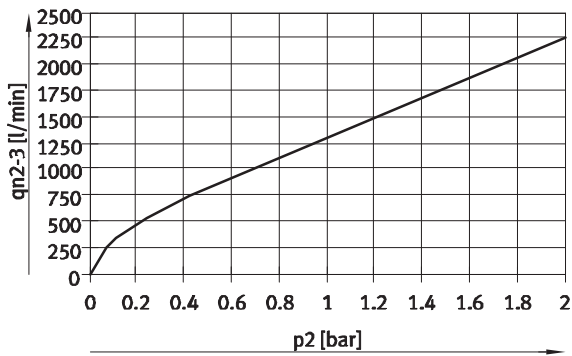

VPPM-12L-...-0L6H-... (8 bar)

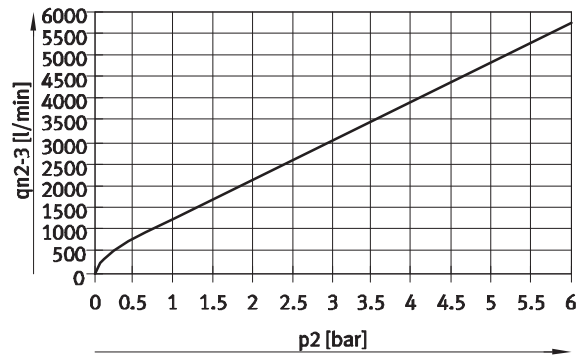

VPPM-12L-...-0L10H-... (11 bar)



Proportional pressure regulators VPPM

Technical data



Operating and environmental conditions				
Pressure regulation range	[bar]	0.02 ... 2	0.06 ... 6	0.1 ... 10
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:4:4] Inert gases		
Note on operating/pilot medium		Operation with lubricated medium not possible		
Supply pressure 1 ¹⁾	[bar]	0 ... 4	0 ... 8	0 ... 11
Max. hysteresis	[mbar]	10	30	50
FS (full scale) linearity error	[%]	±0.5		
FS (full scale) repetition accuracy	[%]	0.5		
Temperature coefficient	[%/K]	0.04		
Ambient temperature, operator unit LED (standard)	[°C]	0 ... 60		
Ambient temperature, operator unit with LCD	[°C]	0 ... 50		
Temperature of medium	[°C]	10 ... 50		
Note on materials		RoHS-compliant		
Corrosion resistance	[CRC]	2 ²⁾		
CE mark		To EU EMC Directive (see declaration of conformity) ³⁾		
Certification		RCM trademark c UL us - Listed (OL)		

- Supply pressure 1 should always be 1 bar greater than the maximum regulated output pressure.
- Corrosion resistance class 2 as per Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Materials

Sectional view VPPM-6 ..., VPPM-8 ...

Sectional view VPPM-12 ...

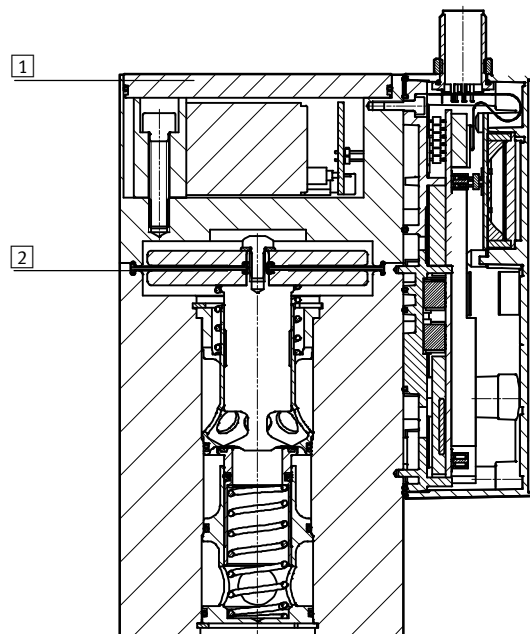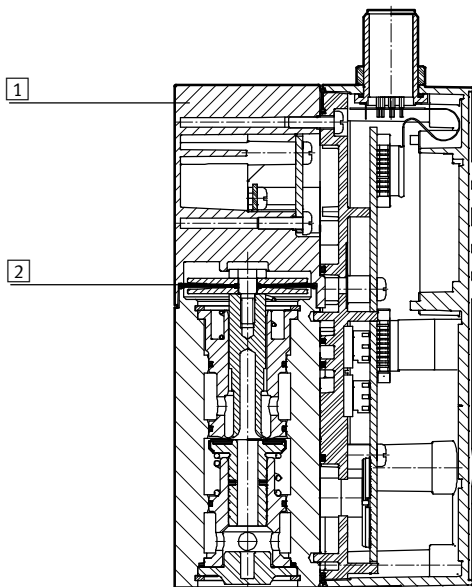

1	Housing	Wrought aluminium alloy
2	Diaphragm	Nitrile rubber

Proportional pressure regulators VPPM

Technical data


FESTO

Dimensions

Download CAD data → www.festo.com

VPPM-6F

With LCD

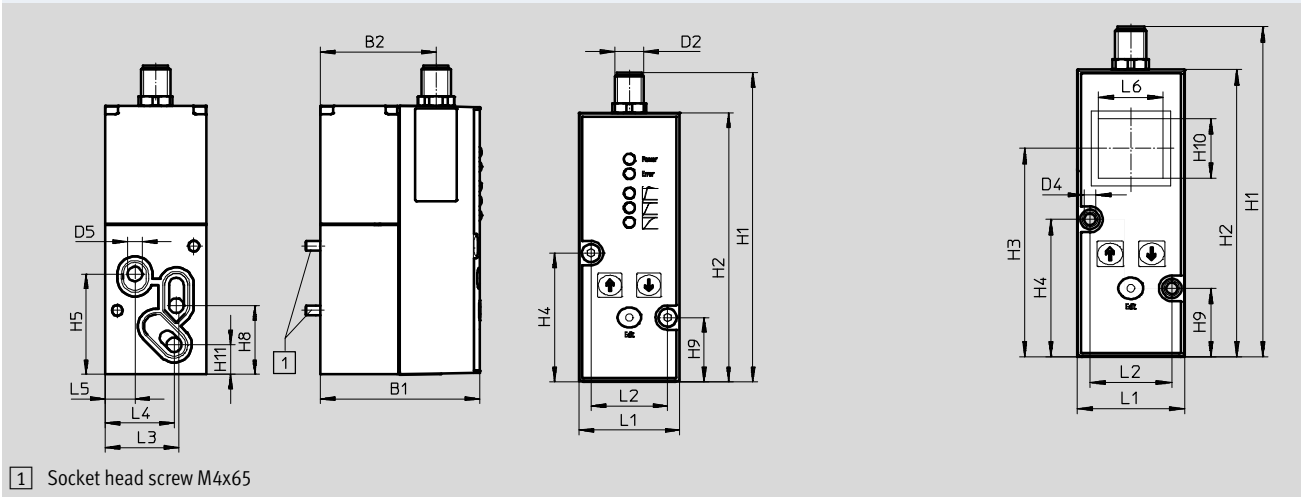


1 Socket head screw M4x65

Type	B1	B2	B3	D1	D2	D4	D5	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12
VPPM-6F	65.4	47.5	-	-	M12	4.4	6	126.9	110.4	80.1	52.8	41.3	-	-	28.3	26.3	23	12.2	-

Type	L1	L2	L3	L4	L5	L6
VPPM-6F	41.5	31.5	30.3	28.4	12.3	25

VPPM-6F, IO-Link

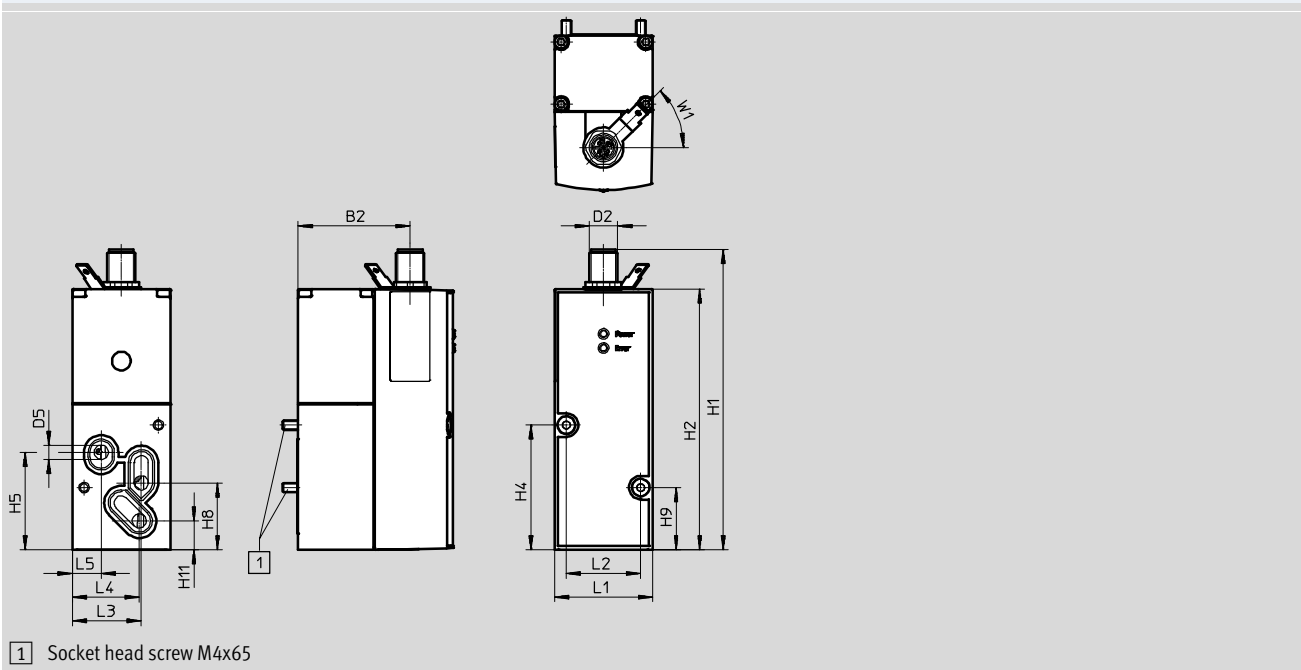

1 Socket head screw M4x65

Type	B1	B2	D2	D5	H1	H2	H4	H5	H8	H9	H11
VPPM-6F	65.5	47.5	M12	6	126.9	110.4	52.8	41.3	28.3	26.3	12.2

Type	L1	L2	L3	L4	L5	W1 ± 5°
VPPM-6L	41.5	31.5	30.3	28.4	12.3	45°

Proportional pressure regulators VPPM

Technical data




Dimensions

Download CAD data → www.festo.com

VPPM-6L


With LCD

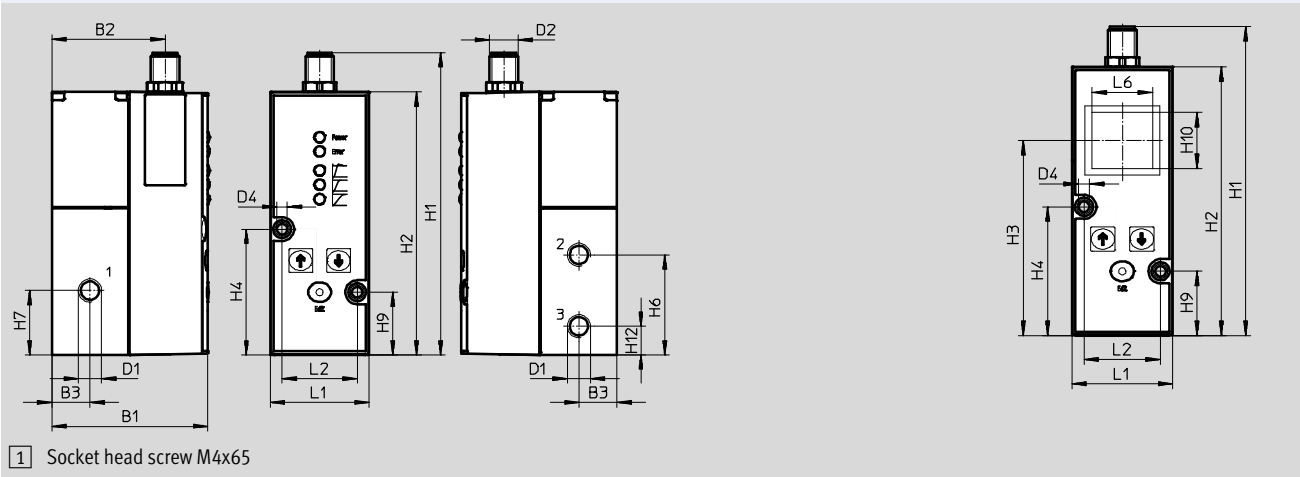

Type	B1	B2	B3	D1	D2	D4	H1	H2	H3	H4	H6	H7	H9	H10	H12
VPPM-6L	65.5	47.5	16	G $\frac{1}{8}$	M12	4.4	126.9	110.4	80.1	52.8	42	27	26.3	23	12

Type	L1	L2	L6
VPPM-6L	41.5	31.5	25

VPPM-6L, IO-Link

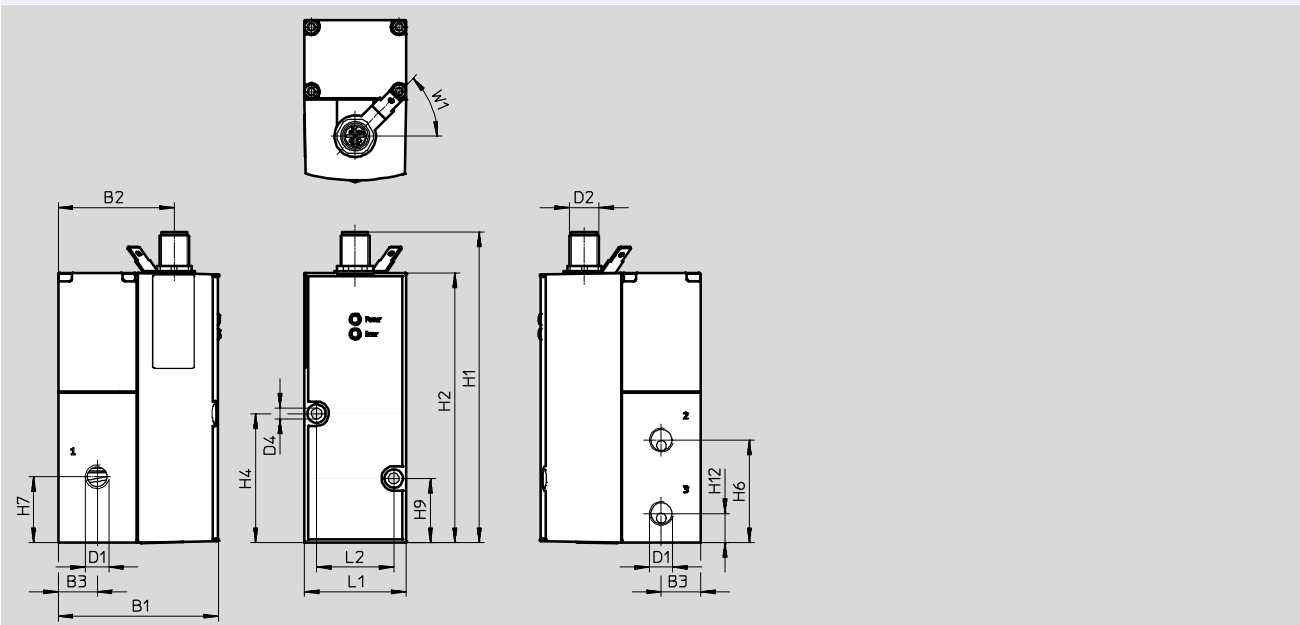

Type	B1	B2	B3	D1	D2	D4	H1	H2	H4	H6	H7	H9	H12
VPPM-6L	65.5	47.5	16	G $\frac{1}{8}$	M12	4.4	126.9	110.4	52.8	42	27	26.3	12

Type	L1	L2	W1 ± 5°
VPPM-6L	41.5	31.5	45°

Proportional pressure regulators VPPM

Technical data




Dimensions

Download CAD data → www.festo.com

VPPM-8F

With LCD

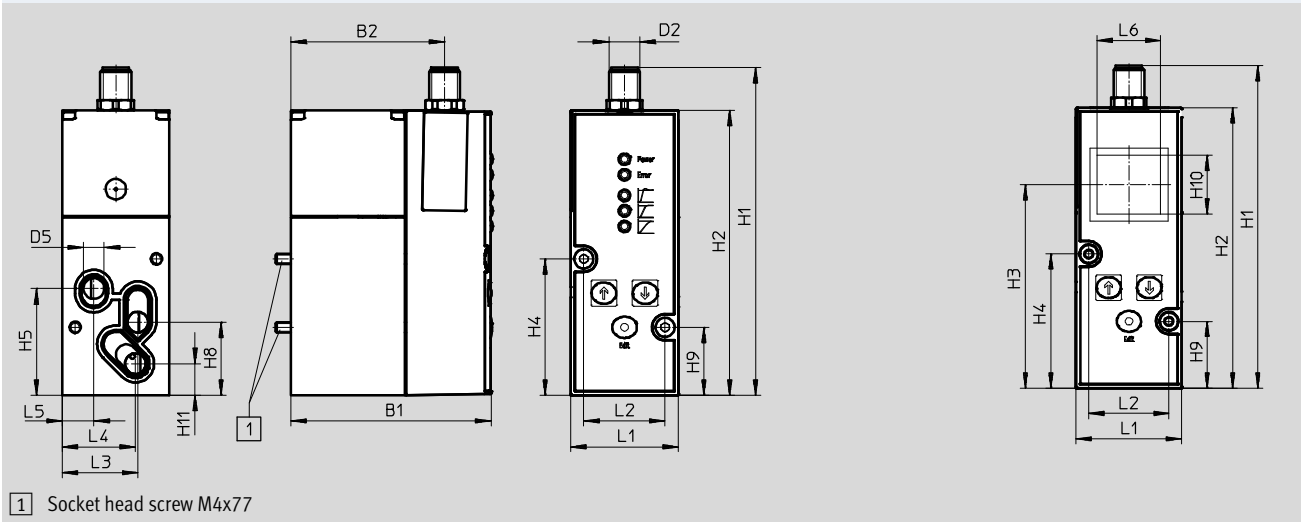


1 Socket head screw M4x77

Type	B1	B2	D2	D5 Ø	H1	H2	H3	H4	H5	H8	H9	H10	H11
VPPM-8F	77.4	59.5	M12	8	126.9	110.4	80	52.8	41.3	28.3	26.3	23	12.2

Type	L1	L2	L3	L4	L5	L6
VPPM-8F	41.5	31.5	29.3	28.4	12.3	25

VPPM-8F, IO-Link

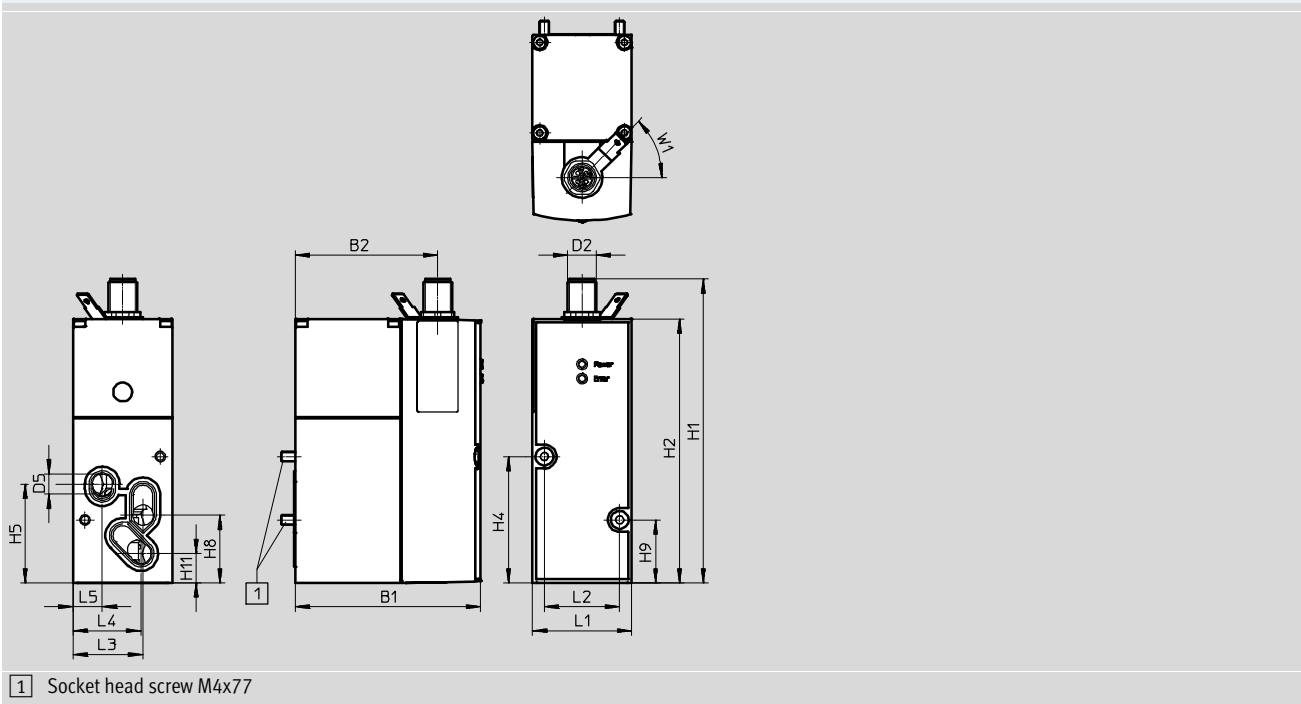

1 Socket head screw M4x77

Type	B1	B2	D2	D5 Ø	H1	H2	H4	H5	H8	H9	H11
VPPM-8L	77.4	59.5	M12	8	126.9	110.4	52.8	41.3	28.3	26.3	12.2

Type	L1	L2	L3	L4	L5	W1 ± 5°
VPPM-8L	41.5	31.5	29.3	28.4	12.3	45°

Proportional pressure regulators VPPM

Technical data


FESTO

Dimensions

Download CAD data → www.festo.com

VPPM-8L


With LCD

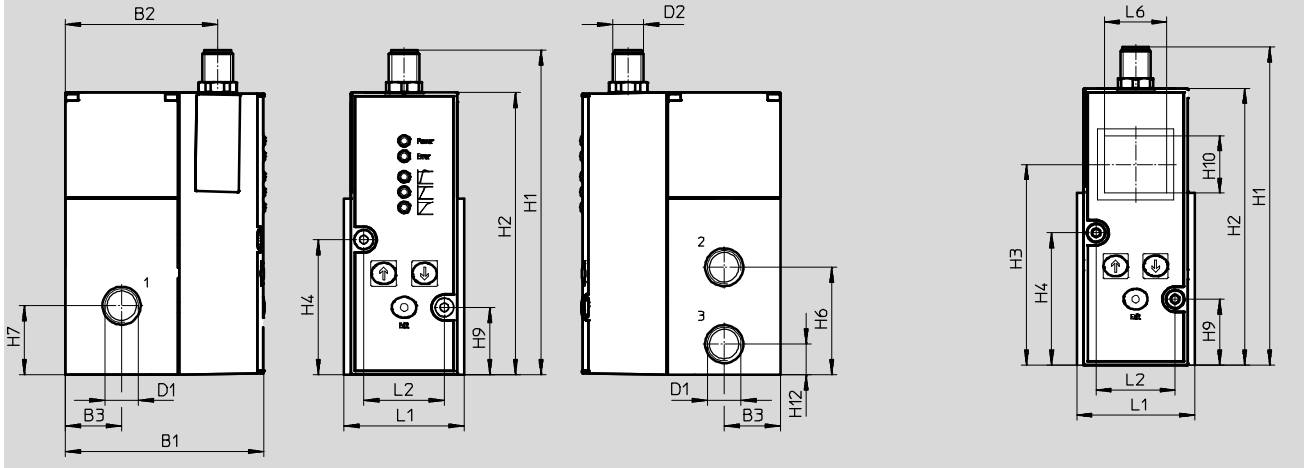

Type	B1	B2	B3	D1	D2	H1	H2	H3	H4	H6	H7	H9	H10	H12
VPPM-8L	77.4	59.5	22	G $\frac{1}{4}$	M12	126.9	110.4	80	52.8	42	27	26.3	23	12

Type	L1	L2	L6
VPPM-8L	47	31.5	25

VPPM-8L, IO-Link

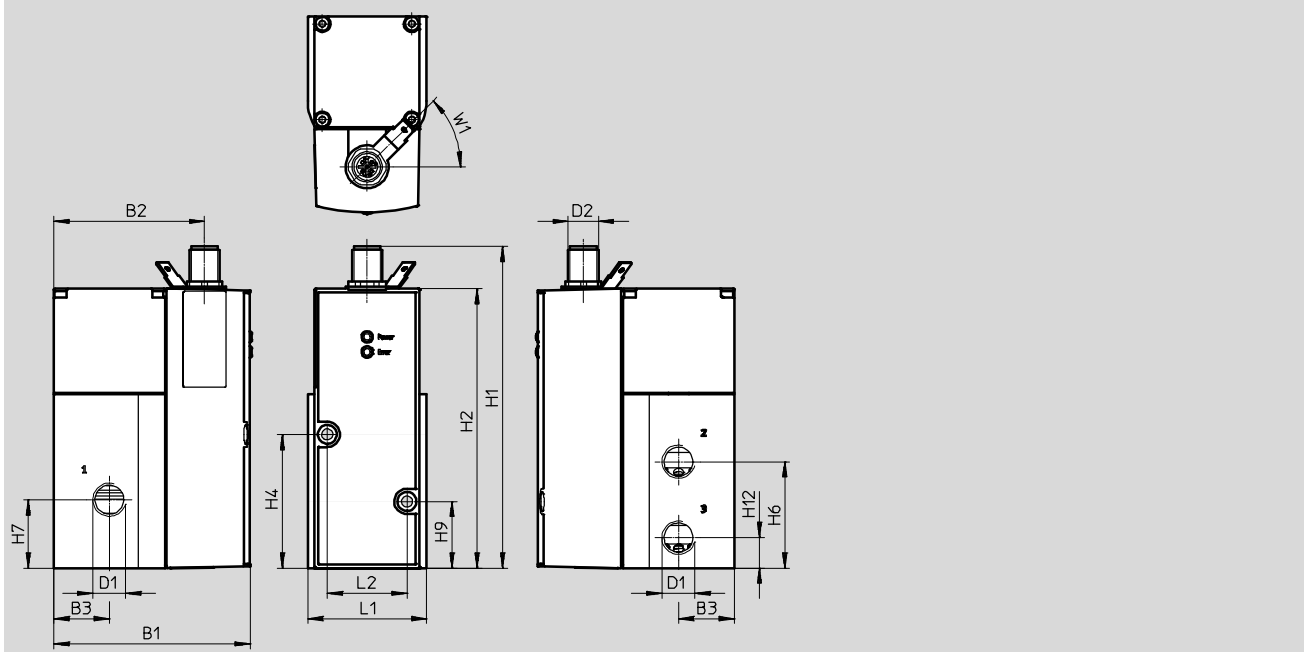

Type	B1	B2	B3	D1	D2	H1	H2	H4	H6	H7	H9	H12
VPPM-8L	77.4	59.5	22	G $\frac{1}{4}$	M12	126.9	110.4	52.8	42	27	26.3	12

Type	L1	L2	W1 ± 5°
VPPM-8L	47	31.5	45°

Proportional pressure regulators VPPM

Technical data

Dimensions Download CAD data → www.festo.com

VPPM-6TA

1 Socket head screw M4x55

Type	B1	D5 Ø	H2	H3	H4	H5	H8	H9	H11
VPPM-6TA	55.1	6	110.4	95.5	52.8	41.3	28.3	26.3	12.2

Type	L1	L2	L3	L4	L5	L6
VPPM-6TA	41.5	31.5	30.3	28.4	12.3	9.9

VPPM-8TA with LCD

1 Socket head screw M4x77

Type	B1	B2	B3	D1	D2	D5 Ø	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13
VPPM-8TA	77.4	-	-	-	-	8	-	110.4	80	52.8	41.3	-	-	28.3	26.3	23	12.2	-	95.5

Type	L1	L2	L3	L4	L5	L6	L7
VPPM-8TA	41.5	31.5	29.3	28.4	12.3	25	9.9

Proportional pressure regulators VPPM

Technical data


FESTO

Dimensions

Download CAD data → www.festo.com

VPPM-12L


With LCD

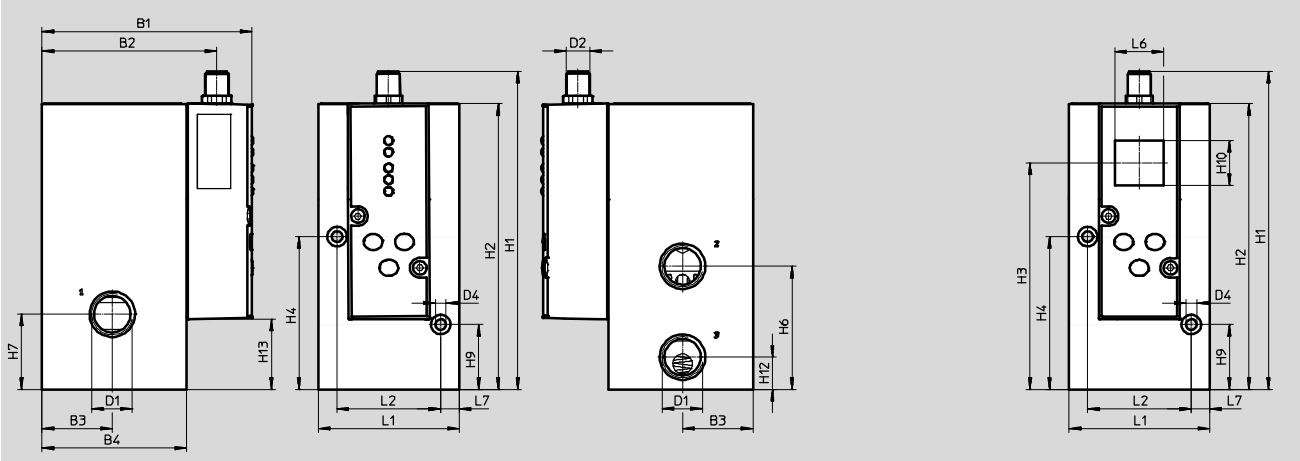

Type	B1	B2	B3	B4	D1 Ø	D2	D4 Ø	H1	H2	H3	H4	H6	H7	H9	H10	H12	H13
VPPM-12L	107.4	89.5	36	74	G½	M12	5.5	162.8	146.3	116	78.2	63	38.5	33.2	23	16.5	35.9

Type	L1	L2	L6	L7
VPPM-12L	72	53	25	9.5

VPPM-12L, IO-Link

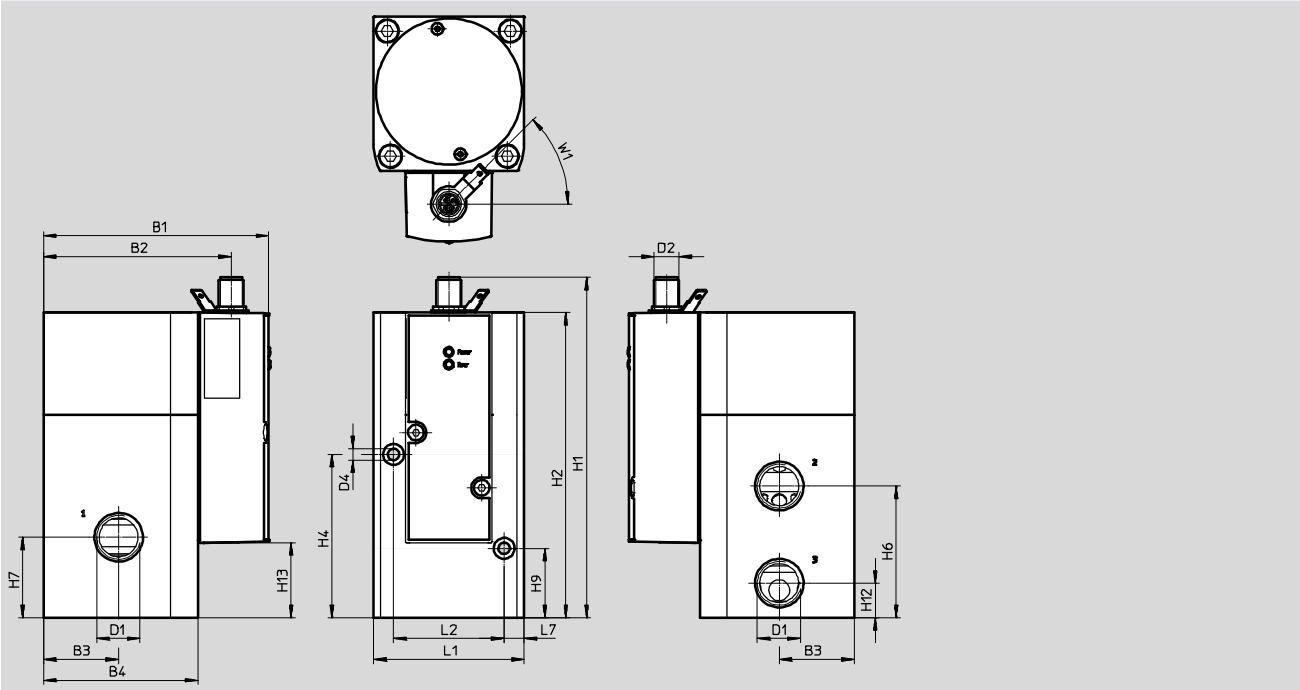

Type	B1	B2	B3	B4	D1	D2	D4 Ø	H1	H2	H4	H6	H7	H9	H12	H13
VPPM-12L	107.4	89.5	36	74	G½	M12	4.4	162.8	146.3	78.2	63	38.5	33.2	16.5	35.9

Type	L1	L2	L7	W1 ±5°
VPPM-12L	72	53	9.5	45°

Proportional pressure regulators VPPM

FESTO

Technical data

Ordering data					
Proportional pressure regulators VPPM	Pneumatic connection 1, 2, 3	Pressure regulation range [bar]	Part No.	Type	
Voltage type 0 ... 10 V					
Overall accuracy 2%	G $\frac{1}{8}$	0.02 ... 2	542233	VPPM-6L-L-1-G18-0L2H-V1N	
			542234	VPPM-6L-L-1-G18-0L6H-V1N	
		0.06 ... 6	554043	VPPM-6L-L-1-G18-0L6H-V1P	
			558337	VPPM-6L-L-1-G18-0L6H-V1P-C1	
			0.1 ... 10	575125	VPPM-6L-L-1-G18-0L10H-V1P-C1
				542235	VPPM-6L-L-1-G18-0L10H-V1N
	554044	VPPM-6L-L-1-G18-0L10H-V1P			
	Sub-base	0.02 ... 2	542245	VPPM-6F-L-1-F-0L2H-V1N	
			542246	VPPM-6F-L-1-F-0L6H-V1N	
		0.06 ... 6	558339	VPPM-6F-L-1-F-0L6H-V1P-C1	
			558347	VPPM-6F-L-1-F-0L6H-V1N-C1	
			571285	VPPM-6F-L-1-F-0L6H-V1P	
	0.1 ... 10	542247	VPPM-6F-L-1-F-0L10H-V1N		
	G $\frac{1}{4}$	0.06 ... 6	571296	VPPM-8L-L-1-G14-0L6H-V1P	
	Overall accuracy 1%	G $\frac{1}{8}$	0.02 ... 2	542227	VPPM-6L-L-1-G18-0L2H-V1N-S1
				542228	VPPM-6L-L-1-G18-0L6H-V1N-S1
0.06 ... 6			554039	VPPM-6L-L-1-G18-0L6H-V1P-S1	
			571448	VPPM-6L-L-1-G18-0L6H-V1N-S1C1	
			575121	VPPM-6L-L-1-G18-0L6H-V1P-S1C1	
			0.1 ... 10	542229	VPPM-6L-L-1-G18-0L10H-V1N-S1
554040				VPPM-6L-L-1-G18-0L10H-V1P-S1	
558335				VPPM-6L-L-1-G18-0L10H-V1P-S1C1	
558345				VPPM-6L-L-1-G18-0L10H-V1N-S1C1	
Sub-base			0.02 ... 2	542239	VPPM-6F-L-1-F-0L2H-V1N-S1
				542240	VPPM-6F-L-1-F-0L6H-V1N-S1
			0.06 ... 6	571286	VPPM-6F-L-1-F-0L6H-V1P-S1
		571287		VPPM-6F-L-1-F-0L6H-V1P-S1C1	
0.1 ... 10		542241	VPPM-6F-L-1-F-0L10H-V1N-S1		
G $\frac{1}{4}$		0.1 ... 10	571291	VPPM-8L-L-1-G14-0L10H-V1N-S1	
			571292	VPPM-8L-L-1-G14-0L10H-V1P-S1	
			571293	VPPM-8L-L-1-G14-0L10H-V1P-S1C1	
		0.06 ... 6	571294	VPPM-8L-L-1-G14-0L6H-V1N-S1	
			571295	VPPM-8L-L-1-G14-0L6H-V1N-S1C1	
			571297	VPPM-8L-L-1-G14-0L6H-V1P-S1	
			571298	VPPM-8L-L-1-G14-0L6H-V1P-S1C	
			G $\frac{1}{2}$	0.1 ... 10	575235
575236		VPPM-12L-L-1-G12-0L10H-V1P-S1			
575237		VPPM-12L-L-1-G12-0L10H-V1P-S1C1			
0.06 ... 6		575238		VPPM-12L-L-1-G12-0L6H-V1N-S1	
		575239		VPPM-12L-L-1-G12-0L6H-V1N-S1C1	
		575240		VPPM-12L-L-1-G12-0L6H-V1P-S1	
	575241	VPPM-12L-L-1-G12-0L6H-V1P-S1C1			

Proportional pressure regulators VPPM

FESTO

Technical data

Ordering data					
Proportional pressure regulators VPPM	Pneumatic connection 1, 2, 3	Pressure regulation range [bar]	Part No.	Type	
Current type 4 ... 20 mA					
Overall accuracy 2%	G ¹ / ₈	0.02 ... 2	542236	VPPM-6L-L-1-G18-0L2H-A4N	
			542237	VPPM-6L-L-1-G18-0L6H-A4N	
		0.06 ... 6	554045	VPPM-6L-L-1-G18-0L6H-A4P	
			558338	VPPM-6L-L-1-G18-0L6H-A4P-C1	
			542238	VPPM-6L-L-1-G18-0L10H-A4N	
			554046	VPPM-6L-L-1-G18-0L10H-A4P	
	Sub-base	0.02 ... 2	542248	VPPM-6F-L-1-F-0L2H-A4N	
			542249	VPPM-6F-L-1-F-0L6H-A4N	
		0.06 ... 6	558340	VPPM-6F-L-1-F-0L6H-A4P-C1	
			571282	VPPM-8F-L-1-F-0L6H-A4P	
	0.1 ... 10	542250	VPPM-6F-L-1-F-0L10H-A4N		
		571299	VPPM-8L-L-1-G14-0L6H-A4P		
	Overall accuracy 1%	G ¹ / ₈	0.02 ... 2	542230	VPPM-6L-L-1-G18-0L2H-A4N-S1
				542231	VPPM-6L-L-1-G18-0L6H-A4N-S1
0.06 ... 6			554041	VPPM-6L-L-1-G18-0L6H-A4P-S1	
			575128	VPPM-6L-L-1-G18-0L6H-A4P-S1C1	
			542232	VPPM-6L-L-1-G18-0L10H-A4N-S1	
			554042	VPPM-6L-L-1-G18-0L10H-A4P-S1	
Sub-base			0.02 ... 2	542242	VPPM-6F-L-1-F-0L2H-A4N-S1
				542243	VPPM-6F-L-1-F-0L6H-A4N-S1
			0.06 ... 6	571283	VPPM-8F-L-1-F-0L6H-A4P-S1
				571284	VPPM-8F-L-1-F-0L6H-A4P-S1C1
0.1 ... 10			542244	VPPM-6F-L-1-F-0L10H-A4N-S1	
			571288	VPPM-8L-L-1-G14-0L10H-A4N-S1	
G ¹ / ₄		0.1 ... 10	571289	VPPM-8L-L-1-G14-0L10H-A4P-S1	
			571290	VPPM-8L-L-1-G14-0L10H-A4P-S1C1	
			571302	VPPM-8L-L-1-G14-0L6H-A4N-S1	
		0.06 ... 6	571303	VPPM-8L-L-1-G14-0L6H-A4N-S1C1	
			571300	VPPM-8L-L-1-G14-0L6H-A4P-S1	
			571301	VPPM-8L-L-1-G14-0L6H-A4P-S1C1	
			575232	VPPM-12L-L-1-G12-0L10H-A4N-S1	
			575233	VPPM-12L-L-1-G12-0L10H-A4P-S1	
G ¹ / ₂		0.1 ... 10	575234	VPPM-12L-L-1-G12-0L10H-A4P-S1C1	
			575242	VPPM-12L-L-1-G12-0L6H-A4P-S1	
			575243	VPPM-12L-L-1-G12-0L6H-A4P-S1C1	
		0.06 ... 6	575244	VPPM-12L-L-1-G12-0L6H-A4N-S1	
	575245		VPPM-12L-L-1-G12-0L6H-A4N-S1C1		
For valve terminal					
Overall accuracy 2%	Via valve terminal	0.02 ... 2	542220	VPPM-6TA-L-1-F-0L2H	
			572410	VPPM-8TA-L-1-F-0L2H-C1	
		0.06 ... 6	542221	VPPM-6TA-L-1-F-0L6H	
			572411	VPPM-8TA-L-1-F-0L6H-C1	
		0.02 ... 10	542222	VPPM-6TA-L-1-F-0L10H	
			572412	VPPM-8TA-L-1-F-0L10H-C1	
Overall accuracy 1%	Via valve terminal	0.02 ... 2	542217	VPPM-6TA-L-1-F-0L2H-S1	
			572407	VPPM-8TA-L-1-F-0L2H-S1C1	
		0.06 ... 6	542218	VPPM-6TA-L-1-F-0L6H-S1	
			572408	VPPM-8TA-L-1-F-0L6H-S1C1	
		0.02 ... 10	542219	VPPM-6TA-L-1-F-0L10H-S1	
			572409	VPPM-8TA-L-1-F-0L10H-S1C1	

Proportional pressure regulators VPPM



Technical data

Ordering data				
Proportional pressure regulators VPPM	Pneumatic connection 1, 2, 3	Pressure regulation range [bar]	Part No.	Type
Overall accuracy 1%	G $\frac{1}{8}$	0.02 ... 2	8024258	VPPM-6L-L-1-G18-0L2H-LK-S1
		0.06 ... 6	8024259	VPPM-6L-L-1-G18-0L6H-LK-S1
		0.1 ... 10	8024260	VPPM-6L-L-1-G18-0L10H-LK-S1
	Sub-base	0.02 ... 2	8031107	VPPM-6F-L-1-F-0L2H-LK-S1
		0.06 ... 6	8031108	VPPM-6F-L-1-F-0L6H-LK-S1
		0.1 ... 10	8031109	VPPM-6F-L-1-F-0L10H-LK-S1
	G $\frac{1}{4}$	0.02 ... 2	8024261	VPPM-8L-L-1-G14-0L2H-LK-S1
		0.06 ... 6	8024262	VPPM-8L-L-1-G14-0L6H-LK-S1
		0.1 ... 10	8024263	VPPM-8L-L-1-G14-0L10H-LK-S1
	Sub-base	0.02 ... 2	8031110	VPPM-8F-L-1-F-0L2H-LK-S1
		0.06 ... 6	8031111	VPPM-8F-L-1-F-0L6H-LK-S1
		0.1 ... 10	8031112	VPPM-8F-L-1-F-0L10H-LK-S1
	G $\frac{1}{2}$	0.02 ... 2	8024264	VPPM-12L-L-1-G12-0L2H-LK-S1
		0.06 ... 6	8024265	VPPM-12L-L-1-G12-0L6H-LK-S1
		0.1 ... 10	8024266	VPPM-12L-L-1-G12-0L10H-LK-S1

Proportional pressure regulators VPPM

Ordering data – Modular products

M Mandatory data →

Module No.	Design	Nominal diameter	Valve type	Dynamic response	Valve mode	Type of connection
543432	VPPM	6	L F T	L	1	G18 F F
543433		8	L F T			G14 F F
543435		12	L			G12
Order example						
543432	VPPM	- 6	F	- L	- 1	- F

Ordering table		Size	Condi-tions	Code	Enter code
		6			
M	Module No.	543432			
	Design	Modular pressure regulator		VPPM	VPPM
	Nominal diameter	6		-6	
		8		-8	
		12	1	-12	
	Valve type	In-line	2	L	
		Flanged valve	3	F	
		Flanged valve for valve terminal	4	T	
	Dynamic response	Low dynamic response (pilot-actuated, soft-sealing)		-L	-L
	Valve mode	3/2-way valve, normally closed		-1	-1
	Type of connection	G ¹ / ₈ thread		-G18	
		G ¹ / ₄ thread		-G14	
		G ¹ / ₂ thread		-G12	
		Flange/sub-base		-F	

- 1** 12 Only with valve type L (In-Line)
- 2** L Only with connection type G18, G14, G12 (G¹/₈, G¹/₄, G¹/₂ thread)
- 3** F Only with connection type F (flange/sub-base)
- 4** T Only with connection type F (flange/sub-base)

Order code

543432 **VPPM** - **6** - **L** - **1** -

Proportional pressure regulators VPPM

Ordering data – Modular products



Mandatory data					Options	
Pressure regulation range	Alternative lower pressure regulation range	Alternative upper pressure regulation range	Setpoint specification	Switching output	Overall accuracy	Operator unit
0L2H 0L6H 0L10H	0.1 ... 10L	0.1 ... 10H	V1 A4 LK	P N	S1	C1
-	6.5L	7.1H	- A4	P	- S1	C1

Ordering table						
Size	6			Condi- tions	Code	Enter code
Mandatory data	Pressure regulation range	0 ... 2 bar			-0L2H	
		0 ... 6 bar			-0L6H	
		0 ... 10 bar			-0L10H	
	Alternative lower pressure regulation range	0.1 ... 10 bar	[4]		-...L	
		0.1 ... 10 bar	[5]		...H	
	Setpoint specification	Voltage (standard 0 ... 10 V)			-V1	
		IO-Link		☞ New	-LK	
Current (standard 4 ... 20 mA)				-A4		
Switching output	Positive switching			P		
	Negative switching			N		
Options	Overall accuracy	1%			-S1	
	Operator unit	With LCD, pressure unit variable			C1	

[4] ...L Not with pressure regulation range (0L2H, 0L6H, 0L10H).
Must always be less than alternative upper pressure regulation range H

[5] ...H Not with pressure regulation range (0L2H, 0L6H, 0L10H).
Must always be greater than alternative lower pressure regulation range L

Transfer order code

- - -


Proportional pressure regulators VPPM

Accessories

FESTO


Sub-base
VABM-P1

Material:
Wrought aluminium alloy

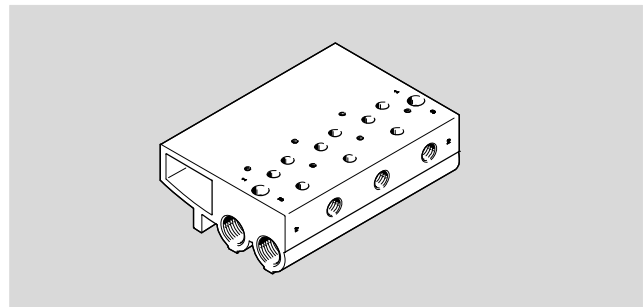

Dimensions

Download CAD data → www.festo.com

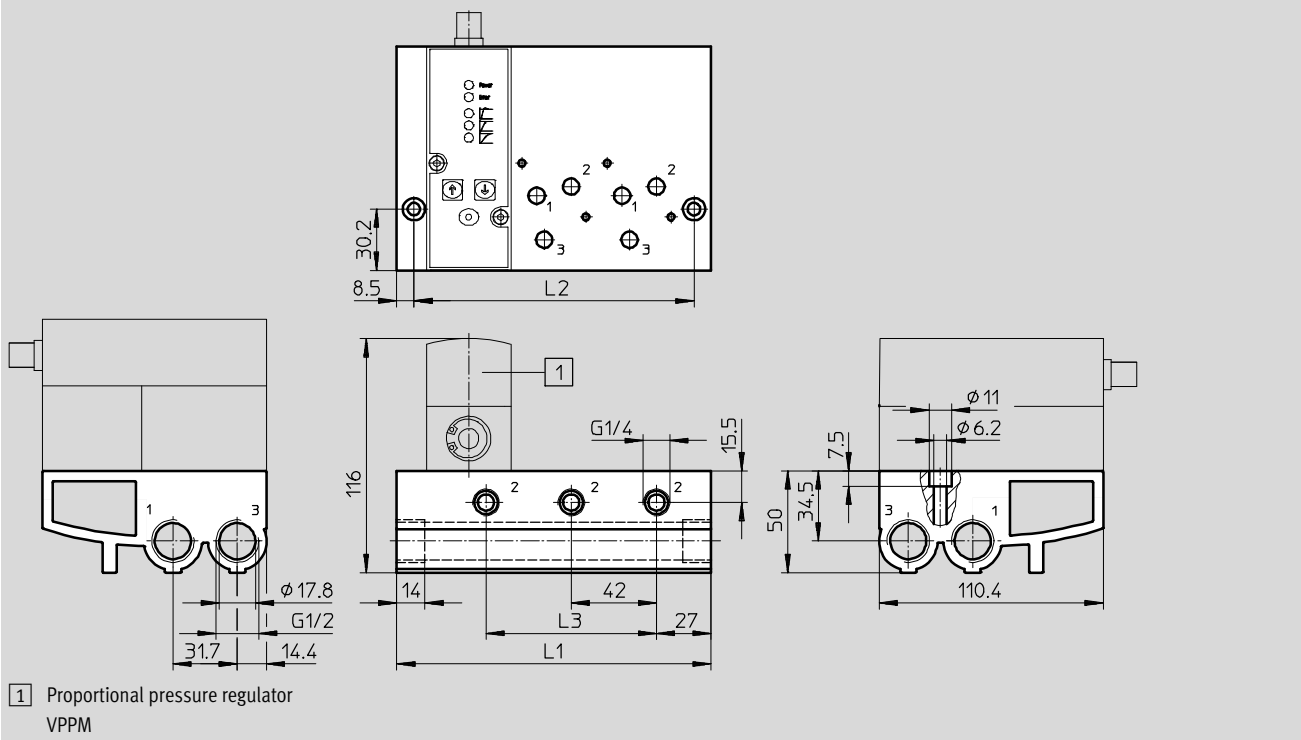

Dimensions and ordering data

Valve positions	L1	L2	L3	Weight [g]	CRC ¹⁾	Part No.	Type
2	113	96	42	900	2	542252	VABM-P1-SF-G18-2-P3
3	155	138	84	1,230	2	542253	VABM-P1-SF-G18-3-P3
4	197	180	126	1,565	2	542254	VABM-P1-SF-G18-4-P3

1) Corrosion resistance class 2 as per Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

-  - Note

Flanged valves VPPM-6F... and VPPM-8F... must be used in combination with the manifold block VABM-P1-....


Proportional pressure regulators VPPM

Accessories

FESTO


Blanking plate
VABB-P1

Material:
Wrought aluminium alloy, NBR, steel

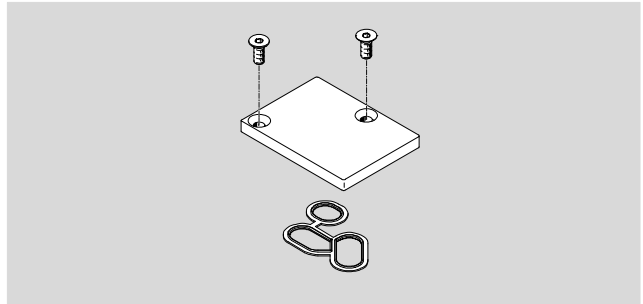

Dimensions

Download CAD data → www.festo.com

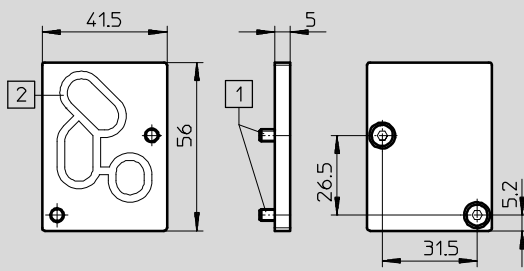

1 Countersunk screw M4x10

2 Seal VMPA- ...

Ordering data

Weight [g]	CRC	Part No.	Type
35	1 ¹⁾	558350	VABB-P1

1) Corrosion resistance class 1 as per Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.


Proportional pressure regulators VPPM

Accessories

FESTO


Mounting bracket
VAME-P1-A

Material:
Wrought aluminium alloy, steel

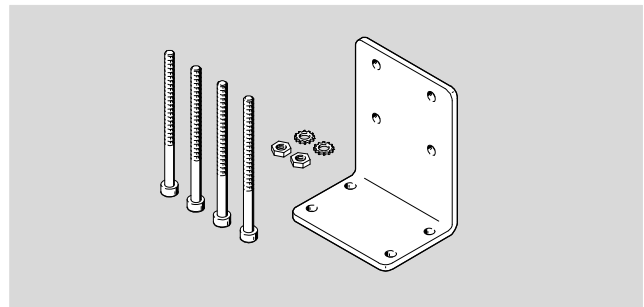

Dimensions

Download CAD data → www.festo.com

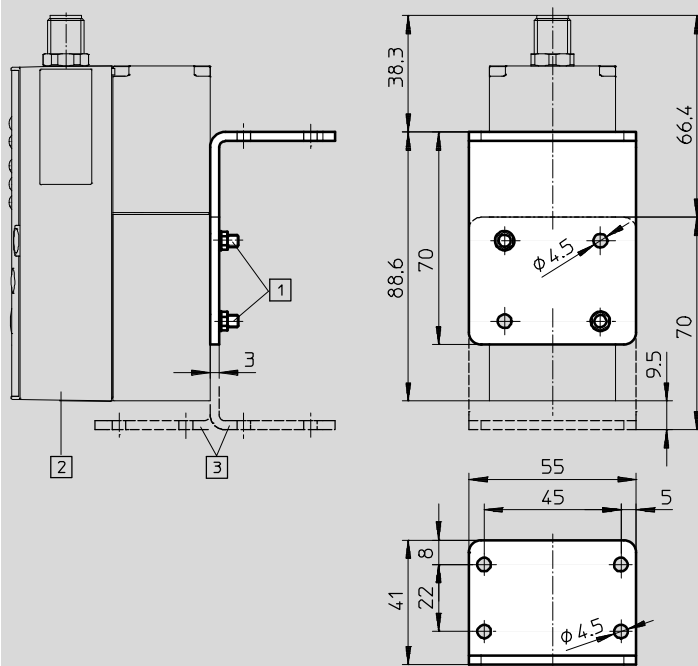

1) Socket head screw M4

2) Proportional pressure regulator VPPM

3) Mounting bracket can be reversed if required

Ordering data

Weight [g]	CRC	Part No.	Type
71	1 ¹⁾	542251	VAME-P1-A

1) Corrosion resistance class 1 as per Festo standard 940 070

Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

-  - Note

In-line valves VPPM-6L-... and VPPM-8L-... must be used in combination with the bracket VAME-P1-A.


Proportional pressure regulators VPPM

Accessories

FESTO


H-rail mounting
VAME-P1-T

Material:
Wrought aluminium alloy, steel

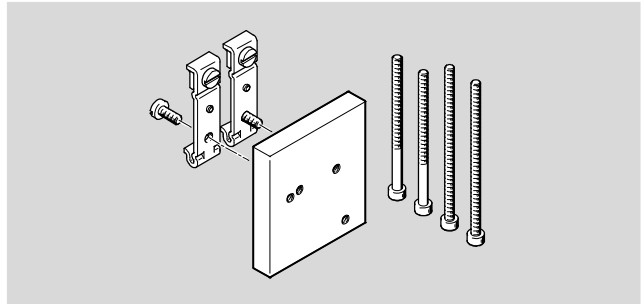

Dimensions

Download CAD data → www.festo.com

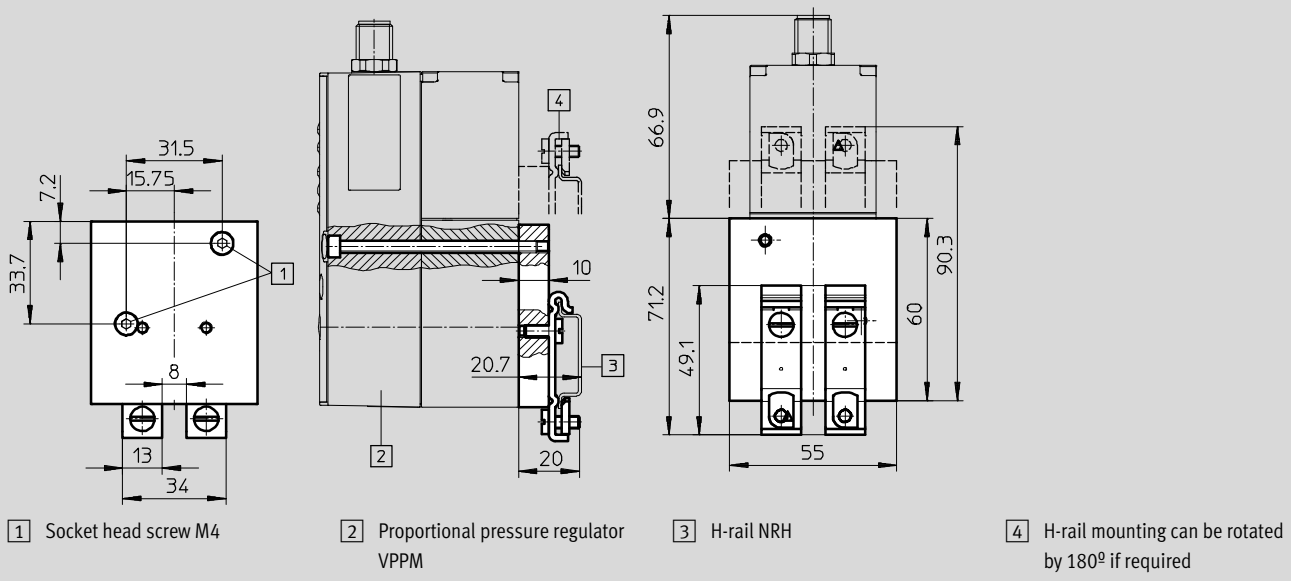

Ordering data

Weight [g]	CRC	Part No.	Type
150	1 ¹⁾	542255	VAME-P1-T

1) Corrosion resistance class 1 as per Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

- Note

In-line valves VPPM-6L-... and VPPM-8L-... must be used in combination with the H-rail VAME-P1-T.


Proportional pressure regulators VPPM

Accessories

FESTO


Plug socket with cable
NEBV-M12G8-KD-3-M12G4

For connecting the VPPM with the analogue input and output modules of the controller CPX.

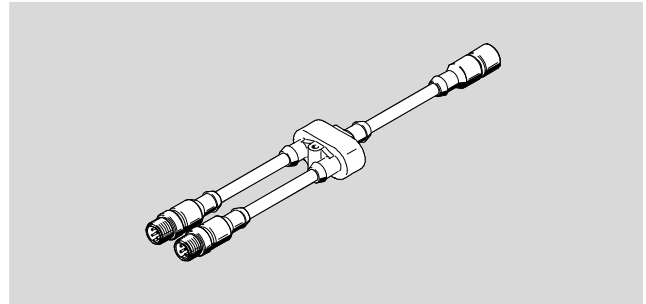

Dimensions and pin allocation

Download CAD data → www.festo.com

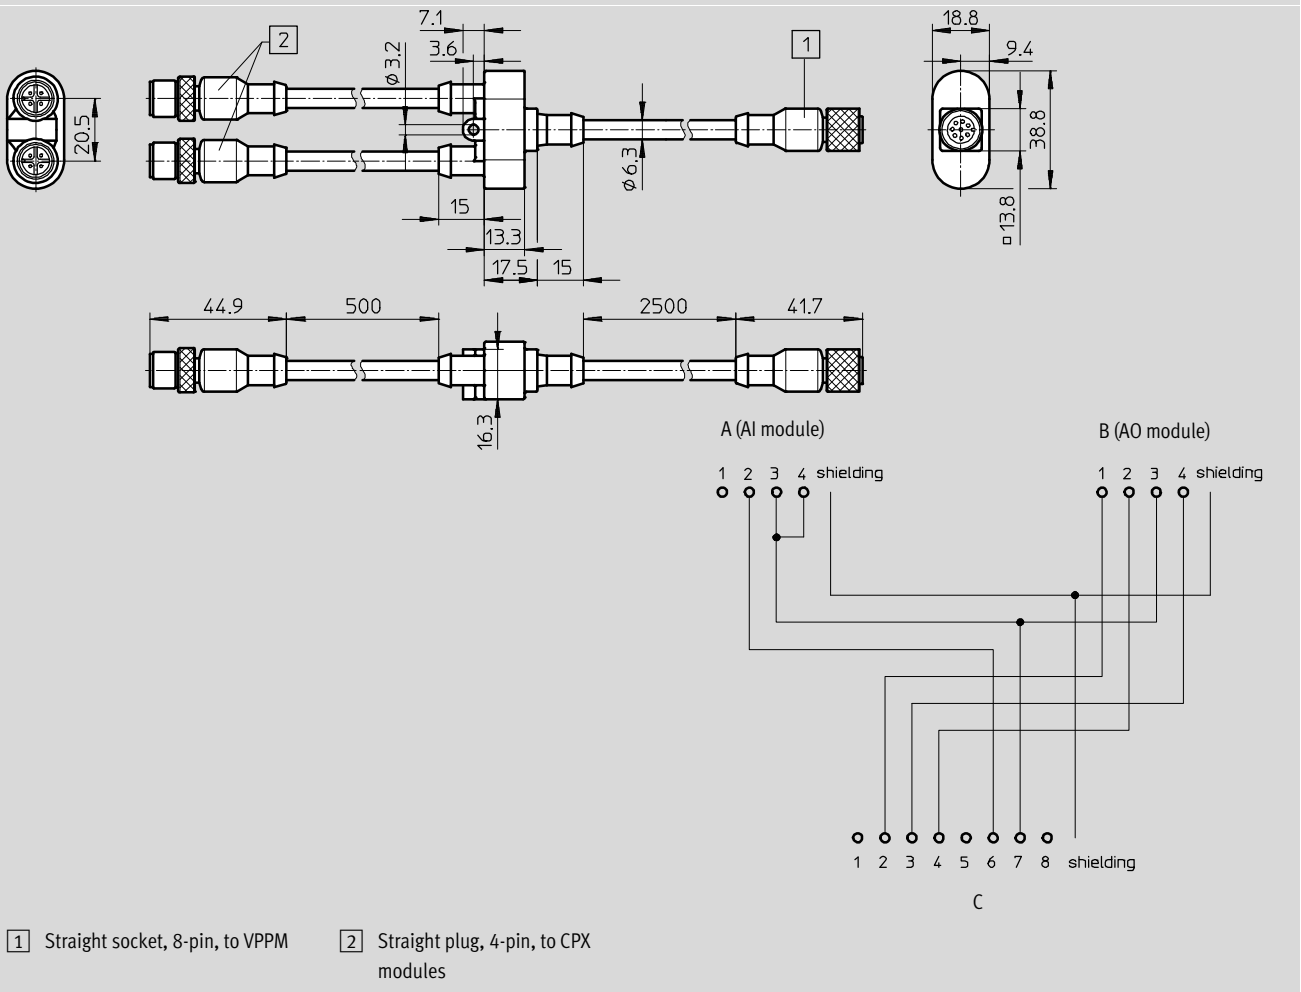


Proportional pressure regulators VPPM

Accessories




Plug socket with cable NEBV-M12G8-K-5-M12G4

For connecting the VPPM with the analogue output modules of the controller CPX.

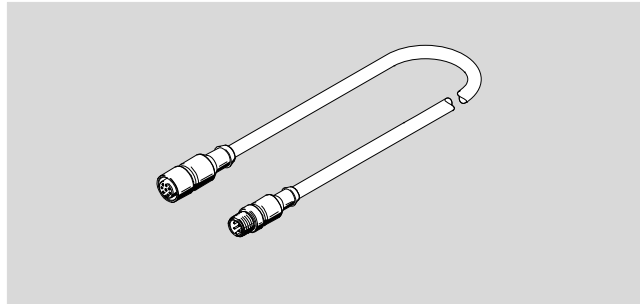

Dimensions and pin allocation

Download CAD data → www.festo.com

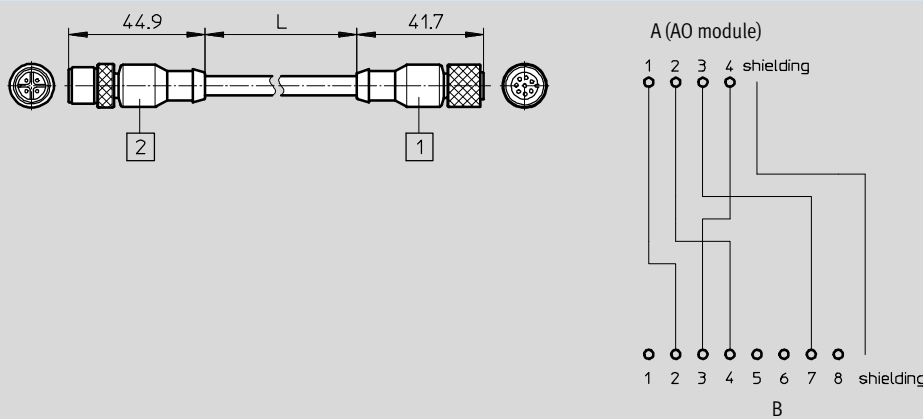

Type	2	1	L1
NEBV-M12G8-K-2-M12G4	Straight socket, M12, 8-pin to VPPM	Straight plug, M12, 4-pin to CPX module	2 m
NEBV-M12G8-K-5-M12G4			5 m

Ordering data

	Description	Part No.	Type
Connecting cable			
Technical data → Internet: connecting cable			
	Straight socket, 8-pin, M12	2 m	525616 SIM-M12-8GD-2-PU
		5 m	525618 SIM-M12-8GD-5-PU
		10 m	570008 SIM-M12-8GD-10-PU
	Angled socket, 8-pin, M12	2 m	542256 NEBU-M12W8-K-2-N-LE8
		5 m	542257 NEBU-M12W8-K-5-N-LE8
		10 m	570007 NEBU-M12W8-K-10-N-LE8
	One straight socket, 8-pin, and one straight plug, 4-pin	2 m	553575 NEBV-M12G8-K-2-M12G4
		5 m	553576 NEBV-M12G8-K-5-M12G4
	One straight socket, 8-pin, and two straight plugs, 4-pin	547888	NEBV-M12G8-KD-3-M12G4
Setpoint module			
Technical data → Internet: mpz			
	Generation of 6+1 analogue setpoint values	546224	MPZ-1-24DC-SGH-6-SW5


Ordering data IO-Link

	Description	Part No.	Type
Connecting cable			
Technical data → Internet: connecting cable			
	Straight socket, 5-pin, M12x1, protection class IP65, IP68, IP69K	5 m	574321 NEBU-M12G5-E-5-Q8N-M12G5
		7.5 m	574322 NEBU-M12G5-E-7.5-Q8N-M12G5
		10 m	574323 NEBU-M12G5-E-10-Q8N-M12G5

Product Range and Company Overview

A Complete Suite and Company Overview

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.

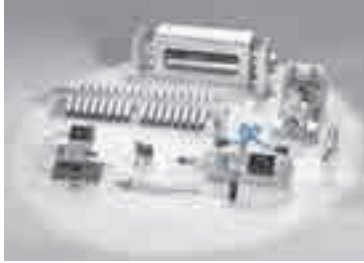

Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drivers



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 16,000 employees in 60 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.




© Copyright 2013, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmental friendly printing plant.

Festo North America

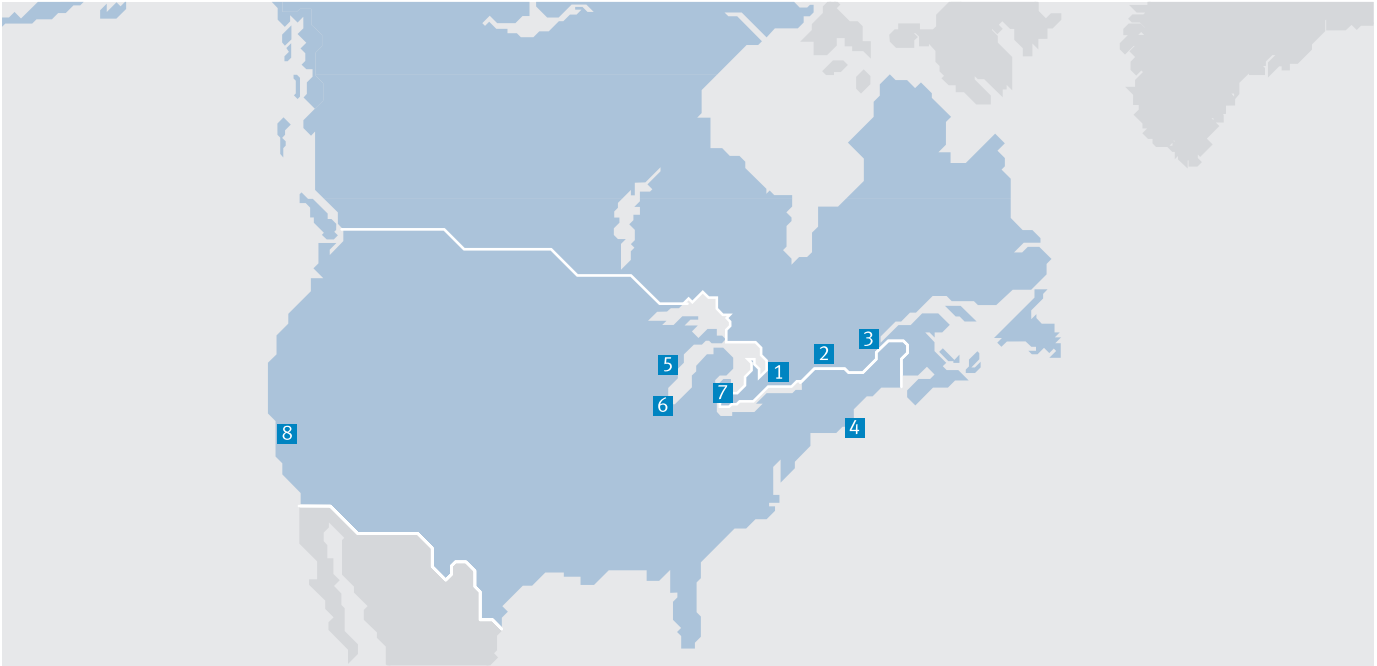

**1 Festo Canada
Headquarters
Festo Inc.**
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters
Festo Corporation**
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:
Tel: 1 877 GO FESTO (1 877 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: festo.canada@ca.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: technical.support@ca.festo.com

USA Customers

Commercial Support:
Tel: 1 800 99 FESTO (1 800 993 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: customer.service@us.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: product.support@us.festo.com