

## Mini slides DGSC

**FESTO**



# Mini slides DGSC

Key features

FESTO

## At a glance

### Properties

- Smallest guided slide unit (width 8 mm), therefore high component density possible
- Precision ball bearing cage guide permits accurate linearity/parallelism
- Long service life thanks to housing made from high-alloy steel
- Low break-away pressure and uniform movement thanks to minimal friction from guide and seal
- Contact resistance < 5  $\Omega$
- Quick and easy assembly and commissioning
- Two variants available to order:
  - Mounting interface on the side, supply ports on the front
  - Mounting interface on the front, supply ports on the side


### Range of applications

- Chip picking
- Slide or separating applications
- Pushing or stem applications


## Mounting options

### On the housing

DGSC-6-10-P-L




DGSC-6-10-P-P




### On the slide

DGSC-6-10-P-...




## Pneumatic connection

DGSC-6-10-P-L

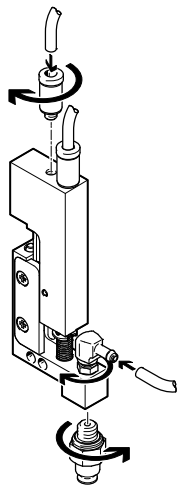

DGSC-6-10-P-P



# Mini slides DGSC

Type codes and peripherals overview


FESTO

## Type codes


		DGSC	–	6	–	10	–	P	–	P
<b>Type</b>										
Double-acting										
DGSC	Mini slide									
<b>Size</b>										
<b>Stroke [mm]</b>										
<b>Cushioning</b>										
P	Elastic cushioning without metal end stop, both ends									
<b>Supply ports</b>										
L	In the direction of movement of the slide									
P	On the side of the housing									

## Overview of peripherals

Supply ports in the direction of movement of the slide

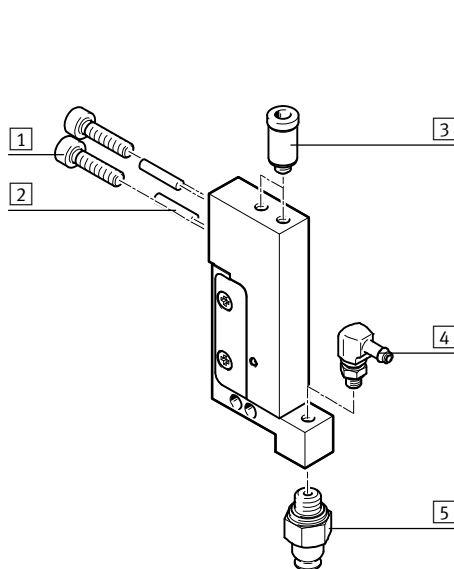

Supply ports on the side of the housing

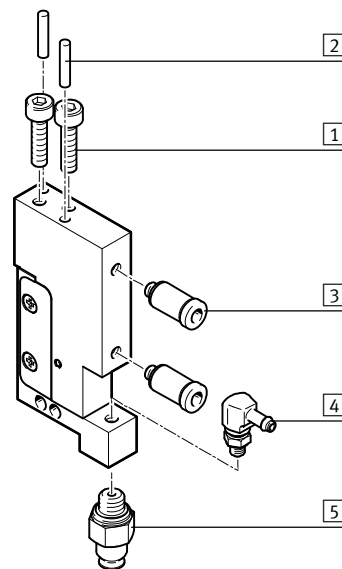


Accessories		Brief description	→ Page/Internet
1	Screw	For mounting the mini slide	–
2	Centring pin Ø 2, to EN ISO 2338	For centring the mini slide during assembly	–
3	Push-in fitting QSM	For supplying compressed air to the mini slide	8
4	Push-in L-fitting QSML	For connecting vacuum or compressed air to the slide	8
5	Suction cup VAS	–	9

# Mini slides DGSC

Technical data

FESTO

Function



- Ø - Size  
6

- | - Stroke length  
10 mm



General technical data		
Size		6
Stroke <sup>1)</sup>	[mm]	10
Pneumatic connection		M3
Design		Scotch yoke system
Guide		Ball bearing cage guide
Type of mounting		Via female thread and dowel pin
Cushioning		Elastic cushioning rings/pads at both ends
Position sensing		None
Mounting position		Any
Max. effective load <sup>2)</sup>	[g]	30
Max. operating frequency	[Hz]	< 4
Contact resistance	[Ω]	< 5
Repetition accuracy	[mm]	±0.1

1) Valid at 6 bar. The complete stroke is not achieved at lower operating pressure due to the integrated cushioning components.

2) For unthrottled operation.

Operating and environmental conditions	
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Operating pressure	[bar] 1 ... 6
Ambient temperature	[°C] 10 ... 50
Corrosion resistance class CRC <sup>2)</sup>	2

2) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Weight [g]		
Type	DGSC-6-10-P-L	DGSC-6-10-P-P
Product weight	42	52
Moving load	17	17

Forces [N]	
Theoretical force at 6 bar, advance	17
Theoretical force at 6 bar, retract	12.7
Measured force at 6 bar, advance	15.5

Travel times [ms] at 6 bar	
Advancing	19
Retracting	16.5


# Mini slides DGSC

Technical data

FESTO

## Materials

Sectional view

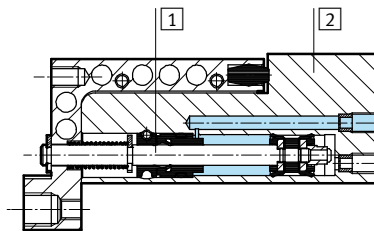


Mini slide

1	Piston rod	High-alloy stainless steel
2	Housing	High-alloy stainless steel
–	Seals	Nitrile rubber
Note on materials		Free of copper and PTFE
		RoHS-compliant

## Static characteristic load values

The indicated forces and torques refer to the guide.

These values must not be exceeded during dynamic operation. Special attention must be paid to the cushioning phase.



If the drive is simultaneously subjected to several of the indicated forces and torques, the following equation must be satisfied in addition to the indicated maximum loads:

$$\frac{F_y}{F_{y_{max.}}} + \frac{F_z}{F_{z_{max.}}} + \frac{M_x}{M_{x_{max.}}} + \frac{M_y}{M_{y_{max.}}} + \frac{M_z}{M_{z_{max.}}} \leq 1$$

## Permissible forces and torques

$F_{y_{max.}}$	[N]	20
$F_{z_{max.}}$	[N]	20
$M_{x_{max.}}$	[Nm]	0.3
$M_{y_{max.}}$	[Nm]	0.4
$M_{z_{max.}}$	[Nm]	0.4

# Mini slides DGSC




Technical data

FESTO

## Slide displacement at max. stroke

Longitudinal load

Transverse load

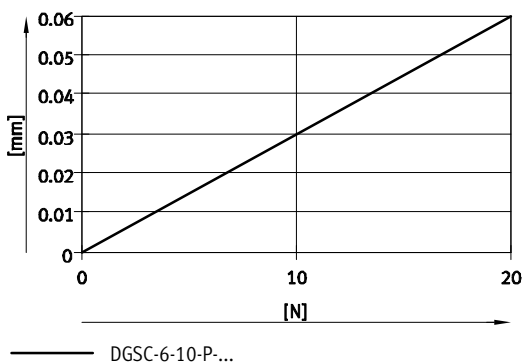



## Stroke compensation

The integrated spring enables stroke compensation of 2.5 mm if there is a risk of collision in the advanced state. Only low spring forces then act on the yoke.

This protects the mechanism from overload.

Stroke:  
L1= 10 mm

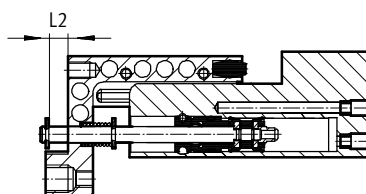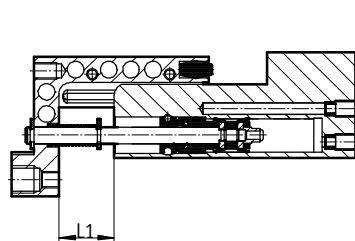

Stroke compensation (L2)	[mm]	0	2.5
Spring force	[N]	2.0	2.4

## Parallelism/perpendicularity/linearity [mm]

### Parallelism/perpendicularity:



Accuracy of alignment between the housing mounting surface and the mounting interface on the yoke.

DGSC-6-10-P-L

DGSC-6-10-P-P

### Linearity:

Maximum distance between individual points on the slide and the housing mounting surface with the drive in retracted and advanced state.

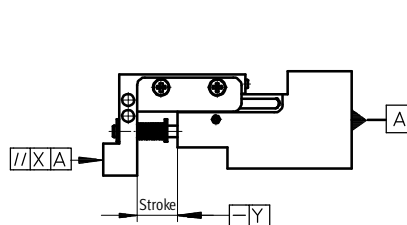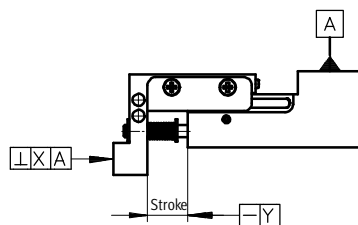

Type		DGSC-6-10-P-L	DGSC-6-10-P-P
Parallelism	[mm]	–	< 0.03
Perpendicularity	[mm]	< 0.03	–
Linearity	[mm]	< 0.01	

# Mini slides DGSC


Technical data

**FESTO**


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

DGSC-6-10-P-L

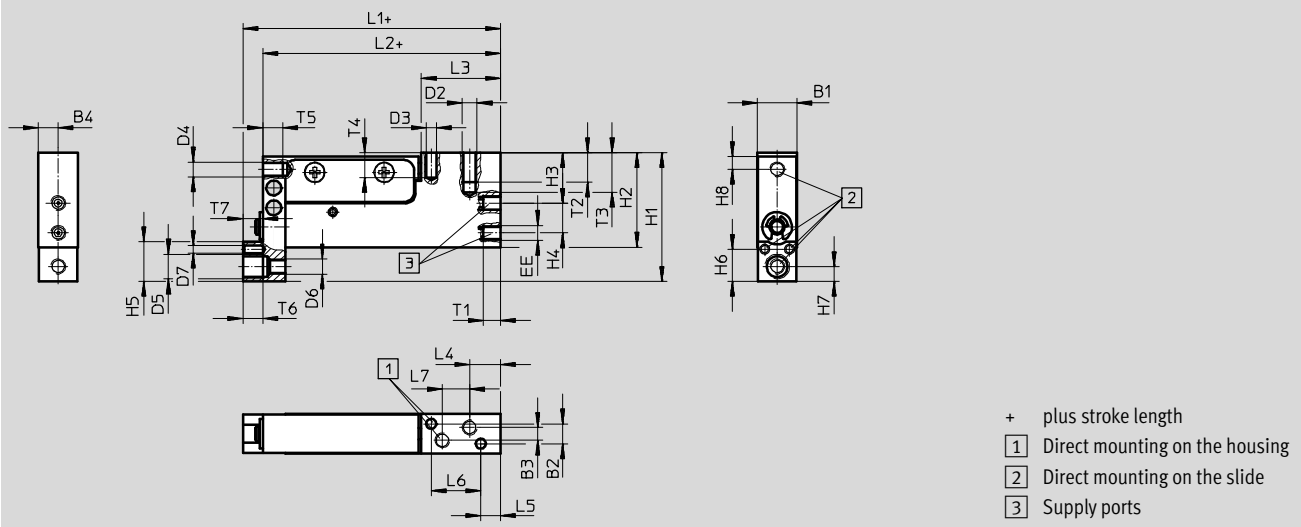

DGSC-6-10-P-P

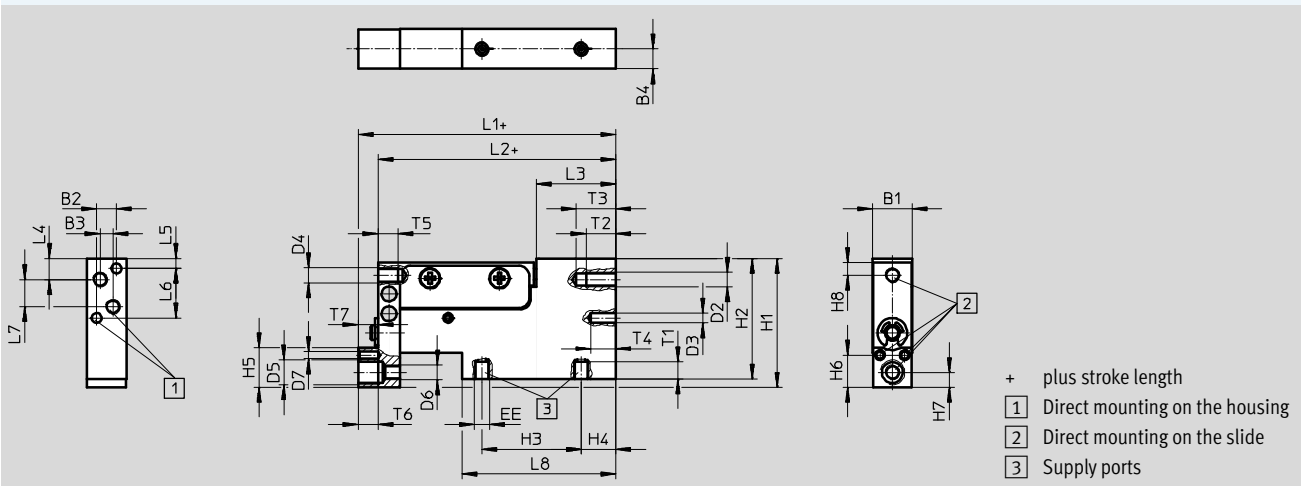

Type	B1	B2	B3	B4	D2	D3 Ø H8	D4	D5	D6	D7 Ø H8	EE
	-0.05/-0.15	±0.02	±0.1								
DGSC-6-10-P-L	8	4	2.6	4	M3	2	M3	M5	M3	1.5	M3
DGSC-6-10-P-P	8	4	2.6	4	M3	2	M3	M5	M3	1.5	M3


Type	H1	H2	H3	H4	H5	H6 ±0.02	H7	H8	L1	L2	L3
DGSC-6-10-P-L	26	19.1	10.2	6	8	6.5	3	2.6	52	48	16
DGSC-6-10-P-P	26	24.3	20	7	8	6.5	3	2.6	52	48	16

Type	L4	L5	L6 ±0.02	L7 ±0.1	L8	T1 max.	T2 min.	T3 +1	T4 +1	T5 min.	T6 min.	T7 +1
DGSC-6-10-P-L	6.25	4	10	5.5	—	3.5	6	8	5	4	4	4
DGSC-6-10-P-P	4.25	2	10	5.5	31	3.5	6	8	5	4	4	4






# Mini slides DGSC

Technical data

**FESTO**

Ordering data					
	Type	Brief description	Part No.	Type	
	DGSC-6-10-P-L	Supply ports in the direction of movement of the slide	<b>569793</b>	<b>DGSC-6-10-P-L</b>	
	DGSC-6-10-P-P	Supply ports on the side of the housing	<b>569792</b>	<b>DGSC-6-10-P-P</b>	

## Accessories


Ordering data – Fitting						
Type	Connection		Weight [g]	Part No.	Type	PU <sup>1)</sup>
	Thread	For tubing Ø [mm]				
For supplying compressed air to the mini slide						
Push-in fitting QSM				Technical data → Internet: qsm		
	M3	2 (outside)	0.8	<b>133026</b>	<b>QSM-M3-2-I</b>	10
	M3	3 (outside)	3	<b>133001</b>	<b>QSM-M3-3-I-R</b>	
Barbed fitting CN				Technical data → Internet: cn		
	M3	2 (inside)	3	<b>15871</b>	<b>CN-M3-PK-2</b>	10
	M3	3 (inside)	3	<b>15872</b>	<b>CN-M3-PK-3</b>	
Barbed L-fitting LCN				Technical data → Internet: lcn		
	M3	2 (inside)	2	<b>30491</b>	<b>LCN-M3-PK-2-B</b>	10
	M3	3 (inside)	2	<b>30982</b>	<b>LCN-M3-PK-3</b>	
For connecting vacuum or compressed air to the slide						
Push-in L-fitting QSML				Technical data → Internet: qsml		
	M3	2 (outside)	2	<b>133030</b>	<b>QSML-M3-2</b>	10
	M3	3 (outside)	2	<b>153330</b>	<b>QSML-M3-3</b>	10
	M3	3 (outside)	2	<b>130768</b>	<b>QSML-M3-3-100</b>	100
Barbed L-fitting LCN				Technical data → Internet: lcn		
	M3	2 (inside)	2	<b>30491</b>	<b>LCN-M3-PK-2-B</b>	10
	M3	3 (inside)	2	<b>30982</b>	<b>LCN-M3-PK-3</b>	




## Mini slides DGSC

Technical data

**FESTO**

Ordering data – One-way flow control valve						
Type	Connection	Function	Weight  [g]	Part No.	Type	PU <sup>1)</sup>
	Male thread					
For supplying compressed air to the mini slide					Technical data ➔ Internet: grl	
	M3	Exhaust air flow control	3	175038	GRLA-M3	1
	M3	Supply air flow control	3	175040	GRLZ-M3	

Ordering data – Suction cup					Technical data → Internet: suction cup		
Type	Connection		Material	Weight  [g]	Part No.	Type	PU <sup>1)</sup>
	Thread	For suction cup Ø [mm]					
	M5	8	Nitrile rubber	4	34588	VAS-8-M5-NBR	1
	M5	8	Polyurethane	4	1396086	VAS-8-M5-PUR-B	
	M5	8	Silicone	2	1377781	VAS-8-M5-SI-B	

1) Packaging unit