


Plastic tubing, standard O.D.

FESTO

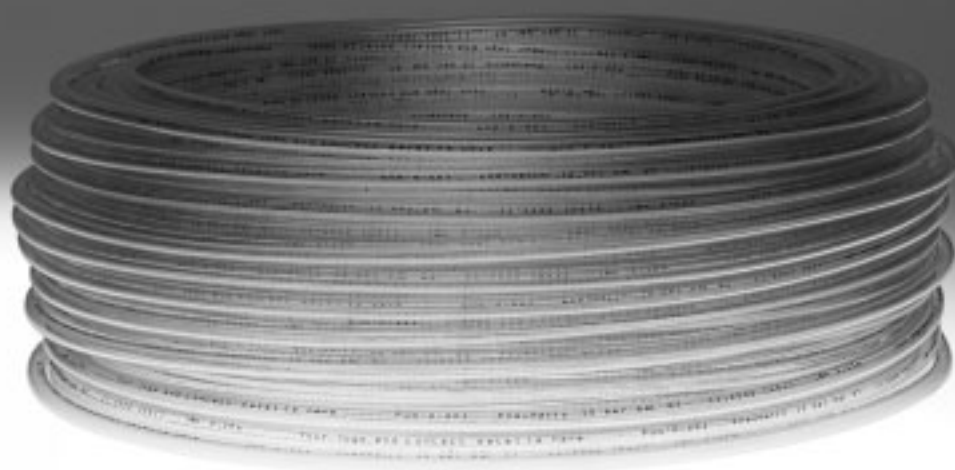

Plastic tubing, standard O.D.

Features

FESTO

Application



The requirements with respect to pressure, temperature, flexibility and environmental influences differ from industry to industry. Users frequently underestimate the risks: around 90%

of all cases of damage can be traced back to the wrong choice of tubing or tubing materials. This can not only result in energy losses, but also

machine downtimes. It is especially important to find a reliable and cost-effective product that prevents tubing degradation during operation.

Summary of tubing/fitting combinations			
Applications	Tubing	Fitting	Description
Standard	PEN	QS-B	Suitable for a wide range of tasks and attractively priced. Flexible thanks to highly resistant materials, easy to install thanks to optimised bending radii. High level of abrasion resistance in dynamic applications.
	PUN	QS	Maximum flexibility in standard applications thanks to an extremely wide range of options for combining the different types.
	PAN	QS	Meets all requirements, even for standard applications with increased pressure and temperature ranges.
High pressures	PAN-MF	NPQM	Meets DIN standard 73378: ideal for use in mobile pneumatics. Suitable for increased temperature ranges combined with high pressure ranges.
	PAN-R	NPQH	Powerful in pressure ranges up to 20 bar, for example in applications with the pressure booster DPA.
Resistant to chemicals, food safe and hydrolysis resistant	PLN	NPQP	Resistant to cleaning agents, FDA compliant and economical. Can be used instead of the combination with stainless steel fittings.
	PUN-H	NPKA	Hydrolysis resistant and suitable for water applications. Combination suitable for use in clean rooms, FDA compliant and corrosion resistant thanks to 100% polymer construction. Very easy to install thanks to the "one click principle".
	PFAN	NPQH	For high temperatures up to 150 °C. Suitable for use in the food industry, FDA compliant and resistant to cleaning agents.
	PFAN	NPCK	Easy to clean thanks to the union nut's edge-free design. Maximum resistance to corrosion (CRC 4) and FDA compliant. Suitable for a wide range of media.
	PFAN	CRQS	Maximum resistance to corrosion (CRC 4) and to aggressive acids and lyes.
Anti-static	PUN-CM	NPQM	Anti-static tubing plus solid metal fitting: maximum protection for electrical and electronic components.
Flame retardant	PUN-V0	NPQM	Very safe in areas where there is a risk of fire thanks to flame-retardant properties. The tubing has been tested to DIN 5510-2.
Resistant to welding spatter	PUN-V0-C	NPQH	Ideal for applications involving welding spatter. Reliable thanks to a tubing wall thickness of 2 mm for all diameters.
	PAN-V0	QS-V0	Safe even in the immediate vicinity of welding spatter thanks to the double-walled tubing with special fitting.

Note

The ambient conditions and the operating medium transported can have a considerable effect on the service life of plastic tubing. Based on empirical values, Festo recommends the following time specifications for the usage of plastic tubing in general and safety-related applications:

- For general applications, a minimum service life of 10 years can be expected.
- For safety-related applications, we recommend regular inspection at least every 12 months.
- For applications that have an effect

on the material, inspections must be carried out at suitable intervals. We recommend that the interval between inspections should be no more than 6 months, at most half of the period in which failures can occur.

Plastic tubing, standard O.D.

Technical data

FESTO

Note

Tubing diameters that are too big or too small as well as bending radii that are too small result in flow rate losses.

One of the most important rules when selecting tubing is therefore that it should be as long as necessary and as short as possible.

Make sure therefore that in practice tubing is laid loosely and is not stretched.

Tools for bundling tubing or for avoiding bending/pinching tubing are available as accessories:


- Tubing strap PB
- Spiral wraps for tubing PKB
- Tubing support NPAW
- Tubing support PKS
- Multi-tube holder KK

Other accessories include connecting tools for tubing:

- Pipe and tubing cutter ZRS
- Tubing cutter PAN-VOS for flame-retardant plastic tubing PAN-V0
- Connecting pliers ZMS/disconnecting pliers ZDS for connecting/disconnecting the plastic tubing and barbed fitting


Measuring methods

Flow-relevant bending radius Rd



The tubing is bent in the direction of its inherent flexion until a 5% flattening of the tubing O.D. occurs. The Rd is then calculated.

There is no reduction in the flow rate up until the Rd is reached.




Cross section flattened as a result of bended tubing

d = non deformed tubing OD

d1 = deformed tubing OD

Minimum bending radius Rmin



The tubing attached to a movable plate is bent until the deformation results in a kink.

The measured value is the minimum bending radius Rmin. This Rmin leads to considerable reductions in flow.

Plastic tubing, standard O.D.

Product range overview

FESTO

Version	Type	Outside Ø [mm]	Colour														
			Silver	Blue	Translucent blue	Black	Translucent black	Yellow	Translucent yellow	Green	Translucent green	Red	Translucent red	Brown	White	Natural	Blue/black
	PAN Polyamide	4, 6, 8, 10, 12, 14, 16	■	■	–	■	–	■	–	■	–	■	–	(■) ¹⁾	(■) ¹⁾	■	–
	PAN-R Polyamide	4, 6, 8, 10, 12, (14) ¹⁾ , 16	■	(■) ¹⁾	–	(■) ¹⁾	–	(■) ¹⁾	–	(■) ¹⁾	–	(■) ¹⁾	–	(■) ¹⁾	(■) ¹⁾	(■) ¹⁾	–
		22, 28	–	–	–	■	–	–	–	–	–	–	–	–	–	–	–
	PAN-MF Polyamide	4, 6, 8, 10, 12, 14, 16	(■) ¹⁾	(■) ¹⁾	–	■	–	(■) ¹⁾	–	(■) ¹⁾	–	(■) ¹⁾	–	(■) ¹⁾	(■) ¹⁾	(■) ¹⁾	–
	PAN-VO Polyamide	4, 6, 8, 10, 12	–	■	–	■	–	■	–	■	–	■	–	■	■	–	–
	PFAN Perfluor-alkoxyalkan	4, 6, 8, 10, 12	–	–	–	–	–	–	–	–	–	–	–	–	–	■	–
	PEN Polyethylene	4, 6, 8, 10, 12, 14, 16	■	■	–	■	–	■	–	■	–	■	–	(■) ¹⁾	(■) ¹⁾	■	–
	PLN Polyethylene	4, 6, 8, 10, 12, 14, 16	■	■	–	■	–	(■) ¹⁾	–	(■) ¹⁾	–	■	–	(■) ¹⁾	(■) ¹⁾	■	–
	PUN Polyurethane	3, 4, 6, 8, 10, 12, 14, 16	■	■	–	■	–	■	–	■	–	■	–	(■) ¹⁾	(■) ¹⁾	–	–
	PUN-DUO Polyurethane	4, 6, 8, 10	■	–	–	–	–	–	–	–	–	–	–	–	–	–	■
	PUN-CM Polyurethane	4, 6, 8, 10, 12, (14) ¹⁾	–	–	–	■	–	–	–	–	–	–	–	–	–	–	–
	PUN-H Polyurethane	2	–	–	–	■	–	–	–	–	–	■	–	–	–	■	–
		3, 4, 6, 8, 10, 12, 14, 16	■	■	■	■	(■) ¹⁾	■	(■) ¹⁾	■	(■) ¹⁾	■	(■) ¹⁾	(■) ¹⁾	(■) ¹⁾	■	–
	PUN-H-DUO Polyurethane	4, 6, 8, 10	–	–	–	–	–	–	–	–	–	–	–	–	–	–	■
	PUN-VO Polyurethane	6, 8, 10, 16	–	■	–	■	–	■	–	■	–	■	–	■	■	–	–
	PUN-VO-C Polyurethane	4, 6, 8, 10, 12, 14, 16	–	■	–	■	–	■	–	■	–	■	–	■	■	–	–

1) Please note the information below.



Note

Product options in brackets can only be ordered using the modular product system.

Please note the minimum ordering quantity of 3,000 m for tubing with O.D. ≤ 8 mm and 1,500 m with O.D. > 8 mm.

There is a modular product system for plastic tubing.

- PAN → 16
- PEN → 22
- PLN → 25
- PUN → 43

Plastic tubing, standard O.D.

Product range overview

FESTO

Type	Operating medium				Material fire test	Antistatic	Halogen-free	Contact with electrical cables	Suitable for chain link trunking	Approved by German Technical Control Board	Germanischer Lloyd	Resistance				Flexibility	Shore hardness ⁸⁾	→ Page/ Internet
	Compressed air, vacuum	Water	Mineral oil									Chemicals	Microbes	UV radiation	Hydrolysis			
PAN	■	-	-	-	-	-	■	■	++	■	■ ³⁾	+	++	+	++	++	D 55 ±3	7
PAN-R	■	-	-	-	-	-	■	■	++	■	-	+	++	+	++	+	D 62 ±3	10
	■	-	-	-	-	-	■	■	++	-	-	+	++	+	++	+	D 62 ±3	11
PAN-MF	■	-	■ ²⁾	-	-	-	■	■	+++	-	-	+	++	+	++	+	D 65 ±3	12
PAN-V0	■	■	■	-	UL94 V0	-	-	■	++	-	-	+	++	++	++	++	A 72 ±4 ⁵⁾ D 57 ±3 ⁶⁾	14
PFAN	■	■	-	■	UL94 V0	-	-	■	-	■	-	+++	++	++	+++	+	D 60 +5	17
PEN	■	■	-	-	-	-	■	■	+++	■	-	++	++	++ ⁴⁾	+++	++	D 52 ±3	19
PLN	■	■	-	■	-	-	■	■	-	■	-	++	++	++ ⁴⁾	+++	+	-	23
PUN	■	-	-	-	UL94 HB	-	■	■ ⁷⁾	++	■	-	-	-	++ ⁴⁾	+	+++	D 52 ±3	26
PUN-DUO	■	-	-	-	UL94 HB	-	■	■ ⁷⁾	++	■	-	-	-	+	+	++	D 52 ±3	29
PUN-CM	■	-	-	-	-	■	■	■	+++	-	-	+	++	++	++	++	D 52 ±3	31
PUN-H	■	-	-	-	-	-	■	■	++	-	-	+	++	++ ⁴⁾	++	+++	D 52 ±3	32
	■	■	-	■	-	-	■	■	++	■	-	+	++	++ ⁴⁾	++	+++	D 52 ±3	33
PUN-H-DUO	■	■	-	■	-	-	■	■	++	■	-	+	++	+	++	++	D 52 ±3	38
PUN-V0	■	■	-	-	UL94 V0...V2	-	■	■	++	■	-	+	++	++ ⁴⁾	++	++	D 54 ±3	39
PUN-V0-C	■	■	-	-	UL94 V0...V2	-	■	■	++	■	-	+	++	++ ⁴⁾	++	++	D 54 ±3	41

+++ Very well suited

++ Well suited

+ Limited suitability (upon request)

- Unsuitable

2) As a precaution, please agree the operating medium with Festo.

3) Applies for silver colour

4) Applies for black colour

5) External conduit

6) Internal conduit

7) Under unfavourable conditions, cables which contain phosphoric acid ester may damage PUN tubing.

8) Values are determined using test boards. Values determined using tubing may vary.

Plastic tubing, standard O.D.

Type codes

FESTO

PUN		–		–	12x2	–		–	BL	–	200																																
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td>PAN</td> <td>Polyamide</td> </tr> <tr> <td>PFAN</td> <td>Perfluor-alkoxyalkan</td> </tr> <tr> <td>PEN</td> <td>Polyethylene</td> </tr> <tr> <td>PLN</td> <td></td> </tr> <tr> <td>PUN</td> <td>Polyurethane</td> </tr> </tbody> </table>												Material		PAN	Polyamide	PFAN	Perfluor-alkoxyalkan	PEN	Polyethylene	PLN		PUN	Polyurethane																				
Material																																											
PAN	Polyamide																																										
PFAN	Perfluor-alkoxyalkan																																										
PEN	Polyethylene																																										
PLN																																											
PUN	Polyurethane																																										
<table border="1"> <thead> <tr> <th colspan="2">Certification</th> </tr> </thead> <tbody> <tr> <td>CM</td> <td>Antistatic</td> </tr> <tr> <td>H</td> <td>Hydrolysis resistant</td> </tr> <tr> <td>VO</td> <td>Flame retardant</td> </tr> <tr> <td>R</td> <td>Heavy-duty</td> </tr> <tr> <td>MF</td> <td>Automotive certification (DIN 73378)</td> </tr> </tbody> </table>												Certification		CM	Antistatic	H	Hydrolysis resistant	VO	Flame retardant	R	Heavy-duty	MF	Automotive certification (DIN 73378)																				
Certification																																											
CM	Antistatic																																										
H	Hydrolysis resistant																																										
VO	Flame retardant																																										
R	Heavy-duty																																										
MF	Automotive certification (DIN 73378)																																										
<table border="1"> <thead> <tr> <th colspan="2">Outside Ø x wall thickness [mm]</th> </tr> </thead> <tbody> <tr> <td colspan="2"></td> </tr> </tbody> </table>												Outside Ø x wall thickness [mm]																															
Outside Ø x wall thickness [mm]																																											
<table border="1"> <thead> <tr> <th colspan="2">Twin tubing</th> </tr> </thead> <tbody> <tr> <td>DUO</td> <td>Twin tubing</td> </tr> </tbody> </table>												Twin tubing		DUO	Twin tubing																												
Twin tubing																																											
DUO	Twin tubing																																										
<table border="1"> <thead> <tr> <th colspan="2">Colour</th> </tr> </thead> <tbody> <tr> <td>SW</td> <td>Black</td> </tr> <tr> <td>TSW</td> <td>Translucent black</td> </tr> <tr> <td>BL</td> <td>Blue</td> </tr> <tr> <td>TBL</td> <td>Translucent blue</td> </tr> <tr> <td>GN</td> <td>Green</td> </tr> <tr> <td>TGN</td> <td>Translucent green</td> </tr> <tr> <td>RT</td> <td>Red</td> </tr> <tr> <td>TRT</td> <td>Translucent red</td> </tr> <tr> <td>GE</td> <td>Yellow</td> </tr> <tr> <td>TGE</td> <td>Translucent yellow</td> </tr> <tr> <td>WS</td> <td>White</td> </tr> <tr> <td>BR</td> <td>Brown</td> </tr> <tr> <td>SI</td> <td>Silver</td> </tr> <tr> <td>NT</td> <td>Natural</td> </tr> <tr> <td>BS</td> <td>Blue/black</td> </tr> </tbody> </table>												Colour		SW	Black	TSW	Translucent black	BL	Blue	TBL	Translucent blue	GN	Green	TGN	Translucent green	RT	Red	TRT	Translucent red	GE	Yellow	TGE	Translucent yellow	WS	White	BR	Brown	SI	Silver	NT	Natural	BS	Blue/black
Colour																																											
SW	Black																																										
TSW	Translucent black																																										
BL	Blue																																										
TBL	Translucent blue																																										
GN	Green																																										
TGN	Translucent green																																										
RT	Red																																										
TRT	Translucent red																																										
GE	Yellow																																										
TGE	Translucent yellow																																										
WS	White																																										
BR	Brown																																										
SI	Silver																																										
NT	Natural																																										
BS	Blue/black																																										
<table border="1"> <thead> <tr> <th colspan="2">Packaging unit [m]</th> </tr> </thead> <tbody> <tr> <td colspan="2"></td> </tr> </tbody> </table>												Packaging unit [m]																															
Packaging unit [m]																																											

Plastic tubing PAN

Technical data

FESTO


Plastic tubing PAN

High thermal and mechanical load capacities.



Operating and environmental conditions				
Type	PAN-4/8	PAN-6	PAN-10/12/14	PAN-16
Temperature dependent operating pressure [bar]	-0.95 ... +15 → diagram	-0.95 ... +19 → diagram	-0.95 ... +17 → diagram	-0.95 ... +14 → diagram
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:-:-]			
Ambient temperature [°C]	-30 ... +80			
Approval	German Technical Control Board (TÜV)			

Operating pressure p as a function of temperature t

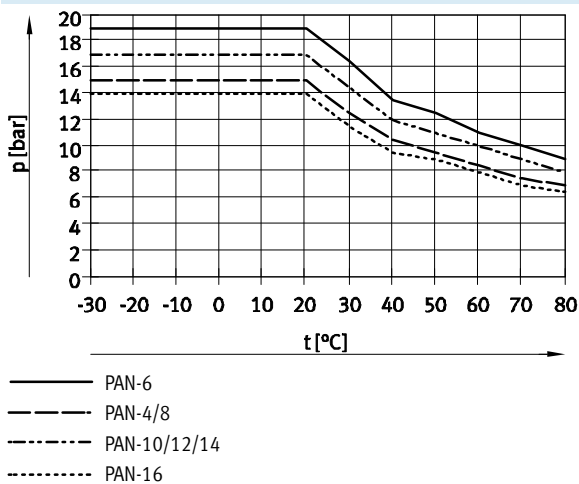

Accessories

Type	→ Internet	
	Recommended fitting	
	- Push-in fitting QS ¹⁾	qs
	Very suitable	
	- Push-in fitting QS-B ¹⁾	qs-b
	- Push-in fitting CRQS ¹⁾	crqs
	- Push-in fitting NPQH ²⁾	npqh
	- Push-in fitting NPQP ³⁾	npqp
	- Push-in fitting NPQM ²⁾	npqm
	- Click fitting NPKA ⁴⁾	npka
	- Fitting NPCK ⁵⁾	npck
	- Quick connector CK ⁶⁾	ck
	- Barbed fitting CN ⁶⁾	cn
	Limited suitable	
	- Push-in fitting QS-V0 ³⁾	qs-v0

- 1) Not for O.D. 14 mm
 2) Not for O.D. 16 mm
 3) Not for O.D. 14/16 mm

- 4) Only for O.D. 6 mm
 5) Only for O.D. 4/6/8/10 mm
 6) Only for O.D. 4/6/8 mm

Materials	
Shore hardness	D 55 ±3
Tubing	TPE-A
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Plastic tubing PAN

Technical data



Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2.9	12	18	0.006	Silver	152697	PAN-4x0,75-SI	50
					Silver	553888	PAN-4x0,75-SI-500	500
					Blue	553906	PAN-4x0,75-BL	50
					Blue	553894	PAN-4x0,75-BL-500	500
					Black	553912	PAN-4x0,75-SW	50
					Black	553900	PAN-4x0,75-SW-500	500
					Natural	546284	PAN-4x0,75-NT	50
					Green	553918	PAN-4x0,75-GN	50
					Red	553924	PAN-4x0,75-RT	50
					Yellow	553930	PAN-4x0,75-GE	50
6	4	14	32	0.016	Silver	152699	PAN-6x1-SI	50
					Silver	553889	PAN-6x1-SI-500	500
					Blue	553907	PAN-6x1-BL	50
					Blue	553895	PAN-6x1-BL-500	500
					Black	553913	PAN-6x1-SW	50
					Black	553901	PAN-6x1-SW-500	500
					Natural	546285	PAN-6x1-NT	50
					Green	553919	PAN-6x1-GN	50
					Red	553925	PAN-6x1-RT	50
					Yellow	553931	PAN-6x1-GE	50
8	5.9	22	43	0.024	Silver	152700	PAN-8x1,25-SI	50
					Silver	553890	PAN-8x1,25-SI-400	400
					Blue	553908	PAN-8x1,25-BL	50
					Blue	553896	PAN-8x1,25-BL-400	400
					Black	553914	PAN-8x1,25-SW	50
					Black	553902	PAN-8x1,25-SW-400	400
					Natural	546286	PAN-8x1,25-NT	50
					Green	553920	PAN-8x1,25-GN	50
					Red	553926	PAN-8x1,25-RT	50
					Yellow	553932	PAN-8x1,25-GE	50
10	7	27	58	0.042	Silver	152701	PAN-10x1,5-SI	50
					Silver	553891	PAN-10x1,5-SI-300	300
					Blue	553909	PAN-10x1,5-BL	50
					Blue	553897	PAN-10x1,5-BL-300	300
					Black	553915	PAN-10x1,5-SW	50
					Black	553903	PAN-10x1,5-SW-300	300
					Natural	546287	PAN-10x1,5-NT	50
					Green	553921	PAN-10x1,5-GN	50
					Red	553927	PAN-10x1,5-RT	50
					Yellow	553933	PAN-10x1,5-GE	50

1) Packaging unit

Plastic tubing PAN

Technical data



Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
12	8.4	29	64	0.060	Silver	152702	PAN-12x1,75-SI	50
					Silver	553892	PAN-12x1,75-SI-200	200
					Blue	553910	PAN-12x1,75-BL	50
					Blue	553898	PAN-12x1,75-BL-200	200
					Black	553916	PAN-12x1,75-SW	50
					Black	553904	PAN-12x1,75-SW-200	200
					Natural	546288	PAN-12x1,75-NT	50
					Green	553922	PAN-12x1,75-GN	50
					Red	553928	PAN-12x1,75-RT	50
					Yellow	553934	PAN-12x1,75-GE	50
14	10	50	80	0.077	Silver	570392	PAN-14x2-SI	50
16	12	67	94	0.092	Silver	152703	PAN-16x2-SI	50
					Silver	553893	PAN-16x2-SI-100	100
					Blue	553911	PAN-16x2-BL	50
					Blue	553899	PAN-16x2-BL-100	100
					Black	553917	PAN-16x2-SW	50
					Black	553905	PAN-16x2-SW-100	100
					Natural	546289	PAN-16x2-NT	50
					Green	553923	PAN-16x2-GN	50
					Red	553929	PAN-16x2-RT	50
					Yellow	553935	PAN-16x2-GE	50

1) Packaging unit

Plastic tubing PAN-R

Technical data

FESTO

Plastic tubing PAN-R


With tubing outside diameters of
4 ... 16 mm

For high-pressure applications.



Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +35 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:]
Ambient temperature	[°C]	−30 ... +80
Approval		German Technical Control Board (TÜV)

Operating pressure p as a function of temperature t

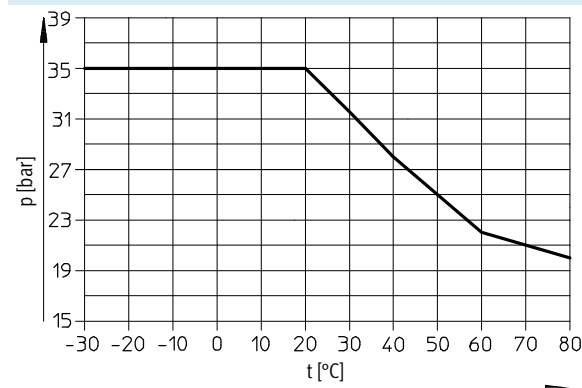

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting NPQH ¹⁾	npqh
	Very suitable	
	– Push-in fitting QS	qs
	– Push-in fitting QS-B	qs-b
	– Push-in fitting CRQS	crqs
	– Push-in fitting NPQP ¹⁾	npqp
	– Push-in fitting NPQM ¹⁾	npqm
	– Click fitting NPKA ²⁾	npka
	Limited suitable	
	– Push-in fitting QS-V0 ¹⁾	qs-v0

1) Not for O.D. 16 mm

2) Only for O.D. 6 mm

Materials	
Shore hardness	D 62 ±3
Tubing	TPE-A
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2.5	7	16	0.0079	Silver	541674	PAN-R-4x0,75-SI	50
6	3.8	12	21	0.0174		541675	PAN-R-6x1,1-SI	50
8	5	16	29	0.0316		541676	PAN-R-8x1,5-SI	50
10	6.2	18	44	0.0498		541677	PAN-R-10x1,9-SI	50
12	7.6	24	46	0.0698		541678	PAN-R-12x2,2-SI	50
16	10	33	73	0.1262		541679	PAN-R-16x3-SI	50

1) Packaging unit

Plastic tubing PAN-R

Technical data

Plastic tubing PAN-R

With tubing outside diameters of 22 and 28 mm


High thermal and mechanical load capacities.



Operating and environmental conditions

Temperature dependent operating pressure	[bar]	−0.95 ... +14 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:-]
Ambient temperature	[°C]	−30 ... +80

Operating pressure p as a function of temperature t

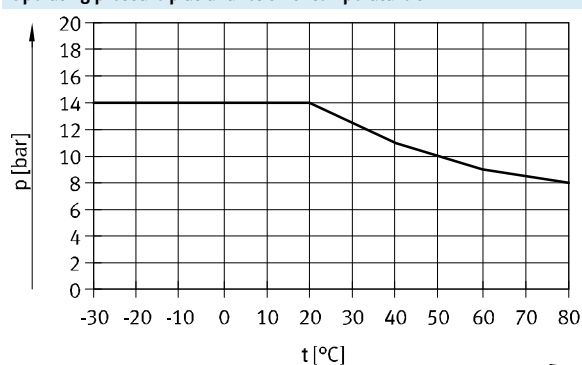

Accessories

Type		→ Internet
	Recommended fitting	
	– Push-in fitting QS-G $\frac{3}{4}$ -22	qs
	– Push-in fitting CQ-...-22/28	cq
	Pipe cutter ZR	tool



Note

When using the pipe cutter ZR to cut to length, we recommend rotating the tube through approx. 90° at the start of the cutting process. Rotating the

tube gives a drawing cut so that the tube can be cut with a significantly lower force. This also minimises deformation of the tube.

Materials

Shore hardness	D 62 ±3
Tubing	TPE-A
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Dimensions and ordering data

O.D.	I.D.	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[kg/m]				[m]
22	18	350	1.31	Black	8036207	PAN-R-22x2-SW	50
28	23	350	2.07		8036208	PAN-R-28x2,5-SW	50

1) Packaging unit

Plastic tubing PAN-MF

Technical data

FESTO


Plastic tubing PAN-MF

High thermal and mechanical load capacities.
Meets the requirements according to DIN 73378 "Polyamide tubing for use in motor vehicles".



Operating and environmental conditions					
Type	PAN-MF-4	PAN-MF-6	PAN-MF-8/10/12	PAN-MF-14	PAN-MF-16
Temperature dependent operating pressure [bar]	-0.95 ... +31 → diagram	-0.95 ... +27 → diagram	-0.95 ... +19 → diagram	-0.95 ... +22 → diagram	-0.95 ... +19 → diagram
Conforms to standard	DIN 73378-PA12-PHL				
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:-:-] Mineral oil				
Ambient temperature [°C]	-60 ... +100				

Operating pressure p as a function of temperature t

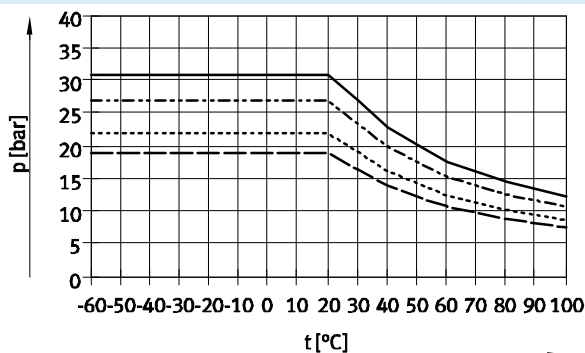

- PAN-MF-4
- PAN-MF-6
- PAN-MF-8/10/12/16
- PAN-MF-14

Accessories

Type	→ Internet	
	Very suitable	
	- Push-in fitting QS ¹⁾	qs
	- Push-in fitting QS-B ¹⁾	qs-b
	- Push-in fitting CRQS ¹⁾	crqs
	- Push-in fitting NPQH ²⁾	npqh
	- Push-in fitting NPQP ³⁾	npqp
	- Push-in fitting NPQM ²⁾	npqm
	Limited suitable	
	- Push-in fitting QS-V0 ³⁾	qs-v0

- 1) Not for O.D. 14 mm
2) Not for O.D. 16 mm

- 3) Not for O.D. 14/16 mm

Materials	
Shore hardness	D 65 ±3
Tubing	PA12-P
Note on materials	Conforms to RoHS Free of copper and PTFE

Plastic tubing PAN-MF

Technical data



Dimensions and ordering data									
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾	
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]	
4	2.5	10	15	0.008	Black	570357	PAN-MF-4x0,75-SW	50	
						572091	PAN-MF-4x0,75-SW-500	500	
6	4	15	35	0.016		570358	PAN-MF-6x1-SW	50	
						572093	PAN-MF-6x1-SW-500	500	
8	6	35	50	0.022		570359	PAN-MF-8x1-SW	50	
10	7.5	45	65	0.035		570360	PAN-MF-10x1,25-SW	50	
12	9	50	70	0.051		570361	PAN-MF-12x1,5-SW	50	
14	10	50	75	0.077		570362	PAN-MF-14x2-SW	50	
16	12	75	130	0.09		570363	PAN-MF-16x2-SW	50	

1) Packaging unit

Plastic tubing PAN-V0, flame retardant

Technical data

FESTO

Plastic tubing PAN-V0

PVC casing, flame-retardant. The tube casing must be cut to length X (table → 15) before being inserted in the push-in fitting QS-V0. The tubing cut-


ter PAN-V0S is the perfect tool for this task. The tubing cutter PAN-V0S will always cut the casing to the right length.



Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	–0.95 ... +12 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:-]
		Mineral oil
		Water as per manufacturer's declaration ¹⁾
Ambient temperature	[°C]	–30 ... +90
Material fire test		UL94 V-0 (casing)

1) Additional information www.festo.com/sp → Certificates.

Operating pressure p as a function of temperature t

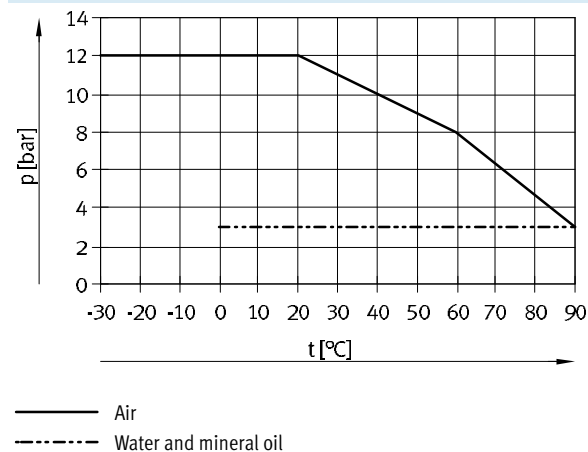

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting QS-V0	qs-v0
	Limited suitable	
	– Push-in fitting QS	qs
	– Push-in fitting QS-B	qs-b
	– Push-in fitting CRQS	crqs
	– Push-in fitting NPQH	npqh
	– Push-in fitting NPQP	npqp
	– Push-in fitting NPQM	npqm
	Tubing cutter PAN-V0S	tool

Materials		
Shore hardness	Outer tubing	A 72 ±4
	Inner tubing	D 57 ±3
Tubing	Outer tubing	PVC-P
	Inner tubing	PA12-P
Note on materials		Conforms to RoHS

Plastic tubing PAN-V0, flame retardant

FESTO

Technical data

Dimensions and ordering data										
For push-in fitting	O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Max. cut length X	Weight	Colour	Part No.	Type	PU ¹⁾
O.D. [mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	6	2.5	10	20	15	0.0335	Blue	132899	PAN-V0-4x0,75-BL	50
6	8	4	13	30	17	0.049	Black	160550	PAN-V0-6x1-SW	50
							Blue	525466	PAN-V0-6x1-BL-20	20
							Green	525470	PAN-V0-6x1-GN	50
							Red	525474	PAN-V0-6x1-RT	50
							White	525478	PAN-V0-6x1-WS	50
							Yellow	525482	PAN-V0-6x1-GE	50
							Brown	525486	PAN-V0-6x1-BR-20	20
8	10	6	24	45	18	0.065	Black	160551	PAN-V0-8x1-SW	50
							Blue	525467	PAN-V0-8x1-BL-20	20
							Green	525471	PAN-V0-8x1-GN	50
							Red	525475	PAN-V0-8x1-RT	50
							White	525479	PAN-V0-8x1-WS	50
							Yellow	525483	PAN-V0-8x1-GE	50
							Brown	525487	PAN-V0-8x1-BR-20	20
10	12	7.5	34	56	20	0.088	Black	160552	PAN-V0-10x1,25-SW	50
							Blue	525468	PAN-V0-10x1,25-BL-20	20
							Green	525472	PAN-V0-10x1,25-GN	50
							Red	525476	PAN-V0-10x1,25-RT	50
							White	525480	PAN-V0-10x1,25-WS	50
							Yellow	525484	PAN-V0-10x1,25-GE	50
							Brown	525488	PAN-V0-10x1,25-BR-20	20
12	14	9	43	65	23	0.133	Black	160553	PAN-V0-12x1,5-SW	50
							Blue	525469	PAN-V0-12x1,5-BL	50
							Green	525473	PAN-V0-12x1,5-GN	50
							Red	525477	PAN-V0-12x1,5-RT	50
							White	525481	PAN-V0-12x1,5-WS	50
							Yellow	525485	PAN-V0-12x1,5-GE	50
							Brown	525489	PAN-V0-12x1,5-BR-20	20

1) Packaging unit

Plastic tubing PAN

Ordering data – Modular products

FESTO

Ordering table (minimum order quantity 3,000 m, rounding-off value 25 m)										
Size	4	6	8	10	12	14	16	Condi- tions	Code	Enter code
M Module No.	553610									
Function	Polyamide tubing, standard O.D.								PAN	PAN
O Alternative material characteristic	Standard									
	Automotive certification (DIN 73378)								-MF	
	Heavy-duty								-R	
M Tubing O.D. [mm]	4	–	–	–	–	–	–		-4	
	–	6	–	–	–	–	–		-6	
	–	–	8	–	–	–	–		-8	
	–	–	–	10	–	–	–		-10	
	–	–	–	–	12	–	–		-12	
	–	–	–	–	–	14	–		-14	
	–	–	–	–	–	–	16		-16	
	Colour									
	Silver								-SI	
	Blue								-BL	
	Black								-SW	
	Yellow								-GE	
	Green								-GN	
	Red								-RT	
	Brown								-BR	
	White								-WS	
	Natural								-NT	
O Inscription text (on request)	Standard									
	Customer-specific tubing inscription							1	-TXT	
M Packaging unit [m]	25								-25	
	50								-50	
	100								-100	
	200								-200	
	300					–	–		-300	
	400				–	–	–		-400	
	500	–	–	–	–	–	–		-500	
	Packaging	Cardboard box						2 4	-CB	
		Polyurethane bag						2 5	-BA	
		Reel						3	-HA	

- 1** **TXT** Only on request
2 **CB, BA** Only with packaging unit 25, 50
3 **HA** Not with packaging unit 25, 50

- 4** **CB** Not with alternative material characteristic MF
5 **BA** Only with alternative material characteristic MF

Transfer order code

553610 PAN – – – – –

Plastic tubing PFAN

Technical data

FESTO

Plastic tubing PFAN


Pneumatic tubing with resistance to high temperatures and chemicals.



Operating and environmental conditions		
Type	PFAN-4/8	PFAN-6/10/12
Temperature dependent operating pressure [bar]	-0.95 ... +15 → diagram	-0.95 ... +16 → diagram
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:-:-] Water as per manufacturer's declaration ¹⁾	
Ambient temperature [°C]	-20 ... +150	
Food-safe ¹⁾	See supplementary material information	
Material fire test	UL94 V-0	
Approval	German Technical Control Board (TÜV)	

1) Additional information www.festo.com/sp → Certificates.

Operating pressure p as a function of temperature t

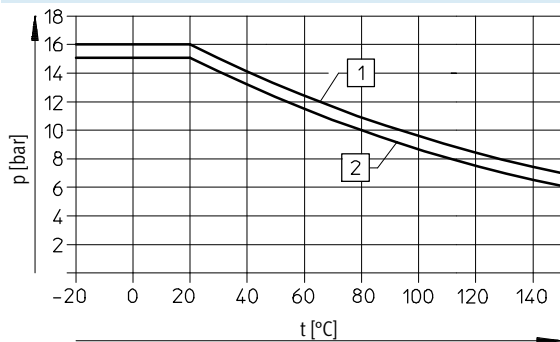

- 1 PFAN-6/10/12
2 PFAN-4/8

Accessories

Type	→ Internet	
	Recommended fitting	
	- Push-in fitting CRQS	crqs
	- Push-in fitting NPQH	npqh
	- Push-in fitting NPQP	npqp
	- Fitting NPCK ¹⁾	npck
Very suitable		
- Push-in fitting QS		qs
- Push-in fitting QS-B		qs-b
- Push-in fitting NPQM		npqm
- Click fitting NPKA ²⁾		npka
- Quick connector CK ³⁾		ck
- Barbed fitting CN ³⁾		cn
Limited suitable		
- Push-in fitting QS-V0		qs-v0

- 1) Only for O.D. 4/6/8/10 mm
2) Only for O.D. 6 mm

- 3) Only for O.D. 4/6/8 mm



Note

Greater force is required when assembling the fittings CK/CN. Flaring the tube ends using a tapered mandrel makes pushing them on easier.

Materials	
Shore hardness	D 60 +5
Tubing	PFA
Note on materials	Conforms to RoHS

Plastic tubing PFAN

Technical data



Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2.9	11	37	0.012	Natural	197061	PFAN-4x0,75-NT	50
6	4	12	50	0.034		197062	PFAN-6x1-NT	50
8	5.9	25	110	0.049		197063	PFAN-8x1,25-NT	50
10	7	22	140	0.087		197064	PFAN-10x1,5-NT	50
12	8.4	29	165	0.125		197065	PFAN-12x1,75-NT	50

1) Packaging unit

Plastic tubing PEN

Technical data

FESTO


Plastic tubing PEN

Polyethylene tubing is distinguished by its high resistance to chemicals and hydrolysis. It is also resistant to most cleaning agents and lubricants.



Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +10 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:] Water as per manufacturer's declaration → www.festo.com
Ambient temperature	[°C]	−30 ... +60
Approval		German Technical Control Board (TÜV)

Operating pressure p as a function of temperature t

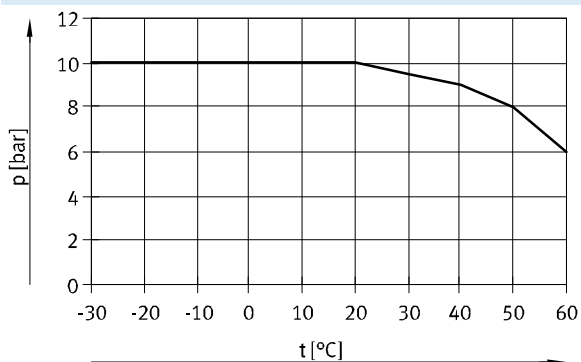

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting QS-B ¹⁾	qs-b
	– Push-in fitting NPQM ²⁾	npqm
	Very suitable	
	– Push-in fitting QS ¹⁾	qs
	– Push-in fitting CRQS ¹⁾	crqs
	– Push-in fitting NPQH ²⁾	npqh
	– Push-in fitting NPQP ³⁾	npqp
	– Click fitting NPKA ⁴⁾	npka
	– Fitting NPCK ⁵⁾	npck
	– Quick connector CK ⁶⁾	ck
	– Barbed fitting CN ⁶⁾	cn
	Limited suitable	
	– Push-in fitting QS-V0 ³⁾	qs-v0

- 1) Not for O.D. 14 mm
2) Not for O.D. 16 mm
3) Not for O.D. 14/16 mm

- 4) Only for O.D. 6 mm
5) Only for O.D. 4/6/8/10 mm
6) Only for O.D. 4/6/8 mm



Note

Greater force is required when assembling the fittings CK/CN.

Materials	
Shore hardness	D 52 ±3
Tubing	PE
Note on materials	Conforms to RoHS Free of copper and PTFE

Plastic tubing PEN

Technical data

FESTO

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2.7	10	20	0.0064	Black	543240	PEN-4x0,75-SW	50
					Black	551438	PEN-4x0,75-SW-500	500
					Blue	551456	PEN-4x0,75-BL	50
					Blue	551444	PEN-4x0,75-BL-500	500
					Silver	551462	PEN-4x0,75-SI	50
					Silver	551450	PEN-4x0,75-SI-500	500
					Natural	543246	PEN-4x0,75-NT	50
					Green	551468	PEN-4x0,75-GN	50
					Red	551474	PEN-4x0,75-RT	50
					Yellow	551480	PEN-4x0,75-GE	50
6	4	13.5	26	0.0148	Black	543241	PEN-6x1-SW	50
					Black	551439	PEN-6x1-SW-500	500
					Blue	551457	PEN-6x1-BL	50
					Blue	551445	PEN-6x1-BL-500	500
					Silver	551463	PEN-6x1-SI	50
					Silver	551451	PEN-6x1-SI-500	500
					Natural	543247	PEN-6x1-NT	50
					Green	551469	PEN-6x1-GN	50
					Red	551475	PEN-6x1-RT	50
					Yellow	551481	PEN-6x1-GE	50
8	5.7	22.5	35	0.0233	Black	543242	PEN-8x1,25-SW	50
					Black	551440	PEN-8x1,25-SW-400	400
					Blue	551458	PEN-8x1,25-BL	50
					Blue	551446	PEN-8x1,25-BL-400	400
					Silver	551464	PEN-8x1,25-SI	50
					Silver	551452	PEN-8x1,25-SI-400	400
					Natural	543248	PEN-8x1,25-NT	50
					Green	551470	PEN-8x1,25-GN	50
					Red	551476	PEN-8x1,25-RT	50
					Yellow	551482	PEN-8x1,25-GE	50
10	7	23.5	40	0.0377	Black	543243	PEN-10x1,5-SW	50
					Black	551441	PEN-10x1,5-SW-300	300
					Blue	551459	PEN-10x1,5-BL	50
					Blue	551447	PEN-10x1,5-BL-300	300
					Silver	551465	PEN-10x1,5-SI	50
					Silver	551453	PEN-10x1,5-SI-300	300
					Natural	543249	PEN-10x1,5-NT	50
					Green	551471	PEN-10x1,5-GN	50
					Red	551477	PEN-10x1,5-RT	50
					Yellow	551483	PEN-10x1,5-GE	50
12	8.4	33	58	0.0542	Black	543244	PEN-12x1,75-SW	50
					Black	551442	PEN-12x1,75-SW-200	200
					Blue	551460	PEN-12x1,75-BL	50
					Blue	551448	PEN-12x1,75-BL-200	200
					Silver	551466	PEN-12x1,75-SI	50
					Silver	551454	PEN-12x1,75-SI-200	200
					Natural	543250	PEN-12x1,75-NT	50
					Green	551472	PEN-12x1,75-GN	50
					Red	551478	PEN-12x1,75-RT	50
					Yellow	551484	PEN-12x1,75-GE	50

1) Packaging unit

Plastic tubing PEN

Technical data



Dimensions and ordering data								
O.D. [mm]	I.D. [mm]	Min. bending radius [mm]	Flow-relevant bending radius [mm]	Weight [kg/m]	Colour	Part No.	Type	PU ¹⁾ [m]
14	9.5	45	80	0.0773	Black	570516	PEN-14x2-SW	50
					Natural	570517	PEN-14x2-NT	50
16	10.8	57.5	122	0.1029	Black	543245	PEN-16x2,5-SW	50
					Black	551443	PEN-16x2,5-SW-100	100
					Blue	551461	PEN-16x2,5-BL	50
					Blue	551449	PEN-16x2,5-BL-100	100
					Silver	551467	PEN-16x2,5-SI	50
					Silver	551455	PEN-16x2,5-SI-100	100
					Natural	543251	PEN-16x2,5-NT	50
					Green	551473	PEN-16x2,5-GN	50
					Red	551479	PEN-16x2,5-RT	50
					Yellow	551485	PEN-16x2,5-GE	50

1) Packaging unit

Plastic tubing PEN

Ordering data – Modular products



Ordering table (minimum order quantity 3,000 m, rounding-off value 25 m)										
Size	4	6	8	10	12	14	16	Condi- tions	Code	Enter code
[M] Module No.	553769									
Function	Polyethylene tubing, standard O.D., economical								PEN	PEN
Tubing O.D. [mm]	4	–	–	–	–	–	–		-4	
	–	6	–	–	–	–	–		-6	
	–	–	8	–	–	–	–		-8	
	–	–	–	10	–	–	–		-10	
	–	–	–	–	12	–	–		-12	
	–	–	–	–	–	14	–		-14	
	–	–	–	–	–	–	16		-16	
	–	–	–	–	–	–	–			
Colour	Silver								-SI	
	Blue								-BL	
	Black								-SW	
	Yellow								-GE	
	Green								-GN	
	Red								-RT	
	Brown								-BR	
	White								-WS	
	Natural								-NT	
[O] Inscription text (on request)	Standard									
	Customer-specific tubing inscription							[1]	-TXT	
[M] Packaging unit [m]	25								-25	
	50								-50	
	100								-100	
	200						–		-200	
	300					–	–		-300	
	400				–	–	–		-400	
	500	–	–	–	–	–	–		-500	
Packaging	Cardboard box							[2]	-CB	
	Reel							[3]	-HA	

- [1] TXT** Only on request
[2] CB Only with packaging unit 25, 50

- [3] HA** Not with packaging unit 25, 50

Transfer order code

553769 **PEN** – – – – –

Plastic tubing PLN

Technical data

FESTO

Plastic tubing PLN


Polyethylene tubing is distinguished by great resistance to chemicals and hydrolysis. It is resistant to most cleaning agents and lubricants.



Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +14 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:] Water as per manufacturer's declaration ¹⁾
Ambient temperature	[°C]	−30 ... +80
Food-safe ¹⁾		See supplementary material information
Approval		German Technical Control Board (TÜV)

1) Additional information www.festo.com/sp → Certificates.

Operating pressure p as a function of temperature t

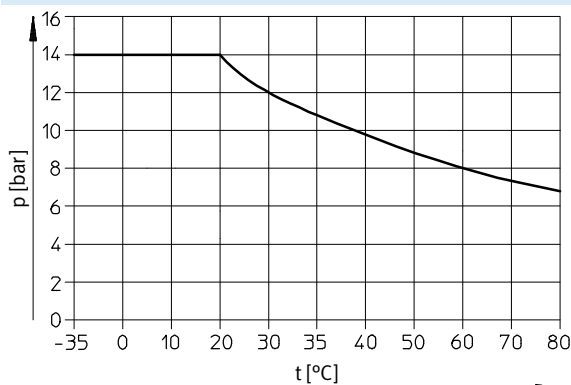

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting NPQP ¹⁾	npqp
	Very suitable	
	– Push-in fitting QS ²⁾	qs
	– Push-in fitting QS-B ²⁾	qs-b
	– Push-in fitting CRQS ²⁾	crqs
	– Push-in fitting NPQH ³⁾	npqh
	– Push-in fitting NPQM ³⁾	npqm
	– Click fitting NPKA ⁴⁾	npka
	– Fitting NPCK ⁵⁾	npck
	– Quick connector CK ⁶⁾	ck
	Limited suitable	
	– Push-in fitting QS-V0 ¹⁾	qs-v0
	– Barbed fitting CN ⁶⁾	cn

1) Not for O.D. 14/16 mm

2) Not for O.D. 14 mm

3) Not for O.D. 16 mm

4) Only for O.D. 6 mm

5) Only for O.D. 4/6/8/10 mm

6) Only for O.D. 4/6/8 mm



Note

Greater force is required when assembling the fittings CK/CN. Flaring the tube ends using a tapered mandrel makes pushing them on easier.

Materials	
Tubing	PE
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Plastic tubing PLN

Technical data



Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2.9	12	25	0.0056	Natural	193403	PLN-4x0,75-NT	50
					Black	195280	PLN-4x0,75-SW	50
					Blue	558205	PLN-4x0,75-BL	50
					Silver	558211	PLN-4x0,75-SI	50
					Red	558217	PLN-4x0,75-RT	50
6	4	11	32	0.0147	Natural	193404	PLN-6x1-NT	50
					Black	195281	PLN-6x1-SW	50
					Blue	558206	PLN-6x1-BL	50
					Silver	558212	PLN-6x1-SI	50
					Red	558218	PLN-6x1-RT	50
8	5.9	23	50	0.0214	Natural	193405	PLN-8x1,25-NT	50
					Black	195282	PLN-8x1,25-SW	50
					Blue	558207	PLN-8x1,25-BL	50
					Silver	558213	PLN-8x1,25-SI	50
					Red	558219	PLN-8x1,25-RT	50
10	7	22	57	0.0375	Natural	193406	PLN-10x1,5-NT	50
					Black	195283	PLN-10x1,5-SW	50
					Blue	558208	PLN-10x1,5-BL	50
					Silver	558214	PLN-10x1,5-SI	50
					Red	558220	PLN-10x1,5-RT	50
12	8.4	23	65	0.0540	Natural	193407	PLN-12x1,75-NT	50
					Black	195284	PLN-12x1,75-SW	50
					Blue	558209	PLN-12x1,75-BL	50
					Silver	558215	PLN-12x1,75-SI	50
					Red	558221	PLN-12x1,75-RT	50
14	10	40	80	0.07	Natural	570424	PLN-14x2-NT	50
					Black	570423	PLN-14x2-SW	50
16	12	55	95	0.0820	Natural	539064	PLN-16x2-NT	50
					Black	539065	PLN-16x2-SW	50
					Blue	558210	PLN-16x2-BL	50
					Silver	558216	PLN-16x2-SI	50
					Red	558222	PLN-16x2-RT	50

1) Packaging unit

Plastic tubing PLN

Ordering data – Modular products

FESTO

Ordering table (minimum order quantity 3,000 m, rounding-off value 25 m)										
Size	4	6	8	10	12	14	16	Condi- tions	Code	Enter code
[M] Module No.	553850									
Function	Polyethylene tubing, standard O.D., resistant to cleaning agents								PLN	PLN
Tubing O.D. [mm]	4	–	–	–	–	–	–		-4	
	–	6	–	–	–	–	–		-6	
	–	–	8	–	–	–	–		-8	
	–	–	–	10	–	–	–		-10	
	–	–	–	–	12	–	–		-12	
	–	–	–	–	–	14	–		-14	
	–	–	–	–	–	–	16		-16	
	–	–	–	–	–	–	–			
Colour	Silver								-SI	
	Blue								-BL	
	Black								-SW	
	Yellow								-GE	
	Green								-GN	
	Red								-RT	
	Brown								-BR	
	White								-WS	
	Natural								-NT	
[O] Inscription text (on request)	Standard									
	Customer-specific tubing inscription							[1]	-TXT	
[M] Packaging unit [m]	25								-25	
	50								-50	
	100								-100	
	200					–	–		-200	
	300				–	–	–		-300	
	400			–	–	–	–		-400	
	500	–	–	–	–	–	–		-500	
Packaging	Cardboard box							[2]	-CB	
	Reel							[3]	-HA	

- [1] TXT** Only on request
[2] CB Only with packaging unit 25, 50

- [3] HA** Not with packaging unit 25, 50

Transfer order code

553850 **PLN** – [] – [] – [] – [] – []


Plastic tubing PUN

Technical data

FESTO


Plastic tubing PUN

Highly flexible plastic tubing

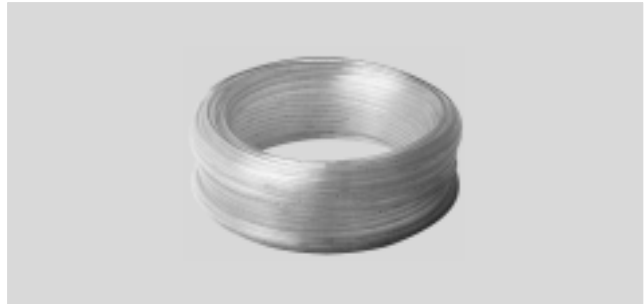

Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +10 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:-]
Ambient temperature	[°C]	−35 ... +60
Material fire test		UL94 HB
Approval		German Technical Control Board (TÜV)

Operating pressure p as a function of temperature t

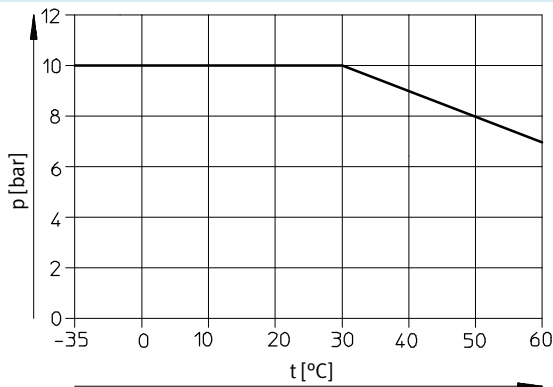

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting QS ¹⁾	qs
	Very suitable	
	– Push-in fitting QS-B ¹⁾	qs-b
	– Push-in fitting CRQS ³⁾	crqs
	– Push-in fitting NPQH ²⁾	npqh
	– Push-in fitting NPQP ⁴⁾	npqp
	– Push-in fitting NPQM ²⁾	npqm
	– Click fitting NPKA ⁵⁾	npka
	– Fitting NPCK ⁶⁾	npck
	– Quick connector CK ⁷⁾	ck
	– Barbed fitting CN ⁸⁾	cn
	Limited suitable	
	– Push-in fitting QS-V0 ⁴⁾	qs-v0

- 1) Not for O.D. 14 mm
- 2) Not for O.D. 3/16 mm
- 3) Not for O.D. 3/14 mm
- 4) Not for O.D. 3/14/16 mm

- 5) Only for O.D. 6 mm
- 6) Only for O.D. 4/6/8/10 mm
- 7) Only for O.D. 4/6/8 mm
- 8) Only for O.D. 3/4/6/8 mm



Note

Greater force is required when assembling the fittings CK/CN. Flaring the tube ends using a tapered mandrel makes pushing them on easier.

Materials	
Shore hardness	D 52 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Plastic tubing PUN

Technical data

FESTO

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
3.0	2.1	9	12	0.0044	Silver	152583	PUN-3x0,5-SI	50
					Silver	525738	PUN-3 x 0,5-SI-500	500
					Blue	159660	PUN-3x0,5-BL	50
					Blue	525745	PUN-3x0,5-BL-500	500
					Black	159661	PUN-3x0,5-SW	50
					Black	553936	PUN-3x0,5-SW-500	500
					Yellow	178416	PUN-3x0,5-GE	50
					Green	178423	PUN-3x0,5-GN	50
					Red	178409	PUN-3x0,5-RT	50
4.0	2.6	8	17	0.0089	Silver	152584	PUN-4x0,75-SI	50
					Silver	525739	PUN-4x0,75-SI-500	500
					Blue	159662	PUN-4x0,75-BL	50
					Blue	525746	PUN-4x0,75-BL-500	500
					Black	159663	PUN-4x0,75-SW	50
					Black	553937	PUN-4x0,75-SW-500	500
					Yellow	178417	PUN-4x0,75-GE	50
					Green	178424	PUN-4x0,75-GN	50
					Red	178410	PUN-4x0,75-RT	50
6.0	4.0	16	26.5	0.0192	Silver	152586	PUN-6x1-SI	50
					Silver	525740	PUN-6x1-SI-500	500
					Blue	159664	PUN-6x1-BL	50
					Blue	525747	PUN-6x1-BL-500	500
					Black	159665	PUN-6x1-SW	50
					Black	553938	PUN-6x1-SW-500	500
					Yellow	178418	PUN-6x1-GE	50
					Green	178425	PUN-6x1-GN	50
					Red	178411	PUN-6x1-RT	50
8.0	5.7	24	37	0.0302	Silver	152587	PUN-8x1,25-SI	50
					Silver	525741	PUN-8x1,25-SI-400	400
					Blue	159666	PUN-8x1,25-BL	50
					Blue	525748	PUN-8x1,25-BL-400	400
					Black	159667	PUN-8x1,25-SW	50
					Black	553939	PUN-8x1,25-SW-400	400
					Yellow	178419	PUN-8x1,25-GE	50
					Green	178426	PUN-8x1,25-GN	50
					Red	178412	PUN-8x1,25-RT	50
10.0	7.0	28	54	0.0489	Silver	152588	PUN-10x1,5-SI	50
					Silver	525742	PUN-10x1,5-SI-300	300
					Blue	159668	PUN-10x1,5-BL	50
					Blue	525749	PUN-10x1,5-BL-300	300
					Black	159669	PUN-10x1,5-SW	50
					Black	553940	PUN-10x1,5-SW-300	300
					Yellow	178420	PUN-10x1,5-GE	50
					Green	178427	PUN-10x1,5-GN	50
					Red	178413	PUN-10x1,5-RT	50

1) Packaging unit

Plastic tubing PUN

Technical data



Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
12.0	8.0	33	62	0.0767	Silver	152589	PUN-12x2-SI	50
					Silver	525743	PUN-12x2-SI-200	200
					Blue	159670	PUN-12x2-BL	50
					Blue	525750	PUN-12x2-BL-200	200
					Black	159671	PUN-12x2-SW	50
					Black	553941	PUN-12x2-SW-200	200
					Yellow	178421	PUN-12x2-GE	50
					Green	178428	PUN-12x2-GN	50
					Red	178414	PUN-12x2-RT	50
14.0	9.8	45	84	0.0949	Silver	570389	PUN-14x2-SI	50
					Blue	570390	PUN-14x2-BL	50
					Black	570391	PUN-14x2-SW	50
16.0	11.0	45	88	0.1294	Silver	152590	PUN-16x2,5-SI	50
					Silver	525744	PUN-16x2,5-SI-100	100
					Blue	159672	PUN-16x2,5-BL	50
					Blue	525751	PUN-16x2,5-BL-100	100
					Black	159673	PUN-16x2,5-SW	50
					Black	553942	PUN-16x2,5-SW-100	100
					Yellow	178422	PUN-16x2,5-GE	50
					Green	178429	PUN-16x2,5-GN	50
					Red	178415	PUN-16x2,5-RT	50

1) Packaging unit

Plastic tubing PUN-DUO

Technical data

FESTO


DUO tubing PUN-DUO

Highly flexible paired plastic tubing distinguished by great resistance to abrasion and kinks. Two lengths of tubing are fused together into a tubing pair. For fitting, the paired tubing is separated as required at both ends.



Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +10 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:-]
Ambient temperature	[°C]	−35 ... +60
Material fire test		UL94 HB
Approval		German Technical Control Board (TÜV)

Operating pressure p as a function of temperature t

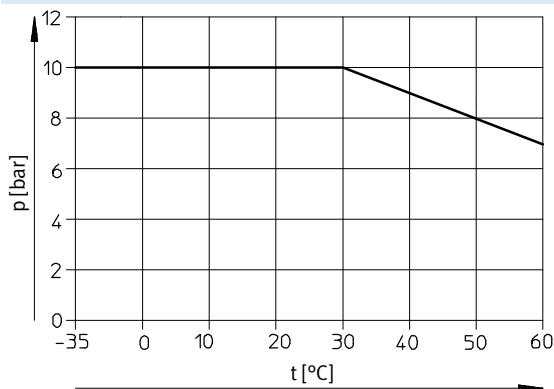

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting QS	qs
	Very suitable	
	– Push-in fitting QS-B	qs-b
	– Push-in fitting CRQS	crqs
	– Push-in fitting NPQH	npqh
	– Push-in fitting NPQP	npqp
	– Push-in fitting NPQM	npqm
	– Click fitting NPKA ¹⁾	npka
	– Fitting NPCK	npck
	– Quick connector CK ²⁾	ck
	– Barbed fitting CN ²⁾	cn
	Limited suitable	
	– Push-in fitting QS-V0	qs-v0

1) Only for O.D. 6 mm

2) Only for O.D. 4/6/8 mm



Note

Greater force is required when assembling the fittings CK/CN. Flaring the tube ends using a tapered mandrel makes pushing them on easier.

Materials	
Shore hardness	D 52 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Plastic tubing PUN-DUO

Technical data



Dimensions and ordering data								
O.D. [mm]	I.D. [mm]	Min. bending radius [mm]	Flow-relevant bending radius [mm]	Weight [kg/m]	Colour	Part No.	Type	PU ¹⁾ [m]
4	2.6	8	17	0.018	Silver	152822	PUN-4x0,75-DUO-SI	50
					Blue/black	159674	PUN-4x0,75-DUO-BS	50
6	4	14	26.5	0.038	Silver	152823	PUN-6x1-DUO-SI	50
					Blue/black	159675	PUN-6x1-DUO-BS	50
8	5.7	20	37	0.060	Silver	152824	PUN-8x1,25-DUO-SI	50
					Blue/black	159676	PUN-8x1,25-DUO-BS	50
10	7	25	54	0.098	Silver	152825	PUN-10x1,5-DUO-SI	50
					Blue/black	159677	PUN-10x1,5-DUO-BS	50

1) Packaging unit

Plastic tubing PUN-CM, antistatic

Technical data

FESTO

Plastic tubing PUN-CM


Highly flexible plastic tubing,
electrically conductive.



Operating and environmental conditions

Temperature dependent operating pressure	[bar]	−0.95 ... +10 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--]
Ambient temperature	[°C]	−35 ... +60
Surface resistance	[Ω]	10 ⁴ ... 10 ⁷

Operating pressure p as a function of temperature t

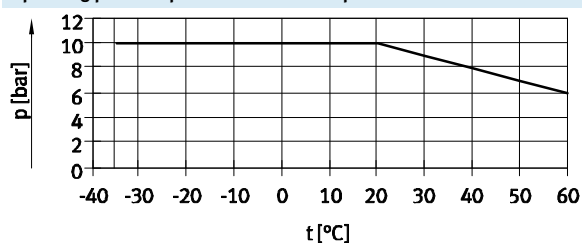

Accessories

Type	➔ Internet	
	Recommended fitting	
	– Push-in fitting NPQM	npqm
	Very suitable	
	– Push-in fitting NPQH	npqh
	– Fitting NPCK ¹⁾	npck
	Limited suitable	
	– Push-in fitting QS	qs
	– Push-in fitting QS-B	qs-b
	– Push-in fitting CRQS	crqs
	– Push-in fitting QS-V0	qs-v0
	– Push-in fitting NPQP	npqp
	– Click fitting NPKA ²⁾	npka
	– Quick connector CK ³⁾	ck
	– Barbed fitting CN ³⁾	cn

- 1) Only for O.D. 4/6/8/10 mm
2) Only for O.D. 6 mm

- 3) Only for O.D. 4/6/8 mm

Materials

Shore hardness	D 52 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Dimensions and ordering data

O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2.5	5	17	0.0089	Black	188882	PUN-CM-4-SW	50
6	4	13	26.5	0.0192		188883	PUN-CM-6-SW	50
8	5.5	14	37	0.0368		130816	PUN-CM-8-SW	50
10	7	19	54	0.0544		130817	PUN-CM-10-SW	50
12	8	22	70	0.0754		130818	PUN-CM-12-SW	50

1) Packaging unit


Plastic tubing PUN-H, hydrolysis resistant

Technical data

FESTO

Plastic tubing PUN-H


With tubing outside diameter of 2 mm

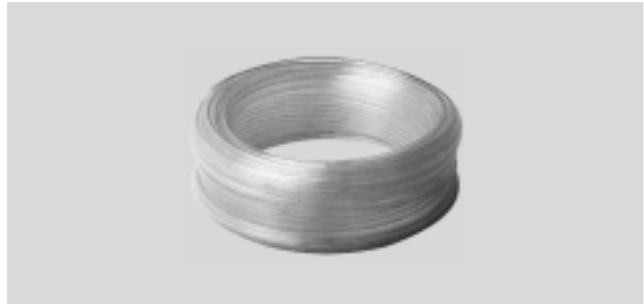

Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +10 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:-]
Ambient temperature	[°C]	−35 ... +60
Food-safe ¹⁾		See supplementary material information

1) Additional information www.festo.com/sp → Certificates.

Operating pressure p as a function of temperature t

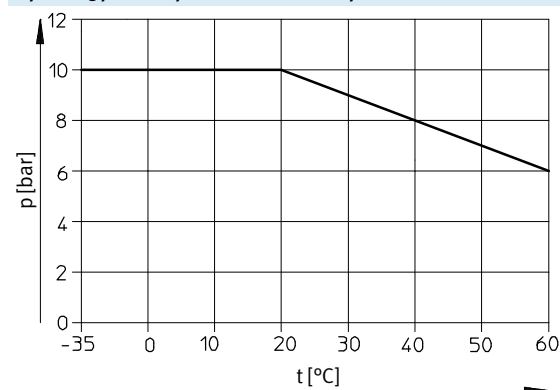

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting QSM, mini	qsm

Materials	
Shore hardness	D 52 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
2	1.2	5	8	0.0024	Natural	133038	PUN-H-2x0,4-NT	50
					Black	133039	PUN-H-2x0,4-SW	50
					Red	133040	PUN-H-2x0,4-RT	50

1) Packaging unit

Plastic tubing PUN-H, hydrolysis resistant


Technical data

FESTO

Plastic tubing PUN-H

With tubing outside diameters of


3 ... 16 mm

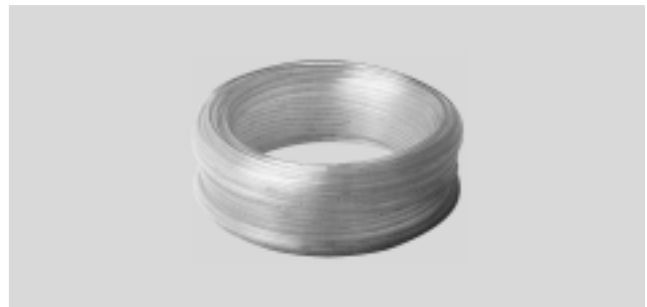

Operating and environmental conditions		
Colour	Natural, blue, black, silver, red, green, yellow	Translucent blue, translucent black, translucent red, translucent green, translucent yellow
Temperature dependent operating pressure [bar]	-0.95 ... +10 → diagram	
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:-:-] Water as per manufacturer's declaration ¹⁾	
Ambient temperature [°C]	-35 ... +60	
Food-safe ¹⁾	See supplementary material information	–
Approval ¹⁾	German Technical Control Board (TÜV)	–

1) Additional information www.festo.com/sp → Certificates.

Operating pressure p as a function of temperature t

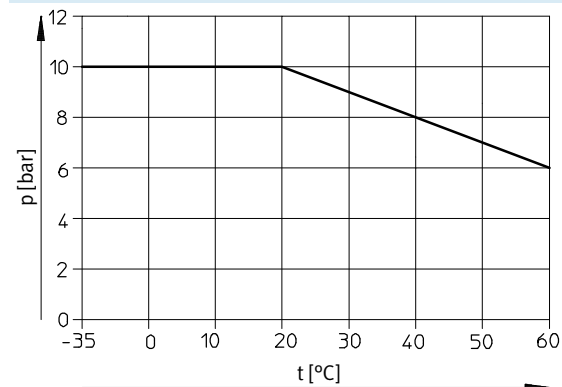

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting QS ¹⁾	qs
	– Push-in fitting NPQH ²⁾	npqh
	– Click fitting NPKA ⁵⁾	npka
	Very suitable	
	– Push-in fitting QS-B ¹⁾	qs-b
	– Push-in fitting CRQS ³⁾	crqs
	– Push-in fitting NPQP ⁴⁾	npqp
	– Push-in fitting NPQM ²⁾	npqm
	– Fitting NPCK ⁶⁾	npck
	– Quick connector CK ⁷⁾	ck
	Limited suitable	
	– Push-in fitting QS-V0 ⁴⁾	qs-v0

1) Not for O.D. 14 mm

2) Not for O.D. 3/16 mm

3) Not for O.D. 3/14 mm

4) Not for O.D. 3/14/16 mm

5) Only for O.D. 6 mm

6) Only for O.D. 4/6/8/10 mm

7) Only for O.D. 4/6/8 mm

Materials	
Shore hardness	D 52 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Plastic tubing PUN-H, hydrolysis resistant

Technical data

FESTO

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
3	2.1	6	12	0.0042	Natural	197375	PUN-H-3x0,5-NT	50
					Natural	558263	PUN-H-3x0,5-NT-500	500
					Blue	197382	PUN-H-3x0,5-BL	50
					Blue	558256	PUN-H-3x0,5 BL-500	500
					Black	197389	PUN-H-3x0,5-SW	50
					Black	558249	PUN-H-3x0,5-SW-500	500
					Silver	558277	PUN-H-3x0,5-SI	50
					Silver	558270	PUN-H-3x0,5-SI-500	500
					Red	558284	PUN-H-3x0,5-RT	50
					Green	558291	PUN-H-3x0,5-GN	50
					Yellow	558298	PUN-H-3x0,5-GE	50
4	2.6	8	16	0.0085	Natural	197376	PUN-H-4x0,75-NT	50
					Natural	558264	PUN-H-4x0,75-NT-500	500
					Blue	197383	PUN-H-4x0,75-BL	50
					Blue	558257	PUN-H-4x0,75-BL-500	500
					Translucent blue	8048671	PUN-H-4x0,75-TBL 	50
					Translucent blue	8048672	PUN-H-4x0,75-TBL-500 	500
					Black	197390	PUN-H-4x0,75-SW	50
					Black	558250	PUN-H-4x0,75-SW-500	500
					Translucent black	8048673	PUN-H-4x0,75-TSW 	50
					Translucent black	8048674	PUN-H-4x0,75-TSW-500 	500
					Silver	558278	PUN-H-4x0,75-SI	50
					Silver	558271	PUN-H-4x0,75-SI-500	500
					Red	558285	PUN-H-4x0,75-RT	50
					Translucent red	8048675	PUN-H-4x0,75-TRT 	50
					Translucent red	8048676	PUN-H-4x0,75-TRT-500 	500
					Green	558292	PUN-H-4x0,75-GN	50
					Translucent green	8048677	PUN-H-4x0,75-TGN 	50
					Translucent green	8048678	PUN-H-4x0,75-TGN-500 	500
					Yellow	558299	PUN-H-4x0,75-GE	50
					Translucent yellow	8048679	PUN-H-4x0,75-TGE 	50
					Translucent yellow	8048680	PUN-H-4x0,75-TGE-500 	500

1) Packaging unit

Plastic tubing PUN-H, hydrolysis resistant

Technical data

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PJ ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
6	4	10	26	0.0183	Natural	197377	PUN-H-6x1-NT	50
					Natural	558265	PUN-H-6x1-NT-500	500
					Blue	197384	PUN-H-6x1-BL	50
					Blue	558258	PUN-H-6x1-BL-500	500
					Translucent blue	8048681	PUN-H-6x1-TBL	50
					Translucent blue	8048682	PUN-H-6x1-TBL-500	500
					Black	197391	PUN-H-6x1-SW	50
					Black	558251	PUN-H-6x1-SW-500	500
					Translucent black	8048683	PUN-H-6x1-TSW	50
					Translucent black	8048684	PUN-H-6x1-TSW-500	500
					Silver	558279	PUN-H-6x1-SI	50
					Silver	558272	PUN-H-6x1-SI-500	500
					Red	558286	PUN-H-6x1-RT	50
					Translucent red	8048685	PUN-H-6x1-TRT	50
					Translucent red	8048686	PUN-H-6x1-TRT-500	500
					Green	558293	PUN-H-6x1-GN	50
					Translucent green	8048687	PUN-H-6x1-TGN	50
					Translucent green	8048688	PUN-H-6x1-TGN-500	500
					Yellow	558300	PUN-H-6x1-GE	50
					Translucent yellow	8048689	PUN-H-6x1-TGE	50
					Translucent yellow	8048690	PUN-H-6x1-TGE-500	500
8	5.7	21	37	0.0287	Natural	197378	PUN-H-8x1,25-NT	50
					Natural	558266	PUN-H-8x1,25-NT-400	400
					Blue	197385	PUN-H-8x1,25-BL	50
					Blue	558259	PUN-H-8x1,25-BL-400	400
					Translucent blue	8048691	PUN-H-8x1,25-TBL	50
					Translucent blue	8048692	PUN-H-8x1,25-TBL-400	400
					Black	197392	PUN-H-8x1,25-SW	50
					Black	558252	PUN-H-8x1,25-SW-400	400
					Translucent black	8048693	PUN-H-8x1,25-TSW	50
					Translucent black	8048694	PUN-H-8x1,25-TSW-400	400
					Silver	558280	PUN-H-8x1,25-SI	50
					Silver	558273	PUN-H-8x1,25-SI-400	400
					Red	558287	PUN-H-8x1,25-RT	50
					Translucent red	8048695	PUN-H-8x1,25-TRT	50
					Translucent red	8048696	PUN-H-8x1,25-TRT-400	400
					Green	558294	PUN-H-8x1,25-GN	50
					Translucent green	8048697	PUN-H-8x1,25-TGN	50
					Translucent green	8048698	PUN-H-8x1,25-TGN-400	400
					Yellow	558301	PUN-H-8x1,25-GE	50
					Translucent yellow	8048699	PUN-H-8x1,25-TGE	50
					Translucent yellow	8048700	PUN-H-8x1,25-TGE-400	400

1) Packaging unit

Plastic tubing PUN-H, hydrolysis resistant

Technical data

FESTO

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PJ ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
10	7	28	52	0.0465	Natural	197379	PUN-H-10x1,5-NT	50
					Natural	558267	PUN-H-10x1,5-NT-300	300
					Blue	197386	PUN-H-10x1,5-BL	50
					Blue	558260	PUN-H-10x1,5-BL-300	300
					Translucent blue	8048701	PUN-H-10x1,5-TBL	50
					Translucent blue	8048702	PUN-H-10x1,5-TBL-300	300
					Black	197393	PUN-H-10x1,5-SW	50
					Black	558253	PUN-H-10x1,5-SW-300	300
					Translucent black	8048703	PUN-H-10x1,5-TSW	50
					Translucent black	8048704	PUN-H-10x1,5-TSW-300	300
					Silver	558281	PUN-H-10x1,5-SI	50
					Silver	558274	PUN-H-10x1,5-SI-300	300
					Red	558288	PUN-H-10x1,5-RT	50
					Translucent red	8048705	PUN-H-10x1,5-TRT	50
					Translucent red	8048706	PUN-H-10x1,5-TRT-300	300
					Green	558295	PUN-H-10x1,5-GN	50
					Translucent green	8048707	PUN-H-10x1,5-TGN	50
					Translucent green	8048708	PUN-H-10x1,5-TGN-300	300
					Yellow	558302	PUN-H-10x1,5-GE	50
					Translucent yellow	8048709	PUN-H-10x1,5-TGE	50
					Translucent yellow	8048710	PUN-H-10x1,5-TGE-300	300
12	8	33	62	0.0729	Natural	197380	PUN-H-12x2-NT	50
					Natural	558268	PUN-H-12x2-NT-200	200
					Blue	197387	PUN-H-12x2-BL	50
					Blue	558261	PUN-H-12x2-BL-200	200
					Translucent blue	8048711	PUN-H-12x2-TBL	50
					Translucent blue	8048712	PUN-H-12x2-TBL-200	200
					Black	197394	PUN-H-12x2-SW	50
					Black	558254	PUN-H-12x2-SW-200	200
					Translucent black	8048713	PUN-H-12x2-TSW	50
					Translucent black	8048714	PUN-H-12x2-TSW-200	200
					Silver	558282	PUN-H-12x2-SI	50
					Silver	558275	PUN-H-12x2-SI-200	200
					Red	558289	PUN-H-12x2-RT	50
					Translucent red	8048715	PUN-H-12x2-TRT	50
					Translucent red	8048716	PUN-H-12x2-TRT-200	200
					Green	558296	PUN-H-12x2-GN	50
					Translucent green	8048717	PUN-H-12x2-TGN	50
					Translucent green	8048718	PUN-H-12x2-TGN-200	200
					Yellow	558303	PUN-H-12x2-GE	50
					Translucent yellow	8048719	PUN-H-12x2-TGE	50
					Translucent yellow	8048720	PUN-H-12x2-TGE-200	200

1) Packaging unit

Plastic tubing PUN-H, hydrolysis resistant

Technical data

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
14	9.8	38	78	0.091	Natural	570388	PUN-H-14x2-NT	50
					Blue	570386	PUN-H-14x2-BL	50
					Black	570387	PUN-H-14x2-SW	50
16	11	38	88	0.123	Natural	197381	PUN-H-16x2,5-NT	50
					Natural	558269	PUN-H-16x2,5-NT-100	100
					Blue	197388	PUN-H-16x2,5-BL	50
					Blue	558262	PUN-H-16x2,5-BL-100	100
					Black	197395	PUN-H-16x2,5-SW	50
					Black	558255	PUN-H-16x2,5-SW-100	100
					Silver	558283	PUN-H-16x2,5-SI	50
					Silver	558276	PUN-H-16x2,5-SI-100	100
					Red	558290	PUN-H-16x2,5-RT	50
					Green	558297	PUN-H-16x2,5-GN	50
					Yellow	558304	PUN-H-16x2,5-GE	50

1) Packaging unit

Plastic tubing PUN-H-DUO, hydrolysis resistant

Technical data

FESTO

DUO tubing PUN-H-DUO

Highly flexible paired plastic tubing distinguished by great resistance to abrasion and kinks. Two lengths of


tubing are fused together into a tubing pair. For fitting, the paired tubing is separated as required at both ends.



Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +10 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:] Water as per manufacturer's declaration ¹⁾
Ambient temperature	[°C]	−35 ... +60
Food-safe ¹⁾		See supplementary material information
Approval ¹⁾		German Technical Control Board (TÜV)

1) Additional information www.festo.com/sp → Certificates.

Operating pressure p as a function of temperature t

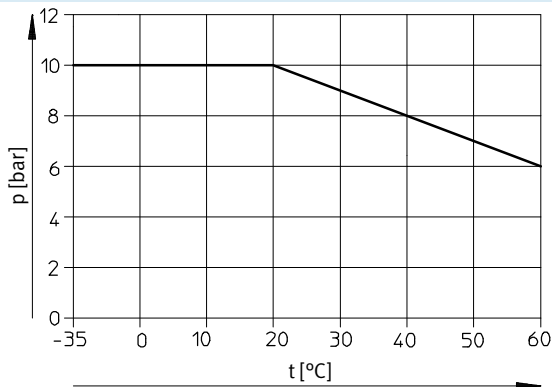

Accessories

Type	→ Internet	
	Recommended fitting	
	– Push-in fitting QS	qs
	– Push-in fitting NPQH	npqh
	Very suitable	
	– Push-in fitting QS-B	qs-b
	– Push-in fitting CRQS	crqs
	– Push-in fitting NPQP	npqp
	– Push-in fitting NPQM	npqm
	– Click fitting NPKA ¹⁾	npka
	– Fitting NPCK	npck
	– Quick connector CK ²⁾	ck
	Limited suitable	
	– Push-in fitting QS-V0	qs-v0

1) Only for O.D. 6 mm

2) Only for O.D. 4/6/8 mm

Materials	
Shore hardness	D 52 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS Free of copper and PTFE

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2.6	6	16	0.0170	Blue/black	197396	PUN-H-4x0,75-DUO	50
6	4	10	26	0.0366		197397	PUN-H-6x1-DUO	50
8	5.7	20	37	0.0574		197398	PUN-H-8x1,25-DUO	50
10	7	25	52	0.0930		197399	PUN-H-10x1,5-DUO	50

1) Packaging unit

Plastic tubing PUN-V0, flame retardant

FESTO

Technical data

Plastic tubing PUN-V0

Highly flexible single-sheath plastic tubing, flame retardant

For use in indirect proximity to welding applications.




Note

Due to the included flame retardant, the colour of the tubing deviates from the standard colour.



Operating and environmental conditions		
Temperature dependent operating pressure	[bar]	−0.95 ... +10 → diagram
Operating medium		Compressed air in accordance with ISO 8573-1:2010 [7:--:] Water as per manufacturer's declaration → www.festo.com
Ambient temperature	[°C]	−35 ... +60
Fire test		DIN 5510-2 S4/SR2/ST2
Material fire test		UL94 V-0 (3 mm) UL94 V-2 (0.75 mm)
Approval		German Technical Control Board (TÜV)

Operating pressure p as a function of temperature t

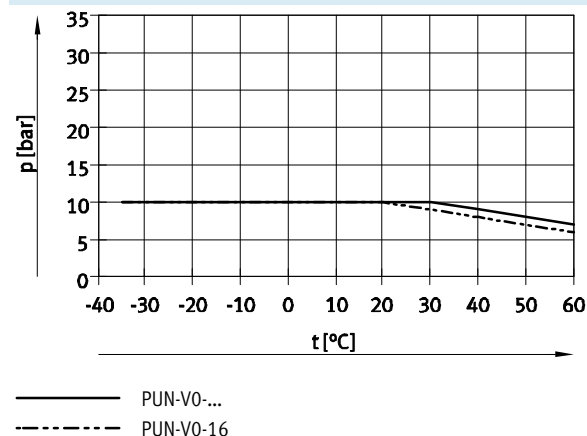

Accessories

Type	→ Internet
	Recommended fitting
	– Push-in fitting NPQM ¹⁾ npqm
	Very suitable
	– Push-in fitting CRQS crqs
	– Push-in fitting NPQH ¹⁾ npqh
	– Fitting NPCK ²⁾ npck
	– Quick connector CK ³⁾ ck
	Limited suitable
	– Push-in fitting QS qs
	– Push-in fitting QS-B qs-b
	– Push-in fitting QS-V0 ¹⁾ qs-v0
	– Push-in fitting NPQP ¹⁾ npqp
	– Click fitting NPKA ⁴⁾ npka
	– Barbed fitting CN ³⁾ cn

1) Not for O.D. 16 mm

2) Only for O.D. 6/8/10 mm

3) Only for O.D. 6/8 mm

4) Only for O.D. 6 mm



Note

Greater force is required when assembling the fittings CK/CN.

Materials	
Shore hardness	D 54 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS Free of copper and PTFE

Plastic tubing PUN-V0, flame retardant



Technical data

Dimensions and ordering data								
O.D.	I.D.	Min. bending radius	Flow-relevant bending radius	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
6	4	12	26.5	0.020	Black	525438	PUN-V0-6x1-SW	50
					Blue	525442	PUN-V0-6x1-BL	50
					Green	525446	PUN-V0-6x1-GN	50
					Red	525450	PUN-V0-6x1-RT	50
					White	525454	PUN-V0-6x1-WS	50
					Yellow	525458	PUN-V0-6x1-GE	50
					Brown	525462	PUN-V0-6x1-BR	50
8	5.7	18	37	0.031	Black	525439	PUN-V0-8x1,25-SW	50
					Blue	525443	PUN-V0-8x1,25-BL	50
					Green	525447	PUN-V0-8x1,25-GN	50
					Red	525451	PUN-V0-8x1,25-RT	50
					White	525455	PUN-V0-8x1,25-WS	50
					Yellow	525459	PUN-V0-8x1,25-GE	50
					Brown	525463	PUN-V0-8x1,25-BR	50
10	7	20	54	0.051	Black	525440	PUN-V0-10x1,5-SW	50
					Blue	525444	PUN-V0-10x1,5-BL	50
					Green	525448	PUN-V0-10x1,5-GN	50
					Red	525452	PUN-V0-10x1,5-RT	50
					White	525456	PUN-V0-10x1,5-WS	50
					Yellow	525460	PUN-V0-10x1,5-GE	50
					Brown	525464	PUN-V0-10x1,5-BR	50
16	11.8	50	90	0.122	Black	570767	PUN-V0-16x2-SW	50
					Blue	570768	PUN-V0-16x2-BL	50

1) Packaging unit

Plastic tubing PUN-V0-C, flame retardant

Technical data

FESTO

Plastic tubing PUN-V0-C

Highly flexible single-sheath plastic tubing, flame retardant

For use in the immediate vicinity of welding applications.



Note


Due to the included flame retardant, the colour of the tubing deviates from the standard colour.



Operating and environmental conditions							
Type	PUN-V0-4	PUN-V0-6	PUN-V0-8	PUN-V0-10	PUN-V0-12	PUN-V0-14	PUN-V0-16
Temperature dependent operating pressure [bar]	-0.95 ... +10 → diagram	-0.95 ... +30 ¹⁾ → diagram	-0.95 ... +20 ¹⁾ → diagram	-0.95 ... +16 ¹⁾ → diagram	-0.95 ... +10 → diagram	-0.95 ... +9 → diagram	-0.95 ... +10 → diagram
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:-:-] Water as per manufacturer's declaration → www.festo.com						
Ambient temperature [°C]	-35 ... +60						
Fire test	DIN 5510-2 S3/SR2/ST1						
Material fire test	UL94 V-0 (3 mm) UL94 V-2 (0.75 mm)						
Approval	German Technical Control Board (TÜV)						

1) Limited to 10 bar in applications with welding spatter.

Operating pressure p as a function of temperature t

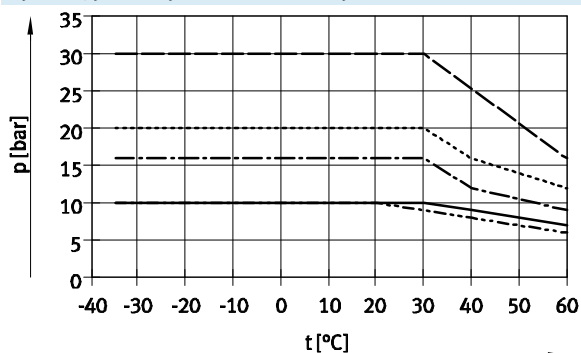

— PUN-V0-...-C
- - - PUN-V0-14x2-...-C

For applications without welding spatter

— · — PUN-V0-6x2-...-C
· · · · PUN-V0-8x2-...-C
- · - PUN-V0-10x2-...-C

Accessories

Type	→ Internet
	Recommended fitting
	- Push-in fitting NPQH ¹⁾ npqh
	Very suitable
	- Push-in fitting CRQS ²⁾ crqs
	- Push-in fitting NPQM ¹⁾ npqm
	Limited suitable
	- Push-in fitting QS ²⁾ qs
	- Push-in fitting QS-B ²⁾ qs-b
	- Push-in fitting QS-V0 ³⁾ qs-v0
	- Push-in fitting NPQP ³⁾ npqp

1) Not for O.D. 16 mm

2) Not for O.D. 14 mm

3) Not for O.D. 14/16 mm

Materials	
Shore hardness	D 54 ±3
Tubing	TPE-U(PU)
Note on materials	Conforms to RoHS
	Free of copper and PTFE

Plastic tubing PUN-V0-C, flame retardant



Technical data

Dimensions and ordering data								
Outer Ø	Inner Ø	Min. bending radius	Bending radius relevant for flow rate	Weight	Colour	Part No.	Type	PU ¹⁾
[mm]	[mm]	[mm]	[mm]	[kg/m]				[m]
4	2	10	20	0.012	Black	570349	PUN-V0-4x1-SW-C	50
					Blue	570350	PUN-V0-4x1-BL-C	50
6	2	7	24	0.032	Black	561698	PUN-V0-6x2-SW-C	50
					Blue	561702	PUN-V0-6x2-BL-C	50
					Green	561706	PUN-V0-6x2-GN-C	50
					Red	561710	PUN-V0-6x2-RT-C	50
					White	561714	PUN-V0-6x2-WS-C	50
					Yellow	561718	PUN-V0-6x2-GE-C	50
					Brown	561722	PUN-V0-6x2-BR-C	50
8	4	9	35	0.049	Black	561699	PUN-V0-8x2-SW-C	50
					Blue	561703	PUN-V0-8x2-BL-C	50
					Green	561707	PUN-V0-8x2-GN-C	50
					Red	561711	PUN-V0-8x2-RT-C	50
					White	561715	PUN-V0-8x2-WS-C	50
					Yellow	561719	PUN-V0-8x2-GE-C	50
					Brown	561723	PUN-V0-8x2-BR-C	50
10	6	12	42	0.064	Black	561700	PUN-V0-10x2-SW-C	50
					Blue	561704	PUN-V0-10x2-BL-C	50
					Green	561708	PUN-V0-10x2-GN-C	50
					Red	561712	PUN-V0-10x2-RT-C	50
					White	561716	PUN-V0-10x2-WS-C	50
					Yellow	561720	PUN-V0-10x2-GE-C	50
					Brown	561724	PUN-V0-10x2-BR-C	50
12	8	19	55	0.080	Black	561701	PUN-V0-12x2-SW-C	50
					Blue	561705	PUN-V0-12x2-BL-C	50
					Green	561709	PUN-V0-12x2-GN-C	50
					Red	561713	PUN-V0-12x2-RT-C	50
					White	561717	PUN-V0-12x2-WS-C	50
					Yellow	561721	PUN-V0-12x2-GE-C	50
					Brown	561725	PUN-V0-12x2-BR-C	50
14	9.8	45	70	0.096	Black	570351	PUN-V0-14x2-SW-C	50
					Blue	570352	PUN-V0-14x2-BL-C	50
16	11	50	90	0.147	Black	570353	PUN-V0-16x2,5-SW-C	50
					Blue	570354	PUN-V0-16x2,5-BL-C	50

1) Packaging unit

Plastic tubing PUN

Ordering data – Modular products

FESTO

Ordering table (minimum order quantity 3,000 m, rounding-off value 25 m)												
Size		3	4	6	8	10	12	14	16	Condi- tions	Code	Enter code
[M]	Module No.	553573										PUN
	Function	Polyurethane tubing, standard O.D.									PUN	
[O]	Alternative material characteristic	Standard										
		Hydrolysis-resistant									-H	
		–	Antistatic						–		-CM	
		–	–	Flame-retardant				–			-VO	
		–	Resistant to welding spatter								-VOC	
[M]	Tubing O.D. [mm]	3	–	–	–	–	–	–	–		-3	
		–	4	–	–	–	–	–	–		-4	
		–	–	6	–	–	–	–	–		-6	
		–	–	–	8	–	–	–	–		-8	
		–	–	–	–	10	–	–	–		-10	
		–	–	–	–	–	12	–	–		-12	
		–	–	–	–	–	–	14	–		-14	
		–	–	–	–	–	–	–	16		-16	
	Colour	Silver								[1] [2]	-SI	
		Blue								[1] [3]	-BL	
		Translucent blue								[4]	-TBL	
		Black								[3]	-SW	
		Translucent black								[4]	-TSW	
		Yellow								[1]	-GE	
		Translucent yellow								[4]	-TGE	
		Green								[1]	-GN	
		Translucent green								[4]	-TGN	
		Red								[1]	-RT	
		Translucent red								[4]	-TRT	
		Brown								[1]	-BR	
White								[1]	-WS			
Natural								[1] [3] [4]	-NT			
[O]	Inscription text (on request)	Standard										-TXT
		Customer-specific tubing inscription								[5]		
[M]	Packaging unit [m]	25									-25	
		50									-50	
		100									-100	
		200						–	–		-200	
		300					–	–	–		-300	
		400				–	–	–	–		-400	
		500			–	–	–	–	–		-500	
	Packaging	Cardboard box								[6]	-CB	
		Reel								[7]	-HA	

[1] SI, BL, GE, GN, RT, BR, WS, NT

Not with alternative material characteristic CM

[2] SI

Not with alternative material characteristic VO, VOC

[3] BL, SW, NT

In combination with alternative material characteristic H:
food-safe

[4] TBL, TSW, TGE, TGN, TRT, NT

Only with alternative material characteristic H

[5] TXT

Not in the online shop.

Festo logo, order code, TÜV, operating pressure, dimensions omitted

[6] CB

Only with packaging unit 25, 50

[7] HA

Not with packaging unit 25, 50

Not with alternative material characteristic VO, VOC, CM

Transfer order code

553573 **PUN** – – – – – – –