

Flow sensors SFAH

FESTO



Flow sensors SFAH

Features

FESTO

At a glance

Communication interface

 **IO-Link**

Universal flow measurement

- 8 flow measuring ranges from 0.002 l/min to 200 l/min
- High measuring dynamics (1:50)
- Available as uni- or bidirectional
- Excellent accuracy
- Optional test report



Convenient design

- Compact design 20x58 mm
- Degree of protection IP40

Easy operation

- Clear 2-line display
- Configurable, red perimeter of entire display
- Intuitive menu navigation

Quick installation

- No inlet sections required
- Adjustable QS bracket connections
- L1 and M8 plug connector for fast commissioning

Switchable electrical outputs

- Various switching functions
- Switching outputs (PNP/NPN, NO/NC)
- Analogue outputs (0...10V, 1...5V, 4...20 mA)

Product description

The flow sensor SFAH is suitable for monitoring compressed air and non-corrosive gases. The sensor can be used in many industry segments thanks to its compact design. The method of measurement is based on the thermal heat-transfer method. The bypass construction means that it is less susceptible to disruption by particles and moisture. The flow value is transmitted to the connected control system as a switching signal, as an analogue signal or via IO-Link®.

Area of application

- Process monitoring
- Handling of extremely small parts
- Monitoring of compressed air consumption
- Leak test
- Monitoring of forming gas
- Pneumatic object detection via air-gap measurement

Functions


- Monitoring and setting a flow rate threshold, a flow rate range or a change in flow rate
- Monitoring using the teach-in function or by entering values
- Mass flow rate and volumetric flow rate are displayed in the common measurement units
- ECO function with option to switch off the display
- Optional security code can be freely chosen (4-digit code)
- Adjustable low-pass filter for smoothing the flow signal
- Scaling the analogue output to increase the signal dynamics
- Offset compensation possible
- Min./max. value memory
- All settings that have been entered on one sensor (master) can be transferred (replicated) to other, identical sensors
- High pressure range -0.9 bar to 10 bar

IO-Link

- Serial communication integrated using IO-Link® 1.1
- Cyclical transfer of two switching statuses and the measured pressure value
- Remote parameterisation of the sensor is possible using an IO-Link® master
- Easy sensor replacement with automatic parameterisation
- Sensor identification, diagnostics and teach-in possible via IO-Link®

Space-saving

Adjustable QS angled connections

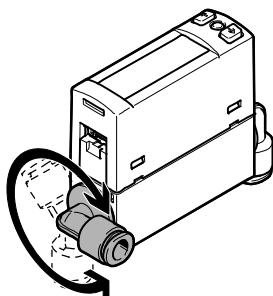

Flow sensors SFAH

Features

Mounting options

H-rail mounting

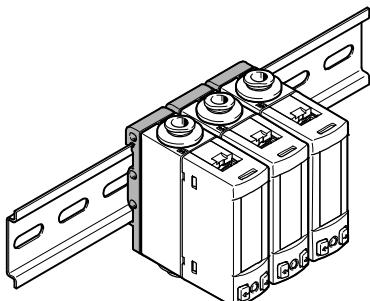


Plate mounting from beneath



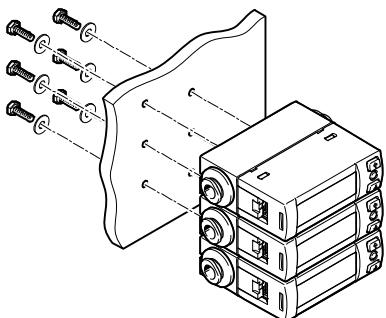



Plate mounting from the side

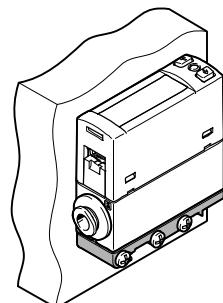


Wall mounting

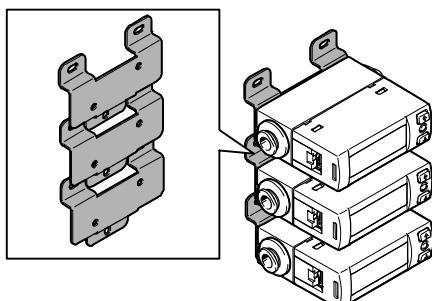

Front panel mounting

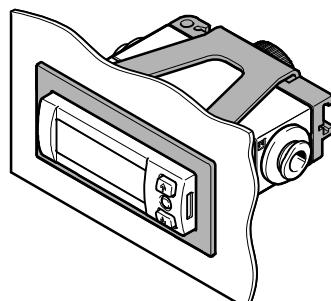

Ordering data – Product options



Configurable product
This product and all its options can be ordered using the configurator.


The configurator can be found under Products on the DVD or at
→ [www.festo.com/catalogue/...](http://www.festo.com/catalogue/)

Enter the type (or part number) in the search field:
• SFAH 8035300

Flow sensors SFAH

Peripherals overview

FESTO

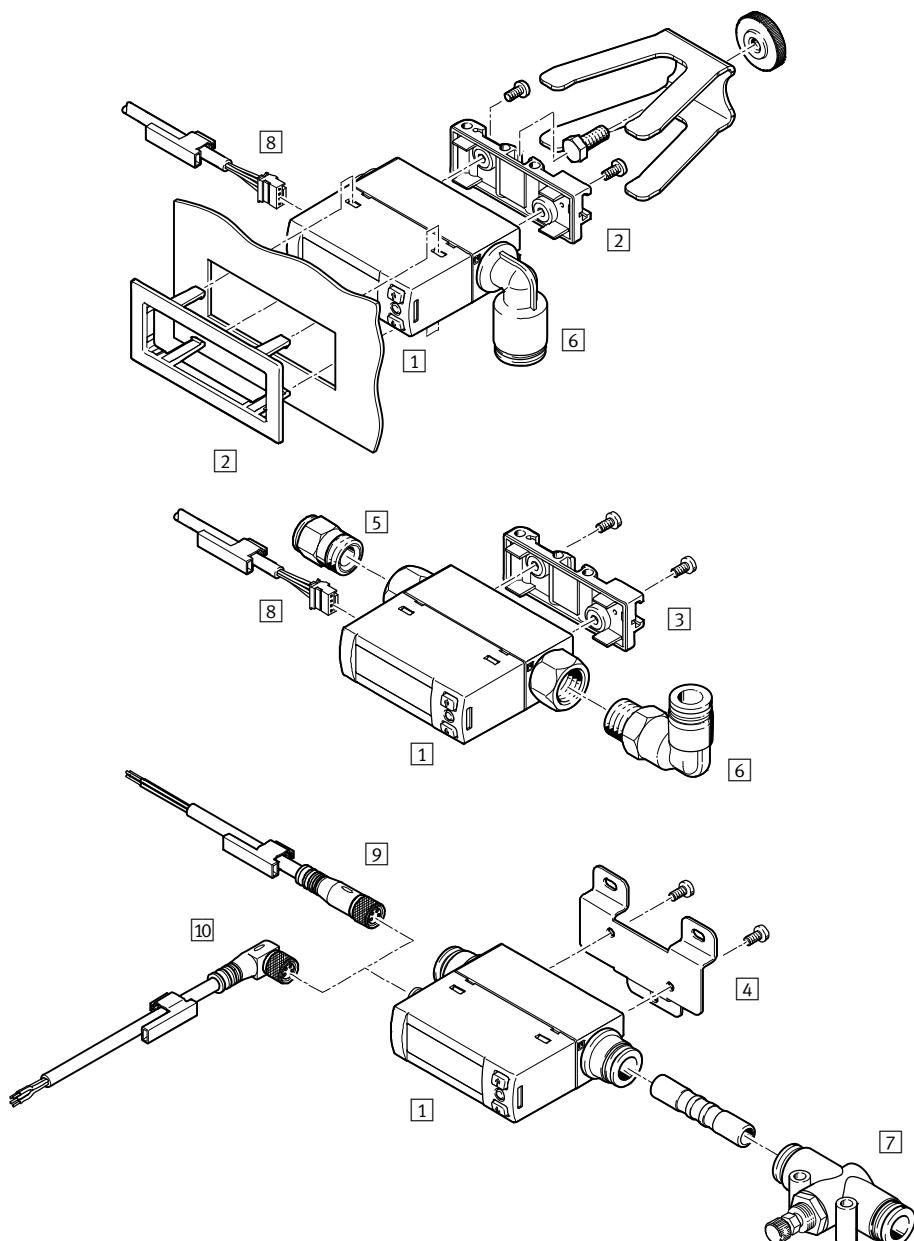

Accessories	➔ Page/Internet
[1] Flow sensor SFAH	6
[2] Front panel mounting kit SAMH-FH-F	14
[3] H-rail mounting SAMH-FH-H	13
[4] Wall mounting SAMH-FH-W	13
[5] Push-in fitting QS	15
[6] Push-in fitting QSL	15
[7] One-way flow control valve GRO-QS...	gro
[8] Connecting cable NEBS-L1G4...	15
[9] Connecting cable NEBU-M8G4...	15
[10] Connecting cable NEBU-M8W4...	15

Flow sensors SFAH

Type codes

SFAH	-			-			-		-		-		+	
Type														
SFAH	Flow sensor													
Flow measuring range														
0,1 ¹⁾	Max. 0.1 l/min													
0,5	Max. 0.5 l/min													
1	Max. 1 l/min													
5	Max. 5 l/min													
10	Max. 10 l/min													
50	Max. 50 l/min													
100	Max. 100 l/min													
200	Max. 200 l/min													
Flow input														
B	Bidirectional													
U	Unidirectional													
Pneumatic connection														
Q4	Push-in connector 4 mm													
Q6	Push-in connector 6 mm													
Q8	Push-in connector 8 mm													
G14	G1/4													
G18	G1/8													
Thread type														
	None													
F	Female thread													
Outlet orientation														
S	Straight													
AR	Angled, rotatable													
Electrical output 1														
PNLK	PNP, NPN or IO-Link®													
Electrical output 2														
PNVBA	PNP, NPN 0 ... 10 V, 1 ... 5 V or 4 ... 20 mA													
Electrical connection														
L1	Plug connector, design L1													
M8	Plug connector M8													
Certificates														
	None													
T	Test report													


1) For low leakage requirements at the bottom of the measuring range, use G1/4 or G1/8 female thread in conjunction with pneumatic connection.

Flow sensors SFAH

Technical data

Function


SFAH-...-L1

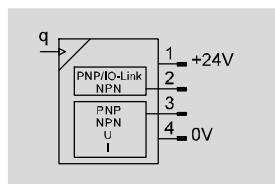

- Flow rate

- 0.002 ... 0.1 l/min
- 0.01 ... 0.5 l/min
- 0.02 ... 1 l/min
- 0.1 ... 5 l/min
- 0.2 ... 10 l/min
- 1 ... 50 l/min
- 2 ... 100 l/min
- 4 ... 200 l/min

SFAH-...-M8

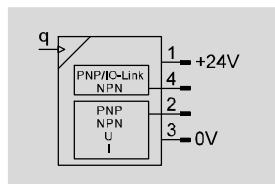

- Maximum versatility and reduced warehousing thanks to switchable electrical outputs
- Measuring signal filter for setting the rise time
- Additional filter for smoothing the display values



General technical data

Certification	RCM compliance mark							
CE marking (see declaration of conformity)	To EU EMC Directive							
Note on materials	RoHS-compliant							

Input signal, measuring element	-0.1	-0.5	-1	-5	-10	-50	-100	-200							
Measured variable	Mass flow rate, volumetric flow rate														
Flow direction	B	Bidirectional													
	U	Unidirectional													
Measuring principle	Thermal														
Method of measurement	Heat transfer														
Flow measuring range start value [l/min]	0.002	0.01	0.02	0.1	0.2	1	2	4							
Flow measuring range end value ¹⁾ [l/min]	0.1	0.5	1	5	10	50	100	200							
Operating pressure [bar]	-0.9 ... 10														
Operating medium	Nitrogen Compressed air to ISO 8573-1:2010 [6:4:4]														
Temperature of medium [°C]	0 ... 50														
Ambient temperature [°C]	0 ... 50														
Nominal temperature [°C]	23														

1) For feature ...-B-...: The measuring range applies in both the positive and negative direction.

Output, general

Accuracy of flow rate	+/- (2% o.m.v. + 1% FS)
Repetition accuracy zero point [%FS]	±0.2
Repetition accuracy span [%FS]	±0.8
Temperature coefficient span [%FS/K]	Typ. ±0.15 (max. ±0.3)
Pressure influence span ¹⁾	Typ. ±1 (in the pressure range -0.7 ... 10 bar)

1) In the pressure range -0.9 ... -0.7 bar, an additional pressure influence span of typ. ±4% FS can be expected.

Switching output

Switching output	2 x PNP or 2 x NPN, switchable
Switching function	Window comparator
	Threshold value comparator
	Auto difference monitoring
Switching element function	N/C or N/O contact, switchable
Max. output current [mA]	100

Flow sensors SFAH

Technical data

Analogue output

Analogue output	-PNVBA-	0 ... 10 V	1 ... 5 V	4 ... 20 mA
Max. load resistance of current output	[Ohm]	500		
Min. load resistance of voltage output	[kOhm]	20		

Output, additional data

Short circuit protection	Yes
Overload protection	Yes

IO-Link® device to IEC 61131-9

Protocol	IO-Link®
Protocol version	Device V 1.1
Profile	Smart sensor profile
Function classes	Binary data channel (BDC) Process data variable (PDV) Identification Diagnostics Teach channel
Communication mode	COM2 (38.4 kBaud)
SIO mode support	Yes
Port class	A
Process data width IN	3 bytes
Process data content IN	2 bit BDC (flow monitoring) 1 bit BDC (volume monitoring) 14 bit PDV (measured flow value)
IO-Link®, service data contents IN	32 bit PDV (measured volume value)
IO-Link®, minimum cycle time	4 ms
IO-Link®, data memory required	< 0.5 KB

Electronics

Operating voltage range DC	[V]	22 ... 26
Idle current	[mA]	≤ 25
Reverse polarity protection		For all electrical connections

Electromechanical components

Connection type	M8	L1
Connection technology	Plug connector	
Number of pins, wires	M8x1, A-coded, to EN 61076-2-104	L1J

Pin allocation

	Pin	Significance
M8		
	1	Operating voltage +24 V
	2	Electrical output 2 (OutB or Anlg)
	3	Operating voltage 0 V
	4	Electrical output 1 (OutA, C/Q line for IO-Link®)
L1		
	1	Operating voltage +24 V
	2	Electrical output 1 (OutA, C/Q line for IO-Link®)
	3	Electrical output 2 (OutB or Anlg)
	4	Operating voltage 0 V

Flow sensors SFAH

Technical data

FESTO

Mechanical system	-Q4	-Q6	-Q8	-G18F	-G14F					
Type of mounting	Via accessories									
Mounting position	Any									
Pneumatic connection	For tubing O.D. 4 mm	For tubing O.D. 6 mm	For tubing O.D. 8 mm	Female thread Ø G1/8	Female thread Ø G1/4					
Outlet orientation	S	Straight			–					
	AR	Angled, rotatable								
Product weight	[g]	60		90						
Materials										
Housing	PA reinforced									
Materials in contact with the media	NBR									
	Silicon									
	PA reinforced									
	Silicon nitride									
	High-alloy stainless steel									
	Epoxy									
	Anodised wrought aluminium alloy									

Display/operation								
Display type	Illuminated LCD, multi-colour							
Displayable units								
0.1	l/min, l/h, scft/h, g/min, l, scft, g							
0.5								
1								
5	l/min, l/h, scft/min, scft/h, g/min, l, scft, g							
10								
50	l/min, scft/min, scft/h, g/min, l, scft, g							
100								
200								
Setting options	Teach-in							
	IO-Link®							
	Via display and keys							
Tamper-proof	IO-Link®							
	PIN code							

Immissions/emissions	0.1	0.5	1	5	10	50	100	200	
Degree of protection	IP40								
Maximum permissible leakage	[l/h]	0.1							
Pressure drop delta p ¹⁾	[mbar]	< 5							
Protection class	III								
Corrosion resistance class CRC ²⁾	2								

1) With 6 bar at the input and q max.

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Flow sensors SFAH

Technical data

Dimensions

Download CAD data → www.festo.com



Type	B1	B2	B3	D1	H1	H2	H3	L1	L2	L3
SFAH- ...	20	11.5	8	M3	~52.4	50.7	11.5	58	36.3	28

Dimensions

Download CAD data → www.festo.com



Type	L4 Max.
SFAH- ... -Q4S- ...	70
SFAH- ... -Q6S- ...	70
SFAH- ... -Q8S- ...	85


Flow sensors SFAH

Technical data

FESTO

Dimensions


Download CAD data → www.festo.com

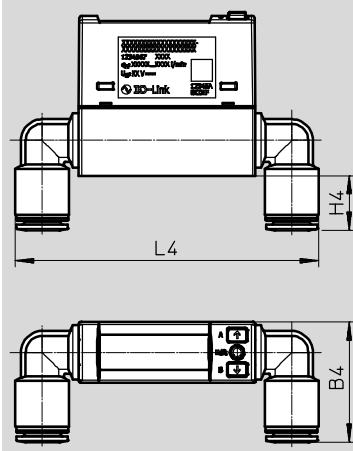

Type	B4 Max.	H4 Max.	L4 Max.
SFAH- ... -Q4AR- ...	30	8	83
SFAH- ... -Q6AR- ...	31	9	88
SFAH- ... -Q8AR- ...	38	17	98

Dimensions


Download CAD data → www.festo.com

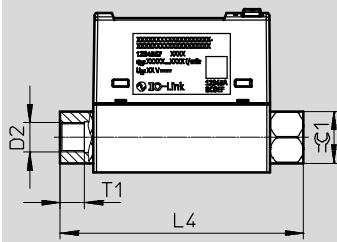

Type	D2	L4	T1	=∅ 1
SFAH- ... -G14FS- ...	G1/4	80	12	17
SFAH- ... -G18FS- ...	G1/8	80	8	17

Dimensions

Download CAD data → www.festo.com




Type	H5
SFAH- ... -L1	26.3

Flow sensors SFAH

Technical data

Dimensions


Download CAD data → www.festo.com

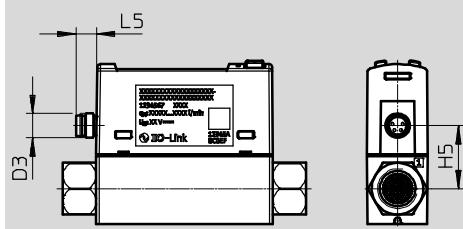

Type	D3	H5	L5
SFAH- ... -M8	M8x1	20.7	~6.6

Dimensions


Download CAD data → www.festo.com

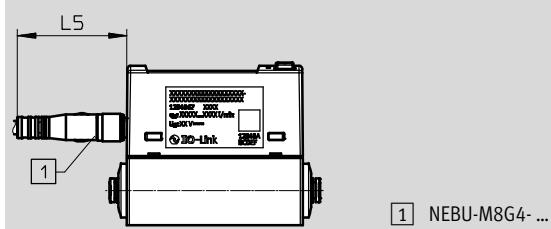

Type	L5
SFAH- ... -M8	~35.9

Dimensions

Download CAD data → www.festo.com

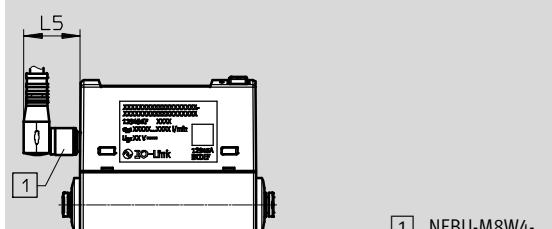


Type	L5
SFAH- ... -M8	~18.5

Flow sensors SFAH

Technical data

FESTO

Ordering data			Part No.	Type
	Version	Flow measuring range [l/min]	Connection type	
	0.1 l/min	For tubing O.D. 4 mm	8058461	SFAH-0.1U-Q4S-PNLK-PNVBA-L1
	0.5 l/min		8058462	SFAH-0.1U-Q4S-PNLK-PNVBA-M8
	1 l/min		8058463	SFAH-0.5U-Q4S-PNLK-PNVBA-L1
	5 l/min	For tubing O.D. 6 mm	8058464	SFAH-0.5U-Q4S-PNLK-PNVBA-M8
	10 l/min		8058465	SFAH-1U-Q4S-PNLK-PNVBA-L1
	50 l/min	For tubing O.D. 8 mm	8058466	SFAH-1U-Q4S-PNLK-PNVBA-M8
		Female thread G1/8	8058467	SFAH-5U-Q6S-PNLK-PNVBA-L1
	100 l/min	For tubing O.D. 8 mm	8058468	SFAH-5U-Q6S-PNLK-PNVBA-M8
			8058469	SFAH-10U-Q6S-PNLK-PNVBA-L1
	200 l/min	Female thread G1/4	8058470	SFAH-10U-Q6S-PNLK-PNVBA-M8
		For tubing O.D. 8 mm	8058471	SFAH-50U-Q8S-PNLK-PNVBA-L1
			8058472	SFAH-50U-Q8S-PNLK-PNVBA-M8
		Female thread G1/4	8058473	SFAH-50U-G18FS-PNLK-PNVBA-M8
		For tubing O.D. 8 mm	8058474	SFAH-100U-Q8S-PNLK-PNVBA-L1
			8058475	SFAH-100U-Q8S-PNLK-PNVBA-M8
		Female thread G1/4	8058476	SFAH-100U-G14FS-PNLK-PNVBA-M8
		For tubing O.D. 8 mm	8058477	SFAH-200U-Q8S-PNLK-PNVBA-L1
			8058478	SFAH-200U-Q8S-PNLK-PNVBA-M8
		Female thread G1/4	8058479	SFAH-200U-G14FS-PNLK-PNVBA-M8



Flow sensors SFAH

Accessories

H-rail mounting

SAMH-FH-H- ...

Material: PA, POM, steel
RoHS-compliant

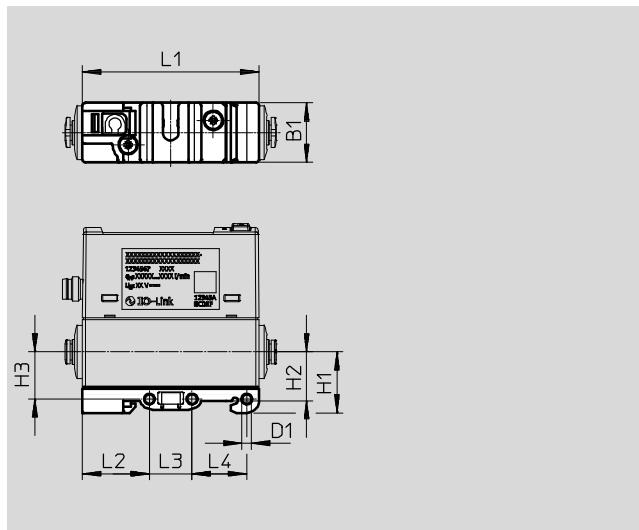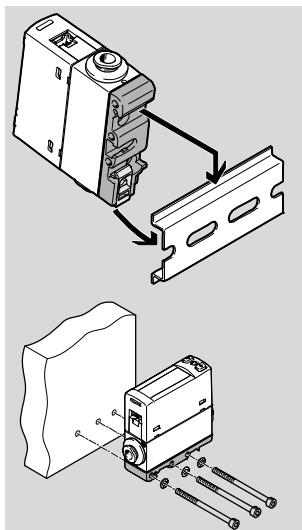



Dimensions and ordering data

Type	B1	D1 \varnothing	H1	H2	H3	L1	L2	L3	L4	Part No.	Type
SAMH-FH-H	19.6	3.2	20	16	15.5	58	22	14	18	8058460	SAMH-FH-H

Wall mounting

SAMH-FH-W ...

Material: Steel, high-alloy stainless steel, RoHS-compliant

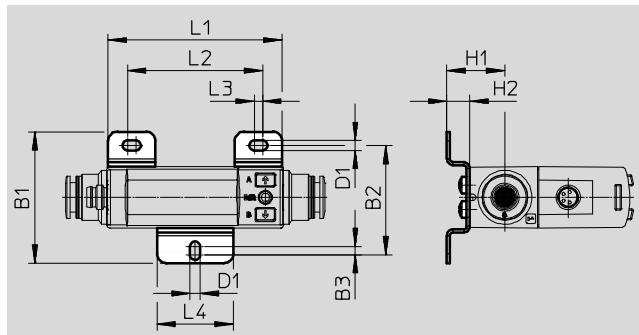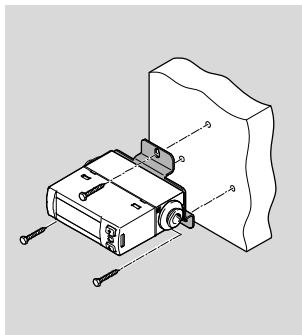

Dimensions and ordering data

Type	B1	B2	B3	D1	H1	H2	L1	L2	L3	L4	CRC ¹⁾	Part No.	Type
SAMH-FH-W	43.1	35.9	2.7	3.3	18.5	7.5	57	44.2	2.7	25	2	8036910	SAMH-FH-W

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Flow sensors SFAH



Accessories

FESTO

Front panel mounting kit

SAMH-FH-F- ...

Material: PA, steel, high-alloy
stainless steel
RoHS-compliant

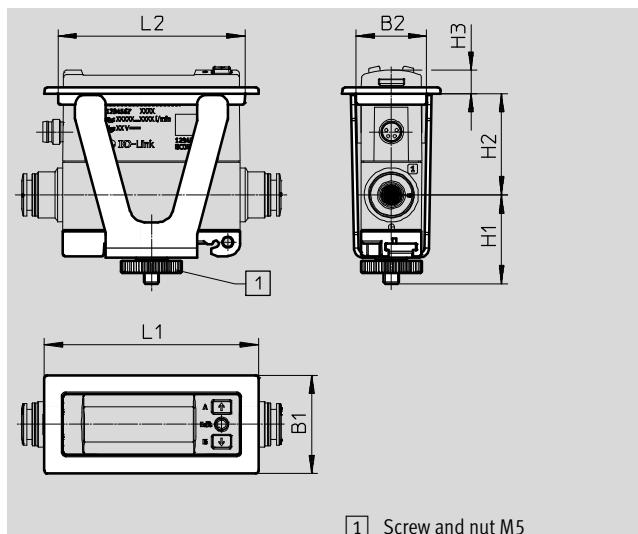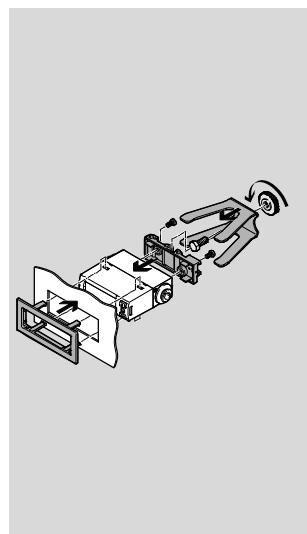

[1] Screw and nut M5

Dimensions and ordering data

Type	B1	B2	H1 Max.	H2	H3	L1	L2	CRC ¹⁾	Part No.	Type
SAMH-FH-F	32.2	23.1	30	33.2	7.7	70.2	61.2	2	8058459	SAMH-FH-F

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Flow sensors SFAH

Accessories

Ordering data – Connecting cables

	Number of wires	Cable length [m]	Part No.	Type
Socket, rectangular design L1				
	4	2.5	572576	NEBS-L1G4-K-2,5-LE4
M8x1, straight socket				
	4	2.5	541342	NEBU-M8G4-K-2.5-LE4
	4	2.5	541344	NEBU-M8W4-K-2.5-LE4

Ordering data – Push-in fittings

	Pneumatic connection O.D.	For tubing O.D.	Part No.	Type
Straight connection				
	G1/8	4 mm	186095	QS-G1/8-4
		6 mm	186096	QS-G1/8-6
		8 mm	186098	QS-G1/8-8
	G1/4	6 mm	186097	QS-G1/4-6
		8 mm	186099	QS-G1/4-8
		10 mm	186101	QS-G1/4-10
90° connection				
	G1/8	4 mm	186116	QSL-G1/8-4
		6 mm	186117	QSL-G1/8-6
		8 mm	186119	QSL-G1/8-8
	G1/4	6 mm	186118	QSL-G1/4-6
		8 mm	186120	QSL-G1/4-8
		10 mm	186122	QSL-G1/4-10

Ordering data – Vacuum filters

	Connection	For tubing O.D.	Part No.	Type
Technical data → Internet: vaf				
	PK-3	4	535883	VAF-PK-3
	PK-4	6	15889	VAF-PK-4
	PK-6	8	160239	VAF-PK-6