


# Automation system CPX-E



# Automation system CPX-E

Key features

FESTO

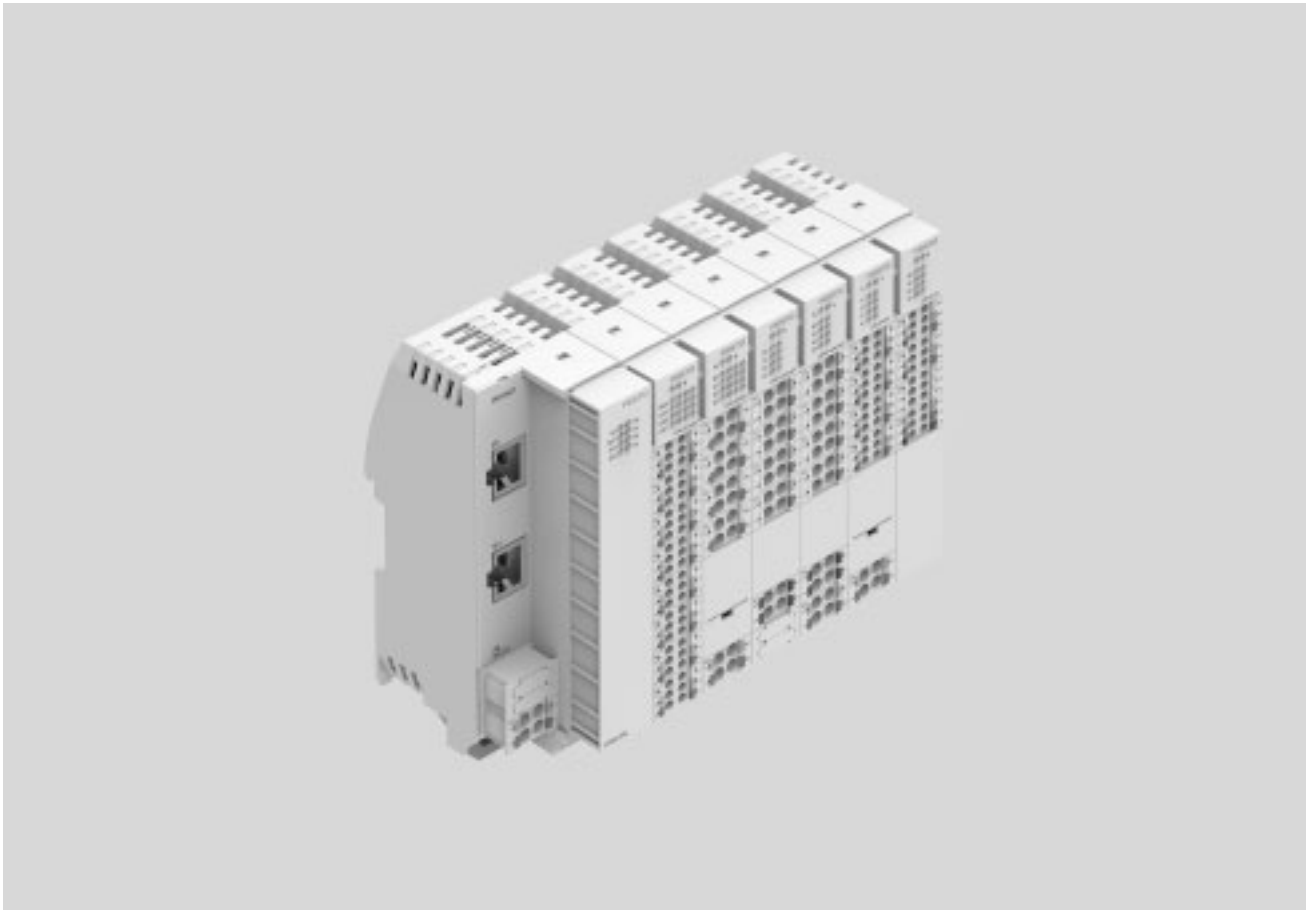

## Key features

The automation system CPX-E is a high-performance control and automation system focusing primarily on motion control functions for handling technology. It comprises individual function modules that allow a very flexible system structure.

Depending on the combination, the automation system CPX-E can be configured and used purely as a remote I/O system or as a control system. The following modules are available:

- Control
- Bus modules
- Input/output modules
- Counter modules
- IO-Link master modules

The controllers for the automation system CPX-E are powerful and have comprehensive PLC functions. They have an integrated EtherCAT master for communication with other products such as motor controllers. There is support for SoftMotion, depending on the variant. SoftMotion is a powerful software library for simple and complex motion control applications. All controllers have an integrated bus interface; an additional bus module for connection to higher-order controllers is not required.

- Standardised CODESYS programming interface
- Reduced development effort thanks to integrated data management
- Extended software functions for seamless integration and simplified control of electric drives
- Standardised, integrated platform combining servo technology and stepper motor technology, enabling mixed operation of the two technologies without problems in the application

Scalable motion control functions:

- Simple movements
- Multi-axis movements (cam discs)
- Contour applications
- Robotics

Handling technology using Festo kinematics (planar surface gantry, linear gantry, Cartesian three-dimensional gantries)

- Parts handling
- Assembly systems
- Palletising
- Gluing, dispensing


Complete automation of machines:

- Packaging machines
- Palletising systems
- Assembly machines
- Handling systems

# Automation system CPX-E

Key features

## Overview

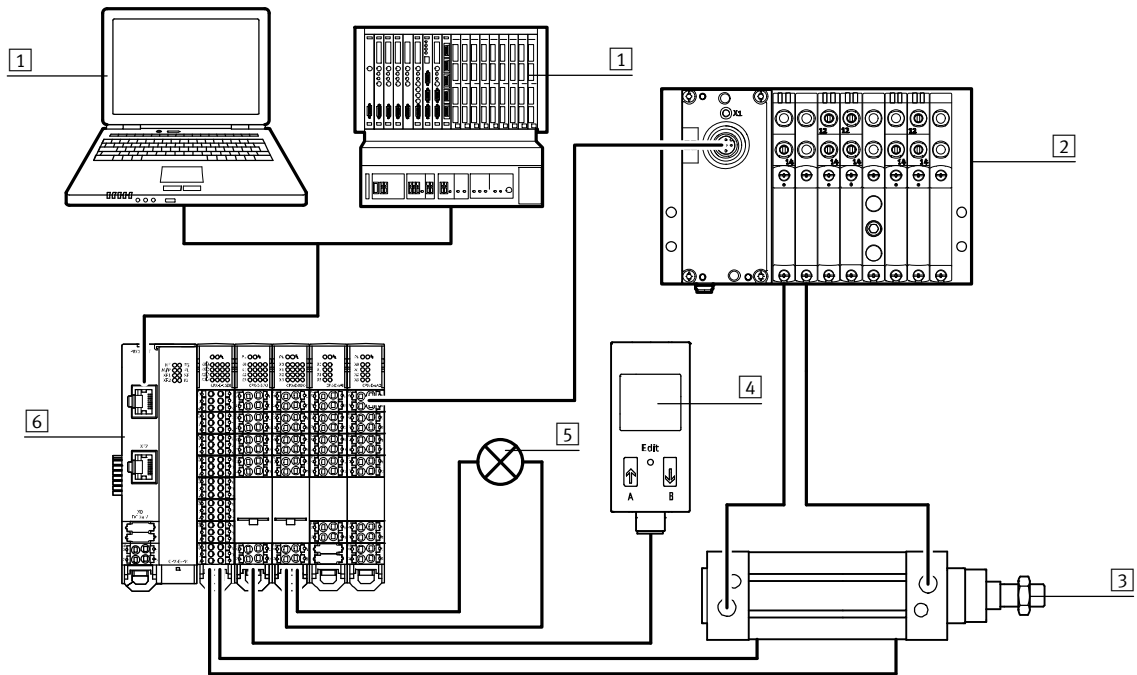

- 1 Higher-order controller
- 2 Valve terminal with I-Port interface/device with IO-Link interface
- 3 Cylinder with sensors for position sensing
- 4 Flow sensor
- 5 Visual indicator
- 6 Automation system CPX-E

## Ordering – Product options

<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<p><b>Configurable product</b></p>	<p><b>This product and all its options can be ordered using the configurator</b></p>	<p>The configurator can be found under Products on the DVD or at <a href="http://www.festo.com/catalogue/...">www.festo.com/catalogue/...</a></p>
			<p>Enter the type in the search field.</p>

# Automation system CPX-E

Product range overview









Function	Version	Type		→ Page	
Controllers and bus modules	<b>Controllers</b>				
		CODESYS V3	CPX-E-CEC-C1	<ul style="list-style-type: none"> <li>• EtherCAT master</li> <li>• Stand-alone controller</li> <li>• Ethernet interface</li> <li>• CODESYS</li> </ul>	12
			CPX-E-CEC-C1-PN	<ul style="list-style-type: none"> <li>• EtherCAT master</li> <li>• Communication via PROFINET (Slave), EasyIP, Modbus TCP or TCP/IP</li> <li>• Ethernet interface</li> <li>• CODESYS</li> </ul>	17
			CPX-E-CEC-C1-EP	<ul style="list-style-type: none"> <li>• EtherCAT master</li> <li>• Communication via EtherNet/IP(Slave), EasyIP, Modbus TCP or TCP/IP</li> <li>• Ethernet interface</li> <li>• CODESYS</li> </ul>	24
		CODESYS V3 with SoftMotion	CPX-E-CEC-M1	<ul style="list-style-type: none"> <li>• EtherCAT master</li> <li>• Stand-alone controller</li> <li>• Ethernet interface</li> <li>• CODESYS</li> <li>• SoftMotion functionality</li> </ul>	12
			CPX-E-CEC-M1-PN	<ul style="list-style-type: none"> <li>• EtherCAT master</li> <li>• Communication via PROFINET (Slave), EasyIP, Modbus TCP or TCP/IP</li> <li>• Ethernet interface</li> <li>• CODESYS</li> <li>• SoftMotion functionality</li> </ul>	17
			CPX-E-CEC-M1-EP	<ul style="list-style-type: none"> <li>• EtherCAT master</li> <li>• Communication via EtherNet/IP(Slave), EasyIP, Modbus TCP or TCP/IP</li> <li>• Ethernet interface</li> <li>• CODESYS</li> <li>• SoftMotion functionality</li> </ul>	24
	<b>Bus module</b>				
		PROFINET	CPX-E-PN	<ul style="list-style-type: none"> <li>• Control via PROFINET</li> <li>• Ethernet interface</li> </ul>	31
		EtherCAT	CPX-E-EC	<ul style="list-style-type: none"> <li>• Control via EtherCAT</li> <li>• Ethernet interface</li> </ul>	35
EtherNet/IP		CPX-E-EP	<ul style="list-style-type: none"> <li>• Control via EtherNet/IP</li> <li>• Ethernet interface</li> </ul>	39	
PROFIBUS		CPX-E-PB	<ul style="list-style-type: none"> <li>• Control via PROFIBUS</li> <li>• Sub-D interface</li> </ul>	43	

# Automation system CPX-E


Product range overview

FESTO

Function	Version	Type	→ Page		
Input module	<b>Digital</b>				
		16 inputs	CPX-E-16DI	<ul style="list-style-type: none"> <li>• LED indicator</li> <li>• PNP (positive switching)</li> <li>• 2- and 3-wire sensors to IEC 61131-2</li> </ul>	47
		1 clock pulse input	CPX-E-1CI	<ul style="list-style-type: none"> <li>• LED indicator</li> <li>• Incremental encoder with two phase-offset signals and optional logic zero</li> <li>• Pulse generator with or without direction signal</li> <li>• Differential encoder input with 5 V DC operating voltage</li> <li>• Single encoder input (single ended) with 5 V DC or 24 V DC operating voltage</li> </ul>	50
	<b>Analogue</b>				
	4 inputs	CPX-E-4AI-U-I	<ul style="list-style-type: none"> <li>• LED indicator</li> <li>• Measured variable: current or voltage, can be set</li> <li>• Analogue input can be set up to 10 V/up to 20 mA</li> </ul>	57	
Output module	<b>Digital</b>				
		8 outputs	CPX-E-8DO	<ul style="list-style-type: none"> <li>• LED indicator</li> <li>• PNP (positive switching)</li> <li>• Characteristic curve outputs to IEC 61131-2, type 0.5</li> </ul>	54
	<b>Analogue</b>				
	4 outputs	CPX-E-4AO-U-I	<ul style="list-style-type: none"> <li>• LED indicator</li> <li>• Measured variable: current or voltage, can be set</li> <li>• Analogue input can be set up to 10 V/up to 20 mA</li> </ul>	61	
Master module	<b>IO-Link</b>				
	4 ports	CPX-E-4IOL	<ul style="list-style-type: none"> <li>• LED indicator</li> <li>• Protocol version Master V 1.1</li> </ul>	65	

# Automation system CPX-E

Peripherals overview

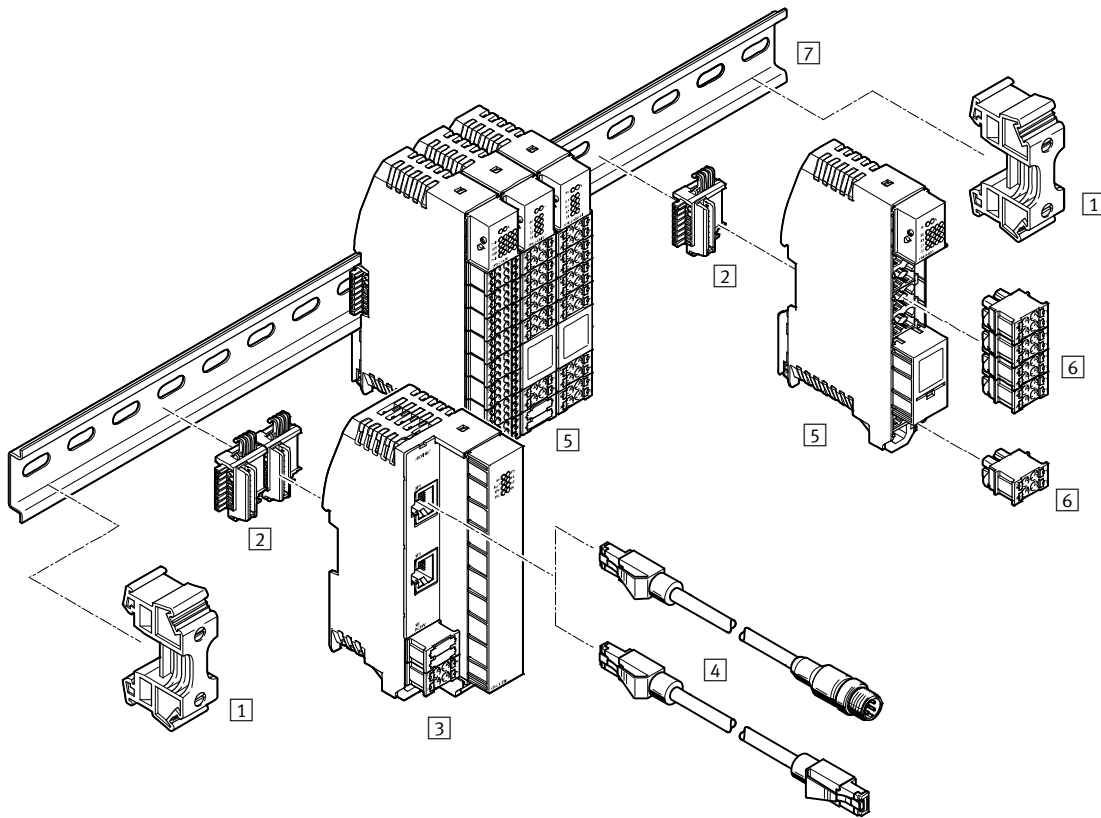

	Type	Brief description	→ Page/Internet	
1	Holder	CAFM-X3-HC	Prevents the CPX-E from slipping on the H-rail	-
2	Electrical interlinking module	VAEA-X3-L	Electrical connection between the individual modules of the CPX-E	-
3	Controller/bus module	CPX-E-CEC CPX-E-PN CPX-E-EC CPX-E-EP CPX-E-PB	Connection of the CPX-E to a higher-order controller	12 31 35 39 43
4	Connecting cable	NEBC	For connection to the higher-order controller	-
5	Input/output module Counter module IO-Link master module	CPX-E-16DI CPX-E-1CI CPX-E-8DO CPX-E-4AI-U-I CPX-E-4AO-U-I CPX-E-4IOL	Digital and analogue input and output modules	47 50 54 57 61 65
6	Terminal strip	NEKC	Blocks with spring-loaded terminals for connecting sensors and actuators	-
7	DIN mounting rail	NRH-35-2000	H-rail to EN 60715	nrh

# Automation system CPX-E


Key features – Assembly

## Assembly


The automation system CPX-E can only be mounted on an H-rail. Modules can be easily removed, replaced or added at a later date.

The following mounting clearances are recommended to allow sufficient ventilation of the automation system CPX-E:

- At the top: 4 cm
- At the side: 2 cm
- At the bottom: 3 cm

 Note  
Assembly must only take place in a de-energised state.

## Mounting – Electrical interlinking

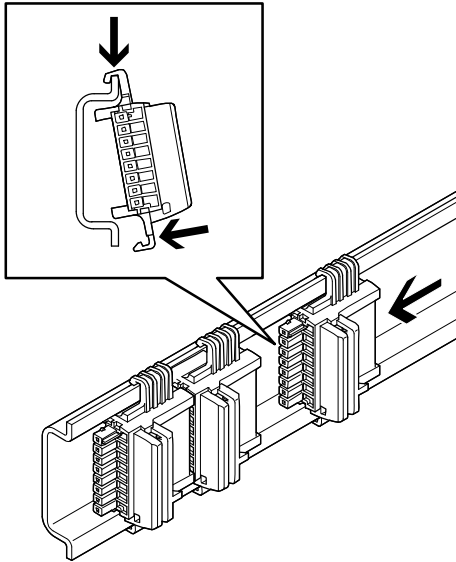

The electrical interlinking modules are clipped into the H-rail. They can be moved along the H-rail. The electrical interlinking modules connect the individual modules of the automation system CPX-E to one another. They are used for:

- Data transmission
- Power supply to the module
- Power supply to connected sensors


Output modules have a separate power infeed from which the consumers connected to the module are supplied.

The modules require different numbers of electrical interlinking

modules (included in the scope of delivery of the module):

- One electrical interlinking module per input module
- One electrical interlinking module per counter module
- One electrical interlinking module per output module
- One electrical interlinking module per IO-Link master module
- Two electrical interlinking modules per bus module
- Two electrical interlinking modules per stand-alone controller
- Four electrical interlinking modules per PROFINET controller
- Four electrical interlinking modules per EtherNet/IP controller

## Mounting – Modules

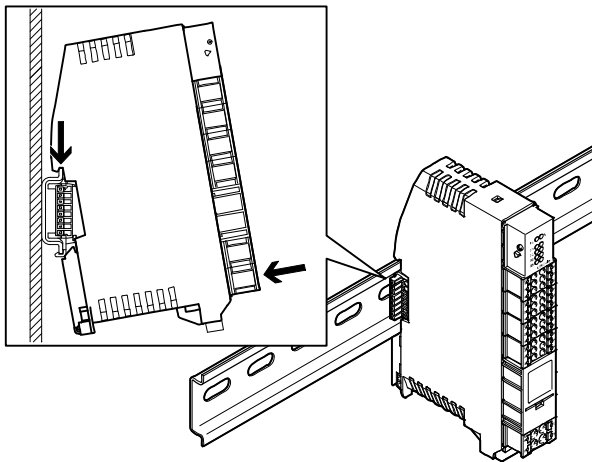

The module is attached to the H-rail or the electrical interlinking module and latched in place. For removal, a screwdriver is required to undo the fastening clamp. Slipping of the automation system CPX-E on the H-rail is prevented by laterally attaching retainers (included in the scope of delivery).

If a module is to be replaced, the associated electrical interlinking module remains on the H-rail. If a module is missing, this interrupts the connection of the bus module/controller to the downstream input/output modules or IO-Link master modules.

# Automation system CPX-E

Key features – Assembly

FESTO

## Electrical connections


All electrical connections for the automation system CPX-E are designed as terminal strips with spring-loaded terminals.

Modules can easily be removed, replaced or added at a later date.

 Note


Assembly must only take place in a de-energised state.

## Mounting – Single wire



The electrical connection for the inputs and outputs, as well as the power supply, is provided via terminal strips for single strands.

## Mounting – Terminal strip

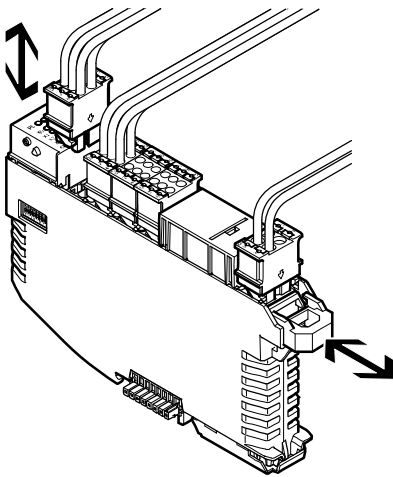

The terminal strips mounted on a module are held in position by central locking.


To remove individual terminal strips, the locking mechanism is released using a screwdriver:

- Simple changeover of connected sensors or actuators
- Fast and visible disconnection and reconnection of the power supply
- Simple changeover of an entire CPX-E module, wiring is retained

The terminal strips have a partially coded plug pattern:

- Terminal strips having the same number of pins can be interchanged
- Terminal strips for power supply connections only fit on power supply connections

## Labels

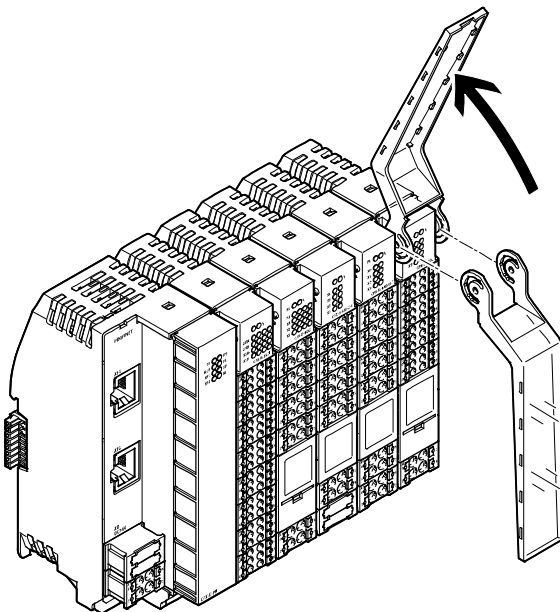

A hinged inscription label holder is available for the input and output modules and IO-Link master module. A matching label strip is inserted into the inscription label holder for labelling.

Label templates can be downloaded from the Support Portal:


➔ Internet: [cpx-e](http://www.festo.com/cpx-e)  
In the “Software” area.



# Automation system CPX-E

Key features – Power supply

## Power supply concept

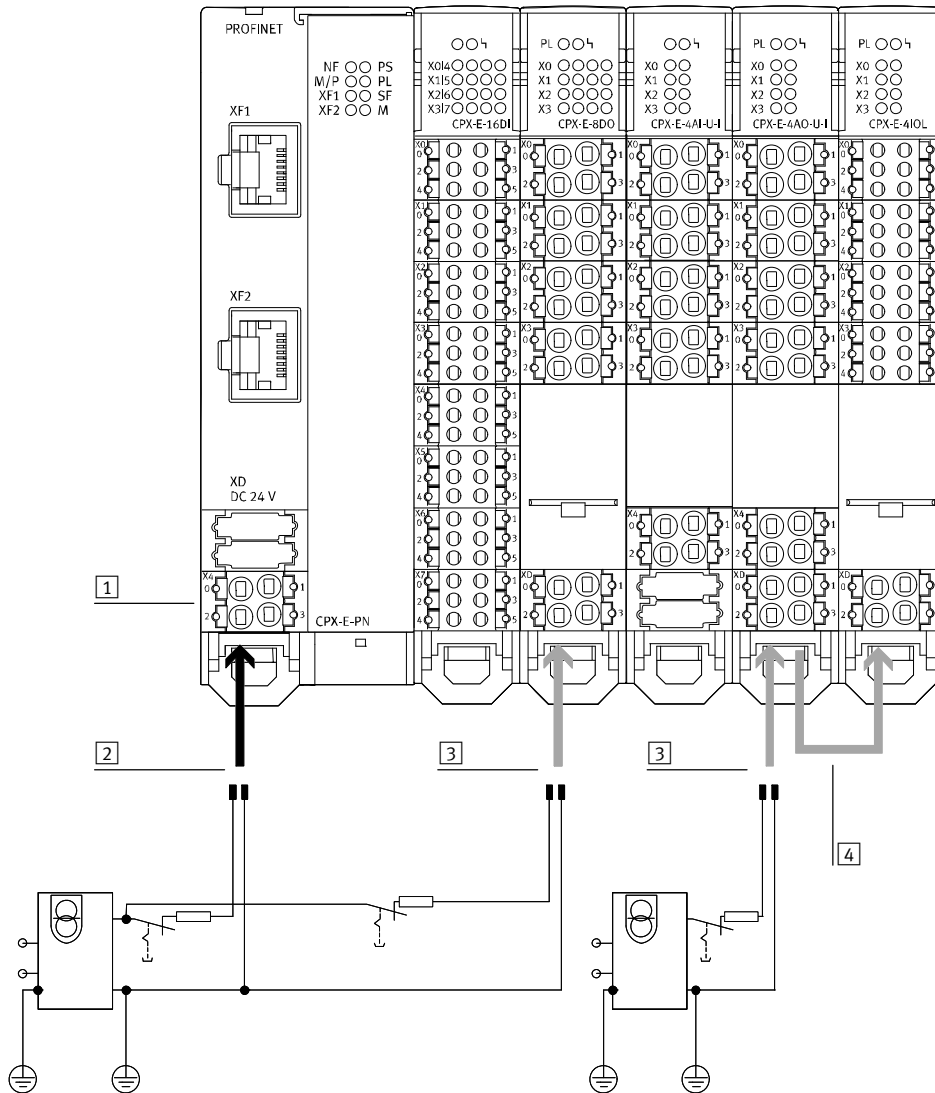

- 1 The power supply is provided via a terminal strip with spring-loaded terminals on the module
- 2 The power supply for the modules themselves and the connected sensors is provided centrally on the bus module/ controller.
- 3 The power supply for connected actuators is provided via a terminal strip with spring-loaded terminals on the respective output module/IO-Link master module
- 4 The power supply for actuators can be looped through from output module to output module/IO-Link master module

Interlinking blocks represent the backbone of the CPX-E terminal with all supply lines. They provide the power supply for the modules used on them as well as their bus connections. For segmentation into voltage zones, the power supply for the outputs is fed in separately at the output module. This provides electrically isolated, all-pin disconnectable potential groups/voltage segments.

# Automation system CPX-E

Key features – Diagnostics

## System performance

### Diagnostics

Detailed diagnostic functions are needed in order to quickly locate the causes of errors in the electrical installation and therefore reduce downtimes in production plants. A basic distinction is made between on-the-spot diagnostics using LEDs or an operator unit and diagnostics using a bus interface.


The automation system CPX-E supports on-the-spot diagnostics via a row of LEDs. This is separate from the connection area and therefore provides good visual access to status and diagnostic information. The parameters for maximum storage time and recording method for diagnostic messages can be set.

Module and channel-specific diagnostics is supported, for example

- Undervoltage identification
- Short circuit detection
- Open load detection
- Storage of the 40 most recently occurring errors

Diagnostic messages can be read out via the bus interface in the higher-order controller and visualised for the central recording and evaluation of error causes. This is done using the individual fieldbus-specific channels. There is also the option of access via the integrated web server (remote maintenance via PC/web applications).

## Indicators

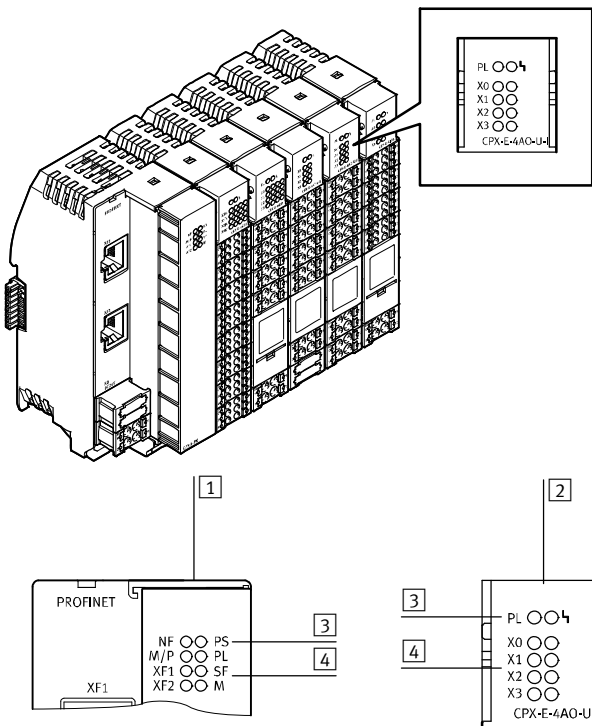

Each module has a row of LEDs for indicating the operating status of the module and of the connected sensors or actuators.

- 1 LED indicators on the bus module/controller
- 2 LED indicators on the input/output module, IO-Link master module
- 3 System-specific LED indicator (e.g. power supply)
- 4 Communication-specific LED indicator (e.g. status of network connection, switching status of sensor)

## Parameterisation

Changes to the application are often required during commissioning. The parameterisable characteristics of the CPX-E modules mean that functions can be very easily changed using the configuration software. It is therefore possible, for example, to reduce the switch-on debounce time

for an input module – normally 3 ms – to 0.1 ms on a “fast” input module for faster processes. Depending on the modules used, parameterisation is performed via the following interfaces:

- Ethernet
- Fieldbus

The following settings are affected by the parameterisation:

- Behaviour in event of communication errors
- Behaviour on being switched back on

- Debounce times and signal extension
- Force settings (defining the signal status)
- Operating method of the diagnostic memory

# Automation system CPX-E

Key features – Addressing

## Addressing

The various CPX-E modules occupy a different number of addresses within the CPX-E system. The maximum address space for bus modules depends on the performance of the fieldbus systems.

Maximum system configuration:

- 1 bus module or controller
- 10 input/output/counter modules and IO-Link master modules

The maximum system configuration can be limited in individual cases by exceeding the address space.

Addresses are allocated automatically in ascending order from left to right, as viewed from the bus module/controller.



Note

Please refer to the detailed description of the configuration/addressing rules in the technical data for CPX-E bus modules.

## Overview – Address space for CPX-E bus modules and controller

	Protocol	Max. total		Max. digital		Max. analogue	
		Inputs	Outputs	Inputs	Outputs	Inputs	Outputs
CPX-E-CEC-C1	CODESYS V3	512 bits	512 bits	160 DI	80 DO	32 AI	32 AO
CPX-E-CEC-M1	CODESYS V3 with SoftMotion	512 bits	512 bits	160 DI	80 DO	32 AI	32 AO
CPX-E-CEC-C1-PN	CODESYS V3	4096 bits	4096 bits	1280 DI	360 DO	256 AI	256 AO
CPX-E-CEC-M1-PN	CODESYS V3 with SoftMotion	4096 bits	4096 bits	1280 DI	360 DO	256 AI	256 AO
CPX-E-CEC-C1-EP	CODESYS V3	4096 bits	4096 bits	1280 DI	360 DO	256 AI	256 AO
CPX-E-CEC-M1-EP	CODESYS V3 with SoftMotion	4096 bits	4096 bits	1280 DI	360 DO	256 AI	256 AO
CPX-E-PN	PROFINET	512 bits	512 bits	160 DI	80 DO	32 AI	32 AO
CPX-E-EC	EtherCAT®	512 bits	512 bits	160 DI	80 DO	32 AI	32 AO
CPX-E-EP	EtherNet/IP	512 bits	512 bits	160 DI	80 DO	32 AI	32 AO
CPX-E-PB	PROFIBUS	512 bits	512 bits	160 DI	80 DO	32 AI	32 AO

DI = Digital inputs (1 bit)  
 DO = Digital outputs (1 bit)  
 AO = Analogue outputs (16 bits)  
 AO = Analogue outputs (16 bits)  
 AI = Analogue inputs (16 bits)



Note

The bandwidth of the bus modules can be restricted by the choice of module and the maximum number of modules.

## Overview – Allocated addresses for CPX-E modules

		Inputs [bit]	Outputs [bit]
CPX-E-16DI	Digital input module, 16 inputs	16	–
CPX-E-1CI	Digital counter module, 1 counter input	96	16
CPX-E-8DO	Digital output module, 8 outputs	–	8
CPX-E-4AI-U-I	Analogue input module, 4 inputs	64	–
CPX-E-4AO-U-I	Analogue output module, 4 outputs	–	64
CPX-E-4IOL	IO-Link master module, 4 ports	64 ... 256	64 ... 256

## Example of CPX-E-PN (PROFINET)

	Inputs [bit]	Outputs [bit]	Notes
3x CPX-E-16DI	48	–	<ul style="list-style-type: none"> <li>• The maximum number of modules is achieved with 10 CPX-E input/output modules</li> <li>• The available address space (512 bits) is not fully used up</li> <li>• No additional modules can be configured</li> </ul>
1x CPX-E-8DO	–	8	
6x CPX-E-4AI-U-I	384	–	
Allocated address space	432	8	


# Automation system CPX-E

Technical data – Stand-alone controller

FESTO



Controller for operating the automation system CPX-E as an autonomous unit  
 Programming and process visualisation take place via CODESYS.  
 The controller includes the power supply for the modules of the automation system and the connected sensors.

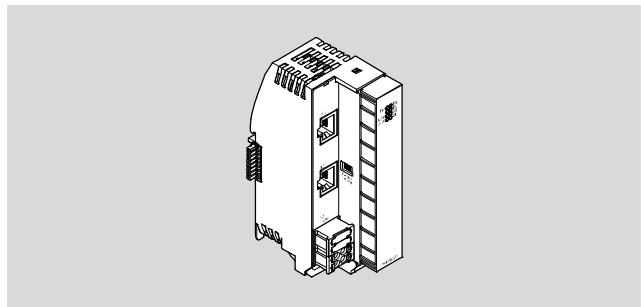

## Application

### Ethernet connection

The controller can be accessed directly via two Ethernet interfaces.  
 There is also the option of connecting

via Modbus/TCP or standard Ethernet (TCP/IP).

The interfaces support crossover detection, which means that there is a

choice of using patch cables or crossover cables.

### Motion control

The controller has an integrated EtherCAT® master.  
 EtherCAT® is used for communication

with other products:

- Motor controllers (CMMP, CMMT)
- Electrical terminal (CPX)

- Valve terminals with I-Port interface via the installation system CTEL (bus node CTEU-EC)

The SoftMotion extension makes it possible to control/execute coordinated multi-axis movements.

### Additional functions

- Web server for read access to the most important parameter and diagnostic functions

- FTP server for data exchange

- Real-time clock, can be set and read using CODESYS

- Internal temperature sensor

# Automation system CPX-E

Technical data – Stand-alone controller

FESTO

General technical data		
CPU data	Dual core 666 MHz 512 MB RAM	
Programming software	CODESYS provided by Festo	
Program memory	12 MB, user program	
Processing time	Approx. 200 µs/1 k instruction	
Flags	120 kB remanent data CODESYS variable concept	
Function elements	Read CPX module diagnostics CPX diagnostic status Copy CPX diagnostic trace And others	
IP address setting	DHCP Via CODESYS	
Control elements	DIL switch for RUN/STOP	
Configuration support	CODESYS V3	
Maximum number of modules	10	
System parameters	Diagnostic memory Fail-safe reaction System start	
Module parameters	Channel alarms bundling Undervoltage diagnostics Channel alarms for undervoltage Process value representation, analogue modules	
Diagnostics via LED	Force mode Network status engineering port 1 Network status, EtherCAT Run Power supply, electronic system/sensors Power supply, load System error	
Address capacity of internal bus inputs/outputs		
Max. address capacity of outputs	[bytes]	64
Max. address capacity of inputs	[bytes]	64

Technical data – Interfaces		
Fieldbus interface		
Protocol	EtherCAT master	
Function	Bus connection outgoing	
Transmission rate	[Mbit/s]	100
Type	Ethernet	
Connection type	Socket	
Connection technology	RJ45	
Number of pins/wires	8	
Galvanic isolation	Yes	
Ethernet interface		
Protocol	EasyIP Modbus TCP TCP/IP	
Function	Diagnostics	
Transmission rate	[Mbit/s]	10
	[Mbit/s]	100
Connection type	Socket	
Connection technology	RJ45	
Number of pins/wires	8	

# Automation system CPX-E

Technical data – Stand-alone controller

Technical data – Electrical components		
Nominal operating voltage DC for electronic system/sensors	[V DC]	24
Permissible voltage fluctuations for electronic system/sensors	[%]	±25
Power failure buffering	[ms]	20
Max. power supply	[A]	8
Intrinsic current consumption at nominal operating voltage for electronic system/sensors	[mA]	Typically 65
Protection against direct and indirect contact		PELV
Electrical connection, power supply		
Function		Electronic system and sensors
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of pins/wires		4
Conductor cross section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on conductor cross section		0.2 ... 2.5 mm <sup>2</sup> for flexible conductor without cable end sleeve

Technical data – Mechanical components		
Type of mounting		With H-rail
Product weight	[g]	145
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	42.2 x 125.8 x 76.5

Materials		
Housing		PA
Note on materials		RoHS-compliant Contains PWIS (paint-wetting impairment substances)

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Note on ambient temperature	[°C]	-5 ... +60 for vertical installation
Storage temperature	[°C]	-20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		0
Relative humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup>
Certification		c UL us - Listed (OL) RCM compliance mark
Degree of protection		IP20


- 1) Corrosion resistance class CRC 0 to Festo standard FN 940070  
No corrosion stress. Applies to small, optically irrelevant standard parts such as threaded pins, circlips and clamping sleeves which are usually only available in a phosphated or burnished version (and possibly oiled) as well as to ball bearings (for components < CRC 3) and plain bearings.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 3) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety characteristics		
CE marking (see declaration of conformity)		To EU EMC Directive
Shock resistance		Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance		Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

# Automation system CPX-E

Technical data – Stand-alone controller


## Connection and display components

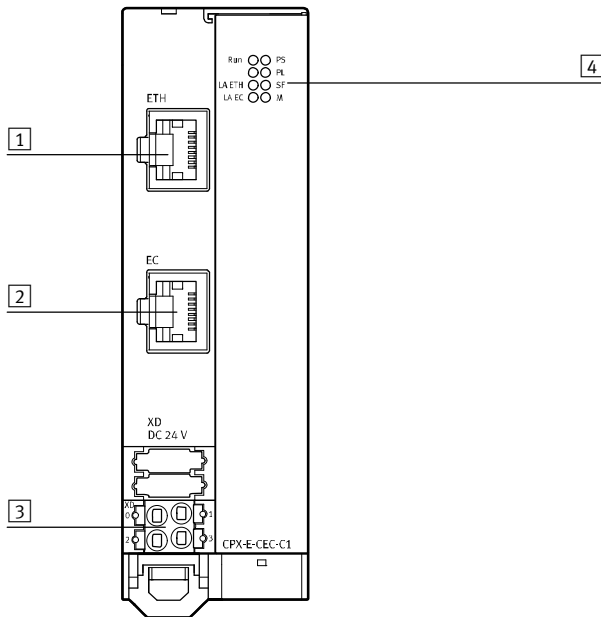

- 1 Ethernet network connection
- 2 EtherCAT master network connection
- 3 Terminal strip for operating voltage supply
- 4 LED indicators

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)


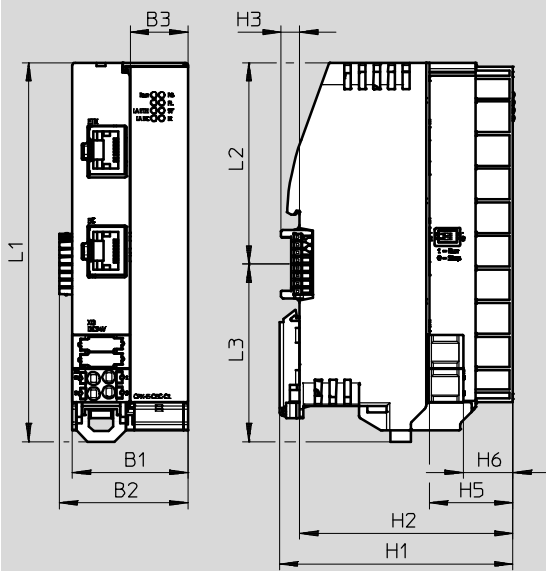


	B1	B2	B3	H1	H2	H3	H4	H5	H6	L1	L2	L3
CPX-E-CEC-C1	37.8	42.2	18.9	76.5	69.9	6	–	27.4	16.3	124.3	66	58.3
CPX-E-CEC-M1												

# Automation system CPX-E

Technical data – Stand-alone controller

Ordering data				
	Bus connection	Additional functions	Part No.	Type
	Stand-alone controller	CODESYS V3	5226780	CPX-E-CEC-C1
		CODESYS V3 with SoftMotion	5266781	CPX-E-CEC-M1

Ordering data – Accessories					
			Cable length [m]	Part No.	Type
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, RJ45, 8-pin	1	8040451	NEBC-D12G4-ES-1-S-R3G4-ET
			3	8040452	NEBC-D12G4-ES-3-S-R3G4-ET
			5	8040453	NEBC-D12G4-ES-5-S-R3G4-ET
			10	8040454	NEBC-D12G4-ES-10-S-R3G4-ET
	Straight plug, RJ45, 8-pin	Straight plug, RJ45, 8-pin	1	8040455	NEBC-R3G4-ES-1-S-R3G4-ET




# Automation system CPX-E

Technical data – PROFINET controller



Controller for operating the automation system CPX-E on PROFINET or as an autonomous unit  
 Programming and process visualisation take place via CODESYS.  
 The controller includes the power supply for the modules of the automation system and the connected sensors.

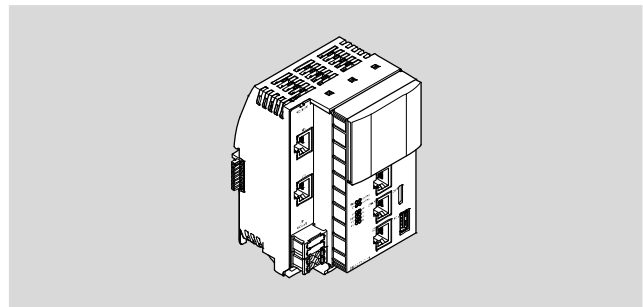

## Application

### Bus connection

<p>The bus connection is provided via RJ45 sockets which meet Ethernet requirements.                  Communication with a higher-order controller takes place via PROFINET. There is also the option of connecting</p>	<p>via Modbus/TCP or standard Ethernet (TCP/IP).                  The controller can be accessed directly via two Ethernet interfaces. The integrated switch supports star and</p>	<p>line topology and enables the network to be divided into segments.                  The controller can be operated both as a higher-order device (master) and as a subordinate device (slave) using the</p>	<p>communication protocol Modbus/TCP. The interfaces support crossover detection, which means that there is a choice of using patch cables or crossover cables.</p>
---	--	--	---

### Motion control

<p>The controller has an integrated EtherCAT® master.                  EtherCAT® is used for communication</p>	<p>with other products:</p> <ul style="list-style-type: none"> <li>• Motor controllers (CMMP, CMMT)</li> <li>• Electrical terminal (CPX)</li> </ul>	<ul style="list-style-type: none"> <li>• Valve terminals with I-Port interface via the installation system CTEL (bus node CTEU-EC)</li> </ul>	<p>The SoftMotion extension makes it possible to control/execute coordinated multi-axis movements.</p>
--	---	---	--

### Data storage

<p>An SD card slot and a USB interface are provided for reading out and storing data.</p>	<p>The maximum memory size for compatible media is 32 GB in FAT format with a partition.</p>	<p>There is no provision to permanently record data on the external media during operation.</p>	<p>Only USB storage media with a current consumption of less than 0.5 A may be used.</p>
---	--	---	--

### Additional functions

<ul style="list-style-type: none"> <li>• Web server for read access to the most important parameter and diagnostic functions</li> </ul>	<ul style="list-style-type: none"> <li>• FTP server for data exchange</li> </ul>	<ul style="list-style-type: none"> <li>• Real-time clock, can be set and read using CODESYS</li> </ul>	<ul style="list-style-type: none"> <li>• Internal temperature sensor</li> </ul>
---	--	--	---

# Automation system CPX-E

Technical data – PROFINET controller



General technical data		
CPU data		Dual core 766 MHz
		512 MB RAM
Storage medium		Micro SD card up to 32 GB
		USB memory stick up to 32 GB
Programming software		CODESYS provided by Festo
Program memory		12 MB, user program
Processing time		Approx. 200 µs/1 k instruction
Flags		120 kB remanent data
		CODESYS variable concept
Function elements		Read CPX module diagnostics
		CPX diagnostic status
		Copy CPX diagnostic trace
		And others
IP address setting		DHCP
		Via CODESYS
		Optional: via control unit CDSB
Control elements		DIL switch for RUN/STOP
		Optional control unit CDSB
Configuration support		Control unit CDSB
		CODESYS V3
		GSDML file
Maximum number of modules		10
System parameters		Diagnostic memory
		Fail-safe reaction
		System start
Module parameters		Channel alarms bundling
		Undervoltage diagnostics
		Channel alarms for undervoltage
		Process value representation, analogue modules
Diagnostics via LED		Force mode
		Network error
		Network status engineering port 1
		Network status, engineering port 2
		Network status, EtherCAT
		Network status port 1
		Network status, port 2
		Run
		Power supply, electronic system/sensors
		Power supply, load
		System error
		Maintenance required
	Address capacity of internal bus inputs/outputs	
Max. address capacity of outputs	[bytes]	64
Max. address capacity of inputs	[bytes]	64

# Automation system CPX-E

Technical data – PROFINET controller

Technical data – Interfaces	
Fieldbus interface 1	
Protocol	PROFINET IO
Function	Bus connection incoming/outgoing
Transmission rate	[Mbit/s] 100
Type	Ethernet
Connection type	2x socket
Connection technology	RJ45
Number of pins/wires	8
Galvanic isolation	Yes
Max. address capacity of outputs	[bytes] 512
Max. address capacity of inputs	[bytes] 512
Fieldbus interface 2	
Protocol	EtherCAT master
Function	Bus connection incoming/outgoing
Transmission rate	[Mbit/s] 100
Type	Ethernet
Connection type	Socket
Connection technology	RJ45
Number of pins/wires	8
Galvanic isolation	Yes
Ethernet interface	
Protocol	EasyIP
	Modbus TCP
	TCP/IP
Function	Switch
	Diagnostics
Transmission rate	[Mbit/s] 10
	[Mbit/s] 100
Connection type	2x socket
Connection technology	RJ45
Number of pins/wires	8
USB interface	
USB interface	USB 2.0

# Automation system CPX-E

FESTO

Technical data – PROFINET controller

Technical data – Electrical components		
Nominal operating voltage DC	[V DC]	24
Nominal operating voltage DC for electronic system/sensors	[V DC]	24
Permissible voltage fluctuations for electronic system/sensors	[%]	±25
Power failure buffering	[ms]	20
Max. power supply	[A]	8
Intrinsic current consumption at nominal operating voltage for electronic system/sensors	[mA]	Typically 150
Protection against direct and indirect contact		PELV
Electrical connection, power supply		
Function		Electronic system and sensors
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of pins/wires		4
Conductor cross section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on conductor cross section		0.2 ... 2.5 mm <sup>2</sup> for flexible conductor without cable end sleeve

Technical data – Mechanical components		
Type of mounting		With H-rail
Product weight	[g]	288
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	75.9 x 124.3 x 82.5

Materials	
Housing	PA
Note on materials	RoHS-compliant Contains PWIS (paint-wetting impairment substances)

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Note on ambient temperature	[°C]	–5 ... +60 for vertical installation
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		0
Relative humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup>
Certification		c UL us - Listed (OL) RCM compliance mark
Degree of protection		IP20


- 1) Corrosion resistance class CRC 0 to Festo standard FN 940070  
No corrosion stress. Applies to small, optically irrelevant standard parts such as threaded pins, circlips and clamping sleeves which are usually only available in a phosphated or burnished version (and possibly oiled) as well as to ball bearings (for components < CRC 3) and plain bearings.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 3) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety characteristics	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

# Automation system CPX-E


Technical data – PROFINET controller

## Connection and display components

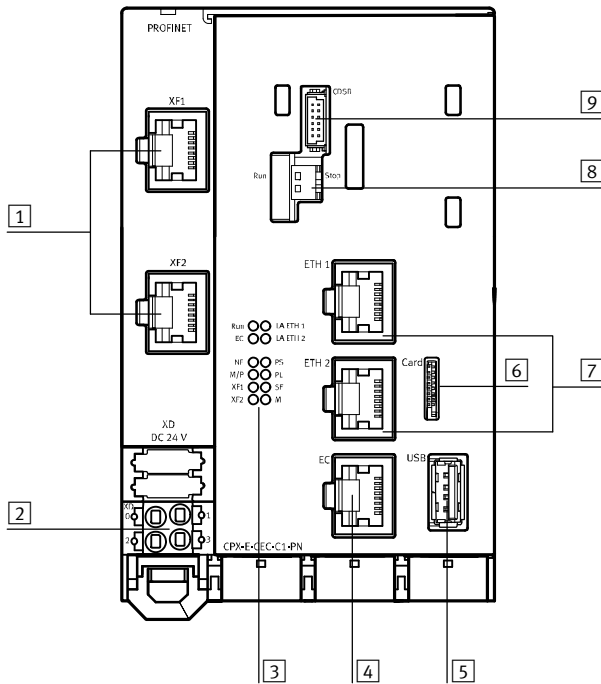

- 1 Network connections 1 and 2, PROFINET IO
- 2 Terminal strip for operating voltage supply
- 3 LED indicators
- 4 EtherCAT master network connection
- 5 USB interface
- 6 Slot for micro SD memory card
- 7 Network connections 1 and 2, Ethernet
- 8 DIL switch for holding and starting projects in CODESYS
- 9 Slot for control unit CDSB

## Display and control unit CDSB-A1

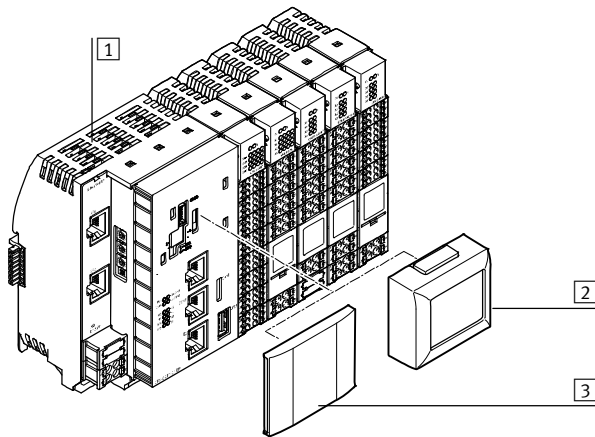

The operator unit CDSB-A1 from Festo is a plug-in display and control unit for the automation system CPX-E. The integrated colour TFT display with touchscreen can be used both for operation and for simple diagnostics of the connected basic unit. User-friendliness is enhanced through fault diagnostics with plain-text error messages.

- Display of full-text messages (errors, warnings, data)
- Easy data backup of parameters and firmware in the unit (e.g. for series commissioning or device replacement)
- 1.77" colour TFT display
- 3 GB user memory


- 1 CPX-E-CEC
- 2 Operator unit CDSB-A1
- 3 Cover (included in the scope of delivery of the CPX-E-CEC)

# Automation system CPX-E

Technical data – PROFINET controller

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

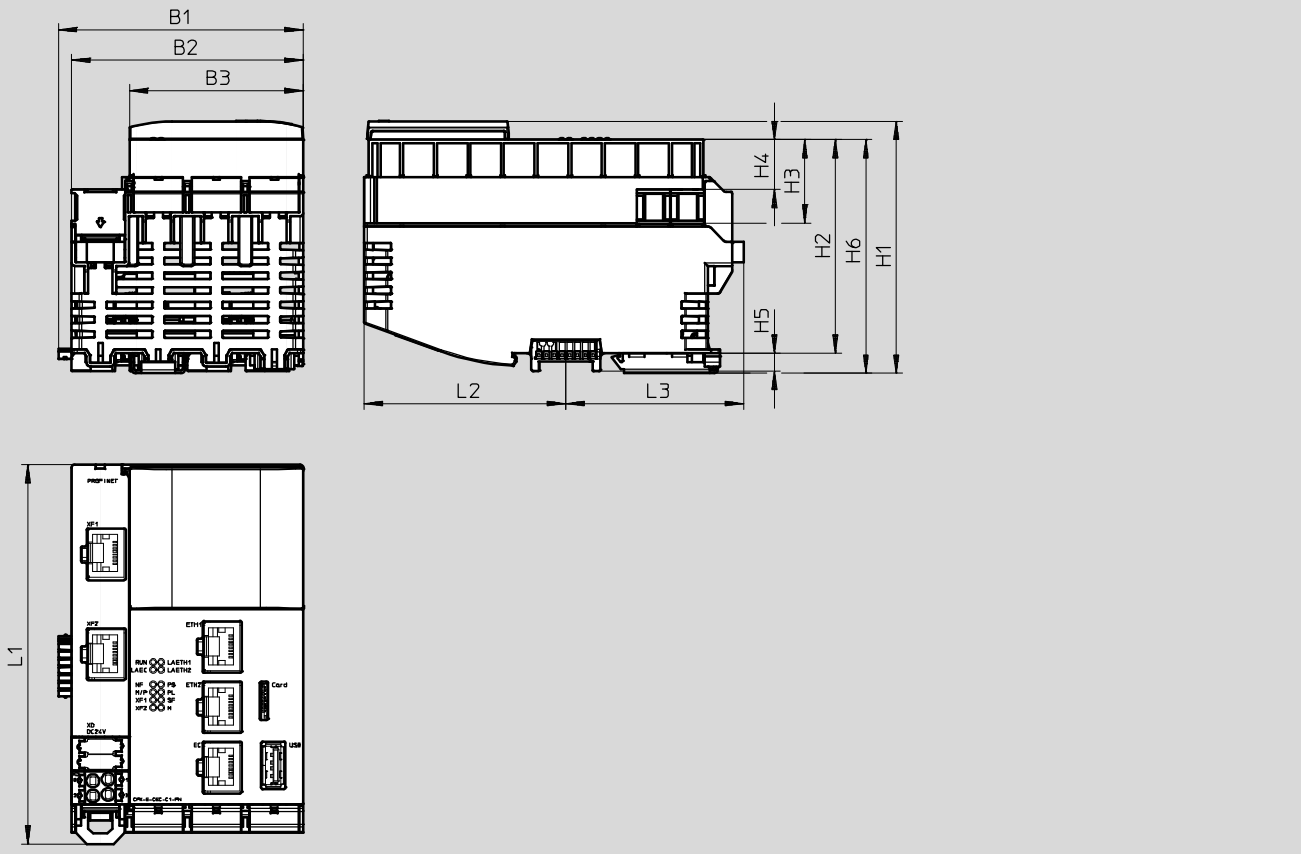





	B1	B2	B3	H1	H2	H3	H4	H5	H6	L1	L2	L3
CPX-E-CEC-...PN	80.2	75.9	56.9	82.5	69.9	27.4	16.3	6	76.5	124.3	66	58.3

# Automation system CPX-E

Technical data – PROFINET controller


Ordering data				
	Bus connection	Additional functions	Part No.	Type
	PROFINET IO	CODESYS V3	4252741	CPX-E-CEC-C1-PN
		CODESYS V3 with SoftMotion	4252743	CPX-E-CEC-M1-PN

Ordering data – Accessories					
			Cable length [m]	Part No.	Type
	Memory card	32 GB	–	4553880	CAMC-M-MS-G32
	Display and control unit	<ul style="list-style-type: none"> <li>• Colour touchscreen</li> <li>• Diagnostic function</li> <li>• Update function for CPX-E-CEC (in plugged-in state)</li> </ul>	–	8070984	CDSB-A1
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, RJ45, 8-pin	1	8040451	NEBC-D12G4-ES-1-S-R3G4-ET
			3	8040452	NEBC-D12G4-ES-3-S-R3G4-ET
			5	8040453	NEBC-D12G4-ES-5-S-R3G4-ET
			10	8040454	NEBC-D12G4-ES-10-S-R3G4-ET
	Straight plug, RJ45, 8-pin	Straight plug, RJ45, 8-pin	1	8040455	NEBC-R3G4-ES-1-S-R3G4-ET


# Automation system CPX-E

Technical data – EtherNet/IP controller

FESTO



Controller for operating the automation system CPX-E on EtherNet/IP or as an autonomous unit  
 Programming and process visualisation take place via CODESYS.  
 The controller includes the power supply for the modules of the automation system and the connected sensors.

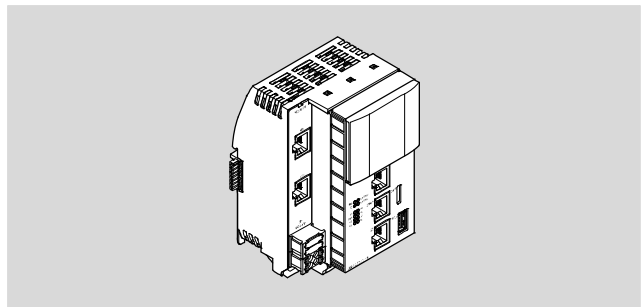

## Application

### Bus connection

The bus connection is provided via RJ45 sockets which meet Ethernet requirements.  
 Communication with a higher-order controller takes place via EtherNet/IP.  
 There is also the option of connecting

via Modbus/TCP or standard Ethernet (TCP/IP).  
 The controller can be accessed directly via two Ethernet interfaces. The integrated switch supports star and

line topology and enables the network to be divided into segments.  
 The controller can be operated both as a higher-order device (master) and as a subordinate device (slave) using the

communication protocol Modbus/TCP. The interfaces support crossover detection, which means that there is a choice of using patch cables or crossover cables.

## Motion control

The controller has an integrated EtherCAT® master.  
 EtherCAT® is used for communication

with other products:

- Motor controllers (CMMP, CMMT)
- Electrical terminal (CPX)

- Valve terminals with I-Port interface via the installation system CTEL (bus node CTEU-EC)

The SoftMotion extension makes it possible to control/execute coordinated multi-axis movements.

## Data storage

An SD card slot and a USB interface are provided for reading out and storing data.

The maximum memory size for compatible media is 32 GB in FAT format with a partition.

There is no provision to permanently record data on the external media during operation.

Only USB storage media with a current consumption of less than 0.5 A may be used.

## Additional functions

- Web server for read access to the most important parameter and diagnostic functions

- FTP server for data exchange

- Real-time clock, can be set and read using CODESYS

- Internal temperature sensor



# Automation system CPX-E

Technical data – EtherNet/IP controller



General technical data		
CPU data		Dual core 766 MHz
		512 MB RAM
Storage medium		Micro SD card up to 32 GB
		USB memory stick up to 32 GB
Programming software		CODESYS provided by Festo
Program memory		12 MB, user program
Processing time		Approx. 200 µs/1 k instruction
Flags		120 kB remanent data
		CODESYS variable concept
Function elements		Read CPX module diagnostics
		CPX diagnostic status
		Copy CPX diagnostic trace
		And others
IP address setting		DHCP
		Via CODESYS
		Optional: via control unit CDSB
Control elements		DIL switch for RUN/STOP
		Optional control unit CDSB
		Rotary switch for address setting
Configuration support		Control unit CDSB
		CODESYS V3
Maximum number of modules		10
System parameters		Diagnostic memory
		Fail-safe reaction
		System start
Module parameters		Channel alarms bundling
		Undervoltage diagnostics
		Channel alarms for undervoltage
		Process value representation, analogue modules
Diagnostics via LED		Force mode
Address capacity of internal bus inputs/outputs		
Max. address capacity of outputs	[bytes]	64
Max. address capacity of inputs	[bytes]	64

# Automation system CPX-E

Technical data – EtherNet/IP controller

FESTO

Technical data – Interfaces	
Fieldbus interface 1	
Protocol	EtherNet/IP
Function	Bus connection incoming/outgoing
Transmission rate	[Mbit/s] 100
Type	Ethernet
Connection type	2x socket
Connection technology	RJ45
Number of pins/wires	8
Electrical isolation	Yes
Max. address capacity of outputs	[bytes] 512
Max. address capacity of inputs	[bytes] 512
Fieldbus interface 2	
Protocol	EtherCAT master
Function	Bus connection incoming/outgoing
Transmission rate	[Mbit/s] 100
Type	Ethernet
Connection type	Socket
Connection technology	RJ45
Number of pins/wires	8
Electrical isolation	Yes
Ethernet interface	
Protocol	EasyIP
	Modbus TCP
	TCP/IP
Function	Switch
	Diagnostics
Transmission rate	[Mbit/s] 10
	[Mbit/s] 100
Connection type	2x socket
Connection technology	RJ45
Number of pins/wires	8
USB interface	
USB interface	USB 2.0

# Automation system CPX-E

Technical data – EtherNet/IP controller

FESTO

Technical data – Electrical components		
Nominal operating voltage DC	[V DC]	24
Nominal operating voltage DC for electronic system/sensors	[V DC]	24
Permissible voltage fluctuations for electronic system/sensors	[%]	±25
Power failure buffering	[ms]	20
Max. power supply	[A]	8
Intrinsic current consumption at nominal operating voltage for electronic system/sensors	[mA]	Typically 150
Protection against direct and indirect contact		PELV
Electrical connection, power supply		
Function		Electronic system and sensors
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of pins/wires		4
Conductor cross section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on conductor cross section		0.2 ... 2.5 mm <sup>2</sup> for flexible conductor without cable end sleeve

Technical data – Mechanical components		
Type of mounting		With H-rail
Product weight	[g]	288
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	75.9 x 124.3 x 82.5

Materials	
Housing	PA
Note on materials	RoHS-compliant Contains PWIS (paint-wetting impairment substances)

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Note on ambient temperature	[°C]	–5 ... +60 for vertical installation
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC <sup>1)</sup>		0
Relative humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>3)</sup>		To EU EMC Directive <sup>2)</sup>
Certification		c UL us - Listed (OL) RCM compliance mark
Degree of protection		IP20

- 1) Corrosion resistance class CRC 0 to Festo standard FN 940070  
No corrosion stress. Applies to small, optically irrelevant standard parts such as threaded pins, circlips and clamping sleeves which are usually only available in a phosphated or burnished version (and possibly oiled) as well as to ball bearings (for components < CRC 3) and plain bearings.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 3) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.


Safety characteristics	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

# Automation system CPX-E

Technical data – EtherNet/IP controller


## Connection and display components

CPX-E-CEC-...

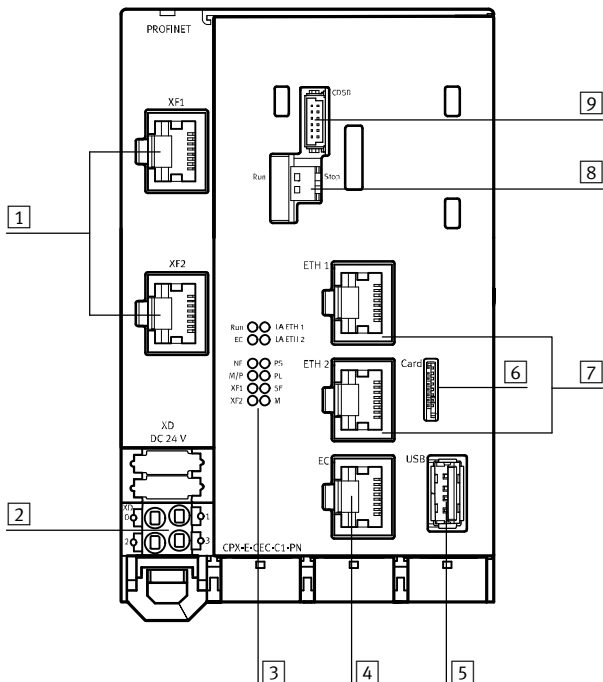

- 1 Network connections 1 and 2, EtherNet/IP
- 2 Terminal strip for operating voltage supply
- 3 LED indicators
- 4 EtherCAT master network connection
- 5 USB interface
- 6 Slot for micro SD memory card
- 7 Network connections 1 and 2, Ethernet
- 8 DIL switch for holding and starting projects in CODESYS
- 9 Slot for control unit CDSB

## Display and control unit CDSB-A1

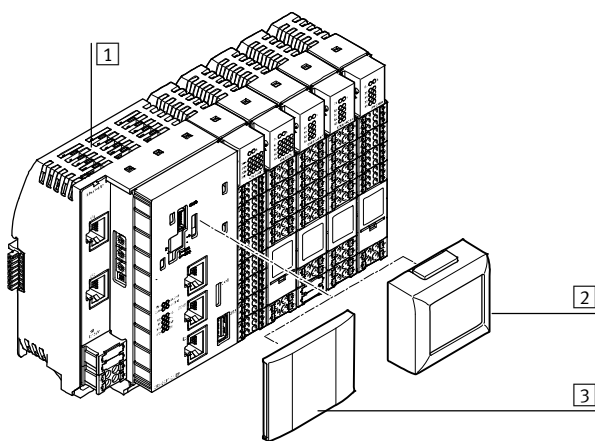

The operator unit CDSB-A1 from Festo is a plug-in display and control unit for the automation system CPX-E. The integrated colour TFT display with touchscreen can be used both for operation and for simple diagnostics of the connected basic unit. User-friendliness is enhanced through fault diagnostics with plain-text error messages.

- Display of full-text messages (errors, warnings, data)
- Easy data backup of parameters and firmware in the unit (e.g. for series commissioning or device replacement)
- 1.77" colour TFT display
- 3 GB user memory


- 1 CPX-E-CEC
- 2 Operator unit CDSB-A1
- 3 Cover (included in the scope of delivery of the CPX-E-CEC)

# Automation system CPX-E

Technical data – EtherNet/IP controller

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

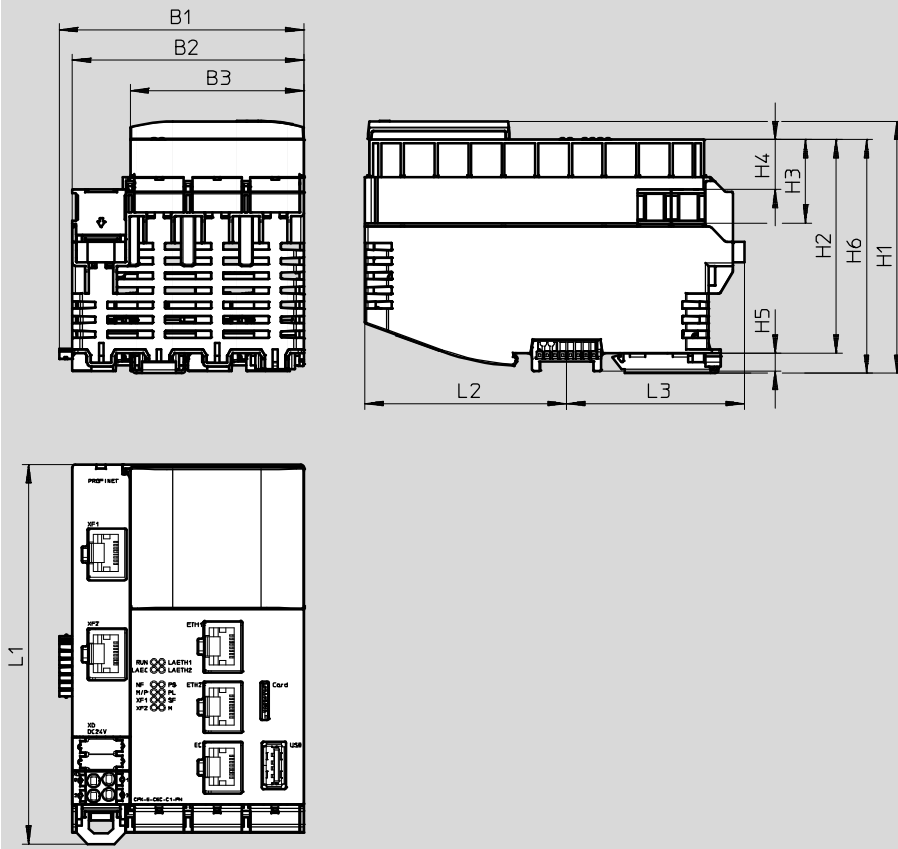






	B1	B2	B3	H1	H2	H3	H4	H5	H6	L1	L2	L3
CPX-E-CEC-...EP	80.2	75.9	56.9	82.5	69.9	27.4	16.3	6	76.5	124.3	66	58.3

# Automation system CPX-E

Technical data – EtherNet/IP controller

**FESTO**

Ordering data				
	Bus connection	Additional functions	Part No.	Type
	EtherNet/IP	CODESYS V3	<b>4252742</b>	<b>CPX-E-CEC-C1-EP</b>
		CODESYS V3 with SoftMotion	<b>4252744</b>	<b>CPX-E-CEC-M1-EP</b>


Ordering data – Accessories					
			Cable length [m]	Part No.	Type
	Memory card	32 GB	–	<b>4553880</b>	<b>CAMC-M-MS-G32</b>
	Display and control unit	<ul style="list-style-type: none"> <li>• Colour touchscreen</li> <li>• Diagnostic function</li> <li>• Update function for CPX-E-CEC (in plugged-in state)</li> </ul>	–	<b>8070984</b>	<b>CDSB-A1</b>
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, RJ45, 8-pin	1	<b>8040451</b>	<b>NEBC-D12G4-ES-1-S-R3G4-ET</b>
			3	<b>8040452</b>	<b>NEBC-D12G4-ES-3-S-R3G4-ET</b>
			5	<b>8040453</b>	<b>NEBC-D12G4-ES-5-S-R3G4-ET</b>
			10	<b>8040454</b>	<b>NEBC-D12G4-ES-10-S-R3G4-ET</b>
	Straight plug, RJ45, 8-pin	Straight plug, RJ45, 8-pin	1	<b>8040455</b>	<b>NEBC-R3G4-ES-1-S-R3G4-ET</b>

# Automation system CPX-E

Technical data – PROFINET bus module



Bus module for operating the automation system CPX-E on PROFINET. Data is transmitted on the basis of Industrial Ethernet. The bus module includes the power supply for the modules of the automation system and the connected sensors.

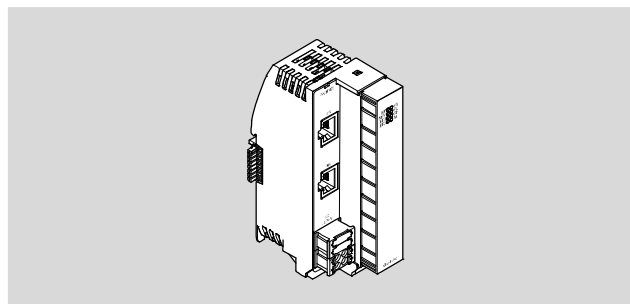

Application	Additional functions	Device description file	Web server
-------------	----------------------	-------------------------	------------

<b>Bus connection</b> The bus connection is provided via RJ45 sockets which meet Ethernet requirements. Communication with a higher-order controller takes place via PROFINET with real-time protocol (real time RT or isochronous real time IRT). The integrated switch supports star and line topology and enables division of the network into segments.	<ul style="list-style-type: none"> <li>The bus module supports PROFIenergy for reducing the energy requirement through selective switching off of consumers when they are not required</li> <li>The bus module has crossover detection, which means that there is the option of using patch cables or crossover cables</li> </ul>	The bus module is configured using a device description file (GSDML file) which includes all the necessary information for parameterisation.	The integrated web server enables read access to the most important parameter and diagnostic functions.
--	---	--	---

### General technical data

Fieldbus interface	
Protocol	PROFINET IRT PROFINET IRT
Function	Bus connection incoming/outgoing
Transmission rate [Mbps]	100
Type	Ethernet
Connection type	2x socket
Connection technology	RJ45
Number of pins/wires	8
Electrical isolation	Yes
Max. address volume for outputs [byte]	64
Max. address volume for inputs [byte]	64
Address volume of internal bus inputs/outputs	
Max. address volume for outputs [byte]	64
Note on outputs	62 bytes with I/O diagnostic interface
	64 bytes with status bits
	64 bytes without diagnostics
Max. address volume for inputs [byte]	64
Note on inputs	62 bytes with I/O diagnostic interface
	62 bytes with status bits
	64 bytes without diagnostics

# Automation system CPX-E

Technical data – PROFINET bus module

FESTO

General data	
Configuration support	GSDML file
Maximum number of modules	10
System parameters	Diagnostic memory
	Fail-safe response
	Force mode
	System start
Module parameters	Channel alarms bundling
	Undervoltage diagnostics
	Channel alarms undervoltage
	Process value representation, analogue modules
Diagnostics via LED	Force mode
	Network errors
	Network status connection 1
	Network status connection 2
	Power supply electronics/sensors
	Power supply load
	System error
	Maintenance required
Diagnostics via bus	Parameterisation error
	Lower limit value not met
	Upper limit value exceeded
	Wire break
	Short circuit
	PROFIsafe addresses different
	Undervoltage
	Over-temperature

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Power failure buffering	[ms]	20
Max. power supply	[A]	8
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 75
Protection against direct and indirect contact		PELV
Electrical connection, power supply		
Function		Electronics and sensors
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of pins/wires		4
Wire cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	145
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	42.2 x 125.8 x 76.5

Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances



# Automation system CPX-E


Technical data – PROFINET bus module

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Note on ambient temperature		–5 ... +60 °C for vertical installation
Storage temperature	[°C]	–20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

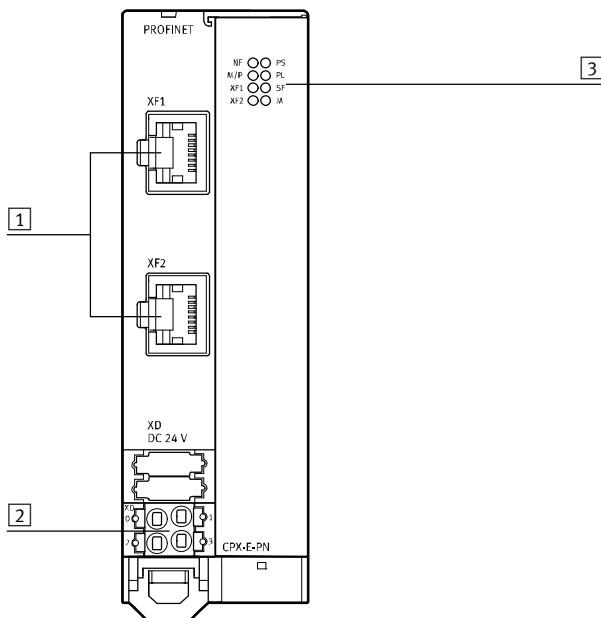

- 1 Network connections 1 and 2, PROFINET
- 2 Terminal strip for operating voltage supply
- 3 LED indicators


# Automation system CPX-E

Technical data – PROFINET bus module

FESTO


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


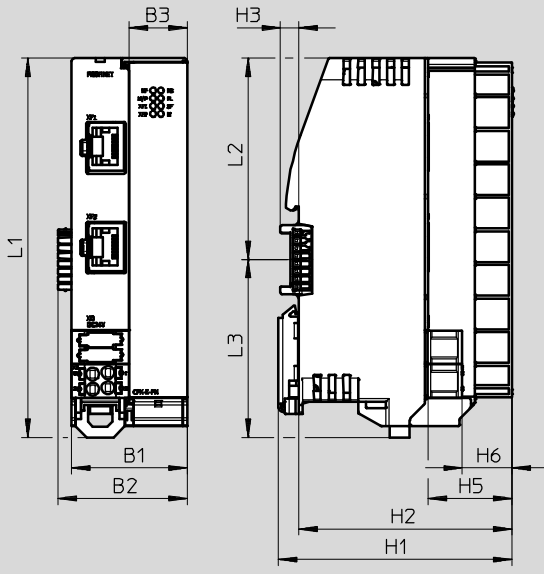


	B1	B2	B3	H1	H2	H3	H5	H6	L1	L2	L3
CPX-E-PN	37.8	42.2	18.9	76.5	69.9	6	27.4	16.3	124.3	66	58.3

## Ordering data

	Part No.	Type
 PROFINET bus module	<b>4080497</b>	<b>CPX-E-PN</b>

## Ordering data – Accessories


	Electrical connection 1	Electrical connection 2	Cable length [m]	Part No.	Type
 Straight plug connector, M12x1, 4-pin, D-coded		Straight plug connector, RJ45, 8-pin	1	<b>8040451</b>	<b>NEBC-D12G4-ES-1-S-R3G4-ET</b>
			3	<b>8040452</b>	<b>NEBC-D12G4-ES-3-S-R3G4-ET</b>
			5	<b>8040453</b>	<b>NEBC-D12G4-ES-5-S-R3G4-ET</b>
			10	<b>8040454</b>	<b>NEBC-D12G4-ES-10-S-R3G4-ET</b>
 Straight plug connector, RJ45, 8-pin		Straight plug connector, RJ45, 8-pin	1	<b>8040455</b>	<b>NEBC-R3G4-ES-1-S-R3G4-ET</b>

# Automation system CPX-E

Technical data – EtherCAT bus module



Bus module for operating the automation system CPX-E on EtherCAT. Data is transmitted on the basis of Industrial Ethernet. The bus module includes the power supply for the modules of the automation system and the connected sensors.

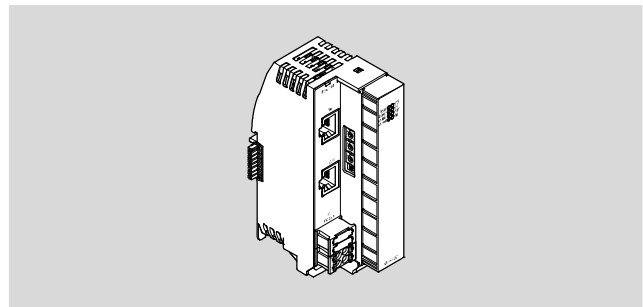

## Application

Bus connection	Additional functions	Device description file	Web server
<p>The bus connection is provided via RJ45 sockets which meet Ethernet requirements. All kinds of topologies are supported. Manual setting of the EtherCAT address using a rotary coding switch enables the bus to be coupled and decoupled during operation (hot connect).</p>	<ul style="list-style-type: none"> <li>The product supports the “distributed clocks” function for the precise synchronisation of participants in an EtherCAT network</li> <li>The bus module has crossover detection, which means that there is the option of using patch cables or crossover cables</li> </ul>	<p>The bus module is configured using a device description file (ESI file) which includes all the necessary information for parameterisation.</p>	<p>The integrated web server enables read access to the most important parameter and diagnostic functions.</p>

## General technical data

Fieldbus interface	
Protocol	EtherCAT®
Function	Bus connection incoming/outgoing
Transmission rate	[Mbps] 100
Type	EtherCAT®
Connection type	2x socket
Connection technology	RJ45
Number of poles/wires	8
Electrical isolation	Yes
Max. address volume for outputs	[byte] 64
Max. address volume for inputs	[byte] 64
Address volume of internal bus inputs/outputs	
Max. address volume for outputs	[byte] 64
Note on outputs	62 bytes with I/O diagnostic interface
	64 bytes with status bits
	64 bytes without diagnostics
Max. address volume for inputs	[byte] 64
Note on inputs	62 bytes with I/O diagnostic interface
	63 bytes with status bits
	64 bytes without diagnostics

# Automation system CPX-E

Technical data – EtherCAT bus module

FESTO

General technical data	
Configuration support	ESI file
Maximum number of modules	10
System parameters	Diagnostic memory
	Fail-safe response
	Force mode
	System start
Module parameters	Channel alarms bundling
	Undervoltage diagnostics
	Channel alarms undervoltage
Diagnostics via LED	Connection status
	EtherCAT error
	EtherCAT RUN
	Power supply electronics/sensors
	Power supply load
	System error
	Maintenance required
Diagnostics via bus	Parameterisation error
	Lower limit value not met
	Upper limit value exceeded
	Wire break
	Short circuit
	Undervoltage
	Over-temperature

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Power failure buffering	[ms]	20
Max. power supply	[A]	8
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 64
Protection against direct and indirect contact		PELV
Electrical connection, power supply		
Function		Electronics and sensors
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Wire cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	145
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	42.2 x 125.8 x 76.5

Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

# Automation system CPX-E


Technical data – EtherCAT bus module

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Note on ambient temperature		-5 ... +60 °C for vertical installation
Storage temperature	[°C]	-20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM compliance mark
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

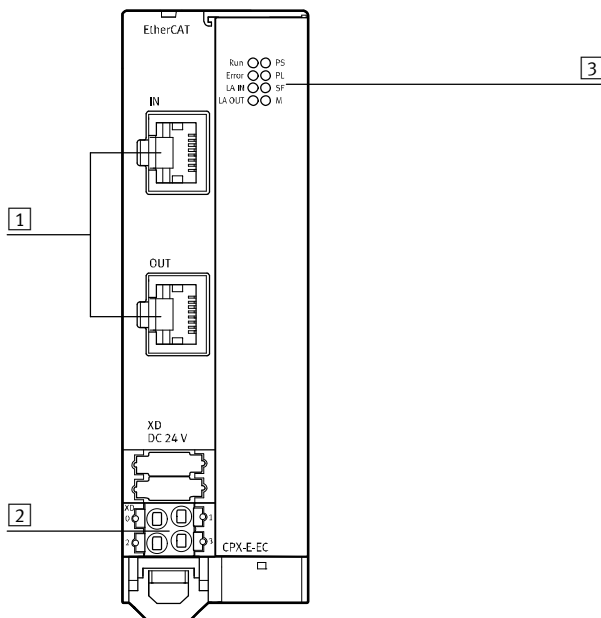


- 1 Network connections 1 and 2, EtherCAT
- 2 Terminal strip for operating voltage supply
- 3 LED indicators

# Automation system CPX-E

Technical data – EtherCAT bus module


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


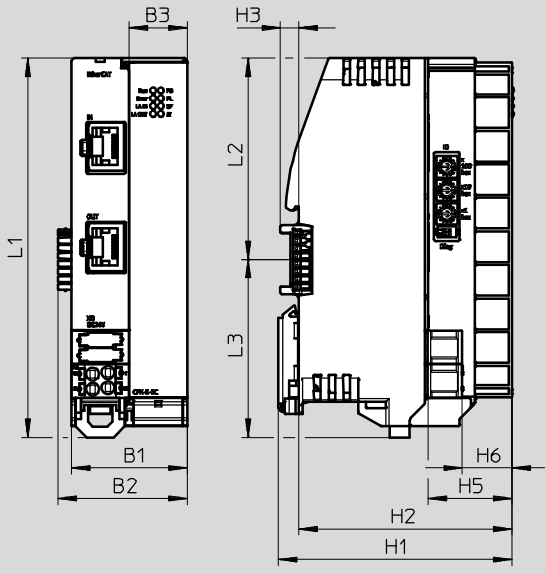


	B1	B2	B3	H1	H2	H3	H5	H6	L1	L2	L3
CPX-E-EC	37.8	42.2	18.9	76.5	69.9	6	27.4	16.3	124.3	66	58.3

## Ordering data

		Part No.	Type
	EtherCAT bus module	<b>4080498</b>	<b>CPX-E-EC</b>

## Ordering data – Accessories


	Electrical connection 1	Electrical connection 2	Cable length [m]	Part No.	Type
	Straight plug connector, M12x1, 4-pin, D-coded	Straight plug connector, RJ45, 8-pin	1	<b>8040451</b>	<b>NEBC-D12G4-ES-1-S-R3G4-ET</b>
			3	<b>8040452</b>	<b>NEBC-D12G4-ES-3-S-R3G4-ET</b>
			5	<b>8040453</b>	<b>NEBC-D12G4-ES-5-S-R3G4-ET</b>
			10	<b>8040454</b>	<b>NEBC-D12G4-ES-10-S-R3G4-ET</b>
	Straight plug connector, RJ45, 8-pin	Straight plug connector, RJ45, 8-pin	1	<b>8040455</b>	<b>NEBC-R3G4-ES-1-S-R3G4-ET</b>

# Automation system CPX-E

Technical data – EtherNet/IP bus module



Bus module for operating the automation system CPX-E in an Ethernet network using the protocols EtherNet/IP or Modbus/TCP. Data is transmitted on the basis of Industrial Ethernet. The bus module includes the power supply for the modules of the automation system and the connected sensors.

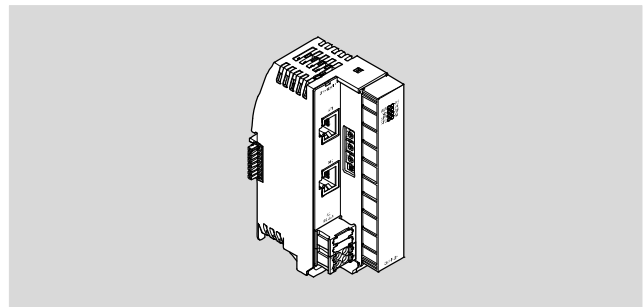

Application			
Bus connection	Additional functions	Device description file	Web server
<p>The bus connection is provided via RJ45 sockets which meet Ethernet requirements.</p> <p>The integrated switch supports star and line topology and enables division of the network into segments.</p>	<ul style="list-style-type: none"> <li>The bus module has quick-start capability (quick connect)</li> <li>The bus module has crossover detection, which means that there is the option of using patch cables or crossover cables</li> </ul>	<p>The bus module is configured using a device description file (EDS file) which includes all the necessary information for parameterisation.</p>	<p>The integrated web server enables read access to the most important parameter and diagnostic functions.</p>

General technical data		
Fieldbus interface		
Protocol		EtherNet/IP Modbus/TCP
Function		Bus connection incoming/outgoing
Transmission rate	[Mbps]	100
Type		Ethernet
Connection type		2x socket
Connection technology		RJ45
Number of poles/wires		8
Electrical isolation		Yes
Max. address volume for outputs	[byte]	64
Max. address volume for inputs	[byte]	64
Address volume of internal bus inputs/outputs		
Max. address volume for outputs	[byte]	64
Note on outputs		62 bytes with I/O diagnostic interface
		64 bytes with status bits
		64 bytes without diagnostics
Max. address volume for inputs	[byte]	64
Note on inputs		62 bytes with I/O diagnostic interface
		63 bytes with status bits
		64 bytes without diagnostics

# Automation system CPX-E

Technical data – EtherNet/IP bus module

FESTO

General data	
Configuration support	EDS file
Maximum number of modules	10
System parameters	Diagnostic memory
	Fail-safe response
	Force mode
	Idle response
	System start
Module parameters	Channel alarms bundling
	Undervoltage diagnostics
	Channel alarms undervoltage
Diagnostics via LED	Network status
	Module status
	Connection status
	Power supply electronics/sensors
	Power supply load
	System error
	Maintenance required
Diagnostics via bus	Parameterisation error
	Lower limit value not met
	Upper limit value exceeded
	Wire break
	Short circuit
	Undervoltage
	Over-temperature

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Power failure buffering	[ms]	20
Max. power supply	[A]	8
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 65
Protection against direct and indirect contact		PELV
Electrical connection, power supply		
Function		Electronics and sensors
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Wire cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	145
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	42.2 x 125.8 x 76.5

Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances



# Automation system CPX-E


Technical data – EtherNet/IP bus module

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Note on ambient temperature		–5 ... +60 °C for vertical installation
Storage temperature	[°C]	–20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM compliance mark
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

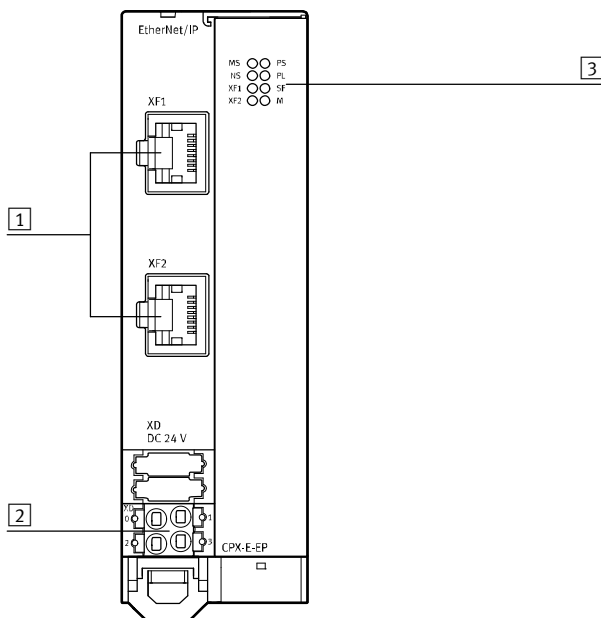

- 1 Network connections 1 and 2, EtherNet/IP
- 2 Terminal strip for operating voltage supply
- 3 LED indicators


# Automation system CPX-E

Technical data – EtherNet/IP bus module

FESTO


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


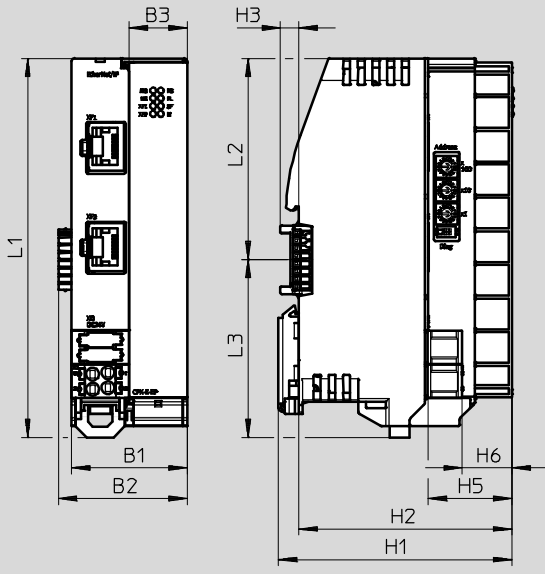


	B1	B2	B3	H1	H2	H3	H5	H6	L1	L2	L3
CPX-E-EP	37.8	42.2	18.9	76.5	69.9	6	27.4	16.3	124.3	66	58.3

## Ordering data

	Part No.	Type
 EtherNet/IP bus module	<b>4080499</b>	<b>CPX-E-EP</b>

## Ordering data – Accessories


	Electrical connection 1	Electrical connection 2	Cable length [m]	Part No.	Type
 Straight plug connector, M12x1, 4-pin, D-coded	Straight plug connector, RJ45, 8-pin		1	<b>8040451</b>	<b>NEBC-D12G4-ES-1-S-R3G4-ET</b>
			3	<b>8040452</b>	<b>NEBC-D12G4-ES-3-S-R3G4-ET</b>
			5	<b>8040453</b>	<b>NEBC-D12G4-ES-5-S-R3G4-ET</b>
			10	<b>8040454</b>	<b>NEBC-D12G4-ES-10-S-R3G4-ET</b>
 Straight plug connector, RJ45, 8-pin	Straight plug connector, RJ45, 8-pin		1	<b>8040455</b>	<b>NEBC-R3G4-ES-1-S-R3G4-ET</b>

# Automation system CPX-E

Technical data – PROFIBUS bus module



Bus module for operating the automation system CPX-E on PROFIBUS. Data transmission takes place using an RS485 interface. The bus module includes the power supply for the modules of the automation system and the connected sensors.

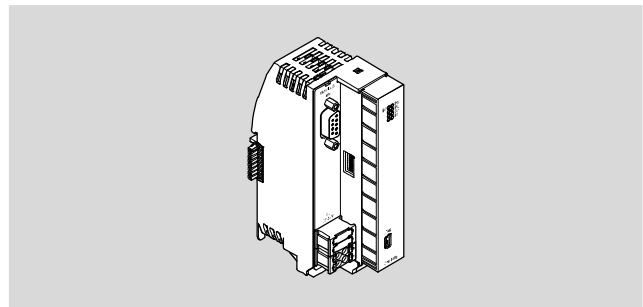

Application		
Bus connection	Additional functions	Parameterisation
The bus connection is provided via an RS485 interface; the use of an optical adapter makes it possible to transmit data through a fibre-optic cable. The bus module can be combined with up to 31 other participants in a network.	The bus module has a mini-USB interface via which system data can be read and the bus module can be parameterised.	The parameterisation data can be sent from the higher-order controller to the bus module via the network.

General technical data						
Fieldbus interface						
Protocol	PROFIBUS DP					
Function	Bus connection incoming/outgoing					
Transmission rate	[kbps]	9.6	19.2	93.75	187.5	500
	[Mbps]	1.5	3	6	12	
Type	PROFIBUS					
Connection type	Socket					
Connection technology	Sub-D					
Number of pins/wires	9					
Note for fieldbus interface	Optional connection technology with accessories: plug connector/socket M12x1 B-coded, 5-pin, degree of protection IP65					
Electrical isolation	Yes					
Max. address volume for outputs	[byte]	64				
Max. address volume for inputs	[byte]	64				
Service interface						
Function	Diagnostics and parameterisation					
Connection type	Socket					
Connection technology	USB 2.0 type B mini					
Number of poles/wires	5					
Address volume of internal bus inputs/outputs						
Max. address volume for outputs	[byte]	64				
Note on outputs	62 bytes with I/O diagnostic interface					
	64 bytes with status bits					
	64 bytes without diagnostics					
Max. address volume for inputs	[byte]	64				
Note on inputs	62 bytes with I/O diagnostic interface					
	63 bytes with status bits					
	64 bytes without diagnostics					

# Automation system CPX-E

Technical data – PROFIBUS bus module

FESTO

General data	
Conforms to	NAMUR NE 21
Control elements	DIL switches
Configuration support	GSD file
Maximum number of modules	10
System parameters	Diagnostic memory
	Fail-safe response
	Force mode
	System start
Module parameters	Undervoltage diagnostics
	Process value representation, analogue modules
Diagnostics via LED	Bus error
	Force mode
	Power supply electronics/sensors
	Power supply load
	System error
Diagnostics via bus	Parameterisation error
	Overflow buffer
	Transmission error
	Requested function not supported
	Not ready for data exchange
	Lower limit value not met
	Upper limit value exceeded
	Wire break
	Short circuit
	Undervoltage
	Watchdog/I/O status

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Power failure buffering	[ms]	20
Max. power supply	[A]	8
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 75
Protection against direct and indirect contact		PELV
Electrical connection, power supply		
Function		Electronics and sensors
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Wire cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	145
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	42.2 x 125.8 x 76.5

Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

# Automation system CPX-E


Technical data – PROFIBUS bus module

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Note on ambient temperature		–5 ... +60 °C for vertical installation
Storage temperature	[°C]	–20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM compliance mark
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

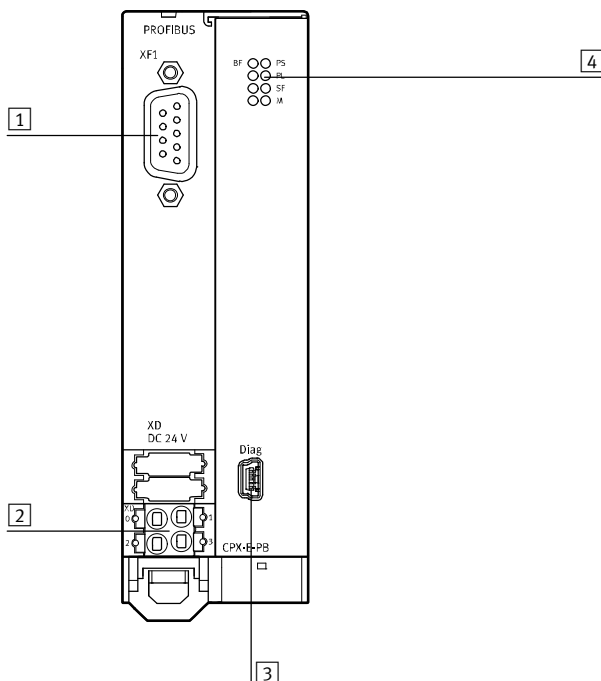


- 1 Network connection, PROFIBUS
- 2 Terminal strip for operating voltage supply
- 3 USB interface, mini USB
- 4 LED indicators

# Automation system CPX-E

Technical data – PROFIBUS bus module


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


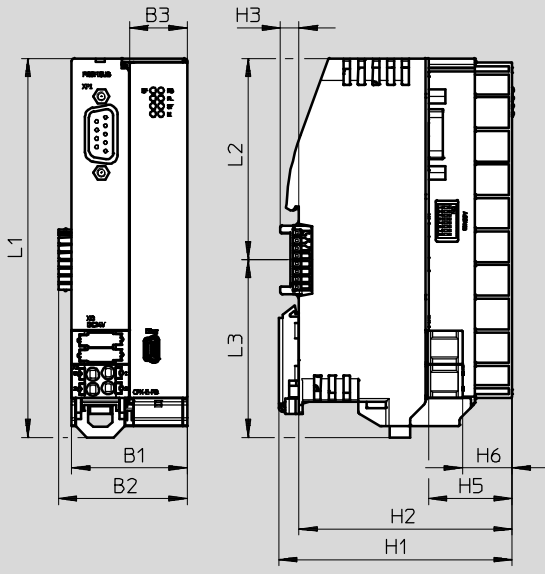


	B1	B2	B3	H1	H2	H3	H5	H6	L1	L2	L3
CPX-E-PB	37.8	42.2	18.9	76.5	69.9	6	27.4	16.3	124.3	66	58.3

## Ordering data

		Part No.	Type
	PROFIBUS bus module	<b>4080496</b>	<b>CPX-E-PB</b>

## Ordering data – Accessories

		Part No.	Type
	Sub-D plug connector, straight	<b>532216</b>	<b>FBS-SUB-9-GS-DP-B</b>
	Sub-D straight plug connector with terminating resistor and programming interface	<b>574589</b>	<b>NECU-S1W9-C2-APB</b>

# Automation system CPX-E


Technical data – Digital input modules

## Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.).

## Area of application

- Input modules for 24 V DC sensor signals
- Terminal strip
- Display of the input statuses for each input signal via an assigned LED
- Operating voltage supply 24 V DC for all connected sensors
- Diagnostic LED for short circuit/overload of sensor supply

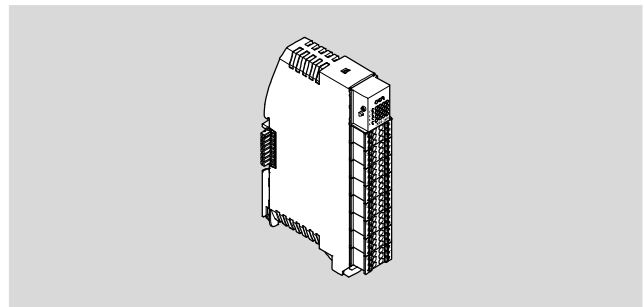

General technical data				
No. of inputs				16
Max. address capacity inputs	[byte]			2
Input characteristic curve				To IEC 61131-2, type 3
Switching logic at inputs				PNP (positive switching) 2- and 3-wire sensors to IEC 61131-2
Fuse protection (short circuit)				Internal electronic fuse per module
Electrical isolation between channel and internal bus				None
Electrical isolation between channels				None
Switching level		Signal 0		≤5 V
		Signal 1		≥11 V
Input debounce time	[ms]	0.1	3	10
				20

General data	
Module parameters	Diagnostics of sensor supply short circuit
	Behaviour after short circuit/overload
	Input debounce time
	Signal extension time
Channel parameters	Signal extension
Diagnostics via LED	Error per module
	Status per channel
Diagnostics via bus	Short circuit/overload, sensor supply

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	15
Max. residual current of inputs per module	[A]	1.8
Electrical connection input		
Function		Digital input
Connection type		8x terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		6
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

# Automation system CPX-E

Technical data – Digital input modules

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	102
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	18.9 x 76.6 x 124.3


Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Note on ambient temperature		-5 ... +60 °C for vertical installation
Storage temperature	[°C]	-20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM compliance mark
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

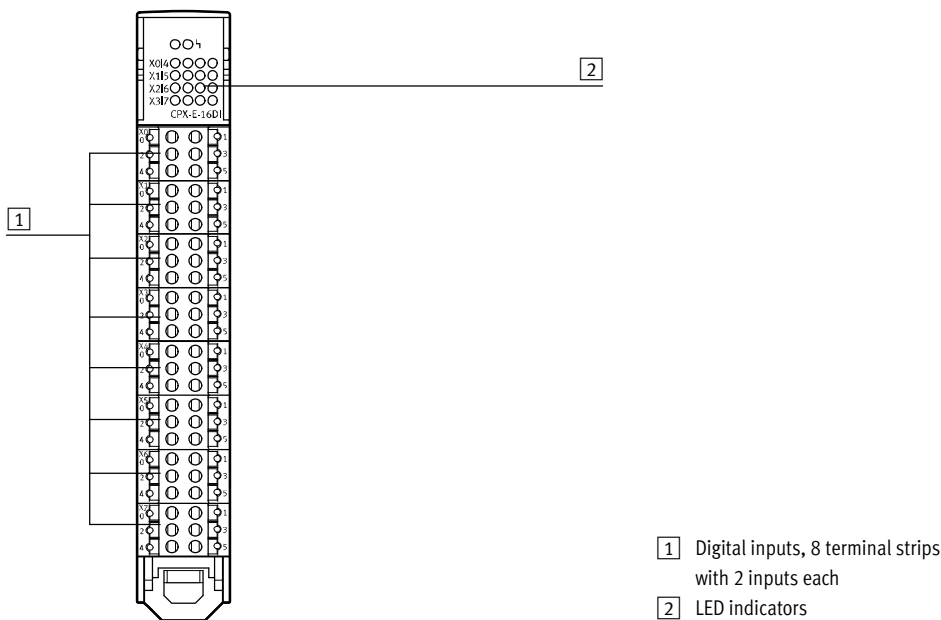




# Automation system CPX-E

Technical data – Digital input modules

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

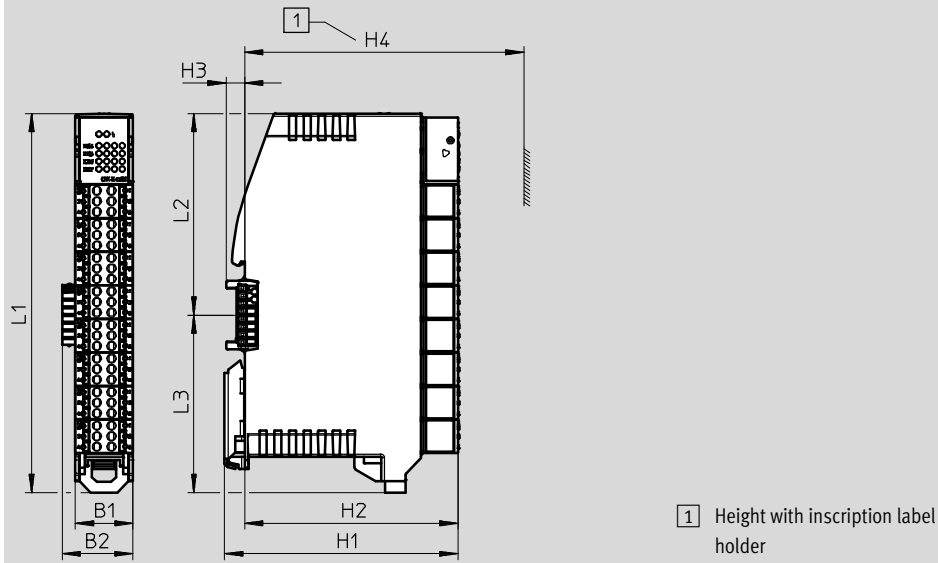


1 Height with inscription label holder

	B1	B2	H1	H2	H3	H4	L1	L2	L3
CPX-E-16DI	18.9	23.2	76.5	69.9	6	91.5	124.3	66	58.3

## Ordering data

	Part No.	Type
 Digital input module with 16 inputs	<b>4080492</b>	<b>CPX-E-16DI</b>

## Ordering data – Accessories

	Part No.	Type
 Inscription label holder, x 5	<b>4080500</b>	<b>CAFC-X3-C</b>

# Automation system CPX-E

Technical data – Digital counter modules




## Function

Digital counter modules enable the connection of encoders for the recording of pulses.

## Area of application

- Incremental encoder with two phase-offset signals and optional logic zero
- Pulse generator with or without direction signal
- Differential encoder input with 5 V DC operating voltage
- Single encoder input (single ended) with 5 V DC or 24 V DC operating voltage
- Operating voltage supply for all connected encoders/sensors
- Diagnostics LED

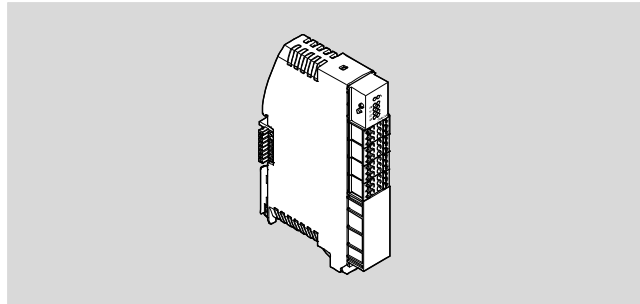

General technical data			
No. of inputs		4	
Max. address capacity inputs	[byte]	12	
Input characteristic curve		To IEC 61131-2, type 3	
Switching logic at inputs		PNP (positive switching)	
		2- and 3-wire sensors to IEC 61131-2	
Max. address capacity outputs	[byte]	2	
Fuse protection (short circuit)		Internal electronic fuse per module	
Electrical isolation between channel and internal bus		None	
Electrical isolation between channels		None	
Switching level	Signal 0	≤5 V	
	Signal 1	≥11 V	
Input debounce time	[ms]	0.02	0.1   3

General data	
Module parameters	Signal type/encoder type
	Signal evaluation
	Monitoring of cable break
	Tracking error monitoring
	Zero pulse monitoring
	Pulse / Zero pulse
	Latching signal
	Latching event
	Latching response
	Upper count limit
	Lower count limit
	Load value
	Debounce time for digital inputs
	Integration time for speed measurement
Internal revision ID	
Channel parameters	Signal extension

# Automation system CPX-E

Technical data – Digital counter modules

FESTO

General data	
Diagnostics via LED	Errors per module
	Status per channel
	Encoder supply error
	Encoder error
	Encoder normal operation
	Encoder supply normal operation
Diagnostics via bus	Short circuit / overload in sensor supply
	Measuring system error
	Parameter error
	Wire break monitoring
	Zero pulse monitoring
	Tracking error monitoring

Technical data – Electrical		
Nominal DC operating voltage for electronics/sensors	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	Typically 15
Max. resultant current of inputs per module	[A]	1.8
Power failure buffering	[ms]	10
Electrical connection input 1		
Function	Digital input	
Connection type	2 x Terminal strip	
Connection technology	Spring-loaded terminal	
Number of pins/wires	6	
Cable diameter	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on cable diameter	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without cable end sleeve
Electrical connection input 2		
Function	Clock pulse input	
Connection type	Terminal strip	
Connection technology	Spring-loaded terminal	
Number of pins/wires	6	
Cable diameter	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on cable diameter	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without cable end sleeve
Power supply		
Function	Encoder supply	
Connection type	Terminal strip	
Connection technology	Spring-loaded terminal	
Number of pins/wires	6	
Cable diameter	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on cable diameter	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without cable end sleeve

# Automation system CPX-E

Technical data – Digital counter modules

Technical data – Mechanical		
Type of mounting		With H-rail
Product weight	[g]	88
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	18.9 x 76.6 x 124.3


Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Note on ambient temperature		-5 ... +60 °C for vertical installation
Storage temperature	[°C]	-20 ... +70
Relative humidity	[%]	95
		Non-condensing
CE marking (see Declaration of Conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Approval		RCM compliance mark
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety engineering characteristics	
CE marking (see Declaration of Conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

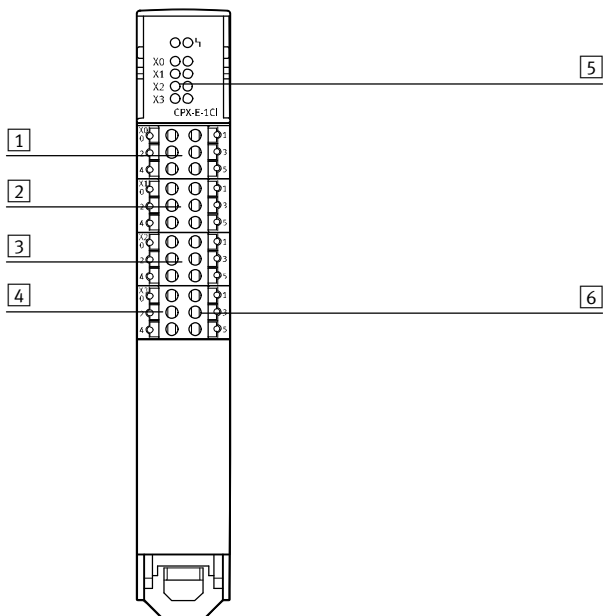


- 1 Transmit count/block count transmission control inputs
- 2 Set counter/block counter control inputs
- 3 Counter input, 1 terminal strip
- 4 24 V DC supply voltage for encoder
- 5 LED indicators
- 6 5 V DC supply voltage for encoder

# Automation system CPX-E

Technical data – Digital counter modules


## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

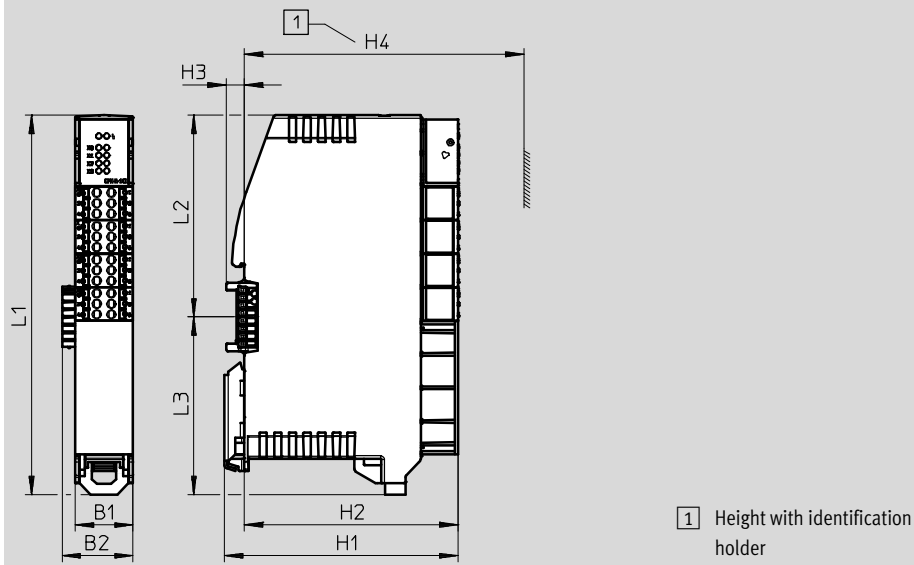


	B1	B2	H1	H2	H3	H4	L1	L2	L3
CPX-E-1CI	18.9	23.2	76.5	69.9	6	91.5	124.3	66	58.3

## Ordering data

	Part No.	Type code
 Digital counter module with 1 input	<b>4827505</b>	<b>CPX-E-1CI</b>

## Ordering data – Accessories

	Part No.	Type code
 Identification holder, 5 pieces	<b>4080500</b>	<b>CAFC-X3-C</b>

# Automation system CPX-E

Technical data – Digital output modules


FESTO

## Function

Digital output modules make it possible to connect electrical consumers in accordance with IEC 1131-2 type 0.5 (valves, contactors or display components) with an operating voltage of 24 V DC.

## Area of application

- Output modules for 24 V DC operating voltage
- Terminal strip
- Electronic fuse protection against short circuit or overload with automatic resetting
- Error display via LED
- Slow response; possible short-term increase in current requirement

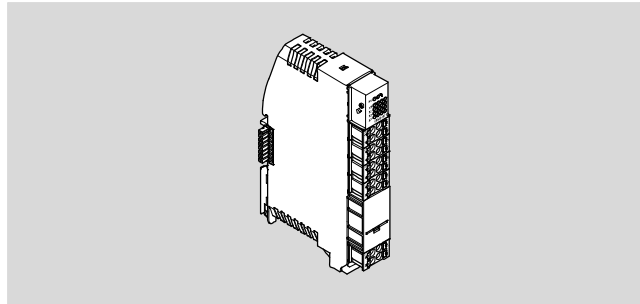

General technical data	
Number of outputs	8
Max. address capacity outputs [byte]	1
Characteristic curve outputs	To IEC 61131-2, type 0.5
Switching logic at outputs	PNP (positive switching)
Fuse protection (short circuit)	Internal electronic fuse per channel
Electrical isolation between channel and internal bus	Yes
Electrical isolation between channels	None

General data	
Module parameters	Diagnostics of short circuit at output
	Behaviour after short circuit/overload
	Diagnostics of undervoltage in load supply
Channel parameters	Force channel x
Diagnostics via LED	Error per module
	Error per channel
	Status per channel
Diagnostics via bus	Short circuit/overload at output
	Undervoltage in load supply
	Error module

Technical data – Electrical		
Nominal operating voltage DC load	[V DC]	24
Permissible voltage fluctuations load	[%]	±25
Intrinsic current consumption at nominal operating voltage load	[mA]	34
Max. residual current outputs per module	[A]	4
Protection against direct and indirect contact		PELV
Electrical connection output		
Function		Digital output
Connection type		4x terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve
Power supply		
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

# Automation system CPX-E

Technical data – Digital output modules

FESTO

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	93
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	18.9 x 76.6 x 124.3


Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Note on ambient temperature		–5 ... +60 °C for vertical installation
Storage temperature	[°C]	–20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM compliance mark
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

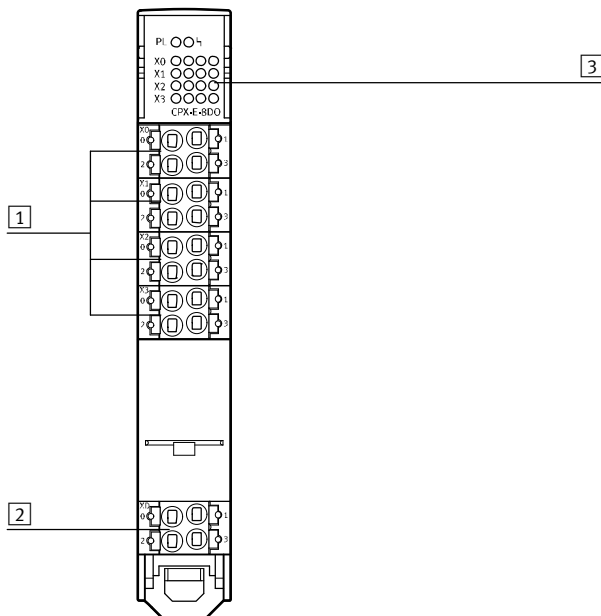


- 1) Digital outputs, 4 terminal strips with 2 outputs each
- 2) Terminal strip for operating voltage supply
- 3) LED indicators

# Automation system CPX-E

Technical data – Digital output modules

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

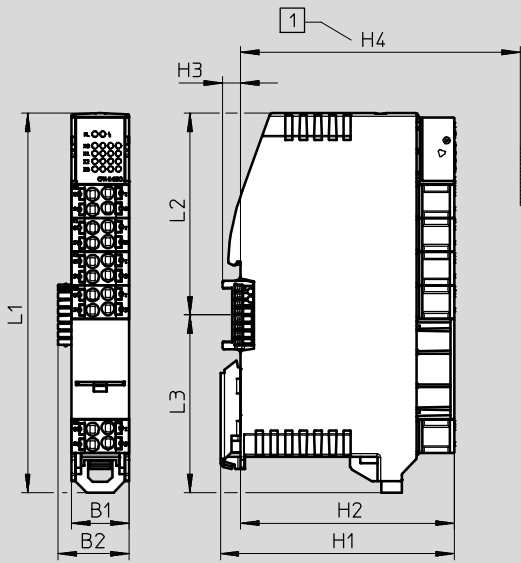


1 Height with inscription label holder

	B1	B2	H1	H2	H3	H4	L1	L2	L3
CPX-E-8DO	18.9	23.2	76.5	69.9	6	91.5	124.3	66	58.3

## Ordering data

	Part No.	Type
 Digital output module with 8 outputs	<b>4080491</b>	<b>CPX-E-8DO</b>

## Ordering data – Accessories

	Part No.	Type
 Inscription label holder, x 5	<b>4080500</b>	<b>CAFC-X3-C</b>



# Automation system CPX-E


Technical data – Analogue input modules

## Function

Analogue input modules make it possible to detect analogue input signals such as current or voltage.

## Area of application

- Measurement ranges, limit values, measured value smoothing and diagnostic behaviour can be set
- Terminal strip
- Electronic fuse protection against short circuit or overload with automatic resetting
- Error display via LED
- Slow response; possible short-term increase in current requirement

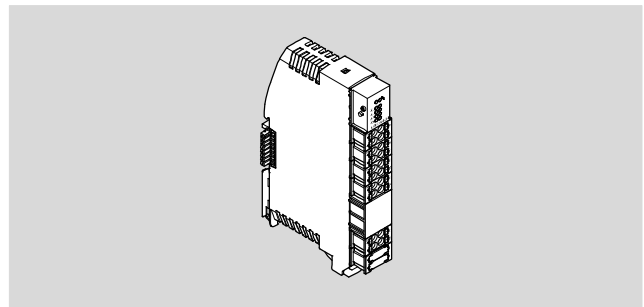

General technical data								
No. of inputs		4						
Max. address capacity inputs	[byte]	8						
Measured variable		Voltage				Current		
Signal range	[V]	-10 ... +10	-5 ... +5	0 ... +10	+1 ... +5	-	-	-
	[mA]	-	-	-	-	-20 ... +20	0 ... +20	+4 ... +20
Repetition accuracy	[%]	±0.1 at 25 °C						
Data format		15 bits + prefix						
		Linear scaling						
Basic fault limit	[%]	±0.2 at 25 °C						
Operating error limit related to the ambient temperature range	[%]	±0.3						
Fuse protection (short circuit)		Internal electronic fuse per module						
Max. cable length	[m]	30						
		Screened						
Electrical isolation between channel and internal bus		Yes						
Electrical isolation between channels		None						

General data	
Module parameters	Diagnostics of sensor supply short circuit
	Diagnostics of parameterisation error
	Diagnostics of overload at analogue inputs
	Behaviour after short circuit/overload
	Behaviour after overload at analogue inputs
	Data format analogue inputs
	Hysteresis of limit monitoring
	Deactivate sensor supply
Channel parameters	Signal range per channel
	Diagnostics for lower limit
	Diagnostics for upper limit
	Wire break diagnostics
	Underflow/overflow diagnostics
	Parameter error diagnostics
	Smoothing factor
Diagnostics via LED	Error per module
	Error per channel
Diagnostics via bus	Short circuit/overload, sensor supply
	Parameterisation error
	Parameter error
	Overload at analogue inputs
	Upper/lower limit value exceeded
	Wire break
Underflow/overflow	

# Automation system CPX-E

Technical data – Analogue input modules

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Power failure buffering	[ms]	10
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	70
Max. residual current of inputs per module	[A]	1.4
Electrical connection input		
Function	Analogue input	
Connection type	4x terminal strip	
Connection technology	Spring-loaded terminal	
Number of poles/wires	4	
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

Technical data – Mechanical		
Type of mounting	Via H-rail	
Product weight	[g]	96
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	18.9 x 76.6 x 124.3

Materials		
Housing	PA	
Note on materials	RoHS-compliant	
	Contains paint-wetting impairment substances	

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Note on ambient temperature	-5 ... +60 °C for vertical installation	
Storage temperature	[°C]	-20 ... +70
Relative air humidity	[%]	95
	Non-condensing	
CE marking (see declaration of conformity) <sup>2)</sup>	To EU EMC Directive <sup>1)</sup>	
Certification	RCM compliance mark	
Degree of protection	IP20	


- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data		
CE marking (see declaration of conformity)	To EU EMC Directive	
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6	

# Automation system CPX-E

Technical data – Analogue input modules


## Connection and display components

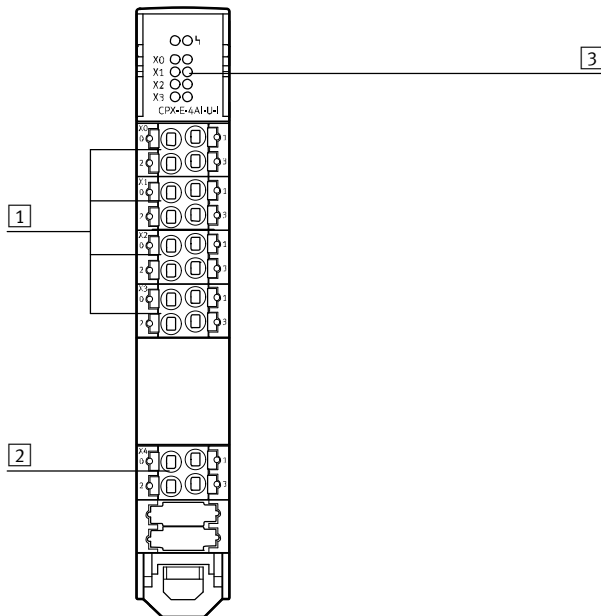

- 1 Analogue inputs, 4 terminal strips each with one input
- 2 Terminal strip for operating voltage supply
- 3 4 connections for functional earth (FE)

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

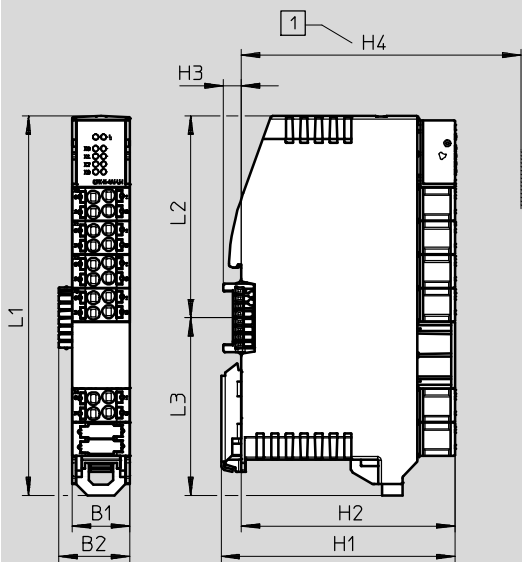


- 1 Height with inscription label holder

	B1	B2	H1	H2	H3	H4	L1	L2	L3
CPX-E-4AI-U-I	18.9	23.2	76.5	69.9	6	91.5	124.3	66	58.3

# Automation system CPX-E

Technical data – Analogue input modules

Ordering data		Part No.	Type
	Analogue input module with 4 inputs	4080493	CPX-E-4AI-U-I

Ordering data – Accessories		Part No.	Type
	Inscription label holder, x 5	4080500	CAFC-X3-C

# Automation system CPX-E


Technical data – Analogue output modules

## Function

The module converts the value specified by the controller (15-bit value with prefix) and transfers it to a connected actuator as an analogue current or voltage value.

## Area of application

- Output signal (current/voltage) can be set
- Terminal strip
- Electronic fuse protection against short circuit or overload with automatic resetting
- Error display via LED
- Slow response; possible short-term increase in current requirement

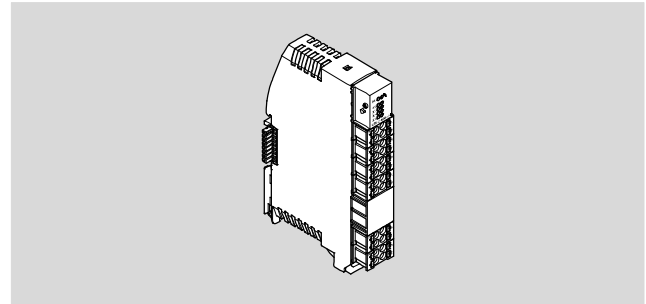

General technical data						
Number of outputs		4				
Max. address capacity outputs	[byte]	8				
Measured variable		Voltage			Current	
Signal range	[V]	-10 ... +10	-5 ... +5	0 ... +10	-	-
	[mA]	-	-	-	-20 ... +20	0 ... +20
Repetition accuracy	[%]	±0.05 at 25 °C				
Data format		15 bits + prefix				
		Linear scaling				
Basic fault limit	[%]	±0.1 at 25 °C				
Operating error limit related to the ambient temperature range	[%]	±0.3				
Fuse protection (short circuit)		Internal electronic fuse per module				
Max. cable length	[m]	30				
		Screened				
Electrical isolation between channel and internal bus		Yes				
Electrical isolation between channels		None				

General data	
Module parameters	Diagnostics of short circuit in actuator supply
	Diagnostics of parameterisation error
	Diagnostics of undervoltage in load supply
	Behaviour after short circuit/overload in actuator supply
	Behaviour after short circuit/overload at analogue output
	Data format analogue outputs
	Deactivate actuator supply
Channel parameters	Signal range per channel
	Enable overload/short circuit diagnostics
	Enable wire break/idling diagnostics
	Enable parameterisation error diagnostics
Diagnostics via LED	Force channel x
	Error per module
Diagnostics via bus	Error per channel
	Short circuit/overload in actuator supply
	Parameterisation error
	Nominal range exceeded
	Nominal range not reached
	Short circuit/overload at analogue output
Diagnostics via bus	Undervoltage in load supply
	General error

# Automation system CPX-E

FESTO

Technical data – Analogue output modules

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Nominal operating voltage DC load	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Permissible voltage fluctuations load	[%]	±25
Power failure buffering	[ms]	10
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	60
Intrinsic current consumption at nominal operating voltage load	[mA]	15
Max. residual current outputs per module	[A]	2
Protection against direct and indirect contact		PELV
Electrical connection output		
Function		Analogue output
Connection type		4x terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve
Power supply		
Connection type		2x terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	96
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	18.9 x 76.6 x 124.3

Materials		
Housing		PA
Note on materials		RoHS-compliant Contains paint-wetting impairment substances

Operating and environmental conditions		
Ambient temperature	[°C]	-5 ... +50
Note on ambient temperature		-5 ... +60 °C for vertical installation
Storage temperature	[°C]	-20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM compliance mark
Degree of protection		IP20


- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

# Automation system CPX-E

Technical data – Analogue output modules

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6


## Connection and display components

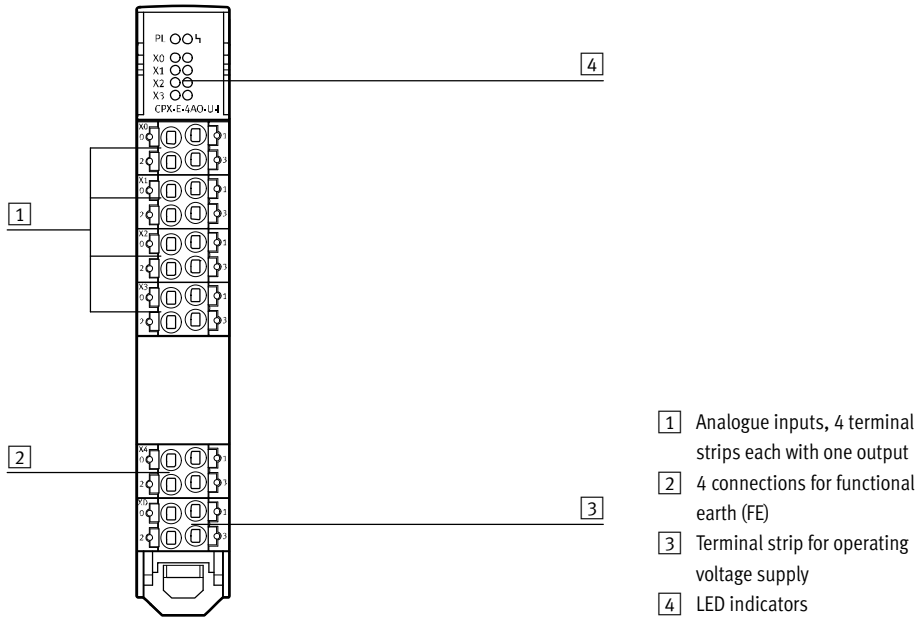

- 1 Analogue inputs, 4 terminal strips each with one output
- 2 4 connections for functional earth (FE)
- 3 Terminal strip for operating voltage supply
- 4 LED indicators

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

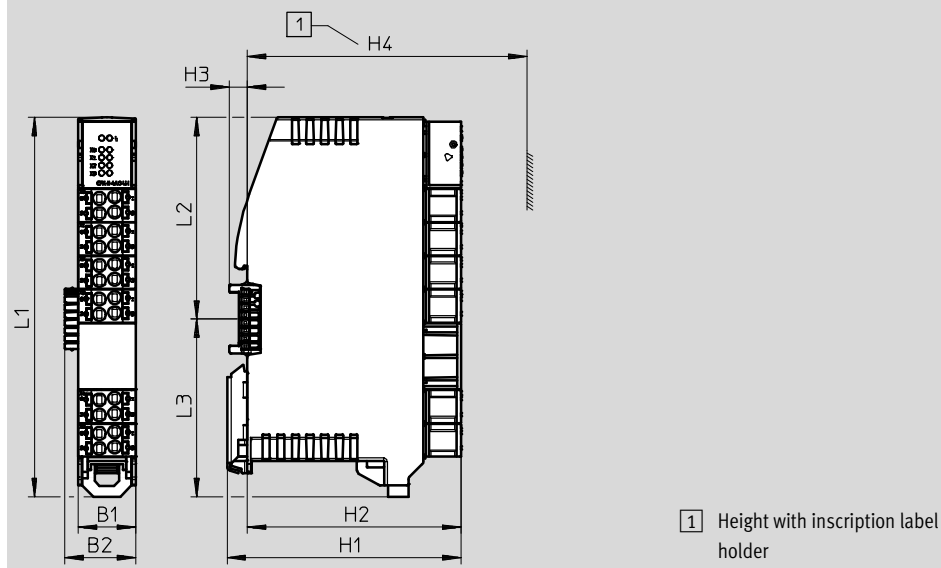



- 1 Height with inscription label holder

	B1	B2	H1	H2	H3	H4	L1	L2	L3
CPX-E-4AO-U-1	18.9	23.2	76.5	69.9	6	91.5	124.3	66	58.3

# Automation system CPX-E

Technical data – Analogue output modules

Ordering data		Part No.	Type
	Analogue output module with 4 outputs	4080494	CPX-E-4AO-U-I

Ordering data – Accessories		Part No.	Type
	Inscription label holder, x 5	4080500	CAFC-X3-C



# Automation system CPX-E


Technical data – IO-Link master modules

### Function


The IO-Link master module establishes the connection to modules that have an IO-Link interface (device). The I/O data from the connected devices are transmitted to the connected CPX-E bus module and thus to the higher-order controller via fieldbus.

### Area of application

- Address space can be set
- Terminal strip
- Electronic fuse protection against short circuit or overload with automatic resetting
- Error display via LED
- Slow response; possible short-term increase in current requirement

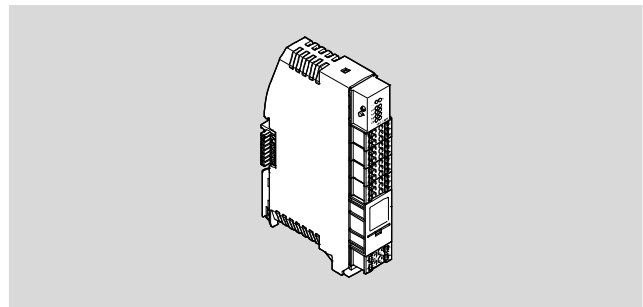

### Application – Example configuration

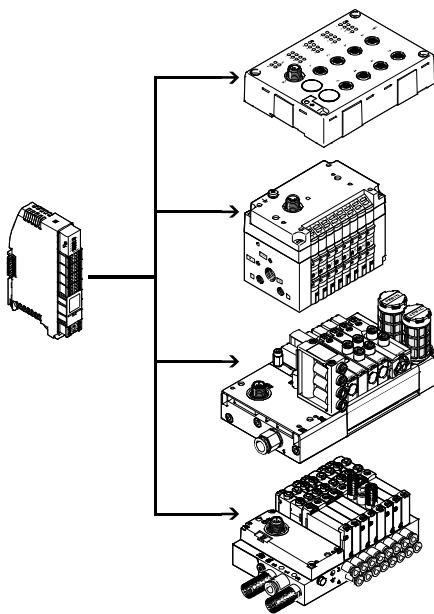

The IO-Link master module provides 4 external IO-Link interfaces. As well as transmitting the communication data, the IO-Link interfaces also transmit the power supply to the connected sensors and the load supply to the valves (or outputs). Both circuits are supplied separately with 24 V, using a separate reference potential. The load voltage supply is fed directly into the module.

The address space provided by the IO-Link master module to the IO-Link interfaces (ports) is set using DIL switches. It can be set from 2 ... 32 bytes per port. Since the address space for the module is limited to a total of 32 bytes, there is the following gradation:

- For 2, 4 or 8 bytes per port, all 4 ports are active
- For 16 bytes per port, 2 ports are active
- For 32 bytes per port, just 1 port is active

The behaviour of the master module is defined using parameters.

General technical data		
Protocol		IO-Link
IO-Link	Number of ports	4
	Port class	B
	Communication mode	SIO, COM1 (4.8 kBaud), COM2 (38.4 kBaud), COM3 (230.4 kBaud)
		Configurable via software
	Communication	C/Q green LED
	Minimum cycle time	Dependent on minimum supported cycle time of the connected IO-Link device
	Protocol version	Master V 1.1
	Process data width IN [byte]	8 ... 32, parameterisable
Process data width OUT [byte]	8 ... 32, parameterisable	
Fuse protection (short circuit)		Internal electronic fuse, sensor for each module
		Internal electronic fuse, load per channel
Electrical isolation between channel and internal bus		None
Electrical isolation between channels		None

# Automation system CPX-E

Technical data – IO-Link master modules

FESTO

General data	
Module parameters	Diagnostics of short circuit in actuator supply
	Behaviour after short circuit/overload
	Deactivate sensor supply
Channel parameters	Deactivate actuator supply
	Device error code
	Channel mode
	Channel status
	Force channel x
Diagnostics via LED	Error per module
	Status per channel
Diagnostics via bus	Short circuit
	Parameter error
	Wire break
	Error module
	Device missing/failed
	Overflow/Underflow
	Undervoltage
	General error

Technical data – Electrical		
Nominal operating voltage DC for electronics/sensors	[V DC]	24
Nominal operating voltage DC load	[V DC]	24
Permissible voltage fluctuations for electronics/sensors	[%]	±25
Permissible voltage fluctuations load	[%]	±25
Intrinsic current consumption at nominal operating voltage for electronics/sensors	[mA]	50
Intrinsic current consumption at nominal operating voltage load	[mA]	15
Protection against direct and indirect contact		PELV
Electrical connection, IO-Link		
Connection type		4x terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		6
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve
Power supply		
Connection type		Terminal strip
Connection technology		Spring-loaded terminal
Number of poles/wires		4
Conductor cross-section	[mm <sup>2</sup> ]	0.2 ... 1.5
Note on wire cross-section	[mm <sup>2</sup> ]	0.2 ... 2.5 for flexible wire without wire end sleeve

Technical data – Mechanical		
Type of mounting		Via H-rail
Product weight	[g]	96
Grid dimension	[mm]	18.9
Dimensions W x L x H	[mm]	18.9 x 76.6 x 124.3

Materials	
Housing	PA
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

# Automation system CPX-E


Technical data – IO-Link master modules

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +60
Note on ambient temperature		–5 ... +50 °C for horizontal installation
Storage temperature	[°C]	–20 ... +70
Relative air humidity	[%]	95
		Non-condensing
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive <sup>1)</sup>
Certification		RCM compliance mark
Degree of protection		IP20

- 1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 2) Additional information [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

Safety data	
CE marking (see declaration of conformity)	To EU EMC Directive
Shock resistance	Shock test with severity level 1 to FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

## Connection and display components

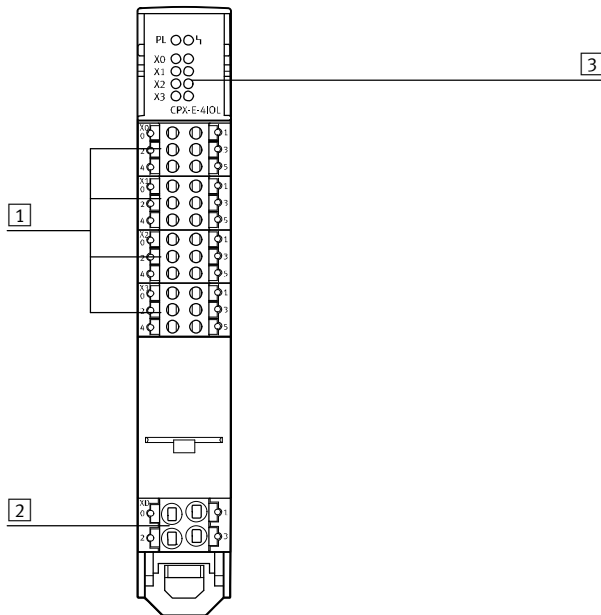

- 1 IO-Link ports, 4 terminal strips each with one port
- 2 Terminal strip for operating voltage supply, load voltage
- 3 LED indicators


# Automation system CPX-E

Technical data – IO-Link master modules

FESTO

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

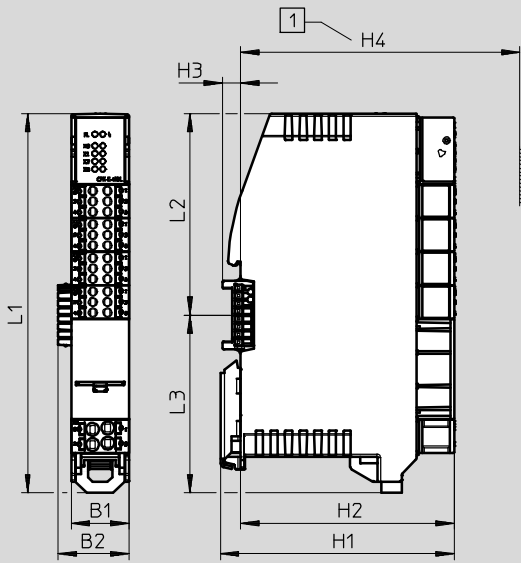


1 Height with inscription label holder

	B1	B2	H1	H2	H3	H4	L1	L2	L3
CPX-E-4IOL	18.9	23.2	76.5	69.9	6	91.5	124.3	66	58.3

## Ordering data

	Part No.	Type
 IO-Link master module with 4 ports	<b>4080495</b>	<b>CPX-E-4IOL</b>

## Ordering data – Accessories

	Part No.	Type
 Inscription label holder, x 5	<b>4080500</b>	<b>CAFC-X3-C</b>

# Automation system CPX-E

Ordering data – Modular product system



Ordering table		Condi- tions	Code	Entry code
<b>M</b>	Module no.	<b>5237644</b>		
	Product type	System CPX-E	<b>1</b>	<b>60E</b>
	Electrical control	Bus module PROFIBUS	<b>1</b>	<b>-PB</b>
		Bus module PROFINET	<b>1</b>	<b>-PN</b>
		Bus module EtherNet/IP	<b>1</b>	<b>-EP</b>
		Bus module EtherCAT	<b>1</b>	<b>-EC</b>
		Controller CODESYS V3, PROFINET	<b>1</b>	<b>-CPN</b>
		Controller CODESYS V3 with SoftMotion, PROFINET	<b>1</b>	<b>-MPN</b>
		Controller CODESYS V3, EtherNet/IP	<b>1</b>	<b>-CEP</b>
		Controller CODESYS V3 with SoftMotion, EtherNet/IP	<b>1</b>	<b>-MEP</b>
		Controller CODESYS V3	<b>1</b>	<b>-CB</b>
		Controller CODESYS V3 with SoftMotion	<b>1</b>	<b>-MP</b>
<b>O</b>	Input/output modules	Digital input module with 16 inputs	<b>1</b>	<b>M</b>
		Digital output module with 8 outputs	<b>1</b>	<b>L</b>
		Analogue input module with 4 inputs (current/voltage)	<b>1</b>	<b>NI</b>
		Analogue output module with 4 outputs (current/voltage)	<b>1</b>	<b>NO</b>
		IO-Link master module	<b>1</b>	<b>T51</b>
		Counter module	<b>1</b>	<b>T53</b>
	Accessories	Module cover including label strips		<b>+MH</b>
		32 GB memory card		<b>+SK</b>
		Display and control unit		<b>+AB</b>

**1** A maximum of one bus module or one controller and 10 input/output modules can be included.

**M** Mandatory data

**O** Options

Transfer order code

**60E** -  +  +