


# Solenoid valves VUVG/valve terminals VTUG

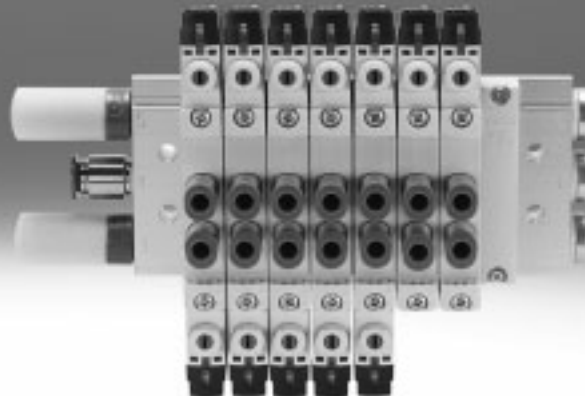

Festo core product range  
Covers 80% of your automation tasks

Worldwide:

Always in stock

Superb:

Festo quality at an attractive price

Easy:


Reduces procurement and storing complexity



Generally ready for shipping ex works in 24 hours  
Held in stock in 13 service centres worldwide  
More than 2200 product




Generally ready for shipping ex works in 5 days  
Assembled for you in 4 service centres worldwide  
Up to  $6 \times 10^{12}$  variants per product series



# Solenoid valves VUVG

Key features

FESTO

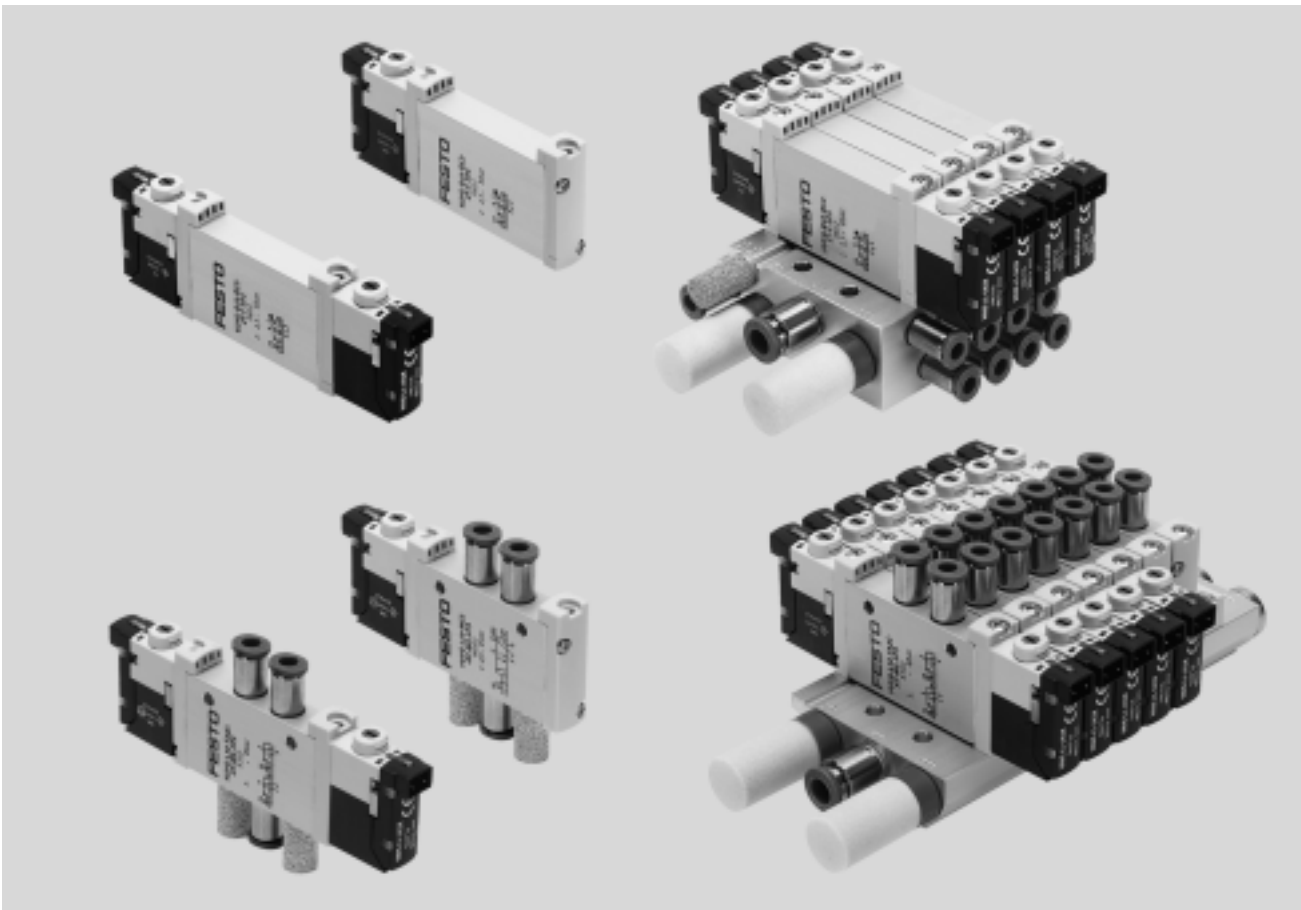

## Innovative

- Can be set to internal or external pilot air supply for manifolds with sub-base valves
- Maximum pressure 10 bar
- Design principle:
  - Piston slide with sealing ring (VUVG-LK, VUVG-BK)
  - Piston spool with sealing cartridge (VUVG-L, VUVG-B)

## Flexible

- Wide range of valve functions
- Choice of quick plug connectors
- In-line valves
- Semi in-line valves for manifold assembly
- M5 and M7 in-line valves can be combined on one manifold rail
- Valve manifold with pressure zones
- IP40, IP65
- Connection technology via:
  - Electrical sub-base

## Reliable

- Sturdy and durable metal components
  - Valves
  - Manifold rails
- Fast troubleshooting thanks to 360° LED display
- Convenient servicing thanks to valves that can be replaced quickly and easily
- Choice of manual override: non-detenting, covered, non-detenting/detenting or detenting (without accessories)

## Easy to mount

- Secure mounting on wall or H-rail
- Easy mounting, captive screws and seal
- Connection technology easy to change via the electrical sub-base
- Identification holder for labelling the valves

## Valve terminal configurator

A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product.

Valve terminals VTUG are ordered via an ident. code. All valve terminals are supplied fully assembled and individually tested.

This reduces assembly and installation time to a minimum.

Download CAD data → [www.festo.com](http://www.festo.com)

Ordering system for valve terminal VTUG


→ Internet: vtug

# Solenoid valves VUVG

Key features – Pneumatics

## Individual valves and valve manifolds

### In-line valves as individual valve

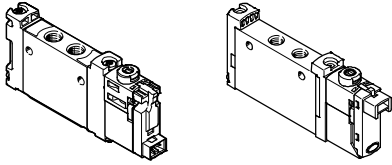


In-line valve VUVG-LK/VUVG-L


In-line valves are designed to be used without pneumatic linking. All pneumatic connections are on the valve and can be equipped with fittings/tubing. The electrical connection is provided by different electrical sub-bases.

If a special seal set is used, in-line valves VUVG can also be mounted on a manifold rail (pneumatic linking) as semi in-line valves.

### Semi in-line valves for manifold assembly



Semi in-line valve VUVG-S




Valve manifold VTUG comprised of semi in-line valves VUVG-S


In the case of semi in-line valves, the supply ports (1, 3 and 5) are connected to the valve by means of pneumatic linking (e.g. sub-base).

The working ports (2, 4) are on the valve. The electrical connection is provided by different electrical sub-bases.

### Sub-base valves for manifold assembly

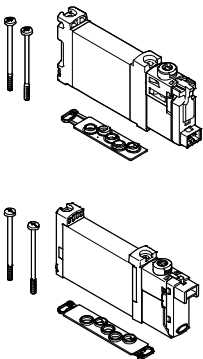

Sub-base valve VUVG-BK/VUVG-B



Valve manifold VTUG comprised of VUVG-BK/VUVG-B sub-base valves

In the case of sub-base valves, the supply ports (1, 3 and 5) and the working ports (2, 4) are connected to the valve by means of pneumatic linking (e.g. sub-base).


The electrical connection is provided by different electrical sub-bases.

# Solenoid valves VUVG

Key features – Pneumatics




## Basic valves VUVG





- Size 10, 14 and 18 mm
- In-line valves and semi in-line valves
- Sub-base valves
- 2x 3/2-way, 5/2-way and 5/3-way valves

## Electrical sub-bases



- 5, 12 and 24 V DC
- With or without holding current reduction
- LED


## Basic valve and electrical sub-bases

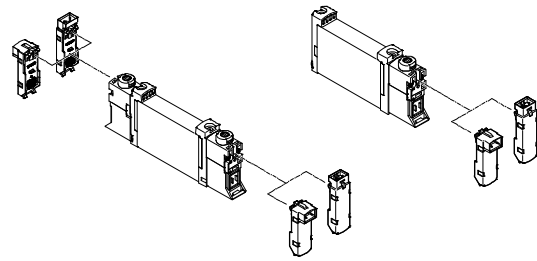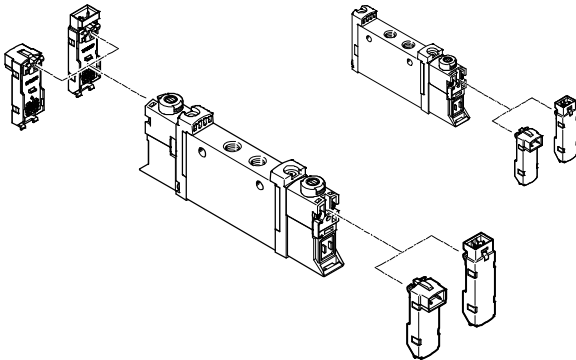

Note


More electrical connection boxes → page 114

## Cover caps for manual override



- Closed cover cap, covered manual override
- Slotted cover cap, non-detenting manual override
- Cover, detenting manual override

## Identification holder




- The identification holder is mounted in the same way as a cover cap for manual override
- The hinged identification holder covers the retaining screw and the manual override

# Solenoid valves VUVG


Key features – Pneumatics

## Manifold rail for in-line valves



- For in-line valves M3, M5, M7, G1/8 and G1/4
- For 2x 3/2-way, 5/2-way and 5/3-way valves
- 2 to 10 and 12, 14, 16 valve positions

## Manifold rail for sub-base valves



- For sub-base valves 10A, 10, 14 and 18
- Manifold rail with M5, M7, G1/8 and G1/4 working ports
- For 2x 3/2-way, 5/2-way and 5/3-way valves
- 2 to 10, 12, 14 and 16 valve positions
- The sub-base valves always have external pilot air. The pilot air is set via the manifold rail. A short and a long blanking plug are included with the manifold rail for this purpose.

### Note

Pressurisation and exhaust at both ends is recommended for an optimised flow rate in cases where multiple valves switch simultaneously.

## Cover plate for vacant position



Vacant position cover

## Supply plate



For additional air supply and exhaust via a valve position

## Separator for pressure zones




For creating multiple pressure zones in a valve manifold

# Solenoid valves VUVG

Key features – Pneumatics

## Vertical pressure supply plate

For in-line valves M5/M7 and G1/8

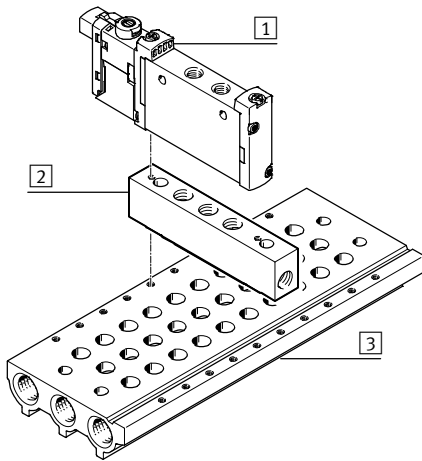

- 1 In-line valves VUVG
- 2 Vertical pressure supply plate
- 3 Manifold rail



The vertical pressure supply plate enables the valve to be pressurised and exhausted separately. If two vertical pressure supply plates are mounted one on top of the other, the valve can be supplied with compressed air and exhausted completely independently of the valve terminal (terminal code CS).

Code	Diagram	Type	For in-line valves		Description
			M5/M7	G1/8	
ZU		VABF-L1-P3A	■	■	Plate with port 1 for supplying an individual operating pressure or separate exhausting (reverse operation) for a valve position.
ZV		VABF-L1-P7A	■	■	Plate with ports 3 and 5 for exhausting the valve or supplying an individual operating pressure (reverse operation) for a valve position.

# Solenoid valves VUVG

Key features – Pneumatics

## Exhaust functions

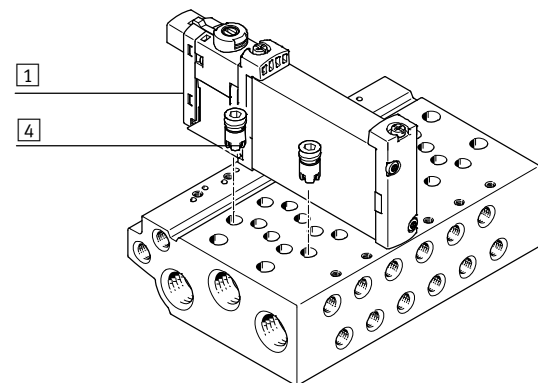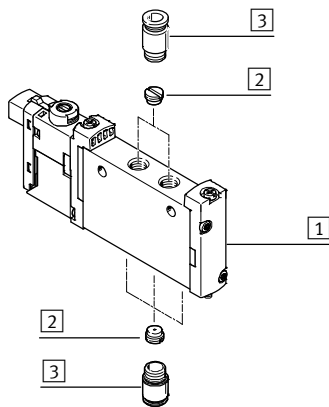

- 1 Valves VUVG with electrical individual connection
- 2 Flow restrictor for thread M5
- 3 Fitting
- 4 Fixed flow restrictor, self-tapping/check valve

### Flow restrictor for thread M5

In-line valve, individual electrical connection: flow restrictor can be fitted in port 1, 3, 5 and/or in port 2, 4.

Sub-base valve, individual electrical connection: flow control can be fitted in port 2, 4.

### Fixed flow restrictor, self-tapping

The fixed flow restrictor can be used to permanently set the exhaust flow rate in ducts 3 and 5.

The fixed flow restrictors are screwed into ducts 3 and 5 in the manifold rail.

Please see the relevant assembly instructions:


➔ [www.festo.com/sp](http://www.festo.com/sp)

### Check valve

Check valves block the flow towards the valves if back pressure develops in ducts 3 and 5 in the case of a high exhaust capacity and thus prevents actuators from switching unexpectedly.

The check valves are screwed into ducts 3 and 5 in the manifold rail. Please see the relevant assembly instructions:

➔ [www.festo.com/sp](http://www.festo.com/sp)

 Note

- It is not possible to use a check valve and a fixed flow restrictor (in the same duct) at the same time.
- When screwing in again, use the threads already present.

# Solenoid valves VUVG

Key features – Pneumatics

## Creating pressure zones and separating exhaust air


Compressed air is supplied and exhausted via the manifold rail and via supply plates.

The position of the supply plates and channel separations can be freely selected with the VUVG.







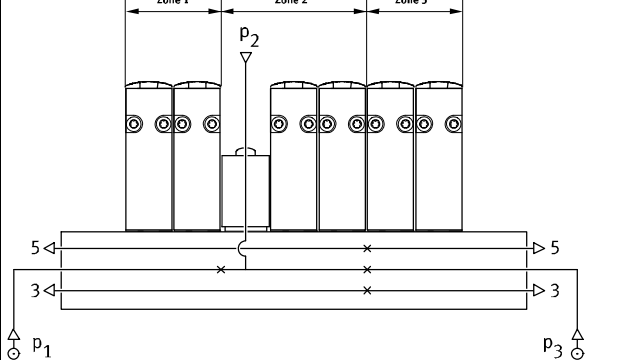
Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by appropriate channel separation.

Pressure zone separation can be used for the following ducts:


- Duct 1
- Duct 3
- Duct 5


 Note

- Use a separator if the exhaust air pressures are high
- Use at least one supply plate/supply for each pressure zone
- Pressure zone separation is not possible in duct 12/14 (pilot air supply)

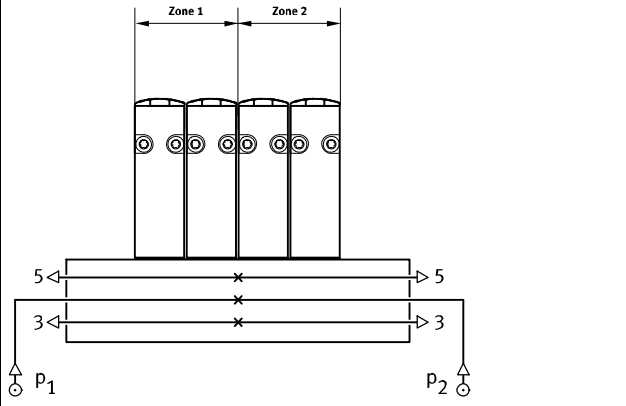Channel separation	Description
	<p>The pressure zones can be freely configured with the VUVG. The following channel separations are possible:</p> <p>Duct 1 closed</p> 
	<p>Duct 1, 3, 5 closed</p> 
	<p>Duct 3, 5 closed</p> 
	<p>The number of pressure zones with the VUVG is only limited by the number of valve positions on the manifold rail. Note that each supply plate occupies one valve position.</p>

## Separator VABD



 Note

As the separators are fitted from only one side using a slotted screwdriver, several pressure zones can be created in one profile.



# Solenoid valves VUVG

Key features – Pneumatics

## Pilot air supply

### Internal pilot air supply

Internal pilot air supply can be chosen with an operating pressure in the range 1.5 ... 8 bar, 2.5 ... 8 bar or 3 ... 8 bar (depending on the valve used).

The pilot air supply is branched from duct 1 (compressed air supply) using an internal connection.


### External pilot air supply

External pilot air supply is required for vacuum operation. The port for external pilot air supply (port 12/14) is located on the valve in the case of in-line valves and on the manifold rail in the case of sub-base valves.

### Pilot exhaust air

With in-line valves, the pilot exhaust air is vented via exhaust holes. With sub-base valves, the pilot exhaust air is vented via duct 82/84 of the manifold rail.

## Pilot air supply with in-line and semi in-line valves

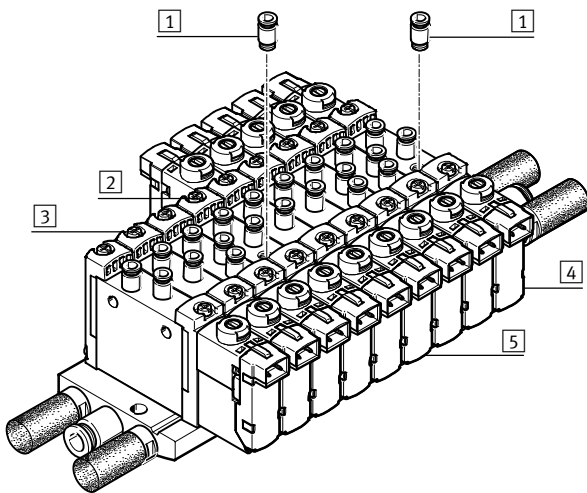


- 1 Push-in fitting for external pilot air supply at port 12/14
- 2 Single solenoid valve with external pilot air supply
- 3 Single solenoid valve with internal pilot air supply
- 4 Double solenoid valve with external pilot air supply
- 5 Double solenoid valve with internal pilot air supply

The internal pilot air is branched from port 1 in the valve body. The external pilot air (port 12/14) is supplied individually at each valve housing.

-  - Note

Semi in-line valves cannot be supplied centrally with pilot air via the manifold rail.

## Pilot air supply with sub-base valves

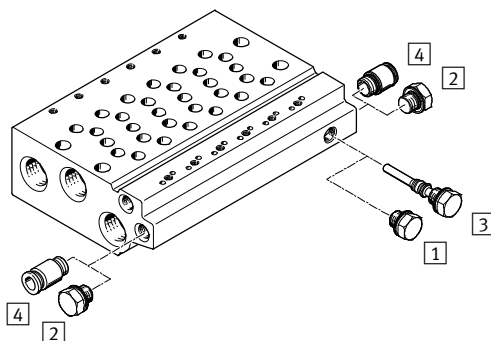

- 1 Blanking plug, short, with internal pilot air
- 2 Blanking plug for duct 12/14 with internal pilot air
- 3 Blanking plug, long, with external pilot air
- 4 Push-in fitting in duct 12/14 with external pilot air

The manifold rails for sub-base valves have an internal connection between duct 12/14 and duct 1. Internal or external pilot air supply is selected by inserting a blanking plug into this conduit.

# Solenoid valves VUVG

Key features – Pneumatics

## Operation with different pressures

### Vacuum operation

#### Points to note with 3/2-way valves


The 3/2-way valves are available in a design with two valves in one valve body and with pneumatic spring return. With these valves, the force for the return movement is supplied through port 1.

Vacuum operation is therefore only possible at port 3 and 5, not at port 1.

With external pilot air supply, vacuum can be connected at port 1, 3, 5 of the 5/2-way and 5/3-way valves.

### Reverse operation


The 3/2-way valves with pneumatic spring are not suitable for reverse operation, since at least the minimum pilot pressure must be present in duct 1.



Note

Pressure must be present at port 1.

### Pressure deflector (internal pilot air)

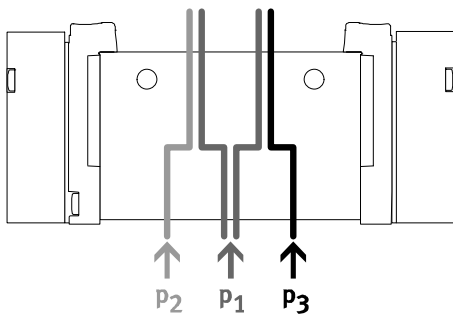

- If two different pressures are required.

- Different pressures can be supplied at duct 1, 3 and 5.



Note

- With internal pilot air supply, the minimum pilot pressure must be adhered to in duct 1


- With 2x3/2-way valves without spring return, the minimum pilot pressure must always be adhered to in duct 1

## Benefits

Any pressure or vacuum can be connected at duct 3 and 5 both with ex-

ternal and internal pilot air

## Vacuum, ejector pulse and normal position

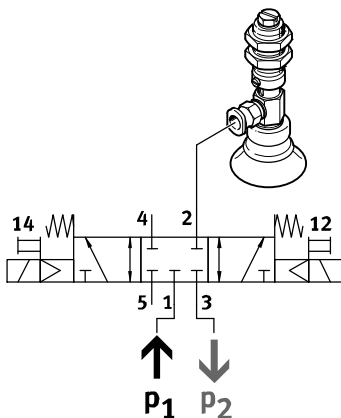

Vacuum, ejector pulse and normal position can be achieved as follows:

- Internal pilot air supply
- Vacuum in duct 3
- Pressure for the ejector pulse in duct 1

# Solenoid valves VUVG



Product range overview

Design type	Working port	Size	Functions and flow rate [l/min]												→ Page/ Internet
			T32C	T32U	T32H	T32C/M	T32U/M	T32H/M	M52	M52/M	B52	P53C	P53U	P53E	
In-line valve as individual valve, solenoid valve VUVG-LK															
	M5	10	■ 180	-	-	-	-	-	■ 195	-	■ 195	-	-	-	28
	M7	10	■ 280	-	-	-	-	-	■ 340	-	■ 340	-	-	-	32
	G1/8	14	■ 570	-	-	-	-	-	■ 660	-	■ 660	-	-	-	49
In-line valve as individual valve, solenoid valve VUVG-L															
	M3	10 A	-	-	-	-	-	-	■ 100	■ 80	■ 100	■ 90	■ 90	■ 90	20
	M5	10	■ 150	■ 150	■ 150	■ 135	■ 125	■ 125	■ 220	■ 190	■ 220	■ 210	■ 210	■ 210	36
	M7	10	■ 190	■ 190	■ 190	■ 150	■ 140	■ 140	■ 380	■ 320	■ 380	■ 320	■ 320	■ 320	40
	G1/8	14	■ 650	■ 600	■ 650	■ 550	■ 500	■ 500	■ 780	■ 780	■ 780	■ 650	■ 600	■ 600	53
	G1/4	18	■ 1000	■ 1000	■ 1000	■ 1000	■ 1000	■ 1000	■ 1300	■ 1300	■ 1380	■ 1200	■ 1000	■ 1000	63
Semi in-line valve for manifold assembly, solenoid valve VUVG-S															
	M3	10 A	-	-	-	-	-	-	■ 100	■ 80	■ 100	■ 90	■ 90	■ 90	20
	M5	10	■ 150	■ 150	■ 150	■ 135	■ 125	■ 125	■ 220	■ 190	■ 220	■ 210	■ 210	■ 210	36
	M7	10	■ 170	■ 170	■ 170	■ 140	■ 130	■ 130	■ 340	■ 290	■ 340	■ 300	■ 300	■ 300	40
	G1/8	14	■ 620	■ 580	■ 580	■ 520	■ 480	■ 480	■ 730	■ 730	■ 730	■ 620	■ 580	■ 580	53
	G1/4	18	■ 1000	■ 1000	■ 1000	■ 1000	■ 1000	■ 1000	■ 1300	■ 1300	■ 1380	■ 1200	■ 1000	■ 1000	63
Sub-base valve, solenoid valve VUVG-BK															
	M5	10	■ 160	-	-	-	-	-	■ 160	-	■ 160	-	-	-	79
	M7	10	■ 160	-	-	-	-	-	■ 160	-	■ 160	-	-	-	79
	G1/8	14	■ 350	-	-	-	-	-	■ 380	-	■ 380	-	-	-	92
Sub-base valve, solenoid valve VUVG-B															
	M3	10 A	-	-	-	-	-	-	■ 100	■ 80	■ 100	■ 90	■ 90	■ 90	72
	M5	10	■ 150	■ 150	■ 150	■ 130	■ 120	■ 120	■ 210	■ 180	■ 210	■ 200	■ 200	■ 200	83
	M7	10	■ 160	■ 160	■ 160	■ 140	■ 130	■ 130	■ 270	■ 230	■ 270	■ 250	■ 250	■ 250	83
	G1/8	14	■ 540	■ 510	■ 540	■ 430	■ 410	■ 410	■ 580	■ 580	■ 580	■ 540	■ 510	■ 510	92
	G1/4	18	■ 800	■ 800	■ 800	■ 800	■ 800	■ 800	■ 1000	■ 1000	■ 1000	■ 950	■ 950	■ 950	105

# Solenoid valves VUVG

Product range overview



Design type	Size	Description	→ Page/ Internet
<b>Manifold rail VABM- ... -S- ..., for in-line valves (manifold assembly)</b>			
	10AS	Size M3	26, 45, 59, 69
	10S	Size M5, M7	
	14S	Size G1/8	
	18S	Size G1/4	
<b>Manifold rail VABM, for sub-base valves (manifold assembly)</b>			
	10AW	Size M3	76, 89, 101, 110
	10W	Size M5	
	10HW	Size M7	
	14W	Size G1/8	
	18W	Size G1/4	

# Solenoid valves VUVG

Overview of valve functions



Valve	Valve code	Description	Order code <sup>1)</sup>	VUVG-LK, VUVG-BK		VUVG-L, VUVG-B			
				Size		Size			
				M5/M7	G1/8	M3	M5/M7	G1/8	G1/4
<b>2x 3/2-way valve, normally closed, pneumatic spring</b>									
	T32C-A	In-line valve, internal pilot air supply	VD, K	■	■	-	■	■	■
		In-line valve, external pilot air supply		-	-	-	■	■	-
		Sub-base valve, external pilot air supply		-	-	-	■	■	■
<b>2x 3/2-way valve, normally open, pneumatic spring</b>									
	T32U-A	In-line valve, internal pilot air supply	N	-	-	-	■	■	■
		In-line valve, external pilot air supply		-	-	-	■	■	-
		Sub-base valve, external pilot air supply		-	-	-	■	■	■
<b>2x 3/2-way valve, 1x normally open, 1x normally closed, pneumatic spring</b>									
	T32H-A	In-line valve, internal pilot air supply	H	-	-	-	■	■	■
		In-line valve, external pilot air supply		-	-	-	■	■	-
		Sub-base valve, external pilot air supply		-	-	-	■	■	■

1) Order code for valve terminal/position function

# Solenoid valves VUVG

Overview of valve functions



Valve	Valve code	Description	Order code <sup>1)</sup>	VUVG-LK, VUVG-BK		VUVG-L, VUVG-B			
				Size		Size			
				M5/M7	G1/8	M3	M5/M7	G1/8	G1/4
<b>2x3/2-way valve, normally closed, mechanical spring</b>									
	T32C-M	In-line valve, internal pilot air supply	VK	-	-	-	■	■	■
		In-line valve, external pilot air supply		-	-	-	■	■	■
		Sub-base valve, external pilot air supply		-	-	-	■	■	■
<b>2x3/2-way valve, normally open, mechanical spring</b>									
	T32U-M	In-line valve, internal pilot air supply	VN	-	-	-	■	■	■
		In-line valve, external pilot air supply		-	-	-	■	■	■
		Sub-base valve, external pilot air supply		-	-	-	■	■	■
<b>2x3/2-way valve, 1x normally open, 1x normally closed, mechanical spring</b>									
	T32H-M	In-line valve, internal pilot air supply	VH	-	-	-	■	■	■
		In-line valve, external pilot air supply		-	-	-	■	■	■
		Sub-base valve, external pilot air supply		-	-	-	■	■	■

1) Order code for valve terminal/position function

# Solenoid valves VUVG

Overview of valve functions



Valve	Valve code	Description	Order code <sup>1)</sup>	VUVG-LK, VUVG-BK		VUVG-L, VUVG-B			
				Size		Size			
				M5/M7	G1/8	M3	M5/M7	G1/8	G1/4
<b>5/2-way double solenoid valve</b>									
	B52	In-line valve, internal pilot air supply	VJ, J	■	■	■	■	■	■
		In-line valve, external pilot air supply		-	-	■	■	■	■
		Sub-base valve, external pilot air supply		-	-	■	■	■	■
<b>5/2-way valve, monostable, pneumatic spring</b>									
	M52-A	In-line valve, internal pilot air supply	VM, M	■	■	-	-	■	-
		In-line valve, external pilot air supply		-	-	-	-	■	-
		Sub-base valve, external pilot air supply		-	-	-	-	■	-
<b>5/2-way valve, monostable, mechanical spring</b>									
	M52-M	In-line valve, internal pilot air supply	A	-	-	■	■	■	■
		In-line valve, external pilot air supply		-	-	■	■	■	■
		Sub-base valve, external pilot air supply		-	-	■	■	■	■
<b>5/2-way valve, single solenoid/monostable, pneumatic/mechanical spring</b>									
	M52-R	In-line valve, internal pilot air supply	P	-	-	■	■	-	■
		In-line valve, external pilot air supply		-	-	■	■	-	■
		Sub-base valve, external pilot air supply		-	-	■	■	-	■

1) Order code for valve terminal/position function

# Solenoid valves VUVG

Overview of valve functions



Valve	Valve code	Description	Order code <sup>1)</sup>	VUVG-LK, VUVG-BK		VUVG-L, VUVG-B			
				Size		Size			
				M5/M7	G1/8	M3	M5/M7	G1/8	G1/4
<b>5/3-way valve, mid-position closed</b>									
	P53C	In-line valve, internal pilot air supply	G	-	-	■	■	■	■
		In-line valve, external pilot air supply		-	-	■	■	■	■
		Sub-base valve, external pilot air supply		-	-	■	■	■	■
<b>5/3-way valve, mid-position pressurized</b>									
	P53U	In-line valve, internal pilot air supply	B	-	-	■	■	■	■
		In-line valve, external pilot air supply		-	-	■	■	■	■
		Sub-base valve, external pilot air supply		-	-	■	■	■	■
<b>5/3-way valve, mid-position exhausted</b>									
	P53E	In-line valve, internal pilot air supply	E	-	-	■	■	■	■
		In-line valve, external pilot air supply		-	-	■	■	■	■
		Sub-base valve, external pilot air supply		-	-	■	■	■	■


1) Order code for valve terminal/position function



# Solenoid valves VUVG

Sample system overview In-line valves M5/M7

## Manifold assembly

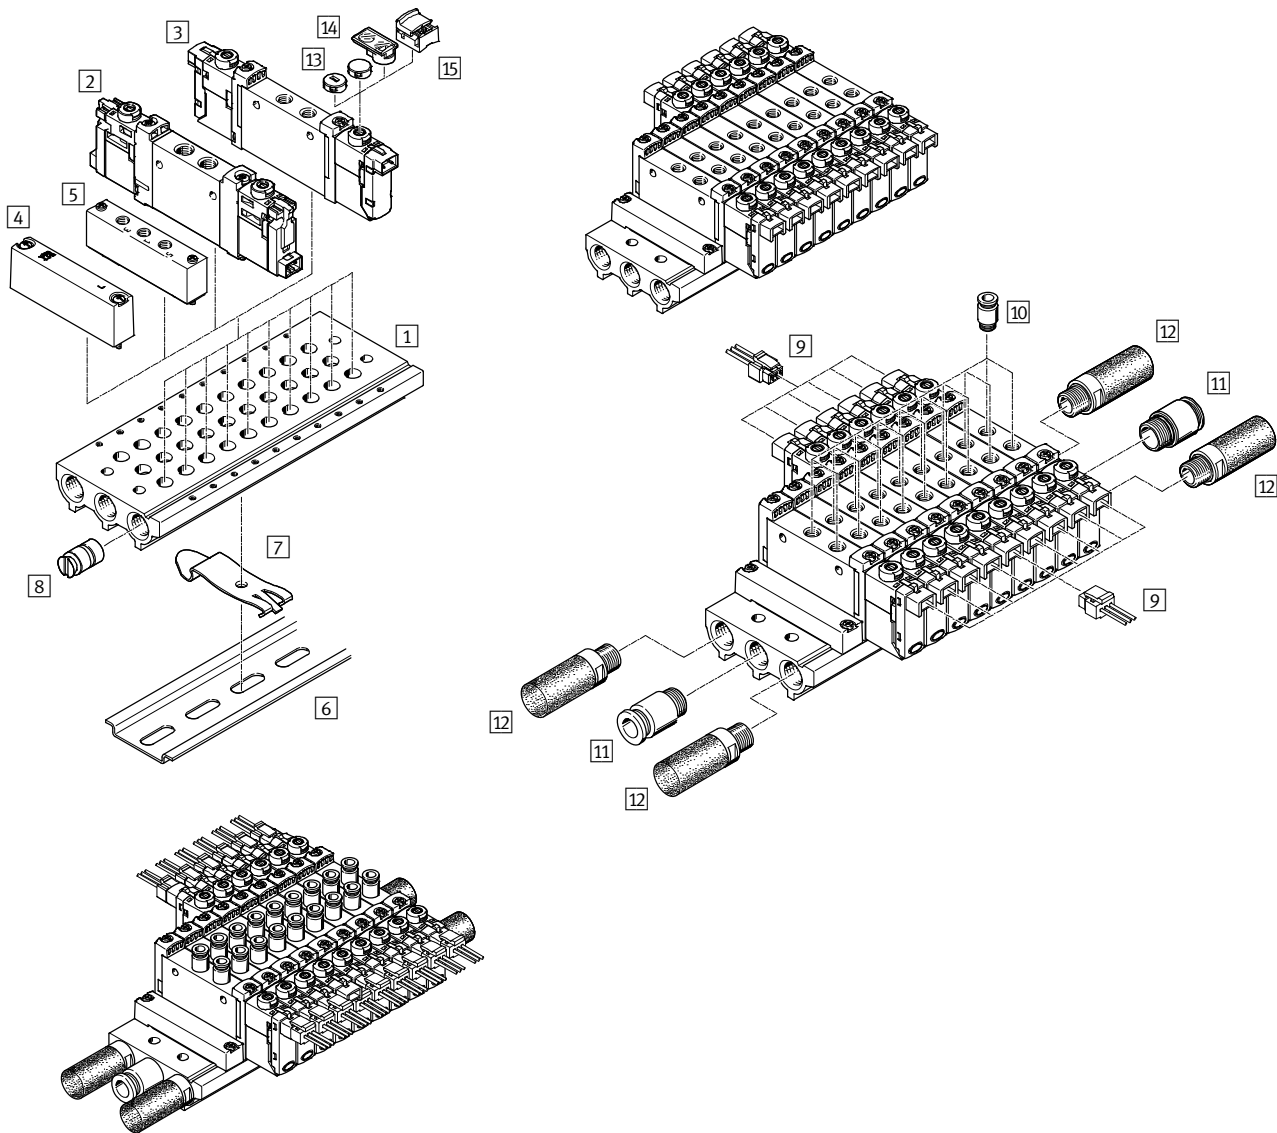


## Manifold assembly and accessories

	Type	Description	→ Page/Internet	
1	Manifold rail	VABM-L1-10S-G18-...	For 2 to 10, 12, 14 and 16 valve positions	45
2	SOLENOID VALVE	VUVG-LK ...	In-line valve 2x3/2-way, 5/2-way and 5/3-way	27
3	SOLENOID VALVE	VUVG-L ...	In-line valve 2x3/2-way, 5/2-way and 5/3-way	27
4	Cover plate	VABB-L1-10-S	For covering an unused vacant position	45
5	Supply plate	VABF-L1-10-P3A4- ...	For air supply at duct 1 and duct 3 and 5	45
6	H-rail	NRH-35-2000	For mounting the valve manifold	113
7	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve manifold on an H-rail	113
8	Separator	VABD-...	For creating pressure zones	45
9	Plug socket with cable	NEBV-H1G2-...-LE2	For electrical sub-base box H2 and H3	117
10	Push-in fitting	QS...	Push-in fitting for duct 2 and 4	118
11	Push-in fitting	QS...	Push-in fitting for air supply at duct 1	118
12	Pneumatic silencers	U...	For duct 3 and 5	119
13	Cover cap	VMPA-HB...-B	For manual override	113
14	Identification holder	ASLR-D	For labelling the valves, covering the retaining screw and the manual override	119
15	Cover	VAMC	For manual override	119

# Solenoid valves VUVG

Sample system overview, sub-base valves M5/M7

## Manifold assembly

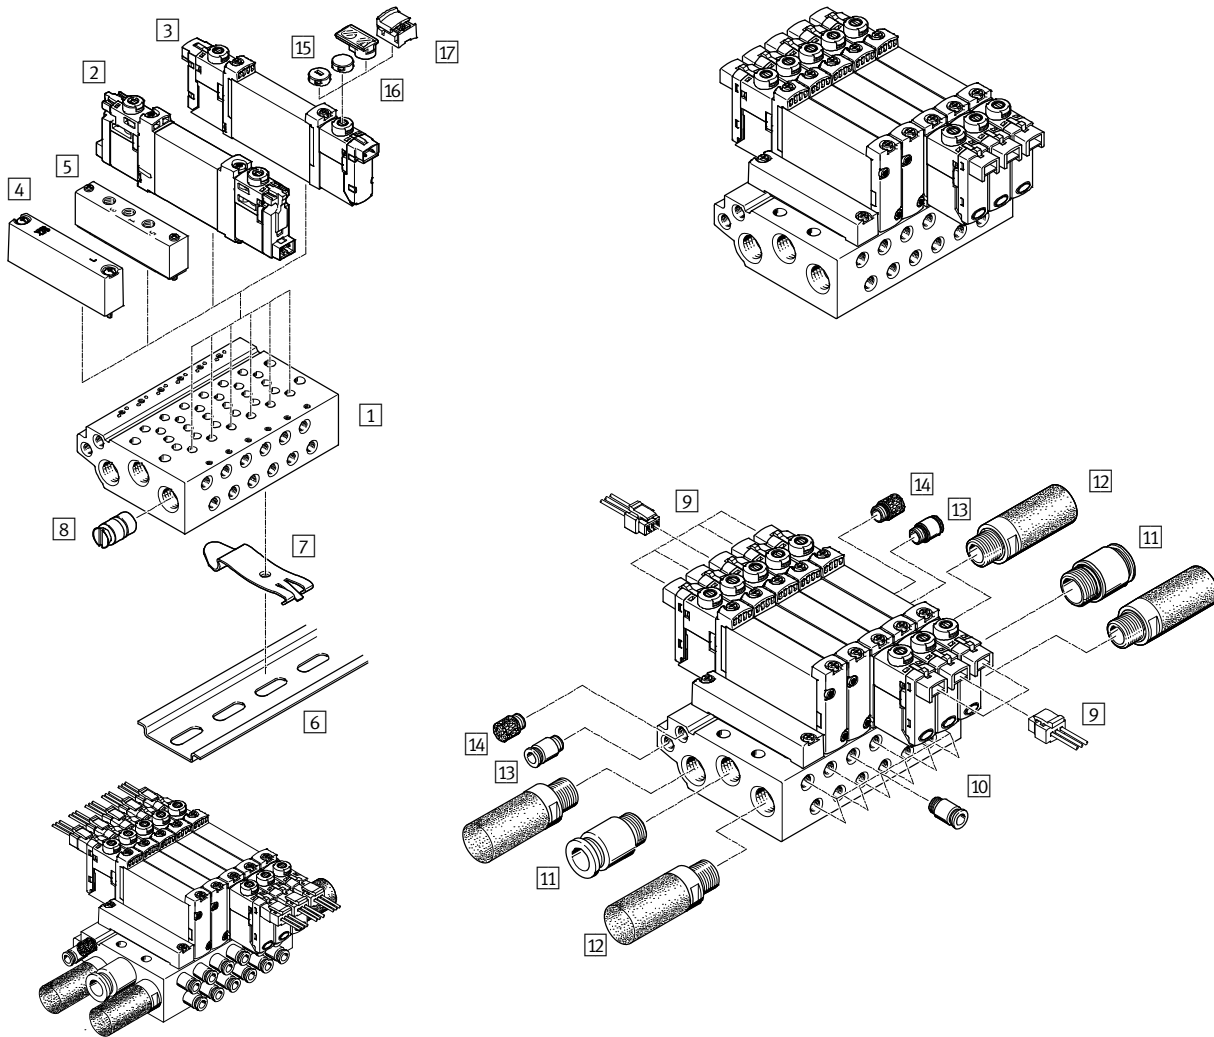

### Manifold assembly and accessories

	Type	Description	→ Page/Internet	
1	Manifold rail	VABM-L1-10 ...-G18- ...	For 2 to 10, 12, 14 and 16 valve positions	88
2	SOLENOID VALVE	VUVG-BK ...	Sub-base valve 2x3/2-way, 5/2-way and 5/3-way	78
3	SOLENOID VALVE	VUVG-B ...	Sub-base valve 2x3/2-way, 5/2-way and 5/3-way	78
4	Cover plate	VABB-L1-10-W	For covering an unused vacant position	89
5	Supply plate	VABF-L1-10-P3A4- ...	For air supply at duct 1 and duct 3 and 5	89
6	H-rail	NRH-35-2000	For mounting the valve manifold	113
7	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve manifold on an H-rail	113
8	Separator	VABD- ...	For creating pressure zones	89
9	Plug socket with cable	NEBV-H1G2-KN-...-LE2	For electrical sub-base H2 and H3	117
10	Push-in fitting	QS...	Push-in fitting for duct 2 and 4	118
11	Push-in fitting	QS...	Push-in fitting for air supply at duct 1	118
12	Pneumatic silencers	U...	For duct 3 and 5	119
13	Push-in fitting	QS...	Push-in fitting for pilot air supply at duct 12/14	118
14	Pneumatic silencers	U...	Silencer for pilot air exhaust at duct 82/84	119
15	Cover cap	VMPA-HB...-B	For manual override	113
16	Identification holder	ASLR-D	For labelling the valves, covering the retaining screw and the manual override	119
17	Cover	VAMC	For manual override	119

# Solenoid valves VUVG, in line valves M3

Type code

<b>VUVG</b>	-		<b>10 A</b>	-						
<b>Valve type</b>										
In-line valve			<b>L</b>							
Semi in-line valve			<b>S</b>							
<b>Design</b>										
Piston slide with sealing cartridge			-							
<b>Size</b>										
10 mm			<b>10 A</b>							
<b>Valve function</b>										
5/2-way valve, bistable									<b>B52</b>	
5/2-way valve, single solenoid									<b>M52</b>	
5/3-way valve, mid-position closed									<b>P53C</b>	
5/3-way valve, mid-position exhausted									<b>P53E</b>	
5/3-way valve, mid-position pressurized									<b>P53U</b>	
<b>Reset method</b>										
Mechanical spring with M52									<b>M</b>	
Pneumatic/mechanical spring with M52									<b>R</b>	
With B52 and P53									-	
<b>Pilot air</b>										
Internal									-	
External									<b>Z</b>	
<b>Manual override</b>										
Non-detenting									<b>H</b>	
Covered									<b>S</b>	
Non-detenting, detenting									<b>T</b>	
Detenting, without accessories									<b>Y</b>	
<b>Pneumatic connection</b>										
M3 thread									<b>M3</b>	
Push-in connector 3 mm									<b>Q3</b>	
Push-in connector 4 mm									<b>Q4</b>	
Push-in connector 1/8"									<b>T18</b>	
Push-in connector 5/32"									<b>T532</b>	

										<b>L</b>	-
<b>Accessories for valve/connecting cable</b>											
<b>C1...4</b>	Connection pattern H: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m										
<b>N1...4</b>	M8x1, 3-pin, straight: 1 = 2.5 m, 2 = 5 m; angled: 3 = 2.5 m, 4 = 5 m										
<b>N5...8</b>	M8x1, 4-pin, straight: 5 = 2.5 m, 6 = 5 m; angled: 7 = 2.5 m, 8 = 5 m										
<b>S1...4</b>	Connection pattern S, 1 = 0.5 m, 2 = 1 m, 3 = 2.5, 4 = 5 m										
<b>W1...4</b>	Connection pattern H, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m										
<b>WS1...4</b>	Connection pattern S with flying leads, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m										
<b>Advertisement</b>											
<b>L</b>	LED										
<b>Circuitry</b>											
-	Without holding current reduction (HCR)										
<b>R</b>	With holding current reduction (HCR)										
<b>Electrical connection</b>											
<b>H2</b>	Connection pattern H, horizontal plug connector										
<b>H3</b>	Connection pattern H, vertical plug										
<b>K6...9</b>	Cables: 6 = 0.5 m, 7 = 1 m, 8 = 2.5 m, 9 = 5 m										
<b>L1...4</b>	with 2x flying leads: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m										
<b>P3</b>	Without electrical sub-base										
<b>R1</b>	Individual plug connector M8, 4-pin										
<b>R8</b>	Individual plug connector M8, 3-pin										
<b>S2</b>	Connection pattern S, horizontal plug connector										
<b>S3</b>	Connection pattern S, vertical connector										
<b>Nominal operating voltage</b>											
<b>1</b>	24 V DC										
<b>4</b>	5 V DC										
<b>5</b>	12 V DC										
<b>Exhausting with VUVG-L</b>											
<b>QN</b>	Push-in fitting										
<b>U</b>	Pneumatic silencers										
-	M3 thread										




# Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3


Technical data

Function

- 5/2-way, single solenoid
- 5/2-way, double solenoid
- 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 10 mm
-  - Flow rate  
90 ... 100 l/min
-  - Voltage  
5, 12 and 24 V DC

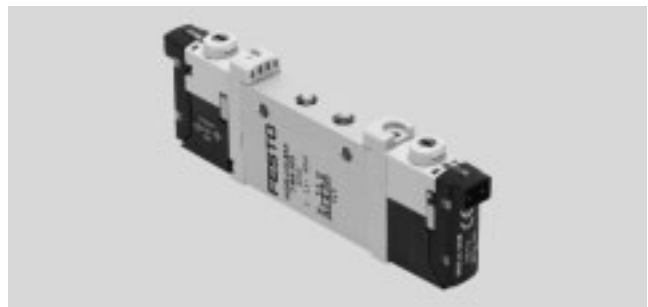

General Technical data VUVG-L						
Valve function	M52-R	B52	M52-M	P53		
Normal position	–	–	–	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single solenoid	Double solenoid	Single solenoid	Single solenoid		
Reset method: pneumatic spring	Yes <sup>4)</sup>	–	None	–		
Reset method: mechanical spring	Yes <sup>4)</sup>	–	Yes	Yes		
Vacuum operation at port 1	Only with external pilot air supply					
Design	Piston spool					
Sealing principle	Soft					
Actuation type	Electric					
Type of control	Pilot					
Pilot air supply	Internal or external					
Exhaust function	With flow control option					
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting					
Type of mounting	Optionally via through-holes <sup>5)</sup> or on manifold rail					
Mounting position	Optional					
Nominal width [mm]	2		1.4	2		
Standard nominal flow rate [l/min]	100		80	90		
Flow rate on manifold rail [l/min]	100		80	90		
Switching time on/off [ms]	7/15	–	7/21	8/25		
Changeover time [ms]	–	5	–	14		
Size [mm]	10					
Ports 1, 2, 3, 4, 5, 12/14	M3					
Product weight [g]	38	49	37			
Approval certificate	c UL us - Recognized(OL)					
	c CSA us (OL)					
	RCM mark					
CE marking (see declaration of conformity) <sup>6)</sup>	To EU EMC Directive					
Corrosion resistance class CRC <sup>7)</sup>	2					

1) C=Normally closed/mid-position closed

2) U=Normally open/mid-position pressurized

3) E=Mid-position exhausted

4) Combined reset method

5) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.

6) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

7) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

Technical data

Operating and environmental conditions					
Valve function		M52-R <sup>1</sup>	B52	M52-M <sup>2</sup>	P53
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]			
Operating pressure	Internal	[bar]	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	-0.9 ... 10		-0.9 ... 8
Pilot pressure <sup>3)</sup>		[bar]	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60		
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60		

1) Mixed, pneumatic/mechanical spring

2) Mechanical spring

3) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical sub-base → Page 112
Operating voltage	[DC V] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

# Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3


Technical data



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

5/2-way and 5/3-way valve

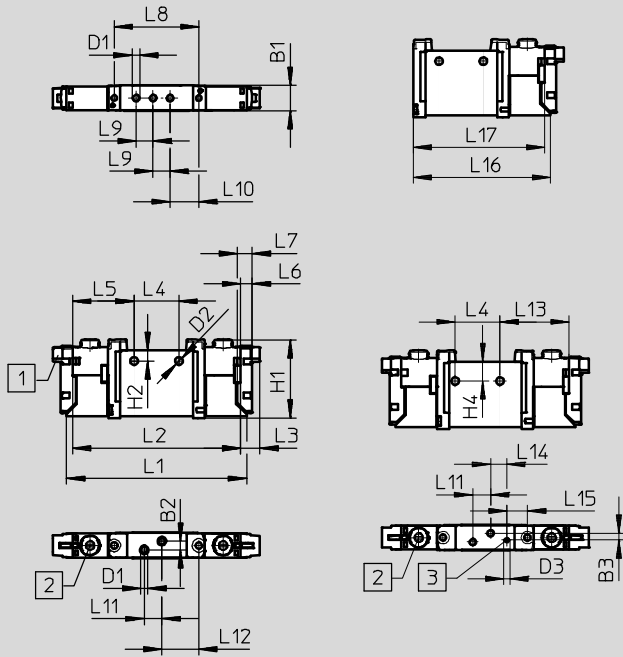

Note  
More dimensions  
Electrical sub-bases  
→ Page 114

1 Electrical connection for solenoid valve, horizontal

2 Manual override

3 Connection for external pilot air supply


Type	B1	B2	B3	D1	D2	D3	H1	H2	L1	L2	L3	L4	L5
VUVG-L10A-...-M3...	10.2	3.6	2.83	M3	3.2	M3	32.5	4.4	74.3	69.3	8	18.5	25.4
VUVG-S10A-...-M3...													

Type	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17
VUVG-L10A-...-M3...	4.85	6.15	34.9	7	11.9	7.3	15.25	28.5	6.7	8.54	57.06	54.56
VUVG-S10A-...-M3...												

## Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

FESTO

Ordering data

Ordering data				
Description		Part no.	Type	
In-line valve M3, without electrical sub-base				
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	566437	VUVG-L10A-M52-RT-M3-1P3
		Reset method: mechanical spring	574345	VUVG-L10A-M52-MT-M3-1P3
	External pilot air supply	Reset method: pneumatic/mechanical spring	566443	VUVG-L10A-M52-RZT-M3-1P3
		Reset method: mechanical spring	574346	VUVG-L10A-M52-MZT-M3-1P3
	5/2-way valve, double solenoid			
	Internal pilot air supply		566438	VUVG-L10A-B52-T-M3-1P3
	External pilot air supply		566444	VUVG-L10A-B52-ZT-M3-1P3
	5/3-way valve			
	Internal pilot air supply	Mid-position closed, mechanical spring reset method	566439	VUVG-L10A-P53C-T-M3-1P3
		Mid-position exhausted, mechanical spring reset method	566440	VUVG-L10A-P53E-T-M3-1P3
		Mid-position pressurized, mechanical spring reset method	566441	VUVG-L10A-P53U-T-M3-1P3
	External pilot air supply	Mid-position closed, mechanical spring reset method	566445	VUVG-L10A-P53C-ZT-M3-1P3
		Mid-position exhausted, mechanical spring reset method	566446	VUVG-L10A-P53E-ZT-M3-1P3
Mid-position pressurized, mechanical spring reset method		566447	VUVG-L10A-P53U-ZT-M3-1P3	

# Solenoid valves VUVG-S10A, in-line valves M3

Manifold assembly




In-line valves for manifold assembly



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

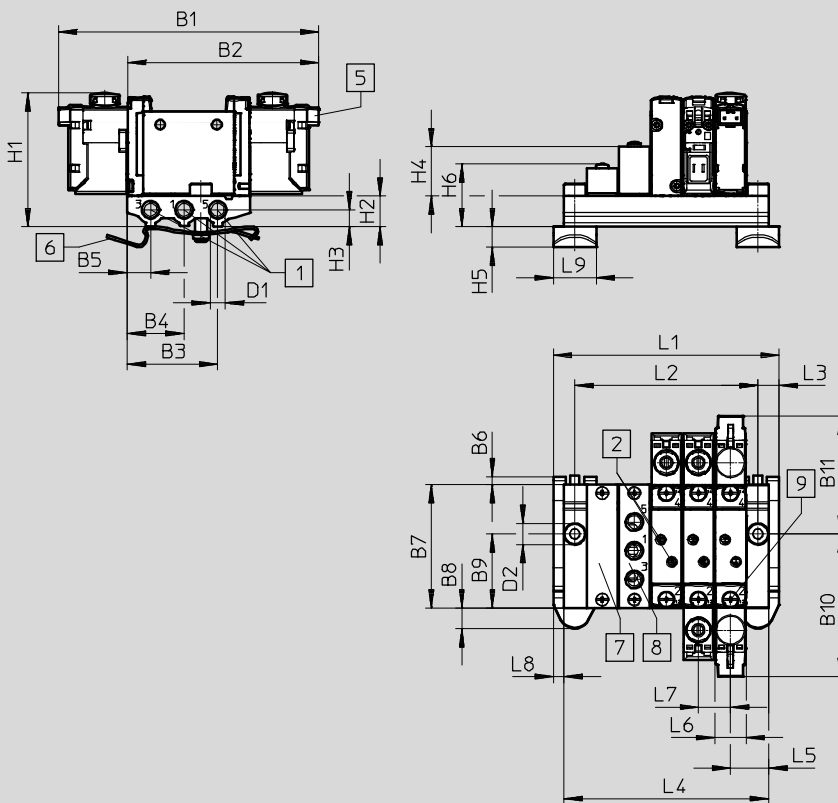

Note  
 More dimensions  
 Electrical sub-bases  
 → Page 114

- 1** Ports 1, 3, 5
- 2** Ports 2 and 4
- 5** Electrical connection for electrical sub-bases and accessories
- 6** H-rail mounting (two M4x16 screws are required for attachment)
- 7** Cover plate screws (two M4x16 screws are required for attachment)
- 8** Supply plate
- 9** Valves/blanking plate mounting on manifold rail

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	D1
VABM-L1-10AS-M5	85.3	62.6	29.7	18.7	7.7	3	40.3	6.8	24.2	46.7	38.6	M5


Type	D2	H1	H2	H3	H4	H5	H6	L3	L5	L6	L7	L8	L9
VABM-L1-10AS-M5	∅ 4.5	43.8	10	5.5	16.2	6.8	20.3	7	12.5	10.3	10.5	3.5	14

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1	42.5	53	63.5	74	84.5	95	105.5	116	126.5	147.5	168.5	189.5
L2	28.5	39	49.5	60	70.5	81	91.5	102	112.5	133.5	154.5	175.5
L4	35.5	46	56.5	67	77.5	88	98.5	109	119.5	140.5	161.5	182.5
VABM weight [g]	26	34	42	50	58	66	74	82	90	106	122	138



# Solenoid valves VUVG-S10A, in-line valves M3

Ordering data

Technical data – Manifold rails							
	Ports	CRC	Material <sup>2)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	1, 3, 5				Valve	H-rail	Wall
	M5	2 <sup>1)</sup>	Wrought aluminium alloy	-0.9 ... 10	0.45	1.5	3






- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) Note on materials: RoHS-compliant.

## Order code – Manifold rails

<b>VABM</b>	-	<b>L1</b>	-	<b>10A</b>	<b>S</b>	-	<b>M5</b>	-	
Valve manifold parts									Number of valve positions
Manifold rail		<b>VABM</b>							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		<b>L1</b>					<b>M5</b>		M5 thread
size									
10 mm				<b>10A</b>					
Manifold rail with port 1, 3, 5									
For in-line valves M3					<b>S</b>				

# Solenoid valves VUVG-S10A, in-line valves M3

Ordering data

Ordering data – Manifold rail			
	Description	Part no.	Type
Manifold rail for in-line valves (manifold assembly)			
	For size M3	2 valve positions	<b>566522</b> VABM-L1-10AS-M5-2
		3 valve positions	<b>566523</b> VABM-L1-10AS-M5-3
		4 valve positions	<b>566524</b> VABM-L1-10AS-M5-4
		5 valve positions	<b>566525</b> VABM-L1-10AS-M5-5
		6 valve positions	<b>566526</b> VABM-L1-10AS-M5-6
		7 valve positions	<b>566527</b> VABM-L1-10AS-M5-7
		8 valve positions	<b>566528</b> VABM-L1-10AS-M5-8
		9 valve positions	<b>566529</b> VABM-L1-10AS-M5-9
		10 valve positions	<b>566530</b> VABM-L1-10AS-M5-10
		12 valve positions	<b>566531</b> VABM-L1-10AS-M5-12
		14 valve positions	<b>566532</b> VABM-L1-10AS-M5-14
16 valve positions	<b>566533</b> VABM-L1-10AS-M5-16		
Cover plate			
	For valve position on manifold rail, including screws and seal	<b>569986</b>	Technical data → Internet: vabf <b>VABB-L1-10A</b>
Separator			
	For creating pressure zones	<b>570872</b>	Technical data → Internet: vabd <b>VABD-4.2-B</b>
Supply plate			
	For valve position on manifold rail, including screws and seal	<b>569990</b>	Technical data → Internet: vabf <b>VABF-L1-10A-P3A4-M5</b>
Seals for in-line valves			
	For in-line valves M3	Delivery unit: 10 sets (each with 2 screws and 1 seal)	<b>566670</b> VABD-L1-10AX-S-M3 Technical data → Internet: vabd



# Solenoid valves VUVG-LK10, in-line valves M5


## Technical data


### Function

2x 3/2C

5/2-way, single solenoid

5/2-way, double solenoid valve

-  - Size 10 mm

-  - Flow rate  
180 ... 195 l/min

-  - Voltage  
24 V DC

Circuit symbol → Page 13



General Technical data VUVG-LK			
Valve function	T32-A	M52-A	B52
Normal position	C <sup>1)</sup>	–	–
Stable position	Single solenoid		Bistable
Reset method: pneumatic spring	Yes	Yes	–
Design	Piston spool		
Sealing principle	Soft		
Actuation type	Electric		
Type of control	Pilot		
Pilot air supply	Internal		
Exhaust air function	With flow control option		
Manual override	Detenting, non-detenting		
Type of mounting	Optionally via through-holes <sup>2)</sup> or on manifold rail		
Mounting position	Optional		
Standard nominal flow rate	[l/min] 180	195	195
Switching time on/off	[ms] 12/14	14/17	–
Changeover time	[ms] –		7
Size	[mm] 10		
Ports	2, 4	M5	
Product weight	[g] 55	45	57
Corrosion resistance class CRC <sup>3)</sup>	2		

1) C=Normally closed

2) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.

3) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Safety data	
Max. positive test pulse with logic 0	[μs] 1600
Max. negative test pulse with logic 1	[μs] 3000
Shock resistance	Shock test with severity level 1 in accordance with FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

# Solenoid valves VUVG-LK10, in-line valves M5



Technical data

Operating and environmental conditions			
Valve function		T32-A <sup>1</sup>	M52-A <sup>1</sup> B52
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]	
Note about the operating/pilot medium		Operation with lubricated medium possible (in which case lubricated operation will always be required)	
Operating pressure	[bar]	1.5 ... 7	1.5 ... 7
Ambient temperature	[°C]	-5 ... +50	
Temperature of medium	[°C]	-5 ... +50	


1) Pneumatic spring.

Electrical data	
Electrical connection	Via electrical sub-base → Page 112
Operating voltage	[V DC] 24 ±10%
Power	[W] 0.7
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)
Signal status display	LED
Maximum switching frequency	[Hz] 2

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant Contains paint-wetting impairment substances

Pin allocation for electrical sub-base			
	Pin		Description
Rectangular plug connector, plug pattern H			
	1	+ or -	Protective circuit without holding current reduction
	2	+ or -	
Round plug, M8, 3-pin			
	1	Not used	Protective circuit without holding current reduction
	3	+ or -	
	4	+ or -	

### Protective circuit without holding current reduction


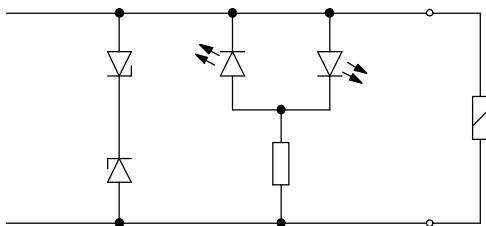


The solenoid coils are equipped with a protective circuit to arrest sparks and protect against polarity reversal.

# Solenoid valves VUVG-LK10, in-line valves M5

Technical data

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)
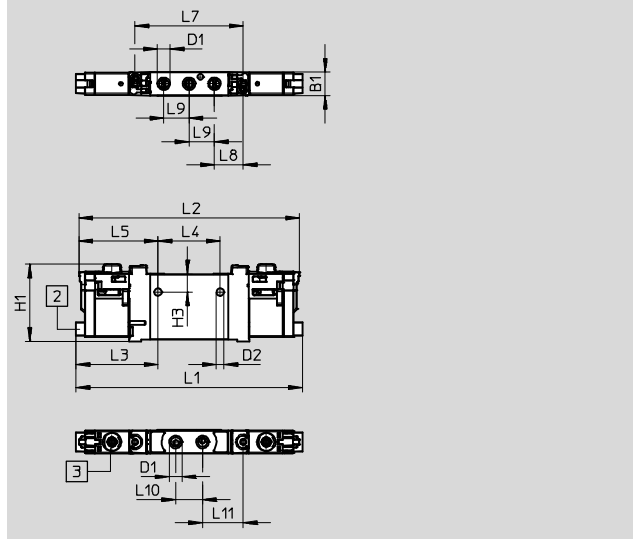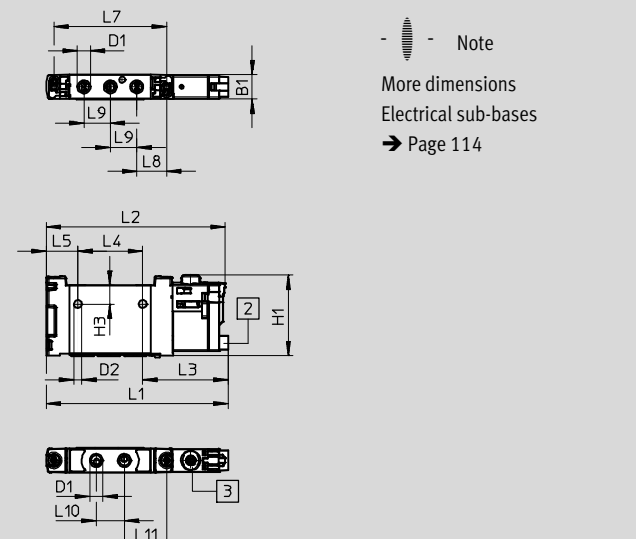
<p>2x 3/2-way, 5/2-way valve, double solenoid</p> 	<p>5/2-way valve, single solenoid</p> 	<p>Note More dimensions Electrical sub-bases → Page 114</p>
<p><span style="border: 1px solid black; padding: 2px;">2</span> Horizontal electrical connection</p>		<p><span style="border: 1px solid black; padding: 2px;">3</span> Manual override</p>



Type	B1	D1	D2	H1	H3	L1	L2	L3	L4
VUVG-LK10-T32C-...-M5...	10.2	M5	3.3	33.6	7.8	98.3	95.8	35.7	27
VUVG-LK10-B52-...-M5...						75.9	74.6		
VUVG-LK10-M52-...-M5...									

Type	L5	L7	L8	L9	L10	L11
VUVG-LK10-T32C-...-M5...	34.4	47	12.5	11	11.7	17.7
VUVG-LK10-B52-...-M5...						
VUVG-LK10-M52-...-M5...	13.2					

# Solenoid valves VUVG-LK10, in-line valves M5

Ordering data

★ Core product range

Ordering data				
		Description	Part no.	Type
In-line valve M5, with electrical sub-base R8				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042542	VUVG-LK10-T32C-AT-M5-1R8L-S
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042543	VUVG-LK10-M52-AT-M5-1R8L-S
5/2-way valve, double solenoid				
	Internal pilot air supply		★ 8042544	VUVG-LK10-B52-T-M5-1R8L-S
In-line valve M5, with electrical sub-base H2				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042538	VUVG-LK10-T32C-AT-M5-1H2L-S
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042539	VUVG-LK10-M52-AT-M5-1H2L-S
5/2-way valve, double solenoid				
	Internal pilot air supply		★ 8042540	VUVG-LK10-B52-T-M5-1H2L-S

Festo core product range




★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-LK10, in-line valves M7

## Technical data

Function  
 2x 3/2C  
 5/2-way, single solenoid  
 5/2-way, double solenoid valve

-  - Size 10 mm
-  - Flow rate  
280 ... 340 l/min
-  - Voltage  
24 V DC

Circuit symbol → Page 13



General Technical data VUVG-LK				
Valve function		T32-A	M52-A	B52
Normal position		C <sup>1)</sup>	-	-
Stable position		Single solenoid		
Reset method: pneumatic spring		Yes	Yes	-
Design		Piston spool		
Sealing principle		Soft		
Actuation type		Electric		
Type of control		Pilot		
Pilot air supply		Internal		
Exhaust air function		With flow control option		
Manual override		Detenting, non-detenting		
Type of mounting		Optionally via through-holes <sup>2)</sup> or on manifold rail		
Mounting position		Optional		
Standard nominal flow rate	[l/min]	280	340	340
Switching time on/off	[ms]	12/14	14/17	-
Changeover time	[ms]	-	-	7
Size	[mm]	10		
Ports	2, 4	M7		
Product weight	[g]	55	45	57
Corrosion resistance class CRC <sup>3)</sup>		2		

1) C=Normally closed

2) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.

3) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Safety data		
Max. positive test pulse with logic 0	[µs]	1600
Max. negative test pulse with logic 1	[µs]	3000
Shock resistance		Shock test with severity level 1 in accordance with FN 942017-5 and EN 60068-2-27
Vibration resistance		Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6



# Solenoid valves VUVG-LK10, in-line valves M7



Technical data

Operating and environmental conditions			
Valve function		T32-A <sup>1</sup>	M52-A <sup>1</sup>   B52
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]	
Note about the operating/pilot medium		Operation with lubricated medium possible (in which case lubricated operation will always be required)	
Operating pressure	[bar]	1.5 ... 7	2.5 ... 7   1.5 ... 7
Ambient temperature	[°C]	-5 ... +50	
Temperature of medium	[°C]	-5 ... +50	


1) Pneumatic spring.

Electrical data	
Electrical connection	Via electrical sub-base → Page 112
Operating voltage	[DC V] 24 ±10%
Power	[W] 0.7
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)
Signal status display	LED
Maximum switching frequency	[Hz] 2

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant Contains paint-wetting impairment substances

Pin allocation for electrical sub-base			
	Pin		Description
Rectangular plug connector, plug pattern H			
	1	+ or -	Protective circuit without holding current reduction
	2	+ or -	
Round plug, M8, 3-pin			
	1	Not used	Protective circuit without holding current reduction
	3	+ or -	
	4	+ or -	

### Protective circuit without holding current reduction

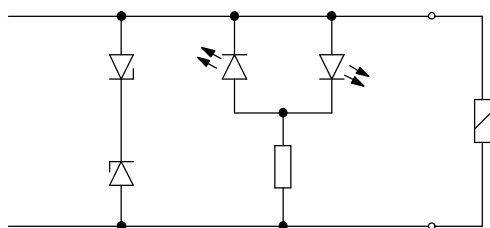

The solenoid coils are equipped with a protective circuit to arrest sparks and protect against polarity reversal.

# Solenoid valves VUVG-LK10, in-line valves M7

Technical data

**Dimensions** Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way valve, double solenoid

5/2-way valve, single solenoid

Note  
More dimensions  
Electrical sub-bases  
→ Page 114

2

 Horizontal electrical connection
 

3

 Manual override



Type	B1	D1	D2	H1	H3	L1	L2	L3	L4
VUVG-LK10-T32C-...-M7...	10.2	M7	3.3	33.6	7.8	98.3	95.8	35.7	27
VUVG-LK10-B52-...-M7...						75.9	74.6	35.7	
VUVG-LK10-M52-...-M7...									

Type	L5	L7	L8	L9	L10	L11
VUVG-LK10-T32C-...-M7...	34.4	47	12.5	11	11.7	17.7
VUVG-LK10-B52-...-M7...						
VUVG-LK10-M52-...-M7...	13.2					

# Solenoid valves VUVG-LK10, in-line valves M7

Ordering data

★ Core product range

Ordering data				
	Description		Part no.	Type
In-line valve M7, with electrical sub-base R8				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042550	VUVG-LK10-T32C-AT-M7-1R8L-S
	5/2-way valve, single solenoid,			
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042551	VUVG-LK10-M52-AT-M7-1R8L-S
	5/2-way valve, double solenoid			
	Internal pilot air supply		★ 8042552	VUVG-LK10-B52-T-M7-1R8L-S
In-line valve M7, with electrical sub-base H2				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042546	VUVG-LK10-T32C-AT-M7-1H2L-S
	5/2-way valve, single solenoid,			
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042547	VUVG-LK10-M52-AT-M7-1H2L-S
	5/2-way valve, double solenoid			
	Internal pilot air supply		★ 8042548	VUVG-LK10-B52-T-M7-1H2L-S

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5







## Technical data

### Function

2x 3/2C, 2x 3/2U, 2x 3/2H  
5/2-way, single pilot  
5/2-way, double solenoid  
5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 10 mm
-  - Flow rate  
125 ... 220 l/min
-  - Voltage  
5, 12 and 24 V DC

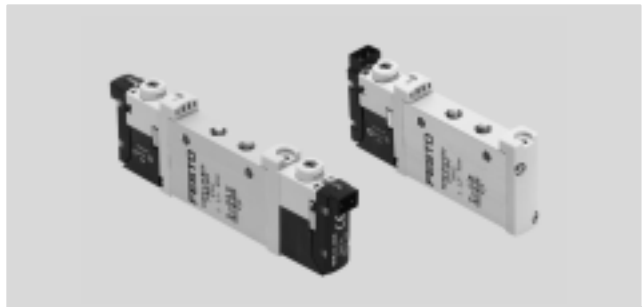

General technical data, VUVG-L M5														
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53				
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>		
Stable position	Single pilot							Double solenoid	One position	One position				
Reset method: pneumatic spring	Yes			None			Yes <sup>5)</sup>	-	None	-				
Reset method: mechanical spring	None			Yes			Yes <sup>5)</sup>	-	Yes	Yes				
Vacuum operation at port 1	None			Only with external pilot air supply										
Design	Piston spool													
Sealing principle	Soft													
Type of control	Electric													
Type of control	Pilot													
Pilot air supply	Internal or external													
Exhaust function	With flow control option													
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting													
Type of mounting	Optionally via through-holes <sup>6)</sup> or on manifold rail													
Mounting position	Optional													
Nominal size [mm]	2.7	1.9	1.8				3.2	2.2		3.2				
Standard nominal flow rate [l/min]	150	135	125	125				220	190		210			
Flow rate on manifold rail [l/min]	150	135	125	125				220	190		210			
Switching time on/off [ms]	6/16		8/11				7/19		-	8/24		10/30		
Changeover time [ms]	-							7		-		15		
Size [mm]	10													
Ports	1, 2, 3, 4, 5			M5										
	12/14			M3										
Product weight [g]	55			54			45		55		44		55	
Approval certificate	c UL us - Recognized(OL)													
	c CSA us (OL)													
	RCM mark													
CE marking (see declaration of conformity) <sup>7)</sup>	To EU EMC Directive													
Corrosion resistance class CRC <sup>8)</sup>	2													

1) C=Normally closed/mid-position closed

2) U=Normally open/mid-position pressurised

3) E=Mid-position exhausted

4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.

7) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

8) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5

Technical data

Operating and environmental conditions							
Valve function		T32-A <sup>1</sup>	T32-M <sup>3</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup>	P53
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]					
Operating pressure	Internal	[bar]	1.5 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60				
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60				

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[DC V] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

**Dimensions** Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way and 5/3-way valve

- - Note  
More dimensions  
Electrical connection boxes  
→ Page 114

1 Vertical electrical connection    
 2 Horizontal electrical connection    
 3 Manual override    
 4 Port for external pilot air supply

Type	B1	B2	D1	D2	D3	H1	H2	H3	L1	L2	L3	L4
VUVG-L-10 -...-M5...	10.2	-	M5	3.2	M3	32.5	3.6	4.4	86.5	81.5	8	27
VUVG-S-10 -...-M5...												


Type	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14
VUVG-L-10 -...-M5...	4.85	6.15	47	14	11	12	19	-	69.2	66.7
VUVG-S-10 -...-M5...										


# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5

FESTO

Ordering data

## ★ Core product range

Ordering data			
	Description	Part no.	Type
In-line valve M5, with E-box R8			
	2x 3/2-way valve		
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 577347 VUVG-L10-T32C-AT-M5-1R8L
	5/2-way valve, single solenoid,		
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	★ 572634 VUVG-L10-M52-RT-M5-1R8L
	5/2-way valve, double solenoid		
	Internal pilot air supply		★ 576664 VUVG-L10-B52-T-M5-1R8L
5/3-way valve			
Internal pilot air supply	Mid-position closed, mechanical spring reset method	★ 577346 VUVG-L10-P53C-T-M5-1R8L	

Ordering data				
	Description	Part no.	Type	
In-line valve M5, without electrical connection box				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	566454	VUVG-L10-T32C-AT-M5-1P3
		Normally open, reset method: pneumatic spring	566455	VUVG-L10-T32U-AT-M5-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	566456	VUVG-L10-T32H-AT-M5-1P3
		Normally closed, reset method: mechanical spring	574348	VUVG-L10-T32C-MT-M5-1P3
		Normally open, reset method: mechanical spring	574349	VUVG-L10-T32U-MT-M5-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring	574350	VUVG-L10-T32H-MT-M5-1P3
	External pilot air supply	Normally closed, reset method: pneumatic spring	566463	VUVG-L10-T32C-AZT-M5-1P3
		Normally open, reset method: pneumatic spring	566464	VUVG-L10-T32U-AZT-M5-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	566465	VUVG-L10-T32H-AZT-M5-1P3
		Normally closed, reset method: mechanical spring	574352	VUVG-L10-T32C-MZT-M5-1P3
		Normally open, reset method: mechanical spring	574353	VUVG-L10-T32U-MZT-M5-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring	574354	VUVG-L10-T32H-MZT-M5-1P3
	5/2-way valve, single solenoid,			
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	566457	VUVG-L10-M52-RT-M5-1P3
		Reset method: mechanical spring	574351	VUVG-L10-M52-MT-M5-1P3
	External pilot air supply	Reset method: pneumatic/mechanical spring	566466	VUVG-L10-M52-RZT-M5-1P3
		Reset method: mechanical spring	574355	VUVG-L10-M52-MZT-M5-1P3





Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5

Ordering data

Ordering data					
	Description		Part no.	Type	
<b>In-line valve M5, without electrical connection box</b>					
	5/2-way valve, double solenoid				
	Internal pilot air supply		566458	VUVG-L10-B52-T-M5-1P3	
	External pilot air supply		566467	VUVG-L10-B52-ZT-M5-1P3	
	5/3-way valve				
	Internal pilot air supply	Mid-position closed, mechanical spring reset method		566459	VUVG-L10-P53C-T-M5-1P3
		Mid-position exhausted, mechanical spring reset method		566460	VUVG-L10-P53E-T-M5-1P3
		Mid-position pressurized, mechanical spring reset method		566461	VUVG-L10-P53U-T-M5-1P3
	External pilot air supply	Mid-position closed, mechanical spring reset method		566468	VUVG-L10-P53C-ZT-M5-1P3
		Mid-position exhausted, mechanical spring reset method		566469	VUVG-L10-P53E-ZT-M5-1P3
		Mid-position pressurized, mechanical spring reset method		566470	VUVG-L10-P53U-ZT-M5-1P3
<b>In-line valve M5, with electrical connection box R8</b>					
	2x 3/2-way valve				
	Internal pilot air supply	Normally open, reset method: pneumatic spring		8031466	VUVG-L10-T32U-AT-M5-1R8L
		1x normally open, 1x normally closed, reset method: pneumatic spring		8031467	VUVG-L10-T32H-AT-M5-1R8L
		Normally closed, reset method: mechanical spring		8031468	VUVG-L10-T32C-MT-M5-1R8L
		Normally open, reset method: mechanical spring		8031469	VUVG-L10-T32U-MT-M5-1R8L
		1x normally open, 1x normally closed, reset method: mechanical spring		8031470	VUVG-L10-T32H-MT-M5-1R8L
	5/2-way valve, single solenoid				
	Internal pilot air supply	Reset method: mechanical spring		8031472	VUVG-L10-M52-MT-M5-1R8L
	5/3-way valve				
	Internal pilot air supply	Mid-position exhausted, mechanical spring reset method		8031475	VUVG-L10-P53E-T-M5-1R8L
		Mid-position pressurized, mechanical spring reset method		8031476	VUVG-L10-P53U-T-M5-1R8L
<b>In-line valve M5, with electrical connection box H2</b>					
	5/2-way valve, single solenoid				
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	577316	VUVG-L10-M52-RT-M5-1H2L-W1	
		Reset method: mechanical spring	578162	VUVG-L10-M52-MT-M5-1H2L-W1	
	5/2-way valve, double solenoid				
Internal pilot air supply		577317	VUVG-L10-B52-T-M5-1H2L-W1		
<b>Semi in-line valve M5, with electrical connection box H2</b>					
	5/2-way valve, single solenoid				
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	577324	VUVG-S10-M52-RT-M5-1H2L-W1	




# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7


Technical data

Function

2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, double solenoid  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 10 mm
-  - Flow rate  
170 ... 340 l/min
-  - Voltage  
5, 12 and 24 V DC

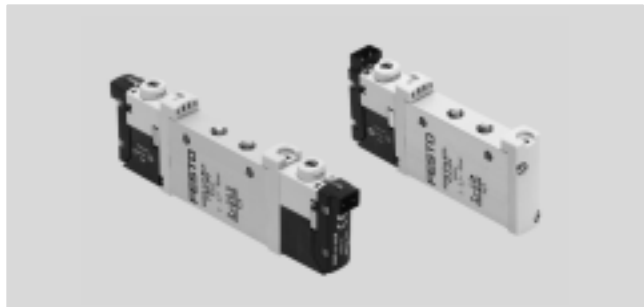

General technical data, VUVG-L M7														
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53				
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>		
Stable position	Single pilot							Double solenoid	One position	One position				
Reset method: pneumatic spring	Yes			None			Yes <sup>5)</sup>	-	None	-				
Reset method: mechanical spring	None			Yes			Yes <sup>5)</sup>	-	Yes	Yes				
Vacuum operation at port 1	None			Only with external pilot air supply										
Design	Piston spool													
Sealing principle	Soft													
Type of control	Electric													
Type of control	Pilot													
Pilot air supply	Internal or external													
Exhaust function	With flow control option													
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting													
Type of mounting	Optionally via through-holes <sup>6)</sup> or on manifold rail													
Mounting position	Optional													
Nominal size [mm]	2.7			2.0		1.9		1.9		4.0		2.8	3.5	
Standard nominal flow rate [l/min]	190			150		140		140		330		380	220	320
Flow rate on manifold rail [l/min]	170			140		130		130		330		340	220	300
Switching time on/off [ms]	6/16			8/11				7/19		-		8/24		10/30
Changeover time [ms]	-							7		-		15		
Size [mm]	10													
Ports	1, 2, 3, 4, 5			M7										
	12/14			M3										
Product weight [g]	55			54			45		55		44		55	
Approval certificate	c UL us - Recognized(OL)													
	c CSA us (OL)													
	RCM mark													
CE marking (see declaration of conformity) <sup>7)</sup>	To EU EMC Directive													
Corrosion resistance class CRC <sup>8)</sup>	2													

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised  
 3) E=Mid-position exhausted  
 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open  
 5) Combined reset method  
 6) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.  
 7) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 8) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7

Technical data

Operating and environmental conditions			T32-A <sup>1</sup>	T32-M <sup>3</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup>	P53
Valve function			Compressed air to ISO 8573-2010 [7:4:4]					
Operating pressure	Internal	[bar]	1.5 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8	-0.9 ... 10
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60					
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60					

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[DC V] 5, 12, 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

## Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way and 5/3-way valve

⚠ Note  
More dimensions  
Electrical connection boxes  
→ Page 114

1 Vertical electrical connection

2 Horizontal electrical connection

3 Manual override

4 Port for external pilot air supply

Type	B1	B2	D1	D2	D3	H1	H2	H3	L1	L2	L3	L4
VUVG-L-10 -...-M7...	10.2	-	M7	3.2	M3	32.5	3.6	4.4	86.5	81.5	8	27
VUVG-S-10 -...-M7...												


Type	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14
VUVG-L-10 -...-M7...	4.85	6.15	47	14	11	12	19	-	69.2	66.7
VUVG-S-10 -...-M7...										


# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7

FESTO

Ordering data

## ★ Core product range

Ordering data			
	Description	Part no.	Type
In-line valve M7, with E-box R8			
	2x 3/2-way valve		
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 574218 VUVG-L10-T32C-AT-M7-1R8L
	5/2-way valve, single solenoid,		
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	★ 574221 VUVG-L10-M52-RT-M7-1R8L
	5/2-way valve, double solenoid		
	Internal pilot air supply		★ 574222 VUVG-L10-B52-T-M7-1R8L
5/3-way valve			
Internal pilot air supply	Mid-position closed, mechanical spring reset method	★ 574223 VUVG-L10-P53C-T-M7-1R8L	

Ordering data			
	Description	Part no.	Type
In-line valve M7, without electrical connection box			
	2x 3/2-way valve		
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	566471 VUVG-L10-T32C-AT-M7-1P3
		Normally open, reset method: pneumatic spring	566472 VUVG-L10-T32U-AT-M7-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	566473 VUVG-L10-T32H-AT-M7-1P3
		Normally closed, reset method: mechanical spring	574356 VUVG-L10-T32C-MT-M7-1P3
		Normally open, reset method: mechanical spring	574357 VUVG-L10-T32U-MT-M7-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring	574358 VUVG-L10-T32H-MT-M7-1P3
	External pilot air supply	Normally closed, reset method: pneumatic spring	566479 VUVG-L10-T32C-AZT-M7-1P3
		Normally open, reset method: pneumatic spring	566480 VUVG-L10-T32U-AZT-M7-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	566481 VUVG-L10-T32H-AZT-M7-1P3
		Normally closed, reset method: mechanical spring	574360 VUVG-L10-T32C-MZT-M7-1P3
		Normally open, reset method: mechanical spring	574361 VUVG-L10-T32U-MZT-M7-1P3
		Normally closed, reset method: mechanical spring	574362 VUVG-L10-T32H-MZT-M7-1P3




Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7

Ordering data

Ordering data				
	Description		Part no.	Type
<b>In-line valve M7, without electrical connection box</b>				
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: mechanical spring	574359	VUVG-L10-M52-MT-M7-1P3
		Reset method: pneumatic/mechanical spring	566474	VUVG-L10-M52-RT-M7-1P3
	External pilot air supply	Reset method: mechanical spring	574363	VUVG-L10-M52-MZT-M7-1P3
		Reset method: pneumatic/mechanical spring	566482	VUVG-L10-M52-RZT-M7-1P3
	5/2-way valve, double solenoid			
	Internal pilot air supply		566475	VUVG-L10-B52-T-M7-1P3
	External pilot air supply		566483	VUVG-L10-B52-ZT-M7-1P3
	5/3-way valve			
	Internal pilot air supply	Mid-position closed, mechanical spring reset method	566476	VUVG-L10-P53C-T-M7-1P3
		Mid-position exhausted, mechanical spring reset method	566477	VUVG-L10-P53E-T-M7-1P3
		Mid-position pressurized, mechanical spring reset method	566478	VUVG-L10-P53U-T-M7-1P3
	External pilot air supply	Mid-position closed, mechanical spring reset method	566484	VUVG-L10-P53C-ZT-M7-1P3
		Mid-position exhausted, mechanical spring reset method	566485	VUVG-L10-P53E-ZT-M7-1P3
Mid-position pressurized, mechanical spring reset method		566486	VUVG-L10-P53U-ZT-M7-1P3	
<b>In-line valve M7, with electrical connection box R8</b>				
	2x 3/2-way valve			
	Internal pilot air supply	Normally open, reset method: pneumatic spring	574219	VUVG-L10-T32U-AT-M7-1R8L
		1x normally open, 1x normally closed, reset method: pneumatic spring	574220	VUVG-L10-T32H-AT-M7-1R8L
		Normally closed, reset method: mechanical spring	8031480	VUVG-L10-T32C-MT-M7-1R8L
		Normally open, reset method: mechanical spring	8031481	VUVG-L10-T32U-MT-M7-1R8L
		1x normally open, 1x normally closed, reset method: mechanical spring	8031482	VUVG-L10-T32H-MT-M7-1R8L
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: mechanical spring	8031485	VUVG-L10-M52-MT-M7-1R8L
	5/3-way valve			
	Internal pilot air supply	Mid-position exhausted, mechanical spring reset method	574225	VUVG-L10-P53E-T-M7-1R8L
		Mid-position pressurized, mechanical spring reset method	574224	VUVG-L10-P53U-T-M7-1R8L
<b>In-line valve M7, with electrical connection box H2</b>				
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	577333	VUVG-L10-M52-RT-M7-1H2L-W1
		Reset method: mechanical spring	578163	VUVG-L10-M52-MT-M7-1H2L-W1
	5/2-way valve, double solenoid			
Internal pilot air supply		577332	VUVG-L10-B52-T-M7-1H2L-W1	

# Solenoid valves VUVG-S10, in-line valves M5/M7

Manifold assembly




In-line valves for manifold assembly



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

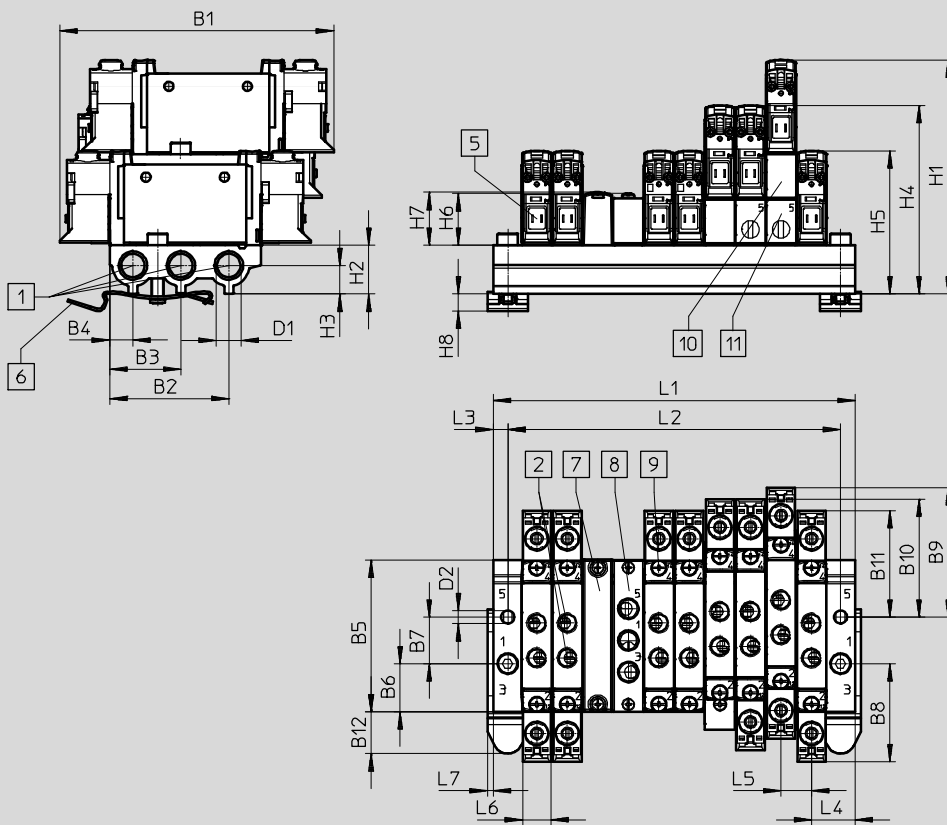

Note  
 More dimensions  
 Electrical connection boxes  
 → Page 114

- 1 Ports 1, 3 and 5
- 2 Ports 2 and 4
- 3 Electrical connection for electrical sub-bases and accessories
- 4 H-rail mounting (two M4x20 screws are required for attachment)
- 5 Cover plate
- 6 Supply plate
- 7 Valves/blanking plate mounting on manifold rail
- 8 Vertical pressure supply plate
- 9 Vertical pressure exhaust plate


Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
VABML-L1-10S-G18	94.3	41	24.5	8	52.1	16.5	16	33.7	44.6	40.7	36.7	14.4

Type	D1	D2	D5	H1	H2	H3	H4	H5	H6	H7	H8	L3	L4	L5	L6	L7
VABML-L1-10S-G18	G1/8	4.5	8	80.6	16.8	9.8	64.9	49.3	17.8	18	5.9	5	15	10.5	10.3	2

# Solenoid valves VUVG-S10, in-line valves M5/M7

Ordering data

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16	22
L1	40.5	51	61.5	72	82.5	93	103.5	114	124.5	145.5	166.5	187.5	250.5
L2	30.5	41	51.5	62	72.5	83	93.5	104	114.5	135.5	156.5	177.5	240.5
VABM weight [g]	63	78	93	108	123	138	153	168	183	213	243	273	363


Technical data – Manifold rails							
	Ports	CRC	Material <sup>2)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	1, 3, 5				Valve	H-rail	Wall
	G1/8	2 <sup>1)</sup>	Wrought aluminium alloy	-0.9 ... 10	0.45	1.5	3

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) Note on materials: RoHS-compliant.

## Order code – Manifold rails

<b>VABM</b>	-	<b>L1</b>	-	<b>10</b>	<b>S</b>	-	<b>G18</b>	-	
Valve manifold parts									Number of valve positions
Manifold rail		<b>VABM</b>							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		<b>L1</b>					<b>G18</b>		G1/8 thread
Size									
10 mm				<b>10</b>					
Manifold rail with port 1, 3, 5									
For M5 and M7 in-line valves					<b>S</b>				

## Ordering data – Manifold rail

Description	Part no.	Type
Manifold rail for in-line valve (manifold assembly)		
 For size M5/M7	2 valve positions	★ 566558 VABM-L1-10S-G18-2
	3 valve positions	★ 566559 VABM-L1-10S-G18-3
	4 valve positions	★ 566560 VABM-L1-10S-G18-4
	5 valve positions	566561 VABM-L1-10S-G18-5
	6 valve positions	★ 566562 VABM-L1-10S-G18-6
	7 valve positions	566563 VABM-L1-10S-G18-7
	8 valve positions	★ 566564 VABM-L1-10S-G18-8
	9 valve positions	566565 VABM-L1-10S-G18-9
	10 valve positions	★ 566566 VABM-L1-10S-G18-10
	12 valve positions	566567 VABM-L1-10S-G18-12
	14 valve positions	566568 VABM-L1-10S-G18-14
16 valve positions	566569 VABM-L1-10S-G18-16	







Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-S10, in-line valves M5/M7

FESTO

Ordering data

Ordering data – Accessories			
	Description	Part no.	Type
Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>			
	For valve position on manifold rail, including screws and seal	★ 566462	VABB-L1-10-S
Separator <span style="float: right;">Technical data → Internet: vabd</span>			
	For creating pressure zones	569995	VABD-8-B
Supply plate <span style="float: right;">Technical data → Internet: vabf</span>			
	For valve position (in-line valves M5) on manifold rail, including screws and seal	569991	VABF-L1-10-P3A4-M5
	For valve position (in-line valves M7) on manifold rail, including screws and seal	569992	VABF-L1-10-P3A4-M7
Seals <span style="float: right;">Technical data → Internet: vabd</span>			
	In-line valves VUVG-LK		
	For in-line valves M5	Delivery unit: 10 sets (each with 2 screws and 1 seal)	★ 8043718 VABD-L1-10XK-S-M5-S
	For in-line valves M7		★ 8043719 VABD-L1-10XK-S-M7-S
	In-line valves VUVG-L		
For in-line valves M5	Delivery unit: 10 sets (each with 2 screws and 1 seal)	★ 566672 VABD-L1-10X-S-M5	
For M7 in-line valves		★ 566673 VABD-L1-10X-S-M7	
Vertical pressure supply plate			
	Pneumatic connection 1: M7	Terminal code CP	574592 VABF-L1-P3A3-M7
Vertical exhaust plate			
	Pneumatic connection 3, 5: M7	Terminal code CR	574594 VABF-L1-P7A13-M7

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days



# Solenoid valves VUVG, in-line valve G1/8

Type code




-			<b>L</b>	-		
						Feature
				-		Extended features
				S		Core features
						Accessories for valve/connecting cable
				<b>C1...4</b>		Connection pattern H: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m
				<b>N1...4</b>		M8x1, 3-pin, straight: 1 = 2.5 m, 2 = 5 m; angled: 3 = 2.5 m, 4 = 5 m
				<b>N5...8</b>		M8x1, 4-pin, straight: 5 = 2.5 m, 6 = 5 m; angled: 7 = 2.5 m, 8 = 5 m
				<b>S1...4</b>		Connection pattern S, 1 = 0.5 m, 2 = 1 m, 3 = 2.5, 4 = 5 m
				<b>W1...4</b>		Connection pattern H, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m
				<b>WS1...4</b>		Connection pattern S with flying leads, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m
						Advertisement
				<b>L</b>		LED
						Circuitry
				-		Without holding current reduction (HCR)
				<b>R</b>		With holding current reduction (HCR)
						Electrical connection
				<b>H2</b>		Connection pattern H, horizontal plug connector
				<b>H3</b>		Connection pattern H, vertical plug
				<b>K6...9</b>		Cables: 6 = 0.5 m, 7 = 1 m, 8 = 2.5 m, 9 = 5 m
				<b>L1...4</b>		with 2x flying lead: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m
				<b>P3</b>		Without E-box
				<b>R1</b>		Individual plug connector M8, 4-pin
				<b>R8</b>		Individual plug connector M8, 3-pin
				<b>S2</b>		Connection pattern S, horizontal plug connector
				<b>S3</b>		Connection pattern S, vertical connector
						Nominal operating voltage
				<b>1</b>		24 V DC
				<b>4</b>		5 V DC
				<b>5</b>		12 V DC



# Solenoid valves VUVG-LK14, in-line valves G1/8

Technical data

Function  
2x 3/2C  
5/2-way, single solenoid  
5/2-way valve, bistable

-  - Size 14 mm
-  - Flow rate  
570 ... 660 l/min
-  - Voltage  
24 V DC

Circuit symbol → Page 13



General Technical data VUVG-LK			
Valve function	T32-A	M52-A	B52
Normal position	C <sup>1)</sup>	–	–
Stable position	Single pilot		Bistable
Reset method: pneumatic spring	Yes	Yes	–
Design	Piston spool		
Sealing principle	Soft		
Type of control	Electric		
Type of control	Pilot		
Pilot air supply	Internal		
Exhaust air function	With flow control option		
Manual override	Non-detenting, detenting		
Type of mounting	Optionally via through-holes <sup>2)</sup> or on manifold rail		
Mounting position	Optional		
Standard nominal flow rate	[l/min] 570	660	660
Switching time on/off	[ms] 13/20	14/24	–
Changeover time	[ms] –		8
Size	[mm] 14		
Ports	2, 4	G1/8	
Product weight	[g] 75	65	85
Corrosion resistance class CRC <sup>3)</sup>	2		

- 1) C=Normally closed
- 2) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.
- 3) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Safety data	
Max. positive test pulse with 0 signal	[μs] 1600
Max. negative test pulse with 1 signal	[μs] 3000
Shock resistance	Shock test with severity level 1 in accordance with FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

# Solenoid valves VUVG-LK14, in-line valves G1/8



Technical data

Operating and environmental conditions				
Valve function		T32-A <sup>1</sup>	M52-A <sup>1</sup>	B52
Operating medium	Compressed air to ISO 8573-2010 [7:4:4]			
Note about the operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)			
Operating pressure	[bar]	1.5 ... 7	2.5 ... 7	1.5 ... 7
Ambient temperature	[°C]	-5 ... +50		
Temperature of medium	[°C]	-5 ... +50		


1) Pneumatic spring.

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[DC V] 24 ±10%
Power	[W] 0.7
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)
Signal status display	LED
Maximum switching frequency	[Hz] 2

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

Pin allocation for electrical connection box			
	Pin		Description
Rectangular plug connector, plug pattern H			
	1	+ or -	Protective circuit without holding current reduction
	2	+ or -	
Round plug, M8, 3-pin			
	1	Not used	Protective circuit without holding current reduction
	3	+ or -	
	4	+ or -	

### Protective circuit without holding current reduction

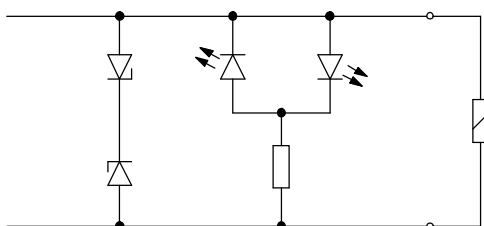

The solenoid coils are equipped with a protective circuit to arrest sparks and protect against polarity reversal.

# Solenoid valves VUVG-LK14, in-line valves G1/8



Technical data

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way valve, double solenoid

5/2-way valve, single solenoid

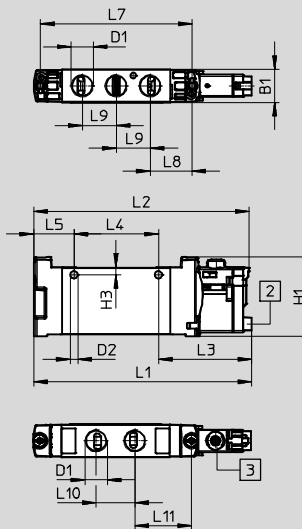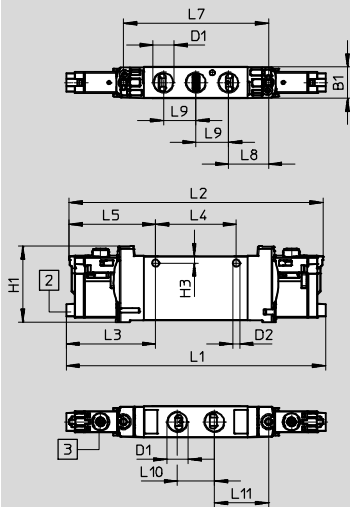

- - Note

More dimensions  
Electrical connection boxes  
→ Page 114

**2** Horizontal electrical connection

**3** Manual override

Type	B1	D1	D2	H1	H3	L1	L2	L3	L4	L5
VUVG-LK14-T32C...-G18...	14.4	G1/8	3.3	34.8	3.2	118.9	116.4	41	37	39.7
VUVG-LK14-B52...-G18...						95.6	94.4			17.7
VUVG-LK14-M52...-G18...										



Type	L7	L8	L9	L10	L11
VUVG-LK14-T32C...-G18...	66.5	18.4	14.9	17	24.8
VUVG-LK14-B52...-G18...					
VUVG-LK14-M52...-G18...					

# Solenoid valves VUVG-LK14, in-line valves G1/8

FESTO

Ordering data

## ★ Core product range

Ordering data			
	Description	Part no.	Type
In-line valve G1/8, with electrical connection box R8			
	2x 3/2-way valve		
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042566 VUVG-LK14-T32C-AT-G18-1R8L-S
	5/2-way valve, single solenoid		
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042567 VUVG-LK14-M52-AT-G18-1R8L-S
	5/2-way valve, double solenoid		
	Internal pilot air supply		★ 8042568 VUVG-LK14-B52-T-G18-1R8L-S
In-line valve G1/8, with electrical connection box H2			
	2x 3/2-way valve		
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042562 VUVG-LK14-T32C-AT-G18-1H2L-S
	5/2-way valve, single solenoid		
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042563 VUVG-LK14-M52-AT-G18-1H2L-S
	5/2-way valve, double solenoid		
	Internal pilot air supply		★ 8042564 VUVG-LK14-B52-T-G18-1H2L-S

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days




# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

Technical data

Function

2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, double solenoid  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 14 mm
-  - Flow rate  
480 ... 780 l/min
-  - Voltage  
5, 12 and 24 V DC



General Technical data VUVG-L												
Valve function	T32-A			T32-M			M52-A	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup> E <sup>3)</sup>	
Stable position	Single pilot							Double solenoid	One position			
Reset method: pneumatic spring	Yes			None			Yes	-	None	-		
Reset method: mechanical spring	None			Yes			None	-	Yes	Yes		
Vacuum operation at port 1	None			Only with external pilot air supply								
Size [mm]	14											
Design	Piston spool											
Sealing principle	Soft											
Type of control	Electric											
Type of control	Pilot											
Pilot air supply	Internal or external											
Exhaust function	With flow control option											
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting											
Type of mounting	Optionally via through-holes <sup>5)</sup> or on manifold rail											
Mounting position	Optional											
Nominal size [mm]	4.6			4.3			5.6	5.6	5.6	5.6		
Standard nominal flow rate [l/min]	560	600	590	550	500	500	780	780	780	650	560	
Flow rate on manifold rail [l/min]	560	580		520	480	480	680	700	700	620	560	
Switching time	On/off	[ms]	8/23			15/11			14/22	-	13/40	12/40
	Changeover	[ms]	-			-			8	-	20	
Pneumatic connection	1, 2, 3, 4, 5		G1/8									
	12/14		M5									

- 1) C=Normally closed/mid-position closed
- 2) U=Normally open/mid-position pressurised
- 3) E=Mid-position exhausted
- 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open
- 5) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.

# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

FESTO

Technical data

General technical data VUVG-L							
Valve function		T32-A	T32-M	M52-A	B52	M52-M	P53
Product weight	[g]	89	80	78	89	70	89
Certification		c UL us - Recognized (OL)					
		c CSA us (OL)					
		RCM mark					
CE mark (see declaration of conformity) <sup>1)</sup>		To EU EMC Directive					
Corrosion resistance class CRC <sup>2)</sup>		2					

- For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Operating and environmental conditions							
Valve function		T32-A <sup>1)</sup>	T32-M <sup>2)</sup>	M52-A <sup>1)</sup>	B52	M52-M <sup>2)</sup>	P53
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]					
Operating pressure	Internal [bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
	External [bar]	1.5... 10	-0.9... 10			-0.9... 8	-0.9... 10
Pilot pressure <sup>3)</sup>	[bar]	1.5 ... 8	3.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
Ambient temperature	[°C]	-5 ... +50, with holding current reduction -5 ... +60					
Temperature of medium	[°C]	-5 ... +50, with holding current reduction -5 ... +60					

- Pneumatic spring.
- Mechanical spring.
- Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage [V DC]	5, 12 and 24 ±10%
Power [W]	1, reduced to 0.35 with holding current reduction
Duty cycle ED [%]	100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Safety data	
Max. positive test pulse with 0 signal [µs]	700
Max. negative test pulse with 1 signal [µs]	900
Shock resistance	Shock test with severity level 2 in accordance with FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant


# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

Technical data

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way and 5/3-way valve

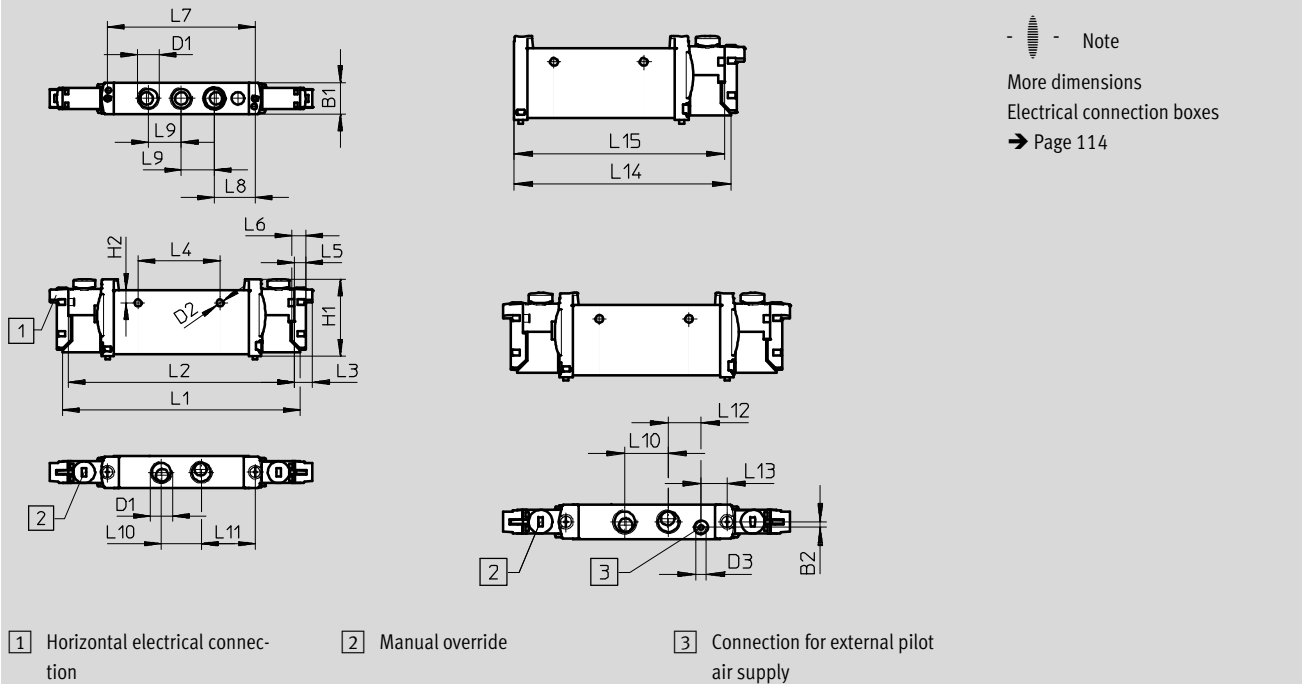

- - Note  
 More dimensions  
 Electrical connection boxes  
 → Page 114

Type	B1	B2	D1	D2 ∅	D3	H1	H2	L1	L2	L3	L4	L5	L6
VUVG-L14 -...-G18...	14.4	2.3	G1/8	3.2	-	34.8	5.8	107	102	8	37	4.85	6.2
VUVG-S14 -...-G18...													


Type	L7	L8	L9	L10	L11	L12	L13	L14	L15
VUVG-L14 -...-G18...	66.5	18.35	14.9	18	24.3	13.5	10.8	89.4	87
VUVG-S14 -...-G18...									


# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

FESTO

Ordering data

## ★ Core product range

Ordering data				
Description		Part no.	Type	
In-line valve G1/8, with electrical connection box R8				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 574226	VUVG-L14-T32C-AT-G18-1R8L
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic spring	★ 574229	VUVG-L14-M52-AT-G18-1R8L
	5/2-way valve, double solenoid			
	Internal pilot air supply		★ 574230	VUVG-L14-B52-T-G18-1R8L
	5/3-way valve			
Internal pilot air supply	Mid-position closed, mechanical spring reset method	★ 574231	VUVG-L14-P53C-T-G18-1R8L	

Ordering data				
Description		Part no.	Type	
In-line valve G1/8, without electrical connection box				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	566496	VUVG-L14-T32C-AT-G18-1P3
		Normally open, reset method: pneumatic spring	566497	VUVG-L14-T32U-AT-G18-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	566498	VUVG-L14-T32H-AT-G18-1P3
		Normally closed, reset method: mechanical spring	574368	VUVG-L14-T32C-MT-G18-1P3
		Normally open, reset method: mechanical spring	574369	VUVG-L14-T32U-MT-G18-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring	574370	VUVG-L14-T32H-MT-G18-1P3
	External pilot air supply	Normally closed, reset method: pneumatic spring	566505	VUVG-L14-T32C-AZT-G18-1P3
		Normally open, reset method: pneumatic spring	566506	VUVG-L14-T32U-AZT-G18-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	566507	VUVG-L14-T32H-AZT-G18-1P3
		Normally closed, reset method: mechanical spring	574372	VUVG-L14-T32C-MZT-G18-1P3
		Normally open, reset method: mechanical spring	574373	VUVG-L14-T32U-MZT-G18-1P3
		Normally closed, reset method: mechanical spring	574374	VUVG-L14-T32H-MZT-G18-1P3
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic spring	566499	VUVG-L14-M52-AT-G18-1P3
		Reset method: mechanical spring	574371	VUVG-L14-M52-MT-G18-1P3
	External pilot air supply	Reset via pneumatic spring	566508	VUVG-L14-M52-AZT-G18-1P3
		Reset method: mechanical spring	574375	VUVG-L14-M52-MZT-G18-1P3
	5/2-way valve, double solenoid			
	Internal pilot air supply		566500	VUVG-L14-B52-T-G18-1P3
	External pilot air supply		566509	VUVG-L14-B52-ZT-G18-1P3

Festo core product range





★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days



# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

Ordering data

Ordering data				
	Description		Part no.	Type
<b>In-line valve G1/8, without electrical connection box</b>				
	5/3-way valve			
	Internal pilot air supply	Mid-position closed, mechanical spring reset method	566501	VUVG-L14-P53C-T-G18-1P3
		Mid-position exhausted, mechanical spring reset method	566502	VUVG-L14-P53E-T-G18-1P3
		Mid-position pressurized, mechanical spring reset method	566503	VUVG-L14-P53U-T-G18-1P3
	External pilot air supply	Mid-position closed, mechanical spring reset method	566510	VUVG-L14-P53C-ZT-G18-1P3
		Mid-position exhausted, mechanical spring reset method	566511	VUVG-L14-P53E-ZT-G18-1P3
Mid-position pressurized, mechanical spring reset method		566512	VUVG-L14-P53U-ZT-G18-1P3	
<b>In-line valve G1/8, with electrical connection box R8</b>				
	2x 3/2-way valve			
	Internal pilot air supply	Normally open, reset method: pneumatic spring	574227	VUVG-L14-T32U-AT-G18-1R8L
		1x normally open, 1x normally closed, reset method: pneumatic spring	574228	VUVG-L14-T32H-AT-G18-1R8L
		Normally closed, reset method: mechanical spring	8031504	VUVG-L14-T32C-MT-G18-1R8L
		Normally open, reset method: mechanical spring	8031505	VUVG-L14-T32U-MT-G18-1R8L
		1x normally open, 1x normally closed, reset method: mechanical spring	8031506	VUVG-L14-T32H-MT-G18-1R8L
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: mechanical spring	8031508	VUVG-L14-M52-MT-G18-1R8L
	5/3-way valve			
	Internal pilot air supply	Mid-position exhausted, mechanical spring reset method	574233	VUVG-L14-P53E-T-G18-1R8L
Mid-position pressurized, mechanical spring reset method		574232	VUVG-L14-P53U-T-G18-1R8L	
<b>In-line valve G1/8, with electrical connection box H2</b>				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	577321	VUVG-L14-T32C-AT-G18-1H2L-W1
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic spring	576256	VUVG-L14-M52-AT-G18-1H2L-W1
		Reset method: mechanical spring	578164	VUVG-L14-M52-MT-G18-1H2L-W1
5/2-way valve, double solenoid				
Internal pilot air supply		577319	VUVG-L14-B52-T-G18-1H2L-W1	
<b>Semi in-line valve G1/8, with electrical connection box H2</b>				
5/2-way valve, single solenoid				
	Internal pilot air supply	Reset method: pneumatic spring	577325	VUVG-S14-M52-AT-G18-1H2L-W1

# Solenoid valves VUVG-S14, in-line valves G1/8

Manifold assembly




In-line valves for manifold assembly



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

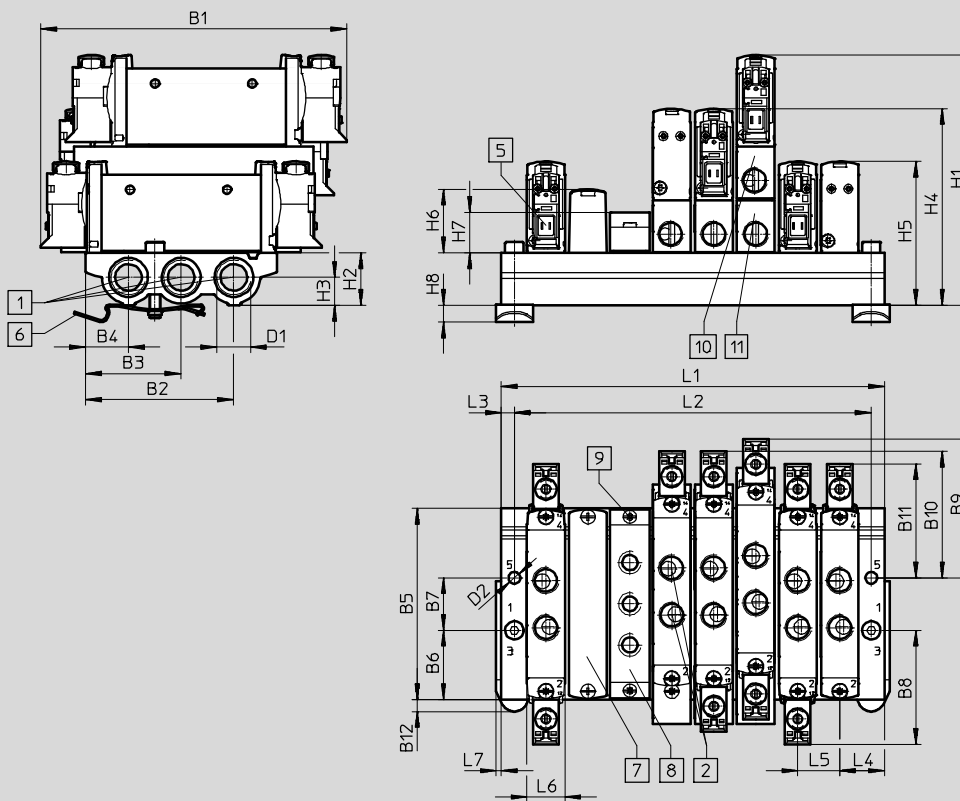

Note  
 More dimensions  
 Electrical connection boxes  
 → Page 114

- 1 Ports 1, 3 and 5
- 2 Ports 2 and 4
- 5 Electrical connection for electrical sub-bases and accessories
- 6 H-rail mounting (two M4x25 screws are required for attachment)
- 7 Cover plate
- 8 Supply plate
- 9 Valves/blanking plate mounting on manifold rail
- 10 Vertical pressure supply plate
- 11 Vertical pressure exhaust plate


Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	D1	D2
VABM-L1-14S-G14	116.6	56.6	36.5	16.4	72.9	26.5	20	43.5	53.1	48.3	43.5	4.5	G1/4	4.5

Type	H1	H2	H3	H4	H5	H6	H7	H8	L3	L4	L5	L6	L7
VABM-L1-14S-G14	95.3	20	10.6	74.9	54.8	23.9	15.4	6.5	5	17	16	14.5	2

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16	22
L1	50	66	82	98	114	130	146	162	178	210	242	274	306
L2	40	56	72	88	104	120	136	152	168	200	232	264	296
VABM weight [g]	118	159	200	241	282	323	364	405	446	528	610	692	938

# Solenoid valves VUVG-S14, in-line valves G1/8


Ordering data

Technical data – Manifold rails							
	Ports	CRC	Material <sup>2)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	1, 3, 5				Valve	H-rail	Wall
	G1/4	2 <sup>1)</sup>	Wrought aluminium alloy	-0.9 ... 10	0.65	1.5	3

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) Note on materials: RoHS-compliant.

## Order code – Manifold rails

<b>VABM</b>	-	<b>L1</b>	-	<b>14</b>	<b>S</b>	-	<b>G14</b>	-	
Valve manifold parts									Number of valve positions
Manifold rail		<b>VABM</b>							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		<b>L1</b>					<b>G14</b>		G1/4 thread
Size									
14 mm				<b>14</b>					
Manifold rail with port 1, 3, 5									
For G1/8 in-line valves					<b>S</b>				

Ordering data – Manifold rail			
	Description	Part no.	Type
	For size G1/8	2 valve positions	★ 566618 VABM-L1-14S-G14-2
		3 valve positions	★ 566619 VABM-L1-14S-G14-3
		4 valve positions	★ 566620 VABM-L1-14S-G14-4
		5 valve positions	566621 VABM-L1-14S-G14-5
		6 valve positions	★ 566622 VABM-L1-14S-G14-6
		7 valve positions	566623 VABM-L1-14S-G14-7
		8 valve positions	★ 566624 VABM-L1-14S-G14-8
		9 valve positions	566625 VABM-L1-14S-G14-9
		10 valve positions	★ 566626 VABM-L1-14S-G14-10
		12 valve positions	566627 VABM-L1-14S-G14-12
		14 valve positions	566628 VABM-L1-14S-G14-14
		16 valve positions	566629 VABM-L1-14S-G14-16







Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-S14, in-line valves G1/8

FESTO

Ordering data

Ordering data – Accessories			
	Description	Part no.	Type
Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>			
	For valve position on manifold rail, including screws and seal	★ 569989	VABB-L1-14
Separator <span style="float: right;">Technical data → Internet: vabd</span>			
	For creating pressure zones	569996	VABD-10-B
Supply plate <span style="float: right;">Technical data → Internet: vabf</span>			
	For valve position on manifold rail, including screws and seal	569993	VABF-L1-14-P3A4-G18
Seals for in-line valves <span style="float: right;">Technical data → Internet: vabd</span>			
	In-line valves VUVG-LK		
	For G1/8 in-line valves	Delivery unit: 10 sets (each with 2 screws and 1 seal)	★ 8043720 VABD-L1-14XK-S-G18-S
	In-line valves VUVG-L		
For G1/8 in-line valves	Delivery unit: 10 sets (each with 2 screws and 1 seal)	★ 566675 VABD-L1-14X-S-G18	
Vertical pressure supply plate			
	Pneumatic connection 1: G1/8	Terminal code CP	574593 VABF-L1-P3A3-G18
Vertical exhaust plate			
	Pneumatic connection 3, 5: G1/8	Terminal code CR	574595 VABF-L1-P7A13-G18

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days



# Solenoid valves VUVG, in-line valves G1/4

FESTO

Type code




-	-	-	-	L	-
Accessories for valve/connecting cable					
<b>C1...4</b>	Connection pattern H: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m				
<b>N1...4</b>	M8x1, 3-pin, straight: 1 = 2.5 m, 2 = 5 m; angled: 3 = 2.5 m, 4 = 5 m				
<b>N5...8</b>	M8x1, 4-pin, straight: 5 = 2.5 m, 6 = 5 m; angled: 7 = 2.5 m, 8 = 5 m				
<b>S1...4</b>	Connection pattern S, 1 = 0.5 m, 2 = 1 m, 3 = 2.5, 4 = 5 m				
<b>W1...4</b>	Connection pattern H, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m				
<b>WS1...4</b>	Connection pattern S with flying leads, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m				
Advertisement					
<b>L</b>	LED				
Circuitry					
-	Without holding current reduction (HCR)				
<b>R</b>	With holding current reduction (HCR)				
Electrical connection					
<b>H2</b>	Connection pattern H, horizontal plug connector				
<b>H3</b>	Connection pattern H, vertical plug				
<b>K6...9</b>	Cables: 6 = 0.5 m, 7 = 1 m, 8 = 2.5 m, 9 = 5 m				
<b>L1...4</b>	With 2x flying lead: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m				
<b>P3</b>	Without E-box				
<b>R1</b>	Individual plug connector M8, 4-pin				
<b>R8</b>	Individual plug connector M8, 3-pin				
<b>S2</b>	Connection pattern S, horizontal plug connector				
<b>S3</b>	Connection pattern S, vertical connector				
Nominal operating voltage					
<b>1</b>	24 V DC				
<b>4</b>	5 V DC				
<b>5</b>	12 V DC				
Exhausting with VUVG-L					
<b>QN</b>	Push-in fitting				
<b>U</b>	Pneumatic silencers				
-	G1/4 thread				

# Solenoid valves VUVG-L18 and VUVG-S18, in-line valves G1/4

Technical data

Function  
 2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, double solenoid  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 18 mm
-  - Flow rate  
1000 ... 1380 l/min
-  - Voltage  
5, 12 and 24 V DC



General Technical data VUVG-L															
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53					
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>			
Stable position	Single pilot							Double solenoid	One position						
Reset method: pneumatic spring	Yes			None			Yes <sup>5)</sup>	-	None	-					
Reset method: mechanical spring	None			Yes			Yes <sup>5)</sup>	-	Yes	Yes					
Vacuum operation at port 1	None			Only with external pilot air supply											
Size [mm]	18														
Design	Piston spool														
Sealing principle	Soft														
Type of control	Electric														
Type of control	Pilot														
Pilot air supply	Internal/external														
Exhaust function	With flow control option														
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting														
Type of mounting	Optionally via through-holes <sup>6)</sup> or on manifold rail														
Mounting position	Optional														
Nominal size [mm]	5.7						6.9	7.3	6.9	6.5	6.3				
Standard nominal flow rate [l/min]	880	970	950	870	990	920	1300	1380	1300	1200	1000	910			
Flow rate on manifold rail	780	980	820	780	960	820	1300	1370	1300	1180	1220	1050			
Switching time	On/off	[ms]		13/25			15/22			15/31		-	10/45	15/48	
	Changeover	[ms]		-			-			11		-	29		
Pneumatic connection	1, 2, 3, 4, 5		G1/4												
	12/14		M5												
Product weight [g]	164			164			154	164	154	160					
Approval certificate	c UL us - Recognized (OL)														
	c CSA us (OL)														
	RCM mark														
CE marking (see declaration of conformity) <sup>7)</sup>	To EU EMC Directive														
Corrosion resistance class CRC <sup>8)</sup>	2														

- 1) C=Normally closed/mid-position closed
- 2) U=Normally open/mid-position pressurised
- 3) E=Mid-position exhausted
- 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open
- 5) Combined reset method
- 6) If several valves are to be screwed together via the through-holes to form a block, a minimum distance of 0.3 mm must be ensured by placing spacer discs between them.
- 7) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 8) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Solenoid valves VUVG-L18 and VUVG-S18, in-line valves G1/4

FESTO

Technical data

Operating and environmental conditions						
Valve function			T32-A <sup>1</sup>	T32-M <sup>3</sup>	M52-R <sup>2</sup>	B52, M52-M <sup>3</sup> , P53
Operating medium	Compressed air to ISO 8573-2010 [7:4:4]					
Note about the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)					
Operating pressure	Internal	[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8, 3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10		
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8, 3 ... 8
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60			
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60			

- 1) Pneumatic spring.
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[V DC] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Safety data	
Max. positive test pulse with 0 signal	[µs] 700
Max. negative test pulse with 1 signal	[µs] 900
Shock resistance	Shock test with severity level 2 in accordance with FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant




# Solenoid valves VUVG-L18 and VUVG-S18, in-line valves G1/4

Technical data

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way and 5/3-way valve

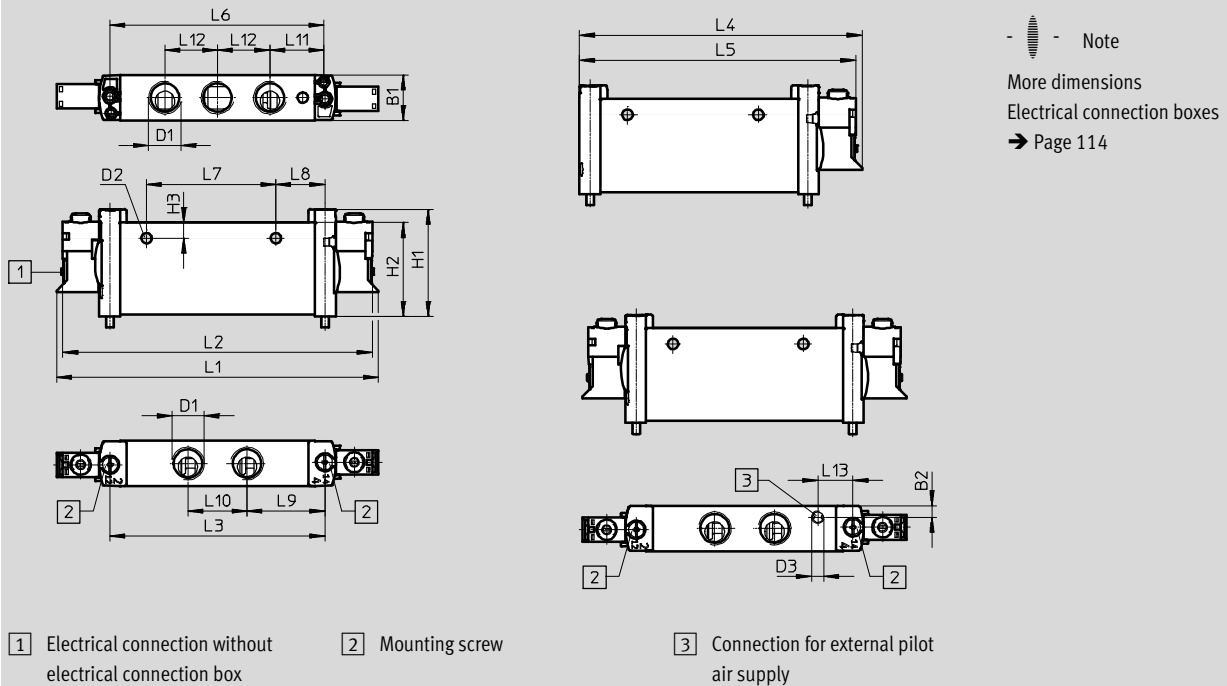

Type	B1	B2	D1	D2	D3	H1	H2	H3	L1	L2	L3	L4	L5
VUVG-L18-...	18.3	4.5	G1/4	∅ 4.2	M5	43.1	37.8	6.4	129.4	124.4	86.4	112.2	109.7
VUVG-S18-...													


Type	L6	L7	L8	L9	L10	L11	L12	L13
VUVG-L18-...	86	52	19.7	31.3	23.8	21.7	21.1	14
VUVG-S18-...								


# Solenoid valves VUVG-L18 and VUVG-S18, in-line valves G1/4

FESTO

Ordering data

## ★ Core product range

Ordering data				
	Description	Part no.	Type	
In-line valve G1/4, with electrical connection box R8				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8031525	VUVG-L18-T32C-AT-G14-1R8L
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	★ 8031531	VUVG-L18-M52-RT-G14-1R8L
		Reset method: mechanical spring	★ 8031532	VUVG-L18-M52-MT-G14-1R8L
	5/3-way valve			
Internal pilot air supply	Mid-position closed, mechanical spring reset method	★ 8031534	VUVG-L18-P53C-T-G14-1R8L	

Ordering data				
	Description	Part no.	Type	
In-line valve G1/4, without electrical connection box				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	574422	VUVG-L18-T32C-AT-G14-1P3
		Normally open, reset method: pneumatic spring	574423	VUVG-L18-T32U-AT-G14-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	574424	VUVG-L18-T32H-AT-G14-1P3
		Normally closed, reset method: mechanical spring	574425	VUVG-L18-T32C-MT-G14-1P3
		Normally open, reset method: mechanical spring	574426	VUVG-L18-T32U-MT-G14-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring	574427	VUVG-L18-T32H-MT-G14-1P3
	External pilot air supply	Normally closed, reset method: mechanical spring	574434	VUVG-L18-T32C-MZT-G14-1P3
		Normally open, reset method: mechanical spring	574435	VUVG-L18-T32U-MZT-G14-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring	574436	VUVG-L18-T32H-MZT-G14-1P3
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	574428	VUVG-L18-M52-RT-G14-1P3
		Reset method: mechanical spring	574429	VUVG-L18-M52-MT-G14-1P3
	External pilot air supply	Reset method: mechanical spring	574438	VUVG-L18-M52-MZT-G14-1P3
		Reset method: pneumatic/mechanical spring	574437	VUVG-L18-M52-RZT-G14-1P3
	5/2-way valve, double solenoid			
Internal pilot air supply		574430	VUVG-L18-B52-T-G14-1P3	
External pilot air supply		574439	VUVG-L18-B52-ZT-G14-1P3	




Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-L18 and VUVG-S18, in-line valves G1/4

Ordering data

Ordering data					
	Description		Part no.	Type	
<b>In-line valve G1/4, without electrical connection box</b>					
	5/3-way valve				
	Internal pilot air supply	Mid-position closed, mechanical spring reset method	574431	VUVG-L18-P53C-T-G14-1P3	
		Mid-position exhausted, mechanical spring reset method	574432	VUVG-L18-P53E-T-G14-1P3	
		Mid-position pressurized, mechanical spring reset method	574433	VUVG-L18-P53U-T-G14-1P3	
	External pilot air supply	Mid-position closed, mechanical spring reset method	574440	VUVG-L18-P53C-ZT-G14-1P3	
		Mid-position exhausted, mechanical spring reset method	574441	VUVG-L18-P53E-ZT-G14-1P3	
		Mid-position pressurized, mechanical spring reset method	574442	VUVG-L18-P53U-ZT-G14-1P3	
	<b>In-line valve G1/4, with electrical connection box R8</b>				
		2x 3/2-way valve			
Internal pilot air supply		Normally open, reset method: pneumatic spring	8031526	VUVG-L18-T32U-AT-G14-1R8L	
		1x normally open, 1x normally closed, reset method: pneumatic spring	8031527	VUVG-L18-T32H-AT-G14-1R8L	
		Normally closed, reset method: mechanical spring	8031528	VUVG-L18-T32C-MT-G14-1R8L	
		Normally open, reset method: mechanical spring	8031529	VUVG-L18-T32U-MT-G14-1R8L	
		1x normally open, 1x normally closed, reset method: mechanical spring	8031530	VUVG-L18-T32H-MT-G14-1R8L	
5/2-way valve, double solenoid					
Internal pilot air supply			8031533	VUVG-L18-B52-T-G14-1R8L	
5/3-way valve					
Internal pilot air supply		Mid-position exhausted, mechanical spring reset method	8031535	VUVG-L18-P53E-T-G14-1R8L	
		Mid-position pressurized, mechanical spring reset method	8031536	VUVG-L18-P53U-T-G14-1R8L	
<b>In-line valve G1/4, with electrical connection box H2</b>					
	5/2-way valve, single solenoid				
	Internal pilot air supply	Reset method: pneumatic/mechanical spring	578823	VUVG-L18-M52-RT-G14-1H2L-W1	

# Solenoid valves VUVG-S18, in-line valves G1/4

Manifold assembly




In-line valves for manifold assembly



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

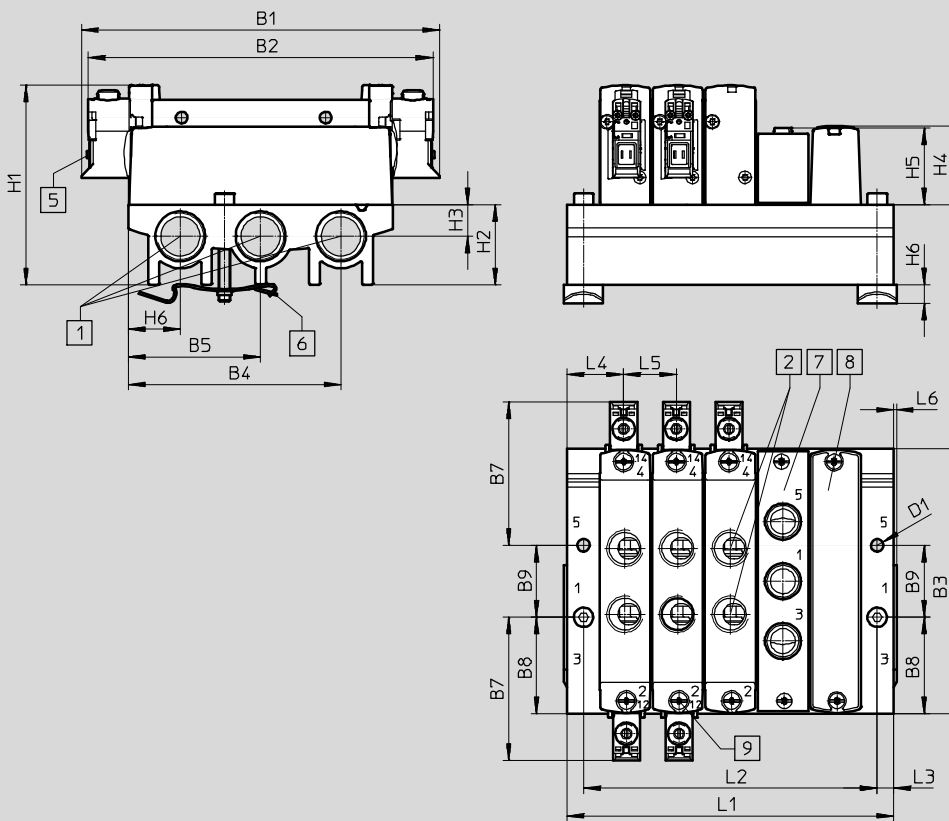

Note  
 More dimensions  
 Electrical connection boxes  
 → Page 114

- 1 Ports 1, 3 and 5
- 2 Ports 2 and 4
- 5 Electrical connection for electrical sub-bases and accessories
- 6 H-rail mounting (two M4x35 screws are required for attachment)
- 7 Cover plate
- 8 Supply plate
- 9 Valves/blanking plate mounting on manifold rail


Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	D1
VABM-L1-18S-G38	129.4	124.4	95.6	76.8	47.8	18.8	51.7	34.8	26	4.5

Type	H1	H2	H3	H4	H5	H6	L3	L4	L5	L6
VABM-L1-18S-G38	72.1	29	11.5	28.4	27.6	6.5	6	20.5	19	1

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1	61	80	99	118	137	156	175	194	213	251	289	327
L2	49	68	87	106	125	144	163	182	201	239	277	315
VABM weight [g]	118	159	200	241	282	323	364	405	446	528	610	692

# Solenoid valves VUVG-S18, in-line valves G1/4


Ordering data

Technical data – Manifold rails							
	Ports	CRC	Material <sup>2)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	1, 3, 5				Valve	H-rail	Wall
	G3/8	2 <sup>1)</sup>	Wrought aluminium alloy	-0.9 ... 10	1.18	1.5	3

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) Note on materials: RoHS-compliant.

## Order code – Manifold rails

<b>VABM</b>	-	<b>L1</b>	-	<b>18</b>	<b>S</b>	-	<b>G38</b>	-	
Valve manifold parts									Number of valve positions
Manifold rail		<b>VABM</b>							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		<b>L1</b>					<b>G38</b>		G3/8 thread
Size									
18 mm				<b>18</b>					
Manifold rail with port 1, 3, 5									
For G1/4 in-line valves					<b>S</b>				

Ordering data – Manifold rail			
	Description	Part no.	Type
	For size G1/4	2 valve positions	★ 574455 VABM-L1-18S-G38-2
		3 valve positions	★ 574456 VABM-L1-18S-G38-3
		4 valve positions	★ 574457 VABM-L1-18S-G38-4
		5 valve positions	574458 VABM-L1-18S-G38-5
		6 valve positions	★ 574459 VABM-L1-18S-G38-6
		7 valve positions	574460 VABM-L1-18S-G38-7
		8 valve positions	★ 574461 VABM-L1-18S-G38-8
		9 valve positions	574462 VABM-L1-18S-G38-9
		10 valve positions	★ 574463 VABM-L1-18S-G38-10
		12 valve positions	574464 VABM-L1-18S-G38-12
		14 valve positions	574465 VABM-L1-18S-G38-14
		16 valve positions	574466 VABM-L1-18S-G38-16





Festo core product range


- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-S18, in-line valves G1/4



Ordering data

Ordering data – Accessories			
	Description	Part no.	Type
Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>			
	For valve position on manifold rail, including screws and seal	★ 574482	VABB-L1-18
Separator <span style="float: right;">Technical data → Internet: vabd</span>			
	For creating pressure zones	574483	VABD-14-B
Supply plate <span style="float: right;">Technical data → Internet: vabf</span>			
	For valve position on manifold rail, including screws and seal	574481	VABF-L1-18-P3A4-G14
Seals for in-line valves <span style="float: right;">Technical data → Internet: vabd</span>			
	For G1/4 in-line valves	Delivery unit: 10 sets (each with 2 screws and 1 seal)	★ 574479 VABD-L1-18X-S-G14

 Note  
 Connect supply plate at port 1 with compressed air. Reverse operation (pressure at port 3, 5) is not permissible.

Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days






# Solenoid valves VUVG-B10A, sub-base valves M3

Technical data

Function

- 5/2-way, single pilot
- 5/2-way, double solenoid
- 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 10 mm
-  - Flow rate  
90 ... 100 l/min
-  - Voltage  
5, 12 and 24 V DC



General Technical data VUVG-B						
Valve function	M52-R	B52	M52-M	P53		
Normal position	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot	Double solenoid	One position	One position		
Reset method: pneumatic spring	Yes <sup>4)</sup>	-	None	-		
Reset method: mechanical spring	Yes <sup>4)</sup>	-	Yes	Yes		
Vacuum operation at port 1	Only with external pilot air supply					
Design	Piston spool					
Sealing principle	Soft					
Type of control	Electric					
Type of control	Pilot					
Pilot air supply	External, internal; can be selected via sub-base					
Exhaust function	With flow control option					
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting					
Type of mounting	On manifold rail					
Mounting position	Optional					
Nominal size	[mm]	2	1.4	2		
Standard nominal flow rate	[l/min]	100	80	90		
Flow rate on manifold rail M3	[l/min]	100	80	90		
Switching time on/off	[ms]	7/15	-	7/21	8/25	
Changeover time	[ms]	-	5	-	14	
Size	[mm]	10				
Ports	1, 3, 5	M7 in manifold rail				
	2, 4	M5 in manifold rail				
	12/14, 82/84	M5 in manifold rail				
Product weight	[g]	38	49	37	49	
Approval certificate	c UL us - Recognized(OL)					
	c CSA us (OL)					
	RCM mark					
CE marking (see declaration of conformity) <sup>5)</sup>	To EU EMC Directive					
Corrosion resistance class CRC <sup>6)</sup>	2					

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised  
 3) E=Mid-position exhausted  
 4) Combined reset method  
 5) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 6) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



# Solenoid valves VUVG-B10A, sub-base valves M3

Technical data

Operating and environmental conditions					
Valve function		M52-R <sup>1</sup>	B52	M52-M <sup>2</sup>	P53
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]			
Operating pressure	Internal	[bar]	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	-0.9 ... 10		-0.9 ... 10
Pilot pressure <sup>3)</sup>		[bar]	2.5 ... 8	1.5 ... 8	2 ... 8
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60		
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60		

- 1) Mixed, pneumatic/mechanical spring
- 2) Mechanical spring
- 3) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[DC V] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

## Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

5/2-way and 5/3-way valve


- - Note  
More dimensions  
Electrical connection boxes  
→ Page 114

1 Vertical electrical connection      2 Manual override

Type	B1	H1	L1	L2	L3	L4	L5	L6	L7
VUVG-B10A-...-F...	10.2	32.5	73.9	68.9	8	4.85	6.15	56.9	54.4

# Solenoid valves VUVG-B10A, sub-base valves M3

Ordering data

Ordering data				
Description		Part no.	Type	
Sub-base valve M3, without electrical connection box				
	5/2-way valve, single solenoid			
	External pilot air supply	Reset method: pneumatic/mechanical spring	566448	VUVG-B10A-M52-RZT-F-1P3
		Reset method: mechanical spring	574347	VUVG-B10A-M52-MZT-F-1P3
	5/2-way valve, double solenoid			
	External pilot air supply		566449	VUVG-B10A-B52-ZT-F-1P3
	5/3-way valve			
	External pilot air supply	Mid-position closed, mechanical spring reset method	566450	VUVG-B10A-P53C-ZT-F-1P3
		Mid-position exhausted, mechanical spring reset method	566451	VUVG-B10A-P53E-ZT-F-1P3
		Mid-position pressurized, mechanical spring reset method	566452	VUVG-B10A-P53U-ZT-F-1P3

# Solenoid valves VUVG-B10A, sub-base valves M3


Manifold assembly

Sub-base valve for manifold assembly  
M5 connection



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

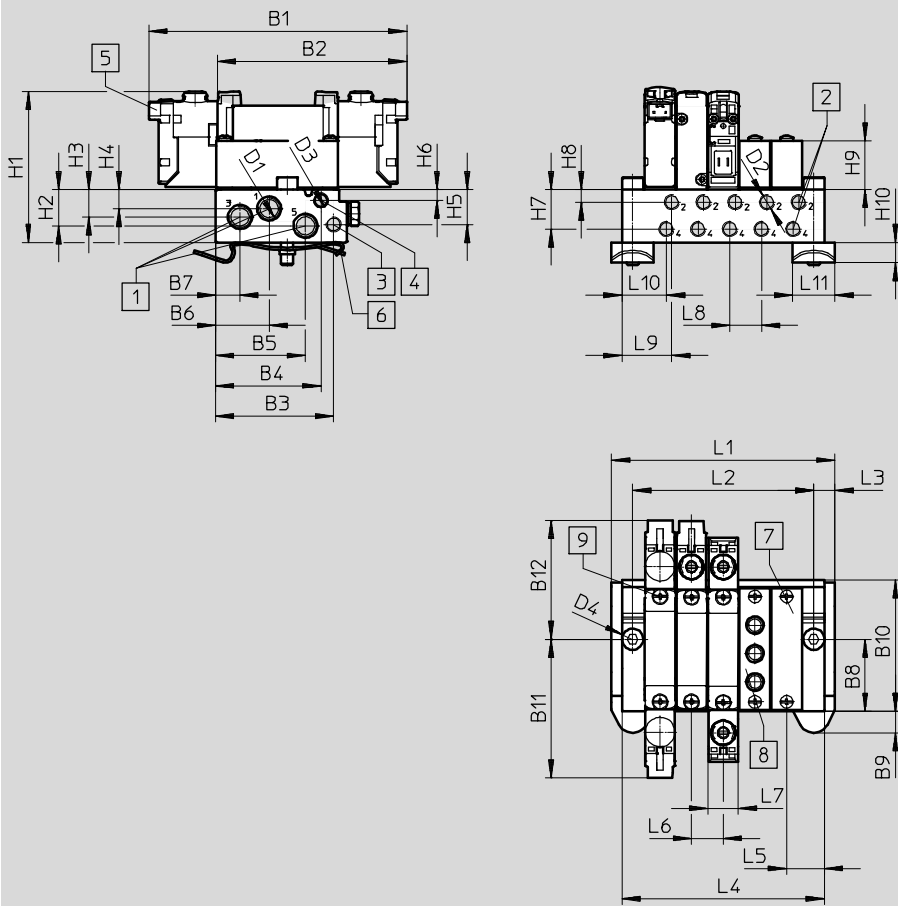

- - Note  
More dimensions  
Electrical connection boxes  
→ Page 114

- 1 Ports 1, 3 and 5
- 2 Ports 2 and 4
- 3 Connections 12, 14
- 4 Connections 82, 84
- 5 Electrical connection for electrical sub-bases and accessories
- 6 H-rail mounting (two M4x25 screws are required for mounting)
- 7 Cover plate
- 8 Supply plate
- 9 Valves/blanking plate mounting on manifold rail

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
VABM-L1-10AW-M7	84.9	62.4	39.1	35	29.8	17.8	8.2	24	7.2	43.5	45.8	39.2


Type	D1	D2	D3	D4	D5	H1	H2	H3	H4	H5	H6
VABM-L1-10AW-M7	M7	M5	M5	∅ 4.5	∅4	53.1	12	9.1	6.3	11.6	3.6

Type	H7	H8	H9	H10	H15	L3	L5	L6	L7	L8	L9	L10	L11
VABM-L1-10AW-M7	13.1	4.2	16.2	6.8	1.9	7.5	12.5	10.5	10.2	10.5	17	15.2	14

# Solenoid valves VUVG-B10A, sub-base valves M3

Ordering data

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1	43.5	54	64.5	75	85.5	97	107.5	117	127.5	148.5	169.5	190.5
L2	28.5	39	49.5	60	70.5	81	91.5	102	112.5	133.5	154.5	175.5
L4	36.5	47	57.5	68	78.5	89	99.5	110	120.5	141.5	162.5	183.5
VABM weight [g]	60	78	96	114	132	150	168	186	204	240	276	312


Technical data – Manifold rails <sup>1)</sup>									
	Ports			CRC	Material <sup>3)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	M5	M7	M5	2 <sup>2)</sup>	Wrought aluminium alloy	-0.9 ... 10	0.45	1.5	1.5

- 1) Blanking plugs are included with the manifold rail.
- 2) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 3) Note on materials: RoHS-compliant.

## Order code – Manifold rails





<b>VABM</b>	-	<b>L1</b>	-	<b>10A</b>	<b>W</b>	-	<b>M7</b>	-	
Valve manifold parts									
Manifold rail		<b>VABM</b>							Number of valve positions 2 to 10, 12, 14 and 16
Valve series							Ports 1, 3, 5		
VUVG		<b>L1</b>					<b>M7</b> M7 thread		
Size									
10 mm				<b>10A</b>					
Manifold rail with port 1, 2, 3, 4, 5, 12/14, 82/84									
Port 2 and 4 with M5 thread									
					<b>W</b>				

## Ordering data – Manifold rails

Description	Part no.	Type	
Manifold rail For sub-base valve M3			
	For size B10A (M3)		
	2 valve positions	<b>566546</b>	<b>VABM-L1-10AW-M7-2</b>
	3 valve positions	<b>566547</b>	<b>VABM-L1-10AW-M7-3</b>
	4 valve positions	<b>566548</b>	<b>VABM-L1-10AW-M7-4</b>
	5 valve positions	<b>566549</b>	<b>VABM-L1-10AW-M7-5</b>
	6 valve positions	<b>566550</b>	<b>VABM-L1-10AW-M7-6</b>
	7 valve positions	<b>566551</b>	<b>VABM-L1-10AW-M7-7</b>
	8 valve positions	<b>566552</b>	<b>VABM-L1-10AW-M7-8</b>
	9 valve positions	<b>566553</b>	<b>VABM-L1-10AW-M7-9</b>
	10 valve positions	<b>566554</b>	<b>VABM-L1-10AW-M7-10</b>
	12 valve positions	<b>566555</b>	<b>VABM-L1-10AW-M7-12</b>
	14 valve positions	<b>566556</b>	<b>VABM-L1-10AW-M7-14</b>
16 valve positions	<b>566557</b>	<b>VABM-L1-10AW-M7-16</b>	

# Solenoid valves VUVG-B10A, sub-base valves M3

Ordering data

Ordering data – Accessories			
	Description	Part no.	Type
Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>			
	For valve position on manifold rail, including screws and seal	<b>569986</b>	<b>VABB-L1-10A</b>
Separator <span style="float: right;">Technical data → Internet: vabd</span>			
	For creating pressure zones	<b>570872</b>	<b>VABD-4.2-B</b>
Supply plate <span style="float: right;">Technical data → Internet: vabf</span>			
	For valve position on manifold rail, including screws and seal	<b>569990</b>	<b>VABF-L1-10A-P3A4-M5</b>
Seals <span style="float: right;">Technical data → Internet: vabd</span>			
	For sub-base valve M3	Delivery unit: 10 sets (each with 2 screws and 1 seal)	<b>566671</b> <b>VABD-L1-10AB-S-M3</b>

# Solenoid valves VUVG, sub-base valves M5/M7

FESTO

Type code




VUVG	-	B	10	-	-	Z	-	F	-
Valve type									
Sub-base valve									
Design									
Piston spool with sealing cartridge									
Piston spool with sealing ring									
Size									
10 mm									
Valve function									
5/2-way valve, bistable									
5/2-way valve, single solenoid,									
5/3-way valve, mid-position closed									
5/3-way valve, mid-position exhausted									
5/3-way valve, mid-position pressurised									
2x 3/2-way valve, normally closed									
2x 3/2-way valve, 1x normally open, 1x normally closed									
2x 3/2-way valve, normally open									
Reset method									
Pneumatic spring with T32 and M52									
Mechanical spring with T32 and M52									
Pneumatic/mechanical spring with M52									
With B52 and P53									
Pilot air									
External									
Manual override									
Non-detenting									
Covered									
Non-detenting, detenting									
Detenting, without accessories									
Pneumatic connection									
In the manifold rail									

L	-	-
Feature		
- Extended features		
S Core features		
Accessories for valve/connecting cable		
C1...4	Connection pattern H: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m	
N1...4	M8x1, 3-pin, straight: 1 = 2.5 m, 2 = 5 m; angled: 3 = 2.5 m, 4 = 5 m	
N5...8	M8x1, 4-pin, straight: 5 = 2.5 m, 6 = 5 m; angled: 7 = 2.5 m, 8 = 5 m	
S1...4	Connection pattern S, 1 = 0.5 m, 2 = 1 m, 3 = 2.5, 4 = 5 m	
W1...4	Connection pattern H, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m	
WS1...4	Connection pattern S with flying leads, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m	
Advertisement		
L	LED	
Circuitry		
- Without holding current reduction (HCR)		
R With holding current reduction (HCR)		
Electrical connection		
H2	Connection pattern H, horizontal plug connector	
H3	Connection pattern H, vertical plug	
K6...9	Cable: K6 = 0.5 m, K7 = 1 m, K8 = 2.5 m, K9 = 5 m	
L1...4	With 2x flying leads L: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m	
P3	Without E-box	
R1	Individual plug connector M8, 4-pin	
R8	Individual plug connector M8, 3-pin	
S2	Connection pattern S, horizontal plug connector	
S3	Connection pattern S, vertical connector	
Nominal operating voltage		
1	24 V DC	
4	5 V DC	
5	12 V DC	


# Solenoid valves VUVG-BK10, sub-base valves M5/M7

Technical data

Function  
2x 3/2C  
5/2-way, monostable  
5/2-way valve, bistable

-  - Size 10 mm
-  - Flow rate  
160 l/min
-  - Voltage  
24 V DC

Circuit symbol → Page 13

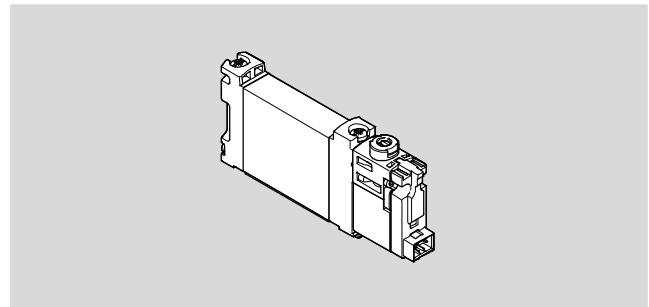

General Technical data, VUVG-BK			
Valve function	T32-A	M52-A	B52
Normal position	C <sup>1)</sup>	-	-
Stable position	Single pilot		Bistable
Reset method: pneumatic spring	Yes	Yes	-
Design	Piston spool		
Sealing principle	Soft		
Type of control	Electric		
Type of control	Pilot		
Pilot air supply	Internal		
Exhaust air function	With flow control option		
Manual override	Non-detenting, detenting		
Type of mounting	On manifold rail		
Mounting position	Optional		
Standard nominal flow rate	[l/min] 160	160	160
Switching time on/off	[ms] 12/14	14/17	-
Changeover time	[ms] -	-	7
Size	[mm] 10		
Ports	2, 4	M5/M7 in manifold rail	
Product weight	[g] 55	45	57
Corrosion resistance class CRC <sup>2)</sup>	2		

1) C=Normally closed

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Safety data		
Max. positive test pulse with 0 signal	[μs]	1600
Max. negative test pulse with 1 signal	[μs]	3000
Shock resistance	Shock test with severity level 1 in accordance with FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6	

# Solenoid valves VUVG-BK10, sub-base valves M5/M7



Technical data

Operating and environmental conditions				
Valve function		T32-A <sup>1</sup>	M52-A <sup>1</sup>	B52
Operating medium	Compressed air to ISO 8573-2010 [7:4:4]			
Note about the operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)			
Operating pressure	[bar]	1.5 ... 7	2.5 ... 7	1.5 ... 7
Ambient temperature	[°C]	-5 ... +50		
Temperature of medium	[°C]	-5 ... +50		


1) Pneumatic spring.

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[DC V] 24 ±10%
Nominal operating voltage	[DC V] 22
Power	[W] 0.7
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)
Signal status display	LED
Maximum switching frequency	[Hz] 2

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

Pin allocation for electrical connection box			
	Pin		Description
Rectangular plug connector, plug pattern H			
	1	+ or -	Protective circuit without holding current reduction
	2	+ or -	
Round plug, M8, 3-pin			
	1	Not used	Protective circuit without holding current reduction
	3	+ or -	
	4	+ or -	

### Protective circuit without holding current reduction

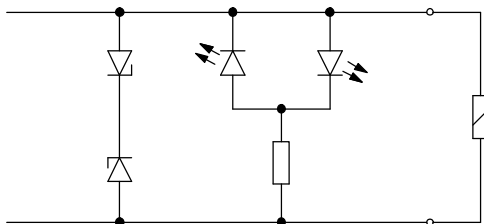



The solenoid coils are equipped with a protective circuit to arrest sparks and protect against polarity reversal.



# Solenoid valves VUVG-BK10, sub-base valves M5/M7

Technical data

**Dimensions** Download CAD data → [www.festo.com](http://www.festo.com)



<p>2x 3/2-way, 5/2-way valve, double solenoid</p> 	<p>5/2-way valve, single solenoid</p> 
<p>-  - Note                  More dimensions                  Electrical connection boxes                  → Page 114</p>	
<p><span style="border: 1px solid black; padding: 2px;">2</span> Horizontal electrical connection      <span style="border: 1px solid black; padding: 2px;">3</span> Manual override</p>	

Type	B1	H1	L1	L2	L7
VUVG-BK10-T32C-...	10.2	33.6	98.3	95.8	47
VUVG-BK10-B52-...					
VUVG-BK10-M52-...			75.9	74.6	

# Solenoid valves VUVG-BK10, sub-base valves M5/M7

Ordering data

★ Core product range

Ordering data			
	Description	Part no.	Type
Sub-base valve M5/M7, with electrical connection box R8			
	2x 3/2-way valve		
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042558 VUVG-BK10-T32C-AT-F-1R8L-S
	5/2-way valve, single solenoid		
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042559 VUVG-BK10-M52-AT-F-1R8L-S
	5/2-way valve, double solenoid		
	Internal pilot air supply	★ 8042560	VUVG-BK10-B52-T-F-1R8L-S
Sub-base valve M5/M7, with electrical connection box H2			
	2x 3/2-way valve		
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042554 VUVG-BK10-T32C-AT-F-1H2L-S
	5/2-way valve, single solenoid		
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042555 VUVG-BK10-M52-AT-F-1H2L-S
	5/2-way valve, double solenoid		
	Internal pilot air supply	★ 8042556	VUVG-BK10-B52-T-F-1H2L-S

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days




# Solenoid valves VUVG-B10, sub-base valve M5/M7


Technical data

Function

2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, double solenoid  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 10 mm
-  - Flow rate  
120 ... 270 l/min
-  - Voltage  
5, 12 and 24 V DC

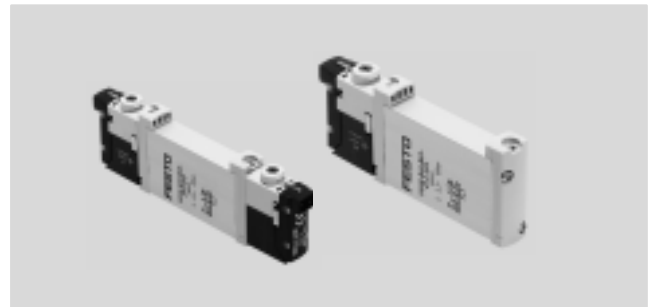

General technical data, VUVG-B M5/M7												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	–	–	–	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot							Double solenoid	One position	One position		
Reset method: pneumatic spring	Yes			None			Yes <sup>5)</sup>	–	None	–		
Reset method: mechanical spring	None			Yes			Yes <sup>5)</sup>	–	Yes	Yes		
Vacuum operation at port 1	None			Only with external pilot air supply								
Design	Piston spool											
Sealing principle	Soft											
Type of control	Electric											
Type of control	Pilot											
Pilot air supply	External, internal; can be selected via sub-base											
Exhaust function	With flow control option											
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting											
Type of mounting	On manifold rail											
Mounting position	Optional											
Nominal size	[mm]	2.7			1.8	1.7		4		2.3	3.5	
Standard nominal flow rate	[l/min]	170			150	140	140		330	285	300	
Flow rate on manifold rail M5	[l/min]	150			130	120	120		210	180	200	
Flow rate on manifold rail M7	[l/min]	160			140	130	130		270	230	250	
Switching time on/off	[ms]	6/16			8/11			7/19	–	8/24	11/30	
Changeover time	[ms]	–							7	14		
Size	[mm]	10										
Ports	1, 3, 5	G1/8 in manifold rail										
	2, 4	M5 or M7 in manifold rail										
	12/14, 82/84	M5 in manifold rail										
Product weight	[g]	55			54	45		55	44	55		
Approval certificate	c UL us - Recognized(OL)											
	c CSA us (OL)											
	RCM mark											
CE marking (see declaration of conformity) <sup>6)</sup>	To EU EMC Directive											
Corrosion resistance class CRC <sup>7)</sup>	2											

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised  
 3) E=Mid-position exhausted  
 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open  
 5) Combined reset method  
 6) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 7) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Solenoid valves VUVG-B10, sub-base valves M5/M7

Technical data

Operating and environmental conditions								
Valve function			T32-A <sup>1</sup>	T32-M <sup>3</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup>	P53
Operating medium	Compressed air to ISO 8573-2010 [7:4:4]							
Operating pressure	Internal	[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8	-0.9 ... 10
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60					
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60					

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[V DC] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

## Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way and 5/3-way valve


⌀ - Note

More dimensions  
Electrical connection boxes  
→ Page 114

Type	B1	H1	H2	L1	L2	L3	L4	L5	L6	L7
VUVG-B10 -...-F...	10.2	32.5	3.6	86.5	81.5	8	4.85	6.15	69.2	66.7


# Solenoid valves VUVG-B10, sub-base valves M5/M7

Ordering data

Ordering data				
	Description		Part no.	Type
Sub-base valve M5/M7, without electrical connection box				
	2x 3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	566487	VUVG-B10-T32C-AZT-F-1P3
		Normally open, reset method: pneumatic spring	566488	VUVG-B10-T32U-AZT-F-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring	566489	VUVG-B10-T32H-AZT-F-1P3
		Normally closed, reset method: mechanical spring	574364	VUVG-B10-T32C-MZT-F-1P3
		Normally open, reset method: mechanical spring	574365	VUVG-B10-T32U-MZT-F-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring	574366	VUVG-B10-T32H-MZT-F-1P3
	5/2-way valve, single solenoid			
	External pilot air supply	Reset method: pneumatic/mechanical spring	566490	VUVG-B10-M52-RZT-F-1P3
		Reset method: mechanical spring	574367	VUVG-B10-M52-MZT-F-1P3
	5/2-way valve, double solenoid			
	External pilot air supply		566491	VUVG-B10-B52-ZT-F-1P3
	5/3-way valve			
	External pilot air supply	Mid-position closed, mechanical spring reset method	566492	VUVG-B10-P53C-ZT-F-1P3
Mid-position exhausted, mechanical spring reset method		566493	VUVG-B10-P53E-ZT-F-1P3	
Mid-position pressurized, mechanical spring reset method		566494	VUVG-B10-P53U-ZT-F-1P3	

# Solenoid valves VUVG-B10, sub-base valves M5/M7

Ordering data

Ordering data					
Description		Part no.	Type		
Sub-base valve M5/M7, with electrical connection box R8					
	2x 3/2-way valve				
	External pilot air supply	Normally closed, reset method: pneumatic spring	574234	VUVG-B10-T32C-AZT-F-1R8L	
		Normally open, reset method: pneumatic spring	574235	VUVG-B10-T32U-AZT-F-1R8L	
		1x normally open, 1x normally closed, reset method: pneumatic spring	574236	VUVG-B10-T32H-AZT-F-1R8L	
		Normally closed, reset method: mechanical spring	8031492	VUVG-B10-T32C-MZT-F-1R8L	
		Normally open, reset method: mechanical spring	8031493	VUVG-B10-T32U-MZT-F-1R8L	
		1x normally open, 1x normally closed, reset method: mechanical spring	8031494	VUVG-B10-T32H-MZT-F-1R8L	
	5/2-way valve, single solenoid				
	External pilot air supply	Reset method: pneumatic/mechanical spring	574237	VUVG-B10-M52-RZT-F-1R8L	
		Reset method: mechanical spring	578157	VUVG-B10-M52-MZT-F-1R8L	
	5/2-way valve, double solenoid				
	External pilot air supply		574238	VUVG-B10-B52-ZT-F-1R8L	
	5/3-way valve				
	External pilot air supply	Mid-position closed, mechanical spring reset method	574239	VUVG-B10-P53C-ZT-F-1R8L	
Mid-position exhausted, mechanical spring reset method		574241	VUVG-B10-P53E-ZT-F-1R8L		
Mid-position pressurized, mechanical spring reset method		574240	VUVG-B10-P53U-ZT-F-1R8L		

# Solenoid valves VUVG-B10, sub-base valves M5/M7



Manifold assembly

Sub-base valve for manifold assembly  
M5 or M7 connection



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

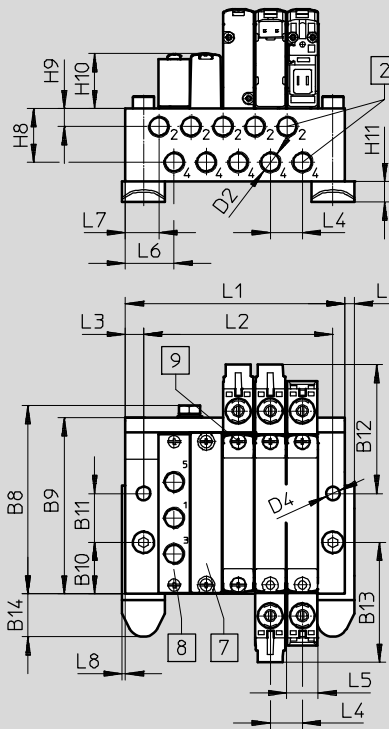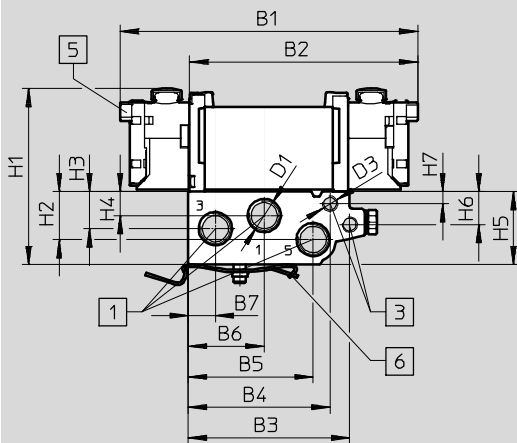

Note  
More dimensions  
Electrical connection boxes  
→ Page 114

- 1 Ports 1, 3 and 5
- 2 Ports 2 and 4
- 3 Connections 12, 14
- 5 Electrical connection for electrical sub-bases and accessories
- 6 H-rail mounting (two M4x30 screws are required for mounting)
- 7 Cover plate
- 8 Supply plate
- 9 Valves/blanking plate mounting on manifold rail

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
VABM-L1 10-...-G18	97.5	74.8	52.9	46.5	40.9	24.9	8.9	61.7	57.7	16.9	16	42.2

Type	B13	B14	D1	D2	D3	D4	D5	H1	H2	H3	H4
VABM-L1 10-...-G18	39.3	14.1	G1/8	M5/M7	M5	4.5	∅6	56.4	15.7	12.2	7.9


Type	H5	H6	H7	H8	H9	H10	H11	L3	L4	L5	L6	L7	L8	L9
VABM-L1 10-...-G18	23.9	10.8	4	17.6	5.9	18	6.8	6	10.5	10.3	16	11.9	1	3

# Solenoid valves VUVG-B10, sub-base valves M5/M7

FESTO

Manifold assembly

Valve positions	2	3	4	5	6	7	8	9	10	12	14	16	22
L1	40.5	51	61.5	72	82.5	93	103.5	114	124.5	145.5	166.5	187.5	250.5
L2	30.5	41	51.5	62	72.5	83	93.5	104	114.5	135.5	156.5	177.5	240.5
VABM weight [g]	107	135	163	191	219	247	275	303	331	387	415	471	499


Technical data – Manifold rails <sup>1)</sup>									
	Ports			CRC	Material <sup>3)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	M5 or M7	G1/8	M5	2 <sup>2)</sup>	Wrought aluminium alloy	-0.9 ... 10	0.45	1.5	3

- 1) Blanking plugs are included with the manifold rail.
- 2) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 3) Note on materials: RoHS-compliant.

## Order code – Manifold rails

VABM	-	L1	-	10	-	G18	-	
Valve manifold parts								Number of valve positions
Manifold rail	VABM							2 to 10, 12, 14 and 16
Valve series								Ports 1, 3, 5
VUVG		L1				G18		G1/8 thread
Size								
10 mm				10				
Manifold rail with port 1, 2, 3, 4, 5, 12/14, 82/84								
Port 2 and 4 with M5 thread								
W								
Port 2 and 4 with M7 thread								
HW								

## Ordering data – Manifold rails

	Description	Part no.	Typ
	Manifold rail for sub-base valve M5/M7 For size B10 (M5)	2 valve positions	★ 566582 VABM-L1-10W-G18-2
		3 valve positions	★ 566583 VABM-L1-10W-G18-3
		4 valve positions	★ 566584 VABM-L1-10W-G18-4
		5 valve positions	566585 VABM-L1-10W-G18-5
		6 valve positions	★ 566586 VABM-L1-10W-G18-6
		7 valve positions	566587 VABM-L1-10W-G18-7
		8 valve positions	★ 566588 VABM-L1-10W-G18-8
		9 valve positions	566589 VABM-L1-10W-G18-9
		10 valve positions	★ 566590 VABM-L1-10W-G18-10
		12 valve positions	566591 VABM-L1-10W-G18-12
		14 valve positions	566592 VABM-L1-10W-G18-14
		16 valve positions	566593 VABM-L1-10W-G18-16

Festo core product range






- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days



# Solenoid valves VUVG-B10, sub-base valves M5/M7

FESTO

Manifold assembly

Ordering data – Accessories			
	Description	Part no.	Type
Manifold rail for sub-base valve M5/M7			
	For size B10 (M7)	2 valve positions	★ 566606 VABM-L1-10HW-G18-2
		3 valve positions	★ 566607 VABM-L1-10HW-G18-3
		4 valve positions	★ 566608 VABM-L1-10HW-G18-4
		5 valve positions	566609 VABM-L1-10HW-G18-5
		6 valve positions	★ 566610 VABM-L1-10HW-G18-6
		7 valve positions	566611 VABM-L1-10HW-G18-7
		8 valve positions	★ 566612 VABM-L1-10HW-G18-8
		9 valve positions	566613 VABM-L1-10HW-G18-9
		10 valve positions	★ 566614 VABM-L1-10HW-G18-10
		12 valve positions	566615 VABM-L1-10HW-G18-12
		14 valve positions	566616 VABM-L1-10HW-G18-14
16 valve positions	566617 VABM-L1-10HW-G18-16		
Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>			
	For valve position on manifold rail, including screws and seal	★ 566495	VABB-L1-10-W
Separator <span style="float: right;">Technical data → Internet: vabd</span>			
	For creating pressure zones	569994	VABD-6-B
Supply plate <span style="float: right;">Technical data → Internet: vabf</span>			
	For valve position (sub-base valves M5) on manifold rail, including screws and seal	569991	VABF-L1-10-P3A4-M5
	For valve position (sub-base valves M7) on manifold rail, including screws and seal	569992	VABF-L1-10-P3A4-M7
Seals <span style="float: right;">Technical data → Internet: vabd</span>			
	For sub-base valves M5/M7	Delivery unit: 10 sets (each with 2 screws and 1 seal)	566674 VABD-L1-10B-S-M7

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG, sub-base valves G1/8

Type codes

<b>VUVG</b>	-	<b>B</b>		<b>14</b>	-		-		<b>Z</b>		→
Valve type											
Sub-base valve <b>B</b>											
Design principle											
Piston spool with sealing cartridge -											
Piston spool with sealing ring <b>K</b>											
Size											
14 mm <b>14</b>											
Valve function											
5/2-way valve, bistable <b>B52</b>											
5/2-way valve, single solenoid, <b>M52</b>											
5/3-way valve, mid-position closed <b>P53C</b>											
5/3-way valve, mid-position exhausted <b>P53E</b>											
5/3-way valve, mid-position pressurised <b>P53U</b>											
2x 3/2-way valve, normally closed <b>T32C</b>											
2x 3/2-way valve, 1x normally open, 1x normally closed <b>T32H</b>											
2x 3/2-way valve, normally open <b>T32U</b>											
Reset method											
Pneumatic spring with T32 and M52 <b>A</b>											
Mechanical spring with T32 and M52 <b>M</b>											
With B52 and P53 -											
Pilot air											
External <b>Z</b>											
Manual override											
Non-detenting <b>H</b>											
Covered <b>S</b>											
Non-detenting, detenting <b>T</b>											
Detenting, without accessories <b>Y</b>											

# Solenoid valves VUVG, sub-base valves G1/8




Type codes

-	<b>F</b>	-				<b>L</b>	-		-
Feature									
-									
Extended features									
<b>S</b>									
Core features									
Accessories for valve/connecting cable									
<b>C1...4</b> Connection pattern H: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m									
<b>N1...4</b> M8x1, 3-pin, straight: 1 = 2.5 m, 2 = 5 m; angled: 3 = 2.5 m, 4 = 5 m									
<b>N5...8</b> M8x1, 4-pin, straight: 5 = 2.5 m, 6 = 5 m; angled: 7 = 2.5 m, 8 = 5 m									
<b>S1...4</b> Connection pattern S, 1 = 0.5 m, 2 = 1 m, 3 = 2.5, 4 = 5 m									
<b>W1...4</b> Connection pattern H, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m									
<b>WS1...4</b> Connection pattern S with flying leads, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m									
Advertisement									
<b>L</b> LED									
Circuitry									
-									
Without holding current reduction (HCR)									
<b>R</b>									
With holding current reduction (HCR)									
Electrical connection									
<b>H2</b> Connection pattern H, horizontal plug connector									
<b>H3</b> Connection pattern H, vertical plug									
<b>K6...9</b> Cables: 6 = 0.5 m, 7 = 1 m, 8 = 2.5 m, 9 = 5 m									
<b>L1...4</b> with 2x flying lead: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m									
<b>P3</b> Without E-box									
<b>R1</b> Individual plug connector M8, 4-pin									
<b>R8</b> Individual plug connector M8, 3-pin									
<b>S2</b> Connection pattern S, horizontal plug connector									
<b>S3</b> Connection pattern S, vertical connector									
Nominal operating voltage									
<b>1</b> 24 V DC									
<b>4</b> 5 V DC									
<b>5</b> 12 V DC									
Pneumatic connection									
<b>F</b> In the manifold rail									


# Solenoid valves VUVG-BK14, sub-base valves G1/8

Technical data

Function  
 2x 3/2C  
 5/2-way, monostable  
 5/2-way valve, bistable

-  - Size 14 mm
-  - Flow rate  
350 ... 380 l/min
-  - Voltage  
24 V DC

Circuit symbol → Page 13

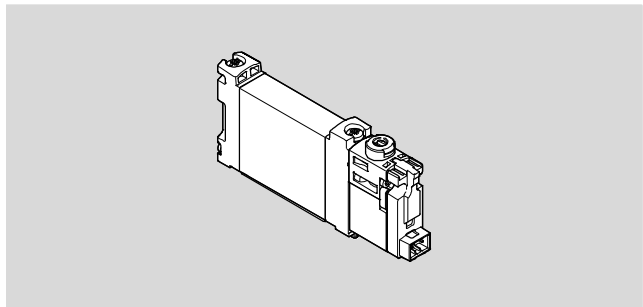

General Technical data, VUVG-BK				
Valve function		T32-A	M52-A	B52
Normal position		C <sup>1)</sup>	-	-
Stable position		Single pilot		Bistable
Reset method: pneumatic spring		Yes	Yes	-
Design		Piston spool		
Sealing principle		Soft		
Type of control		Electric		
Type of control		Pilot		
Pilot air supply		Internal		
Exhaust air function		With flow control option		
Manual override		Non-detenting, detenting		
Type of mounting		On manifold rail		
Mounting position		Optional		
Standard nominal flow rate	[l/min]	350	380	380
Switching time on/off	[ms]	13/20	14/24	-
Changeover time	[ms]	-		8
Size	[mm]	14		
Ports	2, 4	G1/8 in manifold rail		
Product weight	[g]	75	65	85
Corrosion resistance class CRC <sup>2)</sup>		2		

1) C=Normally closed

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Safety data	
Max. positive test pulse with 0 signal	[µs] 1600
Max. negative test pulse with 1 signal	[µs] 3000
Shock resistance	Shock test with severity level 1 in accordance with FN 942017-5 and EN 60068-2-27
Vibration resistance	Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6

# Solenoid valves VUVG-BK14, sub-base valves G1/8



Technical data

Operating and environmental conditions			
Valve function		T32-A <sup>1</sup>	M52-A <sup>1</sup> B52
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]	
Note about the operating/pilot medium		Operation with lubricated medium possible (in which case lubricated operation will always be required)	
Operating pressure	[bar]	1.5 ... 7	2.5 ... 7 1.5 ... 7
Ambient temperature	[°C]	-5 ... +50	
Temperature of medium	[°C]	-5 ... +50	


1) Pneumatic spring.

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[DC V] 24 ±10%
Nominal operating voltage	[DC V] 22
Power	[W] 0.7
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)
Signal status display	LED
Maximum switching frequency	[Hz] 2

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant Contains paint-wetting impairment substances

Pin allocation for electrical connection box			
	Pin		Description
Rectangular plug connector, plug pattern H			
	1	+ or -	Protective circuit without holding current reduction
	2	+ or -	
Round plug, M8, 3-pin			
	1	Not used	Protective circuit without holding current reduction
	3	+ or -	
	4	+ or -	

### Protective circuit without holding current reduction

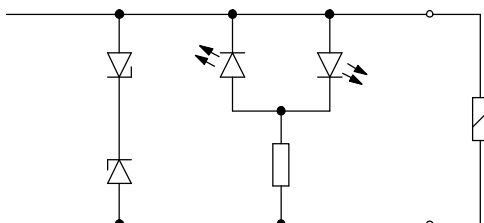

The solenoid coils are equipped with a protective circuit to arrest sparks and protect against polarity reversal.

# Solenoid valves VUVG-BK14, sub-base valves G1/8

Technical data

**Dimensions** Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way valve, single solenoid 5/2-way valve, double solenoid

2 Horizontal electrical connection      3 Manual override



Note  
 More dimensions  
 Electrical connection boxes  
 → Page 114

Type	B1	H1	L1	L2	L7
VUVG-BK14-T32C-...	14.4	34.8	118.9	116.4	66.5
VUVG-BK14-B52-...					
VUVG-BK14-M52-...			95.6	94.4	

# Solenoid valves VUVG-BK14, sub-base valves G1/8

Ordering data

## ★ Core product range

Ordering data				
	Description	Part no.	Type	
Sub-base valve G1/8, with electrical connection box R8				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042574	VUVG-BK14-T32C-AT-F-1R8L-S
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042575	VUVG-BK14-M52-AT-F-1R8L-S
	5/2-way valve, double solenoid			
	Internal pilot air supply		★ 8042576	VUVG-BK14-B52-T-F-1R8L-S
Sub-base valve G1/8, with electrical connection box H2				
	2x 3/2-way valve			
	Internal pilot air supply	Normally closed, reset method: pneumatic spring	★ 8042570	VUVG-BK14-T32C-AT-F-1H2L-S
	5/2-way valve, single solenoid			
	Internal pilot air supply	Reset method: pneumatic spring	★ 8042571	VUVG-BK14-M52-AT-F-1H2L-S
	5/2-way valve, double solenoid			
	Internal pilot air supply		★ 8042572	VUVG-BK14-B52-T-F-1H2L-S

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-B14, sub-base valves G1/8







Technical data

**Function**

2x 3/2C, 2 x3/2U, 2 x3/2  
5/2-way, single pilot  
5/2-way, double solenoid  
5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 14 mm
-  - Flow rate  
410 ... 700 l/min
-  - Voltage  
5, 12 and 24 V DC

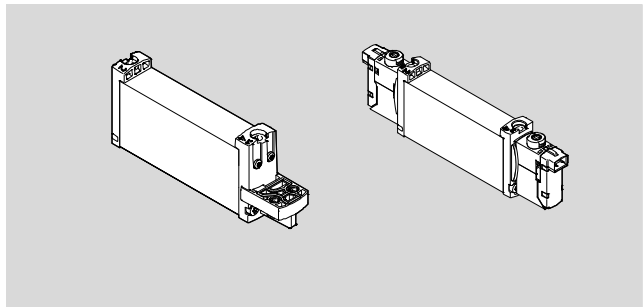

General Technical data VUVG-B														
Valve function	T32-A			T32-M			M52-A	B52	M52-M	P53				
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>		
Stable position	Single pilot						Double solenoid	One position	One position					
Reset method: pneumatic spring	Yes			None			Yes	-	None	-				
Reset method: mechanical spring	None			Yes			None	-	Yes	Yes				
Vacuum operation at port 1	None			Only with external pilot air supply										
Size [mm]	14													
Design	Piston spool													
Sealing principle	Soft													
Type of control	Electric													
Type of control	Pilot													
Pilot air supply	External, internal; can be selected via sub-base													
Exhaust function	With flow control option													
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting													
Type of mounting	On manifold rail													
Mounting position	Optional													
Nominal size [mm]	4.6			4.3			5.6							
Standard nominal flow rate [l/min]	600	580	470			450	630	680			600	580	580	
Flow rate on manifold rail G1/8 [l/min]	510			430	410		520	570			520	500	460	
Switching time	On/off	[ms]	8/23			15/11		14/22		-	13/40		12/40	
	Changeover	[ms]	-											
Pneumatic connection	1, 3, 5	G1/4 in manifold rail												
	2, 4	G1/8 in manifold rail												
	12/14, 82/84	M5 in manifold rail												
Product weight [g]	89			80			78	89	70	89				
Approval certificate	c UL us - Recognized (OL)													
	c CSA us (OL)													
	RCM mark													
CE marking (see declaration of conformity) <sup>5)</sup>	To EU EMC Directive													
	to EU Low Voltage Directive													
Corrosion resistance class CRC <sup>6)</sup>	2													

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised  
 3) E=Mid-position exhausted  
 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open  
 5) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 6) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



# Solenoid valves VUVG-B14, sub-base valves G1/8

Technical data

Operating and environmental conditions							
Valve function		T32-A <sup>1</sup>	T32-M <sup>2</sup>	M52-A <sup>1</sup>	B52	M52-M <sup>2</sup>	P53
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]					
Note about the operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)					
Operating pressure	Internal	[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8
Pilot pressure <sup>3)</sup>		[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60				
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60				

1) Pneumatic spring.

2) Mechanical spring.

3) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage	[V DC] 5, 12 and 24 ±10%
Power	[W] 1, reduced to 0.35 with holding current reduction
Duty cycle ED	[%] 100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)


Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

# Solenoid valves VUVG-B14, sub-base valves G1/8

Technical data

**Dimensions** Download CAD data → [www.festo.com](http://www.festo.com)



2x 3/2-way, 5/2-way and 5/3-way valve 5/2-way valve, single solenoid,

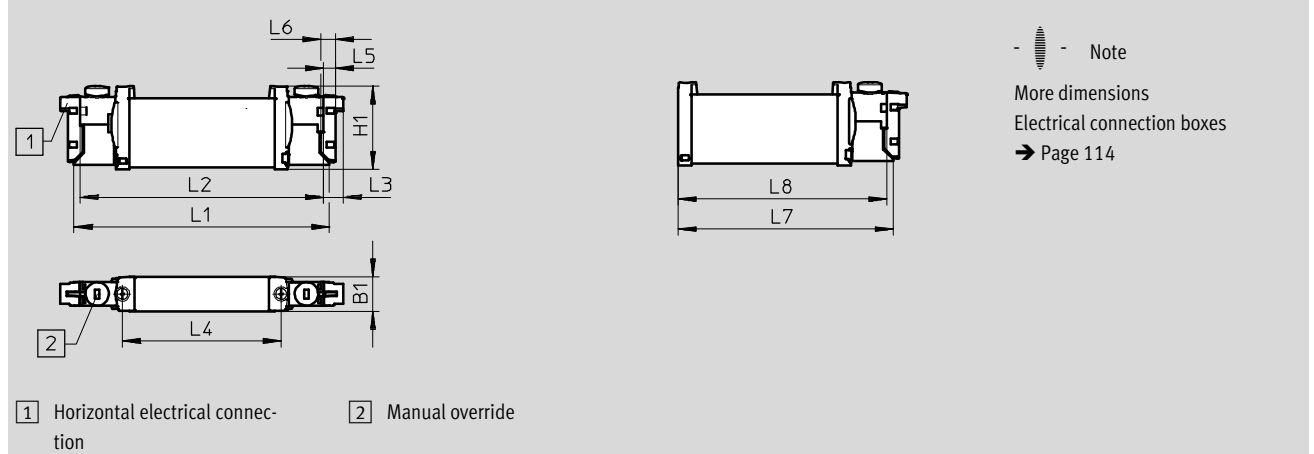

Type	B1	H1	L1	L2	L3	L4	L5	L6	L7	L8
VUVG-B14 -...-F ...	14	34.8	107	102	8	66.5	4.9	6.2	89.5	87

# Solenoid valves VUVG-B14, sub-base valves G1/8

Ordering data


Ordering data					
	Description		Part no.	Type	
Sub-base valve G1/8, without electrical connection box					
	2x 3/2-way valve				
	External pilot air supply	Normally closed, reset method: pneumatic spring		566513	VUVG-B14-T32C-AZT-F-1P3
		Normally open, reset method: pneumatic spring		566514	VUVG-B14-T32U-AZT-F-1P3
		1x normally open, 1x normally closed, reset method: pneumatic spring		566515	VUVG-B14-T32H-AZT-F-1P3
		Normally closed, reset method: mechanical spring		574376	VUVG-B14-T32C-MZT-F-1P3
		Normally open, reset method: mechanical spring		574377	VUVG-B14-T32U-MZT-F-1P3
		1x normally open, 1x normally closed, reset method: mechanical spring		574378	VUVG-B14-T32H-MZT-F-1P3
	5/2-way valve, single solenoid				
	External pilot air supply	Reset method: pneumatic spring		566516	VUVG-B14-M52-AZT-F-1P3
		Reset method: mechanical spring		574379	VUVG-B14-M52-MZT-F-1P3
	5/2-way valve, double solenoid				
	External pilot air supply			566517	VUVG-B14-B52-ZT-F-1P3
	5/3-way valve				
	External pilot air supply	Mid-position closed, mechanical spring reset method		566518	VUVG-B14-P53C-ZT-F-1P3
Mid-position exhausted, mechanical spring reset method			566519	VUVG-B14-P53E-ZT-F-1P3	
Mid-position pressurized, mechanical spring reset method			566520	VUVG-B14-P53U-ZT-F-1P3	
Sub-base valve G1/8, with electrical connection box R8					
	2x 3/2-way valve				
	External pilot air supply	Normally closed, reset method: pneumatic spring		574242	VUVG-B14-T32C-AZT-F-1R8L
		Normally open, reset method: pneumatic spring		574243	VUVG-B14-T32U-AZT-F-1R8L
		1x normally open, 1x normally closed, reset method: pneumatic spring		574244	VUVG-B14-T32H-AZT-F-1R8L
		Normally closed, reset method: mechanical spring		578248	VUVG-B14-T32C-MZT-F-1R8L
		Normally open, reset method: mechanical spring		8031517	VUVG-B14-T32U-MZT-F-1R8L
		1x normally open, 1x normally closed, reset method: mechanical spring		8031518	VUVG-B14-T32H-MZT-F-1R8L
	5/2-way valve, single solenoid				
	External pilot air supply	Reset method: pneumatic spring		574245	VUVG-B14-M52-AZT-F-1R8L
		Reset method: mechanical spring		578158	VUVG-B14-M52-MZT-F-1R8L
	5/2-way valve, double solenoid				
	External pilot air supply			574246	VUVG-B14-B52-ZT-F-1R8L
	5/3-way valve				
	External pilot air supply	Mid-position closed, mechanical spring reset method		574247	VUVG-B14-P53C-ZT-F-1R8L
Mid-position exhausted, mechanical spring reset method			574249	VUVG-B14-P53E-ZT-F-1R8L	
Mid-position pressurized, mechanical spring reset method			574248	VUVG-B14-P53U-ZT-F-1R8L	

# Solenoid valves VUVG-B14, sub-base valves G1/8

Manifold assembly




Sub-base valve for manifold assembly  
Connection G1/8

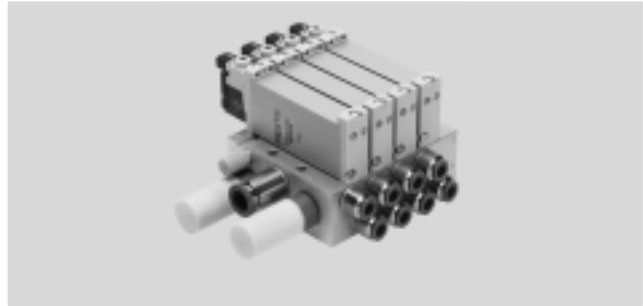

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

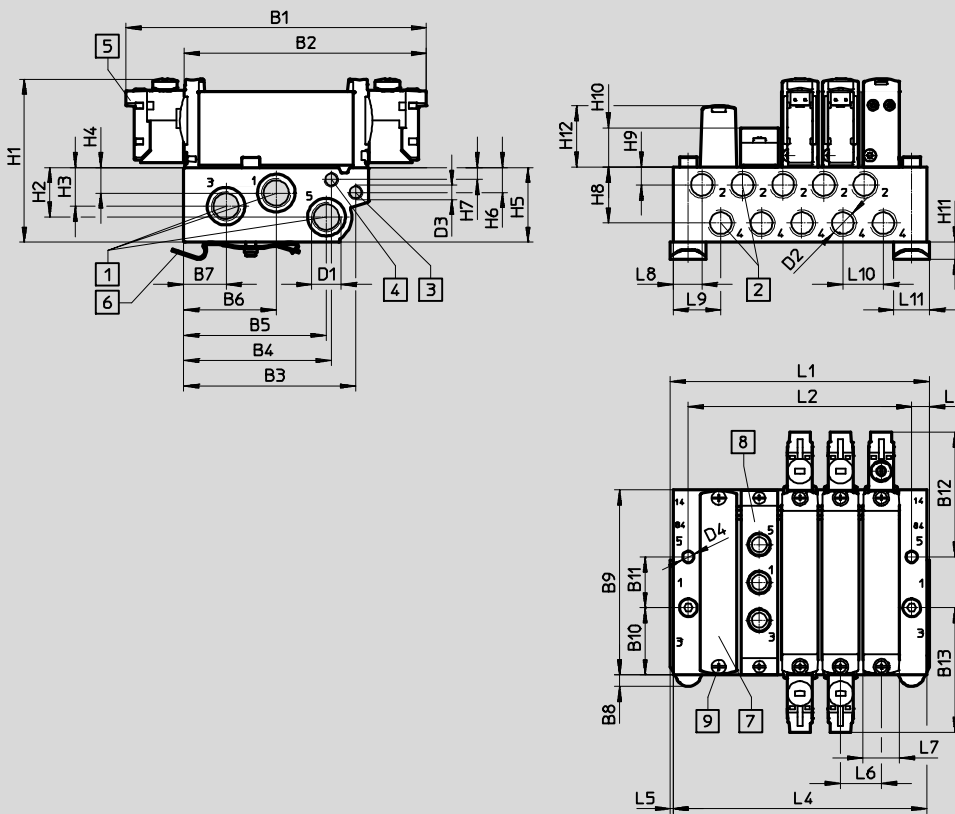

Note  
More dimensions  
Electrical connection boxes  
→ Page 114

- 1 Ports 1, 3 and 5
- 2 Ports 2 and 4
- 3 Connections 12, 14
- 4 Connections 82, 84
- 5 Electrical connection for electrical sub-bases and accessories
- 6 H-rail mounting (two M4x35 screws are required for mounting)
- 7 Cover plate
- 8 Supply plate
- 9 Valves/blanking plate mounting on manifold rail

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
VABM-L1-14W-G14	118.3	95.1	67.7	58.2	56.3	36.6	16.7	4.5	72.9	26.5	20	49.1


Type	B13	D1	D2	D3	D4	H1	H2	H3	H4	H5
VABM-L1-14W-G14	49.1	G1/4	G1/8	M5	∅ 4.5	64.3	19.6	15.3	10.1	29.5

Type	H6	H7	H8	H9	H10	H11	H12	L3	L5	L6	L7	L8	L9	L10	L11
VABM-L1-14W-G14	9.8	4.8	22.1	7	15.4	6.8	23.9	6	1	16	14.4	11.3	18.5	16	14

# Solenoid valves VUVG-B14, sub-base valves G1/8

Ordering data


Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1	56.3	72.3	88.3	104.3	120.3	136.3	152.3	168.3	184.3	216.3	248.3	280.3
L2	40	56	72	88	104	120	136	152	168	200	232	264
L4	54.3	70.3	86.3	102.3	118.3	134.3	150.3	166.3	182.3	214.3	246.6	278.3
VABM weight [g]	232	306	380	454	528	602	676	750	824	972	1120	1268

Technical data – Manifold rails <sup>1)</sup>									
	Ports			CRC	Material <sup>3)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	G1/8	G1/4	M5	2 <sup>2)</sup>	Wrought aluminium alloy	-0.9 ... 10	0.65	1.5	3

- 1) Blanking plugs are included with the manifold rail.
- 2) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 3) Note on materials: RoHS-compliant.

## Order code – Manifold rails

<b>VABM</b>	-	<b>L1</b>	-	<b>14</b>	<b>W</b>	-	<b>G14</b>	-	
Valve manifold parts									Number of valve positions
Manifold rail		<b>VABM</b>							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		<b>L1</b>					<b>G14</b>		G1/4 thread
Size									
14 mm					<b>14</b>				
Manifold rail with port 1, 2, 3, 4, 5, 12/14, 82/84									
Port 2 and 4 with G1/8 thread									
									<b>W</b>

Ordering data – Manifold rail			
	Description	Part no.	Type
	For size B14 (G1/8)	2 valve positions	★ 566642 VABM-L1-14W-G14-2
		3 valve positions	★ 566643 VABM-L1-14W-G14-3
		4 valve positions	★ 566644 VABM-L1-14W-G14-4
		5 valve positions	566645 VABM-L1-14W-G14-5
		6 valve positions	★ 566646 VABM-L1-14W-G14-6
		7 valve positions	566647 VABM-L1-14W-G14-7
		8 valve positions	★ 566648 VABM-L1-14W-G14-8
		9 valve positions	566649 VABM-L1-14W-G14-9
		10 valve positions	★ 566650 VABM-L1-14W-G14-10
		12 valve positions	566651 VABM-L1-14W-G14-12
		14 valve positions	566652 VABM-L1-14W-G14-14
16 valve positions	566653 VABM-L1-14W-G14-16		





Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG-B14, sub-base valves G1/8

FESTO

Ordering data

Ordering data – Accessories			
	Description	Part no.	Type
Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>			
	For valve position on manifold rail, including screws and seal	★ 569989	VABB-L1-14
Separator <span style="float: right;">Technical data → Internet: vabd</span>			
	For creating pressure zones	569996	VABD-10-B
Supply plate <span style="float: right;">Technical data → Internet: vabf</span>			
	For valve position on manifold rail, including screws and seal	569993	VABF-L1-14-P3A4-G18
Seals <span style="float: right;">Technical data → Internet: vabd</span>			
	For sub-base valves G1/8	Delivery unit: 10 sets (each with 2 screws and 1 seal)	566676 VABD-L1-14B-S-G18

Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG, sub-base valves G1/4

Type codes

<b>VUVG</b>	-	<b>B</b>		<b>18</b>	-		-		<b>Z</b>		<b>→</b>
Directional control valve type											
Sub-base valve <b>B</b>											
Design											
Piston spool with sealing cartridge -											
Size											
18 mm <b>18</b>											
Valve function											
5/2-way valve, bistable <b>B52</b>											
5/2-way valve, single solenoid, <b>M52</b>											
5/3-way valve, mid-position closed <b>P53C</b>											
5/3-way valve, mid-position exhausted <b>P53E</b>											
5/3-way valve, mid-position pressurised <b>P53U</b>											
2x 3/2-way valve, normally closed <b>T32C</b>											
2x 3/2-way valve, 1x normally open, 1x normally closed <b>T32H</b>											
2x 3/2-way valve, normally open <b>T32U</b>											
Reset method											
Pneumatic spring with T32 and M52 <b>A</b>											
Mechanical spring with T32 and M52 <b>M</b>											
Pneumatic/mechanical spring with M52 <b>R</b>											
With B52 and P53 -											
Pilot air											
External <b>Z</b>											
Manual override											
Non-detenting <b>H</b>											
Covered <b>S</b>											
Non-detenting, detenting <b>T</b>											
Detenting, without accessories <b>Y</b>											

# Solenoid valves VUVG, sub-base valves G1/4

Type codes

-	<b>F</b>	-				<b>L</b>	-
Accessories for valve/connecting cable							
<b>C1...4</b>		Connection pattern H: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m					
<b>N1...4</b>		M8x1, 3-pin, straight: 1 = 2.5 m, 2 = 5 m; angled: 3 = 2.5 m, 4 = 5 m					
<b>N5...8</b>		M8x1, 4-pin, straight: 5 = 2.5 m, 6 = 5 m; angled: 7 = 2.5 m, 8 = 5 m					
<b>S1...4</b>		Connection pattern S, 1 = 0.5 m, 2 = 1 m, 3 = 2.5, 4 = 5 m					
<b>W1...4</b>		Connection pattern H, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m					
<b>WS1...4</b>		Connection pattern S with flying leads, 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m					
Advertisement							
<b>L</b>		LED					
Circuitry							
-		Without holding current reduction (HCR)					
<b>R</b>		With holding current reduction (HCR)					
Electrical connection							
<b>H2</b>		Connection pattern H, horizontal plug connector					
<b>H3</b>		Connection pattern H, vertical plug					
<b>K6...9</b>		Cables: 6 = 0.5 m, 7 = 1 m, 8 = 2.5 m, 9 = 5 m					
<b>L1...4</b>		With 2x flying lead: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m					
<b>P3</b>		Without E-box					
<b>R1</b>		Individual plug connector M8, 4-pin					
<b>R8</b>		Individual plug connector M8, 3-pin					
<b>S2</b>		Connection pattern S, horizontal plug connector					
<b>S3</b>		Connection pattern S, vertical connector					
Nominal operating voltage							
<b>1</b>		24 V DC					
<b>4</b>		5 V DC					
<b>5</b>		12 V DC					
Pneumatic connection							
<b>F</b>		In the manifold rail					






# Solenoid valves VUVG-B18, sub-base valves G1/4

Technical data

Function

2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, double solenoid  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 18 mm
-  - Flow rate  
800 ... 1080 l/min
-  - Voltage  
5, 12 and 24 V DC



General technical data, VUVG-B G1/4												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	–	–	–	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot							Double solenoid	One position	One position		
Reset method: pneumatic spring	Yes			None			Yes <sup>5)</sup>	–	None	–		
Reset method: mechanical spring	None			Yes			Yes <sup>5)</sup>	–	Yes	Yes		
Vacuum operation at port 1	None			Only with external pilot air supply								
Design	Piston spool											
Sealing principle	Soft											
Type of control	Electric											
Type of control	Pilot											
Pilot air supply	External, internal; can be selected via sub-base											
Exhaust function	With flow control option											
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting											
Type of mounting	On manifold rail											
Mounting position	Optional											
Nominal size [mm]	5.7			6.9			7.3	6.9		6.5		
Standard nominal flow rate [l/min]	900			1150						1080		
Flow rate on manifold rail	800			1000						950		
Switching time on/off [ms]	13/27			15/22			15/31	–	10/45		15/48	
Changeover time [ms]	–			–			11		29			
Size [mm]	18											
Ports	1, 3, 5			G3/8 in manifold rail								
	2, 4			G1/4 in manifold rail								
	12/14, 82/84			M5 in manifold rail								
Product weight [g]	164			154			160	154		160		
Approval certificate	c UL us - Recognized(OL)											
	c CSA us (OL)											
	RCM mark											
CE marking (see declaration of conformity) <sup>6)</sup>	To EU EMC Directive											
Corrosion resistance class CRC <sup>7)</sup>	2											

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised  
 3) E=Mid-position exhausted  
 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open  
 5) Combined reset method  
 6) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 7) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Solenoid valves VUVG-B18, sub-base valves G1/4

Technical data

Operating and environmental conditions							
Valve function			T32-A <sup>1</sup>	T32-M <sup>3</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup> P53
Operating medium		Compressed air to ISO 8573-2010 [7:4:4]					
Operating pressure	Internal	[bar]	1.5 ... 8	3.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8 -0.9 ... 10
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	3 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +50, with holding current reduction -5 ... +60				
Temperature of medium		[°C]	-5 ... +50, with holding current reduction -5 ... +60				

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data	
Electrical connection	Via electrical connection box → Page 112
Operating voltage [DC V]	5, 12 and 24 ±10%
Power [W]	1, reduced to 0.35 with holding current reduction
Duty cycle ED [%]	100
Degree of protection to EN 60529	IP40 (with plug socket), IP65 (with M8)

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

## Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

2x 3/2-way, 5/2-way and 5/3-way valve

⚙️ Note  
More dimensions  
Electrical connection boxes  
→ Page 114


1 Horizontal electrical connection      2 Manual override

Type	B1	H1	L1	L2	L3	L4	L5
VUVG-B18 -...-F...	18.3	43.1	129.4	124.4	86.4	112.2	109.7

# Solenoid valves VUVG-B18, sub-base valves G1/4


FESTO

Ordering data

Ordering data					
	Description		Part no.	Type	
Sub-base valve G1/4, without electrical connection box					
	2x 3/2-way valve				
	External pilot air supply	Normally closed, reset method: pneumatic spring	574443	VUVG-B18-T32C-AZT-F-1P3	
		Normally open, reset method: pneumatic spring	574444	VUVG-B18-T32U-AZT-F-1P3	
		1x normally open, 1x normally closed, reset method: pneumatic spring	574445	VUVG-B18-T32H-AZT-F-1P3	
		Normally closed, reset method: mechanical spring	574446	VUVG-B18-T32C-MZT-F-1P3	
		Normally open, reset method: mechanical spring	574447	VUVG-B18-T32U-MZT-F-1P3	
		1x normally open, 1x normally closed, reset method: mechanical spring	574448	VUVG-B18-T32H-MZT-F-1P3	
	5/2-way valve, single solenoid				
	External pilot air supply	Reset method: pneumatic/mechanical spring	574449	VUVG-B18-M52-RZT-F-1P3	
		Reset method: mechanical spring	574450	VUVG-B18-M52-MZT-F-1P3	
	5/2-way valve, double solenoid				
	External pilot air supply		574451	VUVG-B18-B52-ZT-F-1P3	
	5/3-way valve				
	External pilot air supply	Mid-position closed, mechanical spring reset method	574452	VUVG-B18-P53C-ZT-F-1P3	
Mid-position exhausted, mechanical spring reset method		574453	VUVG-B18-P53E-ZT-F-1P3		
Mid-position pressurized, mechanical spring reset method		574454	VUVG-B18-P53U-ZT-F-1P3		

# Solenoid valves VUVG-B18, sub-base valves G1/4

Ordering data


Ordering data		Description	Part no.	Type
Sub-base valve G1/4, with electrical connection box R8				
	2x 3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	8031537	VUVG-B18-T32C-AZT-F-1R8L
		Normally open, reset method: pneumatic spring	8031538	VUVG-B18-T32U-AZT-F-1R8L
		1x normally open, 1x normally closed, reset method: pneumatic spring	8031539	VUVG-B18-T32H-AZT-F-1R8L
		Normally closed, reset method: mechanical spring	8031540	VUVG-B18-T32C-MZT-F-1R8L
		Normally open, reset method: mechanical spring	8031541	VUVG-B18-T32U-MZT-F-1R8L
		1x normally open, 1x normally closed, reset method: mechanical spring	8031542	VUVG-B18-T32H-MZT-F-1R8L
	5/2-way valve, single solenoid			
	External pilot air supply	Reset method: pneumatic/mechanical spring	8031543	VUVG-B18-M52-RZT-F-1R8L
		Reset method: mechanical spring	8031544	VUVG-B18-M52-MZT-F-1R8L
	5/2-way valve, double solenoid			
	External pilot air supply		8031545	VUVG-B18-B52-ZT-F-1R8L
	5/3-way valve			
	External pilot air supply	Mid-position closed, mechanical spring reset method	8031546	VUVG-B18-P53C-ZT-F-1R8L
Mid-position exhausted, mechanical spring reset method		8031547	VUVG-B18-P53E-ZT-F-1R8L	
Mid-position pressurized, mechanical spring reset method		8031548	VUVG-B18-P53U-ZT-F-1R8L	

# Solenoid valves VUVG-B18, sub-base valves G1/4

Manifold assembly




Sub-base valve for manifold assembly  
Connection G1/4

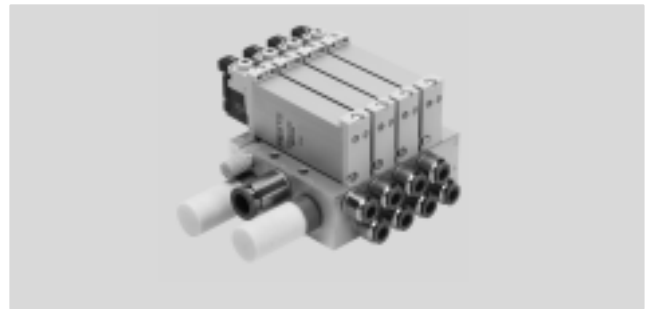

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

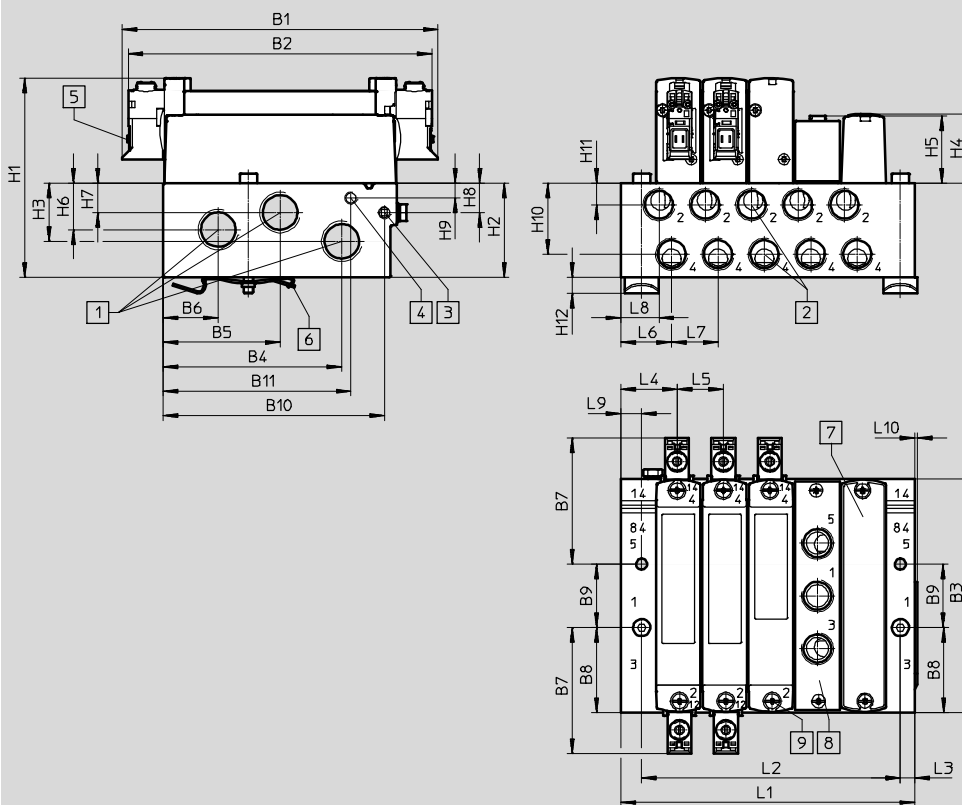

Note  
More dimensions  
Electrical connection boxes  
→ Page 114

- 1 Ports 1, 3 and 5
- 2 Ports 2, 4
- 3 Ports 12, 14
- 4 Ports 82, 84
- 5 Electrical connection for electrical sub-bases and accessories
- 6 H-rail mounting (two M4x40 screws are required for mounting)
- 7 Cover plate
- 8 Supply plate
- 9 Valves/blanking plate mounting on manifold rail

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	D1
VABM-L1-18W-G38	129.4	124.4	95.6	73.1	47.8	22.5	51.7	34.8	26	90.6	76.8	4.5


Type	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12
VABM-L1-18W-G38	81.6	38.5	11.5	28.4	27.6	19	12	12.1	6.1	29.1	8.8	6.5

Type	L3	L4	L5	L6	L7	L8	L9	L10
VABM-L1-18W-G38	6	23	19	20.8	19	15.6	8.5	1

# Solenoid valves VUVG-B18, sub-base valves G1/4

Ordering data


Valve positions	2	3	4	5	6	7	8	9	10	12	14	16
L1	63.5	82.5	101.5	120.5	139.5	158.5	177.5	196.5	215.5	253.5	291.5	329.5
L2	49	68	87	106	125	144	163	182	201	239	277	315
VABM weight [g]	232	306	380	454	528	602	676	750	824	972	1120	1268

Technical data – Manifold rails <sup>1)</sup>									
	Ports			CRC	Material <sup>3)</sup>	Operating pressure [bar]	Max. tightening torque for assembly [Nm]		
	2, 4	1, 3, 5	12/14, 82/84				Valve	H-rail	Wall
	G1/4	G3/8	M5	2 <sup>2)</sup>	Wrought aluminium alloy	-0.9 ... 10	1.18	1.5	3

- Blanking plugs are included with the manifold rail.
- Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- Note on materials: RoHS-compliant.

## Order code – Manifold rails





<b>VABM</b>	-	<b>L1</b>	-	<b>18</b>	<b>W</b>	-	<b>G38</b>	-	
Valve manifold parts									Number of valve positions
Manifold rail		<b>VABM</b>							2 to 10, 12, 14 and 16
Valve series									Ports 1, 3, 5
VUVG		<b>L1</b>					<b>G38</b>		G3/8 thread
Size									
18 mm					<b>18</b>				
Manifold rail with port 1, 2, 3, 4, 5, 12/14, 82/84									
Port 2 and 4 with G1/4 thread									
					<b>W</b>				


Ordering data – Manifold rails			
	Description	Part no.	Type
	For size B18 (G1/4)	2 valve positions	<b>574467 VABM-L1-18W-G38-2</b>
		3 valve positions	<b>574468 VABM-L1-18W-G38-3</b>
		4 valve positions	<b>574469 VABM-L1-18W-G38-4</b>
		5 valve positions	<b>574470 VABM-L1-18W-G38-5</b>
		6 valve positions	<b>574471 VABM-L1-18W-G38-6</b>
		7 valve positions	<b>574472 VABM-L1-18W-G38-7</b>
		8 valve positions	<b>574473 VABM-L1-18W-G38-8</b>
		9 valve positions	<b>574474 VABM-L1-18W-G38-9</b>
		10 valve positions	<b>574475 VABM-L1-18W-G38-10</b>
		12 valve positions	<b>574476 VABM-L1-18W-G38-12</b>
		14 valve positions	<b>574477 VABM-L1-18W-G38-14</b>
		16 valve positions	<b>574478 VABM-L1-18W-G38-16</b>

# Solenoid valves VUVG-B18, sub-base valves G1/4

FESTO

Ordering data

Ordering data – Accessories			
	Description	Part no.	Type
Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>			
	For valve position on manifold rail, including screws and seal	★ 574482	VABB-L1-18
Separator <span style="float: right;">Technical data → Internet: vabd</span>			
	For creating pressure zones	574483	VABD-14-B
Supply plate <span style="float: right;">Technical data → Internet: vabf</span>			
	For valve position on manifold rail, including screws and seal	574481	VABF-L1-18-P3A4-G14
Seals <span style="float: right;">Technical data → Internet: vabd</span>			
	For sub-base valves G1/4	Delivery unit: 10 sets (each with 2 screws and 1 seal)	574480 VABD-L1-18B-S-G14

-  - Note  
 Connect supply plate at port 1 with compressed air. Reverse operation (pressure at port 3, 5) is not permissible.

Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days


# Solenoid valves VUVG

Electrical connection boxes




General technical data							
Variants	H2	H3	S2	S3	L-	R1	R8
Mounting position	Optional						
Electrical connection	2-pin, socket				Flying lead	Individual plug connector M8, 4-pin	Individual plug connector M8, 3-pin
Degree of protection	IP40					IP65	
Signal status display	LED						
Type of mounting	Clip					Self-tapping screw	
Note on materials	RoHS-compliant						
Housing colour	Black						
Information on materials - housing	PA						
Approval certificate	RCM mark						

## Protective circuit without holding current reduction

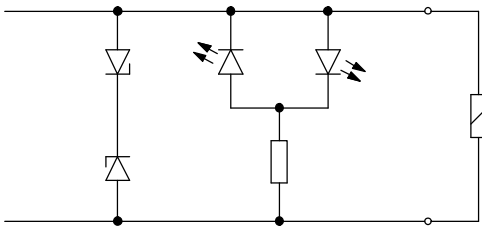

The solenoid coils (P type) of the 5, 12 and 24 V designs are equipped with a protective circuit to arrest sparks and protect against polarity reversal.

## Protective circuit with holding current reduction

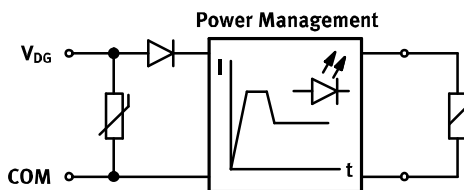

The 24 V DC design (R type) additionally features holding current reduction. This reduces the power from 1 W to 0.35 W.




## Pin allocation Electrical connection box

	Pin	Description
Rectangular plug connector, connection pattern H		
	VAVE-L1-1VH2-LP, VAVE-L1-1VH3-LP	
	1	+ or -
	2	+ or -
	VAVE-L1-1H2-LR, VAVE-L1-1H3-LR	
	1	+
	2	-
Rectangular plug connector, connection pattern S		
	VAVE-L1-1VS2-LP, VAVE-L1-1VS3-LP	
	1	+ or -
	2	+ or -
	VAVE-L1-1S2-LR, VAVE-L1-1S3-LR	
	1	-
	2	+
Flying leads, 2-pin		
	VAVE-L1-1VL1...4- LP	
	1	+ or -
	2	+ or -
	VAVE-L1-1L1...4-LR	
	1	-
	2	+



# Solenoid valves VUVG

Connecting plates

Pin allocation for electrical connection box			
	Pin	Description	
Round plug, M8, 3-pin			
	VAVE-L1-1VR8-LP		
	1	Not used	Without holding current reduction
	3	+ or -	
	4	+ or -	
	VAVE-L1-1R8-LR		With holding current reduction
	1	Not used	
3	+ or -		
4	+ or -		
Round plug connector, M8, 4-pin			
	VAVE-L1-1VR1-LP		
	1	Not used	Without holding current reduction
	2	Not used	
	3	+ or -	
	4	+ or -	
	VAVE-L1-1R1-LR		With holding current reduction
	1	Not used	
	2	Not used	
3	+ or -		
4	+ or -		
Open cable end			
	VAVE-L1-1VK...		
	BK	+ or -	Without holding current reduction
	BK	+ or -	
	VAVE-L1-1K...		With holding current reduction
	BK	+ or -	
	BK	+ or -	

# Solenoid valves VUVG


Connecting plates

FESTO

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

E-boxes, S2/H2

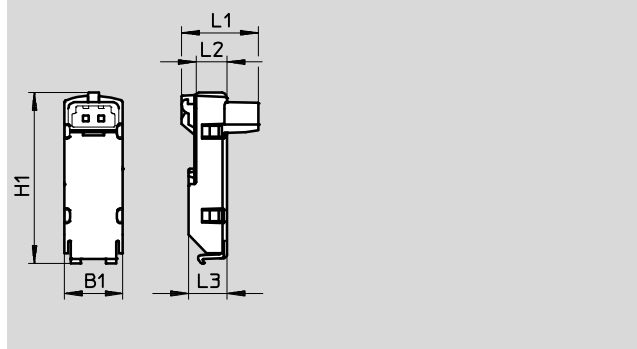

Type	B1	H1 ±0.5	L1	L2	L3
VAVE-L1-1VS2-LP	9.8	28.8	12.9	5.2	6.5
VAVE-L1-1S2-LR			10.8		
VAVE-L1-1VH2-LP					
VAVE-L1-H2-LR					

Electrical connection boxes, S3/H3

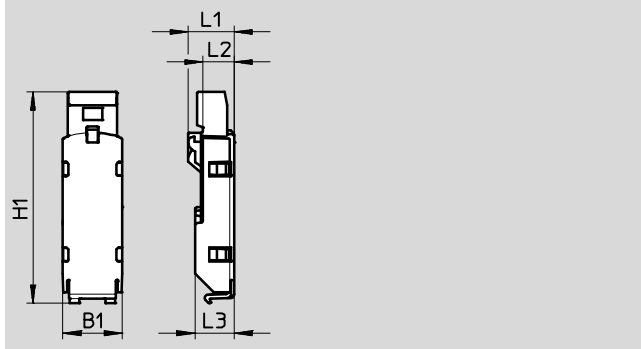


Type	B1	H1 ±0.5	L1	L2	L3
VAVE-L1-1VS3-LP	9.8	35	7.6	5.2	6.5
VAVE-L1-1S3-LR			7.5		
VAVE-L1-1VH3-LP		33.6			
VAVE-L1-1H3-LR					

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

E-boxes, VL11 ...1 4

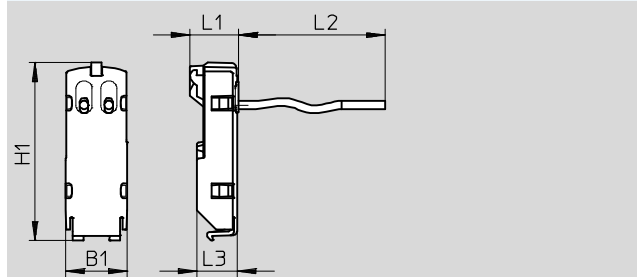

Type	B1	H1 ±0.5	L1	L2	L3
VAVE-L1-1VL1-LP	9.8	28.8	7.9	0.5	6.5
VAVE-L1-1L1-LR				1	
VAVE-L1-1VL2-LP					
VAVE-L1-1L2-LR				2.5	
VAVE-L1-1VL3-LP					
VAVE-L1-1L3-LR				5	
VAVE-L1-1VL4-LP					
VAVE-L1-1L4-LR					

E-boxes, VK6 ... 9

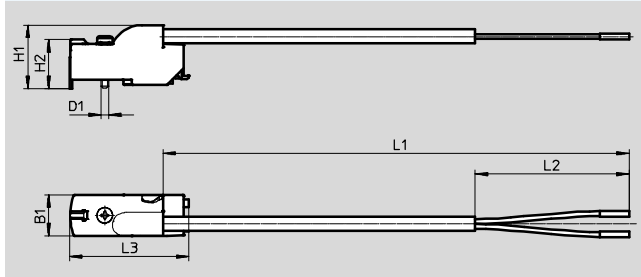

Type	B1	H1	H2 ±0.3	L1	L2 ±5	L3 ±0.5	D1 ∅
VAVE-L1-1VK6-LP	9.8	15.3	11.8	0.5	50	28.7	1.8
VAVE-L1-1VK7-LP				1.0			
VAVE-L1-1VK8-LP				2.5			
VAVE-L1-1VK9-LP				5.0			
VAVE-L1-1K6-LR				0.5			
VAVE-L1-1K7-LR				1.0			
VAVE-L1-1K8-LR				2.5			
VAVE-L1-1K9-LR				5.0			

# Solenoid valves VUVG


Connecting plates

FESTO

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

E-boxes, R8/R1

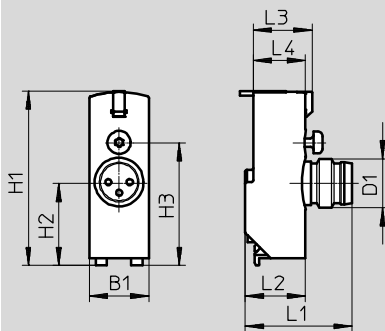

Type	B1	H1	H2	H3	L1	L2	L3	L4	D1
VAVE-L1-1VR8-LP	9.8	28.7	13.7	20.2	18.4	9.9	9.7	8.6	M8
VAVE-L1-1VR1-LP									

## Ordering data – Electrical connection boxes

Design type	Plugs	Additional functions	Ambient temperature [°C]	Code	Power	Operating voltage	Part no.	Type
					[W]	[DC V]		
	NEBV-H1 ...	Spark arresting, bipolar, IP40	-5 ... +50	H2	1	12/24	★ 566714	VAVE-L1-1VH2-LP
		Spark arresting, holding current reduction, IP40	-5 ... +60	H2R	0.35	24	★ 566716	VAVE-L1-1H2-LR
	NEBV-H1 ...	Spark arresting, bipolar, IP40	-5 ... +50	H3	1	12/24	566715	VAVE-L1-1VH3-LP
		Spark arresting, holding current reduction, IP40	-5 ... +60	H3R	0.35	24	566717	VAVE-L1-1H3-LR
	NEBV-HS ...	Spark arresting, bipolar, IP40	-5 ... +50	S2	1	12/24	566718	VAVE-L1-1VS2-LP
		Spark arresting, holding current reduction, IP40	-5 ... +60	S2R	0.35	24	566720	VAVE-L1-1S2-LR
	NEBV-HS ...	Spark arresting, bipolar, IP40	-5 ... +50	S3	1	12/24	566719	VAVE-L1-1VS3-LP
		Spark arresting, holding current reduction, IP40	-5 ... +60	S3R	0.35	24	566721	VAVE-L1-1S3-LR
	Open cable end	Spark arresting, bipolar, IP40	-5 ... +50	L1	1	12/24	566722	VAVE-L1-1VL1-LP
				L2			566723	VAVE-L1-1VL2-LP
				L3			566724	VAVE-L1-1VL3-LP
				L4			566725	VAVE-L1-1VL4-LP
		Spark arresting, holding current reduction, IP40	-5 ... +60	L1R	0.35	24	566726	VAVE-L1-1L1-LR
				L2R			566727	VAVE-L1-1L2-LR
				L3R			566728	VAVE-L1-1L3-LR
				L4R			566729	VAVE-L1-1L4-LR

Festo core product range



★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG

Electrical connection boxes

FESTO

Ordering data – Electrical connection boxes											
Design type	Plugs	Additional functions	Ambient temperature [°C]	Code	Power	Operating voltage	Cable length	Part no.	Type		
					[W]	[V DC]	[m]				
	Open cable end	Spark arresting, bipolar, IP65	-5 ... +60	K6	1	12/24	0.5	573941	VAVE-L1-1VK6-LP		
				K7			1	★ 573942	VAVE-L1-1VK7-LP		
				K8			2.5	573943	VAVE-L1-1VK8-LP		
				K9			5	573944	VAVE-L1-1VK9-LP		
		Spark arresting, bipolar, holding current reduction, IP65	-5 ... +60	K6R	0.35	24	0.5	573945	VAVE-L1-1K6-LR		
				K7R			1	573946	VAVE-L1-1K7-LR		
				K8R			2.5	573947	VAVE-L1-1K8-LR		
				K9R			5	573948	VAVE-L1-1K9-LR		
	NEBU-M8 ...	Spark arresting, bipolar, IP65	-5 ... +60	R8	1	12/24	-	★ 573919	VAVE-L1-1VR8-LP		
		Spark arresting, bipolar, holding current reduction, IP65		R8R			0.35	24	-	573920	VAVE-L1-1R8-LR
		Spark arresting, bipolar, IP65		R1			1	12/24	-	573921	VAVE-L1-1VR1-LP
		Spark arresting, bipolar, holding current reduction, IP65		R1R			0.35	24	-	573922	VAVE-L1-1R1-LR








Festo core product range

★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG

Accessories

Ordering data				
	Description	Cable length [m]	Part no.	Type
Plug socket with cable, not sheathed, open end <span style="float: right;">Technical data → Internet: nebv</span>				
	For electrical connection box code H2, H2R or H3, H3R, 2-pin socket	0.5	★ 566654	NEBV-H1G2-KN-0.5-N-LE2
		1	★ 566655	NEBV-H1G2-KN-1-N-LE2
		2.5	★ 566656	NEBV-H1G2-KN-2.5-N-LE2
		5	566657	NEBV-H1G2-KN-5-N-LE2
Plug socket with cable, sheathed, open end <span style="float: right;">Technical data → Internet: nebv</span>				
	For electrical connection box code H2, H2R or H3, H3R, 2-pin socket	0.5	★ 566658	NEBV-H1G2-P-0.5-N-LE2
		1	★ 566659	NEBV-H1G2-P-1-N-LE2
		2.5	★ 566660	NEBV-H1G2-P-2.5-N-LE2
		5	566661	NEBV-H1G2-P-5-N-LE2
Plug socket with cable, not sheathed, open end <span style="float: right;">Technical data → Internet: nebv</span>				
	For electrical connection box code S2, S2R or S3, S3R, 2-pin socket	0.5	566662	NEBV-HSG2-KN-0.5-N-LE2
		1	566663	NEBV-HSG2-KN-1-N-LE2
		2.5	566664	NEBV-HSG2-KN-2.5-N-LE2
		5	566665	NEBV-HSG2-KN-5-N-LE2
Plug socket with cable, sheathed, open end <span style="float: right;">Technical data → Internet: nebv</span>				
	For electrical connection box code S2, S2R or S3, S3R, 2-pin socket	0.5	566666	NEBV-HSG2-P-0.5-N-LE2
		1	566667	NEBV-HSG2-P-1-N-LE2
		2.5	566668	NEBV-HSG2-P-2.5-N-LE2
		5	566669	NEBV-HSG2-P-5-N-LE2
Connecting cable, open end <span style="float: right;">Technical data → Internet: nebu</span>				
	For E-box code R8 3-pin, straight socket, M8x1	2.5	★ 541333	NEBU-M8G3-K-2.5-LE3
		5	★ 541334	NEBU-M8G3-K-5-LE3
	For electrical connection box code R1 4-pin, straight socket, M8x1	2.5	541342	NEBU-M8G4-K-2.5-LE4
		5	541343	NEBU-M8G4-K-5-LE4
Connecting cable, open end <span style="float: right;">Technical data → Internet: nebu</span>				
	For E-box code R8 3-pin, angled socket, M8x1	2.5	★ 541338	NEBU-M8W3-K-2.5-LE3
		5	★ 541341	NEBU-M8W3-K-5-LE3
	For electrical connection box code R1 4-pin, angled socket, M8x1	2.5	541344	NEBU-M8W4-K-2.5-LE4
		5	541345	NEBU-M8W4-K-5-LE4
Connecting cable <span style="float: right;">Technical data → Internet: nebu</span>				
	For electrical connection box code R8, 3-pin, straight socket, M8x1	0.5	★ 541346	NEBU-M8G3-K-0.5-M8G3
		1	★ 541347	NEBU-M8G3-K-1-M8G3
		2.5	★ 541348	NEBU-M8G3-K-2.5-M8G3
		5	★ 541349	NEBU-M8G3-K-5-M8G3
		10	569844	NEBU-M8G3-K-10-M8G3
	For electrical connection box code R1 4-pin, straight socket, M8x1	2.5	554035	NEBU-M8G4-K-2.5-M8G4

Festo core product range





★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG

Accessories

FESTO

Ordering data						
Description		Part no.	Type	PU <sup>1)</sup>		
<b>Blanking plug</b> <span style="float: right;">Technical data → Internet: b</span>						
	For manifold rail and valve	M5 thread	★ 3843	B-M5	10	
		M7 thread	★ 174309	B-M7	10	
	For manifold rail	G1/8 thread	★ 3568	B-1/8	10	
		G1/4 thread	★ 3569	B-1/4	10	
		G3/8 thread	★ 3570	B-3/8	10	
	For valve	G1/8 thread	578406	NPQH-BK-G18-P10	10	
		G1/4 thread	578407	NPQH-BK-G14-P10	10	
<b>Reducing nipple</b>						
	Male thread M7	Female thread M5	161359	D-M5I-M7A-ISK	10	
<b>Fittings</b> <span style="float: right;">Technical data → Internet: qsm</span>						
	M3 thread	For tubing Ø 3 mm	Round releasing ring	133001	QSM-M3-3-I-R	10
		For tubing Ø 4 mm	Round releasing ring	133002	QSM-M3-4-I-R	10
	M5 thread	For tubing Ø 3 mm	Round releasing ring	133003	QSM-M5-3-I-R	10
			Oval releasing ring	★ 153313	QSM-M5-3-I	10
		For tubing Ø 4 mm	Round releasing ring	133004	QSM-M5-4-I-R	10
			Oval releasing ring	★ 153315	QSM-M5-4-I	10
			For tubing Ø 6 mm	Round releasing ring	133005	QSM-M5-6-I-R
			Oval releasing ring	★ 153317	QSM-M5-6-I	10
	M7 thread	For tubing Ø 4 mm	Oval releasing ring	★ 153319	QSM-M7-4-I	10
		For tubing Ø 6 mm	Round releasing ring	133007	QSM-M7-6-I-R	10
			Oval releasing ring	★ 153321	QSM-M7-6-I	10
	G1/8 thread	For tubing Ø 4 mm	Oval releasing ring	★ 186106	QS-G1/8-4-I	10
		For tubing Ø 6 mm	Oval releasing ring	★ 186107	QS-G1/8-6-I	10
		For tubing Ø 8 mm	Oval releasing ring	★ 186109	QS-G1/8-8-I	10
		For tubing Ø 10 mm	Oval releasing ring	★ 132999	QS-G1/8-10-I	10
	G1/4 thread	For tubing Ø 6 mm	Oval releasing ring	★ 186108	QS-G1/4-6-I	10
				130677	QS-1/4-6-100	100
		For tubing Ø 8 mm	Oval releasing ring	★ 186110	QS-G1/4-8-I	10
				★ 153016	QS-1/4-8-I	10
		For tubing Ø 10 mm	Oval releasing ring	★ 186112	QS-G1/4-10-I	10
				★ 153018	QS-1/4-10-I	10
	3/8 thread	For tubing Ø 8 mm	Oval releasing ring	130681	QS-3/8-8-50	50
		For tubing Ø 10 mm	Oval releasing ring	130682	QS-3/8-10-50	50
For tubing Ø 12 mm		Oval releasing ring	130683	QS-3/8-12-20	20	
For tubing Ø 16 mm		Oval releasing ring	★ 164957	QS-3/8-16	1	









1) Packaging unit.

Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days

# Solenoid valves VUVG

Accessories






Ordering data					
	Description	Part no.	Type	PE <sup>1)</sup>	
Pneumatic silencers <span style="float: right;">Technical data → Internet: amte</span>					
	For M3 thread	1231120	AMTE-M-LH-M3	20	
	For M5 thread	★ 1205858	AMTE-M-LH-M5	20	
	For M7 thread	161418	UC-M7	1	
	For For thread G1/8	High flow rate	★ 2307	U-1/8	1
		Lower flow rate	161419	UC-1/8	1
	For G1/4 thread	High flow rate	★ 2316	U-1/4	1
		Lower flow rate	165004	UC-1/4	1
	For thread G3/8	High flow rate	★ 2309	U-3/8	1
		Lower flow rate	1707427	UC-3/8	1
		Metal housing	★ 6843	U-3/8-B	1
H-rail <span style="float: right;">Technical data → Internet: nrh</span>					
	To EN 60715, 35 x 7.5 (WxH)	Length 2 m	35430	NRH-35-2000	1
H-rail mounting <span style="float: right;">Technical data → Internet: vame</span>					
	-		★ 569998	VAME-T-M4	2
Cover cap for manual override					
	Covered		540898	VMPA-HBV-B	10
	Non-detenting		540897	VMPA-HBT-B	10
	Detenting (without accessories)		8002234	VAMC-L1-CD	10
Inscription label holder <span style="float: right;">Technical data → Internet: aslr</span>					
	Holder for an inscription label and covering the mounting screw and manual override		570818	ASLR-D-L1	10

1) Packaging unit.

# Solenoid valves VUVG

Accessories

FESTO


Ordering data						
	Description		Part no.	Type	PU <sup>1)</sup>	
<b>Check valve</b>						
	For manifold rails VABM-L1-10...	For blocking the flow in the event of back pressure in duct 3 and 5	<b>8047364</b>	<b>VABF-L1-10H-H2</b>	<b>10</b>	
	For manifold rails VABM-L1-14...		<b>8047365</b>	<b>VABF-L1-14-H2</b>	<b>10</b>	
<b>Flow restrictor</b>						
	For manifold rails VABM-L1-10...	For setting the flow rate during pressurisation and exhausting (for threaded connection M5)	Nominal size: 0.5 mm	<b>8025709</b>	<b>VFFG-T-M5-5</b>	<b>10</b>
			Nominal size: 0.6 mm	<b>8025710</b>	<b>VFFG-T-M5-6</b>	<b>10</b>
			Nominal size: 0.7 mm	<b>8025711</b>	<b>VFFG-T-M5-7</b>	<b>10</b>
			Nominal size: 0.85 mm	<b>8025712</b>	<b>VFFG-T-M5-8</b>	<b>10</b>
			Nominal size: 1.05 mm	<b>8025713</b>	<b>VFFG-T-M5-10</b>	<b>10</b>
			Nominal size: 1.2 mm	<b>8025714</b>	<b>VFFG-T-M5-12</b>	<b>10</b>
			Nominal size: 1.55 mm	<b>8025715</b>	<b>VFFG-T-M5-15</b>	<b>10</b>
		For setting the flow rate for pressurisation and exhausting (for Ø 4 mm)	Nominal size: 0.5 mm	<b>8047346</b>	<b>VFFG-T-F4-5</b>	<b>10</b>
			Nominal size: 0.6 mm	<b>8047347</b>	<b>VFFG-T-F4-6</b>	<b>10</b>
			Nominal size: 0.7 mm	<b>8047348</b>	<b>VFFG-T-F4-7</b>	<b>10</b>
			Nominal size: 0.85 mm	<b>8047349</b>	<b>VFFG-T-F4-8</b>	<b>10</b>
			Nominal size: 1.05 mm	<b>8047350</b>	<b>VFFG-T-F4-10</b>	<b>10</b>
			Nominal size: 1.2 mm	<b>8047351</b>	<b>VFFG-T-F4-12</b>	<b>10</b>
	For manifold rails VABM-L1-14...	For setting the flow rate for pressurisation and exhausting (for Ø 5.8 mm)	Nominal size: 1.55 mm	<b>8047352</b>	<b>VFFG-T-F4-15</b>	<b>10</b>
			Nominal size: 0.7 mm	<b>8047353</b>	<b>VFFG-T-F6-7</b>	<b>10</b>
			Nominal size: 0.85 mm	<b>8047354</b>	<b>VFFG-T-F6-8</b>	<b>10</b>
			Nominal size: 1.05 mm	<b>8047355</b>	<b>VFFG-T-F6-10</b>	<b>10</b>
			Nominal size: 1.15 mm	<b>8047356</b>	<b>VFFG-T-F6-11</b>	<b>10</b>
			Nominal size: 1.4 mm	<b>8047357</b>	<b>VFFG-T-F6-14</b>	<b>10</b>
			Nominal size: 1.6 mm	<b>8047358</b>	<b>VFFG-T-F6-16</b>	<b>10</b>
			Nominal size: 1.8 mm	<b>8047359</b>	<b>VFFG-T-F6-18</b>	<b>10</b>
<b>Restrictor set</b>						
	For manifold rails VABM-L1-10...	Two of each size, for threaded connection M5	<b>8025716</b>	<b>VFFG-T-M5-A-V1</b>	<b>14</b>	
		Two of each size, for Ø 4 mm	<b>8062200</b>	<b>VFFG-T-F4-A-V1</b>	<b>14</b>	
	For manifold rails VABM-L1-14...	Two of each size, for Ø 5.8 mm	<b>8062201</b>	<b>VFFG-T-F6-A-V1</b>	<b>14</b>	

1) Packaging unit.



# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features

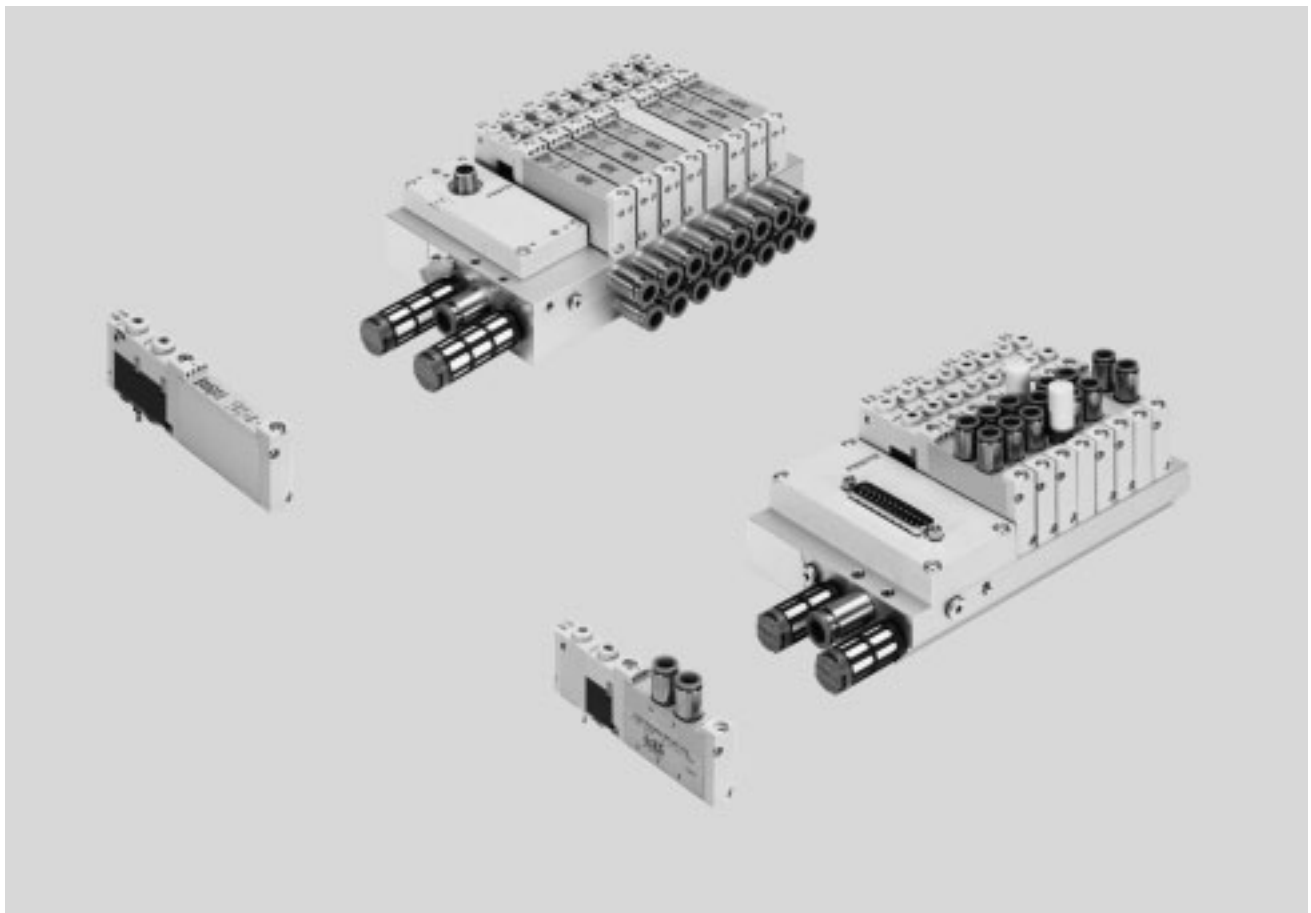

## Innovative

- Festo-specific I-Port interface for bus nodes (CTEU)
- IO-Link® mode for direct connection to a higher-order IO-Link® master
- Festo-specific I-Port interface with interlock
- Variable multi-pin plug connection using Sub-D or ribbon cable
- Reversible piston spool valves, up to 24 valve positions
- Reduced power consumption
- Excellent price/performance ratio

## Flexible

- Choice of quick plug connectors
- Multiple pressure zones possible
- Sub-D variant and fieldbus connection rated to IP67
- Internal or external pilot air with the same manifold rail possible through the use of blanking plugs
- Sub-base valves with working ports underneath for installation in control cabinets

## Reliable

- Sturdy and durable metal components
  - Valves
  - Manifold rails
- Fast troubleshooting thanks to LED display
- Manual override: choose from non-detenting, detenting or covered

## Easy to mount

- Easy mounting thanks to captive screws and seal
- Connection technology easy to change
- Inscription label holder for labelling

## Valve terminal configurator

A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product.

Valve terminals VTUG are ordered via an ident. code. All valve terminals are supplied fully assembled and individually tested.

This reduces assembly and installation time to a minimum.

Download CAD data → [www.festo.com](http://www.festo.com)


Ordering system for valve terminal VTUG  
→ Internet: vtug

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Feature


## Sub-base and semi in-line valves for valve terminal VTUG

VUVG-S...1T1, semi in-line valve




In the case of semi in-line valves, the supply ports (1, 3 and 5) are connected to the valve by means of pneumatic linking (e.g. sub-base). The working ports (2, 4) are on the valve.

Valve terminal VTUG with variable electrical connection




VUVG-B...1T1, sub-base valve




In the case of sub-base valves, the supply ports (1, 3 and 5) and the working ports (2, 4) are connected to the valve by means of pneumatic linking (e.g. sub-base).

## Overview – Valve terminal with multi-pin plug and fieldbus connection

Variable electrical connection: ribbon cable or Sub-D

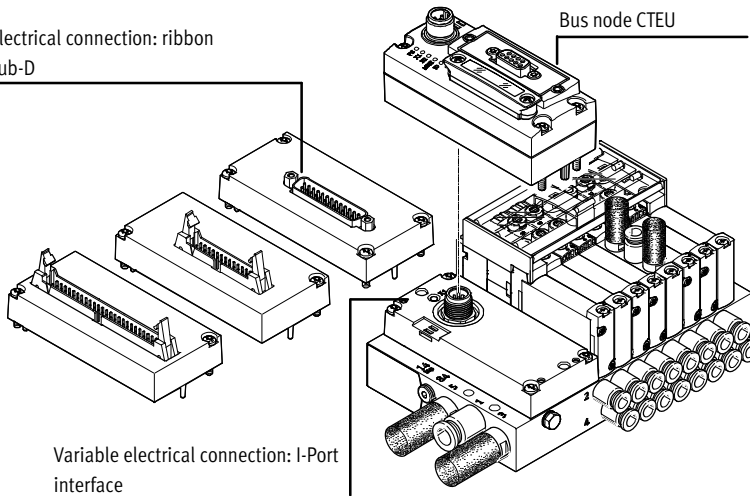

## Overview – Valve terminal with interlock

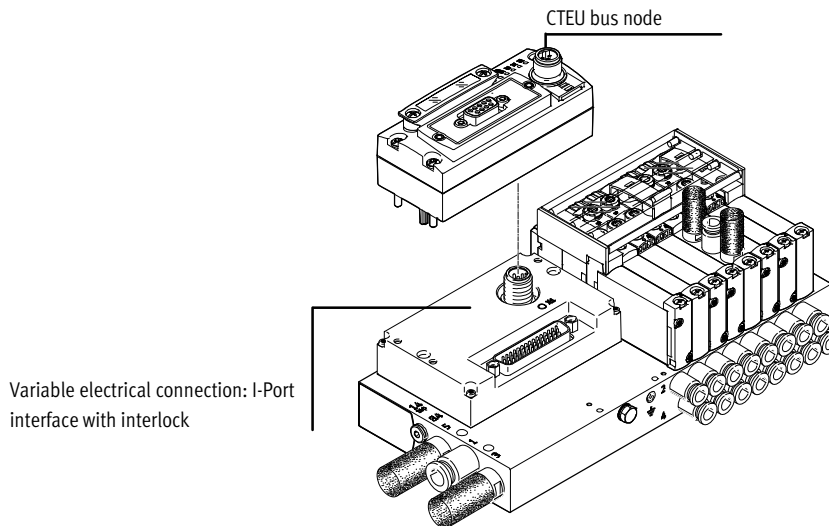

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Feature

## Equipment options

### Valve functions

- 2x 3/2-way, 3/2-way, 5/2-way, 5/3-way valves
- Reversible piston spool valves, up to 24 valve positions

### Electrical connection options

- IO-Link® mode for direct connection to a higher-order IO-Link® master
- Festo-specific I-Port interface for bus nodes (CTEU)
- Variable multi-pin plug connection using Sub-D or ribbon cable
- Festo-specific I-Port interface with interlock (for valves of size 10 mm)

## Basic valves VUVG

### Size

- 10
- 14
- 18

### Variants

- Semi in-line valve
- Sub-base valve

## Valve functions

### 3/2-way valve

- Single solenoid
- Normally open
- Normally closed

### 2x 3/2-way valve

- Single solenoid
- Normally open
- Normally closed
- 1x normally closed, 1x normally open
- Mechanical spring
- Pneumatic spring


### 5/2-way valve

- Single solenoid
- Pneumatic/mechanical spring
- Mechanical spring
- Pneumatic spring
- Double solenoid valve

### 5/3-way valve


- Mid-position pressurised
- Mid-position exhausted
- Mid-position closed

## Cover caps for manual override




- Closed cover cap, covered manual override
- Slotted cover cap, non-detenting manual override
- Cover cap for detenting actuation without tools

## Inscription label holder



Inscription label holder ASLR-D-L1 for identifying the valves and as a cover for the manual override.

## Inscription label holder




Inscription label holder ASCF-H-L1-... for identifying the valves on the valve terminal VTUG.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatics

## Manifold rail


For semi in-line valves



The semi in-line valves are supplied with external pilot air. The pilot air is set via the manifold rail. The scope of delivery of the manifold rail includes a short and a long blanking plug for setting the pilot air.

- For semi in-line valves M5, M7 (size 10 mm), G1/8 (size 14 mm) and G1/4 (size 18 mm)
- For 2x 3/2-way, 5/2-way and 5/3-way valves
- 4 to 24 valve positions with electrical interlinking


## For sub-base valves



The sub-base valves are supplied with external pilot air. The pilot air is set via the manifold rail. The scope of delivery of the manifold rail includes a short and a long blanking plug for setting the pilot air.

- For sub-base valves M5/M7 (size 10 mm), G1/8 (size 14 mm) and G1/4 (size 18 mm)
- For 2x 3/2-way, 3/2-way, 5/2-way and 5/3-way valves
- 4 to 24 valve positions with electrical interlinking

## Long version




Versions:

- I-Port interface with lateral outlet direction: for semi in-line valves and sub-base valves M5/M7 (size 10 mm), G1/8 (size 14 mm) and G1/4 (size 18 mm)


- Interlock: For sub-base and semi in-line valves M5/M7 (size 10 mm)

## For control cabinet installation, outlet direction underneath (U)




For sub-base valves M7 (size 10 mm), G1/8 (size 14 mm) and G1/4 (size 18 mm).

## For control cabinet installation, outlet direction front (FD)




For sub-base valves M7 (size 10 mm) and G1/8 (size 14 mm).

## For control cabinet installation with shut-off function (hot swap)



Shut-off function for duct 1, for sub-base valves M7 (size 10 mm) and G1/8 (size 14 mm).



Shut-off function for duct 2 and 4, for sub-base valves M7 (size 10 mm) and G1/8 (size 14 mm).

-  - Note


Pressurisation and exhaust at both ends is recommended for an optimised flow rate in cases where multiple valves switch simultaneously.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Feature

## Electrical connection

### Multi-pin plug connection




The signals are transmitted from the controller to the valve terminal via a pre-assembled or self-assembled multi-wire cable to the multi-pin plug connection,

This substantially reduces installation time compared to individually connected valves. The valve terminal can be equipped with max. 48 solenoid coils.

Versions:

- Sub-D connection
- Ribbon cable

### I-Port interface




Festo-specific interface as a basis for bus nodes (CTEU) or in IO-Link mode for direct connection to a higher-level IO-Link master.

Communication and power supply take place via a common M12 interface.

Connection options:

- As I-Port interface for bus nodes (CTEU)
- In IO-Link mode for direct connection to an IO-Link master

### I-Port interface with interlock



The interlock function enables the first 16 solenoid coils to be individually supplied externally.

The external supply guarantees safety-related release of these valves.




Note

The VTUG variant with multi-pin plug and fieldbus connection offers the additional option of individual elec-

trical actuation of the valves (see → page 143).

## Supply plate




For additional air supply and exhaust via a valve position



Note

The supply plate VABF-L1-14-P3A4-G18-T1 can only be used with G fittings. R fittings are not permissible.

## Blanking plate for unused valve position



Vacant position cover

## Separator for pressure zones



For creating multiple pressure zones in a valve terminal

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatics



## Creating pressure zones and separating exhaust air

Compressed air is supplied and exhausted via the manifold rail and via supply plates.

The position of the supply plates and duct separations can be freely selected with the VTUG.

A pressure zone is created by separating the internal supply ducts using a separator.

Pressure zone separation can be used for the following ducts:


- Duct 1
- Duct 3
- Duct 5

Note

- Use a separator if the exhaust air pressures are high
- Use at least one supply plate/supply for each pressure zone
- Pressure zone separation is not possible in duct 12/14 (pilot air supply)

Duct separation	Description
	<p>The pressure zones can be freely configured with the VTUG. The following duct separations are possible:</p> <p>Duct 1 closed</p>
	<p>Duct 1, 3, 5 closed</p>
	<p>Duct 3, 5 closed</p>
	<p>The number of pressure zones with the VTUG is limited by the number of valve positions on the manifold rail. Note that each supply plate occupies one valve position.</p>

## Separator VABD



1 Separator VABD

Note


With the VTUG, several pressure zones can be created by fitting separators (VABD). The separators are inserted in the manifold rail using a slotted screwdriver.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatics

## Shut-off function (hot swap)

for duct 1

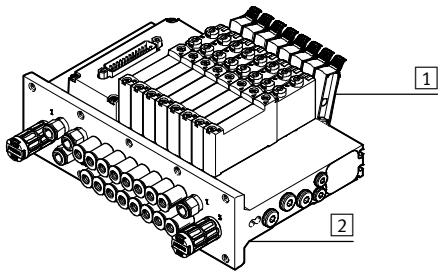


- 1 Actuating lever
- 2 Manifold rail with shut-off plate

The shut-off plate is located below the manifold block. By actuating the lever:

- Disconnection of the valve from the compressed air supply (duct 1)
- Venting of the pilot air supply on the valve side (duct 12 and 14)

Each actuating lever can be fixed and secured against unwanted actuation.

for duct 2 and 4

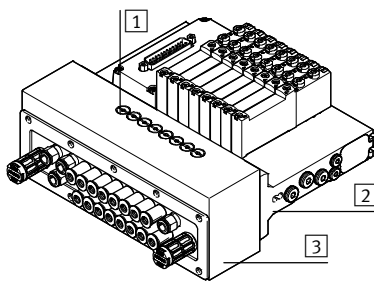

- 1 Stem
- 2 Manifold rail
- 3 Manifold block

Press in the stem with a pointed object or screwdriver and then turn the stem clockwise by 90° until the stop is reached:

- Connection from the valve to the ports 2 and 4 is blocked
- No exhaust of connected components on ports 2 and 4

## Pilot air supply

Internal pilot air supply

Internal pilot air supply can be chosen with an operating pressure in the range 1.5 ... 8 bar, 2.5 ... 8 bar or 3 ... 8 bar (depending on the valve used).

The pilot air supply is branched from duct 1 (compressed air supply) using an internal connection.

External pilot air supply


External pilot air supply is required for vacuum operation and operating pressures above 8 bar.

The port for external pilot air supply (port 12/14) is located on the manifold rail.

Pilot exhaust air

The pilot air is exhausted via duct 82/84 of the manifold rail.

Pilot air supply

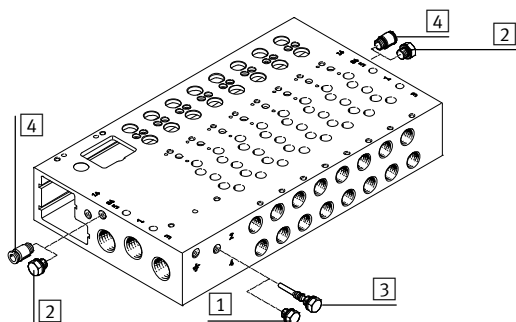

- 1 Blanking plug, short, with internal pilot air
- 2 Blanking plug for duct 12/14 with internal pilot air
- 3 Blanking plug, long, with external pilot air
- 4 Push-in fitting in duct 12/14 with external pilot air

The manifold rails have an internal conduit between duct 12/14 and duct 1.



Internal or external pilot air supply is selected by inserting a blanking plug into this conduit.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatics

FESTO

## Exhaust functions

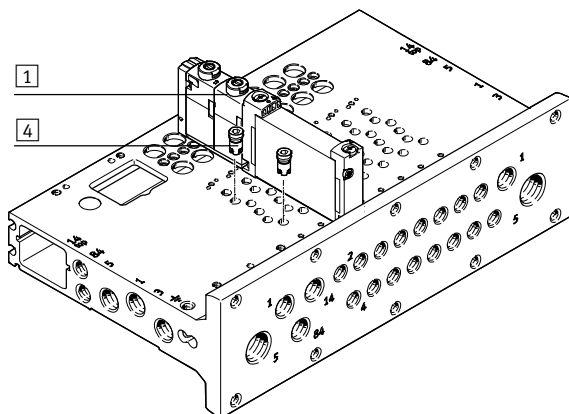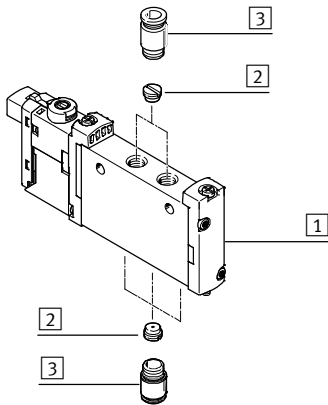

- 1 Valves VUUG
- 2 Flow restrictor for thread M5
- 3 Fitting
- 4 Fixed flow restrictor, self-tapping/check valve

### Flow restrictor for thread M5

Semi in-line valve, individual electrical connection: flow control valve can be fitted in port 1, 3, 5 and/or in port 2, 4.

Sub-base valve, individual electrical connection: flow control valve can be fitted in port 2, 4.

### Fixed flow restrictor, self-tapping

The fixed restrictor can be used to permanently set the exhaust flow rate in ducts 3 and 5.

The fixed restrictors are screwed into ducts 3 and 5 in the manifold rail.

Please see the relevant assembly instructions:

→ [www.festo.com/sp](http://www.festo.com/sp)

### Check valve

Check valves block the flow towards the valves if back pressure develops in ducts 3 and 5 in the case of a high exhaust capacity and thus prevents actuators from switching unexpectedly.

The check valves are screwed into ducts 3 and 5 in the manifold rail. Please see the relevant assembly instructions:

→ [www.festo.com/sp](http://www.festo.com/sp)

Note

- It is not possible to use a check valve and a fixed restrictor (in the same duct) at the same time.
- When screwing in again, use the threads already present.



# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Pneumatics

## Operation with different pressures

### Vacuum operation

#### Points to note with 3/2-way valves with pneumatic spring return:


The 3/2-way valves are available in a design with two valves in one valve body and with pneumatic spring return. With these valves, the force for the return movement is supplied through port 1.

Vacuum operation is only possible at port 3 and 5, not at port 1.


With external pilot air supply, vacuum can be connected at port 1, 3, 5 of the 5/2-way and 5/3-way valves.

### Reverse operation

The 3/2-way valves with pneumatic spring are not suitable for reverse operation, since at least the minimum pilot pressure must be present in duct 1.

 Note  
Pressure must be present at port 1.


## Pressure deflector (internal pilot air)

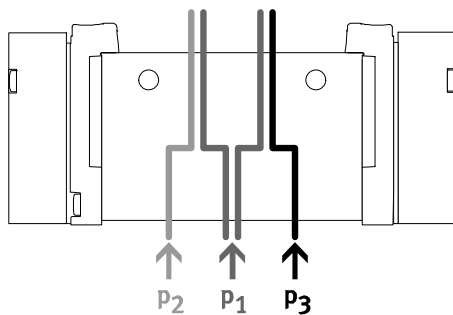

- Two different pressures are required.
- Different pressures can be connected at duct 1, 3 and 5.


### Benefits

Any pressure or vacuum can be connected at duct 3 and 5 both with external and internal pilot air

 Note

- With internal pilot air, adhere to the minimum pilot pressure in duct 1
- With 2x 3/2-way valves without spring return, adhere to minimum pilot pressure in duct 1

## Vacuum, ejector pulse and normal position

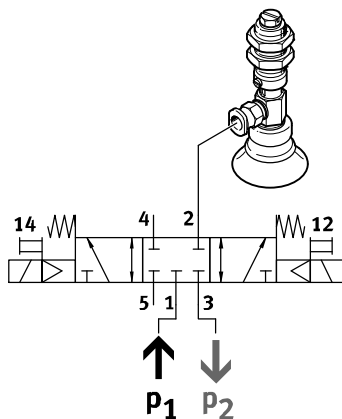


Vacuum, ejector pulse and normal position with internal pilot air can be achieved by connecting vacuum at duct 3 and pressure for the ejector pulse at duct 1.

# Valve terminals VTUG with multi-pin plug and fieldbus connection


Key features – Pneumatic components

## Standard nominal flow rate $q_{nN}$ as a function of the number of switched valves $n$


Size 10 mm, 5/2-way valves

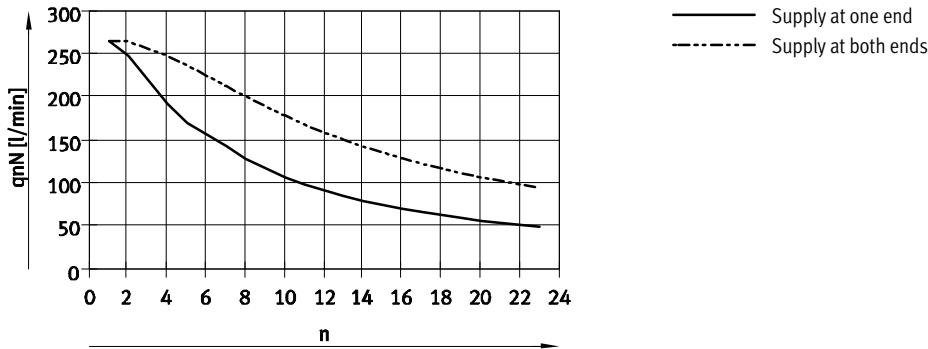

Size 14 mm

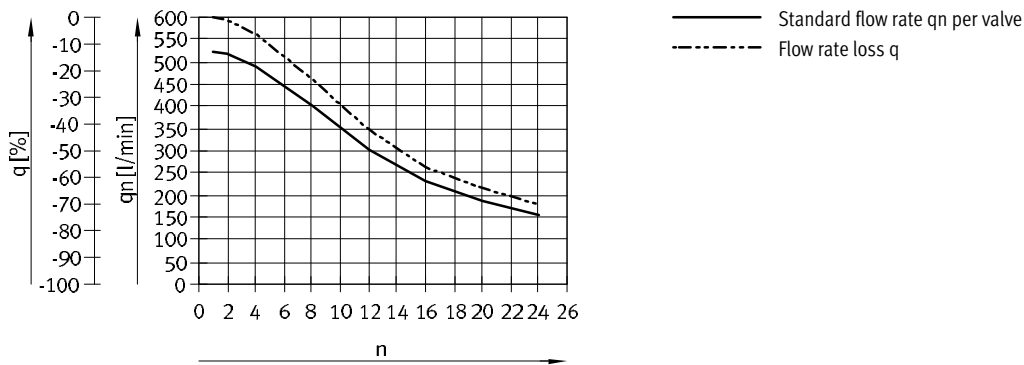

Size 18 mm

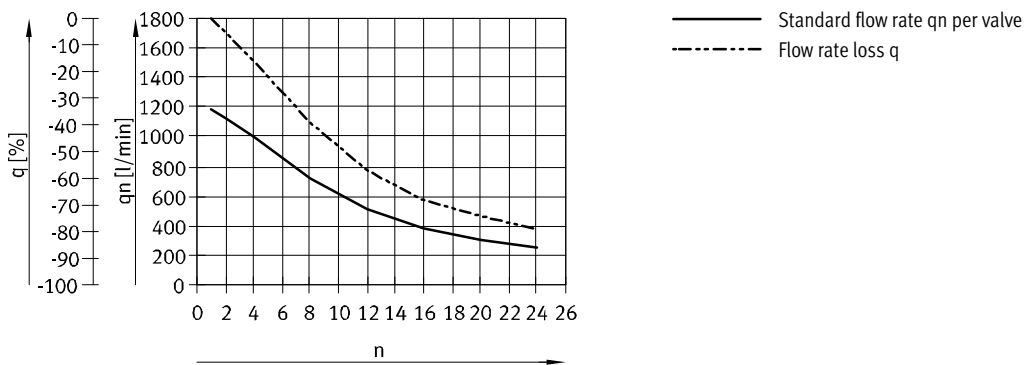


# Valve terminals VTUG with multi-pin plug and fieldbus connection


Key features – Pneumatic components

## Pilot pressure p2 as a function of operating pressure p1


2x 3/2-way valve, reset method: mechanical spring

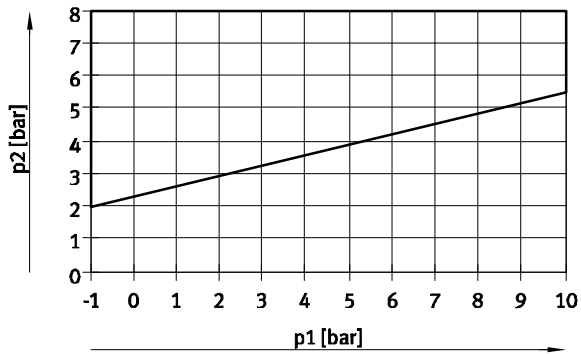

2x 3/2-way valve, reset method: pneumatic spring

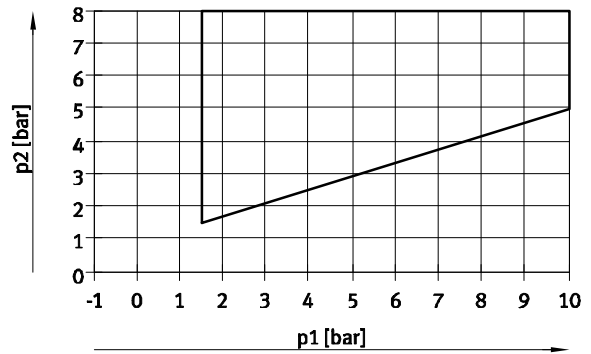

3/2-way single solenoid valve and 5/2-way single solenoid valve

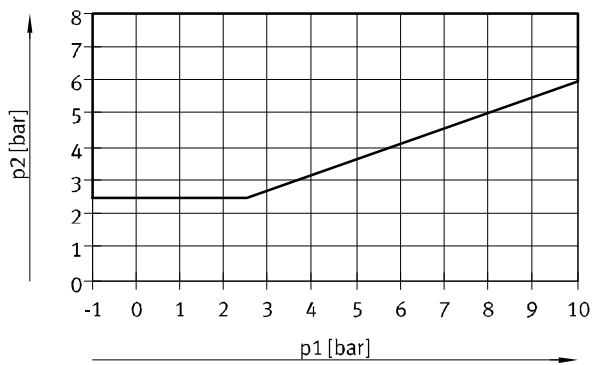

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Assembly

## Valve terminal assembly


Sturdy terminal assembly thanks to:

- Four through-holes for wall mounting
- H-rail mounting

 Note

Use the M5 thread provided on the manifold block for earthing the valve terminal.


## Wall mounting

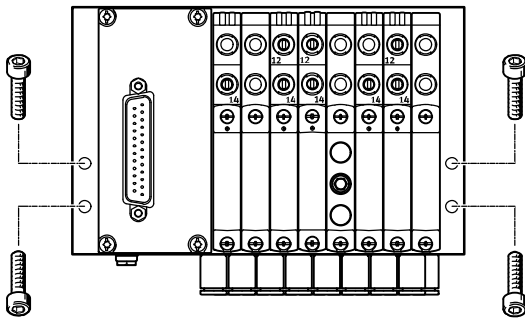

Screw the valve terminal VTUG onto the mounting surface using four M4 screws.

The mounting holes are on the left and right side of the manifold rail.

## H-rail mounting

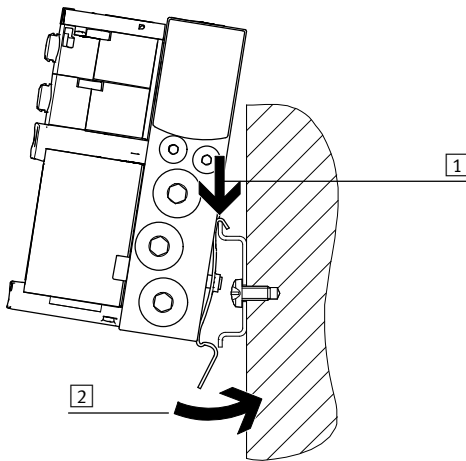

Attach the valve terminal VTUG to the H-rail (see arrow **1**).

Swivel the valve terminal onto the H-rail and secure in place with the clamping component (see arrow **2**).

Attach the manifold rails to an H-rail to EN 60715-TH35 using the H-rail mounting kit VAME-T-M4.

Use the following screws (to DIN 912) for mounting:

- Size 10: M4x30
- Size 14: M4x40
- Size 18: M5x50

 Note

Permissible use of the H-rail:

- Manifold rail with outlet on the side or on top.
- H-rail exclusively for horizontal mounting.
- Vibration/shock loads are not permissible for this type of mounting.

Size 14:


- Use H-rail TH35-7.5 for valve terminals with a maximum of 8 valve positions.
- Use H-rail TH35-15 for mounting in accordance with the standard and for more than 8 valve positions.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Assembly


## Manual override (MO)

### MO with automatic return (non-detenting)




- 1 Press in the stem of the MO with a pointed object or screwdriver. Pilot valve switches and actuates the main valve.
- 2 Remove the pointed object or screwdriver. The spring force pushes the stem of the MO back. The pilot valve returns to its initial position as does the single solenoid main valve (not the case with double solenoid valve code J).

### MO with detent (locking)




- 1 Press in the stem of the MO with a pointed object or screwdriver until the valve switches and then turn the stem clockwise by 90° until the stop is reached. Valve remains switched.
- 2 Turn the stem anti-clockwise by 90° until the stop is reached and then remove the pointed object or screwdriver. The spring force pushes the stem of the MO back. The valve returns to its initial position (not the case with double solenoid valve code J).

### MO non-detenting – with coded cover cap




MO is actuated by pushing it with a pointed object or screwdriver and reset by spring force (detenting position prevented by coded cover cap).

### MO detenting without tools – assembly



Clip MO with lock onto the pilot valve. The MO cap can then be operated (detenting) without tools.


### MO detenting without tools – actuation



When sliding the cap for the MO in the direction of the arrow:

- The cap locks into the end position.
- The pilot valve switches and actuates the main valve.

### MO detenting without tools – actuation



When sliding the cap for the MO in the direction of the arrow:


- The cap locks into the end position.
- The spring force pushes the stem of the MO back.
- The pilot valve returns to its initial position as does the single solenoid main valve (not the case with double solenoid valve code J).

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Key features – Assembly

## Inscription system

Inscription label holder

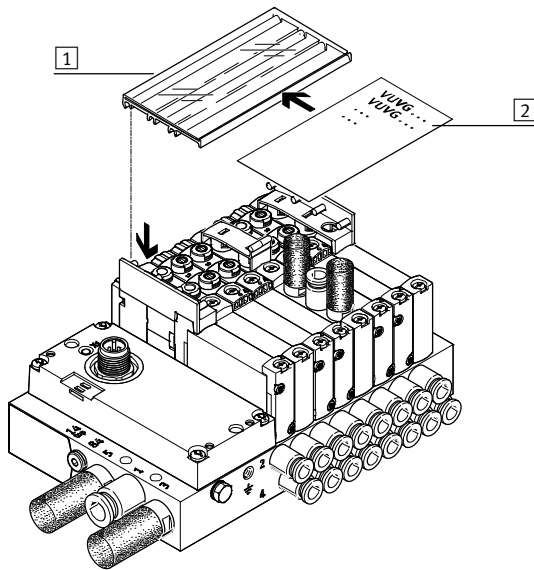


- 1 Inscription label holder  
ASCF-H-L1 (code TT)
- 2 Inscription label

Mount the inscription label holder to label the valves. Open the inscription label holder to insert the inscription label and actuate the manual override. The inscription label holders are available in different sizes depending on the number of valve positions.

-  - Note

Do not engage the manual override before mounting the inscription label holder. When mounted, the retainer for the inscription label holder covers the manual override of the valve beneath it. The only way of actuating the manual override is in a non-detenting mode.

## Inscription label holder

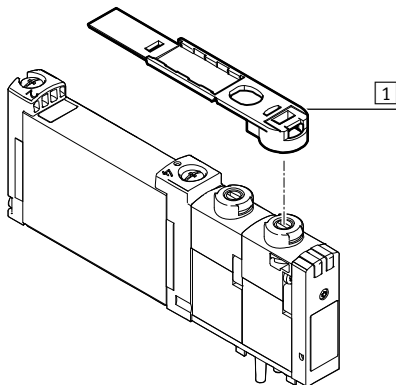

- 1 Inscription label holder  
ASLR-D-L1 (code TV)











Use inscription label holder ASLR-D-L1 (code TV) to label individual valves. The inscription label holder is placed directly on the manual override.

-  - Note

Do not engage the manual override before mounting the inscription label holder. After the retainers are in place, the only way of actuating the manual override is in a non-detenting mode.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Overview of valve functions

Valve	Valve code	Description	Valve terminal/ position function order code	Size		
				M5/M7	G1/8	G1/4
<b>3/2-way valve, pneumatic/mechanical spring</b>						
	M32C-R	Normally closed	VX	■	-	-
	M32U-R	Normally open	VW	■	-	-
<b>3/2-way valve, pneumatic spring</b>						
	M32C-A	Normally closed	VX	-	■	-
	M32U-A	Normally open	VW	-	■	-
<b>2x 3/2-way valve, pneumatic spring</b>						
	T32C-A	Normally closed	K	■	■	■
	T32U-A	Normally open	N	■	■	■
	T32H-A	1x normally open, 1x normally closed	H	■	■	■
<b>2x 3/2-way valve, mechanical spring</b>						
	T32C-M	Normally closed	VK	■	■	■
	T32U-M	Normally open	VN	■	■	■
	T32H-M	1x normally open, 1x normally closed	VH	■	■	■

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Overview of valve functions


Valve	Valve code	Description	Valve terminal/ position function order code	Size		
				M5/M7	G1/8	G1/4
<b>5/2-way double solenoid valve</b>						
	B52	External pilot air supply	J	■	■	■
<b>5/2-way valve, single solenoid</b>						
	M52-A	Pneumatic spring	M	-	■	-
	M52-M	Mechanical spring	A	■	■	■
	M52-R	Pneumatic/mechanical spring	P	■	-	■
<b>5/3-way valve</b>						
	P53C	Mid-position closed	G	■	■	■
	P53U	Mid-position pressurised	B	■	■	■
	P53E	Mid-position exhausted	E	■	■	■



# Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview example – Semi in-line valves

## Valve terminal overview - Multi-pin plug and I-Port interface

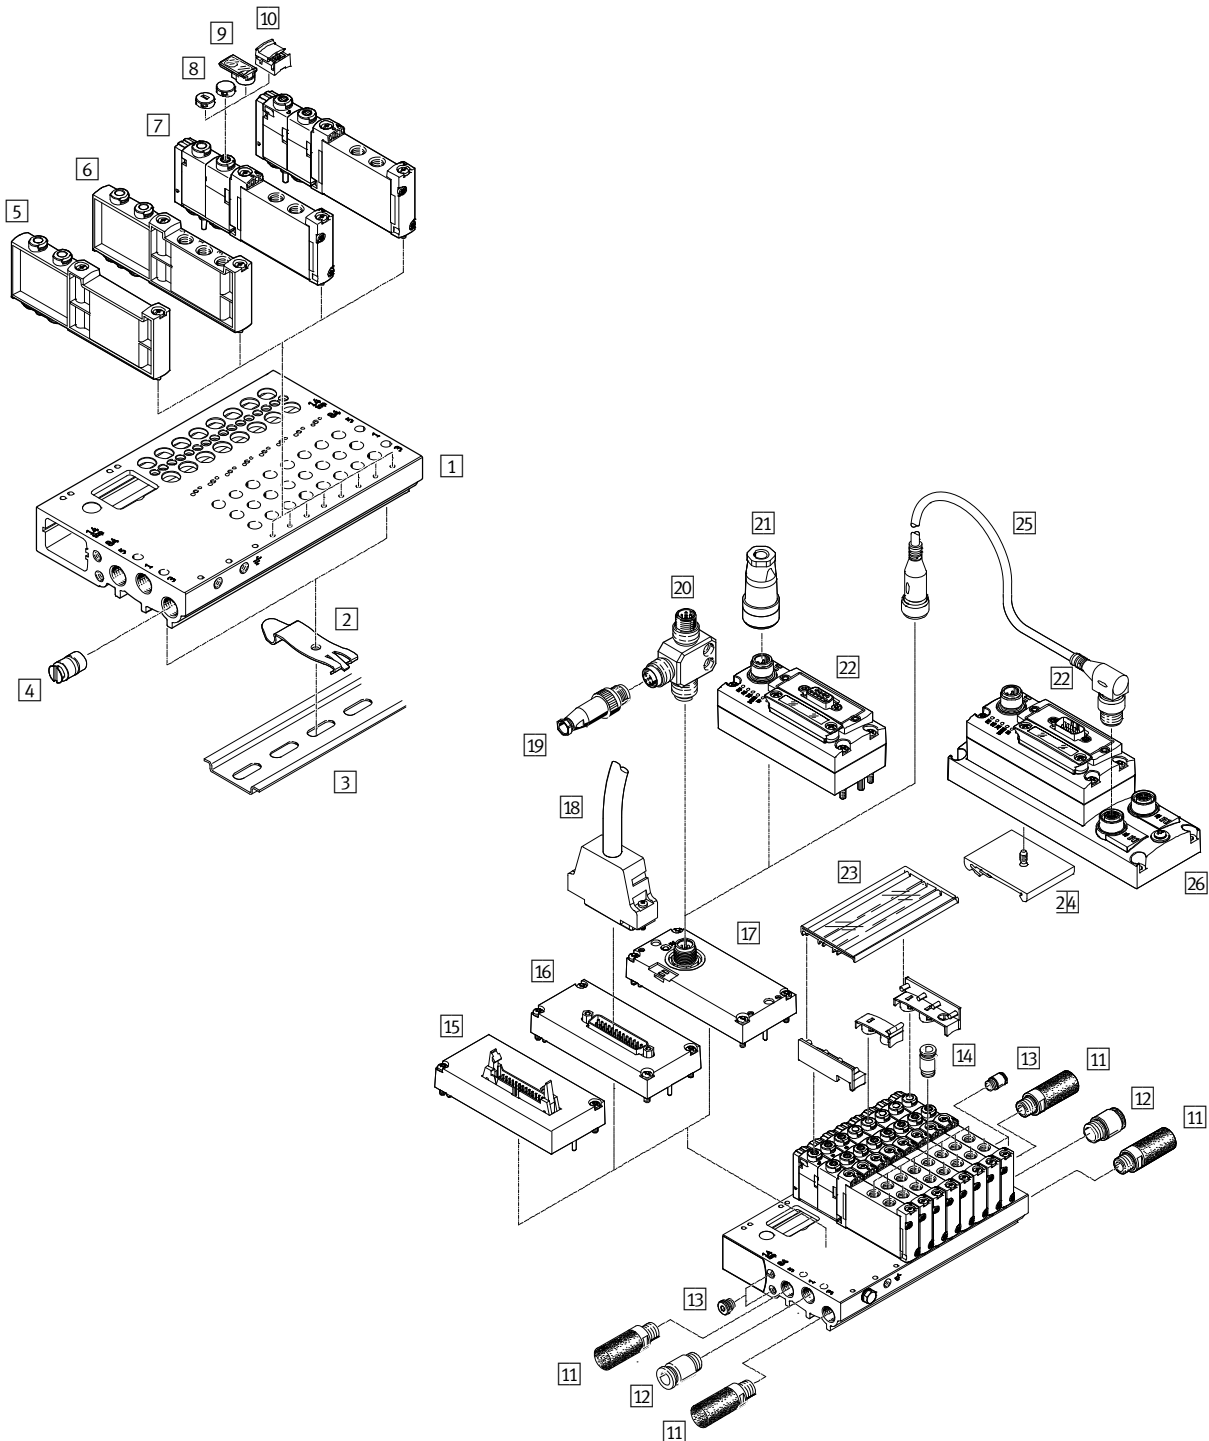

## Valve terminals VTUG with multi-pin plug and fieldbus connection


Peripherals overview example – Semi in-line valves

Accessories				
	Type	Description	→ Page/Internet	
1	Manifold rail	VABM-L1-...	For 4 to 10, 12, 16, 20 and 24 valve positions	171
2	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve terminal on an H-rail	215
3	H-rail	NRH-35-2000	For mounting the valve terminal	215
4	Separator	VABD-...	For creating pressure zones	213
5	Cover plate	VABB-L1-...	For covering an unused valve position	213
6	Supply plate	VABF-L1-...	For air supply at port 1 and ports 3 and 5	213
7	Solenoid valve	VUVG-...	Semi in-line valve	145, 150, 154
8	Cover cap	VMPPA-HB...-B	For manual override	213
9	Inscription label holder	ASLR-D-L1	For inscription label and covering the mounting screw/manual override	215
10	Cover	VAMC-...	For manual override	213
11	Silencer	U-...	For ports 3 and 5	213
12	Push-in fitting	QS-...	For air supply, port 1	212
13	Blanking plug	B-...	For internal/external pilot air	213
14	Push-in fitting	QS-...	For ports 2 and 4	212
15	Electrical interfaces	VAEM-L1-S-M3-...	Ribbon cable	202
16	Electrical interfaces	VAEM-L1-S-M1-...	Sub-D	202
17	Electrical interfaces	VAEM-L1-S-...-PT	I-Port interface/IO-Link	205
18	Connecting cable	NEBV-...	Sub-D cable	202
19	Plugs	SEA-M12-5GS-PG7	Straight, for T-adaptor FB-TA	205
20	T adapter	FB-TA-M12-5POL	For IO-Link and load voltage supply	205
21	Power supply socket	NTSD-.../FBSD-...	Power supply for CTEU bus nodes	211
22	CTEU	CTEU-...	Bus nodes	211
23	Inscription label holder	ASCF-H-L1	For identifying valves	215
24	H-rail mounting	CAF-M-F1-H	For electrical connection box CAPC	207
25	Connecting cable	NEBU-...	-	nebu
26	Connecting plate	CAPC-F1-E-M12	For connecting a second device with I-Port interface	207

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview example – Sub-base valves

## Valve terminal overview – Multi-pin plug and I-Port interface

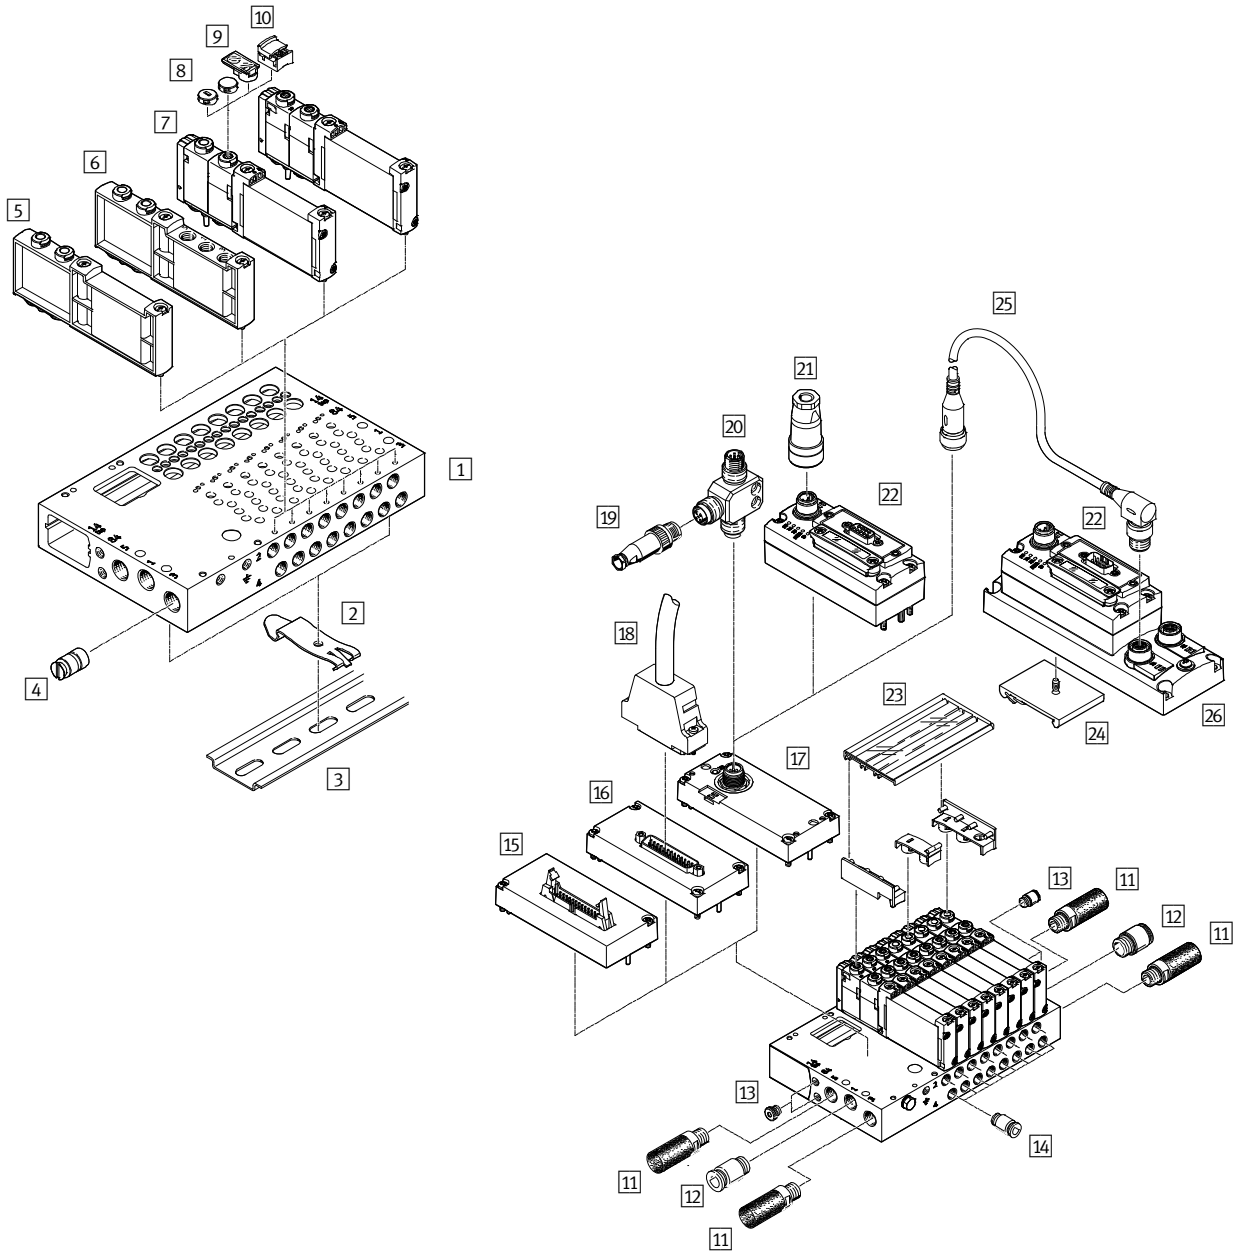

# Valve terminals VTUG with multi-pin plug and fieldbus connection


Peripherals overview example – Sub-base valves

Accessories				
	Type	Description	→ Page/Internet	
1	Manifold rail	VABM-L1-...	For 4 to 10, 12, 16, 20 and 24 valve positions	171
2	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve terminal on an H-rail	215
3	H-rail	NRH-35-2000	For mounting the valve terminal	215
4	Separator	VABD-...	For creating pressure zones	213
5	Cover plate	VABB-L1-...	For covering an unused valve position	213
6	Supply plate	VABF-L1-...	For air supply at port 1 and ports 3 and 5	213
7	Solenoid valve	VUVG- ...	Sub-base valve	158, 163, 168
8	Cover cap	VMPPA-HB...-B	For manual override	213
9	Inscription label holder	ASLR-D-L1	For inscription label and covering the mounting screw/manual override	215
10	Cover	VAMC...	For manual override	213
11	Silencer	U...	For ports 3 and 5	213
12	Push-in fitting	QS...	For air supply, port 1	212
13	Blanking plug	B-...	For internal/external pilot air	213
14	Push-in fitting	QS...	For ports 2 and 4	213
15	Electrical interfaces	VAEM-L1-S-M3-...	Ribbon cable	202
16	Electrical interfaces	VAEM-L1-S-M1-...	Sub-D	202
17	Electrical interfaces	VAEM-L1-S-...-PT	I-Port interface/IO-Link	205
18	Connecting cable	NEBV-...	Sub-D cable	202
19	Plugs	SEA-M12-5GS-PG7	Straight, for T-adaptor FB-TA	205
20	T adapter	FB-TA-M12-5POL	For IO-Link and load voltage supply	205
21	Power supply socket	FBSD-.../NTSD-...	Power supply for CTEU bus nodes	211
22	CTEU	CTEU-...	Bus nodes	211
23	Inscription label holder	ASCF-H-L1	For identifying valves	215
24	H-rail mounting	CAFM-F1-H	For electrical connection box CAPC	207
25	Connecting cable	NEBU-...	-	nebu
26	Connecting plate	CAPC-F1-E-M12	For connecting a second device with I-Port interface	207

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview example – Sub-base valves

## Valve terminal overview – I-Port interface with interlock

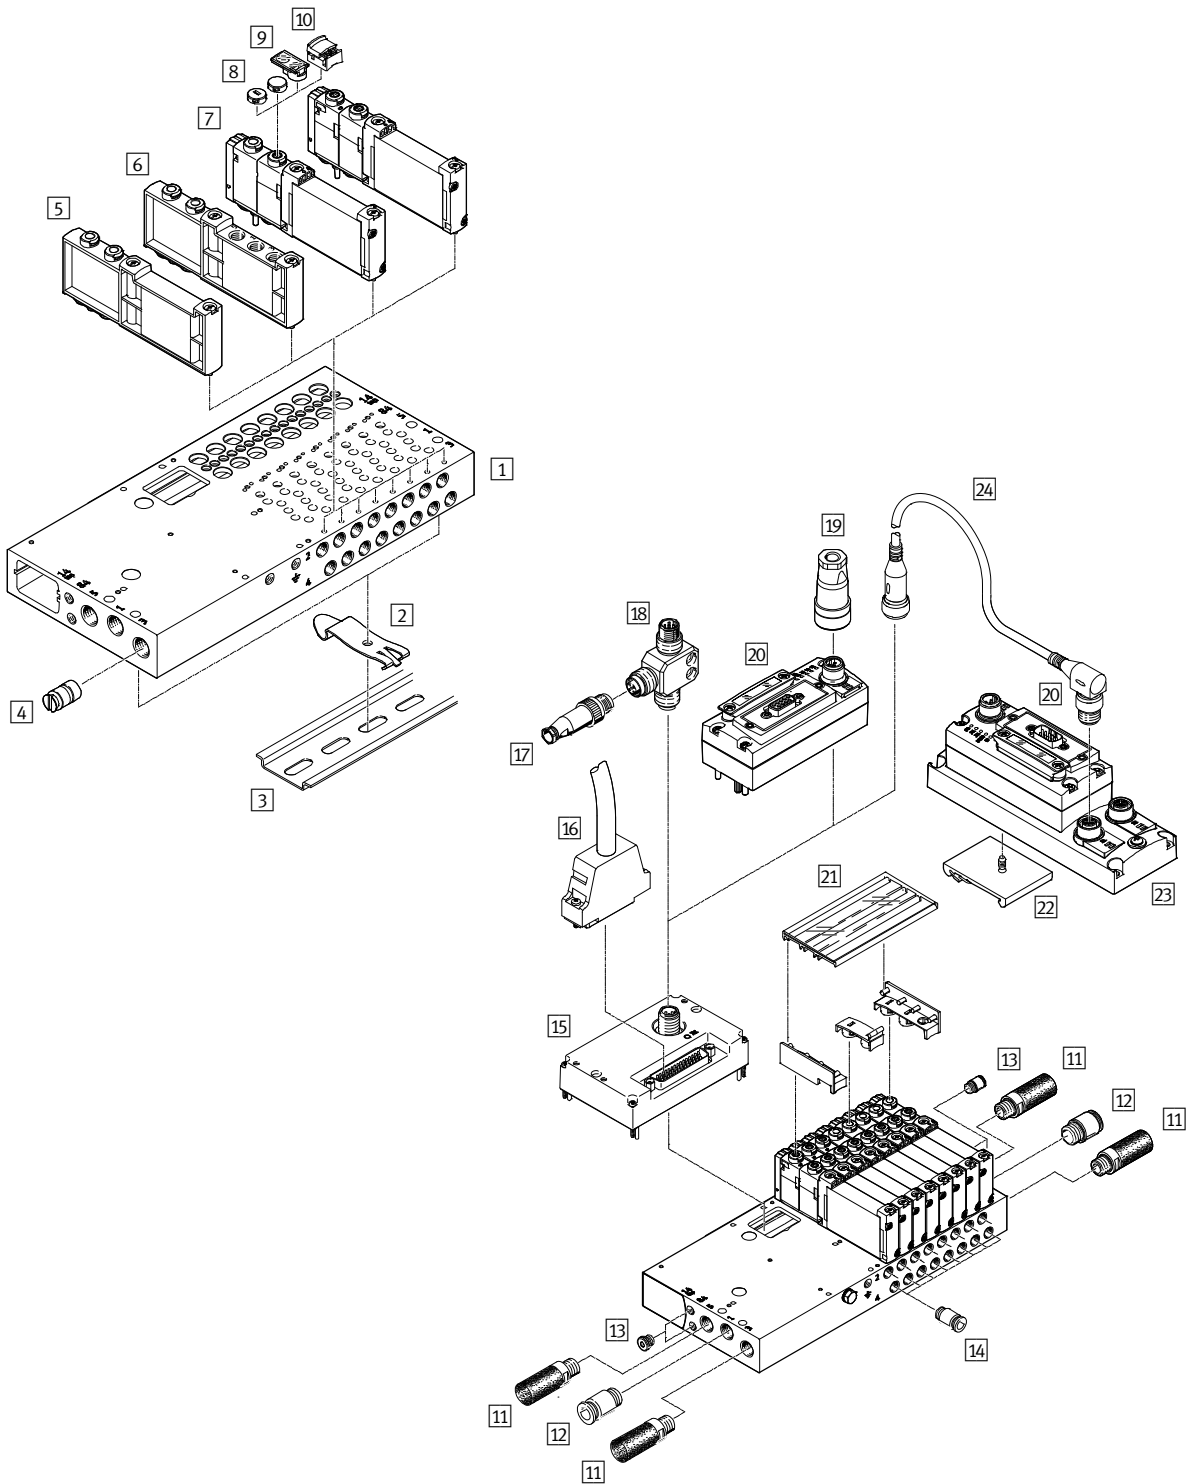

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview example – Sub-base valves

Accessories				
	Type	Description	→ Page/Internet	
1	Manifold rail	VABM-L1-...	For 4 to 10, 12, 16, 20 and 24 valve positions	171
2	H-rail mounting	VAME-T-M4	2 pieces for fitting the valve terminal on an H-rail	215
3	H-rail	NRH-35-2000	For mounting the valve terminal	215
4	Separator	VABD-...	For creating pressure zones	213
5	Cover plate	VABB-L1-...	For covering an unused valve position	213
6	Supply plate	VABF-L1-...	For air supply at port 1 and ports 3 and 5	213
7	Solenoid valve	VUVG-...	–	158, 163, 168
8	Cover cap	VMPPA-HB...-B	For manual override	213
9	Inscription label holder	ASLR-D-L1	For inscription label and covering the mounting screw/manual override	215
10	Cover	VAMC-...	For manual override	213
11	Silencer	U-...	For ports 3 and 5	213
12	Push-in fitting	QS-...	For air supply, port 1	213
13	Blanking plug	B-...	For internal/external pilot air	213
14	Push-in fitting	QS-...	For ports 2 and 4	212
15	Electrical interfaces	VAEM-L1-S-24-...	I-Port interface with interlock	208
16	Connecting cable	NEBV-...	Sub-D cable	202
17	Plugs	SEA-M12-5GS-PG7	Straight, for T-adapter FB-TA	205
18	T adapter	FB-TA-M12-5POL	For IO-Link and load voltage supply	205
19	Power supply socket	NTSD-.../FBSD-...	Power supply for CTEU bus nodes	211
20	CTEU	CTEU-...	Bus nodes	211
21	Inscription label holder	ASCF-H-L1	For identifying valves	215
22	H-rail mounting	CAF-M-F1-H	For electrical connection box CAPC	207
23	Connecting plate	CAPC-F1-E-M12	For connecting a second device with I-Port interface	207
24	Connecting cable	NEBU-...	–	nebu

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Peripherals overview example – Sub-base valves

## Valve terminal with multi-pin plug/fieldbus connection and individually electrically actuated valves


In applications with specific emergency off requirements, it may be necessary to switch one or more valves separately from the valve terminal controller.

Valves VUVG (see → page 11) with an individual electrical connection are therefore on the valve terminal.

Valves with an individual electrical connection require a special seal when mounted on a valve terminal.

They are therefore ordered/fitted as follows:

- together with the valve terminal using the valve terminal configurator
- individually/subsequently as a substitute for a blanking plate in a vacant position

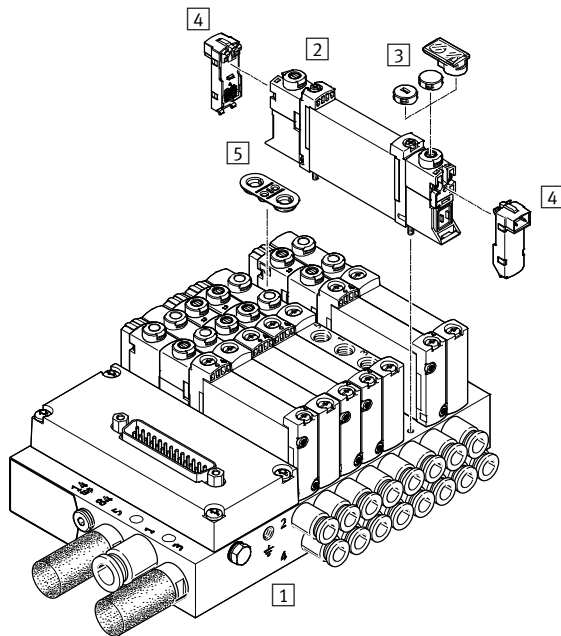

Accessories		Type	Description	→ Page/Internet
1	Manifold rail	VABM-L1-10	For 2 to 10, 12 and 16 valve positions	171
2	Solenoid valve	VUVG	Sub-base valve	83
3	Cover cap	VMPA	For manual override	113
4	Connecting plate	VAVE	For individual connection	112
5	Seal	–	Included in the scope of delivery of the blanking plate for a vacant position	213

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Type codes Semi in-line valves M5/M7

<b>VUVG</b>	-	<b>S</b>	<b>10</b>	-	-	-
<b>Directional control valve type</b>						
Semi in-line valve						
<b>Size</b>						
10 mm						
<b>Valve function</b>						
5/2-way valve, bistable						
<b>B52</b>						
5/2-way valve, single solenoid						
<b>M52</b>						
5/3-way valve, mid-position closed						
<b>P53C</b>						
5/3-way valve, mid-position exhausted						
<b>P53E</b>						
5/3-way valve, mid-position pressurised						
<b>P53U</b>						
2x 3/2-way valve, normally closed						
<b>T32C</b>						
2x 3/2-way valve, 1x normally open, 1x closed						
<b>T32H</b>						
2x 3/2-way valve, normally open						
<b>T32U</b>						
<b>Reset method</b>						
Pneumatic spring with T32						
<b>A</b>						
Mechanical spring with T32 and M52						
<b>M</b>						
Pneumatic/mechanical spring with M52						
<b>R</b>						
With B52 and P53						
<b>-</b>						

<b>Z</b>	-	-	<b>1</b>	<b>T1</b>	<b>L</b>
<b>Advertisement</b>					
<b>L</b> LED					
<b>Electrical connection</b>					
<b>T1</b> Plug-in					
<b>Nominal operating voltage</b>					
<b>1</b> 24 V DC					
<b>Pneumatic connection</b>					
<b>M5</b> M5 thread					
<b>M7</b> M7 thread					
<b>Q3</b> Push-in connector 3 mm					
<b>Q4</b> Push-in connector 4 mm					
<b>Q4H</b> Push-in connector 4 mm, M7					
<b>Q6</b> Push-in connector 6 mm					
<b>Q6H</b> Push-in connector 6 mm, M7					
<b>T14</b> Push-in connector 1/4"					
<b>T14H</b> Push-in connector 1/4", M7					
<b>T18</b> Push-in connector 1/8"					
<b>T316</b> Push-in connector 3/16"					
<b>T316H</b> Push-in connector 3/16", M7					
<b>T532</b> Push-in connector 5/32"					
<b>Manual override</b>					
<b>H</b> Non-detenting					
<b>S</b> Covered					
<b>T</b> Non-detenting, detenting					
<b>Y</b> Detenting, without accessories					
<b>Pilot air</b>					
<b>Z</b> External					



# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Semi in-line valves M5/M7

Function




2x 3/2C, 2x 3/2U, 2x 3/2H

5/2-way, single pilot

5/2-way, bistable

5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 10 mm
-  - Flow rate  
130 ... 330 l/min
-  - Voltage  
24 V DC



General technical data												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	–	–	–	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot							Double solenoid	One position			
Reset method: pneumatic spring	Yes			None			Yes <sup>5)</sup>	–	None	–		
Reset method: mechanical spring	None			Yes			Yes <sup>5)</sup>	–	Yes	Yes		
Vacuum operation at port 1	None			With external pilot air								
Design	Piston spool											
Sealing principle	Soft											
Type of control	Electric											
Type of control	Pilot											
Pilot air supply	External											
Exhaust function	With flow control option											
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting											
Type of mounting	On manifold rail											
Mounting position	Optional											
Signal status display	LED											
Flow rate on manifold rail M5	[l/min]	150			130			230		210		
Flow rate on manifold rail M7	[l/min]	160			140			330		290	280	
Size	[mm]	10										
Ports	1, 3, 5, 12/14, 82/84	On manifold rail										
	2, 4	M5 (VUVG-S10-...-M5) M7 (VUVG-S10-...-M7)										
Product weight	[g]	59					53	60	53	58		
Approval certificate	c UL us - Recognized(OL)											
	c CSA us (OL)											
	RCM mark											
CE marking (see declaration of conformity) <sup>6)</sup>	To EU EMC Directive											
Corrosion resistance class CRC <sup>7)</sup>	2											

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised  
 3) E=Mid-position exhausted  
 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open  
 5) Combined reset method  
 6) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 7) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Semi in-line valves M5/M7

Operating and environmental conditions							
Valve function		T32-A <sup>1</sup>	T32-M <sup>3</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup>	P53
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]					
Operating pressure	Internal pilot air supply [bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
	External pilot air supply [bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8	-0.9 ... 10
Pilot pressure <sup>4)</sup> [bar]		1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
Ambient temperature [°C]		-5 ... +60					
Temperature of medium [°C]		-5 ... +60					

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data		
Electrical connection		Via sub-base
Operating voltage [DC V]		24 ±10%
Power consumption per valve solenoid [W]		1/0.4 (after 25 ms)
Duty cycle ED [%]		100
Max. switching frequency [Hz]		3
Degree of protection to EN 60529	Individual valve	IP67/IP65
	Valve terminal	IP40, IP67/IP65

Safety data		
Max. positive test pulse with 0 signal [µs]		1600
Max. negative test pulse with 1 signal [µs]		3000
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistance		Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times							
Valve function		T32-A <sup>1</sup>	T32-M <sup>3</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup>	P53
Switching time on [ms]		8	10	9	–	12	12
Switching time off [ms]		20	20	21	–	30	38
Changeover time [ms]		–	–	–	9	–	16

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Semi in-line valves M5/M7

**Dimensions**

Download CAD data → [www.festo.com](http://www.festo.com)


Semi in-line valves M5/M7

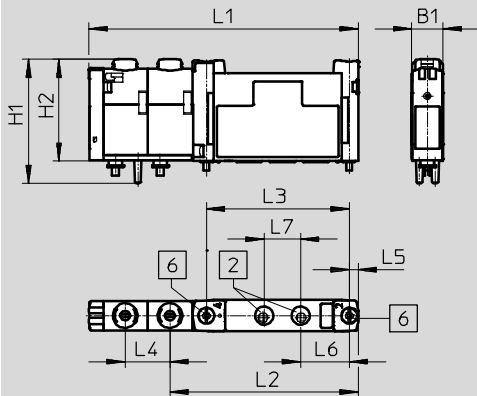

- 2 Ports 2 and 4 M5/M7
- 6 Mounting screw

Type	B1	H1	H2	L1	L2	L3	L4	L5	L6	L7
VUVG-S10-...-M5-1T1L	10.3	40.7	33.6	88.6	62	47	14.7	3	16	12
VUVG-S10-...-M7-1T1L										


**Ordering data**

Description	Part no.	Type	
Semi in-line valve M5			
 2x 3/2-way valve External pilot air supply	Normally closed, reset method: pneumatic spring	573386 VUVG-S10-T32C-AZT-M5-1T1L	
	Normally open, reset method: pneumatic spring	573387 VUVG-S10-T32U-AZT-M5-1T1L	
	1x normally open, 1x normally closed, reset method: pneumatic spring	573388 VUVG-S10-T32H-AZT-M5-1T1L	
	Normally closed, reset method: mechanical spring	573389 VUVG-S10-T32C-MZT-M5-1T1L	
	Normally open, reset method: mechanical spring	573390 VUVG-S10-T32U-MZT-M5-1T1L	
	1x normally open, 1x normally closed, reset method: mechanical spring	573391 VUVG-S10-T32H-MZT-M5-1T1L	
	5/2-way valve, single solenoid		
	External pilot air supply	Reset method: mechanical spring	573393 VUVG-S10-M52-MZT-M5-1T1L
		Reset method: pneumatic/mechanical spring	573392 VUVG-S10-M52-RZT-M5-1T1L
	5/2-way valve, double solenoid		
External pilot air supply		573394 VUVG-S10-B52-ZT-M5-1T1L	
5/3-way valve			
External pilot air supply	Mid-position closed, mechanical spring reset method	573395 VUVG-S10-P53C-ZT-M5-1T1L	
	Mid-position pressurized, mechanical spring reset method	573397 VUVG-S10-P53U-ZT-M5-1T1L	
	Mid-position exhausted, mechanical spring reset method	573396 VUVG-S10-P53E-ZT-M5-1T1L	

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Ordering data

Ordering data					
Description		Part no.	Type		
Semi in-line valve M7					
	2x 3/2-way valve				
	External pilot air supply	Normally closed, reset method: pneumatic spring	573398	VUVG-S10-T32C-AZT-M7-1T1L	
		Normally open, reset method: pneumatic spring	573399	VUVG-S10-T32U-AZT-M7-1T1L	
		1x normally open, 1x normally closed, reset method: pneumatic spring	573400	VUVG-S10-T32H-AZT-M7-1T1L	
		Normally closed, reset method: mechanical spring	573401	VUVG-S10-T32C-MZT-M7-1T1L	
		Normally open, reset method: mechanical spring	573402	VUVG-S10-T32U-MZT-M7-1T1L	
		1x normally open, 1x normally closed, reset method: mechanical spring	573403	VUVG-S10-T32H-MZT-M7-1T1L	
	5/2-way valve, single solenoid				
	External pilot air supply	Reset method: mechanical spring	573405	VUVG-S10-M52-MZT-M7-1T1L	
		Reset method: pneumatic/mechanical spring	573404	VUVG-S10-M52-RZT-M7-1T1L	
	5/2-way valve, double solenoid				
	External pilot air supply		573406	VUVG-S10-B52-ZT-M7-1T1L	
	5/3-way valve				
	External pilot air supply	Mid-position closed, mechanical spring reset method	573407	VUVG-S10-P53C-ZT-M7-1T1L	
Mid-position pressurized, mechanical spring reset method		573409	VUVG-S10-P53U-ZT-M7-1T1L		
Mid-position exhausted, mechanical spring reset method		573408	VUVG-S10-P53E-ZT-M7-1T1L		

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Type codes - Semi in-line valves G1/8

<b>VUVG</b>	-	<b>S</b>	<b>14</b>	-		-	
Directional control valve type							
Semi in-line valves		<b>S</b>					
Size							
14 mm			<b>14</b>				
Valve function							
5/2-way valve, bistable							<b>B52</b>
5/2-way valve, single solenoid							<b>M52</b>
5/3-way valve, mid-position closed							<b>P53C</b>
5/3-way valve, mid-position exhausted							<b>P53E</b>
5/3-way valve, mid-position pressurised							<b>P53U</b>
2x 3/2-way valve, normally closed							<b>T32C</b>
2x 3/2-way valve, 1x normally open, 1x closed							<b>T32H</b>
2x 3/2-way valve, normally open							<b>T32U</b>

	<b>Z</b>					<b>1</b>	<b>T1</b>	<b>L</b>
Advertisement								<b>L</b> LED
Electrical connection								<b>T1</b> Plug-in
Nominal operating voltage						<b>1</b>		24 V DC
Pneumatic connection								
<b>G18</b>								G1/8 thread
<b>Q4</b>								Push-in connector 4 mm
<b>Q6</b>								Push-in connector 6 mm
<b>Q8</b>								Push-in connector 8 mm
<b>T14</b>								Push-in connector 1/4"
<b>T516</b>								Push-in connector 5/16"
Manual override								
<b>H</b>								Non-detenting
<b>S</b>								Covered
<b>T</b>								Non-detenting, detenting
<b>Y</b>								Detenting, without accessories
Pilot air								
<b>Z</b>								External
Reset method								
<b>A</b>								Pneumatic spring with M52 and T32
<b>M</b>								Mechanical spring with M52 and T32
-								With B52 and P53




# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Semi in-line valves G1/8

**Function**

2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, bistable  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 14 mm
-  - Flow rate  
520 ... 630 l/min
-  - Voltage  
24 V DC



General technical data												
Valve function	T32-A			T32-M			M52-A	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot							Double solenoid	One position			
Reset method: pneumatic spring	Yes			None			Yes	-	None	-		
Reset method: mechanical spring	None			Yes			None	-	Yes	Yes		
Vacuum operation at port 1	None			With external pilot air								
Design	Piston spool											
Sealing principle	Soft											
Type of control	Electric											
Type of control	Pilot											
Pilot air supply	External											
Exhaust function	With flow control option											
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting											
Type of mounting	On manifold rail											
Mounting position	Optional											
i	LED											
Flow rate on manifold rail G <sup>1/8</sup>	[l/min]	610			520			620	630	620	590	
Size	[mm]	14										
Ports	1, 3, 5, 12/14, 82/84											
	2, 4											
Product weight	[g]	102			100			91	98	89	95	
Approval certificate	c UL us - Recognized(OL)											
	c CSA us (OL)											
	RCM mark											
CE marking (see declaration of conformity) <sup>5)</sup>	To EU EMC Directive											
Corrosion resistance class CRC <sup>6)</sup>	2											

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised  
 3) E=Mid-position exhausted  
 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open  
 5) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 6) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Semi in-line valves G1/8

Operating and environmental conditions								
Valve function			T32-A <sup>1</sup>	T32-M <sup>2</sup>	M52-A <sup>1</sup>	B52	M 52-M <sup>2</sup>	P53
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]							
Operating pressure	Internal pilot air supply	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
	External pilot air supply	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8	-0.9 ... 10
Pilot pressure <sup>3)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60					
Temperature of medium		[°C]	-5 ... +60					

1) Pneumatic spring.

2) Mechanical spring.

3) Minimum pilot pressure 50% of operating pressure

Electrical data		
Electrical connection	Via sub-base	
Operating voltage	[DC V]	24 ±10%
Power	[W]	1/0.4 (after 25 ms)
Duty cycle ED	[%]	100
Max. switching frequency	[Hz]	3
Degree of protection to EN 60529	Individual valve	IP67/IP65
	Valve terminal	IP40, IP67/IP65

Safety data		
Max. positive test pulse with 0 signal	[µs]	1600
Max. negative test pulse with 1 signal	[µs]	3000
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times								
Valve function			T32-A <sup>1</sup>	T32-M <sup>2</sup>	M52-A <sup>1</sup>	B52	M 52-M <sup>2</sup>	P53
Switching time on		[ms]	10	13	13	–	10	15
Switching time off		[ms]	29	21	26	–	38	42
Changeover time		[ms]	–	–	–	9	–	25

1) Pneumatic spring.


2) Mechanical spring

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Semi in-line valves G1/8

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

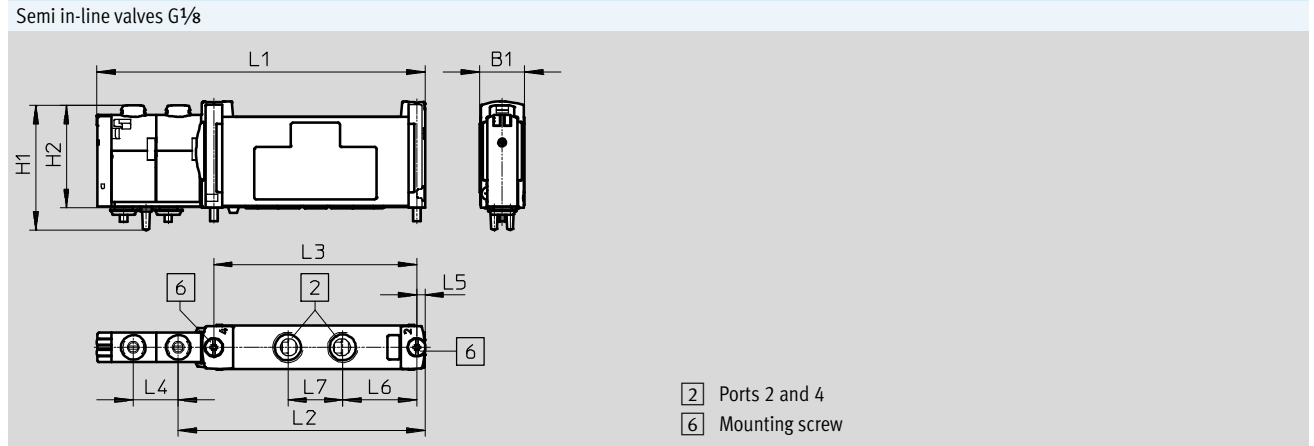

Type	B1	H1	H2	L1	L2	L3	L4	L5	L6	L7
VUVG-S14-...-G18-1T1L	14.7	40.9	33.5	107.6	81	66.5	14.7	2.8	24.3	18

Ordering data				
Description		Part no.	Type	
Semi in-line valve G1/8				
	2x 3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	573464	VUVG-S14-T32C-AZT-G18-1T1L
		Normally open, reset method: pneumatic spring	573465	VUVG-S14-T32U-AZT-G18-1T1L
		1x normally open, 1x normally closed, reset method: pneumatic spring	573466	VUVG-S14-T32H-AZT-G18-1T1L
		Normally closed, reset method: mechanical spring	573467	VUVG-S14-T32C-MZT-G18-1T1L
		Normally open, reset method: mechanical spring	573468	VUVG-S14-T32U-MZT-G18-1T1L
		1x normally open, 1x normally closed, reset method: mechanical spring	573469	VUVG-S14-T32H-MZT-G18-1T1L
	5/2-way valve, single solenoid			
	External pilot air supply	Reset method: pneumatic spring	573470	VUVG-S14-M52-AZT-G18-1T1L
		Reset method: mechanical spring	573471	VUVG-S14-M52-MZT-G18-1T1L
5/2-way valve, double solenoid				
External pilot air supply		573472	VUVG-S14-B52-ZT-G18-1T1L	
5/3-way valve				
External pilot air supply	Mid-position closed, mechanical spring reset method	573473	VUVG-S14-P53C-ZT-G18-1T1L	
	Mid-position pressurized, mechanical spring reset method	573475	VUVG-S14-P53U-ZT-G18-1T1L	
	Mid-position exhausted, mechanical spring reset method	573474	VUVG-S14-P53E-ZT-G18-1T1	



# Valve terminals VTUG with multi-pin plug and fieldbus connection

Type codes - Semi in-line valves G1/4

<b>VUVG</b>	-	<b>S</b>	<b>18</b>	-		-	
Directional control valve type							
Semi in-line valves		<b>S</b>					
Size							
18 mm		<b>18</b>					
Valve function							
5/2-way valve, bistable						<b>B52</b>	
5/2-way valve, single solenoid,						<b>M52</b>	
5/3-way valve, mid-position closed						<b>P53C</b>	
5/3-way valve, mid-position exhausted						<b>P53E</b>	
5/3-way valve, mid-position pressurised						<b>P53U</b>	
2x 3/2-way valve, normally closed						<b>T32C</b>	
2x 3/2-way valve, 1x normally open, 1x closed						<b>T32H</b>	
2x 3/2-way valve, normally open						<b>T32U</b>	

	<b>Z</b>	-		-	<b>1</b>	<b>T1</b>	<b>L</b>
						Advertisement	
						<b>L</b> LED	
						Electrical connection	
				<b>T1</b>		Plug-in	
						Nominal operating voltage	
				<b>1</b>		24 V DC	
						Pneumatic connection	
		<b>G14</b>		G1/4 thread			
		<b>Q6</b>		Push-in connector 6 mm			
		<b>Q8</b>		Push-in connector 8 mm			
		<b>Q10</b>		Push-in connector 10 mm			
		<b>T14</b>		Push-in connector 1/4"			
		<b>T516</b>		Push-in connector 5/16"			
		<b>T38</b>		Push-in connector 3/8"			
						Manual override	
		<b>H</b>		Non-detenting			
		<b>S</b>		Covered			
		<b>T</b>		Non-detenting, detenting			
		<b>Y</b>		Detenting, without accessories			
						Pilot air	
		<b>Z</b>		External			
						Reset method	
		<b>A</b>		Pneumatic spring with T32			
		<b>M</b>		Mechanical spring with M52 and T32			
		<b>R</b>		Pneumatic/mechanical spring with M52			
		-		With B52 and P53			




# Valve terminals VTUG with multi-pin plug and fieldbus connection


Technical data – Semi in-line valves G1/4

**Function**

2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, bistable  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 18 mm
-  - Flow rate  
900 ... 1200 l/min
-  - Voltage  
24 V DC

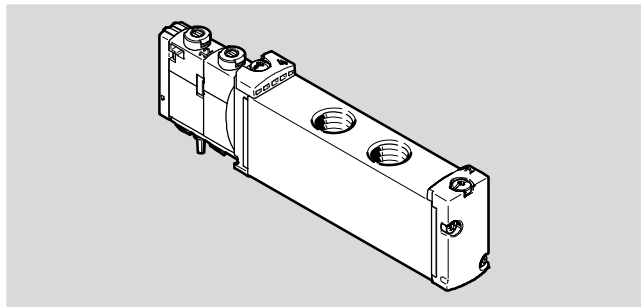

General Technical data												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot							Double solenoid	One position			
Pneumatic spring reset method	Yes			No			Yes <sup>5)</sup>	-	No	-		
Mechanical spring reset method	No			Yes			Yes <sup>5)</sup>	-	Yes	Yes		
Vacuum operation at port 1	No			With external pilot air								
Design	Piston spool											
Sealing principle	Soft											
Type of control	Electric											
Type of control	Pilot											
Pilot air supply	External											
Exhaust function	With flow control option											
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting											
Type of mounting	On manifold rail											
Mounting position	Any											
Signal status display	LED											
Flow rate on manifold rail G <sup>1/8</sup>	[l/min]		900	900			1150	1200	1150	1000		
Size	[mm]		18									
Ports	1, 3, 5, 12/14, 82/84		On manifold rail									
	2, 4		G1/4									
Product weight	[g]		145	147			138	145	138	140		
Approval certificate	c UL us - Recognized (OL)											
	c CSA us (OL)											
	RCM mark											
CE marking (see declaration of conformity) <sup>6)</sup>	To EU EMC Directive											
Corrosion resistance class CRC <sup>7)</sup>	2											

1) C=Normally closed/mid-position closed  
 2) U=Normally open/mid-position pressurised.  
 3) E=Mid-position exhausted  
 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open  
 5) Combined reset method  
 6) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
 If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.  
 7) Corrosion resistance class CRC 2 to Festo standard FN 940070  
 Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Semi in-line valves G1/4

Operating and environmental conditions							
Valve function		T32-A <sup>1</sup>	T32-M <sup>2</sup>	M52-R <sup>3</sup>	B52	M52-M <sup>2</sup>	P53
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]						
pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]						
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)						
Operating pressure	internal pilot air supply	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External pilot air supply	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60				
Temperature of medium		[°C]	-5 ... +60				

- 1) Pneumatic spring
- 2) Mechanical spring
- 3) Mixed, pneumatic/mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data		
Electrical connection	Via sub-base	
Operating voltage	[V DC]	24 ±10%
Power	[W]	1
Duty cycle	[%]	100
Max. switching frequency	[Hz]	3
Degree of protection to EN 60529	Individual valve	IP67/IP65
	Valve terminal	IP40, IP67/IP65

Safety data		
Max. positive test pulse with logic 0	[µs]	1600
Max. negative test pulse with logic 1	[µs]	3000
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times							
Valve function		T32-A <sup>1</sup>	T32-M <sup>2</sup>	M52-R <sup>3</sup>	B52	M52-M <sup>2</sup>	P53
Switching time on	[ms]	15	25	20	–	13	20
Switching time off	[ms]	35	33	35	–	50	57
Changeover time	[ms]	–	–	–	15	–	31

- 1) Pneumatic spring
- 2) Mechanical spring
- 3) Mixed, pneumatic/mechanical spring

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Semi in-line valves G1/4

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

Semi in-line valve G1/4

2 Connections 2 and 4  
6 Mounting screw

Type	B1	H1	H2	L1	L2	L3	L4	L5	L6	L7
VUVG-S18-...-G14-1T1L	18.7	40.9	33.6	128.6	101.9	86.4	14.7	3.9	31.3	23.8

ordering data				
		Description	Part no.	Type
Semi in-line valve G1/4				
	2x 3/2-way valve			
	External pilot air supply	Normally closed	8004873	VUVG-S18-T32C-AZT-G14-1T1L
		Normally open, reset method: pneumatic spring	8004874	VUVG-S18-T32U-AZT-G14-1T1L
		1x normally open, 1x normally closed, reset method: pneumatic spring	8004875	VUVG-S18-T32H-AZT-G14-1T1L
		Normally closed, reset method: mechanical spring	8004876	VUVG-S18-T32C-MZT-G14-1T1L
		Normally open, reset method: mechanical spring	8004877	VUVG-S18-T32U-MZT-G14-1T1L
		1x normally open, 1x normally closed, reset method: mechanical spring	8004878	VUVG-S18-T32H-MZT-G14-1T1L
	5/2-way valve, single solenoid			
	External pilot air supply	Reset method: pneumatic/mechanical spring	8004879	VUVG-S18-M52-RZT-G14-1T1L
		Mechanical spring reset method	8004880	VUVG-S18-M52-MZT-G14-1T1L
	5/2-way valve, double solenoid			
	External pilot air supply		8004881	VUVG-S18-B52-ZT-G14-1T1L
5/3-way valve				
External pilot air supply	Mid-position closed	8004882	VUVG-S18-P53C-ZT-G14-1T1L	
	Mid-position pressurised	8004883	VUVG-S18-P53E-ZT-G14-1T1L	
	Mid-position exhausted	8004884	VUVG-S18-P53U-ZT-G14-1T1L	

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Type codes - Sub-base valves M5/M7

<b>VUVG</b>	-	<b>B</b>	-		-	
Type of directional control valve						
Sub-base valves <b>B</b>						
Size						
10 mm						<b>10</b>
10 mm, 3/2-way valve (M32)						<b>10Z</b>
Valve function						
5/2-way valve, double solenoid						<b>B52</b>
5/2-way valve, single solenoid						<b>M52</b>
3/2-way valve, normally closed						<b>M32C</b>
3/2-way valve, normally open						<b>M32U</b>
5/3-way valve, mid-position closed						<b>P53C</b>
5/3-way valve, mid-position exhausted						<b>P53E</b>
5/3-way valve, mid-position pressurised						<b>P53U</b>
2x 3/2-way valve, normally closed						<b>T32C</b>
2x 3/2-way valve, 1x normally open, 1x normally closed						<b>T32H</b>
2x 3/2-way valve, normally open						<b>T32U</b>
Reset method						
Pneumatic spring with T32						<b>A</b>
Mechanical spring with M52 and T32						<b>M</b>
Pneumatic/mechanical spring with M52 and M32						<b>R</b>
With B52 and P53						-




<b>Z</b>	-	<b>F</b>	-	<b>1</b>	<b>T1</b>	<b>L</b>	-	<b>EX2C</b>
EU certification								
<b>EX2C</b> II3GD								
Display								
<b>L</b> LED								
Electrical connection								
<b>T1</b> Plug-in								
Nominal operating voltage								
<b>1</b> 24 V DC								
Pneumatic connection								
<b>F</b> Flange/sub-base								
Manual override								
<b>H</b> Non-detenting								
<b>S</b> Covered								
<b>T</b> Non-detenting, detenting								
<b>Y</b> Detenting, without accessories								
Pilot air								
<b>Z</b> External								

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves M5/M7

Function  
 3/2C, 3/2U  
 2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, bistable  
 5/3C, 5/3U, 5/3E

-  - Size 10 mm
-  - Flow rate  
130 ... 300 l/min
-  - Voltage  
24 V DC

Circuit symbol → Page 13



General Technical data														
Valve function	T32-A			T32-M			M32-R		M52-R	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	–	–	–	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot									Double solenoid	One position			
Pneumatic spring reset method	Yes			No			No		Yes <sup>5)</sup>	–	No	–		
Mechanical spring reset method	No			Yes			Yes		Yes <sup>5)</sup>	–	Yes	Yes		
Vacuum operation at port 1	No			With external pilot air										
Design	Piston spool													
Sealing principle	Soft													
Type of control	Electric													
Type of control	Pilot													
Pilot air supply	External													
Exhaust function	With flow control option													
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting													
Type of mounting	On manifold rail													
Mounting position	Any													
Signal status display	LED													
Standard nominal flow rate M5/M7	[l/min]	160	140	140	300	260	260							
Flow rate on manifold rail M5, front	[l/min]	150	130	130	220	220	200							
Flow rate on manifold rail M7, front	[l/min]	160	140	140	270	240	250							
Flow rate on manifold rail M7, underneath	[l/min]	160	140	140	300	260	260							
Size	[mm]	10												
Ports	1, 3, 5, 12/14, 82/84													
	2, 4													
Product weight	[g]	59			53		60		53		58			
Approval certificate	c UL us - Recognized (OL)													
	c CSA us (OL)													
	RCM mark													
CE marking (see declaration of conformity) <sup>6)</sup>	To EU EMC Directive													
Corrosion resistance class CRC <sup>7)</sup>	2													

1) C=Normally closed/mid-position closed

2) U=Normally open/mid-position pressurised.

3) E=Mid-position exhausted

4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

7) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves M5/M7

Operating and environmental conditions									
Valve function			T32-A <sup>1</sup>	T32-M <sup>3</sup>	M32-R <sup>2</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup>	P53
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]							
Operating pressure	Internal pilot air supply	[bar]	1.5 ... 8	2.5 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
	External pilot air supply	[bar]	1.5 ... 10	-0.9 ... 10				-0.9 ... 8	-0.9 ... 10
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60						
Temperature of medium		[°C]	-5 ... +60						

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data		
Electrical connection		Via sub-base
Operating voltage	[V DC]	24 ±10%
Power consumption per valve solenoid	[W]	1/0.4 (after 25 ms)
Duty cycle	[%]	100
Max. switching frequency	[Hz]	3
Degree of protection to EN 60529	Individual valve	IP67/IP65
	Valve terminals VTUG	IP40, IP67/IP65
	Valve terminal VTUG-VI-EX2	IP40, IP65, IP67, IP69K

Safety data		
Max. positive test pulse with logic 0	[µs]	1600
Max. negative test pulse with logic 1	[µs]	3000
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	

ATEX	
Type	VTUG-VI-EX2
ATEX category gas	II 3G
Type of ignition protection for gas	Ex ec IIC T4 Gc
ATEX category for dust	II 3D
Type of ignition protection for dust	Ex tc IIIC T135°C Dc
Explosion protection certification outside the EU	EPL Dc (IECEX)
	EPL Gc (IECEX)
Explosion ambient temperature	[°C] 5°C ≤ Ta ≤ +50°C, -5°C ≤ Ta ≤ +60°C
CE marking (see declaration of atmosphere)	According to the EU EMC Directive, the EU ATEX Directive and the EU RoHS Directive
Certificate issuing authority	IBEXU16ATEXB021 X
	IECEX IBE 17.0003 X

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant


Valve switching times									
Valve function			T32-A <sup>1</sup>	T32-M <sup>3</sup>	M32-R <sup>2</sup>	M52-R <sup>2</sup>	B52	M52-M <sup>3</sup>	P53
Switching time on	[ms]	8	10	9	9	–	12	12	
Switching time off	[ms]	20	20	17	21	–	30	38	
Changeover time	[ms]	–	–	–	–	9	–	16	

- 1) Pneumatic spring
- 2) Mixed, pneumatic/mechanical spring
- 3) Mechanical spring

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves M5/M7

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

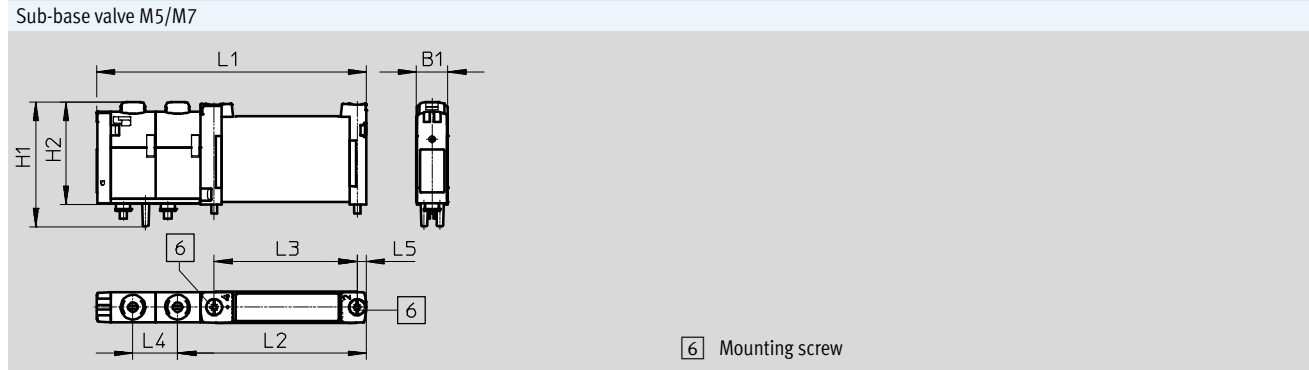

Type	B1	H1	H2	L1	L2	L3	L4	L5
VUVG-B10-...-F-1T1L	10.3	40.7	33	88.6	62	47	14.7	3
VUVG-B10-...-F-1T1L-EX2C								


Ordering data				
Description		Part no.	Type	
Sub-base valve M5/M7				
	3/2-way valve			
	External pilot air supply	Normally closed, reset method: mechanical spring	8028231	VUVG-B10Z-M32C-RZT-F-1T1L
		Normally open, reset method: mechanical spring	8028232	VUVG-B10Z-M32U-RZT-F-1T1L
	2x 3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	573410	VUVG-B10-T32C-AZT-F-1T1L
		Normally open, reset method: pneumatic spring	573411	VUVG-B10-T32U-AZT-F-1T1L
		1x normally open, 1x normally closed, reset method: pneumatic spring	573412	VUVG-B10-T32H-AZT-F-1T1L
		Normally closed, reset method: mechanical spring	573413	VUVG-B10-T32C-MZT-F-1T1L
		Normally open, reset method: mechanical spring	573414	VUVG-B10-T32U-MZT-F-1T1L
		1x normally open, 1x normally closed, reset method: mechanical spring	573415	VUVG-B10-T32H-MZT-F-1T1L
	5/2-way valve, single solenoid			
	External pilot air supply	Mechanical spring reset method	573417	VUVG-B10-M52-MZT-F-1T1L
		Reset method: pneumatic/mechanical spring	573416	VUVG-B10-M52-RZT-F-1T1L
	5/2-way valve, double solenoid			
	External pilot air supply		573418	VUVG-B10-B52-ZT-F-1T1L
5/3-way valve				
External pilot air supply	Mid-position closed, mechanical spring reset method	573419	VUVG-B10-P53C-ZT-F-1T1L	
	Mid-position pressurized, mechanical spring reset method	573421	VUVG-B10-P53U-ZT-F-1T1L	
	Mid-position exhausted, mechanical spring reset method	573420	VUVG-B10-P53E-ZT-F-1T1L	



# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves M5/M7

Ordering data				
	Description		Part no.	Type
Sub-base valve M5/M7				
	3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic/mechanical spring	8041900	VUVG-B10Z-M32C-RZT-F-1T1L-EX2C
		Normally open, reset method: pneumatic/mechanical spring	8041901	VUVG-B10Z-M32U-RZT-F-1T1L-EX2C
	2x 3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	8041895	VUVG-B10-T32C-AZT-F-1T1L-EX2C
		Normally open, reset method: pneumatic spring	8041896	VUVG-B10-T32U-AZT-F-1T1L-EX2C
		1x normally open, 1x normally closed, reset method: pneumatic spring	8041897	VUVG-B10-T32H-AZT-F-1T1L-EX2C
		Normally closed, reset method: mechanical spring	8041891	VUVG-B10-T32C-MZT-F-1T1L-EX2C
		Normally open, reset method: mechanical spring	8041898	VUVG-B10-T32U-MZT-F-1T1L-EX2C
		1x normally open, 1x normally closed, reset method: mechanical spring	8041899	VUVG-B10-T32H-MZT-F-1T1L-EX2C
	5/2-way valve, single solenoid			
	External pilot air supply	Mechanical spring reset method	8041892	VUVG-B10-M52-MZT-F-1T1L-EX2C
		Reset method: pneumatic/mechanical spring	8041889	VUVG-B10-M52-RZT-F-1T1L-EX2C
	5/2-way valve, double solenoid			
	External pilot air supply		8041888	VUVG-B10-B52-ZT-F-1T1L-EX2C
	5/3-way valve			
	External pilot air supply	Mid-position closed, mechanical spring reset method	8041890	VUVG-B10-P53C-ZT-F-1T1L-EX2C
		Mid-position pressurized, mechanical spring reset method	8041893	VUVG-B10-P53U-ZT-F-1T1L-EX2C
Mid-position exhausted, mechanical spring reset method		8041894	VUVG-B10-P53E-ZT-F-1T1L-EX2C	

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Type codes - Sub-base valves G1/8

<b>VUVG</b>	-	<b>B</b>	<b>14</b>	-		-	
Type of directional control valve							
Sub-base valves <b>B</b>							
Size							
14 mm <b>14</b>							
14 mm, 3/2-way valve (M32) <b>14Z</b>							
Valve function							
5/2-way valve, double solenoid <b>B52</b>							
5/2-way valve, single solenoid <b>M52</b>							
3/2-way valve, normally closed <b>M32C</b>							
3/2-way valve, normally open <b>M32U</b>							
5/3-way valve, mid-position closed <b>P53C</b>							
5/3-way valve, mid-position exhausted <b>P53E</b>							
5/3-way valve, mid-position pressurised <b>P53U</b>							
2x 3/2-way valve, normally closed <b>T32C</b>							
2x 3/2-way valve, normally open <b>T32U</b>							
2x 3/2-way valve, 1x normally open, 1x normally closed <b>T32H</b>							
Reset method							
Pneumatic spring with M52, M32 and T32 <b>A</b>							
Mechanical spring with M52 and T32 <b>M</b>							
With B52 and P53 <b>-</b>							

<b>Z</b>	-	<b>F</b>	-	<b>1</b>	<b>T1</b>	<b>L</b>	-	<b>EX2C</b>
EU certification								
<b>EX2C</b> II3GD								
Display								
<b>L</b> LED								
Electrical connection								
<b>T1</b> Plug-in								
Nominal operating voltage								
<b>1</b> 24 V DC								
Pneumatic connection								
<b>F</b> Flange/sub-base								
Manual override								
<b>H</b> Non-detenting								
<b>S</b> Covered								
<b>T</b> Non-detenting, detenting								
<b>Y</b> Detenting, without accessories								
Pilot air								
<b>Z</b> External								

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves G1/8

Function

3/2C, 3/2U


2x 3/2C, 2x 3/2U, 2x 3/2H

5/2-way, single pilot

5/2-way, bistable

5/3C, 5/3U, 5/3E

-  - Size 14 mm

-  - Flow rate  
350 ... 560 l/min

-  - Voltage  
24 V DC

Circuit symbol → Page 13



General Technical data															
Valve function	T32-A			T32-M			M32-A		M52-A	B52	M52-M	P53			
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>	
Stable position	Single pilot									Double solenoid	One position				
Pneumatic spring reset method	Yes			No			Yes		Yes	-	No	-			
Mechanical spring reset method	No			Yes			No		No	-	Yes	Yes			
Vacuum operation at port 1	No			With external pilot air											
Design	Piston spool														
Sealing principle	Soft														
Type of control	Electric														
Type of control	Pilot														
Pilot air supply	External														
Exhaust function	With flow control option														
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting														
Type of mounting	On manifold rail														
Mounting position	Any														
Signal status display	LED														
Standard nominal flow rate G1/8	[l/min]	530			470			350		550	560	550	510		
Flow rate on manifold rail G1/8, front	[l/min]	490			440			320		500	510	500	470		
Flow rate on manifold rail G1/8, underneath	[l/min]	530			470			350		550	560	550	510		
Size	[mm]	14													
Ports	1, 3, 5, 12/14, 82/84	On manifold rail													
	2, 4	On manifold rail													
Product weight	[g]	102			100			91		98	89	95			
Approval certificate	c UL us - Recognized (OL)														
	c CSA us (OL)														
	RCM mark														
CE marking (see declaration of conformity) <sup>5)</sup>	To EU EMC Directive														
Corrosion resistance class CRC <sup>6)</sup>	2														

1) C=Normally closed/mid-position closed

2) U=Normally open/mid-position pressurised.

3) E=Mid-position exhausted

4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open

5) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

6) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves G1/8

Operating and environmental conditions									
Valve function			T32-A <sup>1</sup>	T32-M <sup>2</sup>	M32-A <sup>1</sup>	M52-A <sup>1</sup>	B52	M52-M <sup>2</sup>	P53
Operating medium			Compressed air to ISO 8573-1:2010 [7:4:4]						
Operating pressure	Internal pilot air supply	[bar]	1.5 ... 8	3.5 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
	External pilot air supply	[bar]	1.5 ... 10	-0.9 ... 10				-0.9 ... 8	-0.9 ... 10
Pilot pressure <sup>3)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60						
Temperature of medium		[°C]	-5 ... +60						

1) Pneumatic spring

2) Mechanical spring.

3) Minimum pilot pressure 50% of operating pressure

Electrical data		
Electrical connection		Via sub-base
Operating voltage	[V DC]	24 ±10%
Power	[W]	1/0.4 (after 25 ms)
Duty cycle	[%]	100
Max. switching frequency	[Hz]	3
Degree of protection to EN 60529	Individual valve	IP67/IP65
	Valve terminal	IP40, IP67/IP65
	Valve terminal VTUG-VI-EX2	IP40, IP65, IP67, IP69K

Safety data		
Max. positive test pulse with logic 0	[µs]	1600
Max. negative test pulse with logic 1	[µs]	3000
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	

ATEX	
Type	VTUG-VI-EX2, VTUG-VI-EX3
ATEX category gas	II 3G
Type of ignition protection for gas	Ex ec IIC T4 Gc
ATEX category for dust	II 3D
Type of ignition protection for dust	Ex tc IIIC T135°C Dc
Explosion protection certification outside the EU	EPL Dc (IECEx)
	EPL Gc (IECEx)
Explosion ambient temperature	[°C] 5°C ≤ Ta ≤ +50°C, -5°C ≤ Ta ≤ +60°C
CE marking (see declaration of atmosphere)	According to the EU EMC Directive, the EU ATEX Directive and the EU RoHS Directive
Certificate issuing authority	IBExU16ATEXB021 X
	IECEx IBE 17.0003 X

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times									
Valve function			T32-A <sup>1</sup>	T32-M <sup>2</sup>	M32-A <sup>1</sup>	M52-A <sup>1</sup>	B52	M52-M <sup>2</sup>	P53
Switching time on		[ms]	10	13	13	13	-	10	15
Switching time off		[ms]	29	21	20	26	-	38	42
Changeover time		[ms]	-	-	-	-	9	-	25

1) Pneumatic spring

2) Mechanical spring


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves G1/8

**Dimensions**

Download CAD data → [www.festo.com](http://www.festo.com)


Sub-base valve G1/8

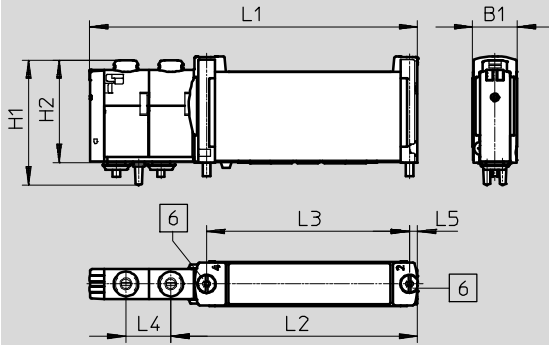

6 Mounting screw

Type	B1	H1	H2	L1	L2	L3	L4	L5
VUVG-B14-...-F-1T1L	14.7	40.9	33.5	107.6	81	66.5	15.1	2.8
VUVG-B14-...-F-1T1L-EX2C								


**Ordering data**

Description	Part no.	Type	
Sub-base valve G1/8			
	3/2-way valve		
	External pilot air supply	Normally closed, reset method: pneumatic spring	8028235 VUVG-B14Z-M32C-AZT-F-1T1L
		Normally open, reset method: pneumatic spring	8028236 VUVG-B14Z-M32U-AZT-F-1T1L
	2x 3/2-way valve		
	External pilot air supply	Normally closed, reset method: pneumatic spring	573476 VUVG-B14-T32C-AZT-F-1T1L
		Normally open, reset method: pneumatic spring	573477 VUVG-B14-T32U-AZT-F-1T1L
		1x normally open, 1x normally closed, reset method: pneumatic spring	573478 VUVG-B14-T32H-AZT-F-1T1L
		Normally closed, reset method: mechanical spring	573479 VUVG-B14-T32C-MZT-F-1T1L
		Normally open, reset method: mechanical spring	573480 VUVG-B14-T32U-MZT-F-1T1L
		1x normally open, 1x normally closed, reset method: mechanical spring	573481 VUVG-B14-T32H-MZT-F-1T1L
	5/2-way valve, single solenoid		
	External pilot air supply	Pneumatic spring reset method	573482 VUVG-B14-M52-AZT-F-1T1L
		Mechanical spring reset method	573483 VUVG-B14-M52-MZT-F-1T1L
	5/2-way valve, double solenoid		
	External pilot air supply		573484 VUVG-B14-B52-ZT-F-1T1L
	5/3-way valve		
	External pilot air supply	Mid-position closed, mechanical spring reset method	573485 VUVG-B14-P53C-ZT-F-1T1L
		Mid-position pressurized, mechanical spring reset method	573487 VUVG-B14-P53U-ZT-F-1T1L
	Mid-position exhausted, mechanical spring reset method	573486 VUVG-B14-P53E-ZT-F-1T1L	

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves G1/8

Ordering data				
Description		Part no.	Type	
Sub-base valve G1/8				
	3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	8041970	VUVG-B14Z-M32C-AZT-F-1T1L-EX2C
		Normally open, reset method: pneumatic spring	8041971	VUVG-B14Z-M32U-AZT-F-1T1L-EX2C
	2x 3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	8041958	VUVG-B14-T32C-AZT-F-1T1L-EX2C
		Normally open, reset method: pneumatic spring	8041959	VUVG-B14-T32U-AZT-F-1T1L-EX2C
		1x normally open, 1x normally closed, reset method: pneumatic spring	8041960	VUVG-B14-T32H-AZT-F-1T1L-EX2C
		Normally closed, reset method: mechanical spring	8041961	VUVG-B14-T32C-MZT-F-1T1L-EX2C
		Normally open, reset method: mechanical spring	8041962	VUVG-B14-T32U-MZT-F-1T1L-EX2C
		1x normally open, 1x normally closed, reset method: mechanical spring	8041963	VUVG-B14-T32H-MZT-F-1T1L-EX2C
	5/2-way valve, single solenoid			
	External pilot air supply	Pneumatic spring reset method	8041964	VUVG-B14-M52-AZT-F-1T1L-EX2C
		Mechanical spring reset method	8041965	VUVG-B14-M52-MZT-F-1T1L-EX2C
	5/2-way valve, double solenoid			
	External pilot air supply		8041966	VUVG-B14-B52-ZT-F-1T1L-EX2C
	5/3-way valve			
	External pilot air supply	Mid-position closed, mechanical spring reset method	8041967	VUVG-B14-P53C-ZT-F-1T1L-EX2C
		Mid-position pressurized, mechanical spring reset method	8041969	VUVG-B14-P53U-ZT-F-1T1L-EX2C
Mid-position exhausted, mechanical spring reset method		8041968	VUVG-B14-P53E-ZT-F-1T1L-EX2C	

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Type codes - Sub-base valves G1/4

<b>VUVG</b>	-	<b>B</b>	<b>18</b>	-		-
Type of directional control valve						
Sub-base valves						
<b>B</b>						
Size						
18 mm						
<b>18</b>						
Valve function						
5/2-way valve, double solenoid						<b>B52</b>
5/2-way valve, single solenoid						<b>M52</b>
5/3-way valve, mid-position closed						<b>P53C</b>
5/3-way valve, mid-position exhausted						<b>P53E</b>
5/3-way valve, mid-position pressurised						<b>P53U</b>
2x 3/2-way valve, normally closed						<b>T32C</b>
2x 3/2-way valve, 1x normally open, 1x closed						<b>T32H</b>
2x 3/2-way valve, normally open						<b>T32U</b>

	<b>Z</b>		-	<b>F</b>	-	<b>1</b>	<b>T1</b>	<b>L</b>
Display								
<b>L</b> LED								
Electrical connection								
<b>T1</b> Plug-in								
Nominal operating voltage								
<b>1</b> 24 V DC								
Pneumatic connection								
<b>F</b> Flange/sub-base								
Manual override								
<b>H</b> Non-detenting								
<b>S</b> Covered								
<b>T</b> Non-detenting, detenting								
<b>Y</b> Detenting, without accessories								
Pilot air								
<b>Z</b> External								
Reset method								
<b>A</b> Pneumatic spring with T32								
<b>M</b> Mechanical spring with M52 and T32								
<b>R</b> Pneumatic/mechanical spring with M52								
-								
With B52 and P53								

# Valve terminals VTUG with multi-pin plug and fieldbus connection




FESTO


Technical data – Sub-base valves G1/4

**Function**

2x 3/2C, 2x 3/2U, 2x 3/2H  
 5/2-way, single pilot  
 5/2-way, bistable  
 5/3C, 5/3U, 5/3E

Circuit symbol → Page 13

-  - Size 18 mm
-  - Flow rate  
800 ... 1000 l/min
-  - Voltage  
24 V DC

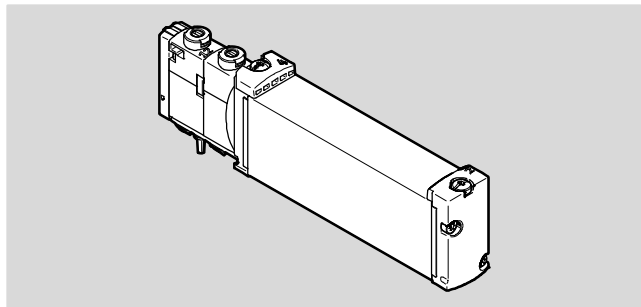

General Technical data												
Valve function	T32-A			T32-M			M52-R	B52	M52-M	P53		
Normal position	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	C <sup>1)</sup>	U <sup>2)</sup>	H <sup>4)</sup>	-	-	-	C <sup>1)</sup>	U <sup>2)</sup>	E <sup>3)</sup>
Stable position	Single pilot							Double solenoid	One position			
Pneumatic spring reset method	Yes			No			Yes <sup>5)</sup>	-	No	-		
Mechanical spring reset method	No			Yes			Yes <sup>5)</sup>	-	Yes	Yes		
Vacuum operation at port 1	No			With external pilot air								
Design	Piston spool											
Sealing principle	Soft											
Type of control	Electric											
Type of control	Pilot											
Pilot air supply	External											
Exhaust function	With flow control option											
Manual override	Choice of non-detenting, covered, non-detenting/detenting or detenting											
Type of mounting	On manifold rail											
Mounting position	Any											
Signal status display	LED											
Flow rate on manifold rail G <sup>1/4</sup> , front	[l/min]	800			800			950	1000	950	900	
Size	[mm]	18										
Ports	1, 3, 5, 12/14, 82/84	On manifold rail										
	2, 4	On manifold rail										
Product weight	[g]	145			147			138	145	138	140	
Approval certificate	c UL us - Recognized (OL)											
	c CSA us (OL)											
	RCM mark											
CE marking (see declaration of atmosphere)	To EU EMC Directive <sup>6)</sup>											
Corrosion resistance class CRC <sup>7)</sup>	2											

- 1) C=Normally closed/mid-position closed
- 2) U=Normally open/mid-position pressurised.
- 3) E=Mid-position exhausted
- 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open
- 5) Combined reset method
- 6) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.
- 7) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Sub-base valves G1/4

Operating and environmental conditions							
Valve function		T32-A <sup>1</sup>	T32-M <sup>2</sup>	M52-R <sup>3</sup>	B52	M52-M <sup>2</sup>	P53
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]						
pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]						
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)						
Operating pressure	Internal pilot air supply	[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
	External pilot air supply	[bar]	1.5 ... 10	-0.9 ... 10			-0.9 ... 8
Pilot pressure <sup>4)</sup>		[bar]	1.5 ... 8	2 ... 8	2.5 ... 8	1.5 ... 8	3 ... 8
Ambient temperature		[°C]	-5 ... +60				
Temperature of medium		[°C]	-5 ... +60				

- 1) Pneumatic spring
- 2) Mechanical spring
- 3) Mixed, pneumatic/mechanical spring
- 4) Minimum pilot pressure 50% of operating pressure

Electrical data		
Electrical connection	Via sub-base	
Operating voltage	[V DC]	24 ±10%
Power	[W]	1
Duty cycle	[%]	100
Max. switching frequency	[Hz]	3
Degree of protection to EN 60529	Individual valve	IP67/IP65
	Valve terminal	IP40, IP67/IP65

Safety data		
Max. positive test pulse with logic 0	[µs]	1600
Max. negative test pulse with logic 1	[µs]	3000
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistance	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	

Information on materials	
Housing	Wrought aluminium alloy
Seals	HNBR, NBR
Note on materials	RoHS-compliant

Valve switching times							
Valve function		T32-A <sup>1</sup>	T32-M <sup>2</sup>	M52-R <sup>3</sup>	B52	M52-M <sup>2</sup>	P53
Switching time on	[ms]	15	25	20	–	13	20
Switching time off	[ms]	35	33	35	–	50	57
Changeover time	[ms]	–	–	–	15	–	31


- 1) Pneumatic spring
- 2) Mechanical spring
- 3) Mixed, pneumatic/mechanical spring

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Sub-base valves G1/4

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

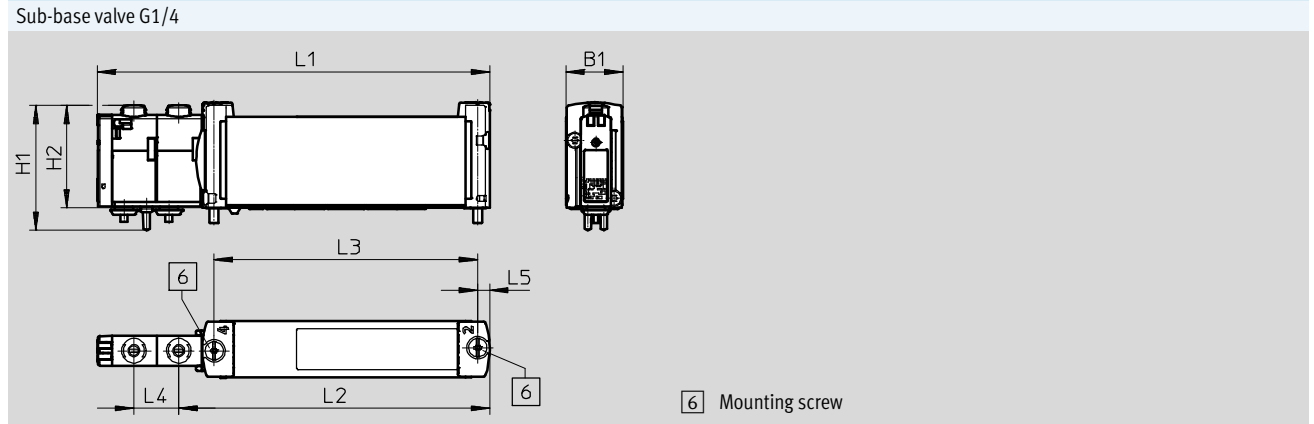

Type	B1	H1	H2	L1	L2	L3	L4	L5
VUVG-B18-...-F-1T1L	18.7	40.9	33.6	128.6	101.9	86.4	14.7	3.9

Ordering data				
	Description	Part no.	Type	
Sub-base valve G1/4				
	2x 3/2-way valve			
	External pilot air supply	Normally closed, reset method: pneumatic spring	8004885	VUVG-B18-T32C-AZT-F-1T1L
		Normally open, reset method: pneumatic spring	8004886	VUVG-B18-T32U-AZT-F-1T1L
		1x normally open, 1x normally closed, reset method: pneumatic spring	8004887	VUVG-B18-T32H-AZT-F-1T1L
		Normally closed, reset method: mechanical spring	8004888	VUVG-B18-T32C-MZT-F-1T1L
		Normally open, reset method: mechanical spring	8004889	VUVG-B18-T32U-MZT-F-1T1L
		1x normally open, 1x normally closed, reset method: mechanical spring	8004890	VUVG-B18-T32H-MZT-F-1T1L
	5/2-way valve, single solenoid			
	External pilot air supply	Reset method: pneumatic/mechanical spring	8004891	VUVG-B18-M52-RZT-F-1T1L
		Mechanical spring reset method	8004892	VUVG-B18-M52-MZT-F-1T1L
	5/2-way valve, double solenoid			
	External pilot air supply		8004893	VUVG-B18-B52-ZT-F-1T1L
	5/3-way valve			
	External pilot air supply	Mid-position closed, mechanical spring reset method	8004894	VUVG-B18-P53C-ZT-F-1T1L
		Mid-position exhausted, mechanical spring reset method	8004895	VUVG-B18-P53E-ZT-F-1T1L
Mid-position pressurized, mechanical spring reset method		8004896	VUVG-B18-P53U-ZT-F-1T1L	



# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Manifold rail VABM

General technical data				
Manifold rail		Size 10	Size 14	Size 18
Short type code		VABM		
Grid dimension	[mm]	10.5	16	19
Mounting position		Optional		
Connection type		Semi in-line/sub-base		
Max. no. of valve positions		24		
Connection	12/14	M5	M5	G1/8
	82/84	M5	M5	G1/8
	2, 4	M5 or M7	G1/8	G1/4
	1, 3, 5	G1/8	G1/4	G3/8
Storage temperature	[°C]	-20 ... 60		
Approval certificate		c UL us - Recognized (OL)		
		c CSA us (OL)		
CE mark (see declaration of conformity) <sup>1)</sup>		To EU EMC Directive		
Corrosion resistance class CRC <sup>2)</sup>		2		

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Weight [g]											
Valve positions	4	5	6	7	8	9	10	12	16	20	24
VABM-L1-10G-G18-...	329	363	397	431	465	499	533	601	737	873	1009
VABM-L1-10HW-G18-...	388	426	464	502	540	578	616	692	844	996	1148
VABM-L1-14G-G14-...	879	990	1101	1212	1323	1434	1545	1767	2211	2655	3099
VABM-L1-14W-G14-...	839	940	1041	1142	1243	1344	1445	1647	2051	2455	2859
VABM-L1-18G-G38-...	1461	1661	1861	2061	2261	2461	2661	3061	3861	4661	5461
VABM-L1-18W-G38-...	1369	1546	1723	1900	2077	2254	2431	2785	3493	4201	4909

Materials	
Manifold rail	Wrought aluminium alloy
Note on materials	RoHS-compliant


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Example of a valve terminal with I-Port interface

Download CAD data → [www.festo.com](http://www.festo.com)

Outlet orientation of electrical components on top

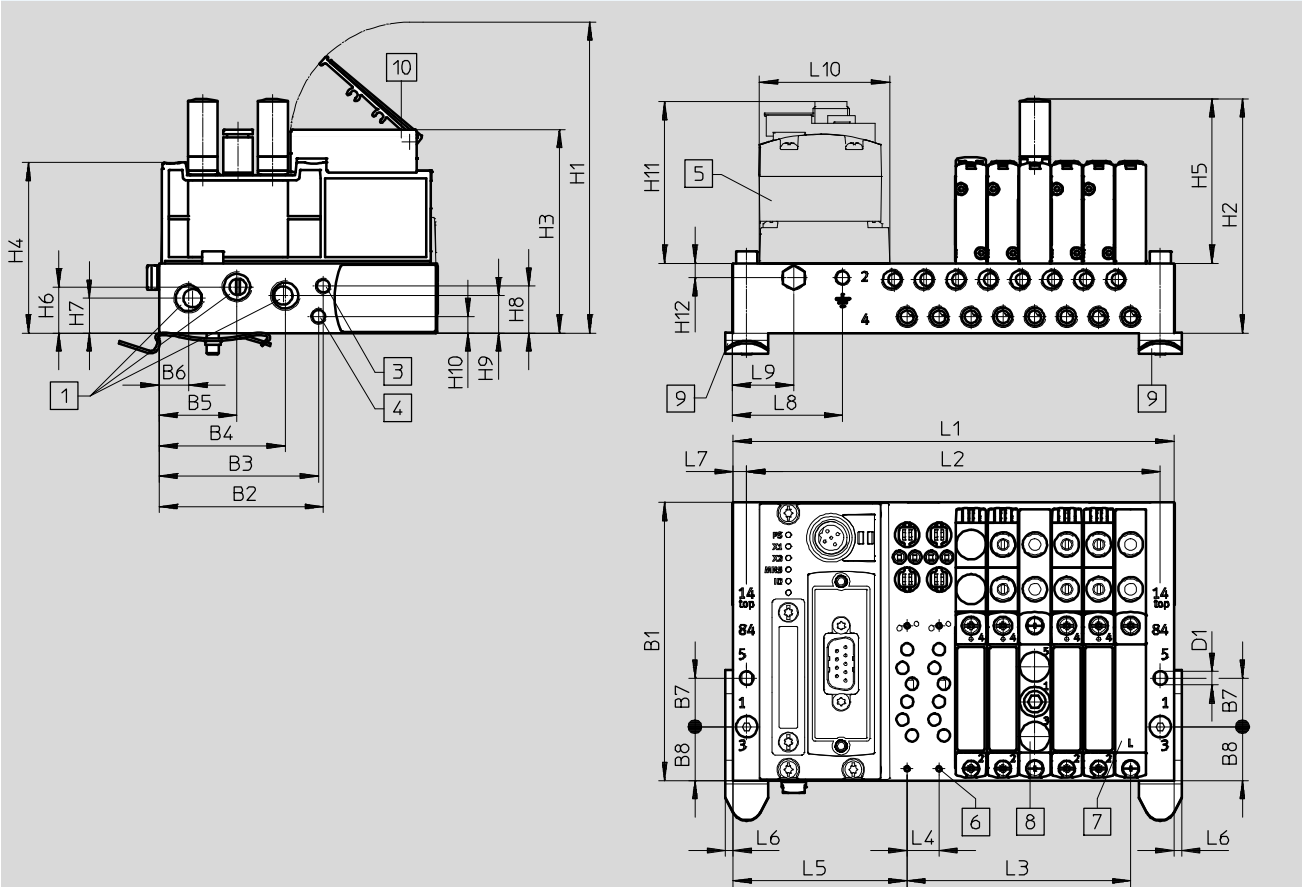

- 1 Connections 1, 3 and 5:  
size 10: G1/8 (on both ends),  
size 14: G1/4 (on both ends),  
size 18: G3/8 (on both ends)
- 2 Connections 82/84: sizes 10  
and 14: M5 (on both ends),  
size 18: G1/8 (on both ends)
- 3 Connections 12/14: sizes 10  
and 14: M5 (on both ends),  
size 18: G1/8 (on both ends)
- 4 Connections 82/84: sizes 10  
and 14: M5 (on both ends),  
size 18: G1/8 (on both ends)
- 5 CTEU-CANopen
- 6 For mounting valves/cover  
plates/supply plates to the man-  
ifold block: size 10: M2, size  
14: M2.5, size 18: M3
- 7 Blanking plate
- 8 Supply plate, connection 1, 3  
and 5: size 10: M7, size 14:  
G1/8, size 18: G1/4
- 9 H-rail mounting
- 10 Inscription label holder

Type	No. of valve positions	Size 10																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	91.5	54	52.4	41.5	25.6	9.8	16	17.7	4.5	102.3	77.1	67	56.1	54.1	15.2	11.5	15.5

Type	No. of valve positions	Size 10										
		H9	H10	H11	H12	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	12.4	5.5	54.8	4.8	10.5	57.3	2.5	4.5	36	20	42.5

Type	No. of valve positions	Size 14																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	110	70	59.3	56.5	36.5	16	20	26.5	4.5	113.1	95.1	77.7	68.6	61.3	18.7	15.7	28.7

# Valve terminals VTUG with multi-pin plug and fieldbus connection



Technical data – Manifold rail VABM

Type	No. of valve positions	Size 14										
		H9	H10	H11	H12	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	13.2	23.7	54.8	5.1	16	60.6	2	5	10	25.5	42.5

Type	No. of valve positions	Size 18																	
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8	
VABM	4-24	131	90.5	77.3	72.3	47.5	21.5	26	34	5.5	121.5	95.2	-	77.4	52.7	23.6	18.7	35.1	

Type	No. of valve positions	Size 18										
		H9	H10	H11	H12	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	14.5	27	54.8	13.8	19	63.5	2	5	10	27	42.5

Type	No. of valve positions	Size 10			Size 14			Size 18		
		L1	L2	L3	L1	L2	L3	L1	L2	L3
VABM	4	103	94	31.5	128	118	48	139.5	129.5	57
	5	113.5	104.5	42	144	134	64	158.5	148.5	76
	6	124	115	52.5	160	150	80	177.5	167.5	95
	7	134.5	125.5	63	176	166	96	196.5	186.5	114
	8	145	136	73.5	192	182	112	215.5	205.5	133
	9	155.5	146.5	84	208	198	128	234.5	224.5	152
	10	166	157	94.5	224	214	144	253.5	243.5	171
	12	187	178	115.5	256	246	176	291.5	281.5	209
	16	229	220	157.5	320	310	240	367.5	357.5	285
	20	271	262	199.5	384	374	304	443.5	433.5	361
24	313	304	241.5	448	438	368	519.5	509.5	437	


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Example of a valve terminal with I-Port interface

Download CAD data → [www.festo.com](http://www.festo.com)

Outlet orientation of electrical components to the left

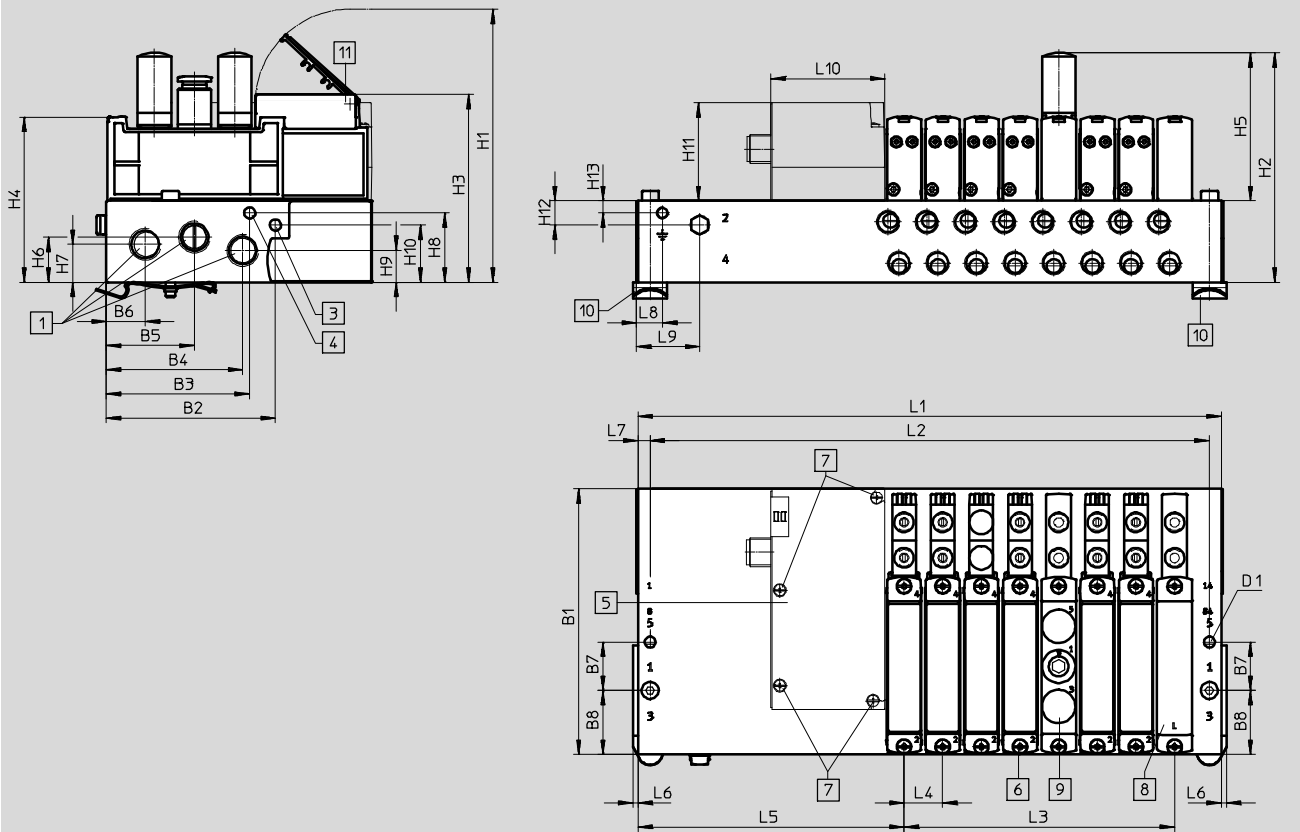

- 1** Connections 1, 3 and 5:  
size 10: G1/8 (on both ends),  
size 14: G1/4 (on both ends),  
size 18: G3/8 (on both ends)
- 2** Connections 82/84: sizes 10  
and 14: M5 (on both ends),  
size 18: G1/8 (on both ends)
- 3** Connections 12/14: sizes 10  
and 14: M5 (on both ends),  
size 18: G1/8 (on both ends)
- 4** Electrical connection, I-Port  
interface/IO-Link
- 5** Electrical connection, I-Port  
interface/IO-Link
- 6** For mounting valves/cover  
plates/supply plates to the  
manifold block: size 10: M2,  
size 14: M2.5, size 18: M3
- 7** Electrical interface
- 8** Blanking plate
- 9** Supply plate, connection 1, 3  
and 5: size 10: M7, size 14:  
G1/8, size 18: G1/4
- 10** H-rail mounting
- 11** Inscription label holder

Type	No. of valve positions	Size 10																
		B1	B2	B3	B4	B5	B6	B7	B8	D1∅	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	91.5	54	52.4	41.5	25.6	9.8	16	17.7	4.5	102.3	77.1	67	56.1	54.1	15.2	11.5	15.5

Type	No. of valve positions	Size 10											
		H9	H10	H11	H12	H13	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	12.4	5.5	40.8	10.1	5.1	10.5	106.8	2.5	4.5	36	75	47.1

Type	No. of valve positions	Size 14																
		B1	B2	B3	B4	B5	B6	B7	B8	D1∅	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	110	70	59.3	56.5	36.5	16	20	26.5	4.5	113.1	95.1	77.7	68.6	61.3	18.7	15.7	28.7

Type	No. of valve positions	Size 14											
		H9	H10	H11	H12	H13	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	13.2	23.7	40.8	10.1	5.1	16	110.1	2	5	10	75	47.1


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

Type	No. of valve positions	Size 18																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 Ø	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	131	90.5	77.3	72.3	47.5	21.5	26	34	5.5	121.5	95.2	-	77.4	52.7	23.6	18.7	35.1

Type	No. of valve positions	Size 18											
		H9	H10	H11	H12	H13	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	14.5	27	40.8	13.8	10	19	105	2	5	10	27	47.1

Type	No. of valve positions	Size 10			Size 14			Size 18		
		L1	L2	L3	L1	L2	L3	L1	L2	L3
VABM	4	152.5	143.5	31.5	177.5	167.5	48	181	171	57
	5	163	154	42	193.5	183.5	64	200	190	76
	6	173.5	164.5	52.5	209.5	199.5	80	219	209	95
	7	184	175	63	225.5	215.5	96	238	228	114
	8	194.5	185.5	73.5	241.5	231.5	112	257	247	133
	9	205	196	84	257.5	247.5	128	276	266	152
	10	215.5	206.5	94.5	273.5	263.5	144	295	285	171
	12	236.5	227.5	115.5	305.5	295.5	176	333	323	209
	16	278.5	269.5	157.5	369.5	359.5	240	409	399	285
	20	321	311.5	199.5	433.5	423.5	304	485	475	361
24	362.5	353.5	241.5	497.5	487.5	368	561	551	437	

 - Note  
 The dimensions for size 10 are the same as the dimensions for the manifold rail with interlock.




# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Example of control cabinet installation for valve terminal

Download CAD data → [www.festo.com](http://www.festo.com)

Outlet orientation of electrical components on top

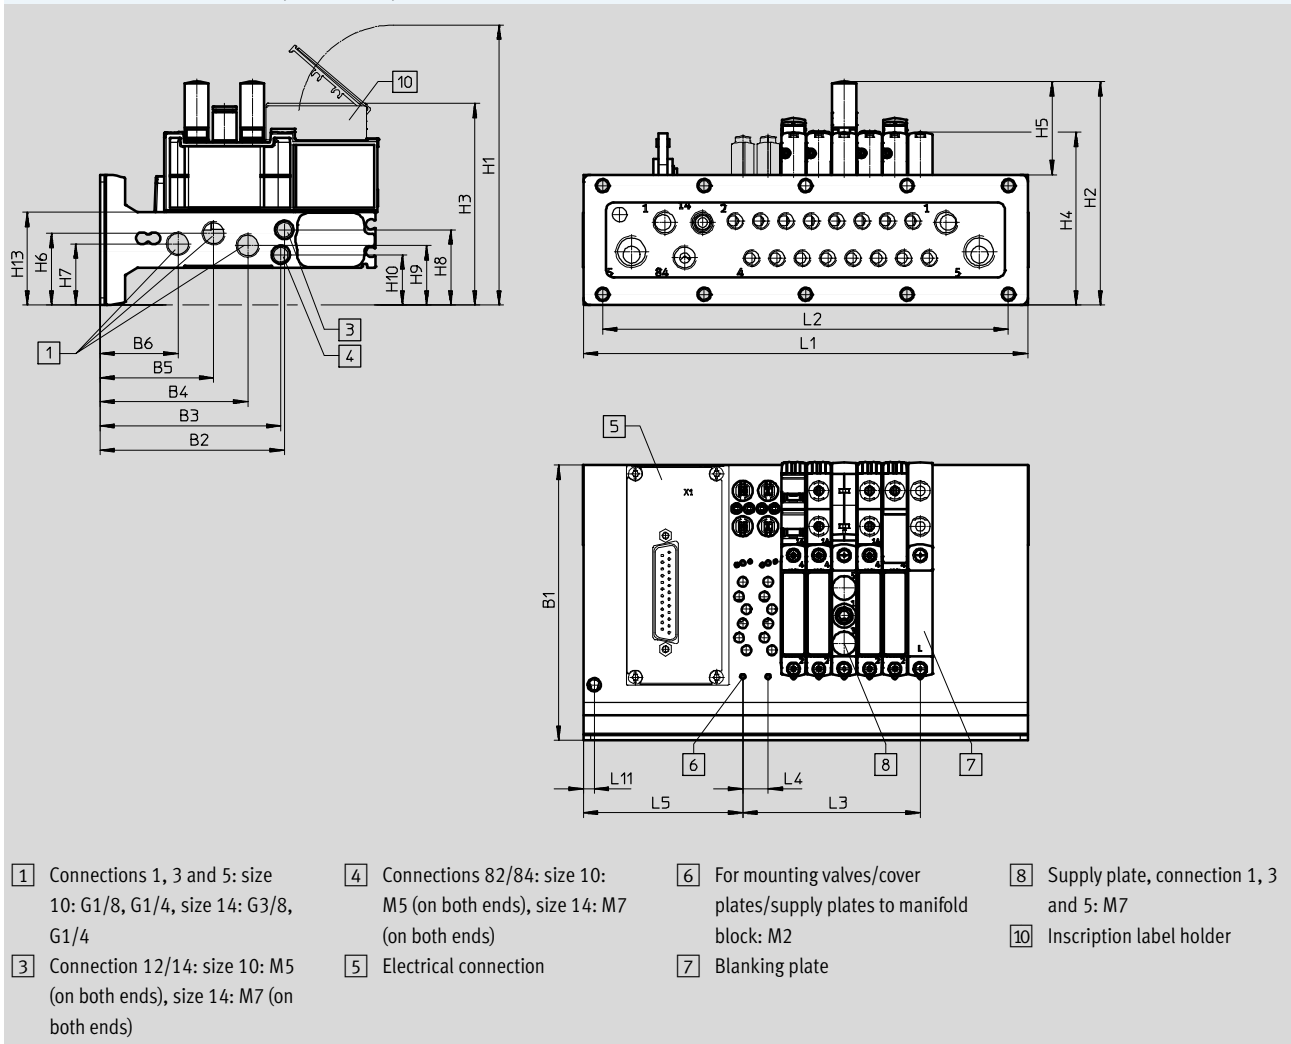

Type	No. of valve positions	Size 10									
		B1	B2	B3	B4	B5	B6	H1	H2	H3	H4
VABM	4-24	114	76.4	74.9	61.3	47.1	32.4	116	92.6	84	71.6

Type	No. of valve positions	Size 10									
		H5	H6	H7	H8	H9	H10	H13	L4	L5	L11
VABM	4-24	38.6	29.8	25.4	31.2	24.7	20.9	38.5	10.5	66	4.5

Type	No. of valve positions	Size 14									
		B1	B2	B3	B4	B5	B6	H1	H2	H3	H4
VABM	4-24	132	93	80.8	76.5	55.5	36.1	111.3	101.7	77.6	85.1

Type	No. of valve positions	Size 14									
		H5	H6	H7	H8	H9	H10	H13	L4	L5	L11
VABM	4-24	34.9	35.2	30.3	39.3	30.3	45	50.3	16	72.6	4.5

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Example of control cabinet installation for valve terminal

Download CAD data → [www.festo.com](http://www.festo.com)

Electrical outlet orientation: top, with circuit breaker function (hot swap)

1 Connections 1, 3 and 5: size 10: G1/8, G1/4, size 14: G3/8, G1/4  
 2 Connections 12/14: size 10: M5 (on both ends), size 14: M7 (on both ends)  
 3 Connection 12/14: size 10: M5 (on both ends), size 14: M7 (on both ends)  
 4 Connections 82/84: size 10: M5 (on both ends), size 14: M7 (on both ends)  
 5 Electrical connection  
 6 Blanking plate  
 7 Supply plate, connection 1, 3 and 5: M7  
 8 Inscription label holder  
 9 VTUG 10: With seal and stainless steel plate  
 10 VTUG 14: With seal and stainless steel plate, hot swap 1 and 2/4  
 11 With seal and stainless steel plate

Type	No. of valve positions	Size 10										
		B1	B2	B3	B4	B5	B6	B9	B10	B11	H1	H3
VABM	4-24	114	76.4	74.9	61.3	47.1	32.4	142	132	-	114	82

Type	No. of valve positions	Size 10										
		H6	H7	H8	H9	H10	H13	H14	H15	L4	L5	L11
VABM	4-24	29.8	25.4	20.9	24.7	31.2	38.5	-	15	10.5	66	5.5

Type	No. of valve positions	Size 14										
		B1	B2	B3	B4	B5	B6	B9	B10	B11	H1	H3
VABM	4-24	132	93	80.8	76.5	55.5	36.1	163	150.4	42	123.5	93.9

Type	No. of valve positions	Size 14										
		H6	H7	H8	H9	H10	H13	H14	H15	L4	L5	L11
VABM	4-24	35.2	30.3	45	30.3	39.3	50.3	90	15	16	72.6	5.5

## Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM





Number of valve positions	L1	L2	L3
VABM-L1-10HWS1-G18-4-GR	116.2	84	31.5
VABM-L1-10HWS1-G18-8-GR	158.2	126	73.5
VABM-L1-10HWS2-G18-8-GR	184	168	73.5
VABM-L1-10HWS2-G18-12-GR	226	210	115.5
VABM-L1-10HWS2-G18-16-GR	268	252	157.5
VABM-L1-10HWS2-G18-24-GR	352	336	241.5
VABM-L1-10HWS2-H-G18-8-GR	184	168	73.5
VABM-L1-10HWS2-H-G18-12-GR	226	210	115.5
VABM-L1-10HWS2-H-G18-16-GR	268	252	157.5
VABM-L1-10HWS2-H-G18-24-GR	352	336	241.5
VABM-L1-14HWS1-G14-4-GR	135	64	48
VABM-L1-14HWS1-G14-8-GR	199	128	112
VABM-L1-14HWS2-G14-8-GR	234	192	112
VABM-L1-14HWS2-G14-12-GR	298	256	176
VABM-L1-14HWS2-G14-16-GR	362	320	240
VABM-L1-14HWS2-G14-24-GR	490	448	368
VABM-L1-14HWS2-H-G14-8-GR	234	192	112
VABM-L1-14HWS2-H-G14-12-GR	298	256	176
VABM-L1-14HWS2-H-G14-16-GR	362	320	240
VABM-L1-14HWS2-H-G14-24-GR	490	448	368

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Manifold rail outlet orientation: front

Download CAD data → [www.festo.com](http://www.festo.com)

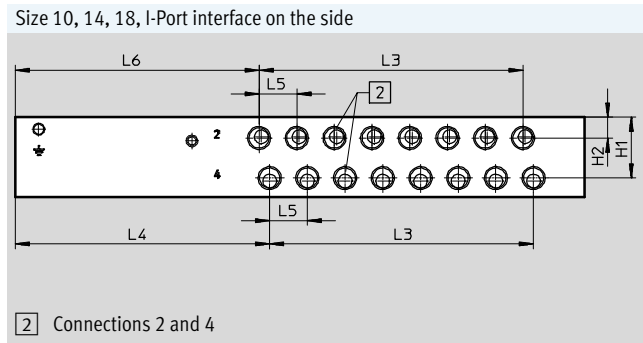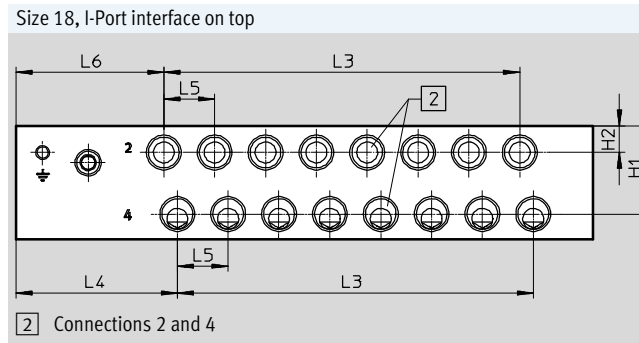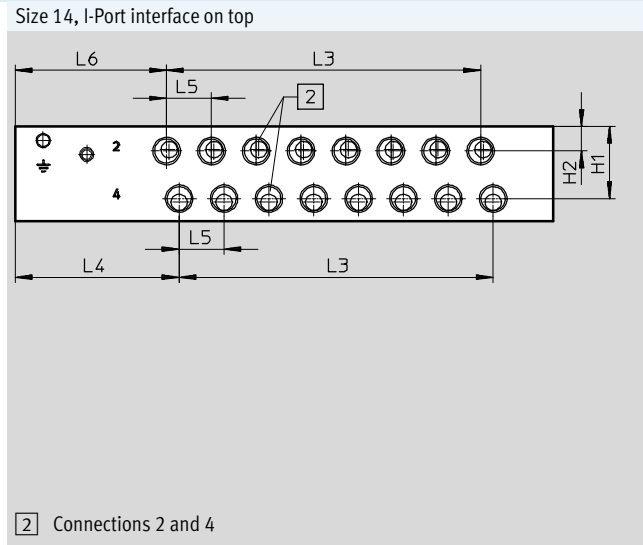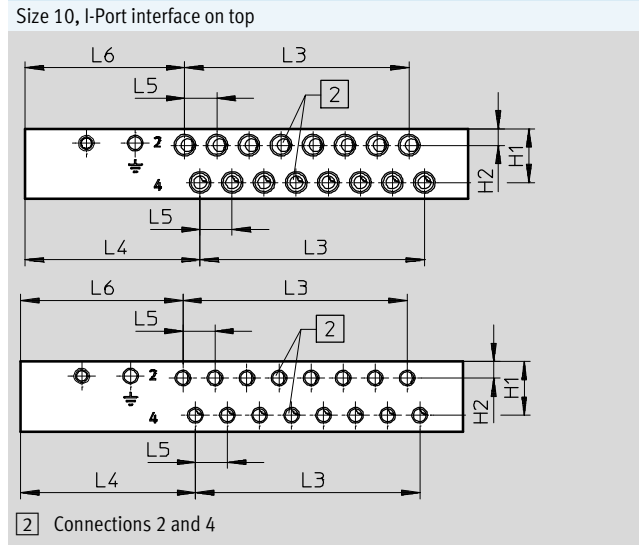

Size	Connections 2 and 4	Manifold rail with I-Port interface on top				
		H1	H2	L4	L5	L6
10	M7 thread	17.6	5.4	57.3	10.5	52.3
	M5 thread					53.2
14	Thread G1/8	25.8	8.8	58.5	16	54
18	Thread G1/4	33	10	60.3	19	55.3

Size	Connections 2 and 4	Manifold rail with I-Port interface on the side				
		H1	H2	L4	L5	L6
10	M7 thread	17.6	5.4	106.8	10.5	101.8
	M5 thread					102.7
14	Thread G1/8	25.8	8.8	108	16	103.5
18	Thread G1/4	33	10	101.8	19	96.8

## Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

Type	Number of valve positions	Size 10	Size 14	Size 18
		L3	L3	L3
VABM	4	31.5	48	57
	5	42	64	76
	6	52.5	80	95
	7	63	96	114
	8	73.5	112	133
	9	84	128	152
	10	94.5	144	171
	12	115.5	176	209
	16	157.5	240	285
	20	199.5	304	361
	24	241.5	368	437

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

Dimensions – Manifold rail outlet orientation underneath Download CAD data → [www.festo.com](http://www.festo.com)  
Control cabinet installation

Note  
Dimensions of the manifold rail with I-Port interface on the side for control cabinet installation  
→ page 183

1 Connections 1, 3 and 5: size 10: G1/8, size 14: G1/4, size 18: G3/8  
2 Connections 2 and 4: size 10: M5/M7, size 14: G1/8, size 18: G1/4  
3 Connections 82/84: size 10 and 14: M5, size 18: G1/8  
4 Connections 12/14: size 10 and 14: M5, size 18: G1/8  
5 Mounting holes, outlet orientation underneath M4x8

Type	Manifold rail with I-Port interface on top, size 10										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	41	31.8	27	20	13	58.8	10.5	55.7	42.3	32.3	4.5

Type	Manifold rail with I-Port interface on top, size 14										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	53.5	45.1	35.2	27.8	17	58.5	16	58.5	43	33	5

Type	Manifold rail with I-Port interface on top, size 18										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	75	59.5	48.5	35.7	22	60.3	19	60.3	40	40	5

Type	No. of valve positions	Size 10			Size 14			Size 18		
		L1 +5	L2 +5	L3	L1	L2	L3	L1	L2	L3
VABM	4	103	94	31.5	128	118	48	139.5	129.5	57
	5	113.5	104.5	42	144	134	64	158.5	148.5	76
	6	124	115	52.5	160	150	80	177.5	167.5	95
	7	134.5	125.5	63	176	166	96	196.5	186.5	114
	8	145	136	73.5	192	182	112	215.5	205.5	133
	9	155.5	146.5	84	208	198	128	234.5	224.5	152
	10	166	157	94.5	224	214	144	253.5	243.5	171
	12	187	178	115.5	256	246	176	291.5	281.5	209
	16	229	220	157.5	320	310	240	367.5	357.5	285
	20	271	262	199.5	384	374	304	443.5	433.5	361
24	313	304	241.5	448	438	368	519.5	509.5	437	

## Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Technical data – Manifold rail VABM

Type	Manifold rail with I-Port interface, size 10										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	41	31.8	27	20	13	108.3	10.5	105.2	91.8	81.8	4.5

Type	Manifold rail with I-Port interface, size 14										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	53.5	45.1	35.2	27.8	17	108	16	108	92.5	82.5	5

Type	Manifold rail with I-Port interface, size 18										
	B1	B2	B3	B4	B5	L4	L5	L6	L7	L8	L9
VABM	75	59.5	48.5	35.7	22	101.8	19	101.8	81.5	81.5	5

Type	No. of valve positions	Manifold rail with I-Port interface Size 10			Manifold rail with I-Port interface Size 14			Manifold rail with I-Port interface Size 18		
		L1 +5	L2 +5	L3	L1	L2	L3	L1	L2	L3
		VABM	4	152.5	143.5	31.5	177.5	167.5	48	181
	5	163	154	42	193.5	183.5	64	200	190	76
	6	173.5	164.5	52.5	209.5	199.5	80	219	209	95
	7	184	175	63	225.5	215.5	96	238	228	114
	8	194.5	185.5	73.5	241.5	231.5	112	257	247	133
	9	205	196	84	257.5	247.5	128	276	266	152
	10	215.5	206.5	94.5	273.5	263.5	144	295	285	171
	12	236.5	227.5	115.5	305.5	295.5	176	333	323	209
	16	278.5	269.5	157.5	369.5	359.5	240	409	399	285
	20	320.5	311.5	199.5	433.5	423.5	304	485	475	361
	24	362.5	353.5	241.5	497.5	487.5	368	561	551	437

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Manifold rail outlet orientation: front

Download CAD data → [www.festo.com](http://www.festo.com)

Switch cabinet installation/switch cabinet installation with circuit breaker function (hot swap)

1 Connections 1, 3 and 5: size 10: G1/8, size 14: G1/4  
 2 Connections 2 and 4: size 10: M5/M7, size 14: G1/8  
 3 Connections 82/84: size 10 and 14: M5  
 4 Connections 12/14: size 10 and 14: M5  
 5 Mounting holes, outlet orientation underneath: M5

Type	Size 10															
	B1	B2	B3	B4	B5	B6	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13
VABM-L1-10HWS1	111.5	73.9	72.4	58.8	44.6	29.9	69.8	10.5	63	33.8	20	42	49.4	33.8	20	16.1
VABM-L1-10HWS2																8

Type	Size 10								
	H1	H2	H3	H4	H5	H6	H7	H8	H9
VABM-L1-10HWS1	54	15.5	23	31.9	19.8	19.8	34.3	34.5	19.1
VABM-L1-10HWS2									

Type	Size 14															
	B1	B2	B3	B4	B5	B6	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13
VABM-L1-14HWS1	130	91	78.8	74.5	53.5	34.1	69.8	16	96.2	51.5	39.5	33	18	34	22	35.5
VABM-L1-14HWS2																21

Type	Size 14								
	H1	H2	H3	H4	H5	H6	H7	H8	H9
VABM-L1-14HWS1	66.8	16.5	33.8	42.6	26.9	24	22	45.5	24.8
VABM-L1-14HWS2									



## Valve terminals VTUG with multi-pin plug and fieldbus connection


Technical data – Manifold rail VABM

Number of valve positions	L1	L2	L3	L13
VABM-L1-10HWS1-G18-4-GR	116.2	84	31.5	16.1
VABM-L1-10HWS1-G18-8-GR	158.2	126	73.5	16.1
VABM-L1-10HWS2-G18-8-GR	184	168	73.5	8
VABM-L1-10HWS2-G18-12-GR	226	210	115.5	8
VABM-L1-10HWS2-G18-16-GR	268	252	157.5	8
VABM-L1-10HWS2-G18-24-GR	352	336	241.5	8
VABM-L1-10HWS2-H-G18-8-GR	184	168	73.5	8
VABM-L1-10HWS2-H-G18-8-GR	226	210	115.5	8
VABM-L1-10HWS2-H-G18-8-GR	268	252	157.5	8
VABM-L1-10HWS2-H-G18-8-GR	352	336	241.5	8
VABM-L1-14HWS1-G14-4-GR	135	64	48	35.5
VABM-L1-14HWS1-G14-8-GR	199	128	112	35.5
VABM-L1-14HWS2-G14-8-GR	234	192	112	21
VABM-L1-14HWS2-G14-12-GR	298	256	176	21
VABM-L1-14HWS2-G14-16-GR	362	320	240	21
VABM-L1-14HWS2-G14-24-GR	490	448	368	21
VABM-L1-14HWS2-H-G14-8-GR	234	192	112	21
VABM-L1-14HWS2-H-G14-12-GR	298	256	176	21
VABM-L1-14HWS2-H-G14-16-GR	362	320	240	21
VABM-L1-14HWS2-H-G14-24-GR	490	448	368	21


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Recess for control cabinet installation, outlet orientation underneath, size 10

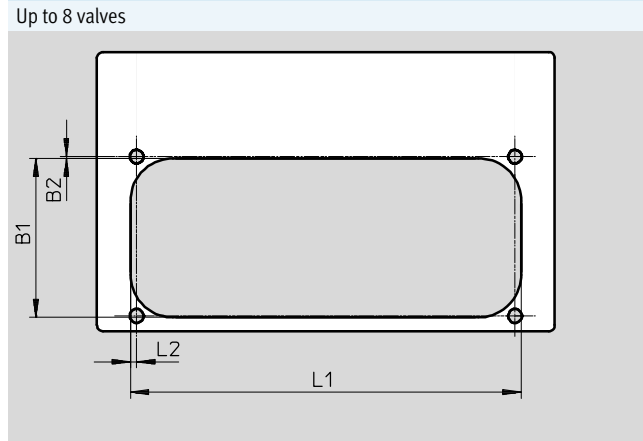


Type	B1	B2	L1	L2
VABM-L1-10...G18-4	52.7	0.5	86	2
VABM-L1-10...G18-5			96.5	
VABM-L1-10...G18-6			107	
VABM-L1-10...G18-7			117.5	
VABM-L1-10...G18-8			128	

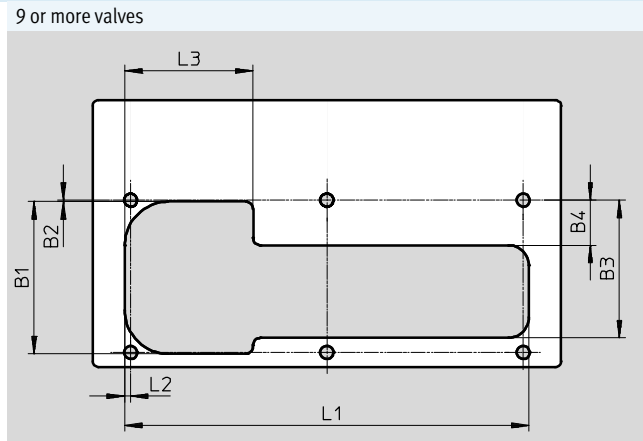


Type	B1	B2	B3	B4	L1	L2	L3		
VABM-L1-10...G18-9	52.7	0.5	47.2	15.4	138.5	2	44		
VABM-L1-10...G18-10					149				
VABM-L1-10...G18-12					170				
VABM-L1-10...G18-16					212				
VABM-L1-10...G18-20					254				
VABM-L1-10...G18-24					296				

## Dimensions – Recess for control cabinet installation, outlet orientation underneath, size 14

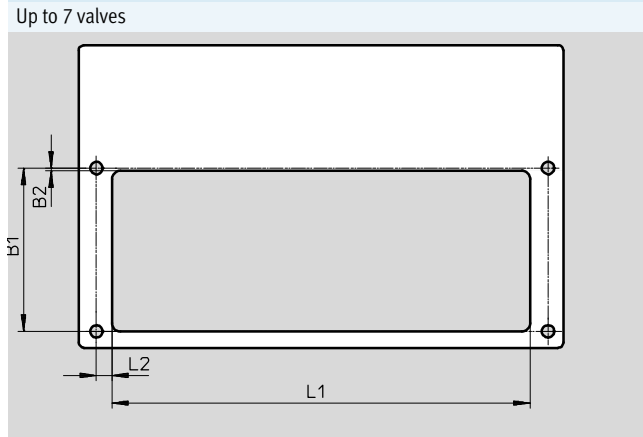

Type	B1	B2	L1	L2
VABM-L1-14...G14-4	59.3	1	103.9	5.6
VABM-L1-14...G14-5			119.9	
VABM-L1-14...G14-6			135.9	
VABM-L1-14...G14-7			151.9	

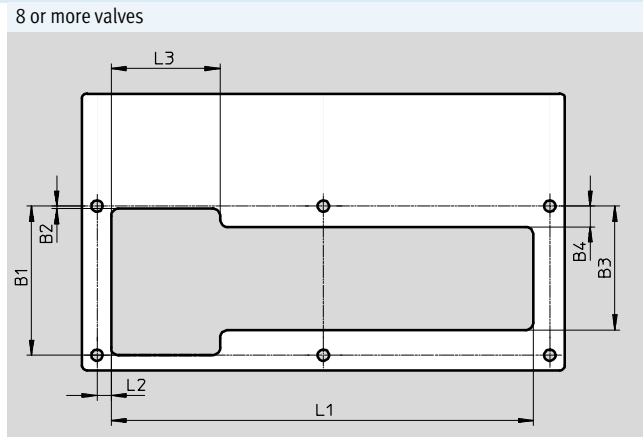


Type	B1	B2	B3	B4	L1	L2	L3
VABM-L1-14...G14-8	59.3	1	49.3	8.3	167.9	5.6	43.4
VABM-L1-14...G14-9					183.9		
VABM-L1-14...G14-10					199.9		
VABM-L1-14...G14-12					231.9		
VABM-L1-14...G14-16					295.9		
VABM-L1-14...G14-20					359.9		
VABM-L1-14...G14-24					423.9		

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

Dimensions – Recess for control cabinet installation, outlet orientation underneath, size 18

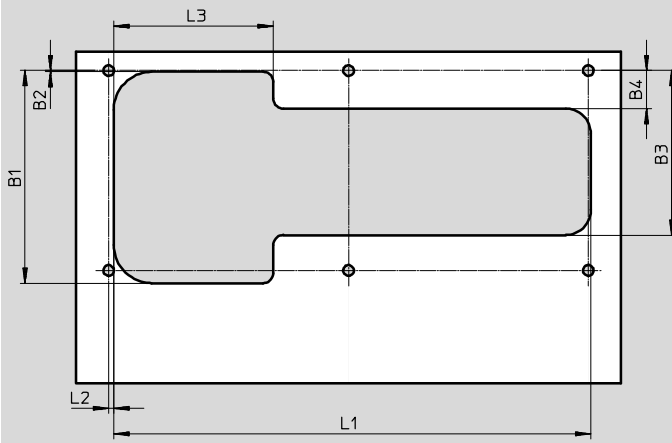


Type	B1	B2	B3	B4	L1	L2	L3
VABM-L1-18...G38-4	83.5	0.5	65	15	112.5	2	63
VABM-L1-18...G38-5					131.5		
VABM-L1-18...G38-6					150.5		
VABM-L1-18...G38-7					169.5		
VABM-L1-18...G38-8					188.5		
VABM-L1-18...G38-9					207.5		
VABM-L1-18...G38-10					226.5		
VABM-L1-18...G38-12					264.5		
VABM-L1-18...G38-16					340.5		
VABM-L1-18...G38-20					416.5		
VABM-L1-18...G38-24					492.5		

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM


## Dimensions – Recess for control cabinet installation, outlet direction: front, size 10

Single feed, up to 8-fold

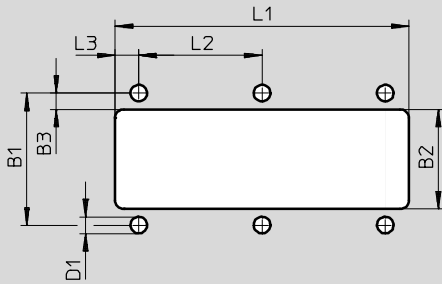

Type	B1	B2	B3	D1	L1	L2	L3
VABM-L1-10HWS1-G18-4-GR	45	34	5.5	5.7	100.2	42	8.1
VABM-L1-10HWS1-G18-8-GR					143.2		


Double feed, as of 8-fold

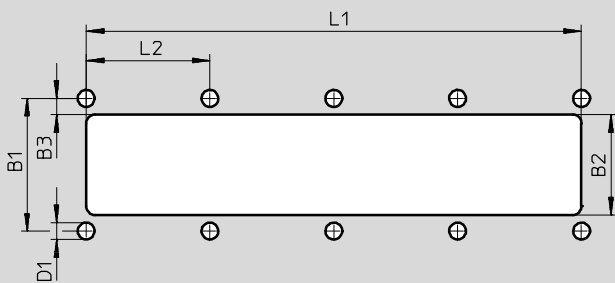

Type	B1	B2	B3	D1	L1	L2
VABM-L1-10HWS2-...G18-8-GR	45	34	5.5	5.7	168	42
VABM-L1-10HWS2-...G18-12-GR					210	
VABM-L1-10HWS2-...G18-16-GR					252	
VABM-L1-10HWS2-...G18-24-GR					336	

## Dimensions – Recess for control cabinet installation, outlet orientation: front, size 14

Single feed, up to 8-fold

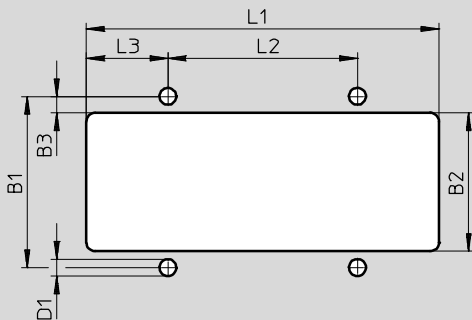


Type	B1	B2	B3	D1	L1	L2	L3
VABM-L1-14HWS1-G14-4-GR	57.8	46.8	5.5	5.7	119	64	27.5
VABM-L1-14HWS1-G14-8-GR					183		

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

## Dimensions – Recess for control cabinet installation, outlet orientation: front, size 14

Double feed, as of 8-fold

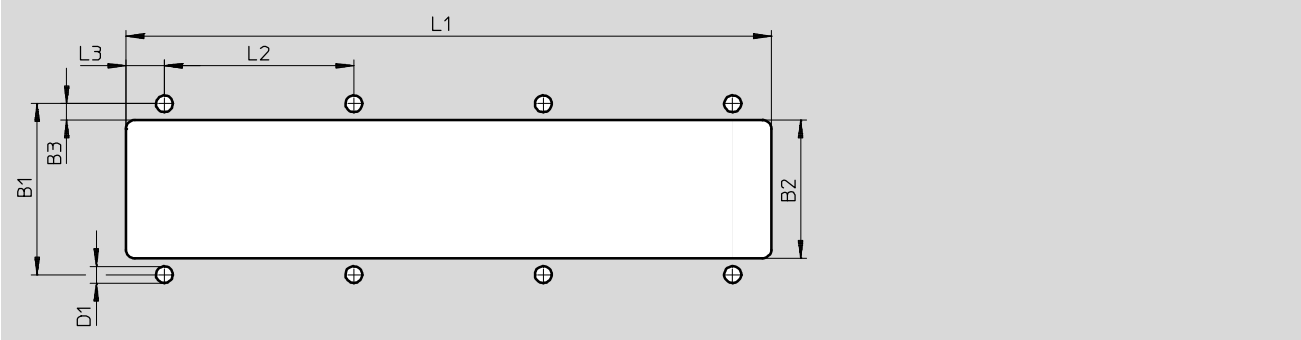


Type	B1	B2	B3	D1	L1	L2	L3
VABM-L1-14HWS2-G14-...-8-GR	57.8	46.8	5.5	5.7	218	64	13
VABM-L1-14HWS2-G14-...-12-GR					282		
VABM-L1-14HWS2-G14-...-16-GR					346		
VABM-L1-14HWS2-G14-...-24-GR					474		

## Dimensions – Mounting holes for control cabinet installation, size 10

Download CAD data → [www.festo.com](http://www.festo.com)

Outlet orientation underneath

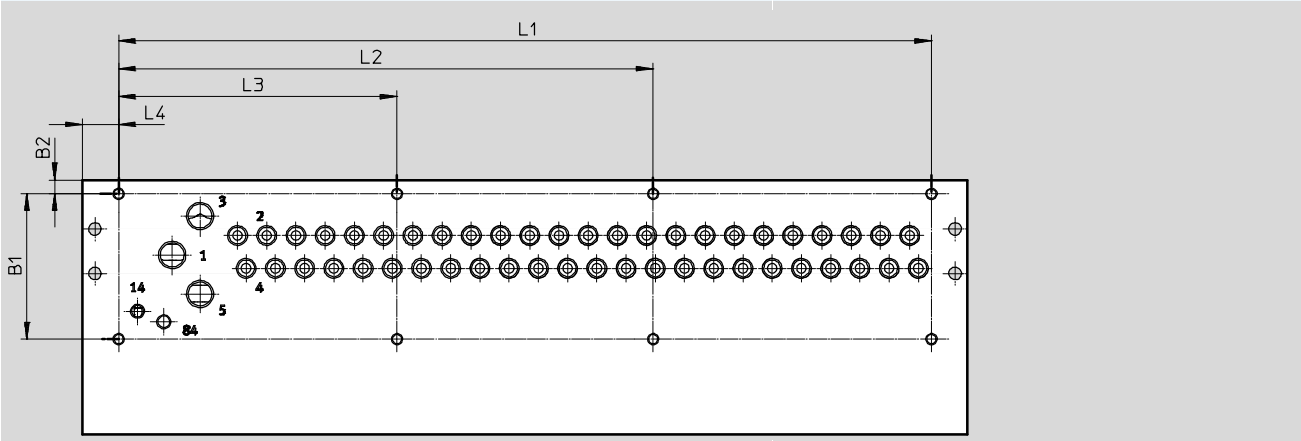


Type		Outlet orientation of electrical components on top						I-Port interface on the side
		B1	B2	L1	L2	L3	L4	L4
VABM-L1-10...-G18-4	Up to 8 valves	52.2	5	82	-	-	13	62.5
VABM-L1-10...-G18-5				92.5	-	-		
VABM-L1-10...-G18-6				103	-	-		
VABM-L1-10...-G18-7				113.5	-	-		
VABM-L1-10...-G18-8				124	-	-		
VABM-L1-10...-G18-9	Up to 20 valves	52.2	5	134.5	-	67.25	13	62.5
VABM-L1-10...-G18-10				145	-	72.5		
VABM-L1-10...-G18-12				166	-	83		
VABM-L1-10...-G18-16				208	-	104		
VABM-L1-10...-G18-20				250	-	125		
VABM-L1-10...-G18-24	24 valves	52.2	5	292	192	100	13	62.5

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM


**Dimensions – Mounting holes for control cabinet installation, size 10** Download CAD data → [www.festo.com](http://www.festo.com)  
 Outlet orientation: front

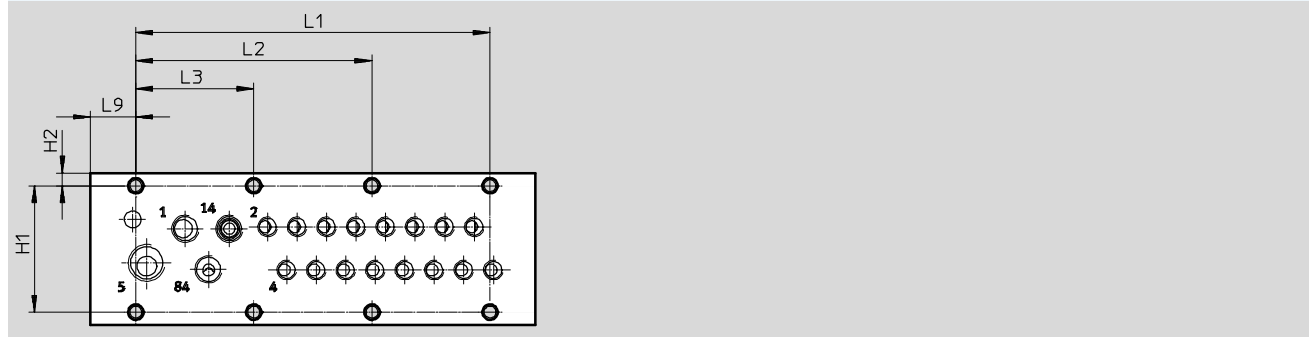

Type	H1	H2	L1	L2	L3	L9
VABM-L1-10HWS1-G18-4-GR	45	4.5	84	–	42	16.1
VABM-L1-10HWS1-G18-8-GR	45	4.5	126	84	42	16.1

Type	No. of valve positions	No. of mounting holes
VABM-L1-10HWS1-G18-4-GR	4	3
VABM-L1-10HWS1-G18-8-GR	8	4

**Dimensions – Mounting holes for control cabinet installation, size 10** Download CAD data → [www.festo.com](http://www.festo.com)  
 Outlet orientation: front

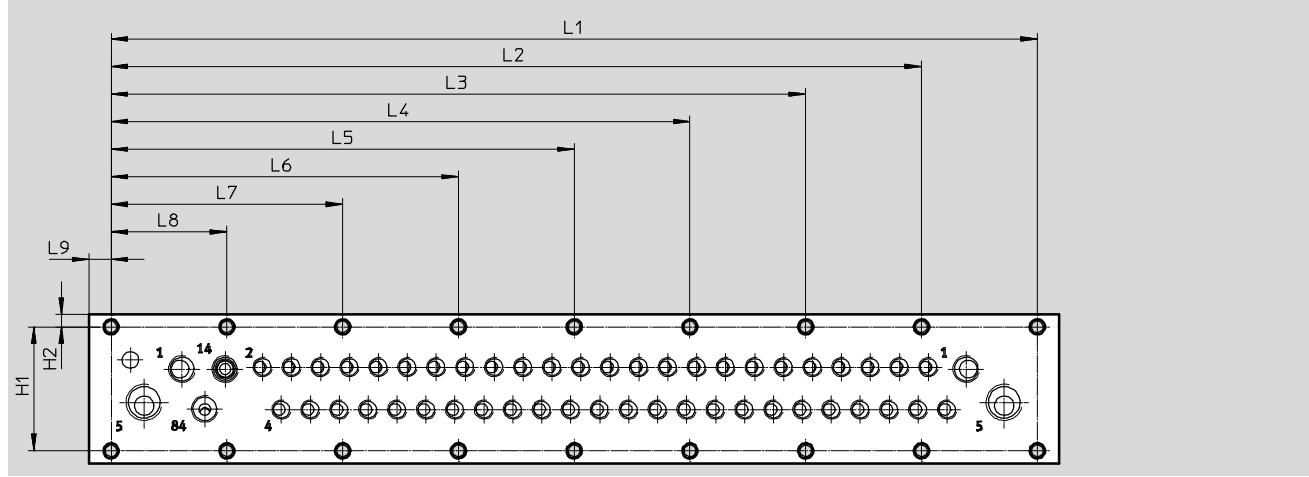

Type	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
VABM-L1-10HWS2-...-8-GR	45	4.5	168	–	–	–	–	126	84	42	8
VABM-L1-10HWS2-...-12-GR	45	4.5	210	–	–	–	168	126	84	42	8
VABM-L1-10HWS2-...-16-GR	45	4.5	252	–	–	210	168	126	84	42	8
VABM-L1-10HWS2-...-24-GR	45	4.5	336	294	252	210	168	126	84	42	8

Type	No. of valve positions	No. of mounting holes
VABM-L1-10HWS2-...-8-GR	8	5
VABM-L1-10HWS2-...-12-GR	12	6
VABM-L1-10HWS2-...-16-GR	16	7
VABM-L1-10HWS2-...-24-GR	24	9


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

**Dimensions – Mounting holes for control cabinet installation, size 14**

Download CAD data → [www.festo.com](http://www.festo.com)

Outlet orientation underneath

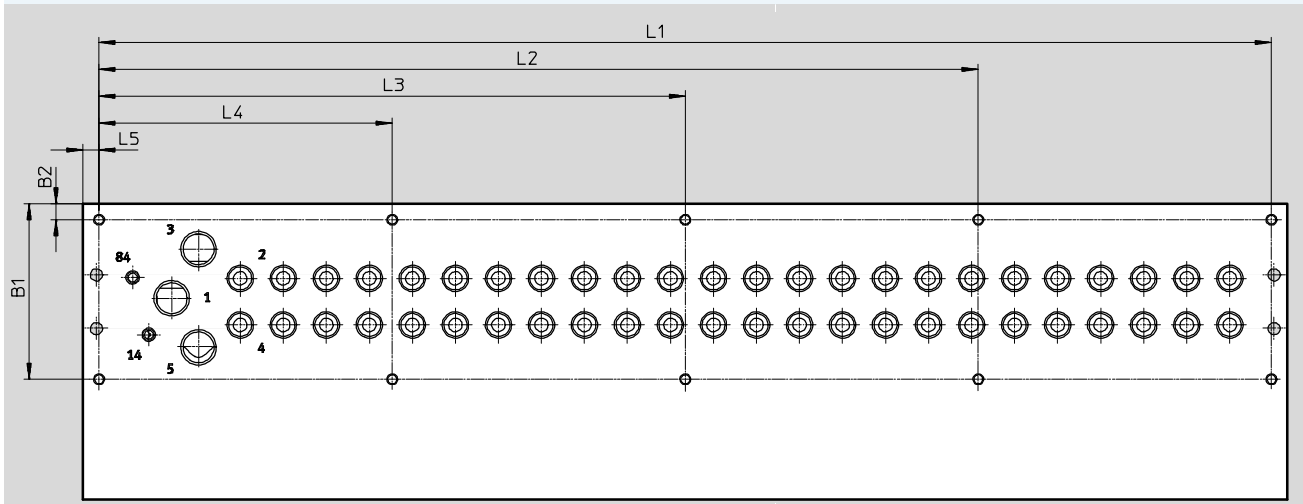


Type		Outlet orientation of electrical components on top							I-Port interface on the side
		B1	B2	L1	L2	L3	L4	L5	L4
VABM-L1-14...-G14-4	Up to 8 valves	59.3	6	116	-	-	-	6	55.5
VABM-L1-14...-G14-5				132	-	-	-		
VABM-L1-14...-G14-6				148	-	-	-		
VABM-L1-14...-G14-7				164	-	-	-		
VABM-L1-14...-G14-8	8 to 10 valves	59.3	6	180	-	-	90	6	55.5
VABM-L1-14...-G14-9				196	-	-	98		
VABM-L1-14...-G14-10				212	-	-	106		
VABM-L1-14...-G14-12	12 valves and 16 valves	59.3	6	244	-	162	82	6	55.5
VABM-L1-14...-G14-16				308	-	204	104		
VABM-L1-14...-G14-20	20 valves and 24 valves	59.3	6	372	279	186	93	6	55.5
VABM-L1-14...-G14-24				436	327	218	109		

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM


**Dimensions – Mounting holes for control cabinet installation, size 14** Download CAD data → [www.festo.com](http://www.festo.com)

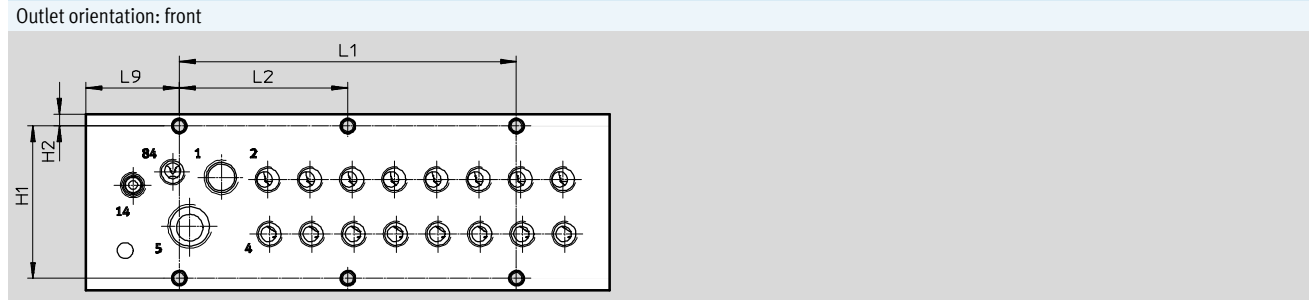

Type	H1	H2	L1	L2	L9
VABM-L1-14HWS1-G14-4-GR	57.8	4.5	64	–	35.5
VABM-L1-14HWS1-G14-8-GR	57.8	4.5	128	64	35.5

Type	No. of valve positions	No. of mounting holes
VABM-L1-14HWS1-G14-4-GR	4	2
VABM-L1-14HWS1-G14-8-GR	8	3

**Dimensions – Mounting holes for control cabinet installation, size 14** Download CAD data → [www.festo.com](http://www.festo.com)

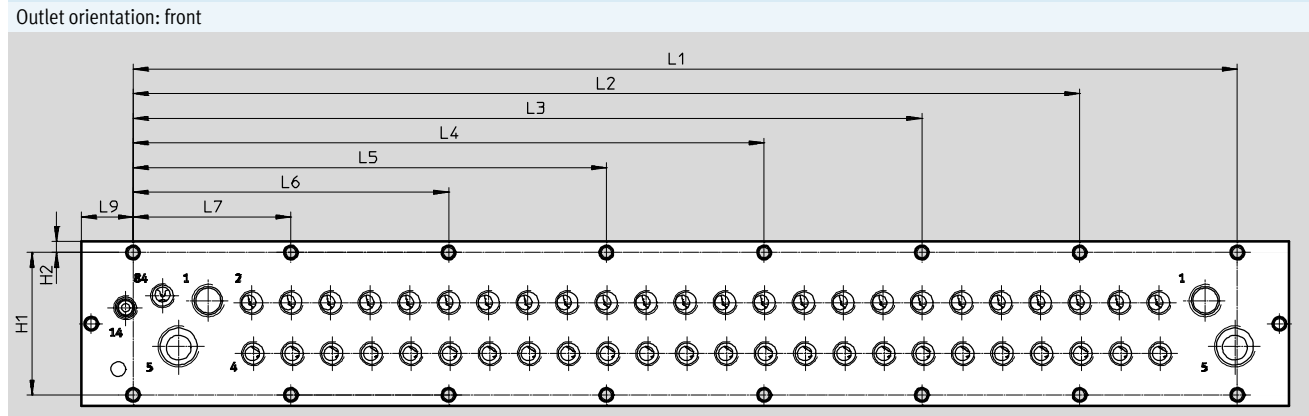

Type	H1	H2	L1	L2	L3	L4	L5	L6	L7	L9
VABM-L1-14HWS2-...-8-GR	57.8	4.5	192	–	–	–	–	128	64	21
VABM-L1-14HWS2-...-12-GR	57.8	4.5	256	–	–	–	192	128	64	21
VABM-L1-14HWS2-...-16-GR	57.8	4.5	320	–	–	256	192	128	64	21
VABM-L1-14HWS2-...-24-GR	57.8	4.5	448	384	320	256	192	128	64	21

Type	No. of valve positions	No. of mounting holes
VABM-L1-14HWS2-...-8-GR	8	4
VABM-L1-14HWS2-...-12-GR	12	5
VABM-L1-14HWS2-...-16-GR	16	6
VABM-L1-14HWS2-...-24-GR	24	8




# Valve terminals VTUG with multi-pin plug and fieldbus connection

Technical data – Manifold rail VABM

**Dimensions – Mounting holes for control cabinet installation, size 18**

Download CAD data → [www.festo.com](http://www.festo.com)

Outlet orientation underneath

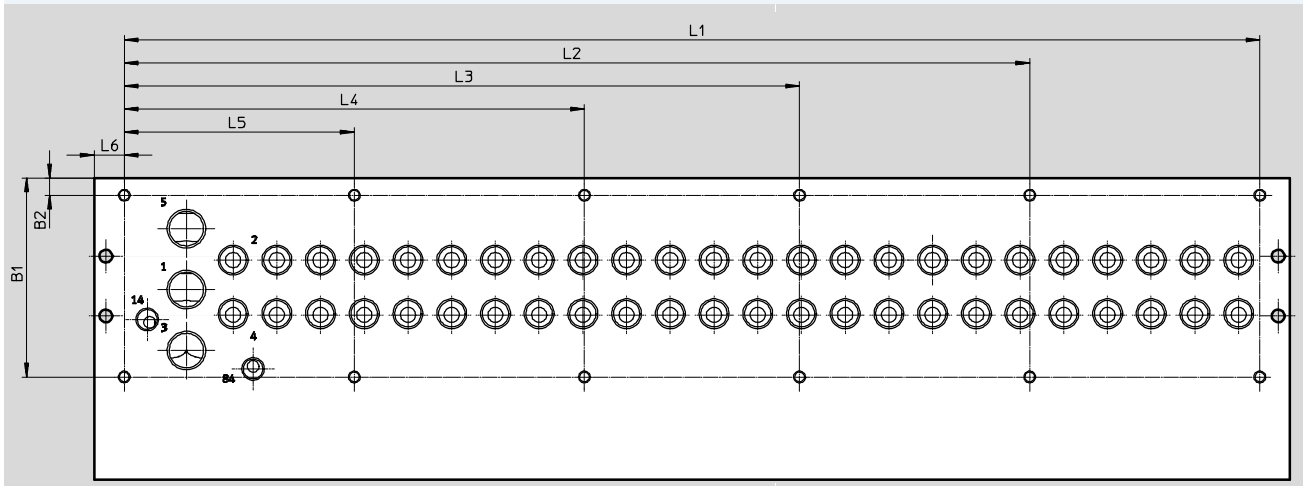


Type		Outlet orientation of electrical components							I-Port interface on the side
		B1	B2	L1	L2	L3	L4	L5	L4
VABM-L1-18...-G38-4	4 valves and 5 valves	86.5	7.5	113.5	-	-	-	-	54.5
VABM-L1-18...-G38-5				132.5	-	-	-	-	
VABM-L1-18...-G38-6	6 to 10 valves	86.5	7.5	151.5	-	-	-	75.8	54.5
VABM-L1-18...-G38-7				170.5	-	-	-	85.3	
VABM-L1-18...-G38-8				189.5	-	-	-	94.8	
VABM-L1-18...-G38-9				208.5	-	-	-	104.3	
VABM-L1-18...-G38-10				227.5	-	-	-	113.8	
VABM-L1-18...-G38-12	12 valves	86.5	7.5	265.5	-	-	165.5	100	54.5
VABM-L1-18...-G38-16	16 to 20 positions	86.5	7.5	341.5	-	-	170.8	100	54.5
VABM-L1-18...-G38-20				417.5	-	317.5	208.8	100	
VABM-L1-18...-G38-24	24 valves	86.5	7.5	493.5	393.5	293.5	200	100	54.5

# Valve terminals VTUG with multi-pin plug and fieldbus connection


FESTO

Ordering data

Ordering data				
	Description	Part no.	Type	
<b>Manifold rail for semi in-line valve</b>				
	Size 10 mm			
	Connections 2, 4 on the valve	4 valve positions	573423	VABM-L1-10G-G18-4-GR
		5 valve positions	573424	VABM-L1-10G-G18-5-GR
		6 valve positions	573425	VABM-L1-10G-G18-6-GR
		7 valve positions	573426	VABM-L1-10G-G18-7-GR
		8 valve positions	573427	VABM-L1-10G-G18-8-GR
		9 valve positions	573428	VABM-L1-10G-G18-9-GR
		10 valve positions	573429	VABM-L1-10G-G18-10-GR
		12 valve positions	573430	VABM-L1-10G-G18-12-GR
		16 valve positions	573431	VABM-L1-10G-G18-16-GR
		20 valve positions	573432	VABM-L1-10G-G18-20-GR
		24 valve positions	573433	VABM-L1-10G-G18-24-GR
		8 double solenoid + 8 single solenoid valves	573927	VABM-L1-10G-G18-16-M-GR
		4 bistable + 16 single solenoid valves	573928	VABM-L1-10G-G18-20-M-GR
		24 monostable valves	573929	VABM-L1-10G-G18-24-M-GR
	Size 14 mm			
	Connections 2, 4 on the valve	4 valve positions	573489	VABM-L1-14G-G14-4-GR
		5 valve positions	573490	VABM-L1-14G-G14-5-GR
		6 valve positions	573491	VABM-L1-14G-G14-6-GR
		7 valve positions	573492	VABM-L1-14G-G14-7-GR
		8 valve positions	573493	VABM-L1-14G-G14-8-GR
		9 valve positions	573494	VABM-L1-14G-G14-9-GR
		10 valve positions	573495	VABM-L1-14G-G14-10-GR
		12 valve positions	573496	VABM-L1-14G-G14-12-GR
		16 valve positions	573497	VABM-L1-14G-G14-16-GR
		20 valve positions	573498	VABM-L1-14G-G14-20-GR
		24 valve positions	573499	VABM-L1-14G-G14-24-GR
		8 double solenoid + 8 single solenoid valves	573933	VABM-L1-14G-G14-16-M-GR
		4 bistable + 16 single solenoid valves	573934	VABM-L1-14G-G14-20-M-GR
		24 monostable valves	573935	VABM-L1-14G-G14-24-M-GR
	Size 18 mm			
	Connections 2, 4 on the valve	4 valve positions	8004899	VABM-L1-18G-G38-4-G
		5 valve positions	8004900	VABM-L1-18G-G38-5-G
		6 valve positions	8004901	VABM-L1-18G-G38-6-G
		7 valve positions	8004902	VABM-L1-18G-G38-7-G
		8 valve positions	8004903	VABM-L1-18G-G38-8-G
		9 valve positions	8004904	VABM-L1-18G-G38-9-G
		10 valve positions	8004905	VABM-L1-18G-G38-10-G
		12 valve positions	8004906	VABM-L1-18G-G38-12-G
		16 valve positions	8004907	VABM-L1-18G-G38-16-G
		20 valve positions	8004908	VABM-L1-18G-G38-20-G
24 valve positions		8004909	VABM-L1-18G-G38-24-G	
8 double solenoid + 8 single solenoid valves		8004910	VABM-L1-18G-G38-16-M-G	
4 double solenoid + 16 single solenoid valves		8004911	VABM-L1-18G-G38-20-M-G	
24 single solenoid valves		8004912	VABM-L1-18G-G38-24-M-G	


# Valve terminals VTUG with multi-pin plug and fieldbus connection

Ordering data

Ordering data				
	Description	Part no.	Type	
Manifold rail for sub-base valve				
	Size 10 mm			
	Connections 2, 4 at front	4 valve positions	573434	VABM-L1-10HW-G18-4-GR
		5 valve positions	573435	VABM-L1-10HW-G18-5-GR
		6 valve positions	573436	VABM-L1-10HW-G18-6-GR
		7 valve positions	573437	VABM-L1-10HW-G18-7-GR
		8 valve positions	573438	VABM-L1-10HW-G18-8-GR
		9 valve positions	573439	VABM-L1-10HW-G18-9-GR
		10 valve positions	573440	VABM-L1-10HW-G18-10-GR
		12 valve positions	573441	VABM-L1-10HW-G18-12-GR
		16 valve positions	573442	VABM-L1-10HW-G18-16-GR
		20 valve positions	573443	VABM-L1-10HW-G18-20-GR
		24 valve positions	573444	VABM-L1-10HW-G18-24-GR
		8 double solenoid + 8 single solenoid valves	573930	VABM-L1-10HW-G18-16-M-GR
		4 bistable + 16 single solenoid valves	573931	VABM-L1-10HW-G18-20-M-GR
	24 monostable valves	573932	VABM-L1-10HW-G18-24-M-GR	
	Size 14 mm			
	Connections 2, 4 at front	4 valve positions	573500	VABM-L1-14W-G14-4-GR
		5 valve positions	573501	VABM-L1-14W-G14-5-GR
		6 valve positions	573502	VABM-L1-14W-G14-6-GR
		7 valve positions	573503	VABM-L1-14W-G14-7-GR
		8 valve positions	573504	VABM-L1-14W-G14-8-GR
		9 valve positions	573505	VABM-L1-14W-G14-9-GR
		10 valve positions	573506	VABM-L1-14W-G14-10-GR
		12 valve positions	573507	VABM-L1-14W-G14-12-GR
		16 valve positions	573508	VABM-L1-14W-G14-16-GR
		20 valve positions	573509	VABM-L1-14W-G14-20-GR
		24 valve positions	573510	VABM-L1-14W-G14-24-GR
		8 double solenoid + 8 single solenoid valves	573936	VABM-L1-14W-G14-16-M-GR
		4 bistable + 16 single solenoid valves	573937	VABM-L1-14W-G14-20-M-GR
	24 monostable valves	573938	VABM-L1-14W-G14-24-M-GR	
	Size 18 mm			
	Connections 2, 4 at front	4 valve positions	8004913	VABM-L1-18W-G38-4-G
		5 valve positions	8004914	VABM-L1-18W-G38-5-G
		6 valve positions	8004915	VABM-L1-18W-G38-6-G
		7 valve positions	8004916	VABM-L1-18W-G38-7-G
		8 valve positions	8004917	VABM-L1-18W-G38-8-G
		9 valve positions	8004918	VABM-L1-18W-G38-9-G
		10 valve positions	8004919	VABM-L1-18W-G38-10-G
12 valve positions		8004920	VABM-L1-18W-G38-12-G	
16 valve positions		8004921	VABM-L1-18W-G38-16-G	
20 valve positions		8004922	VABM-L1-18W-G38-20-G	
24 valve positions		8004923	VABM-L1-18W-G38-24-G	
8 double solenoid + 8 single solenoid valves		8004924	VABM-L1-18W-G38-16-M-G	
4 double solenoid + 16 single solenoid valves		8004925	VABM-L1-18W-G38-20-M-G	
24 single solenoid valves	8004926	VABM-L1-18W-G38-24-M-G		

# Valve terminals VTUG with multi-pin plug and fieldbus connection

Ordering data

Ordering data				
	Description	Part no.	Type	
Manifold rail for sub-base valve, for control cabinet installation, outlet orientation: front				
	Size 10 mm			
	Connections 2, 4 at the front, single feed	4 valve positions	8058335	VABM-L1-10HWS1-G18-4-GR
		8 valve positions	8058336	VABM-L1-10HWS1-G18-8-GR
	Connections 2, 4 at the front, double feed	8 valve positions	8058338	VABM-L1-10HWS2-G18-8-GR
		12 valve positions	8058339	VABM-L1-10HWS2-G18-12-GR
		16 valve positions	8058340	VABM-L1-10HWS2-G18-16-GR
		24 valve positions	8058341	VABM-L1-10HWS2-G18-24-GR
	Size 14 mm			
	Connections 2, 4 at the front, single feed	4 valve positions	8058342	VABM-L1-14HWS1-G14-4-GR
		8 valve positions	8058343	VABM-L1-14HWS1-G14-8-GR
	Connections 2, 4 at the front, double feed	8 valve positions	8058344	VABM-L1-14HWS2-G14-8-GR
		12 valve positions	8058345	VABM-L1-14HWS2-G14-12-GR
		16 valve positions	8058346	VABM-L1-14HWS2-G14-16-GR
		24 valve positions	8058347	VABM-L1-14HWS2-G14-24-GR

# Valve terminals VTUG with multi-pin plug connection

Technical data – Multi-pin plug connection

The following multi-pin plug connections are available for the valve terminal VTUG:

- Sub-D (25-pin)
- Sub-D (44-pin)
- Ribbon cable (26-pin)
- Ribbon cable (50-pin)



## Electrical multi-pin plug

Each pin on the multi-pin plug can actuate exactly one solenoid coil.

If the maximum configurable number of valve positions is 24, this means that 48 valve functions can be addressed.

The valves can be switched by means of positive or negative logic (positive switching or negative switching).

Mixed operation is generally not possible; however, an exception is made for the V22 ... V25 variants with 25-pin Sub-D. With these variants, a specific range of valve positions (e.g. Com 16...19) is supplied with common voltage.

This allows these ranges to be switched with positive or negative logic and valve groups to be switched off independently of the other ranges. Mixed operation within a range is not permitted.



### Note

A double solenoid valve occupies one valve position and two pins on the multi-pin plug. This means that the number of bistable valves per manifold rail is limited. (Pin allocation → page 198)

General Technical data				
Type	VAEM-L1-S-M1-25	VAEM-L1-S-M1-44	VAEM-L1-S-M3-26	VAEM-L1-S-M3-50
Number of pins	25-pin	44-pin	26-pin	50-pin
Electrical connection	Sub-D plug		Ribbon connectors	
Max. no. of valve positions	24		24	
Degree of protection to EN 60529	IP67		IP40	
Material	PA		PA	
Note on materials	RoHS-compliant		RoHS-compliant	
Approval certificate	c UL us - Recognized (OL)			
	c CSA us (OL)			
CE mark (see declaration of conformity) <sup>1)</sup>	To EU EMC Directive			
Corrosion resistance class CRC <sup>2)</sup>	2			
Weight [g]	53		45	48

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

# Valve terminals VTUG with multi-pin plug connection

Technical data – Multi-pin plug connection

Pin allocation – Sub-D plug, 25-pin												
	Pin	Wire colour <sup>1)</sup>	M1-25 (V20)								M1-25V1 (V22)	
			12x double solenoid		8x double solenoid 8x single solenoid		4x double solenoid 16x single solenoid		24x single solenoid			
	1	WH	VP0	14	VP0	14	VP0	14	VP0	14	VP0	14
	2	BN	VP0	12	VP0	12	VP0	12	VP23	14	VP0	12
	3	GN	VP1	14	VP1	14	VP1	14	VP1	14	VP1	14
	4	YE	VP1	12	VP1	12	VP1	12	VP22	14	VP1	12
	5	GY	VP2	14	VP2	14	VP2	14	VP2	14	VP2	14
	6	PK	VP2	12	VP2	12	VP2	12	VP21	14	VP2	12
	7	BU	VP3	14	VP3	14	VP3	14	VP3	14	VP3	14
	8	RD	VP3	12	VP3	12	VP3	12	VP20	14	VP3	12
	9	BK	VP4	14	VP4	14	VP4	14	VP4	14	VP4	14
	10	VT	VP4	12	VP4	12	VP19	14	VP19	14	VP4	12
	11	GY PK	VP5	14	VP5	14	VP5	14	VP5	14	VP5	14
	12	RD BU	VP5	12	VP5	12	VP18	14	VP18	14	VP5	12
	13	GN WH	VP6	14	VP6	14	VP6	14	VP6	14	VP6	14
	14	BN GN	VP6	12	VP6	12	VP17	14	VP17	14	VP6	12
	15	YE WH	VP7	14	VP7	14	VP7	14	VP7	14	VP7	14
	16	BN YE	VP7	12	VP7	12	VP16	14	VP16	14	VP7	12
	17	GY WH	VP8	14	VP8	14	VP8	14	VP8	14	VP8	14
	18	BN GY	VP8	12	VP15	14	VP15	14	VP15	14	VP8	12
	19	WH PK	VP9	14	VP9	14	VP9	14	VP9	14	VP9	14
	20	BN PK	VP9	12	VP14	14	VP14	14	VP14	14	VP9	12
	21	BU WH	VP10	14	VP10	14	VP10	14	VP10	14	Com 16 ... 19	
	22	BN BU	VP10	12	VP13	14	VP13	14	VP13	14	Com 12 ... 15	
	23	RD WH	VP11	14	VP11	14	VP11	14	VP11	14	Com 8 ... 11	
	24	BN RD	VP11	12	VP12	14	VP12	14	VP12	14	Com 4 ... 7	
	25	BK WH	Com		Com		Com	Com	Com		Com 0 ... 3	

1) To IEC 60757  
VP Valve position

Note  
A grey field means that a double solenoid valve can be used, while a white field means that only single solenoid valves can be used.

# Valve terminals VTUG with multi-pin plug connection

Technical data – Multi-pin plug connection



Pin allocation – Sub-D plug, 25-pin								Pin allocation – Sub-D plug, 44-pin					
	Pin	Wire colour <sup>1)</sup>	M1-25V2 (V23)		M1-25V3 (V24)		M1-25V4 (V25)		Pin	Wire colour <sup>1)</sup>	M1-44 (V21)		
													18x double solenoid, 6x single solenoid
	1	WH	VP0	14	VP0	14	VP0	14		1	WH	VP0	14
	2	BN	VP0	12	VP0	12	VP1	14		2	BN	VP0	12
	3	GN	VP1	14	VP1	14	VP2	14		3	GN	VP1	14
	4	YE	VP1	12	VP1	12	VP3	14		4	YE	VP1	12
	5	GY	VP2	14	VP2	14	VP4	14		5	GY	VP2	14
	6	PK	VP2	12	VP2	12	VP5	14		6	PK	VP2	12
	7	BU	VP3	14	VP3	14	VP6	14		7	BU	VP3	14
	8	RD	VP3	12	VP3	12	VP7	14		8	RD	VP3	12
	9	BK	VP4	14	VP4	14	VP8	14		9	BK	VP4	14
	10	VT	VP4	12	VP5	14	VP9	14		10	VT	VP4	12
	11	GY PK	VP5	14	VP6	14	VP10	14		11	GY PK	VP5	14
	12	RD BU	VP5	12	VP7	14	VP11	14		12	RD BU	VP5	12
	13	GN WH	VP6	14	VP8	14	VP12	14		13	GN WH	VP6	14
	14	BN GN	VP6	12	VP9	14	VP13	14		14	BN GN	VP6	12
	15	YE WH	VP7	14	VP10	14	VP14	14		15	YE WH	VP7	14
	16	BN YE	VP7	12	VP11	14	VP15	14		16	BN YE	VP7	12
	17	GY WH	VP8	14	VP12	14	VP16	14		17	GY WH	VP8	14
	18	BN GY	VP9	14	VP13	14	VP17	14		18	BN GY	VP8	12
	19	WH PK	VP10	14	VP14	14	VP18	14		19	WH PK	VP9	14
	20	BN PK	VP11	14	VP15	14	VP19	14		20	BN PK	VP9	12
	21	BU WH	Com 16 ... 19		Com 16 ... 19		Com 16 ... 19			21	BU WH	VP10	14
	22	BN BU	Com 12 ... 15		Com 12 ... 15		Com 12 ... 15			22	BN BU	VP10	12
	23	RD WH	Com 8 ... 11		Com 8 ... 11		Com 8 ... 11			23	RD WH	VP11	14
	24	BN RD	Com 4 ... 7		Com 4 ... 7		Com 4 ... 7			24	BN RD	VP11	12
	25	BK WH	Com 0 ... 3		Com 0 ... 3		Com 0 ... 3			25	BK WH	VP12	14
-								26	BK BN	VP12	12		
-								27	GN GY	VP13	14		
-								28	YE GY	VP13	12		
-								29	GN PK	VP14	14		
-								30	YE PK	VP14	12		
-								31	GN BU	VP15	14		
-								32	YE BU	VP15	12		
-								33	RD GN	VP16	14		
-								34	RD YE	VP16	12		
-								35	BK GN	VP17	14		
-								36	BK YE	VP17	12		
-								37	BU GY	VP18	14		
-								38	BU PK	VP19	14		
-								39	RD GY	VP20	14		
-								40	RD PK	VP21	14		
-								41	BK GY	VP22	14		
-								42	BK PK	VP23	14		
-								43	BK BU	Com			
-								44	BK RD				


1) To IEC 60757  
VP Valve position

- Note  
A grey field means that a double solenoid valve can be used, while a white field means that only single solenoid valves can be used.

# Valve terminals VTUG with multi-pin plug connection

Technical data – Multi-pin plug connection

Pin allocation – Flat cable, 26-pin										Pin allocation – Flat cable, 50-pin			
Pin	M3-26 (V20)								Pin	M3-50 (V26)			
	12x double solenoid		8x double solenoid 8x single solenoid		4x double solenoid 16x single solenoid		24x single solenoid						
	1	VP0	14	VP0	14	VP0	14	VP0	14		1	VP0	14
	2	VP0	12	VP0	12	VP0	12	VP23	14		2	VP0	12
	3	VP1	14	VP1	14	VP1	14	VP1	14		3	VP1	14
	4	VP1	12	VP1	12	VP1	12	VP22	14		4	VP1	12
	5	VP2	14	VP2	14	VP2	14	VP2	14		5	VP2	14
	6	VP2	12	VP2	12	VP2	12	VP21	14		6	VP2	12
	7	VP3	14	VP3	14	VP3	14	VP3	14		7	VP3	14
	8	VP3	12	VP3	12	VP3	12	VP20	14		8	VP3	12
	9	VP4	14	VP4	14	VP4	14	VP4	14		9	VP4	14
	10	VP4	12	VP4	12	VP19	14	VP19	14		10	VP4	12
	11	VP5	14	VP5	14	VP5	14	VP5	14		11	VP5	14
	12	VP5	12	VP5	12	VP18	14	VP18	14		12	VP5	12
	13	VP6	14	VP6	14	VP6	14	VP6	14		13	VP6	14
	14	VP6	12	VP6	12	VP17	14	VP17	14		14	VP6	12
	15	VP7	14	VP7	14	VP7	14	VP7	14		15	VP7	14
	16	VP7	12	VP7	12	VP16	14	VP16	14		16	VP7	12
	17	VP8	14	VP8	14	VP8	14	VP8	14		17	VP8	14
	18	VP8	12	VP15	14	VP15	14	VP15	14		18	VP8	12
	19	VP9	14	VP9	14	VP9	14	VP9	14		19	VP9	14
	20	VP9	12	VP14	14	VP14	14	VP14	14		20	VP9	12
	21	VP10	14	VP10	14	VP10	14	VP10	14		21	VP10	14
	22	VP10	12	VP13	14	VP13	14	VP13	14		22	VP10	12
	23	VP11	14	VP11	14	VP11	14	VP11	14		23	VP11	14
	24	VP11	12	VP12	14	VP12	14	VP12	14		24	VP11	12
	25	Com		Com		Com	Com	Com			25	VP12	14
	26	Com		Com		Com		Com			26	VP12	12
-									27	VP13	14		
-									28	VP13	12		
-									29	VP14	14		
-									30	VP14	12		
-									31	VP15	14		
-									32	VP15	12		
-									33	VP16	14		
-									34	VP16	12		
-									35	VP17	14		
-									36	VP17	12		
-									37	VP18	14		
-									38	VP18	12		
-									39	VP19	14		
-									40	VP19	12		
-									41	VP20	14		
-									42	VP20	12		
-									43	VP21	14		
-									44	VP21	12		
-									45	VP22	14		
-									46	VP22	12		
-									47	VP23	14		
-									48	VP23	12		
-									49	Com			
-									50				

 Note  
 A grey field means that a double solenoid valve can be used, while a white field means that only single solenoid valves can be used.

VP Valve position




# Valve terminals VTUG with multi-pin plug connection


Technical data – Multi-pin plug connection

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Multi-pin plug connection, Sub-D




-  - Note  
 Dimensions of the manifold rail with electrical connection (→ page 173)


Type	B1	L1	H1
VAEM-L1-S-M1-...	90.5	41.9	18.9

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Multi-pin plug connection, ribbon cable







-  - Note  
 Dimensions of the manifold rail with electrical connection (→ page 173)

Type	B1	L1	H1
VAEM-L1-S-M3-...	90.5	41.9	32.7

# Valve terminals VTUG with multi-pin plug connection


Accessories – Multi-pin plug connection

Ordering data – Multi-pin plug connection					
Description		Part no.	Type		
Electrical interface, Sub-D					
	25-pin	For variant M1-25 (V20)	573445	VAEM-L1-S-M1-25	
		For variant M1-25V1 (V22)	573447	VAEM-L1-S-M1-25V1	
		For variant M1-25V2 (V23)	573448	VAEM-L1-S-M1-25V2	
		For variant M1-25V3 (V24)	573449	VAEM-L1-S-M1-25V3	
		For variant M1-25V4 (V25)	573450	VAEM-L1-S-M1-25V4	
	44-pin	For variant M1-44 (V21)	573446	VAEM-L1-S-M1-44	
Electrical interface, flat cable plug					
	26-pin	For variant M3-26 (V20)	573452	VAEM-L1-S-M3-26	
	50-pin	For variant M3-50 (V26)	573451	VAEM-L1-S-M3-50	
Connecting cable for multi-pin plug					
	Sub-D socket, straight	<ul style="list-style-type: none"> <li>• 25-pin, up to 24 coils, IP40</li> <li>• Open cable end, 25-wire</li> </ul>	2.5 m	575417	NEBV-S1G25-K-2.5-N-LE25-S6
			5 m	575418	NEBV-S1G25-K-5-N-LE25-S6
			10 m	575419	NEBV-S1G25-K-10-N-LE25-S6
		<ul style="list-style-type: none"> <li>• 44-pin, up to 42 coils, IP40</li> <li>• Open cable end, 44-wire</li> </ul>	2.5 m	575113	NEBV-S1G44-K-2.5-N-LE44-S6
			5 m	575114	NEBV-S1G44-K-5-N-LE44-S6
			10 m	575115	NEBV-S1G44-K-10-N-LE44-S6
	Sub-D socket, angled	<ul style="list-style-type: none"> <li>• 25-pin, up to 24 coils, IP65</li> <li>• Open cable end, 25-wire</li> </ul>	2.5 m	575423	NEBV-S1WA25-K-2.5-N-LE25-S9
			5 m	575424	NEBV-S1WA25-K-5-N-LE25-S9
			10 m	575425	NEBV-S1WA25-K-10-N-LE25-S9
		<ul style="list-style-type: none"> <li>• 44-pin, up to 42 coils, IP65</li> <li>• Open cable end, 44-wire</li> </ul>	2.5 m	575420	NEBV-S1WA44-K-2.5-N-LE44-S9
			5 m	575421	NEBV-S1WA44-K-5-N-LE44-S9
			10 m	575422	NEBV-S1WA44-K-10-N-LE44-S9

# Valve terminals VTUG, I-Port interface/IO-Link

Technical data – I-Port interface/IO-Link

Festo-specific, standardised interface for direct connection to the fieldbus by mounting the bus node CTEU or to an IO-Link master via a cable (in IO-Link mode).

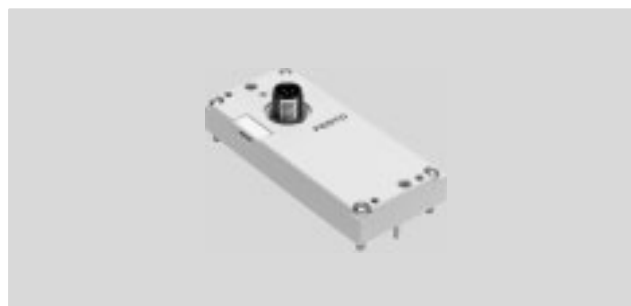

## I-Port interface/IO-Link

Versions:

- I-Port interface for bus nodes (CTEU)
- IO-Link mode for direct connection to a higher-order IO-Link master

The following protocols are supported in connection with the associated CTEU bus node:

- CANopen
- DeviceNet
- PROFIBUS
- CC-LINK
- EtherCAT

The electrical supply/transmission of communication takes place via an M12 plug connector.

The valve terminal can be equipped with 4 ... 24 (double solenoid) valves.

## General Technical data

Communication types	IO-Link		
Electrical connection	<ul style="list-style-type: none"> <li>• Plug connector M12, 5-pin</li> <li>• A-coded</li> <li>• Metal thread for screening</li> </ul>		
Baud rate	COM3	[kbps]	230.4
	COM2	[kbps]	38.4
Intrinsic current consumption, logic supply PS		[mA]	30
Intrinsic current consumption, valve supply PL		[mA]	30
Max. number of solenoid coils	VAEM-L1-S-8-PT		16
	VAEM-L1-S-16-PT		32
	VAEM-L1-S-24-PT		48
Max. no. of valve positions	VAEM-L1-S-8-PT		8
	VAEM-L1-S-16-PT		16
	VAEM-L1-S-24-PT		24
Ambient temperature		[°C]	-5 ... +50
Product weight	Outlet on top	[g]	49
	Outlet on the side	[g]	100
Degree of protection to EN 60529	IP67		
Approval certificate	c UL us - Recognized (OL)		
	c CSA us (OL)		
CE mark (see declaration of conformity) <sup>1)</sup>	To EU EMC Directive		
Corrosion resistance class CRC <sup>2)</sup>	2		

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


# Valve terminals VTUG, I-Port interface/IO-Link

Technical data – I-Port interface/IO-Link

LED display			
	Colour	Status	Function
Status LED X1	Red/ green	Off	No 24 V logic
		Static green	Everything OK
		Flashing green	Communication error (in the I-Port or IO-Link protocol)
		Flashing red/green	Load supply error (undervoltage or no load supply)
		Static red	Load supply error and communication error

Pin allocation – I-Port interface/IO-Link			
	Pin	Assignment	Description
	1	24 V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24 V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0 V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	0 V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)

## System overview – IO-Link

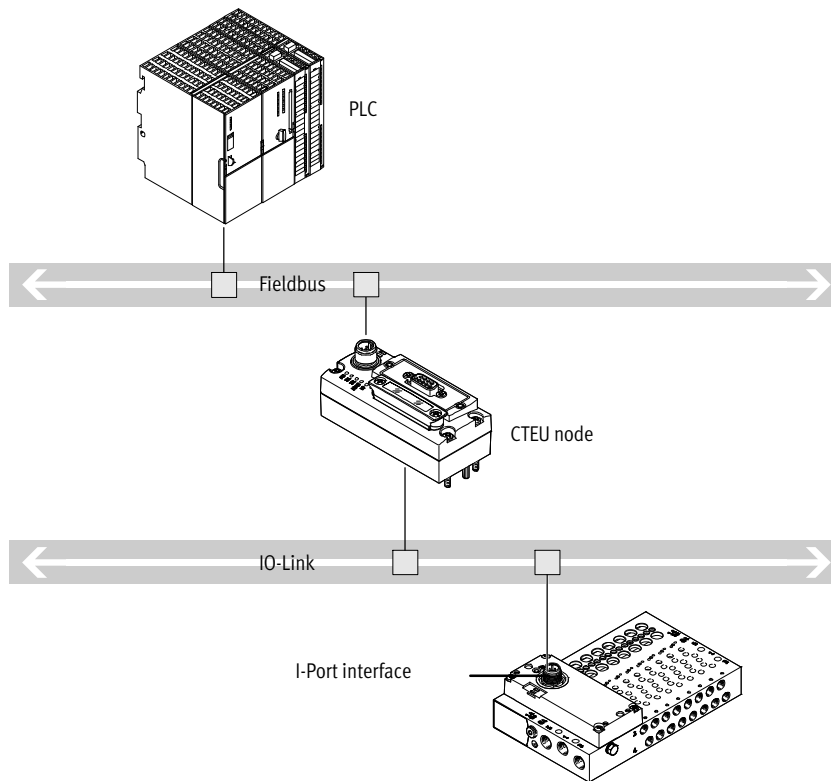

- Communication with the higher-order controller via fieldbus
- Use a bus node CTEU compatible with the fieldbus protocol
- Up to 64 inputs/outputs (solenoid coils), depending on the valve terminal
- No preprocessing


# Valve terminals VTUG, I-Port interface/IO-Link

Technical data – I-Port interface/IO-Link

## Dimensions


Download CAD data → [www.festo.com](http://www.festo.com)

I-Port interface, outlet on top



- Note  
Dimensions of the manifold rail with electrical connection → page 173

I-Port interface, outlet on side

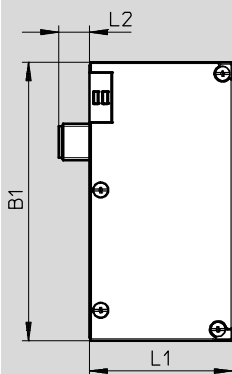

- Note  
Dimensions of the manifold rail with electrical connection → page 173

Type	Outlet on top			Outlet on the side		
	B1	L1	H1	B1	L1	L2
VAEM-L1-S-...	91	42.5	25	91.5	47.1	10

## Ordering data

	Description	Part no.	Type
<b>Electrical interface for I-Port interface/IO-Link, outlet on top</b>			
	Actuation of up to 8 double solenoid valve positions	573384	VAEM-L1-S-8-PT
	Actuation of up to 16 double solenoid valve positions	573939	VAEM-L1-S-16-PT
	Actuation of up to 24 double solenoid valve positions	573940	VAEM-L1-S-24-PT
<b>Electrical interface for I-Port interface/IO-Link, outlet on the side</b>			
	Actuation of up to 8 double solenoid valve positions	574207	VAEM-L1-S-8-PTL
	Actuation of up to 16 double solenoid valve positions	574208	VAEM-L1-S-16-PTL
	Actuation of up to 24 double solenoid valve positions	574209	VAEM-L1-S-24-PTL
<b>Connection technology for IO-Link</b>			
	T-Adapter M12, 5-polig für IO-Link und Lastversorgung	171175	FB-TA-M12-5POL
	Straight Plugs, M12, 5-pin, for T-adapter FB-TA	175487	SEA-M12-5GS-PG7
<b>Inscription label for I-Port interface/IO-Link</b>			
	40 pieces in frame	565306	ASLR-C-E4

# Valve terminals VTUG, electrical connection box CAPC

Technical data – CAPC

### Function

The electrical connection box CAPC enables the decentralised installation of bus nodes CTEU on a valve terminal or input modules with I-Port interface.

### Area of application

- M12 connection technology (two interfaces)
- Enables the installation of valve terminals or other devices over a distance of 20 metres
- By using the accessory CAFM the sub-base can be installed on an H-rail



General Technical data		
Type		CAPC-F1-E-M12
Dimensions W x L x H	[mm]	50 x 148 x 28
Fieldbus interface		2x M12 socket, 5-pin
Operating voltage range	[V DC]	18 ... 30
Max. power supply	[A]	2
Nominal operating voltage	[V DC]	24
Product weight	[g]	85
Cable length	[m]	20

Materials	
Housing	PA reinforced
Note on materials	RoHS-compliant

Operating and environmental conditions	
Degree of protection to EN 60529	IP65, IP67
Ambient temperature	[°C] -5 ... +50
Storage temperature	[°C] -20 ... +70
Corrosion resistance class CRC <sup>1)</sup>	2
CE mark (see declaration of conformity) <sup>2)</sup>	In accordance with EU EMC Directive

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → Certificates.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Pin allocation for power supply/IO-Link interfaces			
	Pin	Assignment	Description
	1	24 V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24 V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0 V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	0 V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
			Housing, FE


# Valve terminals VTUG, electrical connection box CAPC

Technical data – CAPC


**Dimensions**

Download CAD data → [www.festo.com](http://www.festo.com)

CAPC


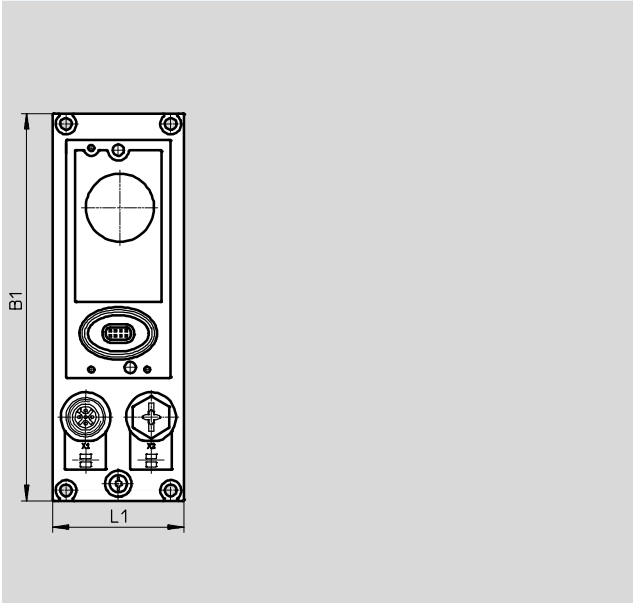


CAPC with mounted bus node CTEU-CO

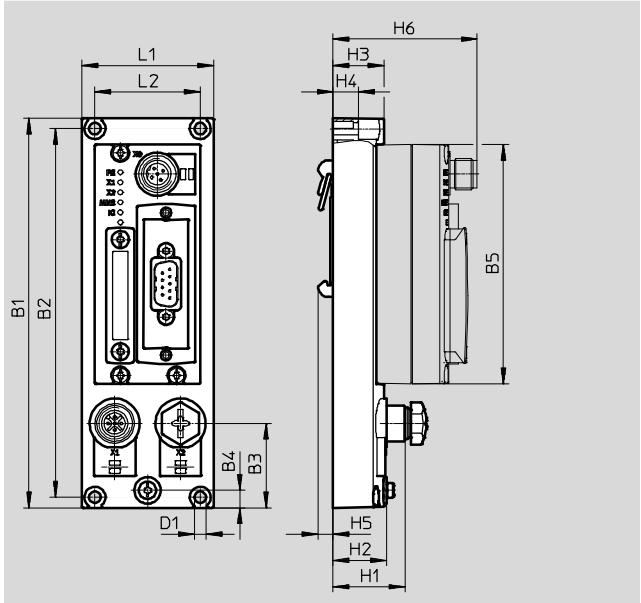

Type	B1	B2	B3	B4	B5	D1Ø	H1	H2	H3	H4	H5	H6	L1	L2
CAPC	148	140	32	6.6	91	4.4	27.3	20.3	19.3	9.6	5.7	54.8	50	40


**Ordering data**

		Part no.	Type
<b>Electrical connection box</b>			
	For connecting a second device with I-Port interface	<b>570042</b>	<b>CAPC-F1-E-M12</b>
<b>H-rail mounting</b>			
	For electrical connection block CAPC	<b>570043</b>	<b>CAF-M-F1-H</b>

# Valve terminals VTUG with interlock

Technical data – Interlock

FESTO

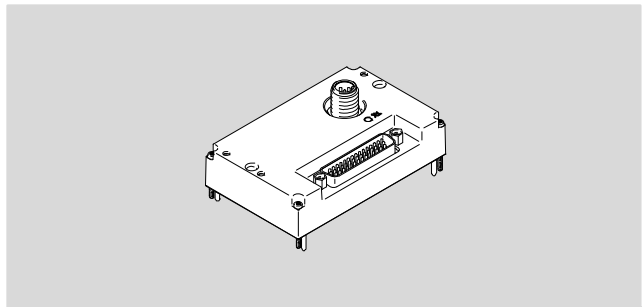

## Interlock

The interlock function enables the first 16 solenoid coils to be individually supplied externally.

This guarantees the safety-related release of these valves.

The interlock interface is established via external contacts for a single-pin connection or via safety output terminals for a double-pin connection.

General Technical data			
Communication types		I-Port/IO-Link®	
Number of valve positions		4...24	
Max. number of solenoid coils		48	
Number of interlock solenoid coils		16	
Number of inputs for reading back voltage		18 (16x interlock + 2 group supply)	
Mounting position		Any	
Nominal flow rate		[l/min]	330
Product weight		[g]	80
Residual ripple		[V <sub>SS</sub> ]	4
Baud rate	COM3	[kbps]	230.4
	COM2	[kbps]	38.4
IO-Link®	Protocol	V1.0	
	Connection technology	M12, A-coded	
	Port type	Type B	
	Number of ports	1	
	Process data width OUT	6 bytes	
	Process data width IN	4 bytes	
	Minimum cycle time	11.5 ms (2.3 ms per frame = 2 bytes of user data)	
Corrosion resistance class CRC <sup>1)</sup>		2	

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.



# Valve terminals VTUG with interlock

Technical data – Interlock

## Interlock interface


### Single-pin interlock interface

- The interlock interface is established via external positive switching contacts or single-pin switching safety terminals
- 16 solenoid coils can be actuated via the interlock (Vn+)
- Solenoid coils that do not require interlock actuation can be supplied directly with 24 V from pins 1 ... 3
- Application of the respective input voltage is reported via the fieldbus as a process image

### Double-pin interlock interface


- The interlock interface is established via external positive-negative switching safety terminals
- The solenoid coils of the interlock valves are actuated via the corresponding pins in the sub-D plug connector (pins 7 ... 38)
- The solenoid coils that do not require interlock actuation can be supplied directly with 24 V (e.g. from pins 1 ... 3)
- Any difference in potential between Vn- and 0 VVAL/OUT must be below 5 V

Sample circuit diagram for a single-pin interlock interface

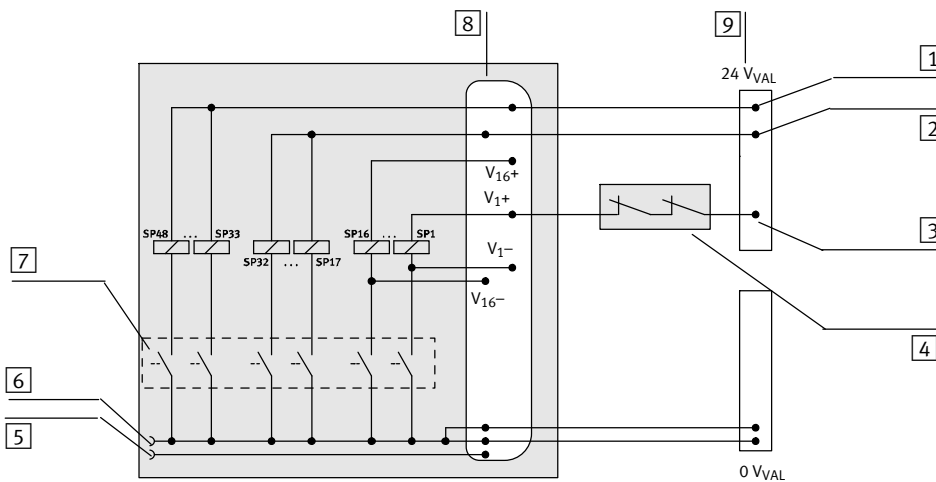

- 1 Power supply V+, solenoid coils 33 ..... 48 (no interlock)
- 2 Power supply V+, solenoid coils 17 ..... 32 (no interlock)
- 3 Actuation Vn+ (via interlock)
- 4 Interlock contacts of the output terminal
- 5 I-Port connection pin 2, 24 VVAL/OUT (PL), load voltage supply
- 6 I-Port connection pin 5, 0 VVAL/OUT (PL), load voltage supply
- 7 Driver, actuated via fieldbus/I-Port
- 8 Interlock Sub-D connection
- 9 Power supply (interlock)

Sample circuit diagram for a double-pin interlock interface

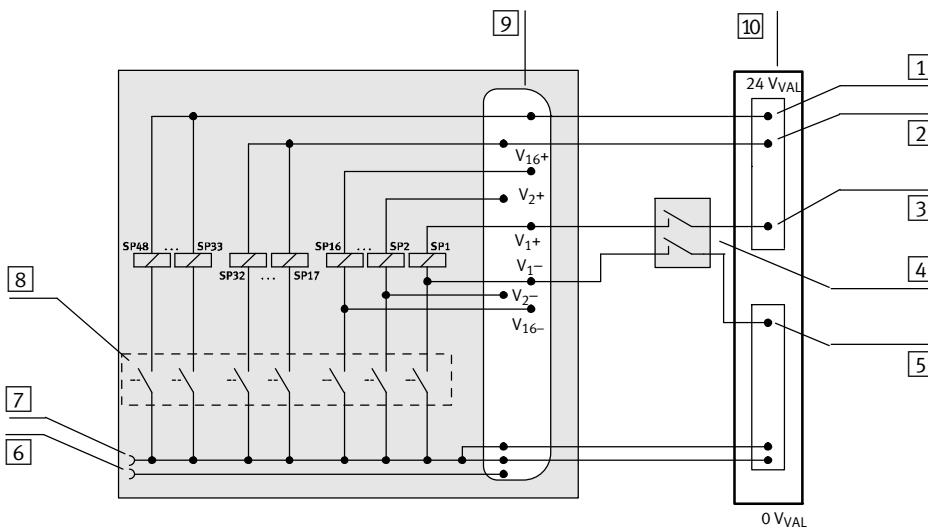

- 1 Power supply V+, solenoid coils 33 ..... 48 (no interlock)
- 2 Power supply V+, solenoid coils 17 ..... 32 (no interlock)
- 3 Actuation Vn+ (via interlock)
- 4 Interlock contacts of the output terminal
- 5 Actuation Vn- (via interlock)
- 6 I-Port connection pin 2, 24 VVAL/OUT (PL), load voltage supply
- 7 I-Port connection pin 5, 0 VVAL/OUT (PL), load voltage supply
- 8 Driver, actuated via fieldbus/I-Port
- 9 Interlock Sub-D connection
- 10 Power supply (interlock)

# Valve terminals VTUG with interlock

Technical data – Interlock

Pin allocation – Interlock									
	Pin	Coil	Signal	pin	Coil	Signal	Pin	Coil	Signal
	1	-	24 V <sub>VAL/OUT</sub>	16	5	V5-	31	13	V13+
	2	-	24 V <sub>VAL/OUT</sub>	17	6	V6+	32	13	V13-
	3	-	24 V <sub>VAL/OUT</sub>	18	6	V6-	33	14	V14+
	4	1 ... 48	0 V <sub>VAL/OUT</sub>	19	7	V7+	34	14	V14-
	5	1 ... 48	0 V <sub>VAL/OUT</sub>	20	7	V7-	35	15	V15+
	6	1 ... 48	0 V <sub>VAL/OUT</sub>	21	8	V8+	36	15	V15-
	7	1	V1+	22	8	V8-	37	16	V16+
	8	1	V1-	23	9	V9+	38	16	V16-
	9	2	V2+	24	9	V9-	39	17 ... 32	V17 ... 32+
	10	2	V2-	25	10	V10+	40	33 ... 48	V33 ... 48+
	11	3	V3+	26	10	V10-	41	1 ... 48	0 V <sub>VAL/OUT</sub>
	12	3	V3-	27	11	V11+	42	1 ... 48	0 V <sub>VAL/OUT</sub>
	13	4	V4+	28	11	V11-	43	1 ... 48	0 V <sub>VAL/OUT</sub>
	14	4	V4-	29	12	V12+	44	-	n.c.
	15	5	V5+	30	12	V12-	Housing		FE

Pin allocation – I-Port interface/IO-Link			
	Pin	Assignment	Description
	1	24 V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	2	24 V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	3	0 V <sub>EL/SEN</sub>	Operating voltage supply (electronics, sensors/inputs)
	4	C/Q	Data communication
	5	0 V <sub>VAL/OUT</sub>	Load voltage supply (valves/outputs)
	Housing, FE		

## Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

I-Port interface with interlock, outlet on top














Note

Dimensions of the manifold rail with electrical connection → page 173

Type	Outlet on top		
	B1	L1	H1
VAEM-L1-S-24-PTK	91	57	30.8

# Valve terminals VTUG with multi-pin plug and fieldbus connection




Accessories – Valve terminal

Ordering data – CTEU			
	Description	Part no.	Type
<b>Bus node</b>			
	CANopen bus node	570038	CTEU-CO
	CC-Link bus node	1544198	CTEU-CC
	PROFIBUS bus node	570040	CTEU-PB
	DeviceNet bus node	570039	CTEU-DN
	EtherCAT bus node	572556	CTEU-EC
<b>Bus connection</b>			
	Sub-D plug, straight	For CANopen	532219 FBS-SUB-9-BU-2x5POL-B
		For CC-Link	532220 FBS-SUB-9-GS-2x4POL-B
		For PROFIBUS	532216 FBS-SUB-9-GS-DP-B
	Sub-D plug connector, angled, 9-pin	For CANopen	533783 FBS-SUB-9-WS-CO-K
		For PROFIBUS	533780 FBS-SUB-9-WS-PB-K
	M12x1, 5-pin	A-coded, for CANopen	525632 FBA-2-M12-5POL
		B-coded, for PROFIBUS	533118 FBA-2-M12-5POL-RK
	For 5-pin terminal strip for CANopen	525634	FBA-1-SL-5POL
	Terminal strip, 5-pin, for DeviceNet/CANopen	525635	FBSD-KL-2x5POL
	Screw terminal for CC-Link	197962	FBA-1-KL-5POL
	Straight plug connector, M12x1	5-pin, for CANopen	175380 FBS-M12-5GS-PG9
		4-pin, D-coded for EtherCAT	543109 NECU-M-S-D12G4-C2-ET
		5-pin, compatible with FBA-2-M12-5POL-RK for PROFIBUS	1066354 NECU-M-S-B12G5-C2-PB
	Straight socket, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK for PROFIBUS	1067905	NECU-M-B12G5-C2-PB
	Terminating resistor, M12, B-coded for PROFIBUS	1072128	CACR-S-B12G5-220-PB
<b>Plug socket</b>			
	For power supply, M12x1, 5-pin, B-coded for CANopen/DeviceNet	538999	NTSD-GD-9-M12-5POL-RK
	For power supply, M12x1, 5-pin for CC-Link, PROFIBUS, EtherCAT	18324	FBSD-GD-9-5POL
<b>Inscription label</b>			
	For bus node	565306	ASLR-C-E4

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Accessories – Valve terminal

Ordering data						
	Description			Part no.	Type	PU <sup>1)</sup>
Push-in fitting, straight				Technical data → Internet: qsm		
	M5 thread	For tubing Ø 3 mm	–	★ 153313	QSM-M5-3-I	10
			Round releasing ring	133003	QSM-M5-3-I-R	10
	M5 thread	For tubing Ø 4 mm	–	★ 153315	QSM-M5-4-I	10
			Round releasing ring	133004	QSM-M5-4-I-R	10
	M5 thread	For tubing Ø 6 mm	–	★ 153315	QSM-M5-6-I	10
			Round releasing ring	133005	QSM-M5-6-I-R	10
	M7 thread	For tubing Ø 4 mm	–	★ 153319	QSM-M7-4-I	10
			Round releasing ring	133007	QSM-M7-6-I-R	10
	G1/8 thread	For tubing Ø 4 mm	–	★ 186106	QS-G1/8-4-I	10
			–	★ 186107	QS-G1/8-6-I	10
			–	★ 186109	QS-G1/8-8-I	10
	1/8 thread	For tubing Ø 10 mm	–	★ 190647	QS-1/8-10-I	10
	1/4 thread	For tubing Ø 8 mm	–	132280	QS-B-1/4-8-I	1
			–	★ 153016	QS-1/4-8-I	10
		For tubing Ø 10 mm	–	132842	QS-B-1/4-10-I	1
			–	★ 153018	QS-1/4-10-I	10
	3/8 thread	For tubing Ø 8 mm	–	130681	QS-3/8-8-50	50
			–	130682	QS-3/8-10-50	50
		For tubing Ø 12 mm	–	130683	QS-3/8-12-20	20
–			★ 164957	QS-3/8-16	1	
Push-in fitting, angled				Technical data → Internet: qsl		
	M5 thread	For tubing Ø 3 mm	–	★ 153331	QSML-M5-3	10
			–	★ 153333	QSML-M5-4	10
	M7 thread	For tubing Ø 4 mm	–	★ 186352	QSML-M7-4	10
	G1/8 thread	For tubing Ø 6 mm	–	★ 186117	QSL-G1/8-6	10
			–	★ 186119	QSL-G1/8-8	10
	1/8 thread	For tubing Ø 10 mm	–	★ 190658	QSL-1/8-10	10
			–	130765	QSML-1/8-6-100	100
	1/4 thread	For tubing Ø 8 mm	–	132220	QSL-B-1/4-8	1
			–	130732	QSL-1/4-8-50	50
		For tubing Ø 10 mm	–	132817	QSL-B-1/4-10	1
			–	130733	QSL-1/4-10-50	50
		For tubing Ø 12 mm	–	130734	QSL-1/4-12-20	20
Push-in fitting, long, angled				Technical data → Internet: qsl		
	M5 thread	For tubing Ø 3 mm	–	130838	QSMLL-M5-3	10
			–	153339	QSMLL-M5-4	10
	M7 thread	For tubing Ø 4 mm	–	186354	QSMLL-M7-4	10
	G1/8 thread	For tubing Ø 6 mm	–	186128	QSLL-G1/8-6	10
			–	186130	QSLL-G1/8-8	10

1) Packaging unit.

Festo core product range












★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Accessories – Valve terminal

Ordering data					
Description		Part no.	Type	PU <sup>1)</sup>	
<b>Blanking plug</b> <span style="float: right;">Technical data → Internet: b</span>					
	For thread M5	★ 174308	B-M5-B	10	
	For M7 thread	★ 174309	B-M7	10	
	For thread G1/8	★ 3568	B-1/8	10	
	For G1/4 thread	★ 3569	B-1/4	10	
	For thread G1/8	196720	CDVI5.0-B-G1/8	1	
	For thread G3/8	196712	CDVI5.0-B-G3/8	1	
	For G1/4 thread	8035644	CDVI5.0-B-G1/4	1	
<b>Silencer</b> <span style="float: right;">Technical data → Internet: amte</span>					
	For M3 thread	1231120	AMTE-M-LH-M3	20	
	For M5 thread	★ 1205858	AMTE-M-LH-M5	20	
	For M7 thread	161418	UC-M7	1	
	For For thread G1/8	High flow rate	★ 2307	U-1/8	1
		Lower flow rate	161419	UC-1/8	1
	For G1/4 thread	High flow rate	★ 2316	U-1/4	1
			534223	U-1/4-20	20
		Lower flow rate	165004	UC-1/4	1
	534220	UC-1/4-20	20		
<b>Blanking plate</b>					
	Vacant position width 10 mm	573422	VABB-L1-10-T	1	
	Vacant position width 14 mm	573488	VABB-L1-14-T	1	
	Vacant position width 18 mm	8004897	VABB-L1-18-T	1	
<b>Supply plate</b>					
	Supply ports 1, 3, 5, width 10 mm	573924	VABF-L1-10-P3A4-M7-T1	1	
	Supply ports 1, 3, 5, width 14 mm	573925	VABF-L1-14-P3A4-G18-T1	1	
	Supply ports 1, 3, 5, width 18 mm	8004898	VABF-L1-18-P3A4-G14-T1	1	
<b>Separator</b>					
	For manifold rail, size 10, M5/M7	For sub-base valves	569994	VABD-6-B	1
		For semi in-line valves	569995	VABD-8-B	1
	For all manifold rails, size 14, G1/8		569996	VABD-10-B	1
	For all manifold rails, size 18, G1/4		569997	VABD-12-B	1
<b>Cover cap for manual override</b>					
	Covered	540898	VMPA-HBV-B	10	
	Non-detenting	540897	VMPA-HBT-B	10	
	Detenting (without accessories)	8002234	VAMC-L1-CD	10	
<b>Inscription label holder</b> <span style="float: right;">Technical data → Internet: aslr</span>					
	Holder for an inscription label and covering the mounting screw and manual override	570818	ASLR-D-L1	10	

Festo core product range






★ Generally ready for shipping ex works in 24 hours

☆ Generally ready for shipping ex works in 5 days

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Accessories – Valve terminal




Ordering data						
	Description		Part no.	Type	PE <sup>1)</sup>	
<b>Check valve</b>						
	For manifold rails VABM-L1-10...	For blocking the flow in the event of back pressure in duct 3 and 5	<b>8047364</b>	<b>VABF-L1-10H-H2</b>	<b>10</b>	
	For manifold rails VABM-L1-14...		<b>8047365</b>	<b>VABF-L1-14-H2</b>	<b>10</b>	
<b>Flow restrictor</b>						
	For manifold rails VABM-L1-10...	For setting the flow rate for pressurisation and exhausting (for threaded connection M5)	Nominal size: 0.5 mm	<b>8025709</b>	<b>VFFG-T-M5-5</b>	<b>10</b>
			Nominal size: 0.6 mm	<b>8025710</b>	<b>VFFG-T-M5-6</b>	<b>10</b>
			Nominal size: 0.7 mm	<b>8025711</b>	<b>VFFG-T-M5-7</b>	<b>10</b>
			Nominal size: 0.85 mm	<b>8025712</b>	<b>VFFG-T-M5-8</b>	<b>10</b>
			Nominal size: 1.05 mm	<b>8025713</b>	<b>VFFG-T-M5-10</b>	<b>10</b>
			Nominal size: 1.2 mm	<b>8025714</b>	<b>VFFG-T-M5-12</b>	<b>10</b>
			Nominal size: 1.55 mm	<b>8025715</b>	<b>VFFG-T-M5-15</b>	<b>10</b>
		For setting the flow rate for pressurisation and exhausting (for Ø 4 mm)	Nominal size: 0.5 mm	<b>8047346</b>	<b>VFFG-T-F4-5</b>	<b>10</b>
			Nominal size: 0.6 mm	<b>8047347</b>	<b>VFFG-T-F4-6</b>	<b>10</b>
			Nominal size: 0.7 mm	<b>8047348</b>	<b>VFFG-T-F4-7</b>	<b>10</b>
			Nominal size: 0.85 mm	<b>8047349</b>	<b>VFFG-T-F4-8</b>	<b>10</b>
			Nominal size: 1.05 mm	<b>8047350</b>	<b>VFFG-T-F4-10</b>	<b>10</b>
			Nominal size: 1.2 mm	<b>8047351</b>	<b>VFFG-T-F4-12</b>	<b>10</b>
			Nominal size: 1.55 mm	<b>8047352</b>	<b>VFFG-T-F4-15</b>	<b>10</b>
For manifold rails VABM-L1-14...	For setting the flow rate for pressurisation and exhausting (for Ø 5.8 mm)	Nominal size: 0.7 mm	<b>8047353</b>	<b>VFFG-T-F6-7</b>	<b>10</b>	
		Nominal size: 0.85 mm	<b>8047354</b>	<b>VFFG-T-F6-8</b>	<b>10</b>	
		Nominal size: 1.05 mm	<b>8047355</b>	<b>VFFG-T-F6-10</b>	<b>10</b>	
		Nominal size: 1.15 mm	<b>8047356</b>	<b>VFFG-T-F6-11</b>	<b>10</b>	
		Nominal size: 1.4 mm	<b>8047357</b>	<b>VFFG-T-F6-14</b>	<b>10</b>	
		Nominal size: 1.6 mm	<b>8047358</b>	<b>VFFG-T-F6-16</b>	<b>10</b>	
		Nominal size: 1.8 mm	<b>8047359</b>	<b>VFFG-T-F6-18</b>	<b>10</b>	
<b>Restrictor set</b>						
	For manifold rails VABM-L1-10...	Two of each size, for threaded connection M5	<b>8025716</b>	<b>VFFG-T-M5-A-V1</b>	<b>14</b>	
		Two of each size, for Ø 4 mm	<b>8062200</b>	<b>VFFG-T-F4-A-V1</b>	<b>14</b>	
	For manifold rails VABM-L1-14...	Two of each size, for Ø 5.8 mm	<b>8062201</b>	<b>VFFG-T-F6-A-V1</b>	<b>14</b>	

1) Packaging unit.

# Valve terminals VTUG with multi-pin plug and fieldbus connection

FESTO

Accessories – Valve terminal

Ordering data				
Description		Part no.	Type	
Inscription label holder for valve terminal				
	Size 10	For 4 valve positions	<b>573453</b>	<b>ASCF-H-L1-10-4V</b>
		For 5 valve positions	<b>573454</b>	<b>ASCF-H-L1-10-5V</b>
		For 6 valve positions	<b>573455</b>	<b>ASCF-H-L1-10-6V</b>
		For 7 valve positions	<b>573456</b>	<b>ASCF-H-L1-10-7V</b>
		For 8 valve positions	<b>573457</b>	<b>ASCF-H-L1-10-8V</b>
		For 9 valve positions	<b>573458</b>	<b>ASCF-H-L1-10-9V</b>
		For 10 valve positions	<b>573459</b>	<b>ASCF-H-L1-10-10V</b>
		For 12 valve positions	<b>573460</b>	<b>ASCF-H-L1-10-12V</b>
		For 16 valve positions	<b>573461</b>	<b>ASCF-H-L1-10-16V</b>
		For 20 valve positions	<b>573462</b>	<b>ASCF-H-L1-10-20V</b>
		For 24 valve positions	<b>573463</b>	<b>ASCF-H-L1-10-24V</b>
		Size 14	For 4 valve positions	<b>573511</b>
	For 5 valve positions		<b>573512</b>	<b>ASCF-H-L1-14-5V</b>
	For 6 valve positions		<b>573513</b>	<b>ASCF-H-L1-14-6V</b>
	For 7 valve positions		<b>573514</b>	<b>ASCF-H-L1-14-7V</b>
	For 8 valve positions		<b>573515</b>	<b>ASCF-H-L1-14-8V</b>
	For 9 valve positions		<b>573516</b>	<b>ASCF-H-L1-14-9V</b>
	For 10 valve positions		<b>573518</b>	<b>ASCF-H-L1-14-10V</b>
	For 12 valve positions		<b>573519</b>	<b>ASCF-H-L1-14-12V</b>
	For 16 valve positions		<b>573520</b>	<b>ASCF-H-L1-14-16V</b>
	For 20 valve positions		<b>573521</b>	<b>ASCF-H-L1-14-20V</b>
	For 24 valve positions		<b>573522</b>	<b>ASCF-H-L1-14-24V</b>
	Size 18		For 4 valve positions	<b>8004928</b>
		For 5 valve positions	<b>8004929</b>	<b>ASCF-H-L1-18-5V</b>
		For 6 valve positions	<b>8004930</b>	<b>ASCF-H-L1-18-6V</b>
		For 7 valve positions	<b>8004931</b>	<b>ASCF-H-L1-18-7V</b>
		For 8 valve positions	<b>8004932</b>	<b>ASCF-H-L1-18-8V</b>
		For 9 valve positions	<b>8004933</b>	<b>ASCF-H-L1-18-9V</b>
		For 10 valve positions	<b>8004934</b>	<b>ASCF-H-L1-18-10V</b>
		For 12 valve positions	<b>8004935</b>	<b>ASCF-H-L1-18-12V</b>
		For 16 valve positions	<b>8004936</b>	<b>ASCF-H-L1-18-16V</b>
		For 20 valve positions	<b>8004937</b>	<b>ASCF-H-L1-18-20V</b>
		For 24 valve positions	<b>8004938</b>	<b>ASCF-H-L1-18-24V</b>
H-rail <span style="float: right;">Technical data → Internet: nrh</span>				
	To EN 60715, 35 x 7.5 (WxH)	Length 2 m	<b>35430</b>	<b>NRH-35-2000</b>
H-rail mounting <span style="float: right;">Technical data → Internet: vame</span>				
	Use the following screws for mounting: Size 10: DIN 912: M4x30 Size 14: DIN 912: M4x40 Size 18: DIN 912: M5x50		★ <b>569998</b>	<b>VAME-T-M4</b>

Festo core product range

- ★ Generally ready for shipping ex works in 24 hours
- ☆ Generally ready for shipping ex works in 5 days