

Servo motors EMMS-AS

FESTO



Key features

Everything from a single source

Motors EMMS-AS

→ Page 4



- Dynamic, brushless, permanently excited synchronous servo motors
- Choice of feedback systems:
 - Digital absolute encoder, single-turn
 - Digital absolute encoder, multi-turn
 - Resolver
- Optimised connection technology, depending on the version and flange size
- Winding variants
 - For single-motor controller
 - For three-phase motor controller
 - Torque-optimised
 - Speed-optimised
- Degree of protection: IP54 (motor shaft)
- Degree of protection: IP65 (motor housing with connection technology)
- Optional:
 - Holding brake
 - Featherkey
 - Degree of protection IP65: with shaft seal for motor shaft

Gear unit EMGA-SAS

→ Page 37



- Low-backlash planetary gear
- Gear ratio $i = 3$ and 5 , available from stock
- Life-time lubrication
- Degree of protection: IP54
- Other gear unit types, ratios, designs and versions on request

Motor controller CMMP-AS

→ Internet: cmm



- Digital servo controller (0.5 kVA ... 18 kVA)
- Actuation of AC servo and linear motors
- Integrated EMC filters
- Integrated brake chopper
- Integrated safety functions
- Position controller with closed-loop position control (256 position records)
- Speed controller
- Torque control via current regulator
- Range of control functions
- Interfaces:
 - I/O interface
 - CANopen, standard
 - PROFIBUS DP, optional module
 - DeviceNet, optional module
 - PROFINET RT, optional module
 - EtherCAT, optional module
 - EtherNet/IP, optional module

Motor and encoder cables NEBM

→ Page 39



- Suitable for energy chains
- Connection technology on motor side with degree of protection to IP65
- Can be used in a wide temperature range

Axial and parallel kits EAMM

→ Internet: eamm



- Specific kits for all electromechanical axes from Festo
- Each kit includes the relevant necessary coupling housing, couplings and motor flange as well as all screws
- Optionally with degree of protection IP65

Type code

001	Series	
EMMS	Motor	
002	Motor type	
AS	AC synchronous	
003	Flange size, motors	
40	40	
55	55	
70	70	
100	100	
140	140	
190	190	
004	Length	
S	Short	
M	Centre	
L	Long	
005	Output shaft	
	Smooth shaft	
K	Shaft to DIN 6885	

006	Winding	
LS	Low voltage, standard	
LV	Low voltage, speed optimised	
HS	High voltage, standard	
HV	High voltage, speed optimised	
007	Electrical connection	
T	Terminal box	
A	Angled plug	
R	Angled connector, adjustable	
S	Straight plug	
008	Measuring unit	
R	Resolver	
S	Absolute encoder, single turn	
M	Absolute encoder, multi-turn	
009	Brake	
	None	
B	With brake	
010	Degree of protection, electrical system	
	Standard	
S1	IP65	

Data sheet



Note
Motors and motor controllers from Festo have been specially designed to be used together. Trouble-free operation cannot be guaranteed in combination with third-party controllers.



Technical data			
Flange size		40	
Length		S	M
Winding		LS	LS
Motor			
Nominal voltage	[V DC]	360	360
Nominal current	[A]	0.83	0.63
Peak current	[A]	3.3	3.3
Nominal power	[W]	135	232
Nominal torque	[Nm]	0.14	0.22
Peak torque	[Nm]	0.5	1
Standstill torque	[Nm]	0.16	0.26
Nominal rotational speed	[rpm]	9000	10300
Max. rotational speed	[rpm]	23040	11520
Motor constant	[Nm/A]	0.172	0.344
Number of pole pairs		4	4
Winding resistance	[Ω]	20.5	31.0
Winding inductance	[mH]	5.18	10.40
Total moment of inertia of drive output			
Encoder			
Without brake	[kgcm ²]	0.023	0.045
With brake	[kgcm ²]	0.033	0.055
Resolver			
Without brake	[kgcm ²]	0.027	0.049
With brake	[kgcm ²]	0.037	0.059
Shaft load			
Radial	[N]	78	82
Axial	[N]	12	12
Brake			
Operating voltage	[V DC]	24 +6 ... -10%	
Power	[W]	6	
Holding torque	[Nm]	0.4	
Mass moment of inertia			
Encoder	[kgcm ²]	0.01	
Resolver	[kgcm ²]	0.01	

Data sheet

Technical data					
Flange size		55			
Length		S	S	M	M
Winding		LS	HS	LS	HS
Motor					
Nominal voltage	[V DC]	360	565	360	565
Nominal current	[A]	0.83	0.49	1.19	0.80
Peak current	[A]	4.30	2.70	5	4.90
Nominal power	[W]	261	246	461	470
Nominal torque	[Nm]	0.34	0.31	0.67	0.68
Peak torque	[Nm]	1.65	1.62	2.7	3.80
Standstill torque	[Nm]	0.49	0.46	0.97	0.99
Nominal rotational speed	[rpm]	7400	7600	6600	6600
Max. rotational speed	[rpm]	9800	9840	7330	7750
Motor constant	[Nm/A]	0.406	0.635	0.558	0.829
Number of pole pairs		4	4	4	4
Winding resistance	[Ω]	20.90	56.90	14.70	31.30
Winding inductance	[mH]	15.60	38.10	13.80	29.30
Total moment of inertia of drive output					
Encoder					
Without brake	[kgcm ²]	0.11	0.11	0.223	0.223
With brake	[kgcm ²]	0.13	0.13	0.245	0.245
Resolver					
Without brake	[kgcm ²]	0.13	0.13	0.220	0.220
With brake	[kgcm ²]	0.15	0.15	0.240	0.240
Shaft load					
Radial	[N]	140		150	
Axial	[N]	75			
Brake					
Operating voltage	[V DC]	24 +6 ... -10%			
Power	[W]	10			
Holding torque	[Nm]	0.8			
Mass moment of inertia					
Encoder	[kgcm ²]	0.02			
Resolver	[kgcm ²]	0.02			

Data sheet

Technical data					
Flange size		70			
Length		S			
Winding		LS	LV	HS	HV
Motor					
Nominal voltage	[V DC]	360	360	565	565
Nominal current	[A]	2.20	2.64	1.29	1.60
Peak current	[A]	5	11	5.90	7.50
Nominal power	[W]	866	945	794	992
Nominal torque	[Nm]	1.43	1.37	1.31	1.28
Peak torque	[Nm]	3.10	5	5.17	5.17
Standstill torque	[Nm]	1.64	1.64	1.50	1.62
Nominal rotational speed	[rpm]	5300	6600	5800	7400
Max. rotational speed	[rpm]	6450	8070	6460	8200
Motor constant	[Nm/A]	0.647	0.518	1.016	0.798
Number of pole pairs		4	4	4	4
Winding resistance	[Ω]	7.66	4.90	22.442	11.935
Winding inductance	[mH]	14.50	8.45	31.785	19.741
Total moment of inertia of drive output					
Encoder					
Without brake	[kgcm ²]	0.379			
With brake	[kgcm ²]	0.449			
Resolver					
Without brake	[kgcm ²]	0.390			
With brake	[kgcm ²]	0.460			
Shaft load					
Radial	[N]	150			
Axial	[N]	75			
Brake					
Operating voltage	[V DC]	24 +6 ... -10%			
Power	[W]	11			
Holding torque	[Nm]	2			
Mass moment of inertia					
Encoder	[kgcm ²]	0.07			
Resolver	[kgcm ²]	0.07			

Data sheet

Technical data					
Flange size		70			
Length		M			
Winding		LS	LV	HS	HV
Motor					
Nominal voltage	[V DC]	360	360	565	565
Nominal current	[A]	2.60	3.02	1.70	1.84
Peak current	[A]	10	12.50	7.40	8.30
Nominal power	[W]	1061	1100	1044	1146
Nominal torque	[Nm]	2.29	2.28	2.26	2.19
Peak torque	[Nm]	7.75	8.30	8.55	8.55
Standstill torque	[Nm]	2.56	2.57	2.53	2.52
Nominal rotational speed	[rpm]	4100	4600	4400	5000
Max. rotational speed	[rpm]	4880	5570	4960	5560
Motor constant	[Nm/A]	0.864	0.757	1.333	1.189
Number of pole pairs		4	4	4	4
Winding resistance	[Ω]	6.71	5.08	16.294	13.007
Winding inductance	[mH]	13.44	10.10	30.834	24.523
Total moment of inertia of drive output					
Encoder					
Without brake	[kgcm ²]	0.611			
With brake	[kgcm ²]	0.680			
Resolver					
Without brake	[kgcm ²]	0.620			
With brake	[kgcm ²]	0.690			
Shaft load					
Radial	[N]	200			
Axial	[N]	75			
Brake					
Operating voltage	[V DC]	24 +6 ... -10%			
Power	[W]	11			
Holding torque	[Nm]	2			
Mass moment of inertia					
Encoder	[kgcm ²]	0.07			
Resolver	[kgcm ²]	0.07			

Data sheet

Technical data					
Flange size		100			
Length		S	M	L	L
Winding		HS	HS	HS	HV
Motor					
Nominal voltage	[V DC]	565	565	565	565
Nominal current	[A]	3.30	3.40	3.80	3.79
Peak current	[A]	15	15	24.80	24.80
Nominal power	[W]	1560	2000	2360	2240
Nominal torque	[Nm]	3.24	5.63	7.51	6.29
Peak torque	[Nm]	12.50	22.10	39.80	35.40
Standstill torque	[Nm]	4.71	8.01	10.94	10.93
Nominal rotational speed	[rpm]	4600	3400	3000	3400
Max. rotational speed	[rpm]	6680	4030	3360	4040
Motor constant	[Nm/A]	0.984	1.652	1.993	1.66
Number of pole pairs		6	6	6	6
Winding resistance	[Ω]	2.92	3.25	2.84	1.98
Winding inductance	[mH]	8.85	12.3	10.50	7.76
Total moment of inertia of drive output					
Encoder					
Without brake	[kgcm ²]	2.529	4.729	6.60	6.60
With brake	[kgcm ²]	3.085	5.285	7.21	7.21
Resolver					
Without brake	[kgcm ²]	2.60	4.70	6.80	6.80
With brake	[kgcm ²]	3.14	5.24	7.34	7.34
Shaft load					
Radial	[N]	300	570	650	650
Axial	[N]	150	150	150	150
Brake					
Operating voltage	[V DC]	24 +6 ... -10%			
Power	[W]	18			
Holding torque	[Nm]	9			
Mass moment of inertia					
Encoder	[kgcm ²]	0.61			
Resolver	[kgcm ²]	0.54			

Data sheet

Technical data					
Flange size		140			
Length		S	S	L	L
Winding		HS	HV	HS	HV
Motor					
Nominal voltage	[V DC]	565	565	565	565
Nominal current	[A]	4.40	5.23	7.80	9.96
Peak current	[A]	15	24.40	20	51.50
Nominal power	[W]	2600	3140	4420	5110
Nominal torque	[Nm]	9.55	7.70	21.12	17.41
Peak torque	[Nm]	25.60	27	48.80	67.50
Standstill torque	[Nm]	11.20	11.08	25.60	25.50
Nominal rotational speed	[rpm]	2600	3900	2000	2800
Max. rotational speed	[rpm]	3060	4510	2460	3830
Motor constant	[Nm/A]	2.166	1.47	2.72	1.75
Number of pole pairs		6	6	6	6
Winding resistance	[Ω]	3.39	1.60	1.41	0.586
Winding inductance	[mH]	20.50	9.01	13.44	4.65
Total moment of inertia of drive output					
Encoder					
Without brake	[kgcm ²]	8.189	8.189	19.027	19.027
With brake	[kgcm ²]	9.271	9.271	20.108	20.108
Resolver					
Without brake	[kgcm ²]	8	8	18.400	18.400
With brake	[kgcm ²]	9	9	19.400	19.400
Shaft load					
Radial	[N]	780	780	1 060	1 060
Axial	[N]	200	200	200	200
Brake					
Operating voltage	[V DC]	24 +6 ... -10%			
Power	[W]	15.6			
Holding torque	[Nm]	18			
Mass moment of inertia					
Encoder	[kgcm ²]	1.2			
Resolver	[kgcm ²]	1.0			

Data sheet

Technical data			
Flange size		190	
Length		S	M
Winding		HS	HS
Motor			
Nominal voltage	[V DC]	565	565
Nominal current	[A]	14.43	14.24
Peak current	[A]	77.20	88.20
Nominal power	[W]	5490	6880
Nominal torque	[Nm]	17.47	22.63
Peak torque	[Nm]	80	120
Standstill torque	[Nm]	26.20	38.77
Nominal rotational speed	[rpm]	3000	2900
Max. rotational speed	[rpm]	5300	4060
Motor constant	[Nm/A]	1.211	1.589
Number of pole pairs		6	6
Winding resistance	[Ω]	0.283	0.265
Winding inductance	[mH]	3.07	3.38
Total moment of inertia of drive output			
Encoder			
Without brake	[kgcm ²]	51.90	76.80
With brake	[kgcm ²]	55.70	80.60
Resolver			
Without brake	[kgcm ²]	52.10	77.00
With brake	[kgcm ²]	55.70	80.60
Shaft load			
Radial	[N]	940	1 080
Axial	[N]	250	250
Brake			
Operating voltage	[V DC]	24 +6 ... -10%	
Power	[W]	17	
Holding torque	[Nm]	30	
Mass moment of inertia			
Encoder	[kgcm ²]	3.8	
Resolver	[kgcm ²]	3.6	

Data sheet

Technical data – Encoder		
Measuring unit	Absolute, single turn	Absolute, multi-turn
Operating voltage [V DC]	5	
Operating voltage range [V DC]	3.6 ... 14	
Protocol	EnDat 2.2, digital channel only, max. cycle rate (CLOCK) ≤ 16 MHz	
Position values per revolution	262144	524288
Rotor position sensor resolution	18 bit	19 bit
Revolutions	–	4096 revolutions, 12 bits

Technical data – Resolver		
Version	Transmitters	
Input voltage [V DC]	4	
Input current [mA]	50	
Number of poles	2	
Carrier frequency [kHz]	3.4 ... 8.0	

Weight [kg]						
Flange size	40		55		70	
Length	S	M	S	M	S	M
Encoder						
Without brake	0.87	1.00	1.30	1.60	2.10	2.70
With brake	0.92	1.05	1.42	1.70	2.30	2.90
Resolver						
Without brake	0.55	0.68	1.20	1.50	2.19	2.79
With brake	0.61	0.74	1.32	1.62	2.39	2.99

Flange size	100			140		190	
Length	S	M	L	S	L	S	M
Encoder							
Without brake	4.80	6.90	8.86	9.60	16.20	20.86	26.86
With brake	5.30	7.50	9.39	10.40	17.00	21.96	27.96
Resolver							
Without brake	5.04	7.14	9.10	9.84	16.44	21.10	27.10
With brake	5.54	7.74	9.63	10.64	17.24	22.20	28.20

Data sheet

Operating and environmental conditions		
Standard		IEC60034
Degree of protection		
Motor shaft		IP54
Motor housing incl. connection technology		IP65
With shaft sealing ring		IP65
Ambient temperature		
Encoder	[°C]	-10 ... +40 (up to 100°C with derating)
Resolver	[°C]	-40 ... +40 (up to 130°C with derating)
Storage temperature	[°C]	-20 ... +60
Temperature monitoring		PTC resistance; NRT 140°C (nominal response temperature)
Insulation class		F
Rating class to EN 60034-1		S1
Thermal class to EN 60034-1		F
Relative humidity	[%]	0 ... 90 (non-condensing)
Corrosion resistance CRC ¹⁾		2
CE marking (see declaration of conformity)		To EU Low Voltage Directive To EU EMC Directive ²⁾
Certification		c UL us - Recognized (OL) RCM compliance mark
Note on materials		RoHS-compliant

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Internal application in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Data sheet


Pin allocation – Motor side

Motor with encoder

Flange size 40, 55

Motor


Black plug



PIN	Function
1	V Phase
2	W Phase
3	U Phase
PE	PE Protective earth

Encoder


Red plug



PIN	Function
1	DATA
2	DATA/
3	0 V
4	UP
5	CLOCK/
6	CLOCK

Encoder


Yellow plug



PIN	Function
1	-SENS
2	+SENS
3	n.c.
4	n.c.
5	n.c.
6	n.c.

Temperature sensor and brake


Blue plug



PIN	Function
1	M ₁ + Temperature sensor
2	M ₁ - Temperature sensor
3	BR+ Brake
4	BR- Brake
5	n.c.
6	n.c.


Flange size 70, 100, 140

Motor, (M23, pins)



PIN	Function
1	U Phase
PE	PE Protective earth
3	W Phase
4	V Phase
A	M ₁ + Temperature sensor
B	M ₁ - Temperature sensor
C	BR+ Brake
D	BR- Brake


Encoder (M12, pins)



PIN	Function
1	-SENS
2	+SENS
3	DATA
4	DATA/
5	0 V
6	CLOCK/
7	CLOCK
8	UP


Flange size 190

Motor, (M40, pins)



PIN	Function
U	U Phase
PE	PE Protective earth
W	W Phase
V	V Phase
1	M ₁ + Temperature sensor
2	M ₁ - Temperature sensor
+	BR+ Brake
-	BR- Brake

Encoder (M12, pins)



PIN	Function
1	-SENS
2	+SENS
3	DATA
4	DATA/
5	0 V
6	CLOCK/
7	CLOCK
8	UP


Data sheet

Pin allocation – Motor side

Motor with resolver


Flange size 40, 55, 70, 100, 140

Motor, temperature sensor and brake (M23, pins)



PIN	Function
1	U Phase
PE	PE Protective earth
3	W Phase
4	V Phase
A	M _T + Temperature sensor
B	M _T - Temperature sensor
C	BR+ Brake
D	BR- Brake


Resolver (M23, pins)



PIN	Function
1	R1 Exciter signal +
2	R2 Exciter signal -
3	S1 Cosine signal +
4	S3 Cosine signal -
5	S2 Sine signal +
6	S4 Sine signal -
7	n.c.
8	n.c.
9	n.c.
10	n.c.
11	n.c.
12	n.c.


Flange size 190

Motor, temperature sensor and brake (M40, pins)



PIN	Function
U	U Phase
PE	PE Protective earth
W	W Phase
V	V Phase
1	M _T + Temperature sensor
2	M _T - Temperature sensor
+	BR+ Brake
-	BR- Brake

Resolver (M23, pins)




PIN	Function
1	R1 Exciter signal +
2	R2 Exciter signal -
3	S1 Cosine signal +
4	S3 Cosine signal -
5	S2 Sine signal +
6	S4 Sine signal -
7	n.c.
8	n.c.
9	n.c.
10	n.c.
11	n.c.
12	n.c.

Data sheet


Torque M as a function of rotational speed n

Flange size 40

Length S
Winding LS

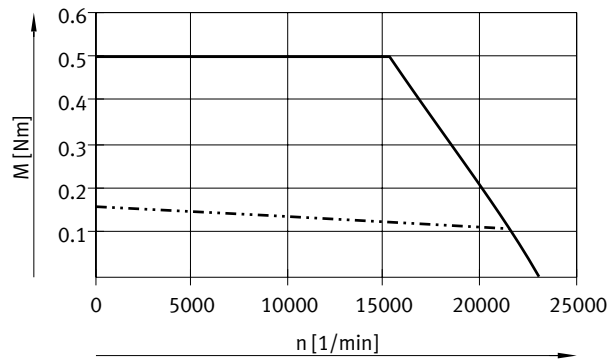


Length M
Winding LS

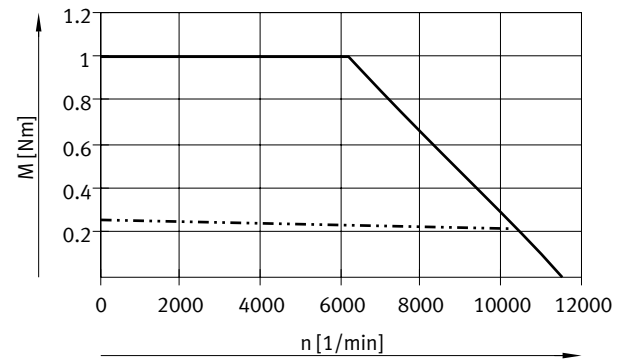


Flange size 55

Length S
Winding LS

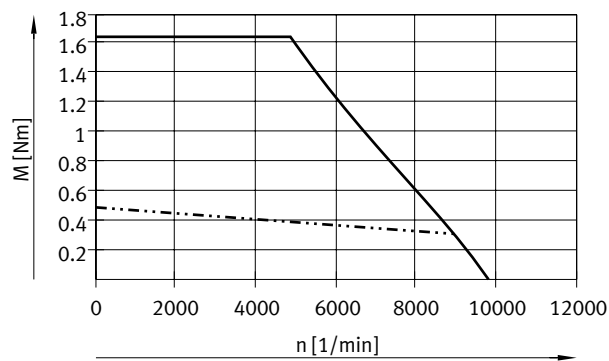


Length S
Winding HS

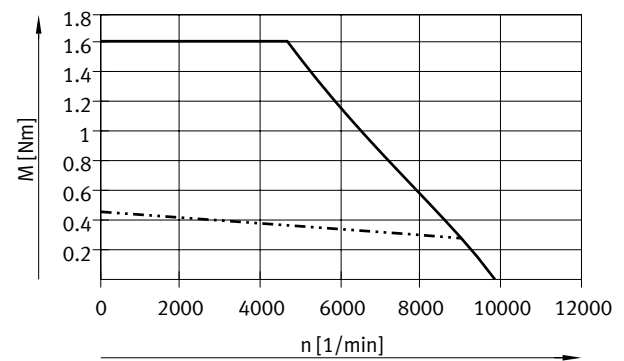


Flange size 55

Length M
Winding LS

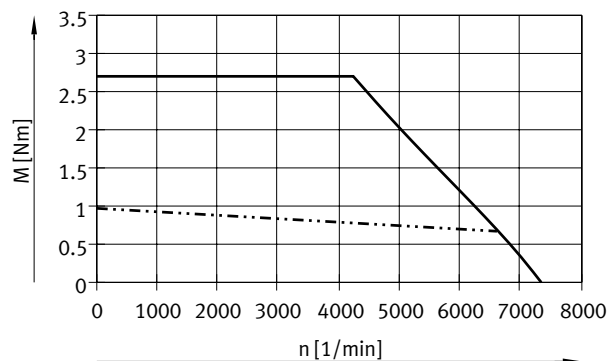

Length M
Winding HS

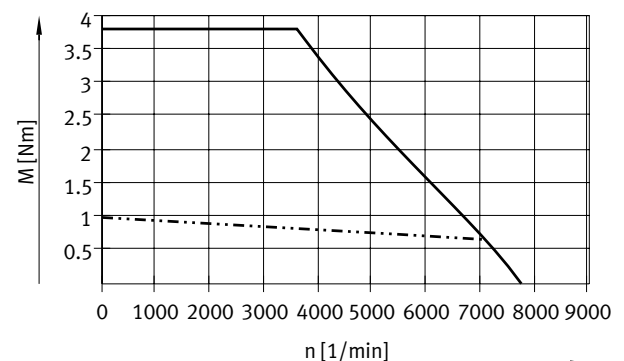

— Peak torque
- · · · · · Nominal torque

Note
Typical motor characteristic curve with nominal voltage and optimal motor controller.


Data sheet

Torque M as a function of rotational speed n

Flange size 70

Length S


Winding LS, LV

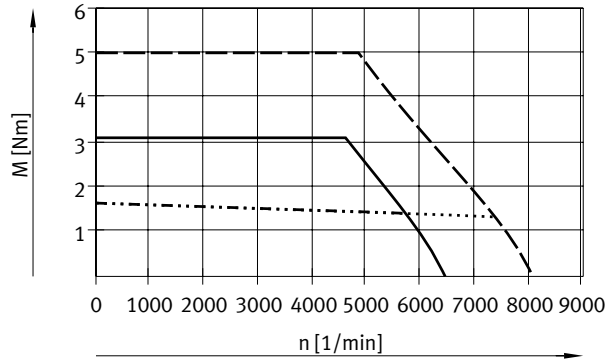

- Peak torque EMMS-AS-...-LS
- Nominal torque EMMS-AS-...-LS
- - - Peak torque EMMS-AS-...-LV
- · - · - Nominal torque EMMS-AS-...-LV

Length S

Winding HS, HV

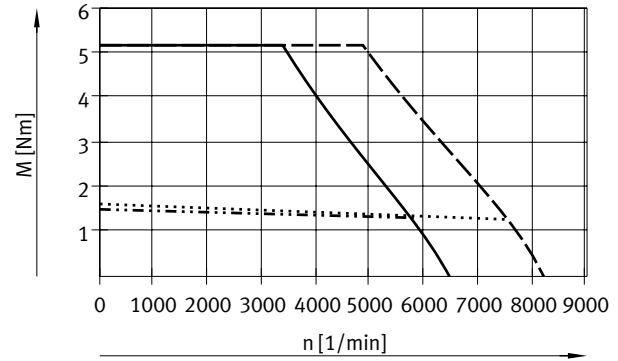


- Peak torque EMMS-AS-...-HS
- Nominal torque EMMS-AS-...-HS
- - - Peak torque EMMS-AS-...-HV
- · - · - Nominal torque EMMS-AS-...-HV

Flange size 70

Length M


Winding LS, LV

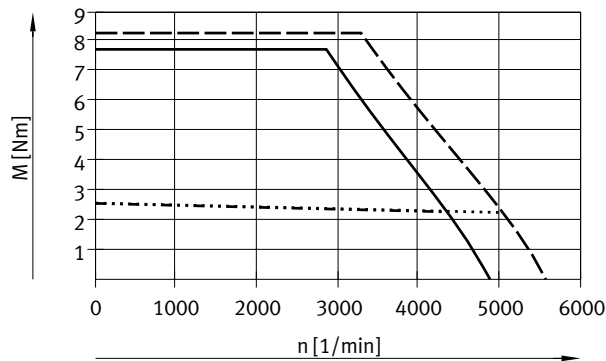


- Peak torque EMMS-AS-...-LS
- Nominal torque EMMS-AS-...-LS
- - - Peak torque EMMS-AS-...-LV
- · - · - Nominal torque EMMS-AS-...-LV

Length M

Winding HS, HV

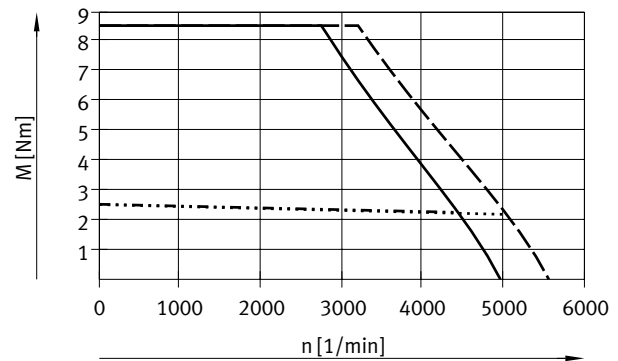

- Peak torque EMMS-AS-...-HS
- Nominal torque EMMS-AS-...-HS
- - - Peak torque EMMS-AS-...-HV
- · - · - Nominal torque EMMS-AS-...-HV

 **Note**


Typical motor characteristic curve with nominal voltage and optimal motor controller.

Data sheet


Torque M as a function of rotational speed n

Flange size 100

Length S
Winding HS

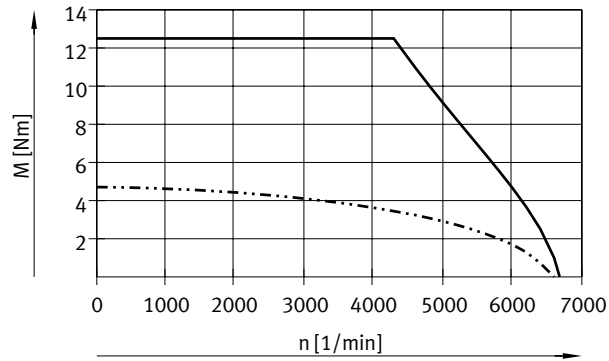


Length M
Winding HS

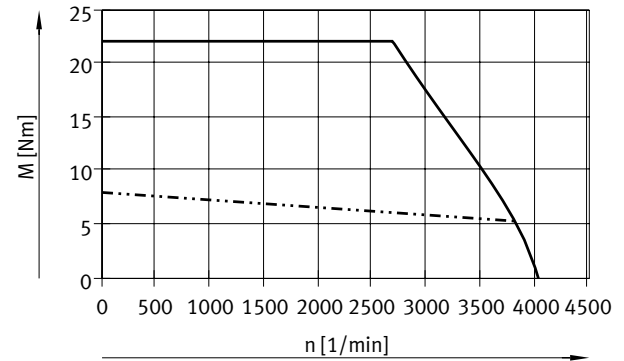


Flange size 100

Length L
Winding HS

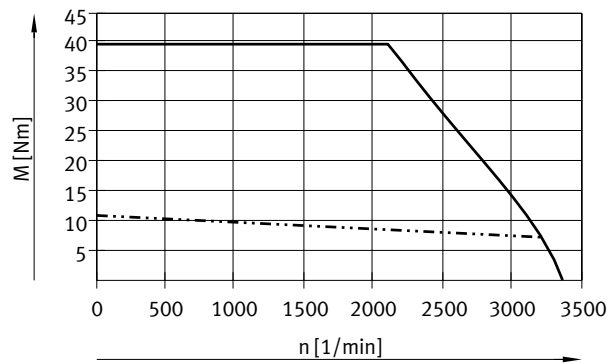


Length L
Winding HV

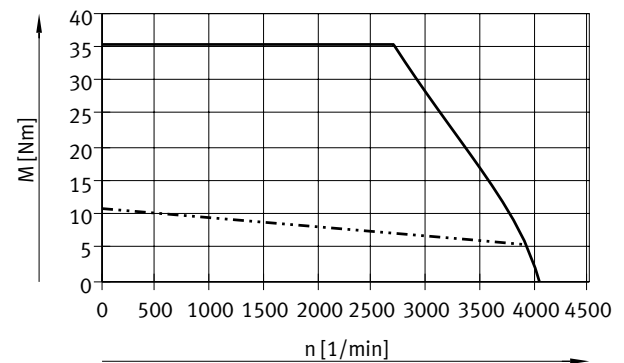


Flange size 140

Length S
Winding HS

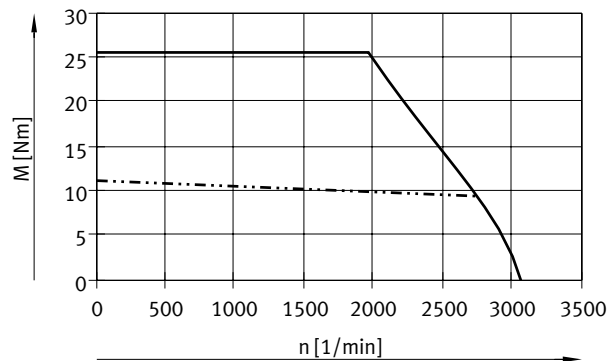

Length S
Winding HV

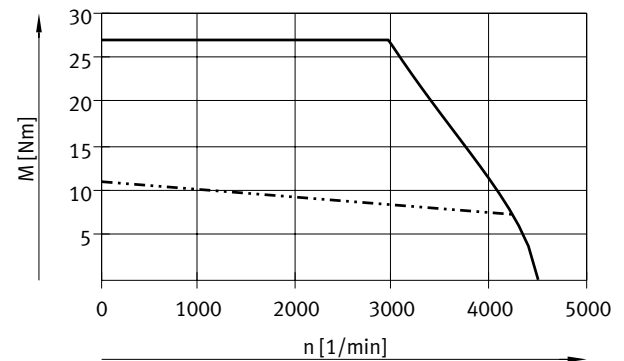

— Peak torque
- · · · · · Nominal torque


Note
Typical motor characteristic curve with nominal voltage and optimal motor controller.

Data sheet


Torque M as a function of rotational speed n

Flange size 140

Length L
Winding HS

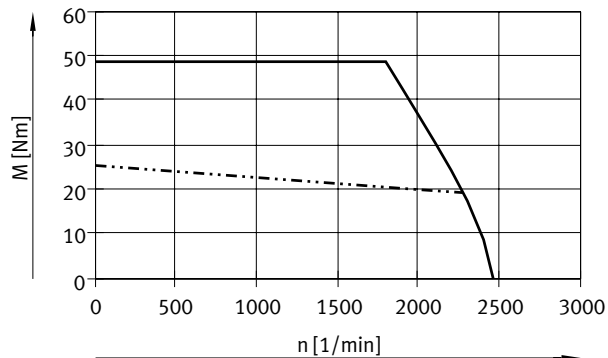


Length L
Winding HV

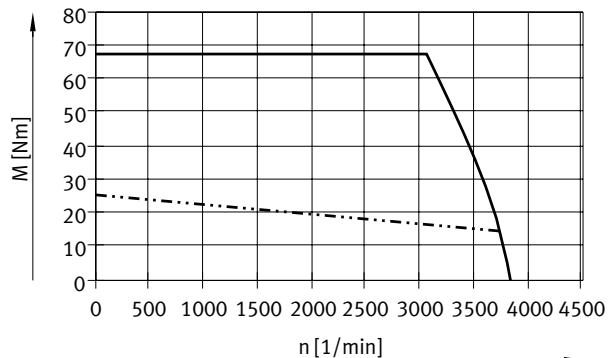


Flange size 190

Length S
Winding HS

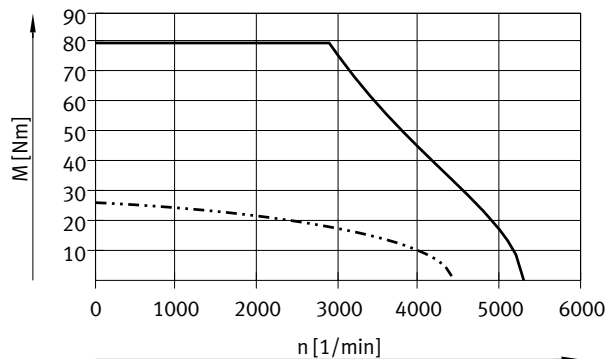

Length M
Winding HS

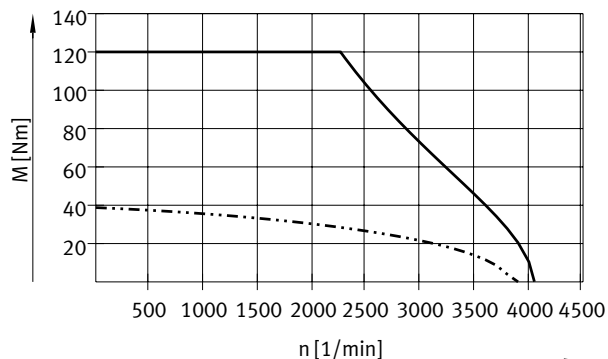

— Peak torque
- · - · - Nominal torque


Note
Typical motor characteristic curve with nominal voltage and optimal motor controller.

Data sheet

Dimensions

Download CAD data → www.festo.com

Flange size 40 – With encoder

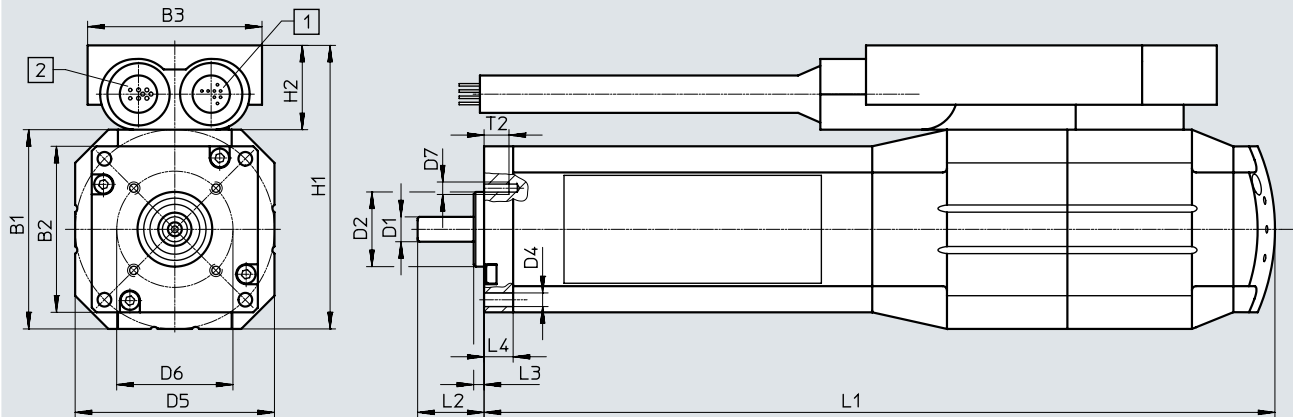


- [1] Encoder cable
- [2] Motor cable

Length	B1	B2	B3	D1 ∅ +0.009/-0.001	D2 ∅ +0.012/-0.006	D4 ∅	D5 ∅	D6 ∅
S	48	40	42	6	18	3.3	48	28
M								

Length	D7	H1	H2	L1	L2	L3 -0.1	L4	T2
S	M3	68.3	20.3	170.5	16	2.5	7	6
M				190.5				

Flange size 40 – With resolver

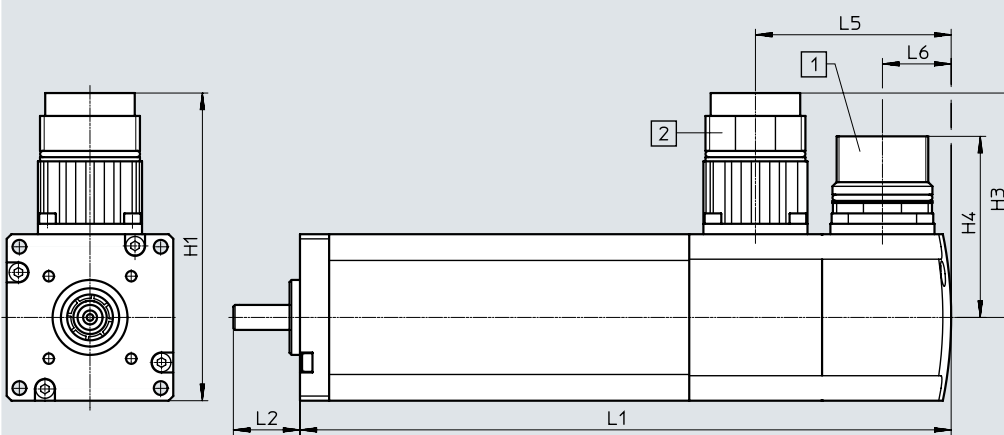

Note
 - - -
 Dimensions of the shaft and mounting holes → Drawing, top

- [1] Resolver connection
- [2] Motor connection


Length	H1	H3	H4	L1		L2	L5		L6
					With brake			With brake	
S	74	54	44	134.9	136.4	16	46.5	48	17
M				154.9	156.4				

Data sheet

Dimensions

Download CAD data → www.festo.com

Flange size 55 – With encoder

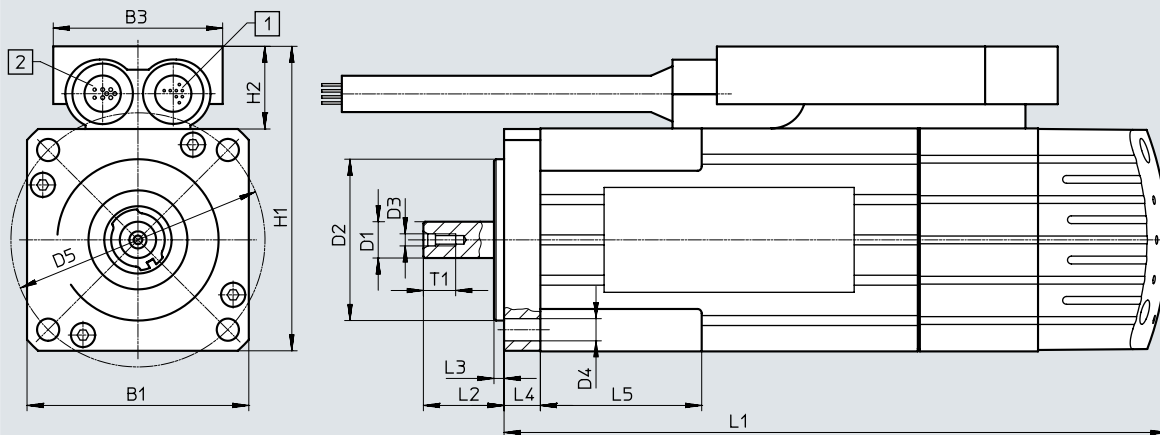


- [1] Encoder cable
- [2] Motor cable

Length	B1	B3	D1 ∅ +0.01/-0.001	D2 ∅ +0.11/-0.005	D3	D4 ∅	D5 ∅
S	55	42	9	40	M2.5	5.5	63
M							

Length	H1	H2	L1	L2	L3 ±0.05	L4	L5	T1
S	76	20.5	139.4	20	2.5	9	40	8
M			164.4					

Flange size 55 – with resolver

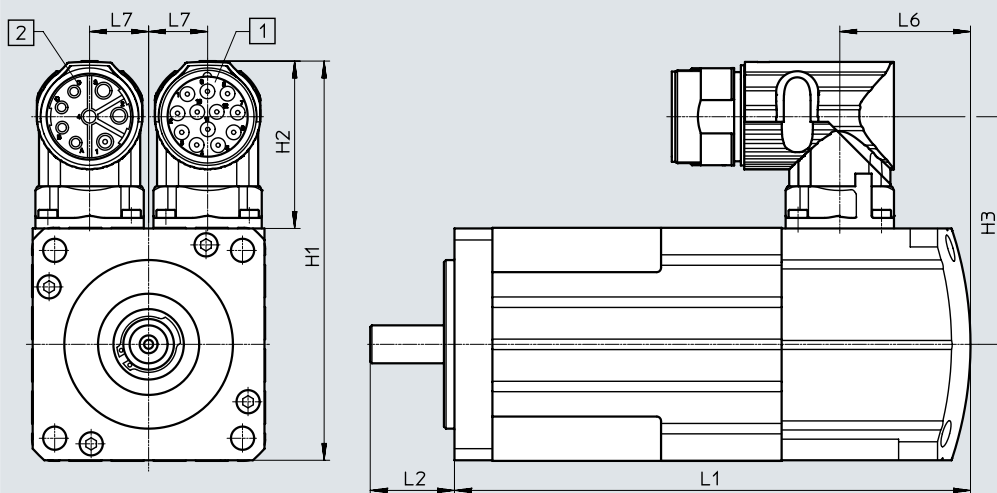

Note
 Dimensions of the shaft and mounting holes → Drawing, top

- [1] Resolver connection
- [2] Motor connection


Length	H1	H2	H3	L1		L2	L6		L7
					With brake			With brake	
S	94.7	39.7	54	122.4	139.4	20	31	48	14
M				147.4	164.4				

Data sheet

Dimensions

Download CAD data → www.festo.com

Flange size 70, 100, 140, 190 – With encoder

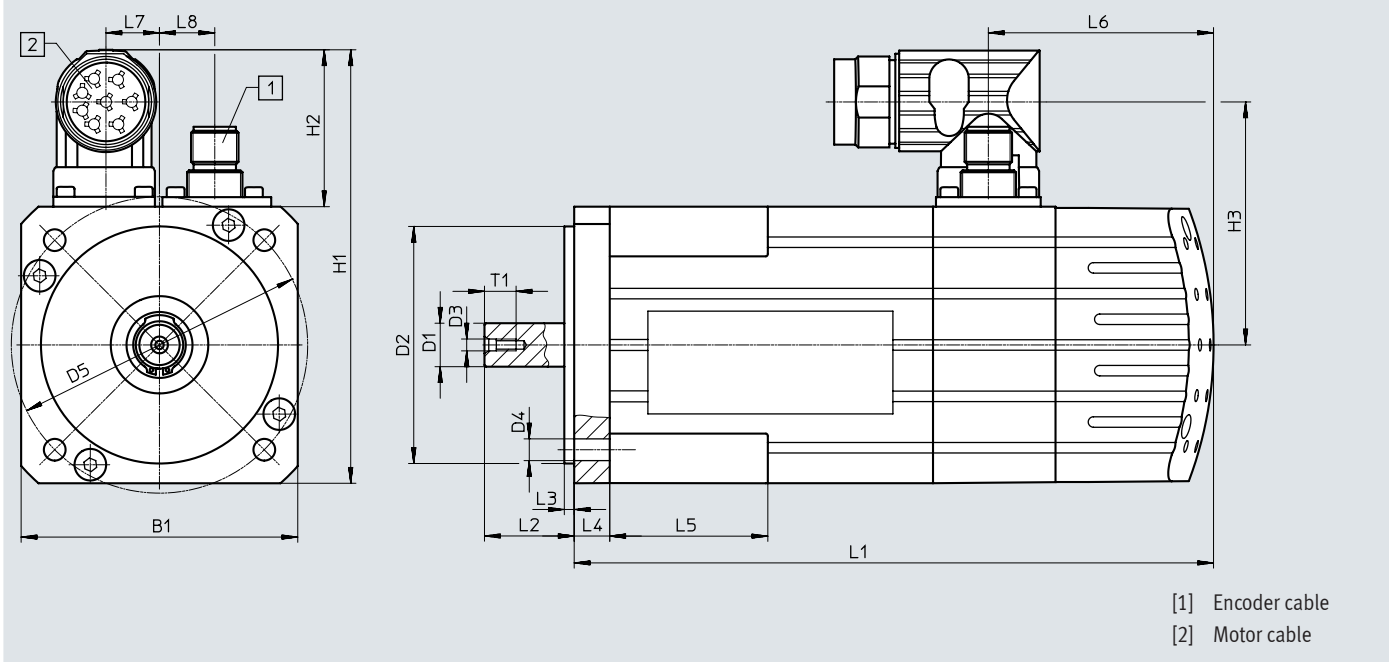

- [1] Encoder cable
- [2] Motor cable

Length	B1	D1 ∅	D2 ∅	D3	D4 ∅	D5 ∅	H1	H2	H3
Flange size 70									
S	70	11+0.012/+0.001	60+0.012/-0.007	M2.5	5.5	75	109.7	39.7	61.5
M									
Flange size 100									
S	100.5	19+0.015/+0.002	95+0.013/-0.009	M4	9.2	115	140	39.7	77
M									
L									
Flange size 140									
S	140.5	24+0.015/-0.002	130+0.018/-0.007	M4	11.3	165	181	39.7	97.7
L									
Flange size 190									
S	190	32+0.018/+0.002	180+0.14/-0.011	M4	13.7	215	251	61	136
M									


Length	L1	L2	L3	L4	L5	L6	L7	L8	T1
Flange size 70									
S	161.8	22.7	2.5 _{-0.1}	9	40	57	14	14	8
M	187.3								
Flange size 100									
S	192.3	40	3	9.8	-	58.9	19	19	16
M	243.3								
L	294.3								
Flange size 140									
S	209	50	3.5	12.2	-	58.6	33.5	33.5	16
L	285.5								
Flange size 190									
S	262	60	4 _{-0.1}	11	-	81	25	33	16
M	300								

Data sheet


Dimensions

Download CAD data → www.festo.com

Flange size 70, 100, 140, 190 – With resolver

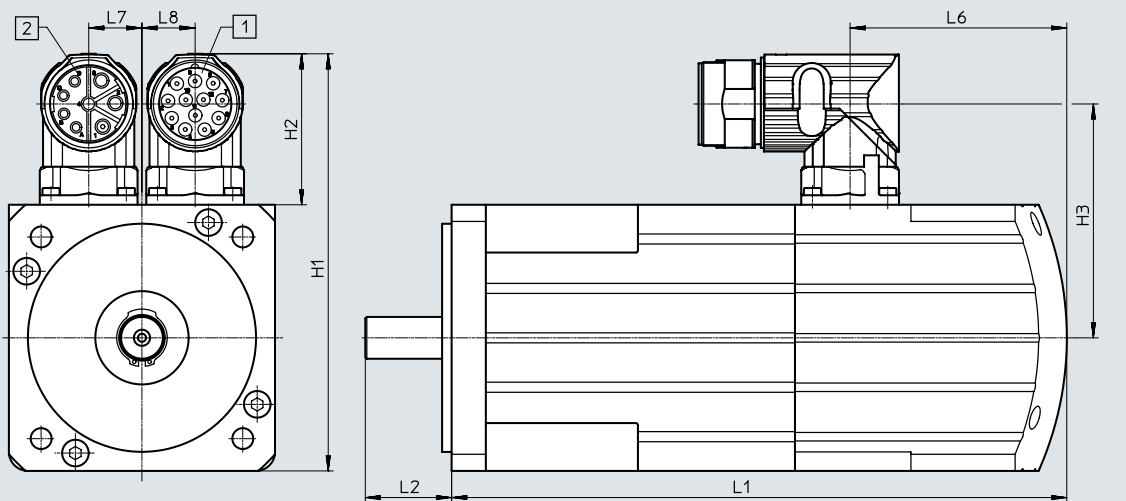

Flange size 190

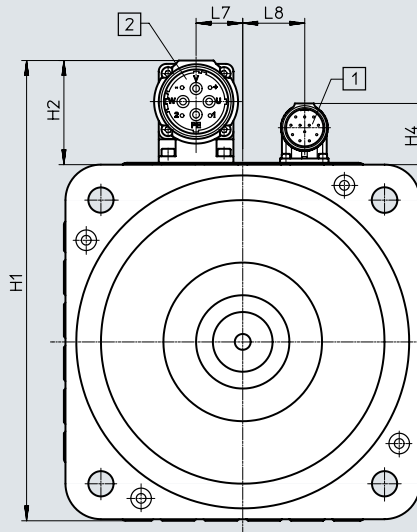

- [1] Resolver connection
- [2] Motor connection

Note
 Dimensions of the shaft and mounting holes → Drawing 21

Length	H1	H2	H3	H4	L1		L2	L6		L7	L8
					With brake	Without brake		With brake	Without brake		
Flange size 70											
S	109.7	39.7	61.5	-	139.8	161.8	22.7	35	57	14	14
M					165.3	187.3					
Flange size 100											
S	140.2	39.7	76.8	-	171.1	192.1	40	37.8	58.9	19	19
M					222.1	243.1					
L					273.1	294.1					
Flange size 140											
S	180.2	39.7	96.8	-	194.6	209	50	44.2	58.6	33.5	33.5
L					271.1	285.5					
Flange size 190											
S	244	54	128.8	33	225	262	60	44	81	25	33
M					263	300					

Note
 Only motors without featherkey may be used in combination with parallel and axial kits (EAMM-U/EAMM-A).

Data sheet

Ordering data – Without featherkey													Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection (IP65) (with shaft seal)			
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver					
Flange size 40														
■			■				■						1578600	EMMS-AS-40-S-LS-TS
■			■				■			■			1578603	EMMS-AS-40-S-LS-TSB
■			■					■					1578602	EMMS-AS-40-S-LS-TM
■			■					■		■			1578604	EMMS-AS-40-S-LS-TMB
■			■						■				1578605	EMMS-AS-40-S-LS-SR
■			■						■	■			1578606	EMMS-AS-40-S-LS-SRB
	■		■				■						550106	EMMS-AS-40-M-LS-TS
	■		■				■			■			550108	EMMS-AS-40-M-LS-TSB
	■		■					■					550107	EMMS-AS-40-M-LS-TM
	■		■					■		■			550109	EMMS-AS-40-M-LS-TMB
	■		■						■				1578617	EMMS-AS-40-M-LS-SR
	■		■						■	■			1578618	EMMS-AS-40-M-LS-SRB
Flange size 55														
■			■				■						1569736	EMMS-AS-55-S-LS-TS
■			■				■			■			1569738	EMMS-AS-55-S-LS-TSB
■			■					■					1569737	EMMS-AS-55-S-LS-TM
■			■					■		■			1569739	EMMS-AS-55-S-LS-TMB
■			■						■				1569740	EMMS-AS-55-S-LS-RR
■			■						■	■			1569741	EMMS-AS-55-S-LS-RRB
■			■				■				■		1569748	EMMS-AS-55-S-LS-TS-S1
■			■				■			■	■		1569750	EMMS-AS-55-S-LS-TSB-S1
■			■					■			■		1569749	EMMS-AS-55-S-LS-TM-S1
■			■					■		■	■		1569751	EMMS-AS-55-S-LS-TMB-S1
■			■						■		■		1569752	EMMS-AS-55-S-LS-RR-S1
■			■						■	■	■		1569753	EMMS-AS-55-S-LS-RRB-S1
■					■		■						1569760	EMMS-AS-55-S-HS-TS
■					■		■			■			1569762	EMMS-AS-55-S-HS-TSB
■					■			■					1569761	EMMS-AS-55-S-HS-TM
■					■			■		■			1569763	EMMS-AS-55-S-HS-TMB
■					■				■				1569764	EMMS-AS-55-S-HS-RR
■					■				■	■			1569765	EMMS-AS-55-S-HS-RRB
■					■		■				■		1569772	EMMS-AS-55-S-HS-TS-S1
■					■		■			■	■		1569774	EMMS-AS-55-S-HS-TSB-S1
■					■			■			■		1569773	EMMS-AS-55-S-HS-TM-S1
■					■			■		■	■		1569775	EMMS-AS-55-S-HS-TMB-S1
■					■				■		■		1569776	EMMS-AS-55-S-HS-RR-S1
■					■				■	■	■		1569777	EMMS-AS-55-S-HS-RRB-S1

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – Without featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 55													
	■		■				■					550110	EMMS-AS-55-M-LS-TS
	■		■				■			■		550112	EMMS-AS-55-M-LS-TSB
	■		■					■				550111	EMMS-AS-55-M-LS-TM
	■		■					■		■		550113	EMMS-AS-55-M-LS-TMB
	■		■						■			1569788	EMMS-AS-55-M-LS-RR
	■		■						■	■		1569789	EMMS-AS-55-M-LS-RRB
	■		■				■				■	1569796	EMMS-AS-55-M-LS-TS-S1
	■		■				■			■	■	1569798	EMMS-AS-55-M-LS-TSB-S1
	■		■					■			■	1569797	EMMS-AS-55-M-LS-TM-S1
	■		■					■		■	■	1569799	EMMS-AS-55-M-LS-TMB-S1
	■		■						■		■	1569800	EMMS-AS-55-M-LS-RR-S1
	■		■						■	■	■	1569801	EMMS-AS-55-M-LS-RRB-S1
	■				■		■					1569809	EMMS-AS-55-M-HS-TS
	■				■		■			■		1569811	EMMS-AS-55-M-HS-TSB
	■				■			■				1569810	EMMS-AS-55-M-HS-TM
	■				■			■		■		1569812	EMMS-AS-55-M-HS-TMB
	■				■				■			1569813	EMMS-AS-55-M-HS-RR
	■				■				■	■		1569814	EMMS-AS-55-M-HS-RRB
	■				■		■				■	1569821	EMMS-AS-55-M-HS-TS-S1
	■				■		■			■	■	1569823	EMMS-AS-55-M-HS-TSB-S1
	■				■			■			■	1569822	EMMS-AS-55-M-HS-TM-S1
	■				■			■		■	■	1569824	EMMS-AS-55-M-HS-TMB-S1
	■				■				■		■	1569825	EMMS-AS-55-M-HS-RR-S1
	■				■				■	■	■	1569826	EMMS-AS-55-M-HS-RRB-S1
Flange size 70													
■			■				■					550114	EMMS-AS-70-S-LS-RS
■			■				■			■		550116	EMMS-AS-70-S-LS-RSB
■			■					■				550115	EMMS-AS-70-S-LS-RM
■			■					■		■		550117	EMMS-AS-70-S-LS-RMB
■			■						■			1550884	EMMS-AS-70-S-LS-RR
■			■						■	■		1550885	EMMS-AS-70-S-LS-RRB
■			■				■				■	1550892	EMMS-AS-70-S-LS-RS-S1
■			■				■			■	■	1550894	EMMS-AS-70-S-LS-RSB-S1
■			■					■			■	1550893	EMMS-AS-70-S-LS-RM-S1
■			■					■		■	■	1550895	EMMS-AS-70-S-LS-RMB-S1
■			■						■		■	1550896	EMMS-AS-70-S-LS-RR-S1
■			■						■	■	■	1550897	EMMS-AS-70-S-LS-RRB-S1
■				■			■					1704731	EMMS-AS-70-S-LV-RS
■				■			■			■		1704733	EMMS-AS-70-S-LV-RSB
■				■				■				1704732	EMMS-AS-70-S-LV-RM
■				■				■		■		1704734	EMMS-AS-70-S-LV-RMB
■				■					■			1704735	EMMS-AS-70-S-LV-RR
■				■					■	■		1704736	EMMS-AS-70-S-LV-RRB

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – Without featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 70													
■				■			■				■	1704743	EMMS-AS-70-S-LV-RS-S1
■				■			■				■	1704745	EMMS-AS-70-S-LV-RSB-S1
■				■				■			■	1704744	EMMS-AS-70-S-LV-RM-S1
■				■				■			■	1704746	EMMS-AS-70-S-LV-RMB-S1
■				■					■		■	1704747	EMMS-AS-70-S-LV-RR-S1
■				■					■	■	■	1704748	EMMS-AS-70-S-LV-RRB-S1
■					■			■				1550904	EMMS-AS-70-S-HS-RS
■					■			■			■	1550906	EMMS-AS-70-S-HS-RSB
■					■				■			1550905	EMMS-AS-70-S-HS-RM
■					■				■		■	1550907	EMMS-AS-70-S-HS-RMB
■					■					■		1550908	EMMS-AS-70-S-HS-RR
■					■				■	■		1550909	EMMS-AS-70-S-HS-RRB
■					■			■			■	1550916	EMMS-AS-70-S-HS-RS-S1
■					■			■			■	1550918	EMMS-AS-70-S-HS-RSB-S1
■					■				■		■	1550917	EMMS-AS-70-S-HS-RM-S1
■					■				■	■	■	1550919	EMMS-AS-70-S-HS-RMB-S1
■					■					■	■	1550920	EMMS-AS-70-S-HS-RR-S1
■					■				■	■	■	1550921	EMMS-AS-70-S-HS-RRB-S1
■						■	■					1704773	EMMS-AS-70-S-HV-RS
■						■	■				■	1704775	EMMS-AS-70-S-HV-RSB
■						■		■				1704774	EMMS-AS-70-S-HV-RM
■						■		■			■	1704776	EMMS-AS-70-S-HV-RMB
■						■			■			1704777	EMMS-AS-70-S-HV-RR
■						■			■	■		1704778	EMMS-AS-70-S-HV-RRB
■						■	■				■	1704785	EMMS-AS-70-S-HV-RS-S1
■						■	■				■	1704787	EMMS-AS-70-S-HV-RSB-S1
■						■		■			■	1704786	EMMS-AS-70-S-HV-RM-S1
■						■		■			■	1704788	EMMS-AS-70-S-HV-RMB-S1
■						■			■		■	1704789	EMMS-AS-70-S-HV-RR-S1
■						■			■	■	■	1704790	EMMS-AS-70-S-HV-RRB-S1
	■		■					■				550118	EMMS-AS-70-M-LS-RS
	■		■					■			■	550120	EMMS-AS-70-M-LS-RSB
	■		■						■			550119	EMMS-AS-70-M-LS-RM
	■		■						■		■	550121	EMMS-AS-70-M-LS-RMB
	■		■							■		1550932	EMMS-AS-70-M-LS-RR
	■		■							■	■	1550933	EMMS-AS-70-M-LS-RRB
	■		■					■			■	1550940	EMMS-AS-70-M-LS-RS-S1
	■		■					■			■	1550942	EMMS-AS-70-M-LS-RSB-S1
	■		■						■		■	1550941	EMMS-AS-70-M-LS-RM-S1
	■		■						■		■	1550943	EMMS-AS-70-M-LS-RMB-S1
	■		■							■	■	1550944	EMMS-AS-70-M-LS-RR-S1
	■		■							■	■	1550945	EMMS-AS-70-M-LS-RRB-S1

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – Without featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 70													
	■			■			■					1550952	EMMS-AS-70-M-LV-RS
	■			■			■			■		1550954	EMMS-AS-70-M-LV-RSB
	■			■				■				1550953	EMMS-AS-70-M-LV-RM
	■			■				■		■		1550955	EMMS-AS-70-M-LV-RMB
	■			■					■			1550956	EMMS-AS-70-M-LV-RR
	■			■					■	■		1550957	EMMS-AS-70-M-LV-RRB
	■			■			■				■	1550964	EMMS-AS-70-M-LV-RS-S1
	■			■			■			■	■	1550966	EMMS-AS-70-M-LV-RSB-S1
	■			■				■			■	1550965	EMMS-AS-70-M-LV-RM-S1
	■			■				■		■	■	1550967	EMMS-AS-70-M-LV-RMB-S1
	■			■					■		■	1550968	EMMS-AS-70-M-LV-RR-S1
	■			■					■	■	■	1550969	EMMS-AS-70-M-LV-RRB-S1
	■					■		■				1550976	EMMS-AS-70-M-HS-RS
	■					■		■		■		1550978	EMMS-AS-70-M-HS-RSB
	■					■			■			1550977	EMMS-AS-70-M-HS-RM
	■					■			■	■		1550979	EMMS-AS-70-M-HS-RMB
	■					■				■		1550980	EMMS-AS-70-M-HS-RR
	■					■			■	■		1550981	EMMS-AS-70-M-HS-RRB
	■					■		■			■	1550988	EMMS-AS-70-M-HS-RS-S1
	■					■		■		■	■	1550990	EMMS-AS-70-M-HS-RSB-S1
	■					■			■		■	1550989	EMMS-AS-70-M-HS-RM-S1
	■					■			■	■	■	1550991	EMMS-AS-70-M-HS-RMB-S1
	■					■			■		■	1550992	EMMS-AS-70-M-HS-RR-S1
	■					■			■	■	■	1550993	EMMS-AS-70-M-HS-RRB-S1
	■						■	■				1704807	EMMS-AS-70-M-HV-RS
	■						■	■		■		1704809	EMMS-AS-70-M-HV-RSB
	■						■		■			1704808	EMMS-AS-70-M-HV-RM
	■						■		■	■		1704810	EMMS-AS-70-M-HV-RMB
	■						■			■		1704811	EMMS-AS-70-M-HV-RR
	■						■		■	■		1704812	EMMS-AS-70-M-HV-RRB
	■						■	■			■	1704819	EMMS-AS-70-M-HV-RS-S1
	■						■	■		■	■	1704821	EMMS-AS-70-M-HV-RSB-S1
	■						■		■		■	1704820	EMMS-AS-70-M-HV-RM-S1
	■						■		■	■	■	1704822	EMMS-AS-70-M-HV-RMB-S1
	■						■			■	■	1704823	EMMS-AS-70-M-HV-RR-S1
	■						■		■	■	■	1704824	EMMS-AS-70-M-HV-RRB-S1
Flange size 100													
■					■		■					550122	EMMS-AS-100-S-HS-RS
■					■		■			■		550124	EMMS-AS-100-S-HS-RSB
■					■			■				550123	EMMS-AS-100-S-HS-RM
■					■			■		■		550125	EMMS-AS-100-S-HS-RMB
■					■				■			1562913	EMMS-AS-100-S-HS-RR
■					■				■	■		1562914	EMMS-AS-100-S-HS-RRB

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – Without featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 100													
■					■		■				■	1562921	EMMS-AS-100-S-HS-RS-S1
■					■		■			■	■	1562923	EMMS-AS-100-S-HS-RSB-S1
■					■			■			■	1562922	EMMS-AS-100-S-HS-RM-S1
■					■			■		■	■	1562924	EMMS-AS-100-S-HS-RMB-S1
■					■				■		■	1562925	EMMS-AS-100-S-HS-RR-S1
■					■				■	■	■	1562926	EMMS-AS-100-S-HS-RRB-S1
	■				■		■					550127	EMMS-AS-100-M-HS-RS
	■				■		■			■		550129	EMMS-AS-100-M-HS-RSB
	■				■			■				550128	EMMS-AS-100-M-HS-RM
	■				■			■		■		550130	EMMS-AS-100-M-HS-RMB
	■				■				■			1562937	EMMS-AS-100-M-HS-RR
	■				■		■		■	■		1562938	EMMS-AS-100-M-HS-RRB
	■				■		■				■	1562945	EMMS-AS-100-M-HS-RS-S1
	■				■		■			■	■	1562948	EMMS-AS-100-M-HS-RSB-S1
	■				■			■			■	1562947	EMMS-AS-100-M-HS-RM-S1
	■				■			■			■	1562949	EMMS-AS-100-M-HS-RMB-S1
	■				■				■		■	1562950	EMMS-AS-100-M-HS-RR-S1
	■				■				■	■	■	1562951	EMMS-AS-100-M-HS-RRB-S1
		■			■		■					1562958	EMMS-AS-100-L-HS-RS
		■			■		■			■		1562960	EMMS-AS-100-L-HS-RSB
		■			■			■				1562959	EMMS-AS-100-L-HS-RM
		■			■			■		■		1562961	EMMS-AS-100-L-HS-RMB
		■			■				■			1562962	EMMS-AS-100-L-HS-RR
		■			■				■	■		1562963	EMMS-AS-100-L-HS-RRB
		■			■		■				■	1562970	EMMS-AS-100-L-HS-RS-S1
		■			■		■			■	■	1562972	EMMS-AS-100-L-HS-RSB-S1
		■			■			■			■	1562971	EMMS-AS-100-L-HS-RM-S1
		■			■			■		■	■	1562973	EMMS-AS-100-L-HS-RMB-S1
		■			■				■		■	1562974	EMMS-AS-100-L-HS-RR-S1
		■			■				■	■	■	1562975	EMMS-AS-100-L-HS-RRB-S1
		■				■	■					1562982	EMMS-AS-100-L-HV-RS
		■				■	■			■		1562984	EMMS-AS-100-L-HV-RSB
		■				■		■				1562983	EMMS-AS-100-L-HV-RM
		■				■		■		■		1562985	EMMS-AS-100-L-HV-RMB
		■				■			■			1562986	EMMS-AS-100-L-HV-RR
		■				■			■	■		1562987	EMMS-AS-100-L-HV-RRB
		■				■	■				■	1562994	EMMS-AS-100-L-HV-RS-S1
		■				■	■			■	■	1562996	EMMS-AS-100-L-HV-RSB-S1
		■				■		■			■	1562995	EMMS-AS-100-L-HV-RM-S1
		■				■		■		■	■	1562997	EMMS-AS-100-L-HV-RMB-S1
		■				■			■		■	1562998	EMMS-AS-100-L-HV-RR-S1
		■				■			■	■	■	1562999	EMMS-AS-100-L-HV-RRB-S1

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – Without featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 140													
■					■		■					550131	EMMS-AS-140-S-HS-RS
■					■		■			■		550133	EMMS-AS-140-S-HS-RSB
■					■			■				550132	EMMS-AS-140-S-HS-RM
■					■			■		■		550134	EMMS-AS-140-S-HS-RMB
■					■				■			1574608	EMMS-AS-140-S-HS-RR
■					■				■	■		1574609	EMMS-AS-140-S-HS-RRB
■					■		■				■	1574616	EMMS-AS-140-S-HS-RS-S1
■					■		■			■	■	1574618	EMMS-AS-140-S-HS-RSB-S1
■					■			■			■	1574617	EMMS-AS-140-S-HS-RM-S1
■					■			■		■	■	1574619	EMMS-AS-140-S-HS-RMB-S1
■					■				■		■	1574620	EMMS-AS-140-S-HS-RR-S1
■					■				■	■	■	1574621	EMMS-AS-140-S-HS-RRB-S1
■						■	■					1574628	EMMS-AS-140-S-HV-RS
■						■	■			■		1574630	EMMS-AS-140-S-HV-RSB
■						■		■				1574629	EMMS-AS-140-S-HV-RM
■						■		■		■		1574631	EMMS-AS-140-S-HV-RMB
■						■			■			1574632	EMMS-AS-140-S-HV-RR
■						■			■	■		1574633	EMMS-AS-140-S-HV-RRB
■						■	■				■	1574640	EMMS-AS-140-S-HV-RS-S1
■						■	■			■	■	1574642	EMMS-AS-140-S-HV-RSB-S1
■						■		■			■	1574641	EMMS-AS-140-S-HV-RM-S1
■						■		■		■	■	1574643	EMMS-AS-140-S-HV-RMB-S1
■						■			■		■	1574644	EMMS-AS-140-S-HV-RR-S1
■						■			■	■	■	1574645	EMMS-AS-140-S-HV-RRB-S1
		■			■		■					550135	EMMS-AS-140-L-HS-RS
		■			■		■			■		550137	EMMS-AS-140-L-HS-RSB
		■			■			■				550136	EMMS-AS-140-L-HS-RM
		■			■			■		■		550138	EMMS-AS-140-L-HS-RMB
		■			■				■			1574656	EMMS-AS-140-L-HS-RR
		■			■				■	■		1574657	EMMS-AS-140-L-HS-RRB
		■			■		■				■	1574664	EMMS-AS-140-L-HS-RS-S1
		■			■		■			■	■	1574666	EMMS-AS-140-L-HS-RSB-S1
		■			■			■			■	1574665	EMMS-AS-140-L-HS-RM-S1
		■			■			■		■	■	1574667	EMMS-AS-140-L-HS-RMB-S1
		■			■				■		■	1574668	EMMS-AS-140-L-HS-RR-S1
		■			■				■	■	■	1574669	EMMS-AS-140-L-HS-RRB-S1
		■				■	■					1574676	EMMS-AS-140-L-HV-RS
		■				■	■			■		1574678	EMMS-AS-140-L-HV-RSB
		■				■		■				1574677	EMMS-AS-140-L-HV-RM
		■				■		■		■		1574679	EMMS-AS-140-L-HV-RMB
		■				■			■			1574680	EMMS-AS-140-L-HV-RR
		■				■			■	■		1574681	EMMS-AS-140-L-HV-RRB

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – Without featherkey												Part no.	Type	
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)			
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver					
Flange size 140														
		■				■	■					■	1574688	EMMS-AS-140-L-HV-RS-S1
		■				■	■				■	■	1574690	EMMS-AS-140-L-HV-RSB-S1
		■				■		■				■	1574689	EMMS-AS-140-L-HV-RM-S1
		■				■		■			■	■	1574691	EMMS-AS-140-L-HV-RMB-S1
		■				■			■			■	1574692	EMMS-AS-140-L-HV-RR-S1
		■				■			■	■		■	1574693	EMMS-AS-140-L-HV-RRB-S1
Flange size 190														
■					■		■						1584908	EMMS-AS-190-S-HS-AS
■					■		■			■			1584911	EMMS-AS-190-S-HS-ASB
■					■			■					1584910	EMMS-AS-190-S-HS-AM
■					■			■		■			1584912	EMMS-AS-190-S-HS-AMB
■					■				■				1584913	EMMS-AS-190-S-HS-AR
■					■					■			1584914	EMMS-AS-190-S-HS-ARB
■					■		■				■		1584922	EMMS-AS-190-S-HS-AS-S1
■					■		■				■	■	1584924	EMMS-AS-190-S-HS-ASB-S1
■					■			■				■	1584923	EMMS-AS-190-S-HS-AM-S1
■					■			■		■		■	1584925	EMMS-AS-190-S-HS-AMB-S1
■					■				■			■	1584926	EMMS-AS-190-S-HS-AR-S1
■					■				■	■		■	1584927	EMMS-AS-190-S-HS-ARB-S1
	■				■		■						1584934	EMMS-AS-190-M-HS-AS
	■				■		■			■			1584936	EMMS-AS-190-M-HS-ASB
	■				■			■					1584935	EMMS-AS-190-M-HS-AM
	■				■			■		■			1584937	EMMS-AS-190-M-HS-AMB
	■				■				■				1584938	EMMS-AS-190-M-HS-AR
	■				■				■	■			1584939	EMMS-AS-190-M-HS-ARB
	■				■		■				■		1584946	EMMS-AS-190-M-HS-AS-S1
	■				■		■			■	■		1584948	EMMS-AS-190-M-HS-ASB-S1
	■				■			■			■		1584947	EMMS-AS-190-M-HS-AM-S1
	■				■			■		■	■		1584949	EMMS-AS-190-M-HS-AMB-S1
	■				■				■		■		1584950	EMMS-AS-190-M-HS-AR-S1
	■				■				■	■	■		1584951	EMMS-AS-190-M-HS-ARB-S1

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – With featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 40													
■			■				■					1578607	EMMS-AS-40-SK-LS-TS
■			■				■			■		1578609	EMMS-AS-40-SK-LS-TSB
■			■					■				1578608	EMMS-AS-40-SK-LS-TM
■			■					■		■		1578610	EMMS-AS-40-SK-LS-TMB
■			■						■			1578611	EMMS-AS-40-SK-LS-SR
■			■						■	■		1578612	EMMS-AS-40-SK-LS-SRB
	■		■				■					560875	EMMS-AS-40-MK-LS-TS
	■		■				■			■		560877	EMMS-AS-40-MK-LS-TSB
	■		■					■				560876	EMMS-AS-40-MK-LS-TM
	■		■					■		■		560878	EMMS-AS-40-MK-LS-TMB
	■		■						■			1578623	EMMS-AS-40-MK-LS-SR
	■		■						■	■		1578624	EMMS-AS-40-MK-LS-SRB
Flange size 55													
■			■				■					1569742	EMMS-AS-55-SK-LS-TS
■			■				■			■		1569744	EMMS-AS-55-SK-LS-TSB
■			■					■				1569743	EMMS-AS-55-SK-LS-TM
■			■					■		■		1569745	EMMS-AS-55-SK-LS-TMB
■			■						■			1569746	EMMS-AS-55-SK-LS-RR
■			■						■	■		1569747	EMMS-AS-55-SK-LS-RRB
■			■				■				■	1569754	EMMS-AS-55-SK-LS-TS-S1
■			■				■			■	■	1569756	EMMS-AS-55-SK-LS-TSB-S1
■			■					■			■	1569755	EMMS-AS-55-SK-LS-TM-S1
■			■					■		■	■	1569757	EMMS-AS-55-SK-LS-TMB-S1
■			■						■		■	1569758	EMMS-AS-55-SK-LS-RR-S1
■			■						■	■	■	1569759	EMMS-AS-55-SK-LS-RRB-S1
■					■		■					1569766	EMMS-AS-55-SK-HS-TS
■					■		■			■		1569768	EMMS-AS-55-SK-HS-TSB
■					■			■				1569767	EMMS-AS-55-SK-HS-TM
■					■			■		■		1569769	EMMS-AS-55-SK-HS-TMB
■					■				■			1569770	EMMS-AS-55-SK-HS-RR
■					■				■	■		1569771	EMMS-AS-55-SK-HS-RRB
■					■		■				■	1569778	EMMS-AS-55-SK-HS-TS-S1
■					■		■			■	■	1569780	EMMS-AS-55-SK-HS-TSB-S1
■					■			■			■	1569779	EMMS-AS-55-SK-HS-TM-S1
■					■			■		■	■	1569781	EMMS-AS-55-SK-HS-TMB-S1
■					■				■		■	1569782	EMMS-AS-55-SK-HS-RR-S1
■					■				■	■	■	1569783	EMMS-AS-55-SK-HS-RRB-S1
	■		■				■					560879	EMMS-AS-55-MK-LS-TS
	■		■				■			■		560881	EMMS-AS-55-MK-LS-TSB
	■		■					■				560880	EMMS-AS-55-MK-LS-TM
	■		■					■		■		560882	EMMS-AS-55-MK-LS-TMB
	■		■						■			1569794	EMMS-AS-55-MK-LS-RR
	■		■						■	■		1569795	EMMS-AS-55-MK-LS-RRB

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – With featherkey													Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)			
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver					
Flange size 55														
■			■				■					■	1569803	EMMS-AS-55-MK-LS-TS-S1
	■		■				■				■	■	1569805	EMMS-AS-55-MK-LS-TSB-S1
	■		■					■				■	1569804	EMMS-AS-55-MK-LS-TM-S1
	■		■					■			■	■	1569806	EMMS-AS-55-MK-LS-TMB-S1
	■		■						■			■	1569807	EMMS-AS-55-MK-LS-RR-S1
	■		■						■	■		■	1569808	EMMS-AS-55-MK-LS-RRB-S1
	■				■		■						1569815	EMMS-AS-55-MK-HS-TS
	■				■		■			■			1569817	EMMS-AS-55-MK-HS-TSB
	■				■			■					1569816	EMMS-AS-55-MK-HS-TM
	■				■			■		■			1569818	EMMS-AS-55-MK-HS-TMB
	■				■				■				1569819	EMMS-AS-55-MK-HS-RR
	■				■		■		■	■			1569820	EMMS-AS-55-MK-HS-RRB
	■				■		■				■		1569827	EMMS-AS-55-MK-HS-TS-S1
	■				■		■			■	■		1569829	EMMS-AS-55-MK-HS-TSB-S1
	■				■			■			■		1569828	EMMS-AS-55-MK-HS-TM-S1
	■				■			■		■	■		1569830	EMMS-AS-55-MK-HS-TMB-S1
	■				■				■		■		1569831	EMMS-AS-55-MK-HS-RR-S1
	■				■				■	■	■		1569832	EMMS-AS-55-MK-HS-RRB-S1
Flange size 70														
■			■				■						560883	EMMS-AS-70-SK-LS-RS
■			■				■				■		560885	EMMS-AS-70-SK-LS-RSB
■			■					■					560884	EMMS-AS-70-SK-LS-RM
■			■					■		■			560886	EMMS-AS-70-SK-LS-RMB
■			■						■				1550890	EMMS-AS-70-SK-LS-RR
■			■						■	■			1550891	EMMS-AS-70-SK-LS-RRB
■			■				■				■		1550898	EMMS-AS-70-SK-LS-RS-S1
■			■				■			■	■		1550900	EMMS-AS-70-SK-LS-RSB-S1
■			■					■			■		1550899	EMMS-AS-70-SK-LS-RM-S1
■			■					■		■	■		1550901	EMMS-AS-70-SK-LS-RMB-S1
■			■						■		■		1550902	EMMS-AS-70-SK-LS-RR-S1
■			■						■	■	■		1550903	EMMS-AS-70-SK-LS-RRB-S1
■				■			■						1704737	EMMS-AS-70-SK-LV-RS
■				■			■				■		1704739	EMMS-AS-70-SK-LV-RSB
■				■				■					1704738	EMMS-AS-70-SK-LV-RM
■				■				■		■			1704740	EMMS-AS-70-SK-LV-RMB
■				■					■				1704741	EMMS-AS-70-SK-LV-RR
■				■					■	■			1704742	EMMS-AS-70-SK-LV-RRB
■				■			■				■		1704749	EMMS-AS-70-SK-LV-RS-S1
■				■			■			■	■		1704751	EMMS-AS-70-SK-LV-RSB-S1
■				■				■			■		1704750	EMMS-AS-70-SK-LV-RM-S1
■				■				■		■	■		1704752	EMMS-AS-70-SK-LV-RMB-S1
■				■					■		■		1704753	EMMS-AS-70-SK-LV-RR-S1
■				■					■	■	■		1704754	EMMS-AS-70-SK-LV-RRB-S1

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – With featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 70													
■					■		■					1550910	EMMS-AS-70-SK-HS-RS
■					■		■			■		1550912	EMMS-AS-70-SK-HS-RSB
■					■			■				1550911	EMMS-AS-70-SK-HS-RM
■					■			■		■		1550913	EMMS-AS-70-SK-HS-RMB
■					■				■			1550914	EMMS-AS-70-SK-HS-RR
■					■				■	■		1550915	EMMS-AS-70-SK-HS-RRB
■					■		■				■	1550922	EMMS-AS-70-SK-HS-RS-S1
■					■		■			■	■	1550924	EMMS-AS-70-SK-HS-RSB-S1
■					■			■			■	1550923	EMMS-AS-70-SK-HS-RM-S1
■					■			■		■	■	1550925	EMMS-AS-70-SK-HS-RMB-S1
■					■				■		■	1550926	EMMS-AS-70-SK-HS-RR-S1
■					■				■	■	■	1550927	EMMS-AS-70-SK-HS-RRB-S1
■						■	■					1704779	EMMS-AS-70-SK-HV-RS
■						■	■			■		1704781	EMMS-AS-70-SK-HV-RSB
■						■		■				1704780	EMMS-AS-70-SK-HV-RM
■						■		■		■		1704782	EMMS-AS-70-SK-HV-RMB
■						■			■		■	1704783	EMMS-AS-70-SK-HV-RR
■						■			■	■		1704784	EMMS-AS-70-SK-HV-RRB
■						■	■				■	1704791	EMMS-AS-70-SK-HV-RS-S1
■						■	■			■	■	1704793	EMMS-AS-70-SK-HV-RSB-S1
■						■		■			■	1704792	EMMS-AS-70-SK-HV-RM-S1
■						■		■		■	■	1704794	EMMS-AS-70-SK-HV-RMB-S1
■						■			■		■	1704795	EMMS-AS-70-SK-HV-RR-S1
■						■			■	■	■	1704796	EMMS-AS-70-SK-HV-RRB-S1
	■		■				■					560887	EMMS-AS-70-MK-LS-RS
	■		■				■			■		560889	EMMS-AS-70-MK-LS-RSB
	■		■					■				560888	EMMS-AS-70-MK-LS-RM
	■		■					■		■		560890	EMMS-AS-70-MK-LS-RMB
	■		■						■			1550938	EMMS-AS-70-MK-LS-RR
	■		■						■	■		1550939	EMMS-AS-70-MK-LS-RRB
	■		■					■			■	1550946	EMMS-AS-70-MK-LS-RS-S1
	■		■					■		■	■	1550948	EMMS-AS-70-MK-LS-RSB-S1
	■		■						■		■	1550947	EMMS-AS-70-MK-LS-RM-S1
	■		■						■		■	1550949	EMMS-AS-70-MK-LS-RMB-S1
	■		■							■	■	1550950	EMMS-AS-70-MK-LS-RR-S1
	■		■							■	■	1550951	EMMS-AS-70-MK-LS-RRB-S1
	■			■				■				1550958	EMMS-AS-70-MK-LV-RS
	■			■				■		■		1550960	EMMS-AS-70-MK-LV-RSB
	■			■					■			1550959	EMMS-AS-70-MK-LV-RM
	■			■					■	■		1550961	EMMS-AS-70-MK-LV-RMB
	■			■						■		1550962	EMMS-AS-70-MK-LV-RR
	■			■					■	■		1550963	EMMS-AS-70-MK-LV-RRB

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – With featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 70													
	■			■			■				■	1550970	EMMS-AS-70-MK-LV-RS-S1
	■			■			■			■	■	1550972	EMMS-AS-70-MK-LV-RSB-S1
	■			■				■			■	1550971	EMMS-AS-70-MK-LV-RM-S1
	■			■				■		■	■	1550973	EMMS-AS-70-MK-LV-RMB-S1
	■			■					■		■	1550974	EMMS-AS-70-MK-LV-RR-S1
	■			■					■	■	■	1550975	EMMS-AS-70-MK-LV-RRB-S1
	■				■		■					1550982	EMMS-AS-70-MK-HS-RS
	■				■		■			■		1550984	EMMS-AS-70-MK-HS-RSB
	■				■			■				1550983	EMMS-AS-70-MK-HS-RM
	■				■			■		■		1550985	EMMS-AS-70-MK-HS-RMB
	■				■				■			1550986	EMMS-AS-70-MK-HS-RR
	■				■		■		■	■		1550987	EMMS-AS-70-MK-HS-RRB
	■				■		■			■	■	1550994	EMMS-AS-70-MK-HS-RS-S1
	■				■		■			■	■	1550996	EMMS-AS-70-MK-HS-RSB-S1
	■				■			■			■	1550995	EMMS-AS-70-MK-HS-RM-S1
	■				■			■		■	■	1550997	EMMS-AS-70-MK-HS-RMB-S1
	■				■				■	■	■	1550998	EMMS-AS-70-MK-HS-RR-S1
	■				■				■	■	■	1550999	EMMS-AS-70-MK-HS-RRB-S1
	■					■	■					1704813	EMMS-AS-70-MK-HV-RS
	■					■	■			■		1704815	EMMS-AS-70-MK-HV-RSB
	■					■		■				1704814	EMMS-AS-70-MK-HV-RM
	■					■		■		■		1704816	EMMS-AS-70-MK-HV-RMB
	■					■			■			1704817	EMMS-AS-70-MK-HV-RR
	■					■			■	■		1704818	EMMS-AS-70-MK-HV-RRB
	■					■	■				■	1704825	EMMS-AS-70-MK-HV-RS-S1
	■					■	■			■	■	1704827	EMMS-AS-70-MK-HV-RSB-S1
	■					■		■			■	1704826	EMMS-AS-70-MK-HV-RM-S1
	■					■		■		■	■	1704828	EMMS-AS-70-MK-HV-RMB-S1
	■					■			■		■	1704829	EMMS-AS-70-MK-HV-RR-S1
	■					■			■	■	■	1704830	EMMS-AS-70-MK-HV-RRB-S1
Flange size 100													
	■				■		■					560891	EMMS-AS-100-SK-HS-RS
	■				■		■			■		560893	EMMS-AS-100-SK-HS-RSB
	■				■			■				560892	EMMS-AS-100-SK-HS-RM
	■				■			■		■		560894	EMMS-AS-100-SK-HS-RMB
	■				■				■			1562919	EMMS-AS-100-SK-HS-RR
	■				■				■	■		1562920	EMMS-AS-100-SK-HS-RRB
	■				■		■				■	1562927	EMMS-AS-100-SK-HS-RS-S1
	■				■		■			■	■	1562929	EMMS-AS-100-SK-HS-RSB-S1
	■				■			■			■	1562928	EMMS-AS-100-SK-HS-RM-S1
	■				■			■		■	■	1562930	EMMS-AS-100-SK-HS-RMB-S1
	■				■				■		■	1562931	EMMS-AS-100-SK-HS-RR-S1
	■				■				■	■	■	1562932	EMMS-AS-100-SK-HS-RRB-S1

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – With featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 100													
	■				■		■					560895	EMMS-AS-100-MK-HS-RS
	■				■		■			■		560897	EMMS-AS-100-MK-HS-RSB
	■				■			■				560896	EMMS-AS-100-MK-HS-RM
	■				■			■		■		560898	EMMS-AS-100-MK-HS-RMB
	■				■				■			1562943	EMMS-AS-100-MK-HS-RR
	■				■				■	■		1562944	EMMS-AS-100-MK-HS-RRB
	■				■		■				■	1562952	EMMS-AS-100-MK-HS-RS-S1
	■				■		■			■	■	1562954	EMMS-AS-100-MK-HS-RSB-S1
	■				■			■			■	1562953	EMMS-AS-100-MK-HS-RM-S1
	■				■			■		■	■	1562955	EMMS-AS-100-MK-HS-RMB-S1
	■				■				■		■	1562956	EMMS-AS-100-MK-HS-RR-S1
	■				■				■	■	■	1562957	EMMS-AS-100-MK-HS-RRB-S1
		■			■		■					1562964	EMMS-AS-100-LK-HS-RS
		■			■		■			■		1562966	EMMS-AS-100-LK-HS-RSB
		■			■			■				1562965	EMMS-AS-100-LK-HS-RM
		■			■			■		■		1562967	EMMS-AS-100-LK-HS-RMB
		■			■				■			1562968	EMMS-AS-100-LK-HS-RR
		■			■				■	■		1562969	EMMS-AS-100-LK-HS-RRB
		■			■		■				■	1562976	EMMS-AS-100-LK-HS-RS-S1
		■			■		■			■	■	1562978	EMMS-AS-100-LK-HS-RSB-S1
		■			■			■			■	1562977	EMMS-AS-100-LK-HS-RM-S1
		■			■			■		■	■	1562979	EMMS-AS-100-LK-HS-RMB-S1
		■			■				■		■	1562980	EMMS-AS-100-LK-HS-RR-S1
		■			■				■	■	■	1562981	EMMS-AS-100-LK-HS-RRB-S1
		■				■	■					1562988	EMMS-AS-100-LK-HV-RS
		■				■	■			■		1562990	EMMS-AS-100-LK-HV-RSB
		■				■		■				1562989	EMMS-AS-100-LK-HV-RM
		■				■		■		■		1562991	EMMS-AS-100-LK-HV-RMB
		■				■			■			1562992	EMMS-AS-100-LK-HV-RR
		■				■			■	■		1562993	EMMS-AS-100-LK-HV-RRB
		■				■	■				■	1563000	EMMS-AS-100-LK-HV-RS-S1
		■				■	■			■	■	1563002	EMMS-AS-100-LK-HV-RSB-S1
		■				■		■			■	1563001	EMMS-AS-100-LK-HV-RM-S1
		■				■		■		■	■	1563003	EMMS-AS-100-LK-HV-RMB-S1
		■				■			■		■	1563004	EMMS-AS-100-LK-HV-RR-S1
		■				■			■	■	■	1563005	EMMS-AS-100-LK-HV-RRB-S1
Flange size 140													
	■				■		■					560899	EMMS-AS-140-SK-HS-RS
	■				■		■			■		560901	EMMS-AS-140-SK-HS-RSB
	■				■			■				560900	EMMS-AS-140-SK-HS-RM
	■				■			■		■		560902	EMMS-AS-140-SK-HS-RMB
	■				■				■			1574614	EMMS-AS-140-SK-HS-RR
	■				■				■	■		1574615	EMMS-AS-140-SK-HS-RRB

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – With featherkey													Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)			
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver					
Flange size 140														
■					■		■					■	1574622	EMMS-AS-140-SK-HS-RS-S1
■					■		■				■	■	1574624	EMMS-AS-140-SK-HS-RSB-S1
■					■			■				■	1574623	EMMS-AS-140-SK-HS-RM-S1
■					■			■			■	■	1574625	EMMS-AS-140-SK-HS-RMB-S1
■					■				■			■	1574626	EMMS-AS-140-SK-HS-RR-S1
■					■					■	■	■	1574627	EMMS-AS-140-SK-HS-RRB-S1
■							■	■					1574634	EMMS-AS-140-SK-HV-RS
■							■	■			■		1574636	EMMS-AS-140-SK-HV-RSB
■							■		■				1574635	EMMS-AS-140-SK-HV-RM
■							■		■		■		1574637	EMMS-AS-140-SK-HV-RMB
■							■			■			1574638	EMMS-AS-140-SK-HV-RR
■							■			■	■		1574639	EMMS-AS-140-SK-HV-RRB
■							■	■				■	1574646	EMMS-AS-140-SK-HV-RS-S1
■							■	■			■	■	1574648	EMMS-AS-140-SK-HV-RSB-S1
■							■		■			■	1574647	EMMS-AS-140-SK-HV-RM-S1
■							■		■		■	■	1574649	EMMS-AS-140-SK-HV-RMB-S1
■							■			■		■	1574650	EMMS-AS-140-SK-HV-RR-S1
■							■			■	■	■	1574651	EMMS-AS-140-SK-HV-RRB-S1
		■			■		■						560903	EMMS-AS-140-LK-HS-RS
		■			■		■				■		560905	EMMS-AS-140-LK-HS-RSB
		■			■			■					560904	EMMS-AS-140-LK-HS-RM
		■			■				■		■		560906	EMMS-AS-140-LK-HS-RMB
		■			■					■			1574662	EMMS-AS-140-LK-HS-RR
		■			■					■	■		1574663	EMMS-AS-140-LK-HS-RRB
		■			■			■				■	1574670	EMMS-AS-140-LK-HS-RS-S1
		■			■			■			■	■	1574672	EMMS-AS-140-LK-HS-RSB-S1
		■			■				■			■	1574671	EMMS-AS-140-LK-HS-RM-S1
		■			■					■	■	■	1574673	EMMS-AS-140-LK-HS-RMB-S1
		■			■					■		■	1574674	EMMS-AS-140-LK-HS-RR-S1
		■			■					■	■	■	1574675	EMMS-AS-140-LK-HS-RRB-S1
		■				■	■						1574682	EMMS-AS-140-LK-HV-RS
		■				■	■				■		1574684	EMMS-AS-140-LK-HV-RSB
		■				■		■					1574683	EMMS-AS-140-LK-HV-RM
		■				■			■		■		1574685	EMMS-AS-140-LK-HV-RMB
		■				■				■			1574686	EMMS-AS-140-LK-HV-RR
		■				■				■	■		1574687	EMMS-AS-140-LK-HV-RRB
		■				■	■					■	1574694	EMMS-AS-140-LK-HV-RS-S1
		■				■	■				■	■	1574709	EMMS-AS-140-LK-HV-RSB-S1
		■				■		■				■	1574708	EMMS-AS-140-LK-HV-RM-S1
		■				■			■		■	■	1574710	EMMS-AS-140-LK-HV-RMB-S1
		■				■				■		■	1574711	EMMS-AS-140-LK-HV-RR-S1
		■				■				■	■	■	1574712	EMMS-AS-140-LK-HV-RRB-S1


1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Data sheet

Ordering data – With featherkey												Part no.	Type
Length			Winding				Measuring unit			Brake	Degree of protection IP65 ¹⁾ (with shaft seal)		
Short	Medium	Long	Low voltage, standard	Low voltage, speed-optimised	High voltage, standard	High voltage, speed-optimised	Encoder, single-turn	Encoder, multi-turn	Resolver				
Flange size 190													
■					■		■					1584915	EMMS-AS-190-SK-HS-AS
■					■		■			■		1584917	EMMS-AS-190-SK-HS-ASB
■					■			■				1584916	EMMS-AS-190-SK-HS-AM
■					■			■		■		1584918	EMMS-AS-190-SK-HS-AMB
■					■				■			1584919	EMMS-AS-190-SK-HS-AR
■					■				■	■		1584920	EMMS-AS-190-SK-HS-ARB
■					■		■				■	1584928	EMMS-AS-190-SK-HS-AS-S1
■					■		■			■	■	1584930	EMMS-AS-190-SK-HS-ASB-S1
■					■			■			■	1584929	EMMS-AS-190-SK-HS-AM-S1
■					■			■		■	■	1584931	EMMS-AS-190-SK-HS-AMB-S1
■					■				■		■	1584932	EMMS-AS-190-SK-HS-AR-S1
■					■				■	■	■	1584933	EMMS-AS-190-SK-HS-ARB-S1
	■				■		■					1584940	EMMS-AS-190-MK-HS-AS
	■				■		■			■		1584942	EMMS-AS-190-MK-HS-ASB
	■				■			■				1584941	EMMS-AS-190-MK-HS-AM
	■				■			■		■		1584943	EMMS-AS-190-MK-HS-AMB
	■				■				■			1584944	EMMS-AS-190-MK-HS-AR
	■				■				■	■		1584945	EMMS-AS-190-MK-HS-ARB
	■				■		■				■	1584952	EMMS-AS-190-MK-HS-AS-S1
	■				■		■			■	■	1584954	EMMS-AS-190-MK-HS-ASB-S1
	■				■			■			■	1584953	EMMS-AS-190-MK-HS-AM-S1
	■				■			■		■	■	1584955	EMMS-AS-190-MK-HS-AMB-S1
	■				■				■		■	1584956	EMMS-AS-190-MK-HS-AR-S1
	■				■				■	■	■	1584957	EMMS-AS-190-MK-HS-ARB-S1

1) With degree of protection to IP65, special usage conditions must be observed for the shaft seal. Please consult your local Festo contact.

Accessories

Ordering data – Gear unit		Data sheets → Internet: emga		
	Motor interface	Gear ratio	Part no.	Type
	40A	3	552186	EMGA-40-P-G3-SAS-40
		5	552187	EMGA-40-P-G5-SAS-40
	55A	3	552188	EMGA-60-P-G3-SAS-55
		5	552189	EMGA-60-P-G5-SAS-55
	70A	3	552190	EMGA-60-P-G3-SAS-70
		5	552191	EMGA-60-P-G5-SAS-70
		3	552192	EMGA-80-P-G3-SAS-70
		5	552193	EMGA-80-P-G5-SAS-70
	100A	3	552194	EMGA-80-P-G3-SAS-100
		5	552195	EMGA-80-P-G5-SAS-100
		3	552196	EMGA-120-P-G3-SAS-100
		5	552197	EMGA-120-P-G5-SAS-100
	140A	3	552198	EMGA-120-P-G3-SAS-140
		5	552199	EMGA-120-P-G5-SAS-140
		3	552200	EMGA-160-P-G3-SAS-140
5		552201	EMGA-160-P-G5-SAS-140	

Technical data – Cables		
Designation	Motor cable	
For motor	EMMS-AS-4 0/55	EMMS-AS-7 0/10 0/140
Type	NEBM-T1G8-...	NEBM-M23G8-...
Cable composition	2x (2x 0.25 mm ²) (3 A, 48 V, 0.5 KV)	2x (2x 0.5 mm ²) (8 A, 300 V, 2.5 KV)
	4x 0.75 mm ² (12 A, 630 V, 4.0 KV)	4 x 1.5 mm ² (16 A, 630 V, 4.0 KV)
	Screened	
Degree of contamination	3	
Min. bending radius [mm]	55	64
Ambient temperature [°C]	-50 ... +90	-50 ... +90
Ambient temperature ¹⁾ [°C]	-40 ... +90	-40 ... +90
Cable characteristics	Suitable for energy chains	
Degree of protection	IP65 (in mounted state)	
Material	Polyurethane	
CE marking (see declaration of conformity)	To EU Low Voltage Directive	

For motor	EMMS-AS-190	
Type	NEBM-M40G8-...	
Cable composition	2x (2x 0.75 mm ²) (12 A, 300 V, 2.5 KV)	
	4 x 2.5 mm ² (26 A; 630 V; 4.0 KV)	
	Screened	
Degree of contamination	3	
Min. bending radius [mm]	140	
Ambient temperature [°C]	-50 ... +90	
Ambient temperature ¹⁾ [°C]	-40 ... +90	
Cable characteristics	Suitable for energy chains	
Degree of protection	IP65 (in mounted state)	
Material	Polyurethane	


Accessories

Technical data – Cables		
Designation	Encoder cable	
For motor	EMMS-AS-4 0/55	EMMS-AS-7 0/10 0/14 0/190
Type	NEBM-T1G8-...	NEBM-M12W8-...
Cable composition	1x (4x 0.14 mm ²); (2 A; 30 V; 0.5 KV)	
	4 x 0.34 mm ² (3 A; 30 V; 0.5 KV)	
	Screened	
Degree of contamination	3	
Min. bending radius	[mm]	75
Ambient temperature	[°C]	-40 ... +80
Ambient temperature ¹⁾	[°C]	-10 ... +80
Cable characteristics	Suitable for energy chains	
Degree of protection	IP65 (in mounted state)	
Material	Polyurethane	

Designation	Resolver cable	
For motor	EMMS-AS-4 0/557 0/10 0/14 0/190	
Type	NEBM-M23G12-...	
Cable composition	3x (2x 0.14 mm ²)	
	2x 0.5 mm ²	
	Screened	
Degree of contamination	3	
Min. bending radius	[mm]	98
Ambient temperature	[°C]	-50 ... +80
Ambient temperature ¹⁾	[°C]	-40 ... +75
Cable characteristics	Suitable for energy chains	
Degree of protection	IP65 (in mounted state)	
Material	Polyurethane	




1) With flexible cable installation

Recommended cable cross section as a function of cable length l and max. motor current I_0

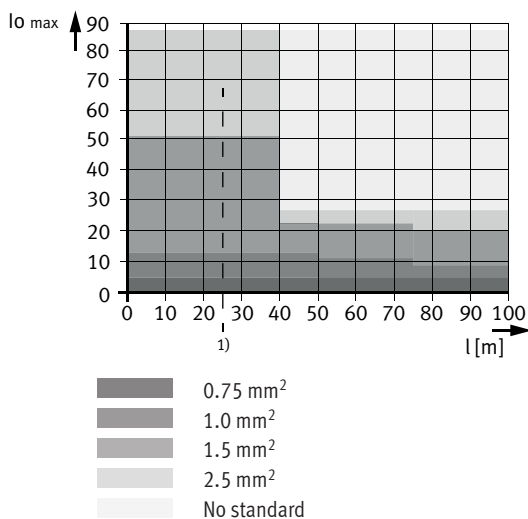


1) Cable lengths > 25 m possible following technical consultation; up to 99.9 m on request.

Accessories






Ordering data		Cable length [m]	Part no.	Type
Motor cable				
	For EMMS-AS-4 0/55 with encoder with CMMP-AS (cable cross section: 0.75 mm ²)			
	5	550306	NEBM-T1G8-E-5-Q7N-LE8	
	10	550307	NEBM-T1G8-E-10-Q7N-LE8	
	15	550308	NEBM-T1G8-E-15-Q7N-LE8	
	X length ¹⁾	550309	NEBM-T1G8-E-...-Q7N-LE8	
	For EMMS-AS-4 0/55 with encoder with CMMT-AS (cable cross section: 0.75 mm ²)			
	5	8085948	NEBM-T1G8-E-5-Q7N-LE8-1	
	10	8085949	NEBM-T1G8-E-10-Q7N-LE8-1	
	15	8085950	NEBM-T1G8-E-15-Q7N-LE8-1	
	X length ¹⁾	8085951	NEBM-T1G8-E-...-Q7N-LE8-1	
	For EMMS-AS-4 0/55 with resolver and EMMS-AS-7 0/10 0/140 with CMMP-AS (cable cross section: 1.5 mm ²)			
	5	550310	NEBM-M23G8-E-5-Q9N-LE8	
	10	550311	NEBM-M23G8-E-10-Q9N-LE8	
	15	550312	NEBM-M23G8-E-15-Q9N-LE8	
	X length ¹⁾	550313	NEBM-M23G8-E-...-Q9N-LE8	
	For EMMS-AS-7 0/10 0/140 with CMMT-AS (cable cross section: 1.5 mm ²)			
	5	5391141	NEBM-M23G8-E-5-Q9N-LE8-1	
	10	5391144	NEBM-M23G8-E-10-Q9N-LE8-1	
	15	5391139	NEBM-M23G8-E-15-Q9N-LE8-1	
	X length ¹⁾	5391145	NEBM-M23G8-E-...-Q9N-LE8-1	
	For EMMS-AS-190 with CMMP-AS (cable cross section: 2.5 mm ²)			
	5	1750241	NEBM-M40G8-E-5-Q10N-LE8	
	10	1750242	NEBM-M40G8-E-10-Q10N-LE8	
	15	1750243	NEBM-M40G8-E-15-Q10N-LE8	
	X length ¹⁾	1750244	NEBM-M40G8-E-...-Q10N-LE8	
	For EMMS-AS-190 with CMMT-AS (cable cross section: 2.5 mm ²)			
	5	8085961	NEBM-M40G8-E-5-Q10N-LE8-1	
	10	8085960	NEBM-M40G8-E-10-Q10N-LE8-1	
	15	8085962	NEBM-M40G8-E-15-Q10N-LE8-1	
	X length ¹⁾	8085959	NEBM-M40G8-E-...-Q10N-LE8-1	

1) Choice of cable lengths: 0.5 ... 99.9 m, in increments of 0.1 m.


 **Note**

Cable lengths > 25 m possible following technical consultation.
In the case of motors with a holding brake, the max. cable length is 50 m.

Accessories

Ordering data	Cable length [m]	Part no.	Type
Encoder cable			
	For EMMS-AS-4 0/55 with CMMP-AS		
	5	550314	NEBM-T1G8-E-5-N-S1G15
	10	550315	NEBM-T1G8-E-10-N-S1G15
	15	550316	NEBM-T1G8-E-15-N-S1G15
	X length ¹⁾	550317	NEBM-T1G8-E-...-N-S1G15
	For EMMS-AS-4 0/55 with CMMT-AS		
	5	8085944	NEBM-T1G8-E-5-N-R3G8
	10	8085945	NEBM-T1G8-E-10-N-R3G8
	15	8085946	NEBM-T1G8-E-15-N-R3G8
	X length ¹⁾	8085947	NEBM-T1G8-E-...-N-R3G8
	For EMMS-AS-7 0/10 0/14 0/190 with CMMP-AS		
	5	550318	NEBM-M12W8-E-5-N-S1G15
	10	550319	NEBM-M12W8-E-10-N-S1G15
	15	550320	NEBM-M12W8-E-15-N-S1G15
	X length ¹⁾	550321	NEBM-M12W8-E-...-N-S1G15
	For EMMS-AS-7 0/10 0/14 0/190 with CMMT-AS		
	5	5213423	NEBM-M12W8-E-5-N-R3G8
	10	5213425	NEBM-M12W8-E-10-N-R3G8
	15	5213426	NEBM-M12W8-E-15-N-R3G8
	X length ¹⁾	5213428	NEBM-M12W8-E-...-N-R3G8
Resolver cable for CMMP-AS only			
	For EMMS-AS-4 0/55/7 0/10 0/14 0/190		
	5	1732653	NEBM-M23G12-E-5-N-S1G9
	10	1732654	NEBM-M23G12-E-10-N-S1G9
	15	1732655	NEBM-M23G12-E-15-N-S1G9
	X length ¹⁾	1732656	NEBM-M23G12-E-...-N-S1G9

1) Choice of cable lengths: 0.5 ... 99.9 m, in increments of 0.1 m.

 **Note**

Cable lengths > 25 m possible following technical consultation.
In the case of motors with a holding brake, the max. cable length is 50 m.

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center
Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalnepantla,
Estado de México

Multinational Contact Center
01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center
1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us



www.festo.com/socialmedia



www.festo.com

Subject to change