

Multi-axis controllers CMXR-C2


FESTO



Multi-axis controllers CMXR-C2

FESTO

Key features

At a glance			
Benefits			
The comfort of a multi-axis controller with the flexibility of a PLC on one platform: the multi-axis controller CMXR-C2 is the top performer class in		the CMXR series. The applications range from simple to complex handling of moving objects on several conveyor systems.	
The multi-axis controller CMXR-C2 is especially suitable for tracking applications; vision sensors (e.g. camera, etc ...) can be connected for detecting parts.		In addition to motion control, the multi-axis controller CMXR-C2 also offers an integrated PLC to CoDeSys V2.3.	
Powerful – reducing cycle times with optimum motion		Economical – reducing costs with easy configuration	
Reducing cycle times is a requirement of all customers. There are limits, however, to what is possible based on, for example, the mechanical system, the travel distances or the maximum forces acting on a work-piece. The challenge is to be quick and at the		same time protect the mechanical system. The multi-axis controller CMXR offers the following features:	
		• Motion path smoothing for positions • Ramp shapes for acceleration • Constant path speed	
Reducing costs is always an important issue. The Festo Configuration Tool (FCT) in combination with the programming language Festo Teach Language (FTL) makes configuration quick and easy and significantly shortens configuration times. This enables the		full focus to be on developing the application, since the basic motion programs are contained in the CMXR. The FTL programming tool utilises these basic programs. The FTL programs can therefore be used immediately.	
Reliable – easy handling of tools in 3D space		Reliable – easy integration with finished interfaces	
The flange is not the end of a kinematic system. Mounted on the flange are the tools, which can, for example, comprise pneumatic drives such as the semi-rotary drive DRQD. Tools oriented other than vertically are a challenge for a controller. The CMXR enables the end position of the tool, for example a vacuum suction cup, to be defined in 3D space and transfers		this point to the programmed path. This feature also makes it easy to move the three-dimensionally positioned tool in the direction of the tool's path simply by pressing a button on the teach pendant CDSA. The teach-in of positions on parts slides, for example, is thus very easy and efficient.	
The CMXR system offers fully defined interfaces for actuation via an external controller. This can be done with a simple method using digital signals or via a Profibus. These interfaces enable programs to be selected, started or stopped, for example. The Profibus variant also offers the option of reading or writing variables from the CMXR controller.		This transfer of variables enables movements to be influenced or even coupled with a process running on the external controller. To minimise the complexity when using an external PLC, modules for the PLC systems Siemens Simatic S7 and systems based on CoDeSys V2.3 are supplied for actuation via Profibus.	
Flexible – from simple to complex kinematic systems			
Cartesian system		Tripod kinematics	
			
The multi-axis controller CMXR is the heart of a complete kinematic system solution. It combines a mechanical system, electrical drive technology and control technology into a complete motion control package with integrated and harmonised interfaces for all system components included.		The multi-axis controller enables simple axis movements, from point to point to complex path control. It is able to control simple and complex kinematic systems with up to six degrees of freedom in 3D space. These include, among others, linear and three-dimensional gantries (Cartesian systems) as well as tripod kinematic systems.	

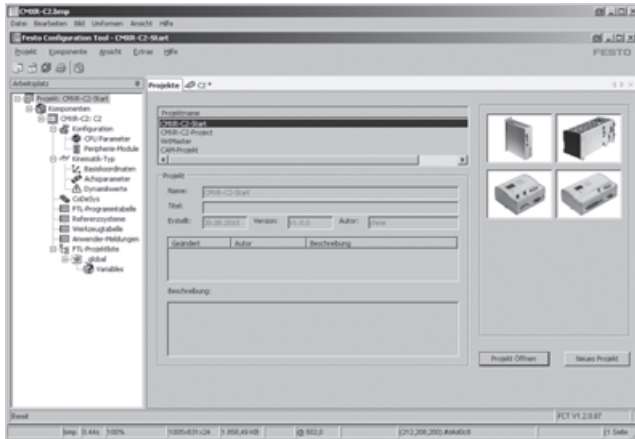
Multi-axis controllers CMXR-C2

Key features



At a glance

Convenient – quick and easy configuration



The main requirements for product configuration software are speed, reliability and user-friendliness. The multi-axis controller CMXR, like other products from Festo, is configured via the Festo Configuration Tool (FCT). Electrical variables (e.g. inputs and


outputs) as well as mechanical variables (e.g. choice of the kinematic system) are defined in the configuration. The sophisticated user guidance system guarantees quick and easy configuration of the complex multi-axis system.

Transparent – programming in plain text with FTL

Via teach pendant CDSA



Via Festo Configuration Tool (FCT)



The motion programs are programmed using the text-based macro programming tool of the Festo Teach Language (FTL). This powerful programming tool contains macros, for example for movements, dynamic settings as well as I/O processing of peripheral

devices such as grippers, for example, and has been specially developed for the CMXR. Programming can be done online via the teach pendant CDSA or offline via the FTL programming editor. The FTL editor is integrated in the Festo Configuration Tool (FCT).

Convenient – easy programming via teach-in



When creating a motion program, the motion sequence is very often known but the precise position to be approached, for example of a gripper or a tray is not. These can only be determined directly during commissioning by means of accurate approaching. The CMXR in combination with the teach pendant CDSA offers dialogue-based software for this purpose, thus enabling quick and easy teach-in of the necessary positions.

Flexible – mobile operation and monitoring with CDSA



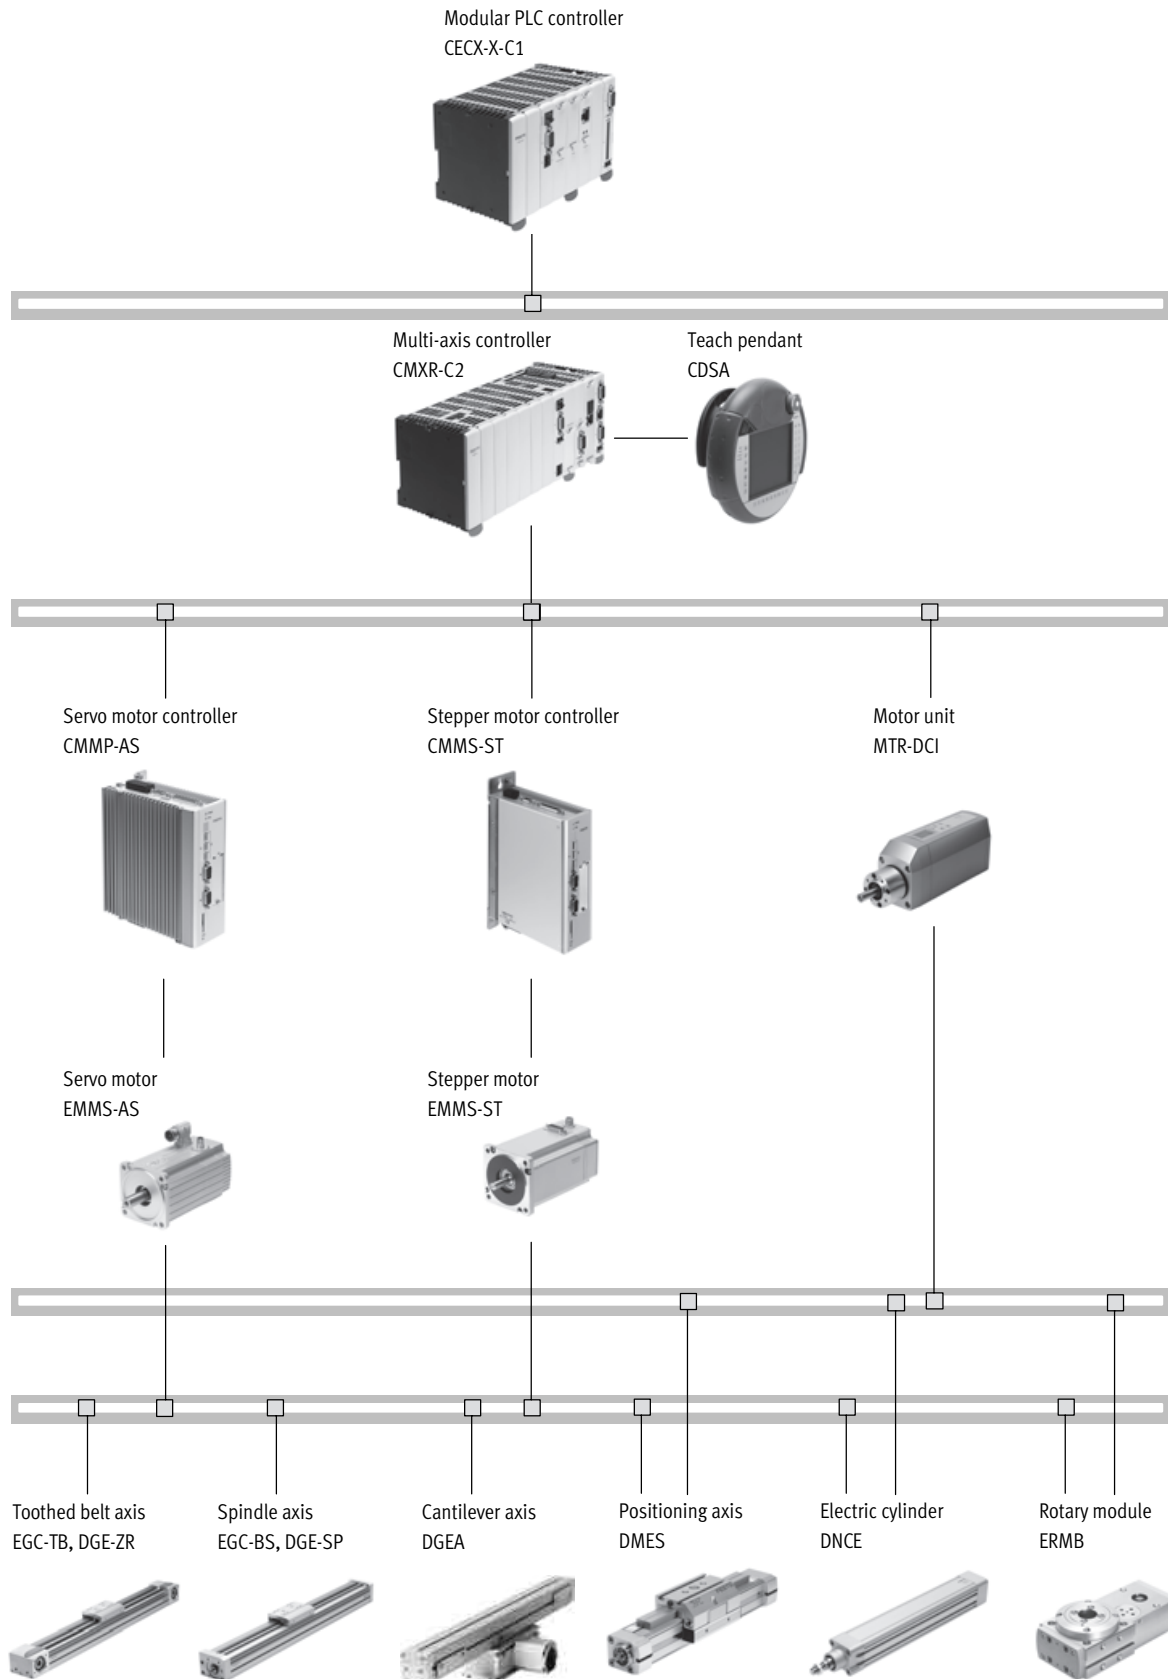
The teach pendant CDSA features an emergency stop switch as well as a 3-stage enabling key. Both devices are designed with two channels and are prepared for integration in the customer's safety circuits. The purpose of the enabling key is to approve the drive power during set-up. In addition to the hardware and ergonomic handle, the CDSA also features a colour touch screen as an alternative to the keypad for starting actions.

Multi-axis controllers CMXR-C2

Key features

FESTO

Everything from a single source – perfectly co-ordinated



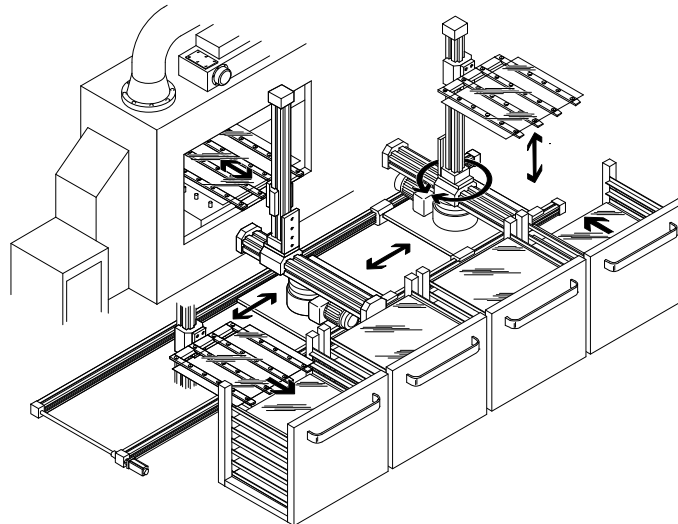
Multi-axis controllers CMXR-C2

Key features

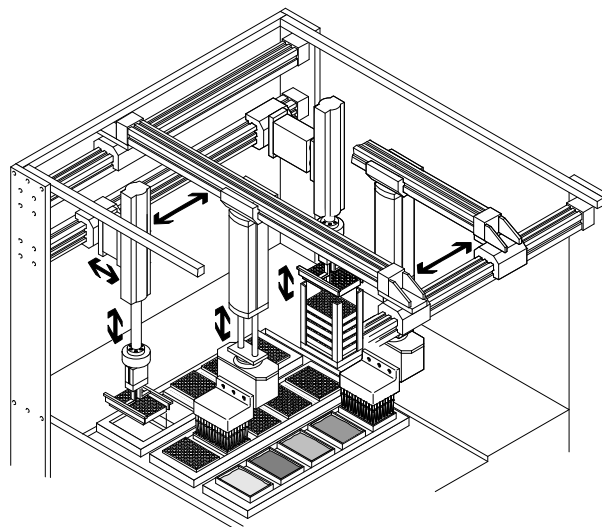
FESTO

Application examples

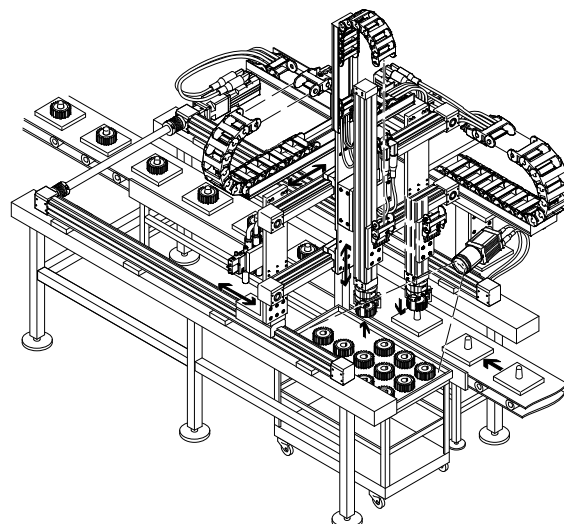
Removing and palletising workpieces



Handling and picking carrier plates



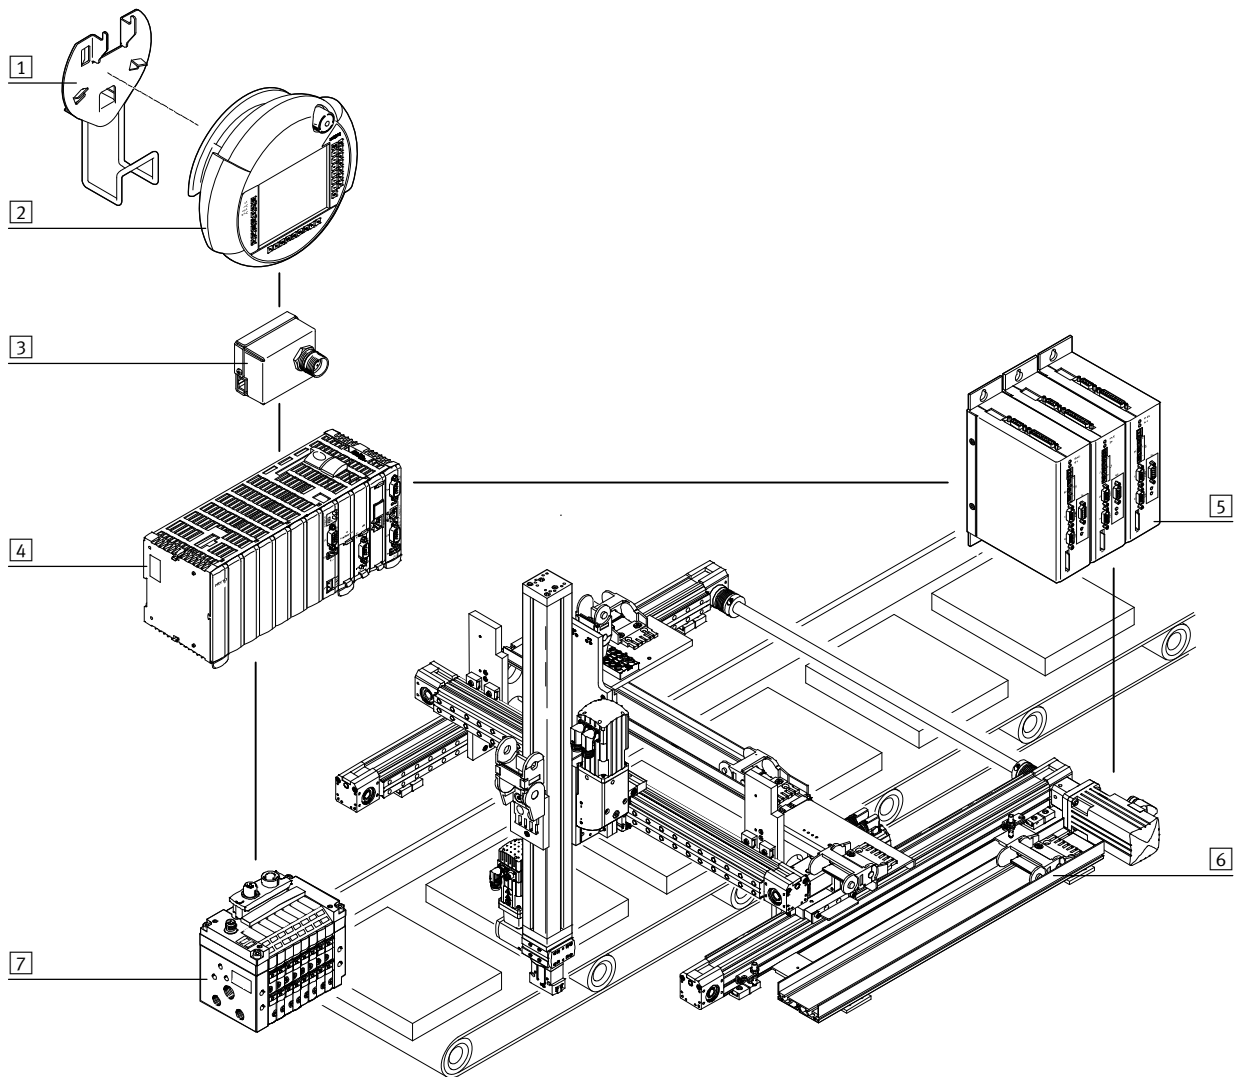
Feeding workpieces with simultaneous quality inspection via a vision system



Multi-axis controllers CMXR-C2

Peripherals overview

FESTO



Multi-axis controllers CMXR-C2

Peripherals overview



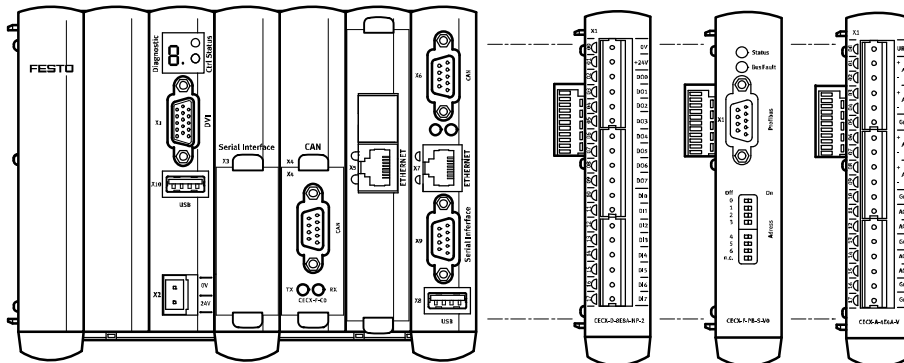
Accessories		
Type	Brief description	→ Page/Internet
1 Retainer CAFM	Wall fixture for the teach pendant CDSA with cable support	27
2 Teach pendant CDSA	For operating, monitoring and programming the multi-axis controller CMXR-C1	28
3 Interface housing CAMI	Adapter for connecting the teach pendant CDSA outside a control cabinet with the controller CMXR inside a control cabinet	30
4 Multi-axis controller CMXR-C2	Enables simple axis movements, from point to point to complex path control	9
5 Motor controller CMM...	For controlling stepper or servo motors from Festo via a CAN interface	cmm
6 Three-dimensional gantry	Wide range of kinematic systems within the multi-axis modular system from Festo	three-dimensional gantry
7 Valve terminal	The multi-axis controller enables the connection of peripheral devices, for example valve terminals, via a CAN interface	valve terminal
– Cables and plugs	Connecting cables and plugs for connecting the individual devices	30

Multi-axis controllers CMXR-C2

Peripherals overview and type codes

FESTO

Controller CMXR-C2 with peripheral modules



Peripheral modules		
Type	Brief description	→ Page/Internet
Input/output module, digital CECX-D-6E8A-PN-2, CECX-D-8E8A-NP-2	• 6 or 8 digital inputs • 8 digital outputs	12
Input module, digital CECX-D-16E	• 16 digital inputs	14
Output module, digital CECX-D-14A-2	• 14 digital outputs	15
Input/output module, analogue CECX-A-4E4A-V	• 4 analogue voltage inputs • 4 analogue voltage outputs	16
Input/output module, analogue CECX-A-4E4A-A	• 4 analogue current inputs • 4 analogue current outputs	16
Input module, analogue CECX-A-4E-V	• 4 analogue voltage inputs	18
Output module, analogue CECX-A-4A-V	• 4 analogue voltage outputs	19
Input module, analogue CECX-E-4E-T-P1, CECX-E-6E-T-P2	• 4 or 6 temperature inputs	20
Encoder interface CECX-C-2G2, CECX-C-2G1	• 2 or 4 encoder interfaces	22
Fieldbus interface CECX-F-PB-S-V1	• Profibus slave DP-V1	24
Electrical interface CECX-S-2S1	• 2 serial interfaces RS232	25
Electrical interface CECX-S-S4	• Serial interface RS485-A/422-A	26

Note

- Plugs are not included in the scope of delivery for the peripheral modules (plugs → 30)
- Max. 1 Profibus slave module can be used
- Max. 12 peripheral modules can be used

More product information
→ www.festo.com

Type codes

CMXR		—	C2
Type			
CMXR	Multi-axis controller		
Controller			
C2	Controller 2		

Multi-axis controllers CMXR-C2

Technical data

FESTO

Controller
CMXR-C2



General technical data		
Operating voltage range	[V DC]	19.2 ... 30
Nominal operating voltage	[V DC]	24
Power consumption at 24 V	[W]	32
Max. power consumption	[W]	99
Max. protection	[A]	10
Type of mounting		On H-rail (TS 35x7.5)
Controller operating mode		Manual
		Automatic
Operating elements		CTRL button
Status display		7-segment display
		LED green = power
Supported kinematic systems		2-axis gantries
		3-axis gantries
		H-gantries
		T-gantries
		Any interpolation
		Tripod kinematics
Total number of axes		9
Breakdown of the axes		3 basic axes
		3 manual axes
		3 auxiliary axes
CPU data		256 MB SDRAM
		512 KB SRAM
		600 MHz processor
Memory card		Compact Flash ≥ 256 MB
Control methods		Can be individually programmed thanks to integrated PLC with CoDeSys
		I/O
		Profibus DP
		CANopen
Program organisation		Via FTL programs
		PLC programming to CoDeSys
Configuration support		FCT (Festo Configuration Tool)
Command set		Mathematical functions
Max. number of commands		Approx. 10,000
Programming software		FCT (Festo Configuration Tool)
		CoDeSys V2.3
		CDSA-D1-VX
Programming language		FTL (Festo Teach Language)
		PLC programming to CoDeSys
		Text-based macro language
USB interface		USB 2.0
Electrical protection class		III
Product weight	[g]	1,270

CANopen® is a registered trademark of its respective trademark holder in certain countries.

Multi-axis controllers CMXR-C2

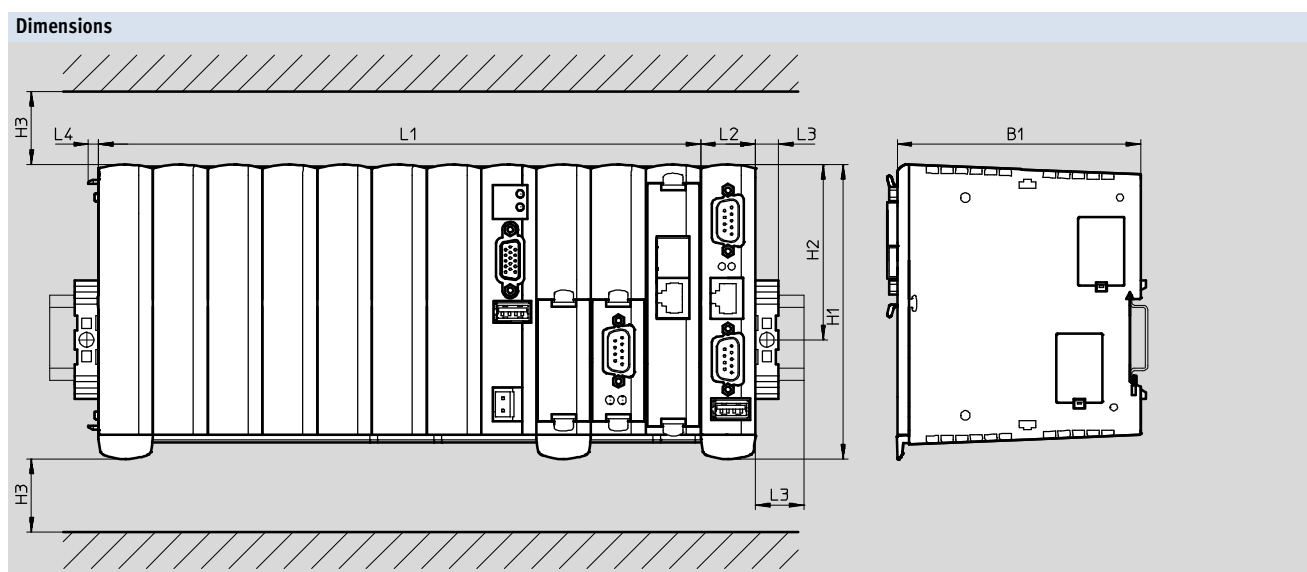
FESTO

Technical data

General technical data	
Materials	
Note on materials	Contains PWIS (paint-wetting impairment substances)
	RoHS-compliant

Technical data – Interfaces	
Ethernet	
Connector plug	RJ45 socket, 8-pin
Transmission speed [Mbps]	10/100
Supported protocols	TCP/IP
Fieldbus interface	
Type	CAN bus
Number	2x CANopen masters
Connection technology	Sub-D plug, 9-pin
Max. fieldbus transmission rate [Mbps]	1
	Can be set via software
Electrical isolation	No

Operating and environmental conditions	
Ambient temperature [°C]	5 ... 55
Storage temperature [°C]	–40 ... +70
Resistance to shock	EN 60068-2-27 EA 15 g, 11 ms (half-sine)
Resistance to vibration	EN 60068-2-6-FC 5 ... 9 Hz 3.5 mm 9 ... 150 Hz 1g
Relative air humidity [%]	10 ... 95
Protection class	IP20
CE mark (see declaration of conformity)	To EU EMC Directive
Certification	cULus listed (OL) C-Tick





Type	B1 ±2	H1 ±2	H2 ±1	H3	L1 ±2	L2	L3	L4
CMXR-C2	100	121	72	50	247.5	22.5	9.5	4

Multi-axis controllers CMXR-C2


Technical data

FESTO

Ordering data		
Controller	Part No.	Type
	567869	CMXR-C2

Ordering data – Manuals ¹⁾					
	Language	Part No.	Type	Part No.	Type
		System manual		Hardware manual	
	DE	571687	GDCP-CMXR-C2-SY-DE	571693	GDCP-CMXR-C2-HW-DE
	EN	571688	GDCP-CMXR-C2-SY-EN	571694	GDCP-CMXR-C2-HW-EN
	ES	571689	GDCP-CMXR-C2-SY-ES	571695	GDCP-CMXR-C2-HW-ES
	FR	571690	GDCP-CMXR-C2-SY-FR	571696	GDCP-CMXR-C2-HW-FR
	IT	571691	GDCP-CMXR-C2-SY-IT	571697	GDCP-CMXR-C2-HW-IT
	SV	571692	GDCP-CMXR-C2-SY-SV	571698	GDCP-CMXR-C2-HW-SV
		Basic FTL programming manual		Tracking programming manual	
	DE	560315	GDCP-CMXR-SW-DE	571705	GDCP-CMXR-C2-ST-DE
	EN	560316	GDCP-CMXR-SW-EN	571706	GDCP-CMXR-C2-ST-EN
	ES	560317	GDCP-CMXR-SW-ES	571707	GDCP-CMXR-C2-ST-ES
	FR	560318	GDCP-CMXR-SW-FR	571708	GDCP-CMXR-C2-ST-FR
	IT	560319	GDCP-CMXR-SW-IT	571709	GDCP-CMXR-C2-ST-IT
	SV	560320	GDCP-CMXR-SW-SV	571710	GDCP-CMXR-C2-ST-SV
		Control interface manual			
	DE	571699	GDCP-CMXR-C2-CS-DE		
	EN	571700	GDCP-CMXR-C2-CS-EN		
	ES	571701	GDCP-CMXR-C2-CS-ES		
	FR	571702	GDCP-CMXR-C2-CS-FR		
	IT	571703	GDCP-CMXR-C2-CS-IT		
	SV	571704	GDCP-CMXR-C2-CS-SV		

1) Manual in paper form is not included in the scope of delivery

Ordering data – Memory card			
	Brief description	Part No.	Type
	For storing the operating system and configuration data	570812	CAMC-P3-C-M256

Multi-axis controllers CMXR-C2

Technical data

FESTO

Input/output module,
digital

CECX-D-6E8A-PN-2,
CECX-D-8E8A-NP-2



General technical data		
Operating voltage range	[V DC]	19.2 ... 30
Nominal operating voltage	[V DC]	24
Electrical connection technology for I/O		Socket strip, grid 5.08 mm
Power consumption at 5 V	[W]	0.4
Power consumption at 24 V	[W]	1.9
Electrical protection class		III
Product weight	[g]	135
Materials		
Note on materials		Contains PWIS (paint-wetting impairment substances)
		RoHS-compliant



Technical data		
Type	CECX-D-6E8A-PN-2	CECX-D-8E8A-NP-2
Digital inputs		
Number	6	8
Fast clock pulse inputs	2, interruptible, response time 50 µs	
Input voltage	[V DC]	24
Nominal value for FALSE	[V DC]	≤ 5
Nominal value for TRUE	[V DC]	≥ 15
Input signal delay	[ms]	2, 100, adjustable
	[kHz]	12 with interrupt input
Electrical isolation	Yes, via optocoupler	
Status display	Green LED	
Switching logic	NPN (negative logic)	PNP (positive logic)
Digital outputs		
Number	8	
Contact	Transistor	
Output voltage	[V DC]	24
Output current	[A]	2 with 50% concurrence
Short circuit proof	Yes	
Electrical isolation	Yes, via optocoupler	
Status display	Orange LED	
Switching logic	NPN (negative logic)	PNP (positive logic)

Multi-axis controllers CMXR-C2

FESTO

Technical data

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	–40 ... +70
Resistance to shock		EN 60068-2-27 EA
		15 g, 11 ms (half sine)
Resistance to vibration		EN 60068-2-6-FC
		5 ... 9 Hz 3.5 mm
		9 ... 150 Hz 1g
Relative air humidity	[%]	10 ... 95
Protection class		IP20
Certification		cULus listed (OL)

Ordering data			
Input/output module, digital		Manual ¹⁾	
	Part No. Type		Language Part No. Type
	6 inputs/8 outputs		6 inputs/8 outputs
	553972 CECX-D-6E8A-PN-2		–
	8 inputs/8 outputs		8 inputs/8 outputs
	552099 CECX-D-8E8A-NP-2		DE 560585 GDCC-CECX-D-8E8A-NP-DE
			EN 560586 GDCC-CECX-D-8E8A-NP-EN
			ES 560587 GDCC-CECX-D-8E8A-NP-ES
			FR 560588 GDCC-CECX-D-8E8A-NP-FR
			IT 560589 GDCC-CECX-D-8E8A-NP-IT
			SV 560590 GDCC-CECX-D-8E8A-NP-SV

1) Manual in paper form is not included in the scope of delivery

Multi-axis controllers CMXR-C2

Technical data

FESTO


Input module,
digital
CECX-D-16E



General technical data	
Electrical connection technology for I/O	Socket strip, grid 5.08 mm
Power consumption at the system bus [W]	0.4
Electrical protection class	III
Product weight [g]	130
Materials	
Note on materials	Contains PWIS (paint-wetting impairment substances) RoHS-compliant

Technical data	
Number	16
Fast clock pulse inputs	2, interruptible, response time 100 µs
Input voltage [V DC]	24
Nominal value for FALSE [V DC]	≤ 5
Nominal value for TRUE [V DC]	≥ 15
Input signal delay [ms]	20, 200, adjustable Additionally 0.2 ms with interrupt inputs
Electrical isolation	Yes, via optocoupler
Status display [V DC]	LED
Switching logic	PNP (positive logic)

Operating and environmental conditions	
Ambient temperature [°C]	5 ... 55
Storage temperature [°C]	-40 ... +70
Resistance to shock	EN 60068-2-27 EA 15 g, 11 ms (half sine)
Resistance to vibration	EN 60068-2-6-FC 5 ... 9 Hz 3.5 mm 9 ... 150 Hz 1g
Relative air humidity [%]	10 ... 95
Protection class	IP20
Certification	cULus listed (OL)

Ordering data			
Input module, digital		Manual ¹⁾	
Part No.	Type	Language	Part No. Type
	552096 CECX-D-16E	DE	560573 GDCC-CECX-D-16E-DE
		EN	560574 GDCC-CECX-D-16E-EN
		ES	560575 GDCC-CECX-D-16E-ES
		FR	560576 GDCC-CECX-D-16E-FR
		IT	560577 GDCC-CECX-D-16E-IT
		SV	560578 GDCC-CECX-D-16E-SV

1) Manual in paper form is not included in the scope of delivery

Multi-axis controllers CMXR-C2

Technical data

FESTO

Output module,
digital
CECX-D-14A-2



General technical data		
Operating voltage range	[V DC]	19.2 ... 30
Nominal operating voltage	[V DC]	24
Electrical connection technology for I/O		Socket strip, grid 5.08 mm
Power consumption at the system bus	[W]	0.4
Electrical protection class		III
Product weight	[g]	135
Materials		
Note on materials		Contains PWIS (paint-wetting impairment substances)
		RoHS-compliant

Technical data		
Number		14
Contact		Transistor
Output voltage	[V DC]	24
Output current	[A]	2 with 50% concurrence per group
Short circuit proof		Yes
Electrical isolation		Yes, via optocoupler
Electrical isolation in groups		Yes, in 2 groups
Status display	[V DC]	LED
Switching logic		PNP (positive logic)

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	-40 ... +70
Resistance to shock		EN 60068-2-27 EA 15 g, 11 ms (half sine)
Resistance to vibration		EN 60068-2-6-FC 5 ... 9 Hz 3.5 mm 9 ... 150 Hz 1g
Relative air humidity	[%]	10 ... 95
Protection class		IP20
Certification		cULus listed (OL)

Ordering data			
Output module, digital			Manual ¹⁾
	Part No.	Type	
	552097	CECX-D-14A-2	
			DE 560579 GDCC-CECX-D-14A-DE
			EN 560580 GDCC-CECX-D-14A-EN
			ES 560581 GDCC-CECX-D-14A-ES
			FR 560582 GDCC-CECX-D-14A-FR
			IT 560583 GDCC-CECX-D-14A-IT
			SV 560584 GDCC-CECX-D-14A-SV

1) Manual in paper form is not included in the scope of delivery

Multi-axis controllers CMXR-C2

Technical data

FESTO

Input/output module,
analogue
CECX-A-4E4A-V,
CECX-A-4E4A-A



General technical data		
Type	CECX-A-4E4A-V	CECX-A-4E4A-A
Variant	Voltage inputs/outputs	Current inputs/outputs
Electrical connection technology for I/O	Socket strip, grid 5.08 mm	
Power consumption at 5 V [W]	0.3	0.3
Power consumption at 24 V [W]	3.3	3.6
Electrical protection class	III	
Product weight [g]	135	
Materials		
Note on materials	Contains PWIS (paint-wetting impairment substances)	
	RoHS-compliant	


Technical data		
Type	CECX-A-4E4A-V	CECX-A-4E4A-A
Analogue inputs		
Number	4	4
Resolution [bit]	14	14
Signal range [V]	0 ... 10 Uref	–
	±10	–
	–	0 ... 20
Value of the least significant bit (LSB) [mV]	1.3	–
	–	1.35
Supply voltage for actuators [V DC]	10 ±2.5% (max. 20 mA)	–
Input resistance [Ω]	10x10 ⁶	< 200
Absolute accuracy at 25 °C [%]	±0.01	±0.01
Sampling repeat time [ms]	1	1
Electrical isolation	No	No
Analogue outputs		
Number	4	4
Resolution [bit]	12	12
Max. load resistance [Ω]	≥ 1,000	≤ 600
Signal range [V]	±10	–
	–	0 ... 20
Value of the least significant bit (LSB) [mV]	5.32	–
	–	5.39
Conversion time [ms]	1	1
Absolute accuracy at 25 °C [%]	±0.15	±0.15


Multi-axis controllers CMXR-C2

FESTO

Technical data

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	-40 ... +70
Resistance to shock		EN 60068-2-27 EA
		15 g, 11 ms (half sine)
Resistance to vibration		EN 60068-2-6-FC
		5 ... 9 Hz 3.5 mm
		9 ... 150 Hz 1g
Relative air humidity	[%]	10 ... 95
Protection class		IP20
Certification		cULus listed (OL)

Ordering data		
Input/output module, analogue		
	Part No.	Type
	Voltage inputs/outputs	
	552100	CECX-A-4E4A-V
Current inputs/outputs		
552101	CECX-A-4E4A-A	

Manuals ¹⁾			
	Language	Part No.	Type
	Voltage inputs/outputs		
	DE	560591	GDCC-CECX-A-4E4A-V-DE
	EN	560592	GDCC-CECX-A-4E4A-V-EN
	ES	560593	GDCC-CECX-A-4E4A-V-ES
	FR	560594	GDCC-CECX-A-4E4A-V-FR
	IT	560595	GDCC-CECX-A-4E4A-V-IT
	SV	560596	GDCC-CECX-A-4E4A-V-SV
	Current inputs/outputs		
	DE	560597	GDCC-CECX-A-4E4A-A-DE
	EN	560598	GDCC-CECX-A-4E4A-A-EN
	ES	560599	GDCC-CECX-A-4E4A-A-ES
	FR	560600	GDCC-CECX-A-4E4A-A-FR
	IT	560601	GDCC-CECX-A-4E4A-A-IT
	SV	560602	GDCC-CECX-A-4E4A-A-SV

1) Manual in paper form is not included in the scope of delivery

Multi-axis controllers CMXR-C2

Technical data

FESTO


Input module,
analogue
CECX-A-4E-V



General technical data	
Variant	Voltage inputs
Electrical connection technology for I/O	Socket strip, grid 5.08 mm
Power consumption at 5 V [W]	0.3
Power consumption at 24 V [W]	2
Electrical protection class	III
Product weight [g]	132
Materials	
Note on materials	Contains PWIS (paint-wetting impairment substances)
	RoHS-compliant

Technical data	
Number	4
Resolution [bit]	14
Signal range [V]	0 ... 10 Uref ±10
Value of the least significant bit (LSB) [mV]	1.3
Supply voltage for actuators [V DC]	10 ±2.5% (max. 20 mA)
Input resistance [Ω]	10x10 ⁶
Absolute accuracy at 25 °C [%]	±0.01
Sampling repeat time [ms]	1
Electrical isolation	No

Operating and environmental conditions	
Ambient temperature [°C]	5 ... 55
Storage temperature [°C]	-40 ... +70
Resistance to shock	EN 60068-2-27 EA 15 g, 11 ms (half sine)
Resistance to vibration	EN 60068-2-6-FC 5 ... 9 Hz 3.5 mm 9 ... 150 Hz 1g
Relative air humidity [%]	10 ... 95
Protection class	IP20
Certification	cULus listed (OL)

Ordering data	
Input module, analogue	
	Part No. Type 553975 CECX-A-4E-V

Multi-axis controllers CMXR-C2

Technical data

FESTO


Output module,
analogue
CECX-A-4A-V



General technical data		
Variant	Voltage outputs	
Electrical connection technology for I/O	Socket strip, grid 5.08 mm	
Power consumption at 5 V	[W]	0.3
Power consumption at 24 V	[W]	1.9
Electrical protection class	III	
Product weight	[g]	132
Materials		
Note on materials	Contains PWIS (paint-wetting impairment substances)	
	RoHS-compliant	

Technical data		
Number		4
Resolution	[bit]	12
Max. load resistance	[Ω]	≥ 1,000
Signal range	[V]	±10
Value of the least significant bit (LSB)	[mV]	5.32
Conversion time	[ms]	1
Absolute accuracy at 25 °C	[%]	±0.15

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	−40 ... +70
Resistance to shock	EN 60068-2-27 EA	
	15 g, 11 ms (half sine)	
Resistance to vibration	EN 60068-2-6-FC	
	5 ... 9 Hz 3.5 mm	
	9 ... 150 Hz 1g	
Relative air humidity	[%]	10 ... 95
Protection class	IP20	
Certification	cULus listed (OL)	

Ordering data		
Output module, analogue		
	Part No.	Type
	553976	CECX-A-4A-V

Multi-axis controllers CMXR-C2

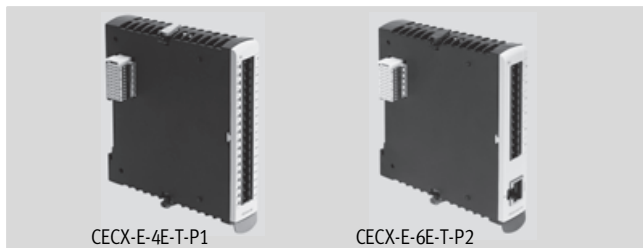
Technical data

FESTO

Input module,
analogue
CECX-E-4E-T-P1,
CECX-E-6E-T-P2



- With 4 or 6 temperature inputs



General technical data		
Type	CECX-E-4E-T-P1	CECX-E-6E-T-P2
Variant	4 temperature inputs	6 temperature inputs
Electrical connection technology for I/O	Socket strip, grid 5.08 mm	
	–	Gold contacts
Power consumption at 5 V [W]	0.3	0.6
Power consumption at 24 V [W]	2.5	1.6
Electrical protection class	III	
Product weight [g]	134	142
Materials		
Note on materials	Contains PWIS (paint-wetting impairment substances)	
	RoHS-compliant	


Technical data		
Type	CECX-E-4E-T-P1	CECX-E-6E-T-P2
Number	4	6
Resolution [bit]	14	
Signal range	PT100 (-100 ... +850 °C)	–
	–	Thermoelement
	–	Type J (Fe-CuNi, -100 ... +700 °C)
	–	Type K (NiCr-Ni, -100 ... +1,000 °C)
	–	Type L (Fe-CuNi, -100 ... +700 °C)
Value of the least significant bit (LSB) [°C]	0.058	–
Input resistance [Ω]	10x10 ⁶	> 10x10 ³
Absolute accuracy at 25 °C	±0.01 %	±1.0 °C
Internal cycle time [ms]	2	100
Electrical isolation	No	Yes

Operating and environmental conditions		
Ambient temperature [°C]	5 ... 55	
Storage temperature [°C]	–40 ... +70	
Resistance to shock	EN 60068-2-27 EA	
	15 g, 11 ms (half sine)	
Resistance to vibration	EN 60068-2-6-FC	
	5 ... 9 Hz 3.5 mm	
	9 ... 150 Hz 1g	
Relative air humidity [%]	10 ... 95	
Protection class	IP20	
Certification	cULus listed (OL)	

Multi-axis controllers CMXR-C2

Technical data



Ordering data		
Input module, analogue		
	Part No.	Type
	4 temperature inputs	
	553973	CECX-E-4E-T-P1
	6 temperature inputs	
	553974	CECX-E-6E-T-P2

Multi-axis controllers CMXR-C2

Technical data

FESTO

Encoder interface

CECX-C-2G2,

CECX-C-2G1



General technical data		
Type	CECX-C-2G2	CECX-C-2G1
Operating voltage range [V DC]	19.2 ... 30	
Nominal operating voltage [V DC]	24	
Electrical connection technology for I/O	Socket strip, grid 5.08 mm	
Power consumption at 5 V [W]	0.6	0.65
Electrical protection class	III	
Product weight [g]	135	140
Materials		
Note on materials	Contains PWIS (paint-wetting impairment substances)	
	RoHS-compliant	



Technical data – Interfaces		
Type	CECX-C-2G2	CECX-C-2G1
Digital inputs		
Fast clock pulse inputs	2 (latch function) response time 20 µs NPN/PNP	–
Electrical isolation	No	–
Encoder inputs		
Number	2	4
Connection technology	Sub-D socket, 9-pin	RJ45
Resolution	[bit] Speed measurement: 32	16 ... 32
	[bit] Distance measurement: 24	Can be set via software
Encoder supply voltage	[V DC] 24	24 (250 mA/channel)
	[V DC] 5.05 ±4% (100 mA/channel)	–
Max. input frequency [kHz]	250	–
Baud rate [kbps]	–	125; 250; 500; 1,000
	–	Can be set via software
Signal range [V]	5 differential (RS422)	SSI (RS422)
	[V] 24 single-ended	Binary/grey can be set using software
Electrical isolation	–	No

Multi-axis controllers CMXR-C2

Technical data

FESTO

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	–40 ... +70
Resistance to shock		EN 60068-2-27 EA
		15 g, 11 ms (half sine)
Resistance to vibration		EN 60068-2-6-FC
		5 ... 9 Hz 3.5 mm
		9 ... 150 Hz 1g
Relative air humidity	[%]	10 ... 95
Protection class		IP20
Certification		cULus listed (OL)

Ordering data			
Encoder interface		Manuals ¹⁾	
	Part No. Type		Language Part No. Type
	2 encoder inputs		2 encoder inputs
	552117 CECX-C-2G2		DE 560603 GDCC-CECX-C-2G2-DE
			EN 560604 GDCC-CECX-C-2G2-EN
			ES 560605 GDCC-CECX-C-2G2-ES
			FR 560606 GDCC-CECX-C-2G2-FR
			IT 560607 GDCC-CECX-C-2G2-IT
			SV 560608 GDCC-CECX-C-2G2-SV
	4 encoder inputs		4 encoder inputs
	553977 CECX-C-2G1		–

1) Manual in paper form is not included in the scope of delivery

Multi-axis controllers CMXR-C2

Technical data

FESTO


Fieldbus interface,
Profibus slave DP-V1
CECX-F-PB-S-V1



General technical data		
Power consumption at 5 V	[W]	1.4
Status displays		LED (status)
		LED red = bus fault
Electrical protection class		III
Product weight	[g]	140
Materials		
Note on materials		Contains PWIS (paint-wetting impairment substances)
		RoHS-compliant

Technical data – Interface		
Fieldbus		
Type		Profibus slave DP-V1
Connection technology		Sub-D socket, 9-pin
Transmission rate		9.6 kbps ... 12 Mbps
Electrical isolation		Yes

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	–40 ... +70
Resistance to shock		EN 60068-2-27 EA
		15 g, 11 ms (half sine)
Resistance to vibration		EN 60068-2-6-FC
		5 ... 9 Hz 3.5 mm
		9 ... 150 Hz 1g
Relative air humidity	[%]	10 ... 95
Protection class		IP20
Certification		cULus listed (OL)

Ordering data		
Fieldbus interface, Profibus slave DP-V1		
	Part No.	Type
	565598	CECX-F-PB-S-V1

Multi-axis controllers CMXR-C2

Technical data

FESTO


Electrical interface CECX-S-2S1

Peripheral module for extending the controller with two RS232 serial interfaces.



General technical data		
Type	RS232	
Number	2	
Connection technology	Sub-D plug, 9-pin	
Transmission rate	[bps]	1,200 ... 115,000
		Can be set via software
Power consumption at 5 V	[W]	0.4
Status display	LED (status)	
Electrical isolation	No	
Protection class	IP20	
Electrical protection class	III	
Product weight	[g]	132
Materials		
Note on materials	Contains PWIS (paint-wetting impairment substances)	
	RoHS-compliant	

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	-40 ... +70
Resistance to shock	EN 60068-2-27 EA	
	15 g, 11 ms (half sine)	
Resistance to vibration	EN 60068-2-6-FC	
	5 ... 9 Hz 3.5 mm	
	9 ... 150 Hz 1g	
Relative air humidity	[%]	10 ... 95
Protection class	IP20	
Certification	cULus listed (OL)	

Ordering data		
Electrical interface		
	Part No.	Type
	553978	CECX-S-2S1

Multi-axis controllers CMXR-C2

Technical data

FESTO


Electrical interface CECX-S-S4

Optional module for extending the controller with an RS485-A/422-A serial interface.



General technical data		
Type	RS485-A/422-A	
Number	1	
Connection technology	Sub-D plug, 9-pin	
Transmission rate	[bps]	1,200 ... 115,000
		Can be set via software
Electrical isolation	No	
Electrical protection class	III	
Product weight	[g]	31
Materials		
Note on materials	Contains PWIS (paint-wetting impairment substances)	
	RoHS-compliant	

Operating and environmental conditions		
Ambient temperature	[°C]	5 ... 55
Storage temperature	[°C]	-40 ... +70
Resistance to shock		EN 60068-2-27 EA
		15 g, 11 ms (half sine)
Resistance to vibration		EN 60068-2-6-FC
		5 ... 9 Hz 3.5 mm
		9 ... 150 Hz 1g
Relative air humidity	[%]	10 ... 95
Protection class	IP20	
Certification	cULus listed (OL)	

Ordering data		
Electrical interface		
	Part No.	Type
	553979	CECX-S-S4

Multi-axis controllers CMXR-C2

Accessories

FESTO

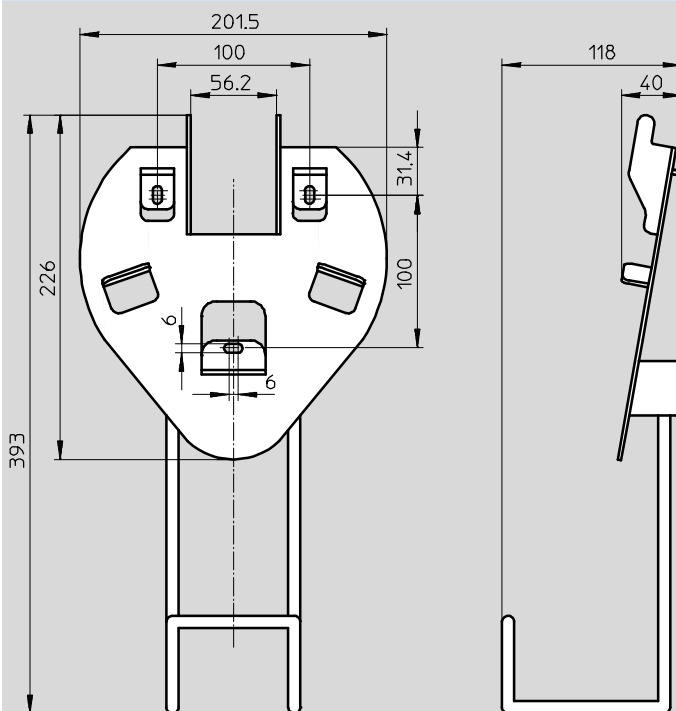
Retainer

CAFM-D1-W



Dimensions

Download CAD data → www.festo.com



Ordering data

	Part No.	Type
Retainer	552107	CAFM-D1-W

Multi-axis controllers CMXR-C2

Accessories

FESTO

Teach pendant
CDSA-D1-VX



General technical data		
Operating voltage range	[V DC]	19 ... 30
Nominal operating voltage	[V DC]	24
Current consumption ¹⁾	[A]	0.4
User memory	[MB]	256
Display		Colour TFT
Display size		6.5"
Display resolution		VGA, 640x480 pixels
Display properties		Touch screen
Number of function keys		31
Number of system LEDs		4
Operating elements		2 enabler keys Emergency stop
Area of application		Only with multi-axis controller CMXR
Ethernet interface		2 interfaces RJ45, 10/100 Mbps
USB interface		Yes
Backup battery		Yes
Product weight	[g]	1,250
Materials		
Note on materials		Contains PWIS (paint-wetting impairment substances) RoHS-compliant

1) At nominal operating voltage

Operating and environmental conditions		
Ambient temperature	[°C]	0 ... +50
Storage temperature	[°C]	-20 ... +70
Relative air humidity	[%]	5 ... 95
Protection class		IP65
CE mark (see declaration of conformity)		To EU EMC Directive

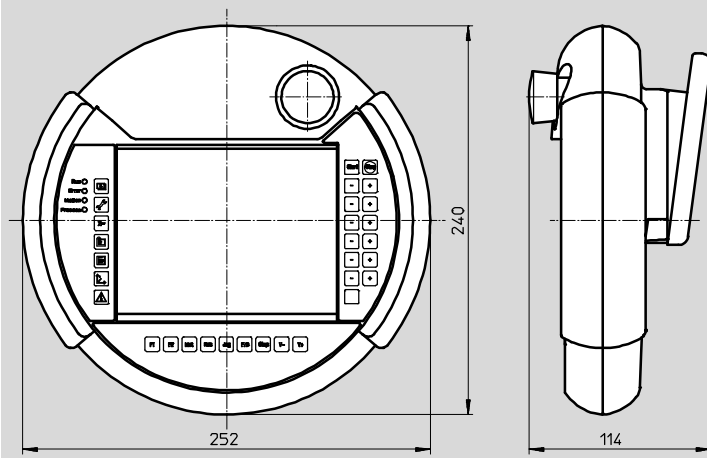
Multi-axis controllers CMXR-C2

Accessories

FESTO

Dimensions

Download CAD data → www.festo.com



Ordering data

	Part No.	Type
Teach pendant	552103	CDSA-D1-VX

Ordering data – Manuals¹⁾

	Language	Part No. Type		Part No. Type	
		System manual		Software manual	
	DE	560333	GDCP-CDSA-SY-DE	560339	GDCP-CDSA-SW-DE
	EN	560334	GDCP-CDSA-SY-EN	560340	GDCP-CDSA-SW-EN
	ES	560335	GDCP-CDSA-SY-ES	560341	GDCP-CDSA-SW-ES
	FR	560336	GDCP-CDSA-SY-FR	560342	GDCP-CDSA-SW-FR
	IT	560337	GDCP-CDSA-SY-IT	560343	GDCP-CDSA-SW-IT
	SV	560338	GDCP-CDSA-SY-SV	560344	GDCP-CDSA-SW-SV

¹⁾ Manual in paper form is not included in the scope of delivery

Multi-axis controllers CMXR-C2

Accessories

FESTO

Interface housing CAMI-C



General technical data		
Type of mounting		On control cabinet wall (M25)
Mounting position		Any
Electrical connection		Ethernet interface: RJ45
		Coninver connector M25, 17-pin
		Spring force connector, 11-pin
Protection class		IP65 to IEC 60529
Dimensions		
Length	[mm]	26
Width	[mm]	67.2
Height	[mm]	76.1
Materials		
Note on materials		Contains PWIS (paint-wetting impairment substances)
		RoHS-compliant

Ordering data		
	Part No.	Type
Interface housing	552116	CAMI-C

Ordering data – Cables and plugs				
	Brief description	Cable length [m]	Part No.	Type
	Connecting cable: between multi-axis controller CMXR and teach pendant CDSA via interface housing CAMI-C	5	552104	NESC-C-D1-5-C1
		10	552105	NESC-C-D1-10-C1
		15	552106	NESC-C-D1-15-C1
	Plug for interface housing CAMI-C, 11-pin	–	558328	NECC-L1G11-C1
	Plug for peripheral modules, 2-pin		553857	NECC-L1G2-C1
	Plug for peripheral modules, 4-pin		553858	NECC-L1G4-C1
	Plug for peripheral modules, 6-pin		553859	NECC-L1G6-C1
	Plug for peripheral modules, 8-pin		553860	NECC-L1G8-C1
	Plug for peripheral modules, 18-pin		553861	NECC-L1G18-C1
	Plug: is used to bridge the emergency stop circuit when the teach pendant is disconnected	–	555676	CAMF-B-M25-G4
	Plug: for Profibus interface; Sub-D, 9-pin, without terminating resistor	–	533780	FBS-SUB-9-WS-PB-K
	Plug: for CANopen interface; Sub-D, 9-pin, without terminating resistor	–	533783	FBS-SUB-9-WS-CO-K

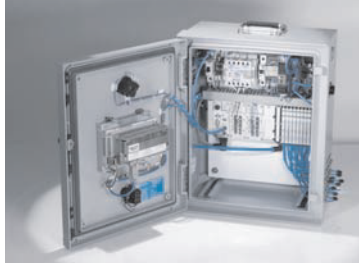
Product Range and Company Overview

A Complete Suite and Company Overview

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support
and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors,
controllers & drivers



Pneumatics
Pneumatic linear and rotary actuators,
valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors
and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 16,000 employees in 60 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.

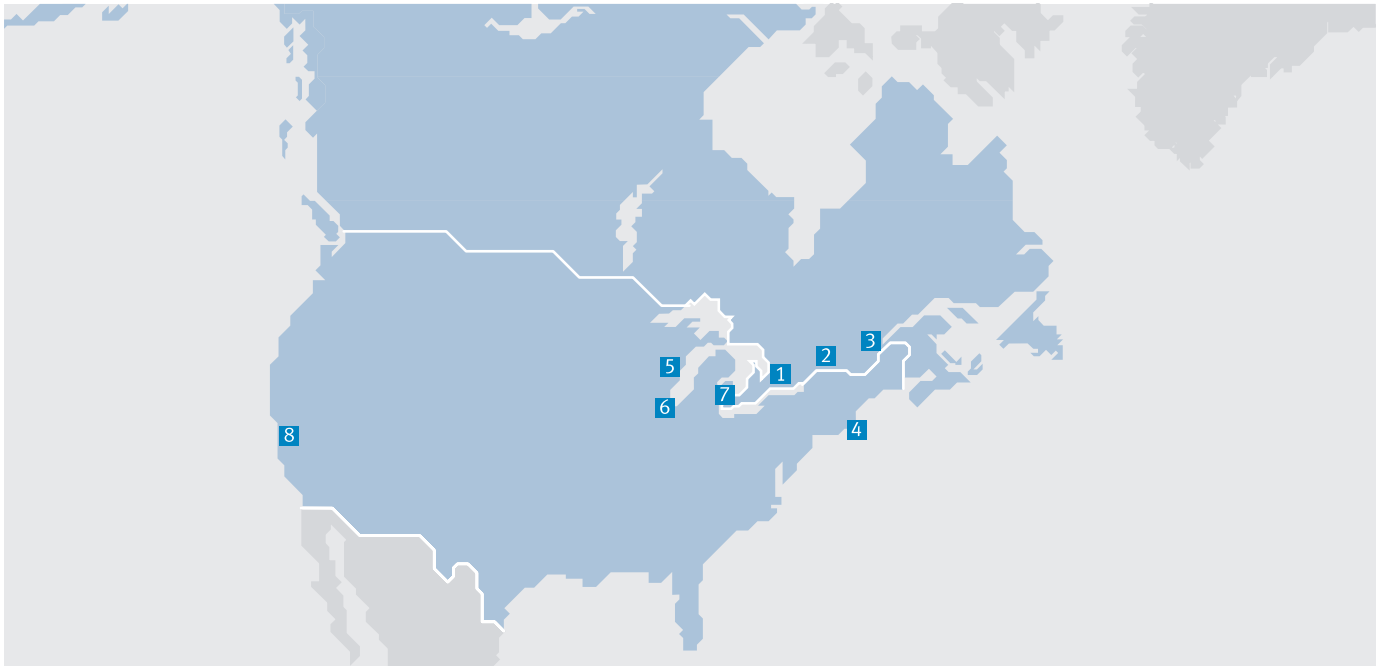


© Copyright 2013, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmental friendly printing plant.

Festo North America



**1 Festo Canada
Headquarters**
Festo Inc.
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters**
Festo Corporation
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:
Tel: 1 877 GO FESTO (1 877 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: festo.canada@ca.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: technical.support@ca.festo.com

USA Customers

Commercial Support:
Tel: 1 800 99 FESTO (1 800 993 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: customer.service@us.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: product.support@us.festo.com

Subject to change

Internet: www.festo.com/us