

Connecting cables M12x1, 5-pin

Type codes



		KV	-	M12	-	M12	-	
Function								
KV	Connecting cables							
Connection technology on the left, field device side								
M12	Socket M12x1, A-coded, 5-pin							
Connection technology on the right, controller side								
M12	Plug, M12x1, A-coded, 5-pin							
Cable length								
1,5	1.5 m							
3,5	3.5 m							

Connecting cables M12x1, 5-pin

Technical data

FESTO

Connecting cable KV-M12

- Connecting cable
- Preassembled at both ends
- Cable lengths: 1.5 m and 3.5 m



General technical data	
Cable identification	With accessories

Technical data – Electrical connection 1	
Function	Field device side
Connection type	Socket
Cable outlet	Straight
Design	Round
Connection technology	M12x1, A-coded, to EN 61076-2-101
Number of poles/wires	5
Assigned pins/wires	5
Type of mounting	Screw-type lock

Technical data – Electrical connection 2	
Function	Controller side
Connection type	Plug
Cable outlet	Straight
Design	Round
Connection technology	M12x1, A-coded, to EN 61076-2-101
Number of poles/wires	5
Assigned pins/wires	5
Type of mounting	Screw-type lock

Technical data – Electrical		
Operating voltage range	[V DC]	0 ... 30
	[V AC]	0 ... 30
Surge resistance	[kV]	1.5
Acceptable current load at 40 °C	[A]	4
Contamination level		3
Contact durability		500
Additional functions		Pin 5 of plug leading
Protective earth connection		Not present

Technical data – Cables		
Cable diameter	[mm]	5
Cable design	[mm ²]	4x0.34, screened
Nominal conductor cross section	[mm ²]	0.34
Cable characteristic		Standard
Cable test conditions		Test conditions on request

Connecting cables M12x1, 5-pin

FESTO



Technical data

Materials	
Housing	TPE-U(PUR)
Housing colour	Black
Screw-type lock	Brass, nickel-plated
Seals	FPM
Pin contacts	Bronze, gold-plated
	Brass, gold-plated
Cable sheath	TPE-U(PUR)
Cable sheath colour	Light grey
Insulating sheath	PVC
Note on materials	RoHS-compliant

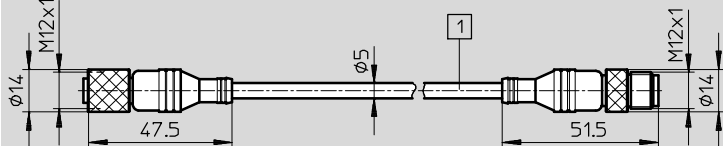
Operating and environmental conditions		
Ambient temperature	[°C]	-25 ... +70
Ambient temperature with flexible cable installation	[°C]	-5 ... +70
Degree of protection		IP65
		IP67
Note on degree of protection		In assembled state
Corrosion resistance class CRC ¹⁾		2

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Circuitry (view of socket/plug connector)				
Electrical connection 1	Pin	Wire colour ¹⁾	Pin	Electrical connection 2
	1	BN	1	
	2	WH	2	
	3	BU	3	
	4	BK	4	
	5	Screened	5	

1) To IEC 757


Dimensions		Download CAD data → www.festo.com
		1 Cable, length 1.5 m or 3.5 m depending on order

Connecting cables M12x1, 5-pin

Technical data

FESTO

Ordering data			
	Cable length [m]	Part No.	Type code
Socket M12x1, 5-pin – plug M12x1, 5-pin	1.5	529044	KV-M12-M12-1,5
	3.5	530901	KV-M12-M12-3,5

Ordering data – Accessories			
		Part No.	Type code
	Inscription labels for placing on a cable with diameter 5 ... 8 mm	11x20 mm	33361 KM-BZ

Festo - Your Partner in Automation



1 Festo Inc.
5300 Explorer Drive
Mississauga, ON L4W 5G4
Canada

Festo Customer Interaction Center
Tel: 1 877 463 3786
Fax: 1 877 393 3786
Email: customer.service.ca@festo.com



2 Festo Pneumatic
Av. Ceylán 3,
Col. Tequesquináhuac
54020 Tlalnepantla,
Estado de México

Multinational Contact Center
01 800 337 8669
ventas.mexico@festo.com



3 Festo Corporation
1377 Motor Parkway
Suite 310
Islandia, NY 11749

Festo Customer Interaction Center
1 800 993 3786
1 800 963 3786
customer.service.us@festo.com



4 Regional Service Center
7777 Columbia Road
Mason, OH 45040

Connect with us

www.festo.com/socialmedia

