


Proportional pressure regulators VPPM



Proportional pressure regulators VPPM

General information

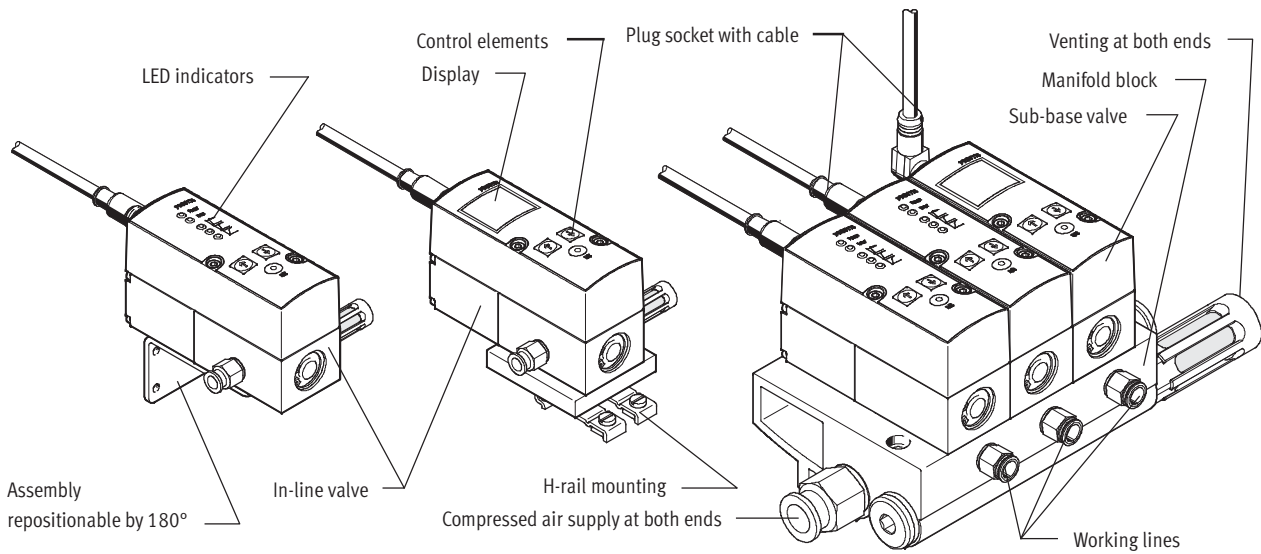

Innovative

- Multi-sensor control (cascade control)
- Diagnostics
- Choice of regulation characteristics
- Temperature compensated
- High dynamic response
- High repetition accuracy
- Modular product system

Versatile

- Individual valves (in-line valve)
- Manifold valves (sub-base/flange valve)
- Various user interfaces
 - LED indicators
 - LCD display
 - Adjustment/selection buttons
- A choice of valves with different pressure ranges
- Pressure range can be modified on the valve
- Choice of different setpoint specifications
 - Current input
 - Voltage input

Reliable

- Integrated pressure sensor
 - with independent output
- Open circuit monitoring
- Pressure is maintained if the controller fails

Easy to mount


- Manifold block
- H-rail mounting
- Individually via mounting bracket
- QS fittings

Proportional pressure regulators VPPM

General information

FESTO

Layout of a control circuit

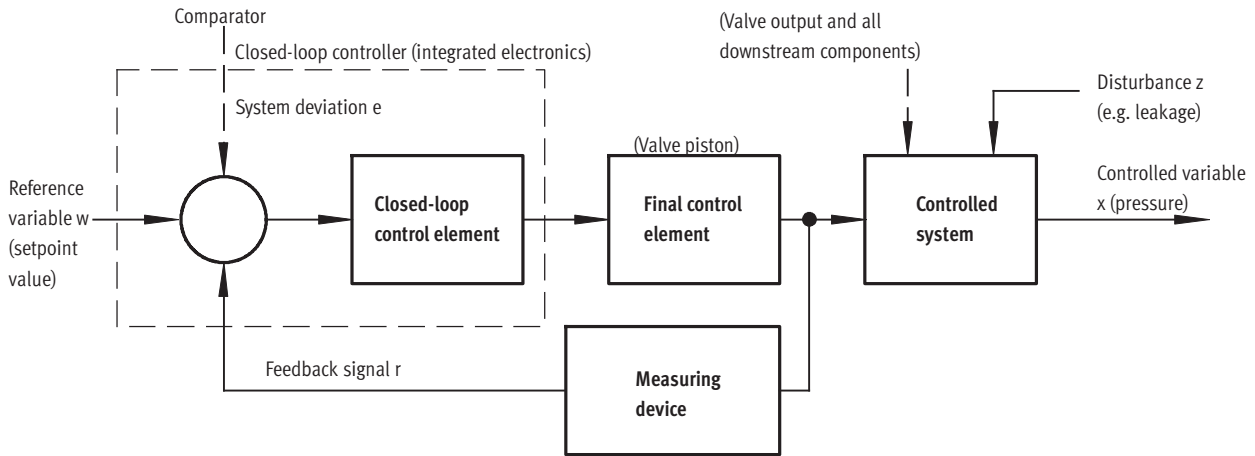

Layout

The figure shows a closed-loop control circuit. The reference variable w (setpoint value, e.g. 5 volts or 8 mA) initially acts on a comparator. The measuring device sends the controlled variable x value (actual value, e.g. 3 bar) to the comparator as a feedback signal r . The closed-loop control element detects the system


deviation e and actuates the final control element. The output of the final control element acts on the controlled system. The closed-loop control element thus attempts to compensate for the difference between the reference variable w and the controlled variable x by using the final control element.

Method of operation

This process runs continuously so changes in the reference variable are always detected. However, a system deviation will also appear if the reference variable is constant but the controlled variable changes. This happens when the flow through the valve changes in response to a switching action, a cylinder movement

or a change in load. The disturbance variable z will also cause a system deviation. An example of this is when the pressure drops in the air supply. The disturbance variable z acts on the controlled variable x unintentionally. In all cases, the regulator attempts to readjust the controlled variable x to the reference variable w .

Multi-sensor control (cascade control) of the VPPM

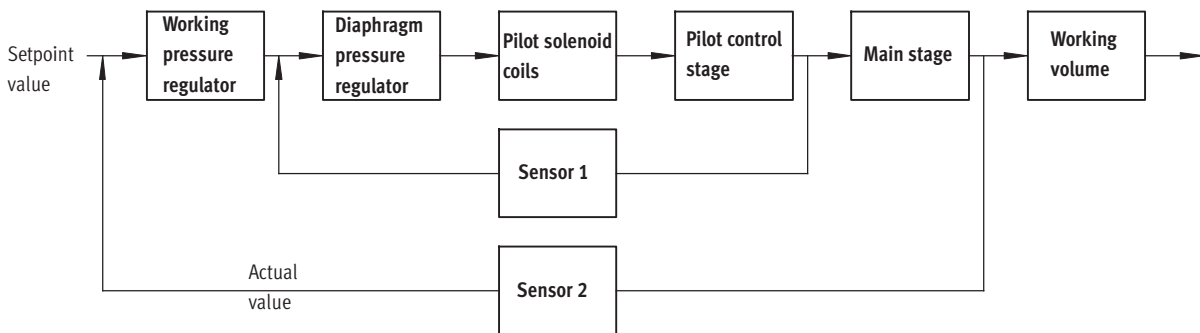

Cascade control

Unlike conventional direct-acting regulators, with multi-sensor control several control circuits are nested inside each other. The overall controlled

system is divided into smaller sub-controlled circuits that are easier to control for the specific task.

Control precision

Multi-sensor control significantly improves control precision and dynamic


response in comparison with single-acting regulators.

Proportional pressure regulators VPPM

General information


Terms related to the proportional pressure regulator

Hysteresis

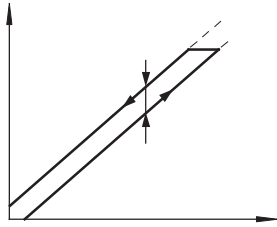


There is always a linear relationship within a certain tolerance between the setpoint value entered and the pressure output. Nevertheless it makes a difference whether the setpoint value is entered as rising or falling. The difference between the maximum deviations is referred to as hysteresis.

Linearity error

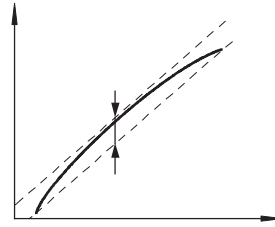


A perfectly linear progression of the control characteristic of the output pressure is theoretical. The maximum percentage deviation from this theoretical control characteristic is referred to as the linearity error. The percentage value refers to the maximum output pressure (full scale).

Response sensitivity

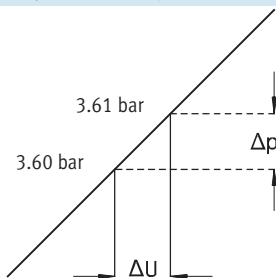


The response sensitivity of the device determines how sensitively one can change, i.e. adjust, a pressure. The smallest setpoint value difference that results in a change in the output pressure is referred to as the response sensitivity. In this case, 0.01 bar.

Repetition accuracy (reproducibility)

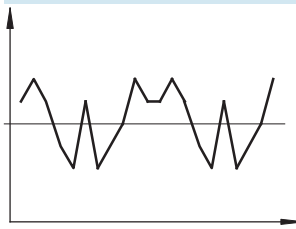


The repetition accuracy is the margin within which the fluid output variables are scattered when the same electrical input signal coming from the same direction is repeatedly adjusted. The repetition accuracy is expressed as a percentage of the maximum fluid output signal.

Zero offset

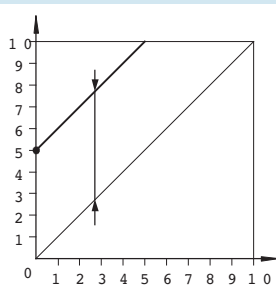


If, for example, a VPPM cannot be vented for safety reasons, the minimum pressure can be increased from the zero point. The smallest setpoint value is then assigned an output pressure of 5 bar, for example, and the largest setpoint value an output pressure of 10 bar. Zero suppression is automatically switched off if zero offsetting is used.

Pressure range adaptation

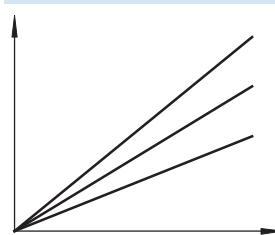

In the delivery condition, 100% setpoint value equals 100% fluid output signal. Pressure range adaptation or adjustment enables the fluid output variable to be matched to the setpoint value.

Zero point suppression

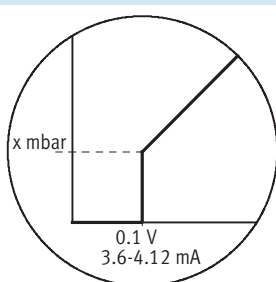


In practice there exists the possibility of residual voltage or residual current at the setpoint input of the VPPM via the setpoint generator. Zero point suppression is used so that the valve is reliably vented at a setpoint value of zero.

Proportional pressure regulators VPPM

General information

VPPM on the valve terminal MPA

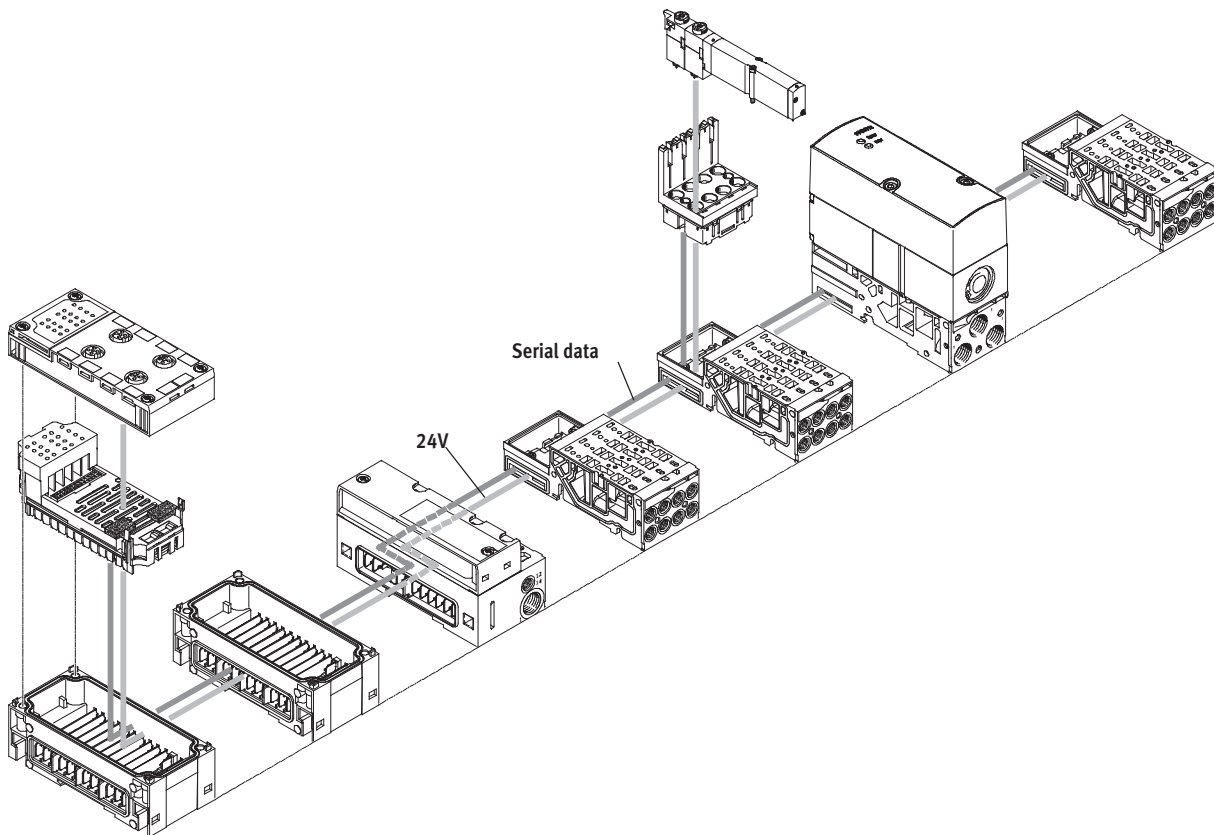

Innovative

- Multi-sensor control
- Diagnostics via bus
- Choice of regulation characteristics
- High dynamic response
- 2 accuracy levels

Versatile

- For all common protocols
- As an individual pressure regulator
- As a pressure zone regulator
- Choice of 3 valves with different pressure ranges
- 3 pressure ranges (presets) can be set via the bus
- Internal or external compressed air supply possible

Reliable




- Long service life
- LED display for the operating status
- Pressure is maintained if the supply voltage fails
- Fast troubleshooting thanks to LEDs on the valves and diagnostics via fieldbus
- Ease of servicing through replaceable valves

Easy to mount

- Simple replacement of the valves
- Tested units
- Easy extension of the valve terminal

Proportional pressure regulators VPPM


Product range overview

Function	Version	Construc-tional design	Pneumatic connection 1, 2, 3	Nominal diameter pressurise/ exhaust [mm]	Pressure regulation range [bar]	Setpoint value input			→ Page/ Internet
						Voltage type	Current type	Digital	
						0 ... 10 V	4 ... 20 mA	–	
Pressure regulators	With LED								
		Pilot actuated diaphragm valve	G $\frac{1}{8}$	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	12
			Sub-base	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
				8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
			G $\frac{1}{4}$	8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
	With LCD								
		Pilot actuated diaphragm valve	G $\frac{1}{8}$	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	12
			Sub-base	6/4.5	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
				8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
			G $\frac{1}{4}$	8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	■	■	–	
	With LED for valve terminal MPA								
		Pilot actuated diaphragm valve	Manifold block MPA	6/4.5, 8/7	0.02 ... 2 0.06 ... 6 0.1 ... 10	–	–	■	type 32 vppm

Proportional pressure regulators VPPM

Peripherals overview

Individual valve

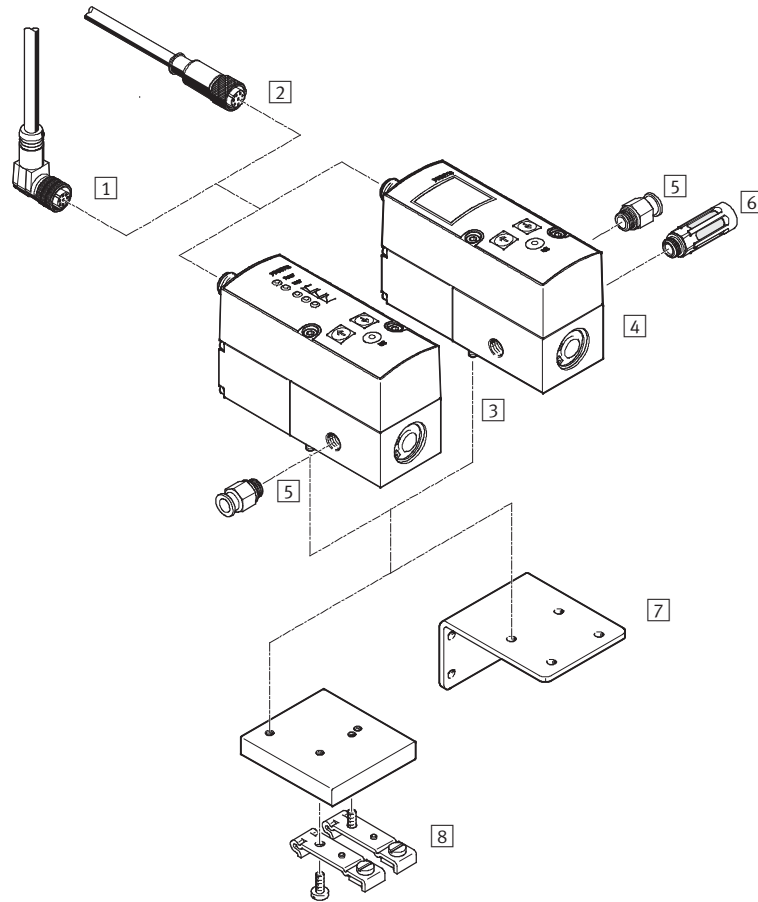


Accessories		
	Brief description	→ Page/Internet
1	Plug socket with cable, angled NEBU-M12W8-...	27
2	Plug socket with cable, straight SIM-M12-8GD-...	27
3	Proportional pressure regulator VPPM	Operator unit with LED 12
4	Proportional pressure regulator VPPM	Operator unit with LCD 12
5	Push-in fitting QS	For connecting compressed air tubing with standard outside diameter qs
6	Silencer	For fitting on exhaust ports u
7	Mounting bracket VAME-P1-A	For attaching the valve 24
8	H-rail mounting VAME-P1-T	For mounting on a H-rail 22

Proportional pressure regulators VPPM

Peripherals overview

Valve manifold

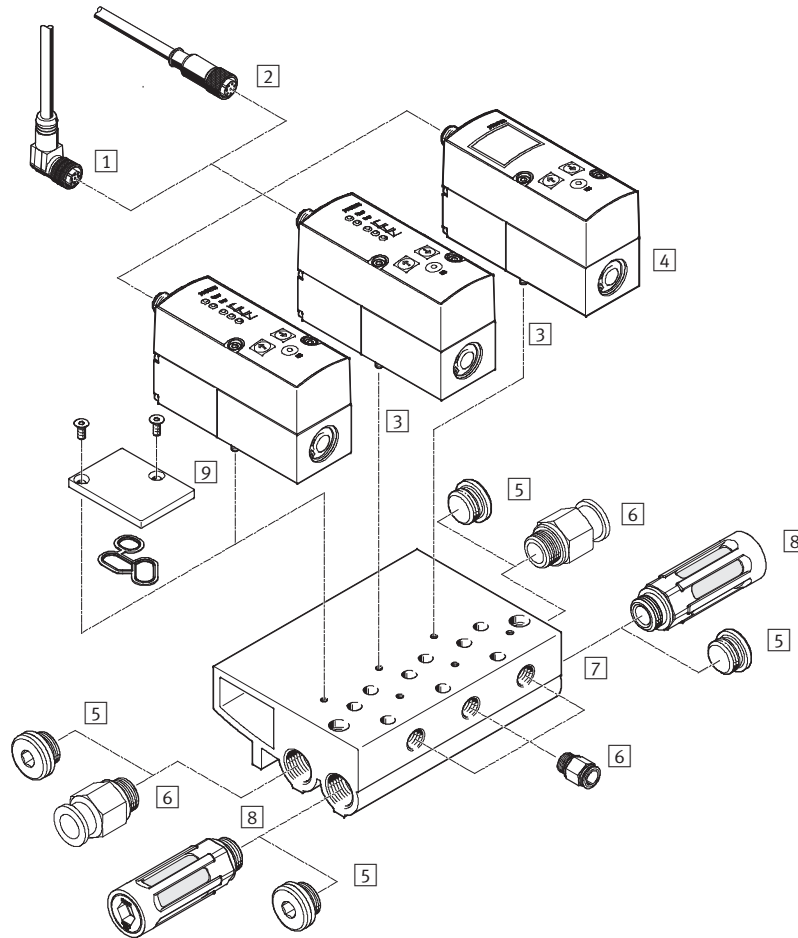


Accessories		
	Brief description	→ Page/Internet
1	Plug socket with cable, angled NEBU-M12W8-...	27
2	Plug socket with cable, straight SIM-M12-8GD-...	27
3	Proportional pressure regulator VPPM	Operator unit with LED 12
4	Proportional pressure regulator VPPM	Operator unit with LCD 12
5	Blanking plug B	- b
6	Push-in fitting QS	For connecting compressed air tubing with standard outside diameter qs
7	Manifold block VABM	- 22
8	Silencer	For fitting on exhaust ports u
9	Blanking plate VABB-P1	For vacant position; seal and countersunk screws included in the scope of delivery 23

Proportional pressure regulators VPPM

System overview

VPPM for valve terminal MPA

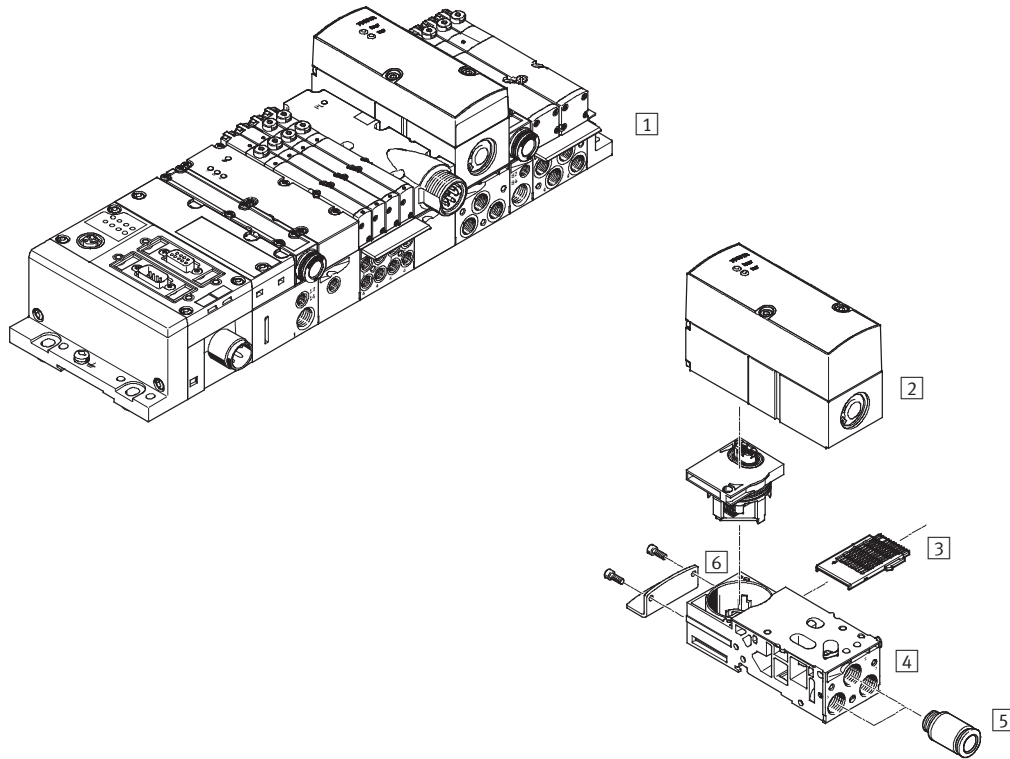

Accessories		
	Brief description	→ Page/Internet
1	Valve terminal MPA With fieldbus connection and VPPM	mpa
2	Proportional pressure regulator VPPM For valve terminal MPA	mpa
3	Electrical manifold module VMPA1-FB-EV-AB For sub-base of the proportional pressure regulator	mpa
4	Sub-base VMPA-FB-AP-P1 Without electrical manifold module and electrical module	mpa
5	Push-in fitting QS	qs
6	Attachment VMPA-BG	mpa


Proportional pressure regulators VPPM

Type codes

		VPPM	-	6	L		-	L	-	1	-	G18	-	0L	6H	-	1L	-	6H	
Type																				
VPPM	Modular proportional pressure regulator																			
Nominal diameter																				
6	6 mm																			
8	8 mm																			
Design																				
L	In-line valve																			
F	Flanged valve																			
T	Flanged valve for valve terminal																			
Mounting method																				
	Freely mountable																			
Dynamic response class																				
L	Low																			
Valve function																				
1	3/2-way valve, normally closed																			
Pneumatic connection																				
G18	Thread G $\frac{1}{8}$																			
G14	Thread G $\frac{1}{4}$																			
F	Flange/sub-base																			
Lower pressure value of regulation range																				
0L	0 bar																			
Upper pressure value of regulation range																				
2H	2 bar																			
6H	6 bar																			
10H	10 bar																			
Alternative lower pressure value of regulation range																				
...L	0 ... 9 bar																			
Alternative upper pressure value of regulation range																				
...H	0.2 ... 10 bar																			

Proportional pressure regulators VPPM

Type codes

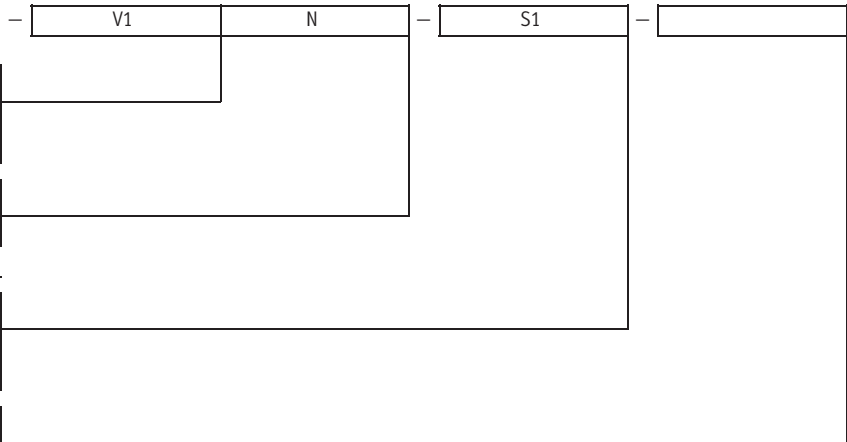

Setpoint specification for individual valve

V1	0 ... 10 V
A4	4 ... 20 mA

Switching output

N	Negative switching
P	Positive switching

Accuracy




	2% (standard)
S1	1%

Operator unit

	LED (standard)
C1	With LCD, pressure unit variable

Proportional pressure regulators VPPM

Technical data


-  Flow rate
380 ... 2,750 l/min
-  Voltage
21.6 ... 26.4 V DC
-  Pressure regulation range
0.02 ... 10 bar

- Variants
- Setpoint input as analogue voltage signal 0 ... 10 V
 - Setpoint input as analogue current signal 4 ... 20 mA
 - LED version
 - With LCD display
 - NPN or PNP switching output



General technical data			G1/8	G1/4	Sub-base	
Constructional design			Pilot actuated diaphragm regulator			
Sealing principle			Soft			
Actuation type			Electric			
Type of control			Pilot actuated via 2/2-way valves			
Type of mounting			Via through-hole, via accessories			
Mounting position			Any			
Nominal diameter	Pressurisation	[mm]	6	8	6	8
	Exhaust	[mm]	4.5	7	4.5	7
Standard nominal flow rate			→ Graphs			
Product weight			400	500	400	500

Electrical data			
Electrical connection			Plug, round design, 8-pin, M12
Operating voltage range		[V DC]	24 ± 10% = 21.6 ... 26.4
Residual ripple			10%
Max. electrical power consumption		[W]	7
Signal setpoint input	Voltage	[V DC]	0 ... 10
	Current	[mA]	4 ... 20
Protection against short circuit			For all electrical connections
Protection against polarity reversal			For all electrical connections
Protection class			IP65
CE mark			EU conformity in accordance with the directive 89/336/EEC (EMC)


 **Note**
If the power supply cable is interrupted, output pressure is maintained unregulated.

Proportional pressure regulators VPPM


Technical data

Flow rate q_{n1} from 1 → 2 as a function of output pressure p_2


VPPM-6L/F-...-0L2H-... (2 bar)

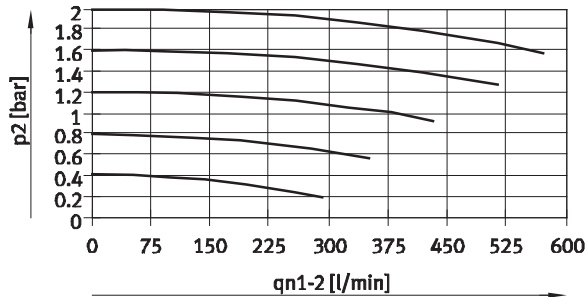

VPPM-6L/F-...-0L6H-... (6 bar)

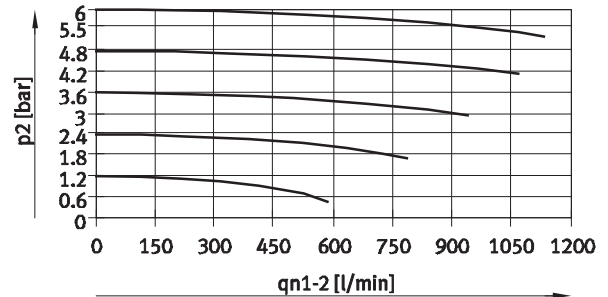


VPPM-6L/F-...-0L10H-... (10 bar)

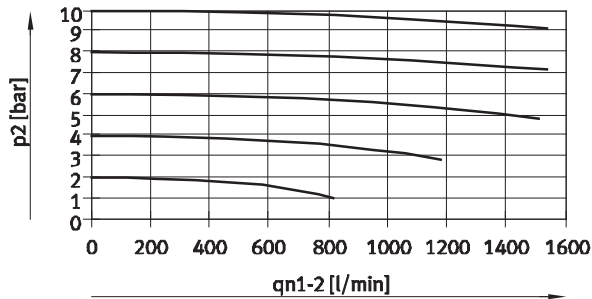


Flow rate q_{n2} from 2 → 3 as a function of output pressure p_2


VPPM-6L/F-...-0L2H-... (2 bar)

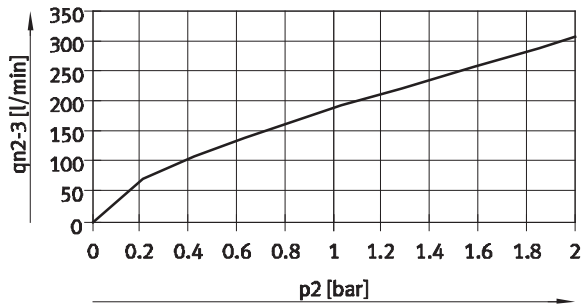

VPPM-6L/F-...-0L6H-... (6 bar)

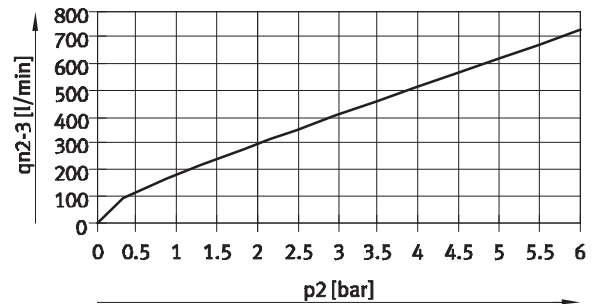

VPPM-6L/F-...-0L10H-... (10 bar)

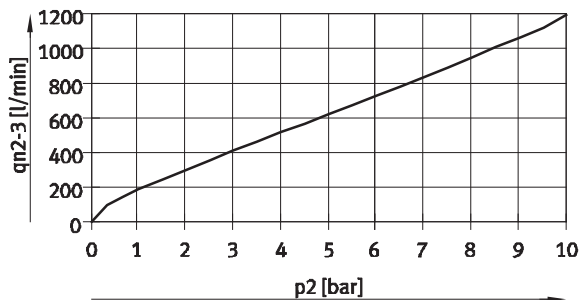


Proportional pressure regulators VPPM

Technical data

Flow rate q_n from 1 → 2 as a function of output pressure p_2


VPPM-8L-...-0L2H-...

(2 bar)

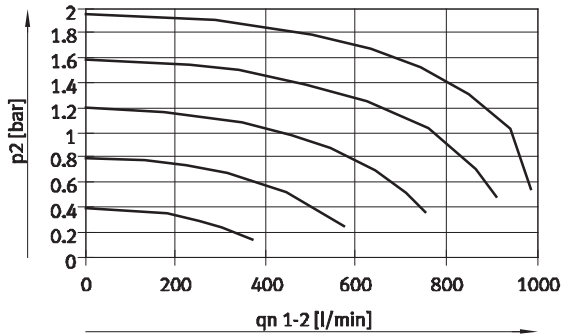


VPPM-8L-...-0L6H-...

(6 bar)

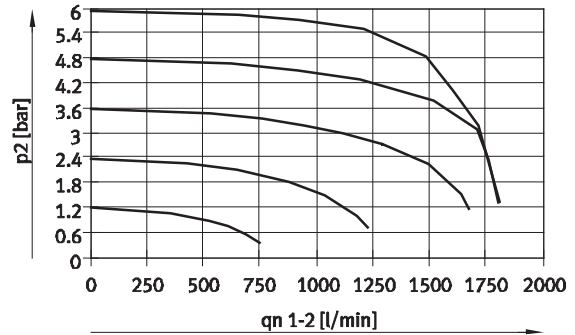

VPPM-8L-...-0L10H-...


(10 bar)

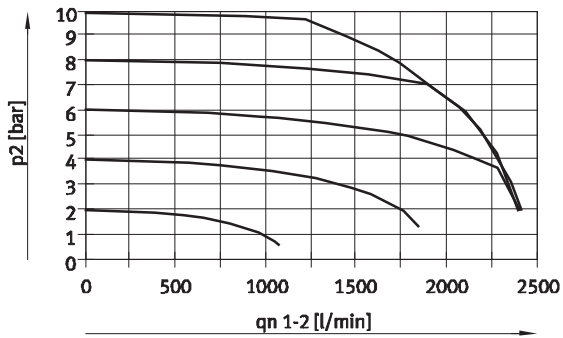

Flow rate q_n from 2 → 3 as a function of output pressure p_2


VPPM-8L-...-0L2H-...

(2 bar)

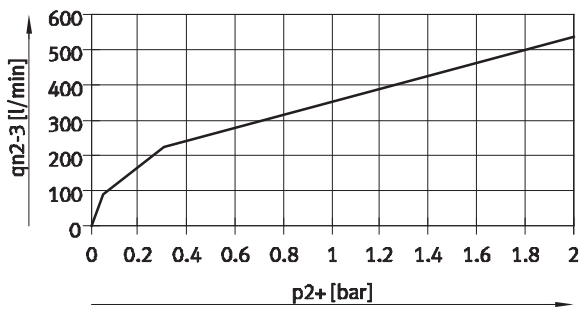

VPPM-8L-...-0L6H-...

(6 bar)

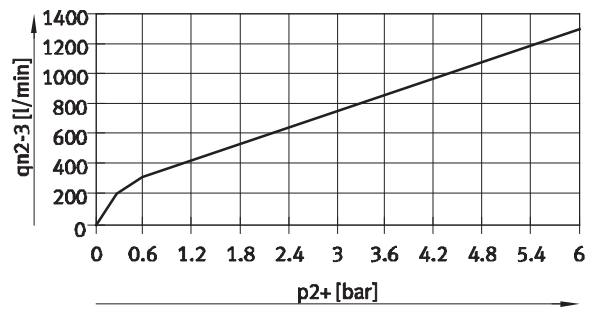

VPPM-8L-...-0L10H-...

(10 bar)




Proportional pressure regulators VPPM

Technical data


FESTO

Flow rate q_n from 1 → 2 as a function of output pressure p_2


VPPM-8F...-0L2H... (2 bar)

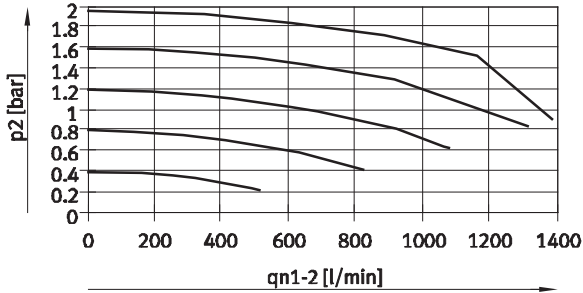

VPPM-8F...-0L6H... (6 bar)

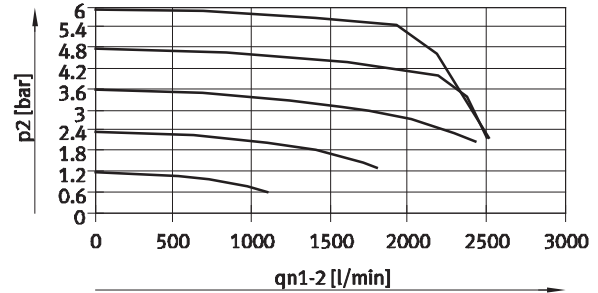


VPPM-8F...-0L10H... (10 bar)

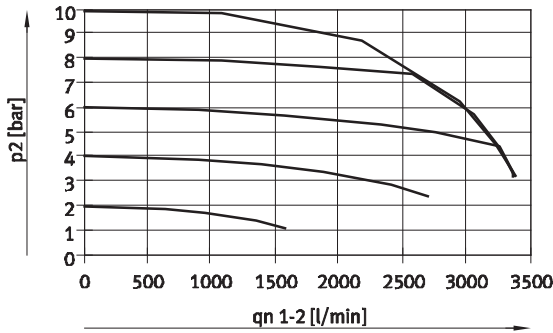


Flow rate q_n from 2 → 3 as a function of output pressure p_2

VPPM-8F...-0L2H... (2 bar)

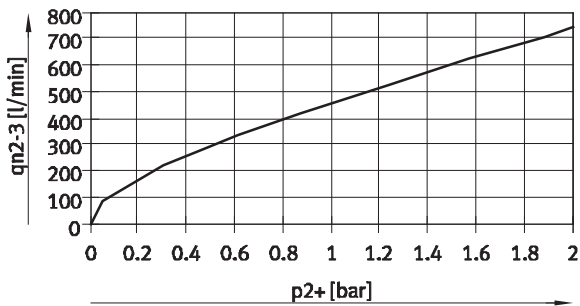

VPPM-8F...-0L6H... (6 bar)

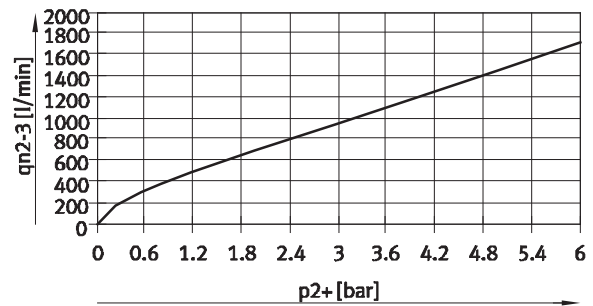

VPPM-8F...-0L10H... (10 bar)



Proportional pressure regulators VPPM


Technical data

Operating and environmental conditions				
Pressure regulation range	[bar]	0.02 ... 2	0.06 ... 6	0.1 ... 10
Operating medium		Compressed air, filtered, unlubricated, grade of filtration 40 µm Neutral gases		
Supply pressure 1	[bar]	2 ²⁾ ... 4	2 ²⁾ ... 8	2 ²⁾ ... 11
Max. hysteresis	[mbar]	10	30	50
FS (full scale) linearity error	[%]	± 0.5		
FS (full scale) repetition accuracy	[%]	0.5		
Temperature coefficient	[%/°C]	0.04/1		
Ambient temperature	[°C]	0 ... 60		
Temperature of medium	[°C]	10 ... 50		
Note on materials		RoHS-compliant		
Corrosion resistance	[CRC]	2 ¹⁾		

- 1) Corrosion resistance class 2 as per Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Supply pressure 1 should always be 1 bar greater than the maximum regulated output pressure.

Materials

Sectional view

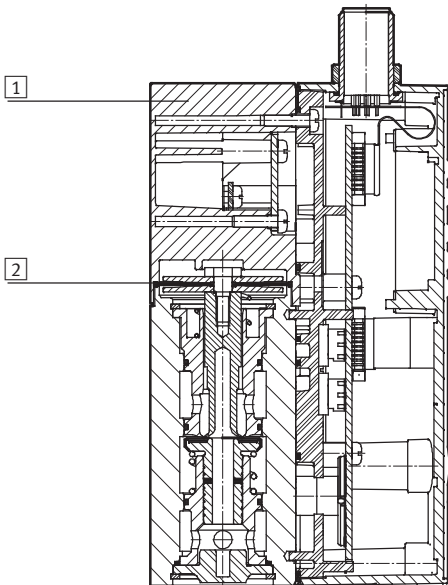

1	Housing	Wrought aluminium alloy
2	Diaphragm	Nitrile rubber

Proportional pressure regulators VPPM


Technical data

Dimensions

Download CAD data → www.festo.com

VPPM-6F

With LCD

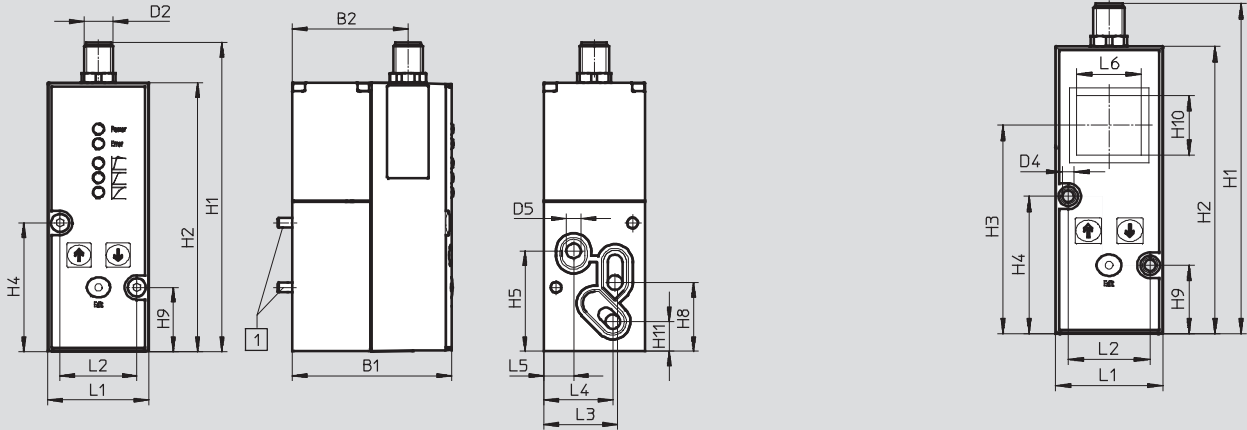


1 Socket head screw M4x65

Type	B1	B2	B3	D1	D2	D4	D5	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12
VPPM-6F	65.4	47.5	-	-	M12	4.4	6	126.9	110.4	80.1	52.8	41.3	-	-	28.3	26.3	23	12.2	-

Type	L1	L2	L3	L4	L5	L6
VPPM-6F	41.5	31.5	30.3	28.4	12.3	25

VPPM-6L

With LCD

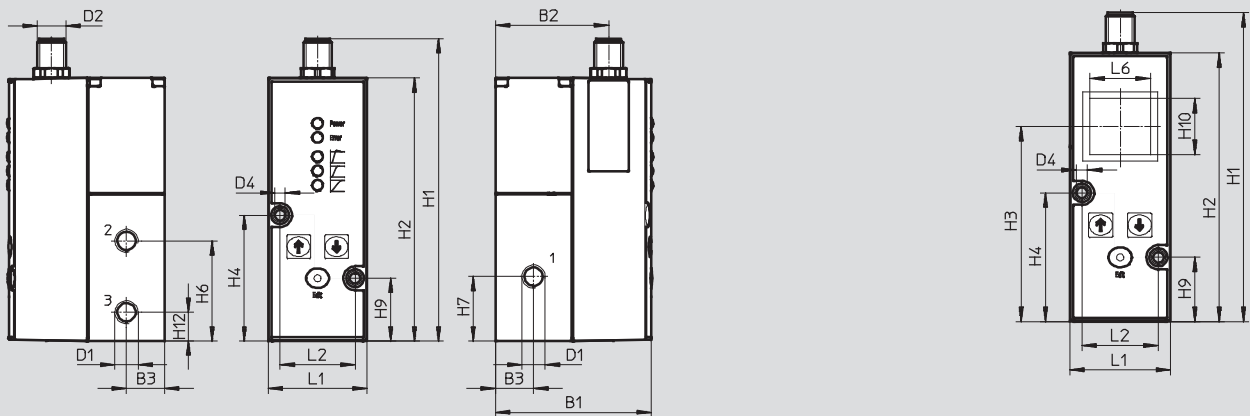


1 Socket head screw M4x65

Type	B1	B2	B3	D1	D2	D4	D5	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12
VPPM-6L	65.5	47.5	16	G1/8	M12	4.4	-	126.9	110.4	80.1	52.8	-	42	27	-	26.3	23	-	12

Type	L1	L2	L3	L4	L5	L6
VPPM-6L	41.5	31.5	-	-	-	25

M12 – Connection allocation



- 1 Digital input D1
- 2 DC +24 V supply voltage
- 3 Analogue input W-
- 4 Analogue input W+
- 5 Digital input D2
- 6 Analogue output X
- 7 DC 0 V or GND
- 8 Digital output D3

Proportional pressure regulators VPPM


Technical data

Dimensions

Download CAD data → www.festo.com

VPPM-8F

With LCD

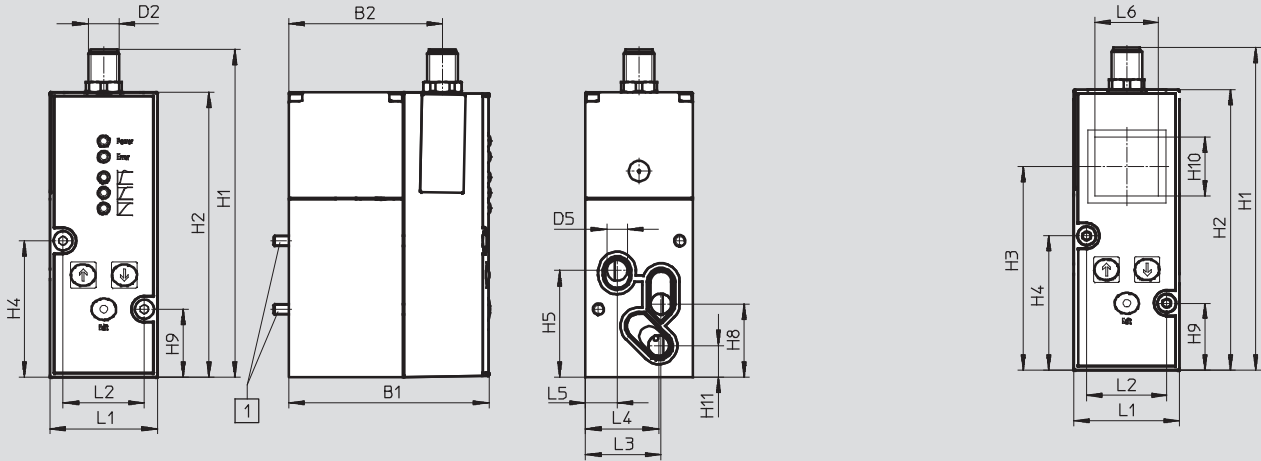


1 Socket head screw M4x77

Type	B1	B2	B3	D1 Ø	D2 Ø	D5 Ø	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13
VPPM-8F	77.4	59.5	-	-	M12	8	126.9	110.4	80	52.8	41.3	-	-	28.3	26.3	23	12.2	-	-

Type	L1	L2	L3	L4	L5	L6	L7
VPPM-8F	41.5	31.5	29.3	28.4	12.3	25	-

VPPM-8L

With LCD

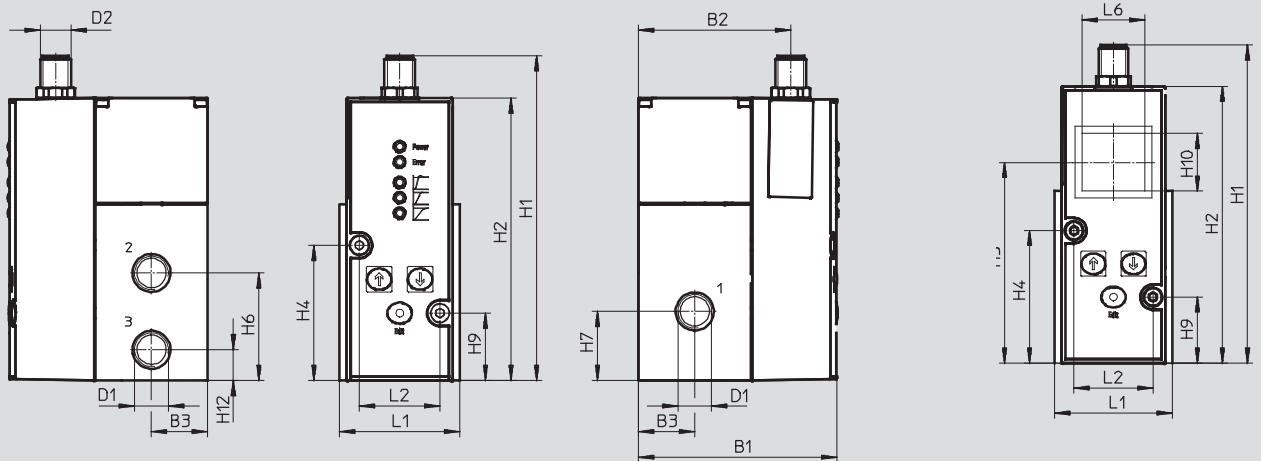

Type	B1	B2	B3	D1 Ø	D2 Ø	D5 Ø	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13
VPPM-8L	77.4	59.5	22	G1/4	M12	-	126.9	110.4	80	52.8	-	42	27	-	26.3	23	-	12	-

Type	L1	L2	L3	L4	L5	L6	L7
VPPM-8L	47	31.5	-	-	-	25	-

Proportional pressure regulators VPPM

Technical data

Ordering data				
Type	Pneumatic connection	Pressure regulation range [bar]	Part No.	Type
Current type 0 ... 10 V				
Overall accuracy 2%	G $\frac{1}{8}$	0.02 ... 2	542233	VPPM-6L-L-1-G18-0L2H-V1N
		0.06 ... 6	542234	VPPM-6L-L-1-G18-0L6H-V1N
			554043	VPPM-6L-L-1-G18-0L6H-V1P
			558337	VPPM-6L-L-1-G18-0L6H-V1P-C1
		0.1 ... 10	542235	VPPM-6L-L-1-G18-0L10H-V1N
			554044	VPPM-6L-L-1-G18-0L10H-V1P
	Sub-base	0.02 ... 2	542245	VPPM-6F-L-1-F-0L2H-V1N
		0.06 ... 6	542246	VPPM-6F-L-1-F-0L6H-V1N
			558339	VPPM-6F-L-1-F-0L6H-V1P-C1
			558347	VPPM-6F-L-1-F-0L6H-V1N-C1
		571285	VPPM-8F-L-1-F-0L6H-V1P	
	0.1 ... 10	542247	VPPM-6F-L-1-F-0L10H-V1N	
	G $\frac{1}{4}$	0.06 ... 6	571296	VPPM-8L-L-1-G14-0L6H-V1P
	Overall accuracy 1%	G $\frac{1}{8}$	0.02 ... 2	542227
0.06 ... 6			542228	VPPM-6L-L-1-G18-0L6H-V1N-S1
			554039	VPPM-6L-L-1-G18-0L6H-V1P-S1
			558335	VPPM-6L-L-1-G18-0L10H-V1P-S1-C1
0.1 ... 10			542229	VPPM-6L-L-1-G18-0L10H-V1N-S1
			554040	VPPM-6L-L-1-G18-0L10H-V1P-S1
Sub-base		0.02 ... 2	542239	VPPM-6F-L-1-F-0L2H-V1N-S1
		0.06 ... 6	542240	VPPM-6F-L-1-F-0L6H-V1N-S1
			571286	VPPM-8F-L-1-F-0L6H-V1P-S1
			571287	VPPM-8F-L-1-F-0L6H-V1P-S1C1
		0.1 ... 10	542241	VPPM-6F-L-1-F-0L10H-V1N-S1
G $\frac{1}{4}$		0.1 ... 10	571291	VPPM-8L-L-1-G14-0L10H-V1N-S1
			571292	VPPM-8L-L-1-G14-0L10H-V1P-S1
			571293	VPPM-8L-L-1-G14-0L10H-V1P-S1C1
		0.06 ... 6	571294	VPPM-8L-L-1-G14-0L6H-V1N-S1
			571295	VPPM-8L-L-1-G14-0L6H-V1N-S1C1
			571297	VPPM-8L-L-1-G14-0L6H-V1P-S1
			571298	VPPM-8L-L-1-G14-0L6H-V1P-S1C1

Proportional pressure regulators VPPM

Ordering data – Modular products

M Mandatory data →

Module No.	Design	Nominal diameter	Valve type	Dynamic response	Valve mode	Type of connection
543432 543433	VPPM	6 8	L F T	L	1	G18 G14 F
Order example						
543432	VPPM	- 6	F	- L	- 1	- F

Ordering table

Size	6	Condi- tions	Code	Enter code
M Module No.	543432			
Design	Modular pressure regulator		VPPM	VPPM
Nominal diameter	6		-6	
	8		-8	
Valve type	In-line	1	L	
	Flanged valve	2	F	
	Flanged valve for valve terminal	3	T	
Dynamic response	Low dynamic response (pilot-actuated, soft-sealing)		-L	-L
Valve mode	3/2-way valve, normally closed		-1	-1
Type of connection	G $\frac{1}{8}$ thread		-G18	
	G $\frac{1}{4}$ thread		-G14	
	Flange/sub-base		-F	

- 1 L Only with connection type G18 (G $\frac{1}{8}$ thread)
- 2 F Only with connection type F (flange/sub-base)

- 3 T Only with connection type F (flange/sub-base)

Order code

543432 VPPM - 6 - L - 1 -

Proportional pressure regulators VPPM

Ordering data – Modular products

M Mandatory data					O Options	
Pressure regulation range	Alternative lower pressure regulation range	Alternative upper pressure regulation range	Setpoint specification	Switching output	Overall accuracy	Operator unit
0L2H 0L6H 0L10H	0.1 ... 10L	0.1 ... 10H	V1 A4	P N	S1	C1
	6.5L	7.1H	A4	P	S1	C1

Ordering table					
Size	6	Condi- tions	Code		Enter code
M	Pressure regulation range	0 ... 2 bar		-0L2H	
		0 ... 6 bar		-0L6H	
		0 ... 10 bar		-0L10H	
	Alternative lower pressure regulation range	0.1 ... 10 bar	4	-...L	
		0.1 ... 10 bar	5	...H	
	Setpoint specification	Voltage (standard 0 ... 10 V)		-V1	
		Current (standard 4 ... 20 mA)		-A4	
Switching output	Positive switching		P		
	Negative switching		N		
O	Overall accuracy	1%		-S1	
	Operator unit	With LCD, pressure unit variable		C1	

4 ...L Not with pressure regulation range (0L2H, 0L6H, 0L10H).
Must always be less than alternative upper pressure regulation range H

5 ...H Not with pressure regulation range (0L2H, 0L6H, 0L10H).
Must always be greater than alternative lower pressure regulation range L

Transfer order code


- - -

Proportional pressure regulators VPPM

Accessories


Sub-base VABM-P1

Material:
Wrought aluminium alloy

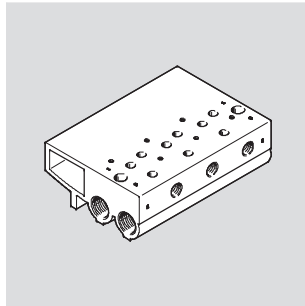

Dimensions

Download CAD data → www.festo.com

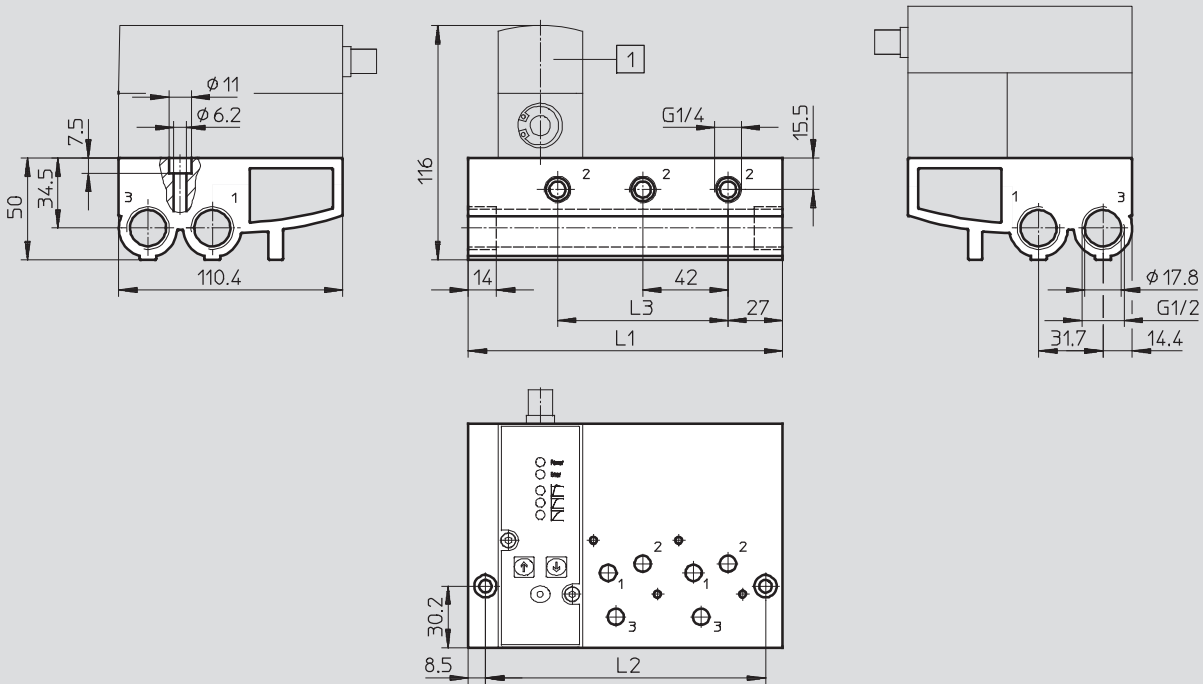

1 Proportional pressure regulator VPPM

Dimensions and ordering data

Valve positions	L1	L2	L3	Weight [g]	CRC ¹⁾	Part No.	Type
2	113	96	42	900	2	542252	VABM-P1-SF-G18-2-P3
3	155	138	84	1,230	2	542253	VABM-P1-SF-G18-3-P3
4	197	180	126	1,565	2	542254	VABM-P1-SF-G18-4-P3


1) Corrosion resistance class 2 as per Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Proportional pressure regulators VPPM

Accessories


Blanking plate VABB-P1

Material:
Wrought aluminium alloy, NBR, steel

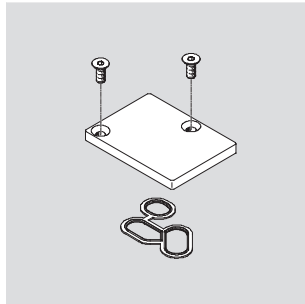

Dimensions

Download CAD data → www.festo.com

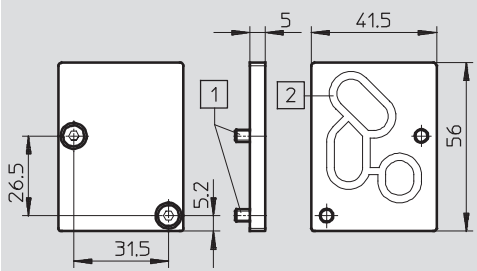

1 Countersunk screw M4x10

2 Seal VMPA- ...

Ordering data

Weight [g]	CRC	Part No.	Type
35	1 ¹⁾	558350	VABB-P1


1) Corrosion resistance class 1 as per Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Proportional pressure regulators VPPM

Accessories


Mounting bracket VAME-P1-A

Material:
Wrought aluminium alloy, steel

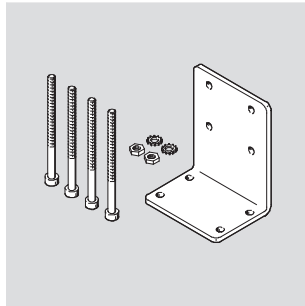

Dimensions

Download CAD data → www.festo.com

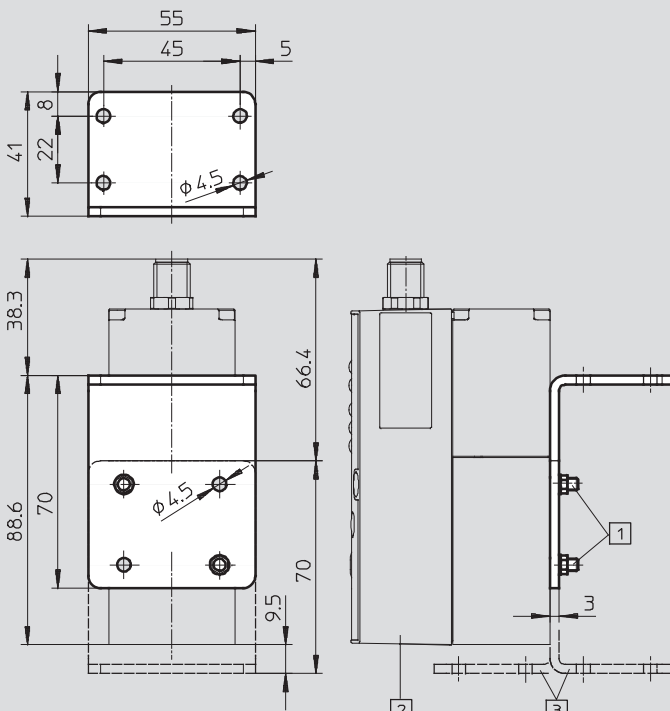

- 1 Socket head screw M4
- 2 Proportional pressure regulator VPPM
- 3 Mounting bracket can be reversed if required

Ordering data

Weight [g]	CRC	Part No.	Type
71	1 ¹⁾	542251	VAME-P1-A


1) Corrosion resistance class 1 as per Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Proportional pressure regulators VPPM

Accessories


H-rail mounting VAME-P1-T

Material:
Wrought aluminium alloy, steel

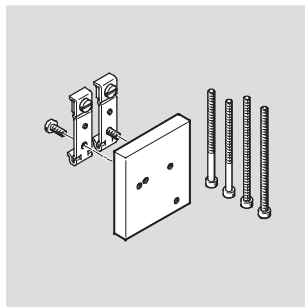

Dimensions

Download CAD data → www.festo.com

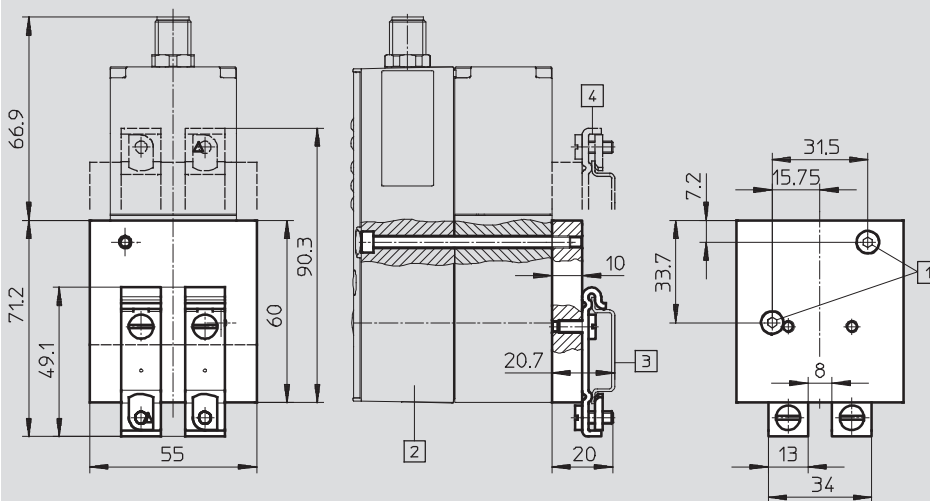

- 1) Socket head screw M4
- 2) Proportional pressure regulator VPPM
- 3) H-rail NRH
- 4) H-rail mounting can be rotated by 180° if required

Ordering data

Weight [g]	CRC	Part No.	Type
150	1 ¹⁾	542255	VAME-P1-T


1) Corrosion resistance class 1 as per Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Proportional pressure regulators VPPM

Accessories


Plug socket with cable NEBV-M12G8-KD-3-M12G4

For connecting the VPPM with the analogue input and output modules of the controller CPX.

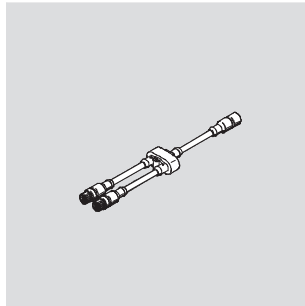

Dimensions and pin allocation

Download CAD data → www.festo.com

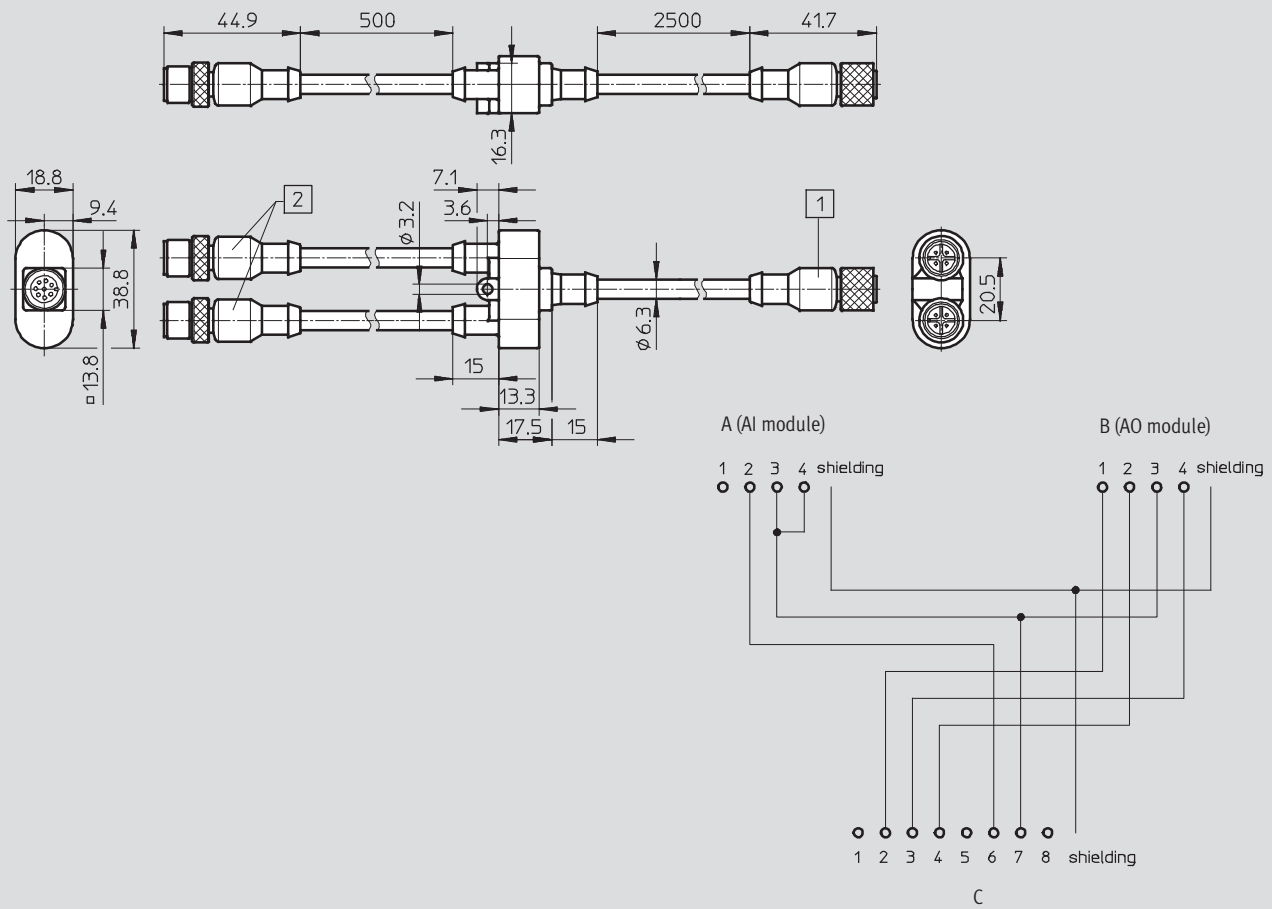


Proportional pressure regulators VPPM

Accessories

Plug socket with cable
NEBV-M12G8-K-2-M12G4
NEBV-M12G8-K-5-M12G4

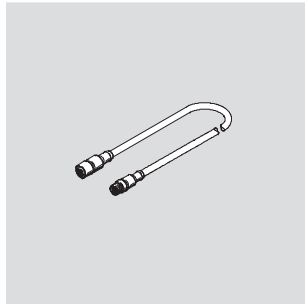




For connecting the VPPM with the analogue output modules of the controller CPX.



Dimensions and pin allocation Download CAD data → www.festo.com

The drawing shows a side view of the plug socket with cable. The left section has a length of 44.9 mm and is labeled '2'. The right section has a length of 41.7 mm and is labeled '1'. The total length is 'L'. The pin allocation diagram shows an 8-pin connector 'A' (AO module) with pins 1, 2, 3, 4, and a shielding pin. Connector 'B' has pins 1 through 8 and a shielding pin. Wires connect the pins between the two connectors.

Type	2	1	L1
NEBV-M12G8-K-2-M12G4	Straight socket, M12, 8-pin to VPPM	Straight plug, M12, 4-pin to CPX module	2 m
NEBV-M12G8-K-5-M12G4			5 m

Ordering data				
	Description	Cable length [m]	Part No.	Type
Plug socket with cable		Technical data → Internet: plug socket with cable		
	Straight socket, 8-pin, M12	2	525616	SIM-M12-8GD-2-PU
		5	525618	SIM-M12-8GD-5-PU
		10	570008	SIM-M12-8GD-10-PU
	Angled socket, 8-pin, M12	2	542256	NEBU-M12W8-2-N-LE8
		5	542257	NEBU-M12W8-5-N-LE8
		10	570007	NEBU-M12W8-10-N-LE8
	One straight socket, 8-pin, and one straight plug, 4-pin	2	553575	NEBV-M12G8-K-2-M12G4
		5	553576	NEBV-M12G8-K-5-M12G4
	One straight socket, 8-pin, and two straight plugs, 4-pin	–	547888	NEBV-M12G8-KD-3-M12G4
Setpoint module		Technical data → Internet: mpz		
	Generation of 6+1 analogue setpoint values	–	546224	MPZ-1-24DC-SGH-6-SW5