

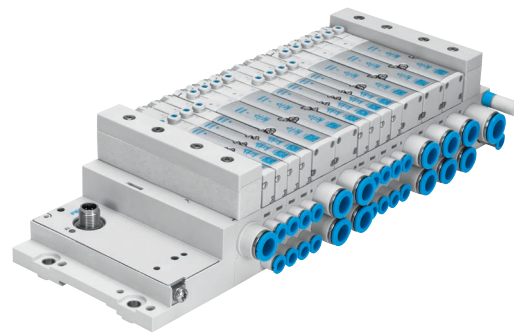
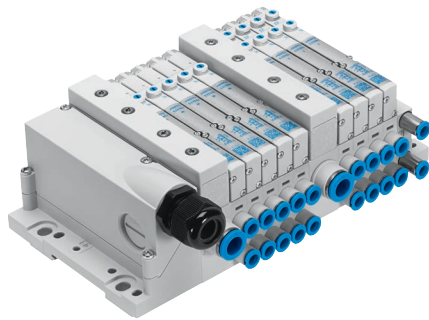


# Valve terminals MPA-L

**FESTO**



## Key features

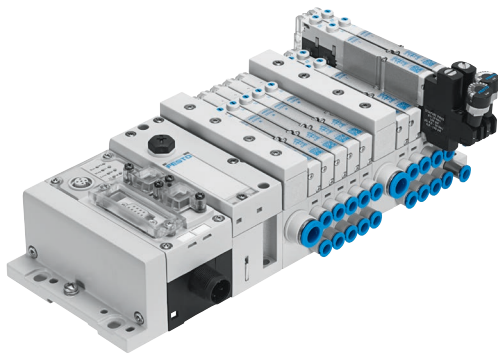

### Innovative

- Flat, high-performance valves in a sturdy metal housing
- Flow rate up to 870 l/min
- Wide range of electrical connection options for multi-pin plug: Sub-D, ribbon cable or spring-loaded terminal
- Connection to the electrical peripherals CPX with a wide range of communication options
- Connection to the remote I/O system CPX AP I
- I-Port/IO-Link® interface
- Freely configurable push-in connectors

### Versatile

- Modular system offering a range of configuration options
- System can be extended as required with individual sub-bases and modular tie rods
- Up to 32 solenoid coils
- Can be converted and extended at a later date
- Air supply can be extended via additional pressure zones using supply modules
- Wide range of pressures
- -0.09 ... +1 MPa
- Wide range of valve functions


### Reliable

- High output reserves thanks to large pneumatic cross-sections and exhausting with high flow rates
- Resilient thanks to high mechanical rigidity
- Lightweight and low-cost polymer components
- Fast troubleshooting with LEDs on the valves
- Easy to service thanks to replaceable valves and electronic modules
- Manual override either non-detenting, detenting or protected against unauthorised activation (concealed)
- Durable thanks to tried-and-tested piston spool valves

### Easy to install

- Fast and reliable in-house assembly using individual components or delivered as a ready-to-install and tested unit
- Reduced selection, ordering, installation and commissioning costs
- Solid wall mounting or DIN rail mounting

## Key features

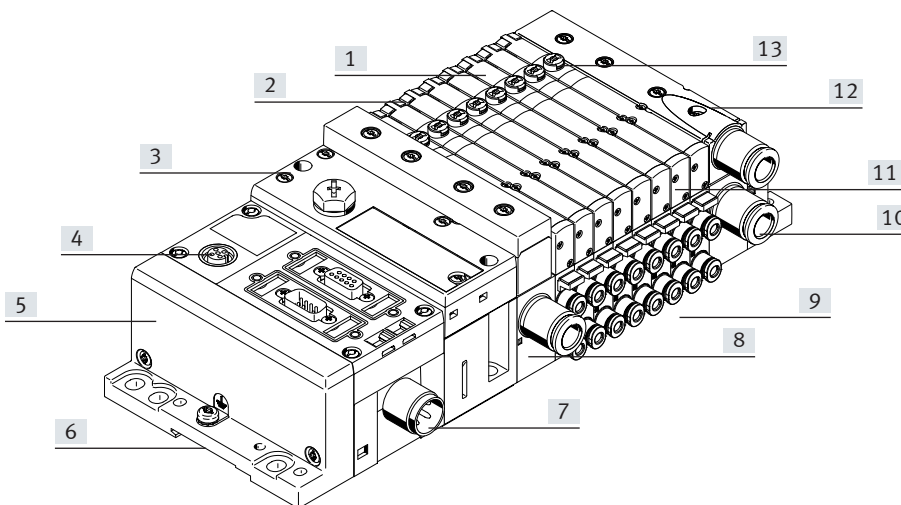

- |  |  |  |   |
|--|--|--|---|
| [1] Width 10 mm, 14 mm and 20 mm   | – CPX-AP-I<br>– I-Port interface/IO-Link®  | [8] Safe operation:<br>Manual override, non-detenting/detenting or concealed                         | [11] Space-saving:<br>Flat valves and flat plate silencer   |
| [2] Reduced downtime: LED signal status indicator  | [6] Quick to mount:<br>Directly using screws or on a DIN rail                                    | [9] Adaptable:<br>Selector in the end plate for defining the pilot air supply (internal or external) | [12] Variable:<br>32 valve positions/32 solenoid coils  |
| [3] Pneumatic interface to CPX   | [7] Reliable:<br>Operating voltage connection, outputs and valves can be disconnected separately | [10] Practical:<br>Pre-assembled cartridges  | [13] Modular:<br>Pressure zone creation, additional exhaust and supply ports possible using supply module |
| [4] CPX diagnostic interface   |  |  |   |
| [5] Straightforward electrical connection<br>– Multi-pin plug connection, fieldbus interface<br>– Control block, CPX |  |  |   |

### Equipment options

#### Valve functions

- |  |  |   |  |
|--|--|---|--|
| <ul style="list-style-type: none"> <li>• 5/2-way valve, single solenoid</li> <li>• 5/2-way valve, double solenoid</li> <li>• 2x 3/2-way valve, normally open</li> <li>• 2x 3/2-way valve, normally closed</li> <li>• 2x 3/2-way valve, 1x normally open, 1x normally closed</li> </ul> | <ul style="list-style-type: none"> <li>• 5/3-way valve, mid-position pressurised</li> <li>• 5/3-way valve, mid-position closed</li> <li>• 5/3-way valve, mid-position exhausted</li> <li>• 2x 2/2-way valve, 1x normally closed, 1x normally closed, reversible</li> </ul> | <ul style="list-style-type: none"> <li>• 2x 2/2-way valve, normally closed</li> <li>• 1x 3/2-way valve, normally closed, external compressed air supply</li> <li>• 1x 3/2-way valve, normally open, external compressed air supply</li> <li>• Manual pressure regulators</li> </ul> | <p>All valves have the same compact dimensions with an overall length of 107 mm and a height of 55 mm.</p> |
|--|--|---|--|

#### Special features

- |   |   |  |  |
|---|---|--|--|
| <ul style="list-style-type: none"> <li>• Max. 32 valve positions/max. 32 solenoid coils</li> <li>• Parallel, modular valve links</li> </ul> | <ul style="list-style-type: none"> <li>• Electrical interlinking module with integrated holding current reduction</li> <li>• Any compressed air supply (max. 8 power supply modules)</li> </ul> | <ul style="list-style-type: none"> <li>• Creating pressure zones</li> <li>• Modular, individually extendable tie rods</li> <li>• Single valves or combinations of four valves</li> </ul> | <ul style="list-style-type: none"> <li>• Freely selectable tubing size at each port</li> </ul> |
|---|---|--|--|

## Key features

### Valve terminal selection

#### Valve terminal configurator

The appropriate valve terminal MPA-L can be chosen quickly and easily using the online catalogue. This includes a convenient valve terminal configurator, making it much easier to order the right product.

The valve terminals are assembled according to your order specification and are individually checked. This reduces assembly and installation time to a minimum.

You can order a valve terminal MPA-L using the order code.

Ordering system for MPA-L

→ Internet: mpal

Ordering system for CPX

→ Internet: cpx

Ordering system for CPX-AP-I

→ Internet: cpx-ap-i

Ordering system for CTEU


→ Internet: cteu

Online at: → [www.festo.com](http://www.festo.com)

2D/3D CAD data

You can request the CAD data for a valve terminal you have configured. To do so, start the product search as described above. Go to the shopping basket and click on the CAD/EPLAN symbol. On the next page, you can generate a 3D preview or request a data format of your choice via email.

### Individual connection




Valves on individual sub-bases can also be used for actuators further away from the valve terminal. The valves are screwed to an individual sub-base made from die-cast aluminium.

The electrical connection is established using a standard 4-pin M8 plug (EN 60947-5-2).

More information  
→ Internet: vmpa1

### Individual sub-base assembly

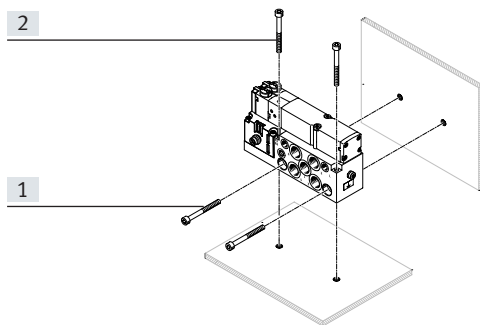


[1] Horizontal mounting holes

[2] Vertical mounting holes

The individual sub-base for wall mounting is designed for integration into a system or machine. It can be mounted horizontally or vertically.

### Multi-pin plug connection



The signals are transmitted from the controller to the valve terminal via a pre-assembled or self-assembled multi-core cable to the multi-pin plug connection. This substantially reduces installation time.


The valve terminal can be equipped with max. 32 solenoid coils. This corresponds to 2 to 32 valves.

Variants

- Sub-D connection
  - Pre-assembled multi-pin cable
  - Multi-pin cable for self-assembly
- Ribbon cable connection
- Terminal strip connection

## Key features

### Fieldbus connection via the CPX system



An integrated bus node manages communication with a higher-order PLC. This enables space-saving pneumatic and electronic solutions to be implemented. Valve terminals with fieldbus interfaces can be configured with up to 32 sub-bases.

The CPX terminal also enables the integration of digital and analogue electrical inputs and outputs, pressure sensors and controllers for pneumatic or electric positioning axes.


A detailed description of the extensive functionality can be found in the documentation for the CPX terminal

→ Internet: [cpx](#)

Fieldbus protocols/CPX variants:

- PROFIBUS DP
- PROFINET
- DeviceNet®
- CANopen
- CC-LINK®
- EtherNet/IP
- Front end controller
- Remote I/O
- Modbus/TCP
- EtherCAT®
- POWERLINK
- Sercos III

### Control block connection via the CPX system




With controllers that are integrated in the Festo valve terminals, stand-alone control units to IP65 without control cabinets can be set up.

In the slave operating mode, these valve terminals can be used for intelligent preprocessing and are therefore ideal modules for designing decentralised intelligence.

In the master operating mode, terminal groups can be designed with many options and functions that can autonomously control a medium-sized machine/system.

### Fieldbus interface from the remote I/O system CPX-AP-I



CPX-AP-I is a flexible, decentralised, compact and lightweight remote I/O system with a high degree of protection IP65/IP67. A remote I/O system CPX-AP-I consists of a bus interface and at least one other module. System communication between the modules takes place via connecting cables.


The process data is exchanged cyclically. The following module types are available:

- Bus interface
- Input modules
- Input/output modules
- Interface for valve terminal

Fieldbus protocols:

- PROFINET
- PROFIBUS
- EtherNet/IP
- EtherCAT®

### Fieldbus interface via the CTEU system



A bus node directly mounted on the I-Port interface manages communication with a higher-order PLC.

Valve terminals with I-Port interface can be configured with up to 32 sub-bases.


A detailed description of the extensive functionality can be found in the documentation for the CTEU fieldbus modules/CTEL installation system

→ Internet: [cteu](#)

Fieldbus protocols:

- PROFIBUS DP
- DeviceNet®
- CANopen
- CC-LINK®
- EtherCAT®

### I-Port interface/IO-Link®



I-Port/IO-Link® consists of a central master and the I-Port interface/IO-Link devices connected via special connecting cables. This permits a decentralised layout of the devices.

The connection type corresponds to a star topology.

In other words, only one module or valve terminal can be connected to each I-Port.

The I-Port interface from Festo is based on IO-Link® and is therefore compatible with IO-Link® in certain areas.

As well as transmitting the communication data, the I-Port interfaces also handle the power supply for the connected devices. The maximum length of a string is 20 m.

## Peripherals overview


### Modular pneumatic components

The modular design of the MPA-L facilitates maximum flexibility right from the planning stage and offers maximum ease of servicing during operation. The system consists of sub-bases and valves.

The sub-bases form the support system for the valves. They contain the ducts for the supplying compressed air to and exhausting from the valve terminal as well as the working ports for the pneumatic drives for each valve.

The sub-bases are connected by a tie rod system. This consists of a threaded rod, threaded sleeve and screw. The threaded rod/sleeve combination is selected according to the chosen number of individual sub-bases.


A valve terminal can be easily extended by adding individual sub-bases or supply modules. This is done by inserting suitable tie rod extenders between the threaded rod and the sleeve. This ensures that the valve terminal can be rapidly and reliably extended.

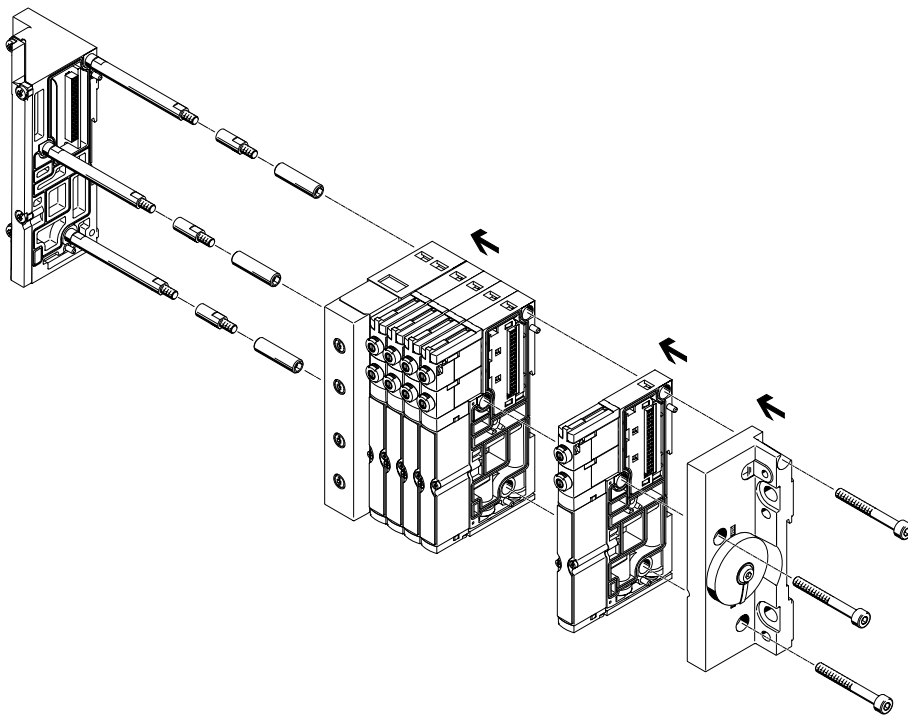

#### Note

The tie rod system for the valve terminal MPA-L consists of at least four sub-bases or two sub-bases and one supply module. Shorter valve terminals with at least 2 valve positions can be configured without a sleeve.

### Modular electrical peripherals

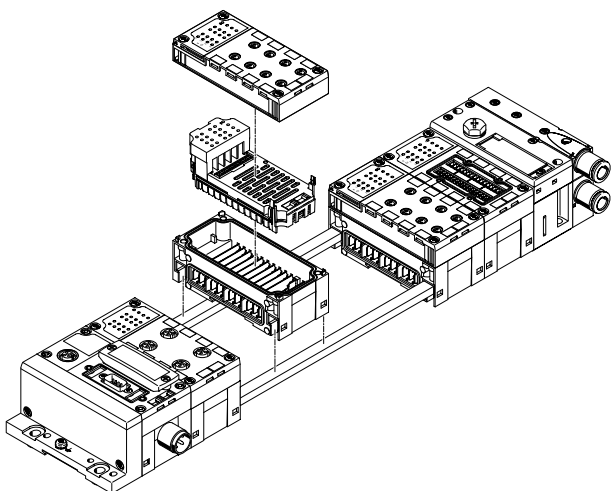

The CPX modules are mechanically connected to each other using tie rods. The entire unit can be assembled using two screws in the end plates.

The tie rod ensures that the unit has a high mechanical load bearing capacity and is therefore the mechanical backbone of the CPX terminal.

The open design allows interlinking blocks to be replaced in assembled state.

The tie rod extension kit allows an extra module to be added to the CPX terminal.

The input/output modules, manifold blocks, bus node or control block of the CPX system are fastened to the interlinking blocks using 4 screws and can be exchanged or modified in nearly any way.

## Peripherals overview


### Individual sub-base

Ordering:

- Using individual part numbers

Individual sub-bases can be equipped with any valve (VMPA... of the corresponding width).

The electrical connection is established using a standard 4-pin M8 plug (EN 60947-5-2).

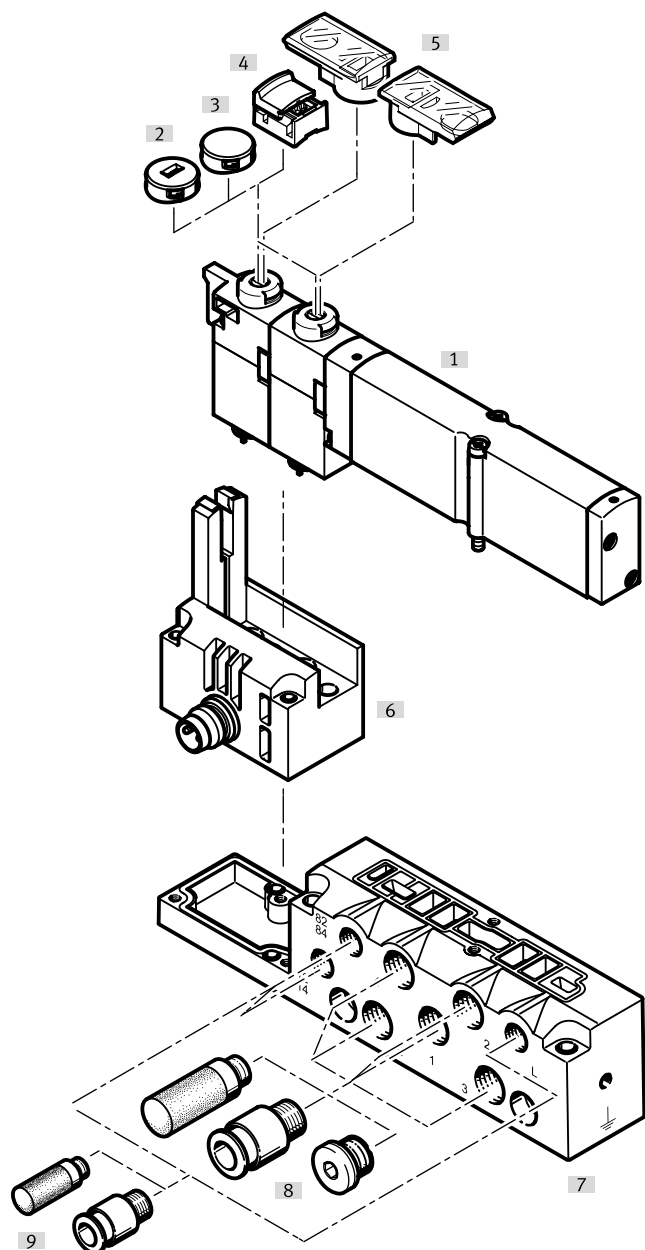

Designation	Brief description	→ Page/Internet
[1] Solenoid valve	Width 10 mm, 14 mm, 20 mm	VMPA1
[2] Cover cap	Once the cover cap has been fitted, MO is non-detenting only	VMPA1
[3] Cover cap	Once the cover cap has been fitted, MO is blocked	VMPA1
[4] Cover cap	After fitting the cover cap, MO is detenting and can be operated without accessories	VMPA1
[5] Inscription label holder	Can be pushed onto the manual override	VMPA1
[6] Electrical connection M8	4-pin	VMPA1
[7] Sub-base	For individual valve VMPA...	VMPA1
[8] Fittings, silencers or blanking plugs	For working ports (2, 4) and working air/exhaust ports (1, 3, 5)	VMPA1
[9] Fittings and/or silencers	For pilot air supply/pilot exhaust air (12/14, 82/84) and pressure compensation	VMPA1

## Peripherals overview

### Pneumatic components of the valve terminal


The sub-bases are available individually with one valve position or with four valve positions.

The electrical interlinking modules are for:

- 1 or 4 single solenoid valves
- 1 or 4 double solenoid valves release.

- Double solenoid valve positions can be equipped with any valve or a cover plate.

- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

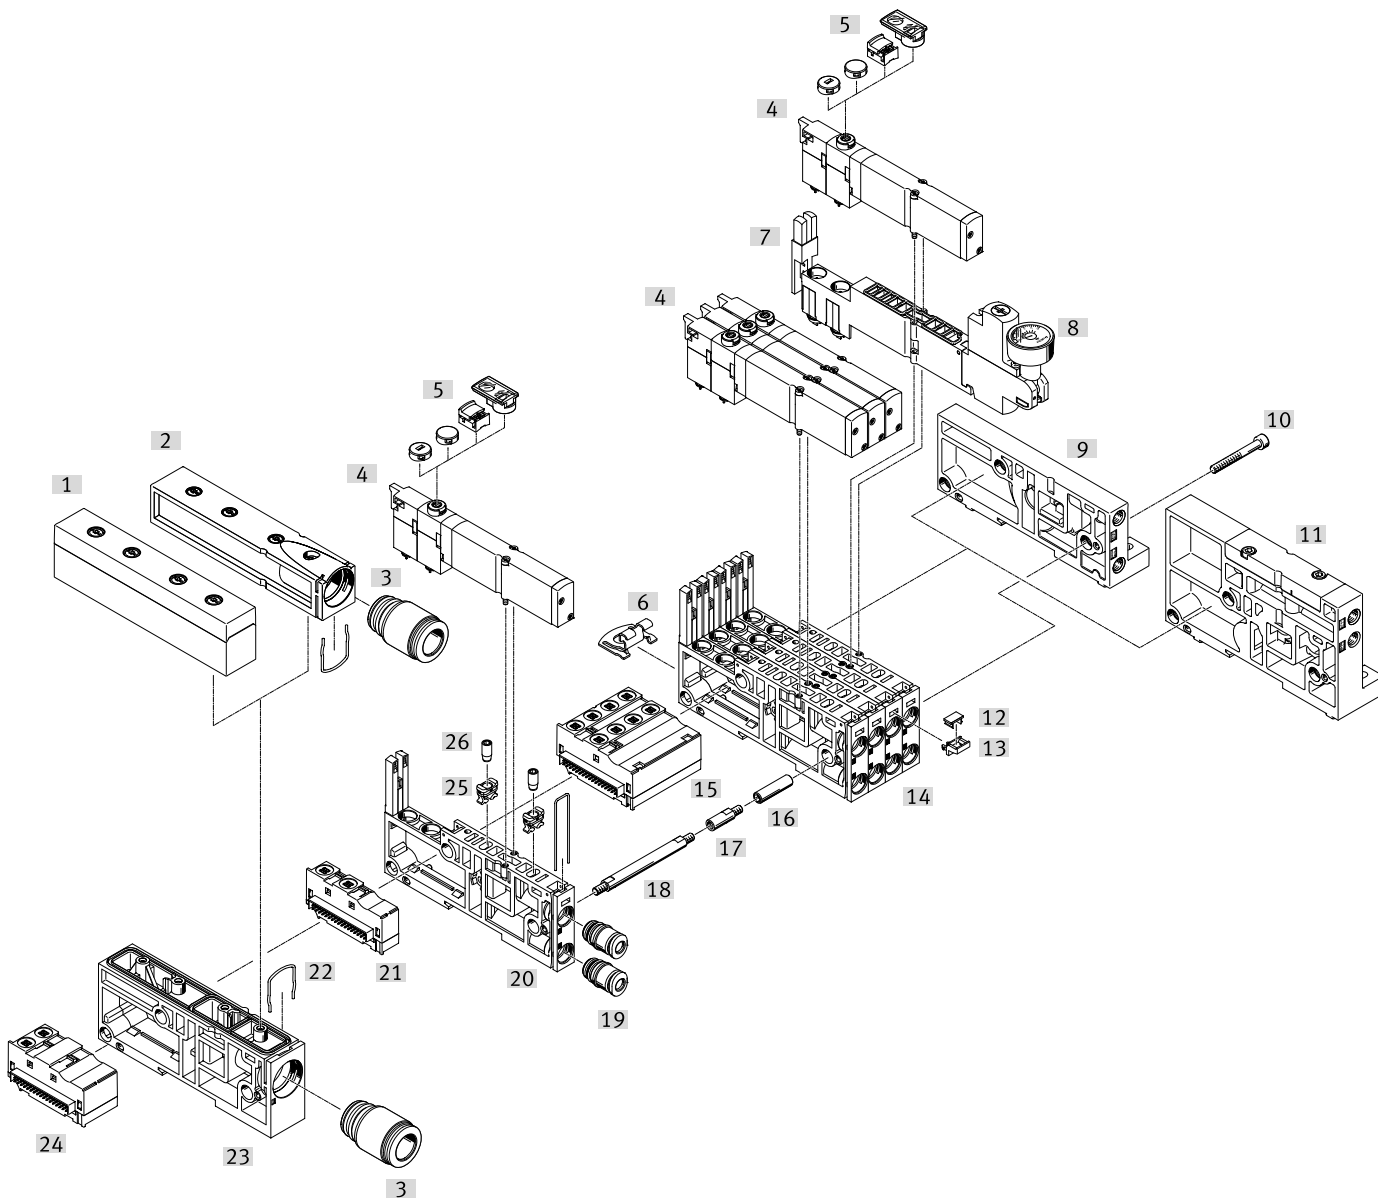



## Peripherals overview

Pneumatic components of the valve terminal			
Designation	Brief description	→ Page/Internet	
[1]	Plate	Exhaust plate as flat plate silencer	65
[2]	Plate	Exhaust plate for ducted exhaust air	65
[3]	Cartridge	For air supply and exhaust ports	68
[4]	Solenoid valve	Single solenoid	53
[5]	Cover cap for manual override	Conversion from detenting/non-detenting to non-detenting or detenting or concealed or inscription label holder	64
[6]	Mounting	Mounting bracket for wall mounting	64
[7]	Regulator plate	Vertical stacking (pressure regulator, vertical pressure shut-off plate, vertical pressure supply plate)	54, 61
[8]	Pressure gauge	Can be optionally mounted on a pressure regulator plate	54
[9]	Right end plate, low	End plate with pilot air selector, with connections 12/14, 82/84	66
[10]	Screw	Tie rod system, connects the sub-bases	63
[11]	Right end plate, tall	End plate with pilot air selector, with connections 1, 3, 5, 12/14, 82/84	66
[12]	Inscription labels	6 x 10 mm	64
[13]	Holder for inscription label	–	64
[14]	Connecting plate	Four individual sub-bases screwed together to form one unit	56
[15]	Electrical interlinking module, 4-way	Electrical interlinking module for combining four sub-bases, single solenoid/double solenoid	56
[16]	Sleeve	Tie rod system, connects the sub-bases	63
[17]	Tie rod extender	For extending the valve terminal at a later date	63
[18]	Tie rods	Threaded rod, secures the sub-bases between the end plates	63
[19]	Cartridge	For working ports	68
[20]	Sub-base, individual	Sub-base with one valve position	56
[21]	Electrical interlinking module	Electrical interlinking module for one sub-base, single/double solenoid	56
[22]	Clamping clip for cartridge	–	–
[23]	Supply module	For compressed air supply/exhaust air	65
[24]	Electrical interlinking module	Electrical interlinking module for power supply module, signals are passed through	56
[25]	Retainer for restrictor	Required to install the fixed flow restrictor	55
[26]	Flow restrictor	Fixed flow restrictor for installation in duct 3 or 5 of the sub-base	55

## Peripherals overview

### Valve terminal with multi-pin plug connection:

Order code:

- 34P-...

Valve terminals MPA-L with multi-pin plug connection can be expanded by up to 32 solenoid coils/valve positions.

The multi-pin plug connection is removable and designed as a 9, 25 or 44-pin Sub-D connection.


The multi-pin plug connection can alternatively be ordered as a terminal strip (33-pin) or ribbon cable connection (40-pin).

The Sub-D multi-pin plug connection, 25 and 44-pin, is available with degree of protection IP40 and IP67 or with

Multi-pin cover, without connecting cable with cable outlet either at the side or front.

Sub-D multi-pin plug connection, 25 and 44-pin, with multi-pin cover cap with pre-assembled cable:

- 2.5 m
- 5 m
- 10 m
- Variable, up to 30 m

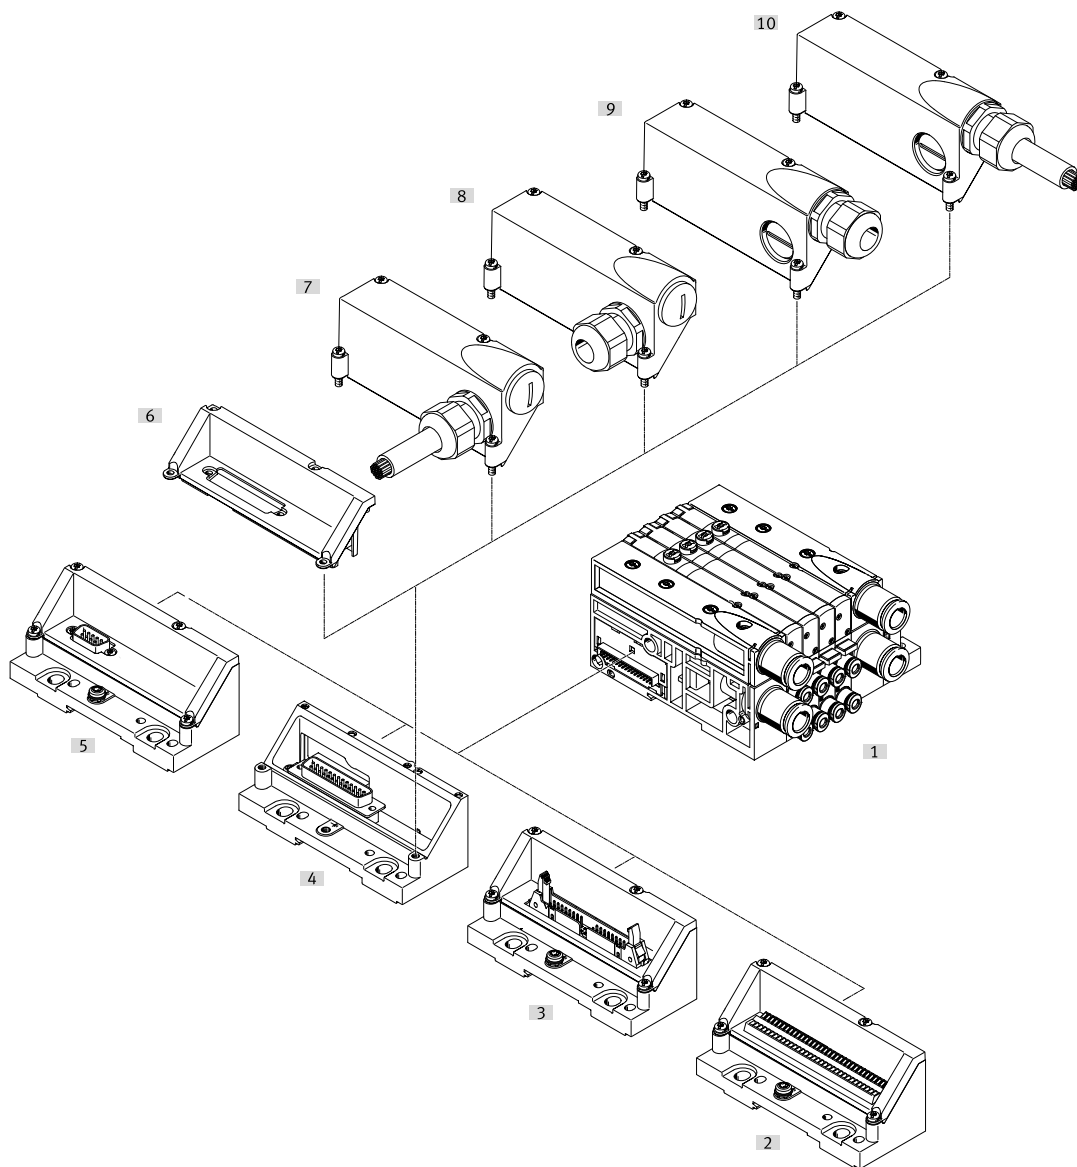

Designation	Brief description	→ Page/Internet
[1] Valve terminal	Pneumatic part of the valve terminal	8
[2] Multi-pin plug connection	Terminal strip, 33-pin, IP40	66
[3] Multi-pin plug connection	For ribbon cable, 40-pin, IP40	66
[4] Multi-pin plug connection	Sub-D, 25-pin	66
[5] Multi-pin plug connection	Sub-D, 9-pin, IP40	66
[6] Multi-pin plug connection	Cover for use without hood	–
[7] Connecting cable	With hood, pre-assembled, connection on the side, IP67	67
[8] Hood	For self-assembly, connection on side, IP67	67
[9] Hood	For self-assembly, connection on front, IP67	67
[10] Connecting cable	With hood, pre-assembled, connection at the front, IP67	67

## Peripherals overview

### Valve terminal with fieldbus interface, control block (electrical peripherals CPX)

Order code:

- 34P-... for the pneumatic components
- 50E-... for the electrical peripherals
- peripherals


Valve terminals with CPX interface can be expanded by up to 32 solenoid coils/valve positions.

Up to 32 valve positions can be equipped in combination with single solenoid valves; the maximum number of valve positions is reduced to 16 if only double solenoid valves are used. The maximum number of addresses is set in the range 4 ... 32 solenoid coils via a selector switch.

This enables extensions to be pre-assigned in a control program and called up using manual settings. Each valve position can be equipped with any valve or a cover plate. The rules for CPX apply to the equipment that can be used with the electrical peripherals CPX.

In general:

- Digital inputs/outputs
- Analogue inputs/outputs
- Parameterisation of inputs and outputs
- Integrated, convenient diagnostics
- Preventive maintenance concepts

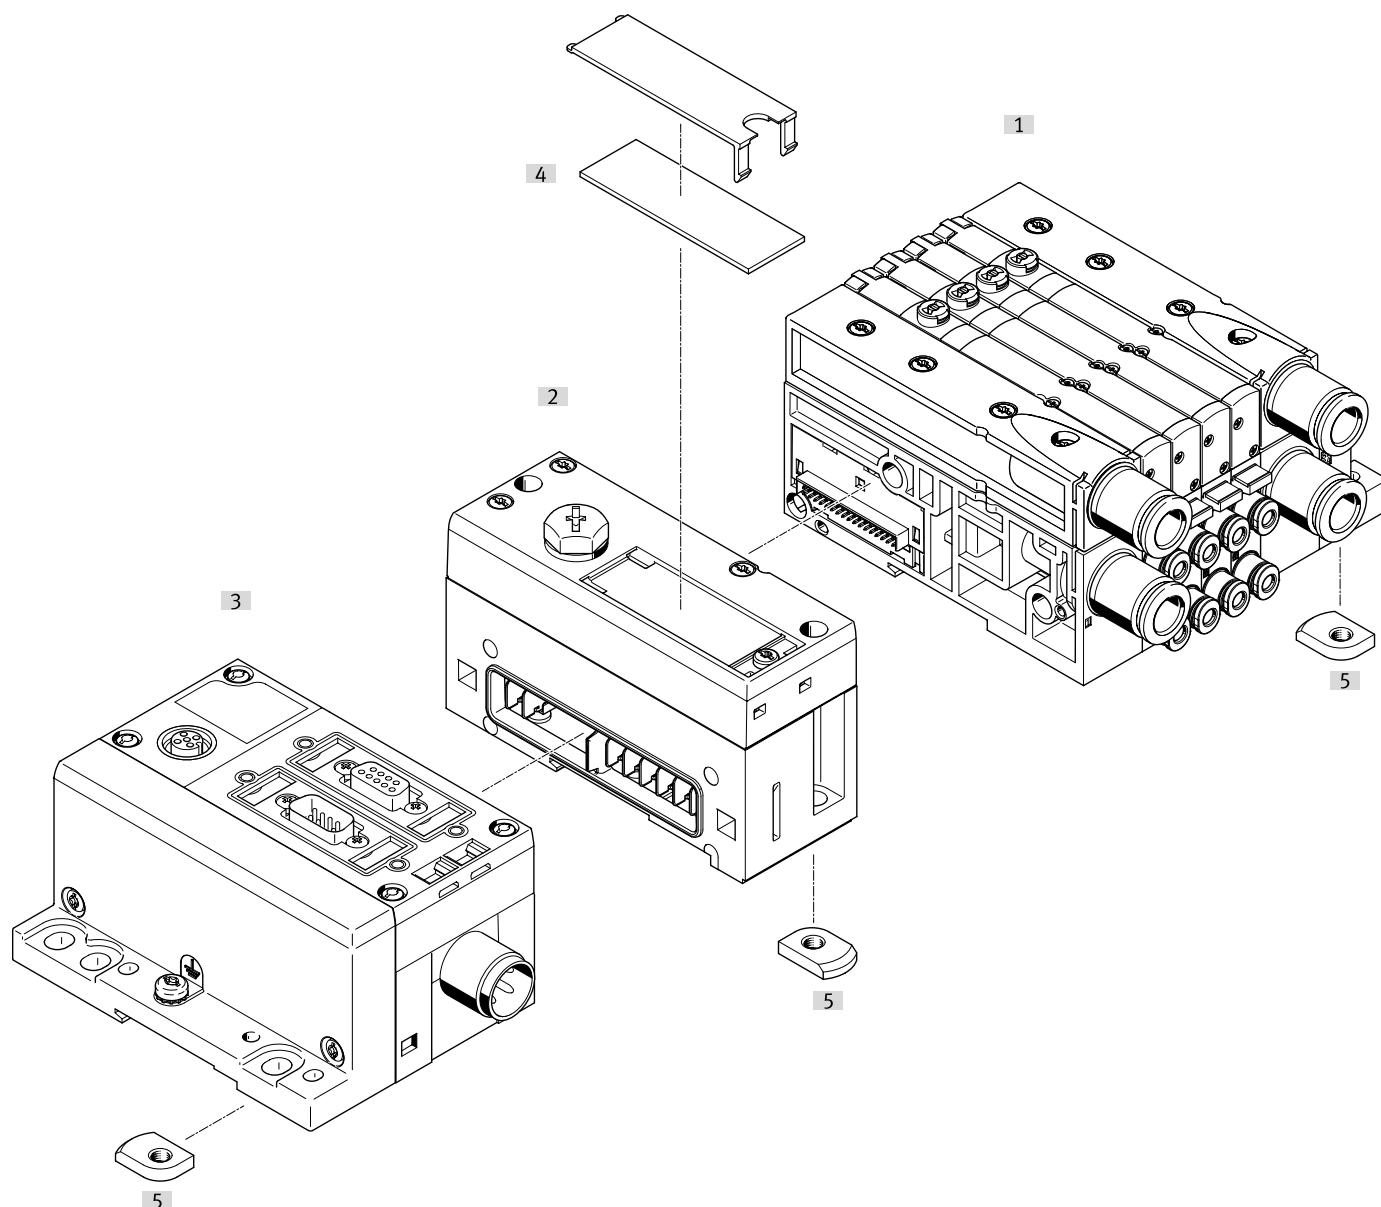

Designation	Brief description	→ Page/Internet
[1] Valve terminal	Pneumatic part of the valve terminal	8
[2] Left end plate	Pneumatic interface for CPX terminal	66
[3] CPX modules	Bus node, control block, input and output modules	cpx
[4] Inscription labels	Large, for left end plate/pneumatic interface for CPX terminal	-
[5] DIN rail mounting	-	64

## Peripherals overview

### Valve terminal with interface to the remote I/O system CPX-AP-I


Order code:

- 34P-... for the pneumatic components
- CPX-AP-I components are to be ordered individually

Valve terminals with CPX-AP-I interface can be expanded by up to 32 solenoid coils/valve positions. Up to 32 valve positions can be equipped with single solenoid valves.

The maximum number of valve positions is reduced to 16 if only double solenoid valves are used.

Each valve position can be equipped with any valve or a cover plate.

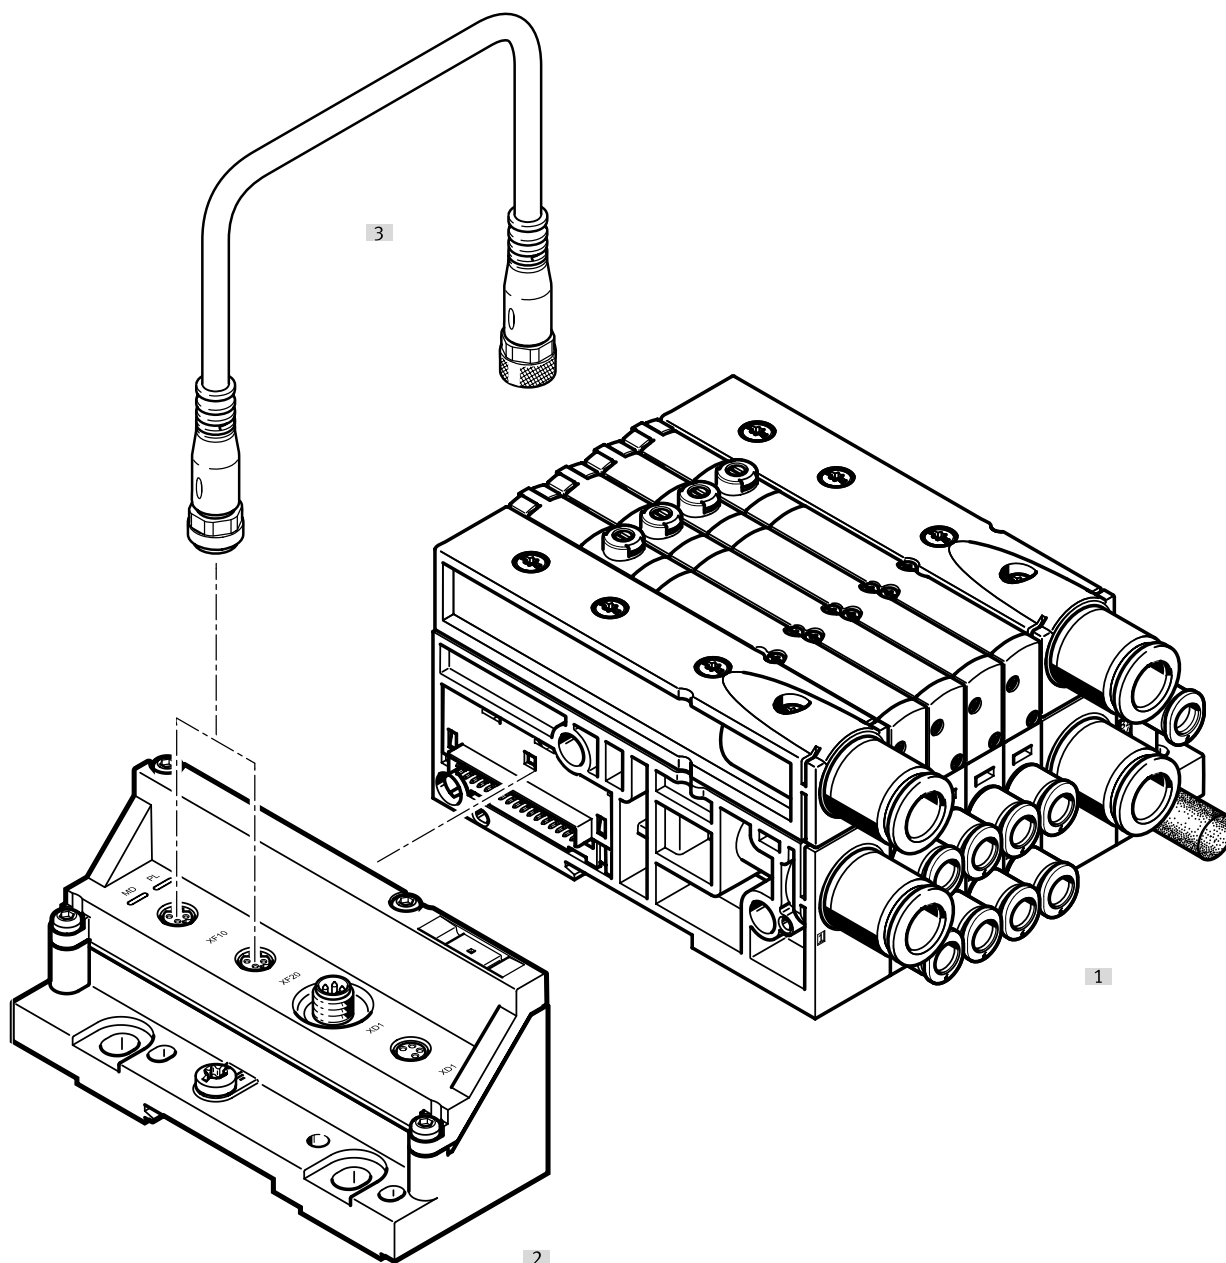

Designation	Brief description	→ Page/Internet
[1] Valve terminal	Pneumatic part of the valve terminal	8
[2] Left end plate	End plate with interface to the remote I/O system CPX-API and with interface for power supply	66
[3] Connecting cable	Between two CPX-AP-I modules	cpx-ap-i

## Peripherals overview

### Valve terminal with I-Port interface/IO-Link® (and bus node)

Order code:


- 34P-... for the pneumatic components
- CTEU-... for the bus node

Valve terminals with I-Port interface/IO-Link® can be expanded by up to 32 solenoid coils/valve positions.

Up to 32 valve positions can be equipped with single solenoid valves.

The maximum number of valve positions is reduced to 16 if only double solenoid valves are used.


Each valve position can be equipped with any valve or a cover plate.

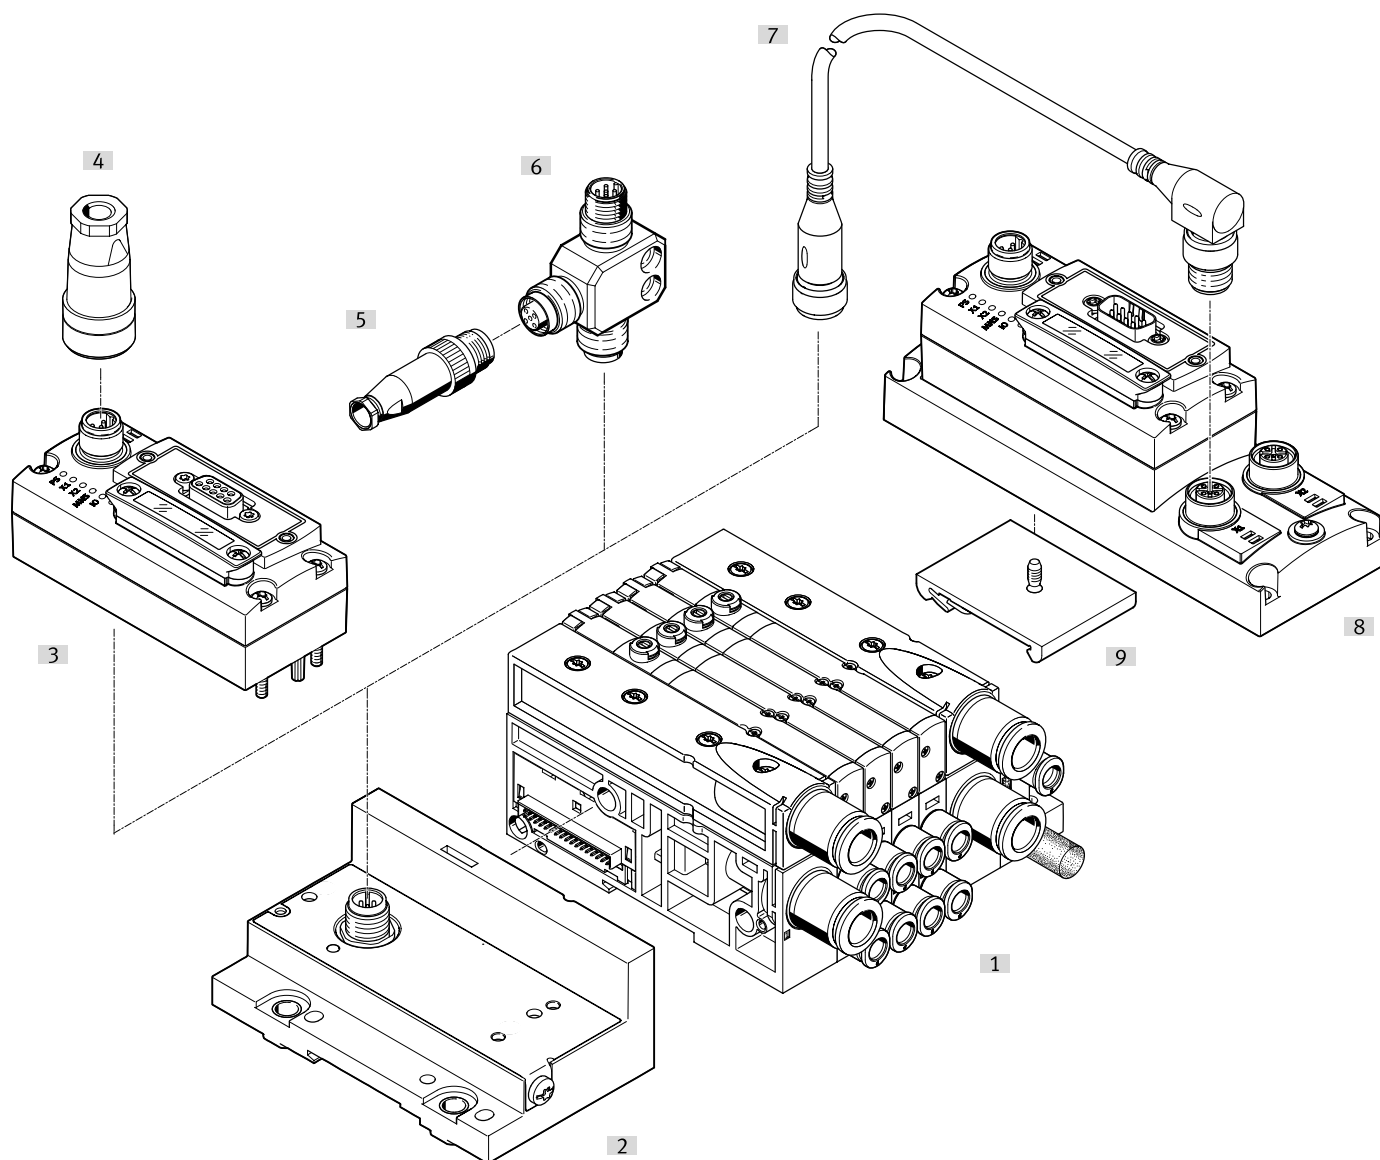

Designation	Brief description	→ Page/Internet
[1] Valve terminal	Pneumatic part of the valve terminal	8
[2] Left end plate	End plate with I-Port interface/IO-Link®	66
[3] CTEU fieldbus node	Bus node	cteu
[4] Socket	For power supply	ntsd
[5] Plug	For I-Port interface/IO-Link®	sea
[6] T-adaptor	For I-Port interface/IO-Link®	fb-ta
[7] Connecting cable	Between two I-Port interfaces	nebv
[8] Electrical connection block	With bus node for connecting two devices with I-Port interfaces	cteu
[9] DIN rail mounting	For electrical connection block	cteu

## Key features – Pneumatic components

### Sub-base valve



MPA-L offers a comprehensive range of valve functions. The valves are equipped with a piston spool and patented sealing system to facilitate efficient sealing, a broad pressure range and a long service life. Polymer poppet valves are available as an alternative for size 10 mm. All valves have pneumatic pilot control for optimising performance.

Compressed air is supplied via a pilot air supply port. Sub-base valves can be replaced quickly since the tubing connections remain on the sub-base. This design is also very flat.

Irrespective of the valve function, there are sub-base valves with one solenoid coil (single solenoid) or with two solenoid coils (double solenoid or two single solenoid valves in one housing).

### Design

#### Replacing valves

The valves are attached to the sub-base using two screws.

As a result, the valves can be easily replaced. The sturdy mechanical structure of the sub-base ensures efficient, durable sealing.

#### Extension

Cover plates can be replaced by valves at a later date. The dimensions, mounting points and existing pneumatic installations remain unchanged during this process.





The valve code (e.g. M, J, N, NS, NU) is located on the front of the valve beneath the manual override.

#### Note

A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup).

### 5/2-way valve

#### Circuit symbol

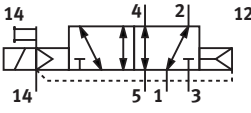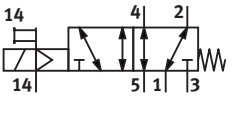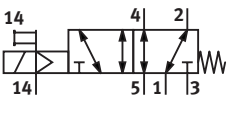Circuit symbol	Code	Description
	Position function 1-32: M	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Pneumatic spring return</li> <li>• Reversible</li> <li>• Operating pressure <math>-0.09 \dots +1</math> MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: MS	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure <math>-0.09 \dots +0.8</math> MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: MU	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Polymer poppet valve</li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure <math>-0.09 \dots +1</math> MPa</li> <li>• Available in width of 10 mm</li> <li>• 5/2-way function is achieved using two mechanically separate switching elements</li> </ul>
	Position function 1-32: J	<ul style="list-style-type: none"> <li>• Double solenoid</li> <li>• Reversible</li> <li>• Operating pressure <math>-0.09 \dots +1</math> MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>

### Key features – Pneumatic components

2x 3/2-way valve Circuit symbol	Code	Description
	Position function 1-32: N	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally open</li> <li>• Pneumatic spring return</li> <li>• Operating pressure 0.3 ... 1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: NS	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure -0.09 ... +0.8 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: NU	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Polymer poppet valve</li> <li>• Normally open</li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure -0.09 ... +1 MPa</li> <li>• Available in width of 10 mm</li> </ul>
	Position function 1-32: K	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally closed</li> <li>• Pneumatic spring return</li> <li>• Operating pressure 0.3 ... 1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: KS	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure -0.09 ... +0.8 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: KU	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Polymer poppet valve</li> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure -0.09 ... +1 MPa</li> <li>• Available in width of 10 mm</li> </ul>
	Position function 1-32: H	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normal position                             <ul style="list-style-type: none"> <li>- 1x normally closed</li> <li>- 1x normally open</li> </ul> </li> <li>• Pneumatic spring return</li> <li>• Operating pressure 0.3 ... 1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: HS	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normal position                             <ul style="list-style-type: none"> <li>- 1x normally closed</li> <li>- 1x normally open</li> </ul> </li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure -0.09 ... +0.8 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: HU	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Polymer poppet valve</li> <li>• Normal position                             <ul style="list-style-type: none"> <li>- 1x normally closed</li> <li>- 1x normally open</li> </ul> </li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure -0.09 ... +1 MPa</li> <li>• Available in width of 10 mm</li> </ul>

### Key features – Pneumatic components

5/3-way valve		
Circuit symbol	Code	Description
	Position function 1-32: B	<ul style="list-style-type: none"> <li>• mid-position pressurised<sup>1)</sup></li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure –0.09 ... +1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: G	<ul style="list-style-type: none"> <li>• Mid-position closed<sup>1)</sup></li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure –0.09 ... +1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: E	<ul style="list-style-type: none"> <li>• Mid-position exhausted<sup>1)</sup></li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure –0.09 ... +1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>

1) If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.  
 If both coils are energised at the same time, the valve remains in the previously assumed switching position.


3/2-way valve		
Circuit symbol	Code	Description
	Position function 1-32: W	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally open</li> <li>• External pressure supply</li> <li>• Pneumatic spring return</li> <li>• Reversible</li> <li>• Operating pressure –0.09 ... +1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul> Pressure supplied at working port 2 (–0.09 ... +1 MPa) can be switched with both internal and external pilot air supply.
	Position function 1-32: X	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally closed</li> <li>• External pressure supply</li> <li>• Pneumatic spring return</li> <li>• Reversible</li> <li>• Operating pressure –0.09 ... +1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul> Pressure supplied at working port 4 (–0.09 ... +1 MPa) can be switched with both internal and external pilot air supply.

2x 2/2-way valve		
Circuit symbol	Code	Description
	Position function 1-32: D	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally closed</li> <li>• Pneumatic spring return</li> <li>• Operating pressure 0.3 ... 1 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: DS	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• Normally closed</li> <li>• Mechanical spring return</li> <li>• Reversible</li> <li>• Operating pressure –0.09 ... +0.8 MPa</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Position function 1-32: I	<ul style="list-style-type: none"> <li>• Single solenoid</li> <li>• 1x normally closed</li> <li>• 1x normally closed, reversible only</li> <li>• Pneumatic spring return</li> <li>• Operating pressure 0.3 ... 1 MPa</li> <li>• Vacuum at port 3/5 only</li> <li>• Available in width of 10 mm, 14 mm and 20 mm</li> </ul>



## Key features – Pneumatic components


## Cover plate



Cover plate (code L) without valve function, for reserving valve positions on a valve terminal.

The valve plate and cover plate are connected to the sub-base using two screws.

## Exhaust functions

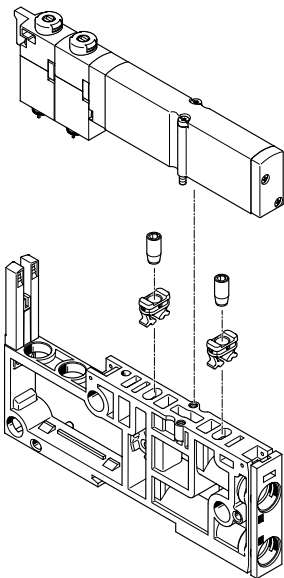

## Fixed flow restrictor

The fixed flow restrictor can be used to permanently set the exhaust flow rate in ducts 3 and 5.

## Mounting:

- Press the retainer as far as it will go into the exhaust openings on the sub-base
- Screw the fixed restrictor into the retainer
- Mount the valve on the sub-base

The restrictor cuts a thread into the retainer as it is screwed in. The retainer should therefore also be changed when a restrictor is repeatedly replaced.

The restrictor is available in 7 different nominal widths (0.3 ... 1.7 mm). The individual sizes are colour-coded for ease of identification.

Fixed flow restrictors enable, for example, the cylinder speed to be set to a predefined limit in response to known flow rate conditions.

They cannot be accessed during operation and are therefore protected against manipulation.

This is beneficial when producing series machines since the required speed can be determined once and the installation simply duplicated for further machines, saving time and costs for repeated commissioning.

 **Note**

The fixed flow restrictors are available only for valves or manifold sub-bases with a width of 10 mm.

## Check valve

The check valves prevent the air from being pushed back (back pressure) from ducts 3 and 5 into the solenoid valve.


This prevents the back pressure from having a disruptive effect on other connected actuators.

The check valves are integrated into ducts 3 and 5 of the sub-bases.

The check valves should be installed according to the specifications using the enclosed assembly tool. Once installed, the check valves cannot be removed.

Please see the relevant assembly instructions:


- [www.festo.com/catalogue/...](http://www.festo.com/catalogue/...)
- Support/Downloads

 **Note**

- Pre-assembled sub-bases with integrated check valves are available.
- It is not possible to use a check valve and a fixed flow restrictor (in the same duct) at the same time.

## Key features – Pneumatic components


### Vertical stacking

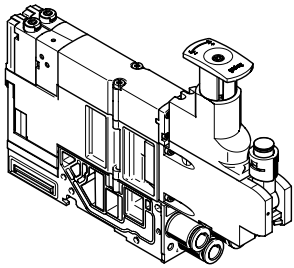

Additional functional units can be added to each valve position between the base plate and the valve.

These functions are known as vertical stacking modules and enable special functions or control of an individual valve position.

### Pressure regulator plate




An adjustable pressure regulator can be installed between the base plate and the valve to control the force of the actuator.

This pressure regulator maintains a largely constant output pressure (secondary side) independent of pressure fluctuations (primary side) and air consumption.

Standard version:

- For pressure regulation up to 6 bar or up to 10 bar
- Without pressure gauge (optional, can be rotated)
- Set using screwdriver or regulator head


### Vertical pressure shut-off plate for widths 10 and 14 mm



The vertical pressure shut-off plate can be used to hot swap individual valves without switching off the overall air supply.

The working pressure for the individual valve can be switched off manually via the vertical pressure shut-off plate using the actuating element.

### Vertical pressure supply plate for width 14 mm and 20 mm



This vertical pressure supply plate enables an individual valve to be supplied with individual operating pressure independently of the operating pressure of the valve terminal.


The exhaust and pilot air supply of the valve are still provided via the central ports of the valve terminal.

### Key features – Pneumatic components

Pressure regulator		
Circuit symbol	Code	Description
	Pressure regulator 1-32: PA Pressure regulator 1-32: PF	<ul style="list-style-type: none"> <li>Regulates the pressure upstream of the valve in duct 1</li> <li>Same regulated pressure at duct 2 and duct 4</li> <li>Exhausting in the valve from duct 2 to duct 3 and from duct 4 to duct 5</li> <li>Regulator not affected by exhausting</li> <li>Regulator can always be adjusted</li> <li>Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Pressure regulator 1-32: PC Pressure regulator 1-32: PH	<ul style="list-style-type: none"> <li>Regulates the pressure for duct 2 downstream of the valve</li> <li>Exhausting via the regulator from duct 2 to duct 3</li> <li>Exhaust flow is restricted by the regulator</li> <li>Regulator can only be adjusted in the switched state</li> <li>Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Pressure regulator 1-32: PB Pressure regulator 1-32: PG	<ul style="list-style-type: none"> <li>Regulates the pressure for duct 4 downstream of the valve</li> <li>Exhausting via the regulator from duct 4 to duct 5</li> <li>Exhaust flow is restricted by the regulator</li> <li>Regulator can only be adjusted in the switched state</li> <li>Available in width of 10 mm, 14 mm and 20 mm</li> </ul>
	Pressure regulator 1-32: PN Pressure regulator 1-32: PL	<ul style="list-style-type: none"> <li>Splits the supply air in duct 1 and regulates the pressure upstream of the valve in duct 3</li> <li>Valve is operated in reverse mode</li> <li>Exhausting in the valve from duct 2 to duct 1</li> <li>Regulator not affected by exhausting</li> <li>Regulator can always be adjusted</li> <li>Available in width 20 mm</li> </ul>
	Pressure regulator 1-32: PK Pressure regulator 1-32: PM	<ul style="list-style-type: none"> <li>Splits the supply air in duct 1 and regulates the pressure upstream of the valve in duct 5</li> <li>Valve is operated in reverse mode</li> <li>Exhausting in the valve from duct 4 to duct 1</li> <li>Regulator not affected by exhausting</li> <li>Regulator can always be adjusted</li> <li>Available in width of 20 mm</li> </ul>
Vertical pressure shut-off plate		
Circuit symbol	Code	Description
	Pressure regulator 1-32: PS	<ul style="list-style-type: none"> <li>Makes it possible to shut down pressure in duct 1 and duct 12/14 upstream of the valve</li> <li>Exhausting in the valve from duct 2 to duct 3 and from duct 4 to duct 5</li> <li>Vertical pressure shut-off plate not affected by exhausting</li> <li>Operating pressure 3 ... 8 bar</li> <li>Available in width of 10 mm and 14 mm</li> </ul>
Vertical pressure supply plate		
Circuit symbol	Code	Description
	Pressure regulator 1-32: PV	<ul style="list-style-type: none"> <li>Enables separate supply of the pressure in duct 1 and upstream of the valve</li> <li>Operating pressure -0.9 ... +10 bar</li> <li>Available in width of 14 mm and 20 mm</li> </ul>

## Key features – Pneumatic components

### Compressed air supply and exhaust



- [1] Power supply module
- [2] Right end plate

The valve terminal MPA-L can be supplied with compressed air at one or more points via supply modules and/or the right end plate. The generously sized pneumatic system ensure that all components will offer good performance, even with large-scale extensions.

Exhausting (ducts 3 and 5) either takes place via silencers or ports for ducted exhaust air via the supply modules or the right end plate. There are two types of supply modules with exhausting:

- Exhaust air 3/5 via flat plate silencer
- Exhaust air 3/5 ducted

Exhausting (ducts 3 and 5) can alternatively or additionally take place via the right end plate. Ducts 3 and 5 are separate in the terminal and are only joined together in the supply module. The pilot exhaust air (duct 82/84) is completely separate from ducts 3 and 5.


### Pilot air supply

The valve terminal MPA-L is supplied with pilot air exclusively via the right end plate. The pilot air

selector on the end plate can be used to select how the pilot air supply is to take place:

- Internal (from duct 1) or
- External (from duct 12/14)

#### Switching position for internal, marked "Int"

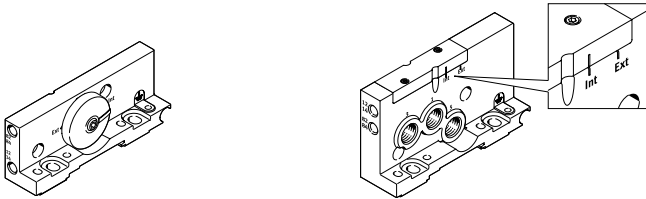


Internal pilot air supply can be selected if the supply pressure for the terminal is between 0.3 and 0.8 MPa.

In this case, the pilot air supply is branched by an internal connec-

tion from duct 1 in the right end plate. Port 12/14 on the right end plate can be sealed using a blanking plug.

#### Switching position for external, marked "Ext"

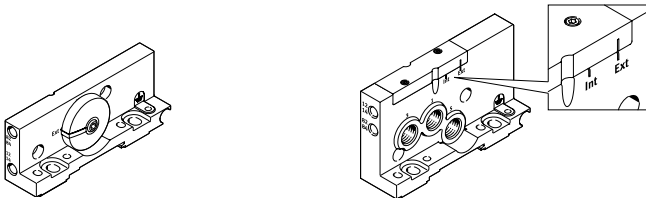

If the supply pressure (at the right end plate) is less than 0.3 MPa or greater than 0.8 MPa, then the valve terminal MPA-L must be operated with an external pilot air supply. The pilot air is then supplied via port 12/14 on the right

end plate. When using multiple pressure zones, the supply pressure in the pressure zone in which the right end plate is located prevails.




#### - Note




If a gradual pressure build-up in the system using a soft-start valve is chosen, an external pilot air supply should be connected so that the pilot pressure applied during switch-on is already very high.

## Key features – Pneumatic components

Compressed air supply and pilot air supply		
Illustration	Code	Information
<b>Right end plate, with supply ports</b>		
	Right end plate: D Pilot air: –	Internal pilot air supply <ul style="list-style-type: none"> <li>• Pilot air is branched internally from port 1 in the right end plate</li> <li>• Exhaust air 3/5 via right end plate or supply module</li> <li>• Pilot exhaust air 82/84 via right end plate</li> <li>• For operating pressure in the range 0.3 ... 0.8 MPa</li> </ul>
	Right end plate: D Pilot air: E	External pilot air supply <ul style="list-style-type: none"> <li>• Pilot air supply (0.3 ... 0.8 MPa) is connected at port 12/14 on the right end plate</li> <li>• Exhaust air 3/5 via right end plate or supply module</li> <li>• Pilot exhaust air 82/84 via right end plate</li> <li>• For operating pressure in the range –0.09 ... +1 MPa (suitable for vacuum)</li> </ul>
<b>Right end plate, without supply ports</b>		
	Right end plate: – Pilot air: –	Internal pilot air supply <ul style="list-style-type: none"> <li>• Pilot air is branched internally from port 1 in the right end plate</li> <li>• Exhaust air 3/5 via supply module</li> <li>• Pilot exhaust air 82/84 via right end plate</li> <li>• For operating pressure in the range 0.3 ... 0.8 MPa</li> </ul>
	Right end plate: – Pilot air: E	External pilot air supply <ul style="list-style-type: none"> <li>• Pilot air supply (0.3 ... 0.8 MPa) is connected at port 12/14 on the right end plate</li> <li>• Exhaust air 3/5 via supply module</li> <li>• Pilot exhaust air 82/84 via right end plate</li> <li>• For operating pressure in the range –0.09 ... +1 MPa (suitable for vacuum)</li> </ul>
<b>Supply module, flat plate silencer</b>		
	Type of module block 1-40: U Exhaust port: –	<ul style="list-style-type: none"> <li>• Exhaust air 3/5 via flat plate silencer</li> <li>• Pilot exhaust air 82/84 via right end plate</li> <li>• For operating pressure in the range –0.09 ... +1 MPa (suitable for vacuum)</li> </ul>
<b>Supply module, ducted exhaust air</b>		
	Type of module block 1-40: U Exhaust port: UD, UE, UF, UM, UN, UP or UG	<ul style="list-style-type: none"> <li>• Exhaust air 3/5 via supply module</li> <li>• Pilot exhaust air 82/84 via right end plate</li> <li>• For operating pressure in the range –0.09 ... +1 MPa (suitable for vacuum)</li> </ul>


## Key features – Pneumatic components

Supply module				
Illustration	Code	Type	Designation	Information
	Exhaust port: UD, UE, UF, UM, UN, UP or UG	VMPAL-EG	Exhaust plate for ducted exhaust air	Additional supply modules can be used for larger terminals or to create pressure zones. Supply modules can be configured at any point upstream or downstream of the sub-bases. Supply modules contain the following ports: • Compressed air supply (duct 1) • Exhaust air (duct 3/5)
	Exhaust port: –	VMPAL-EU	Flat plate silencer	
	Type of module block 1-40: U	VMPAL-SP-0	Power supply module with electrical interlinking module	

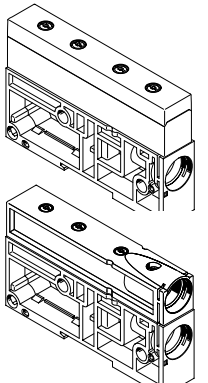Ports for supply and exhaust					
	Code	connection		Push-in fitting/cartridge	
<b>Right end plate with supply ports 1, 3, 5</b>					
	Right end plate: D	1	Working air/vacuum supply	G1/4 thread	Straight or angled push-in fitting, for tubing O.D. 8 mm, 10 mm, 12 mm, 5/16", 3/8"
		3	Exhaust air	G1/4 thread	
		5	Exhaust air	G1/4 thread	
		12/14	Pilot air supply	M7 thread	Straight or angled push-in fitting, for tubing O.D. 4 mm, 6 mm Straight push-in fitting, for tubing O.D. 3/16", 1/4"
		82/84	Pilot exhaust air	M7 thread	
<b>Supply module</b>					
	Type of module block 1-40: U	1	Working air/vacuum supply	Cartridge	Straight cartridge, for tubing O.D. 8 mm, 10 mm, 12 mm, 5/16", 3/8", 1/2", adapter for thread G1/4
		3/5	Exhaust air	Flat plate silencer	–
				Cartridge	Straight cartridge, for tubing O.D. 8 mm, 10 mm, 12 mm, 5/16", 3/8", 1/2", adapter for thread G1/4
		12/14	Pilot air supply	–	–
82/84	Pilot exhaust air	–	–		
<b>Right end plate without supply ports</b>					
	Right end plate: –	1	Working air/vacuum supply	–	–
		3	Exhaust air	–	–
		5	Exhaust air	–	–
		12/14	Pilot air supply	M7 thread	Straight or angled push-in fitting, for tubing O.D. 4 mm, 6 mm Straight push-in fitting, for tubing O.D. 3/16", 1/4"
		82/84	Pilot exhaust air	M7 thread	

## Key features – Pneumatic components

### Creating pressure zones and separating exhaust air

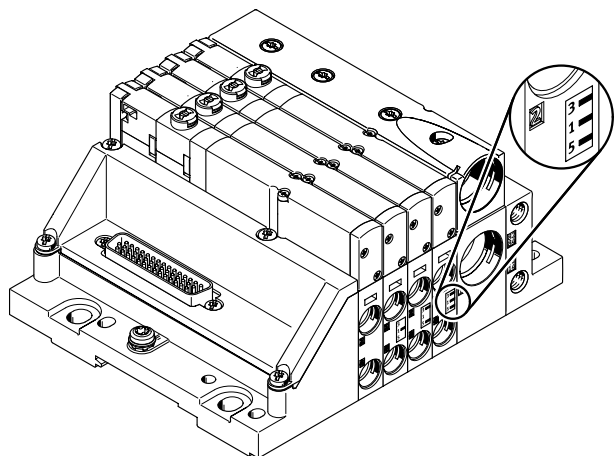

MPA-L offers a number of options for creating pressure zones if different working pressures are required. A total of up to 20 pressure zones can be created. Pressure zones are created by isolating the internal supply ducts in a special sub-base. Every pressure zone must have its own compressed air supply. Compressed air can be supplied and exhausted via a supply module and/or the right end plate.

The position of the supply modules and the sub-bases with pressure zone separation can be freely chosen with the valve terminal MPA-L.

The sub-bases with pressure zone separation are integrated into the terminal at the factory as specified in your order.

They can be distinguished by their coding, even when the valve terminal is assembled. Duct separation always takes place to the right of the sub-base.

### Creating pressure zones

Sub-bases with pressure zone separation

Illustrated examples


Illustrated examples	Coding	Code	Information
		Duct separation to the right of the sub-base 1 - 40: -	<ul style="list-style-type: none"> <li>No duct separation</li> </ul>
		Duct separation to the right of the sub-base 1 - 40: T	<ul style="list-style-type: none"> <li>Duct 1 separated</li> <li>VMPAL-...-T1</li> </ul>
		Duct separation to the right of the sub-base 1 - 40: TR	<ul style="list-style-type: none"> <li>Duct 3/5 separated</li> <li>VMPAL-...-T35</li> </ul>
		Duct separation to the right of the sub-base 1 - 40: TS	<ul style="list-style-type: none"> <li>Duct 1 and 3/5 separated</li> <li>VMPAL-...-T135</li> </ul>

## Key features – Pneumatic components

### Examples: Compressed air supply and pilot air supply


#### Internal pilot air supply, right end plate without supply ports

The diagram on the right shows an example of the configuration and connection of the air supply with internal pilot air supply. The exhaust air (duct 3/5) is exhausted via supply modules. The pilot exhaust air (duct 82/84) is discharged via the right end plate. Special sub-bases are used to create pressure zones.

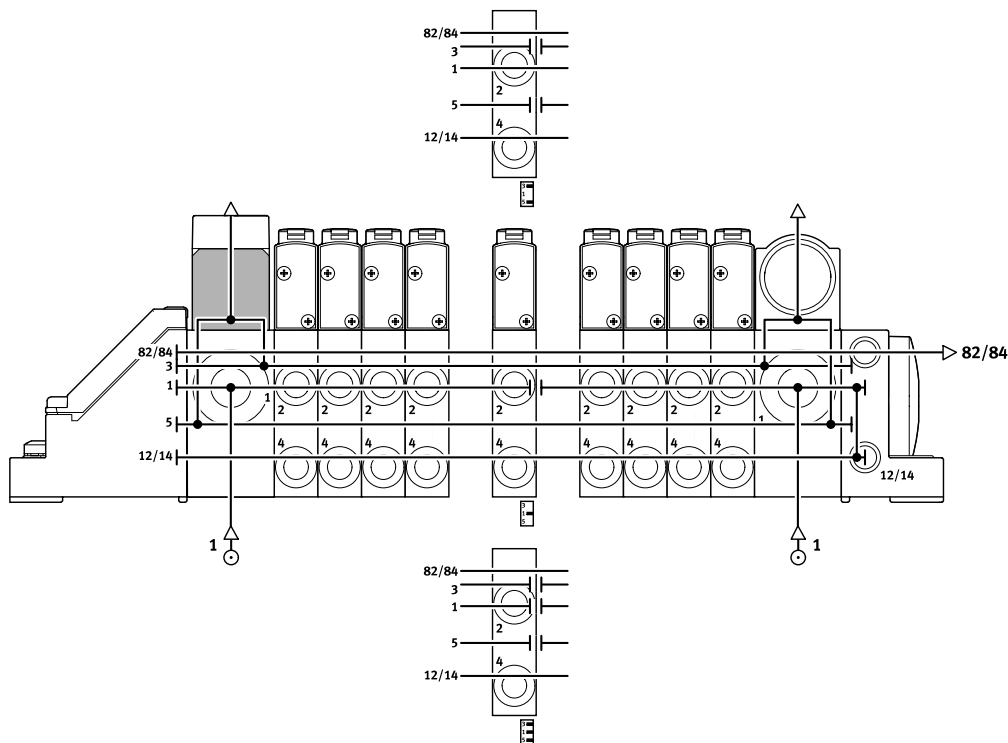

#### External pilot air supply, right end plate without supply ports


The diagram on the right shows an example of the configuration and connection of the compressed air supply with external pilot air supply. Port 12/14 on the right end plate is equipped with a fitting for this. The exhaust air (duct 3/5) is exhausted via supply modules. The pilot exhaust air (duct 82/84) is discharged via the right end plate. Special sub-bases are used to create pressure zones.

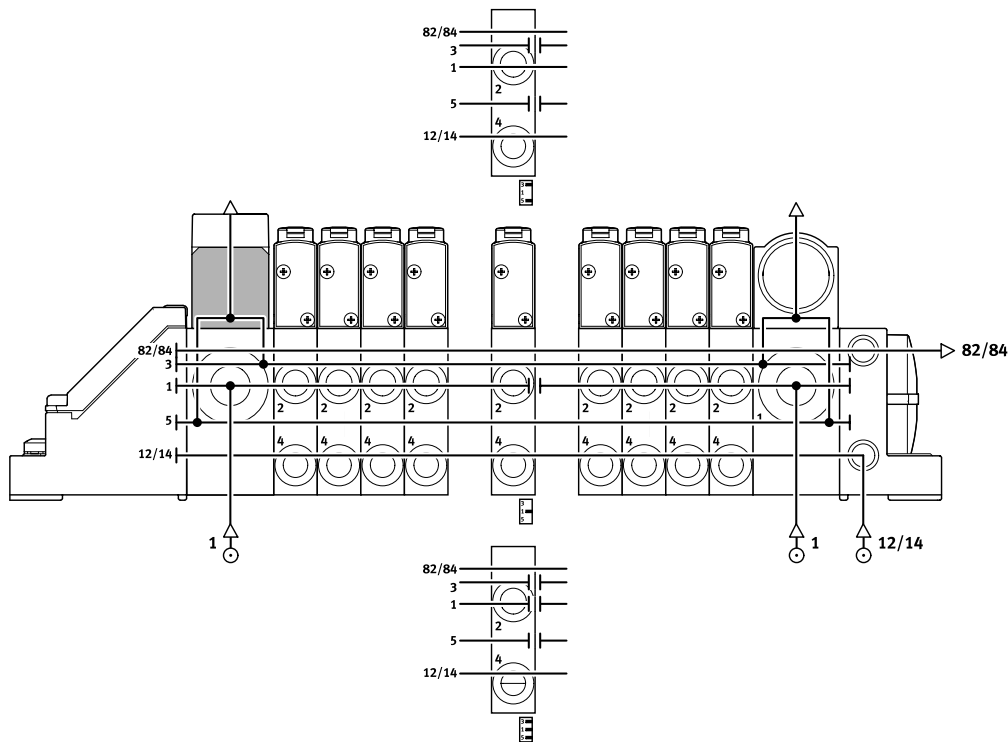



## Key features – Pneumatic components

### Connecting plate



MPA-L is based on a modular system consisting of sub-bases and valves. The sub-bases are joined together using tie rods and thus form the support system for the valves.

They contain the ducts for supplying compressed air to and exhausting from the valve terminal as well as the working ports for the pneumatic drives for each valve.

The tie rod used to join the sub-bases together consists of a threaded rod, threaded sleeve and screw.

In principle, sub-bases have a modular structure. If this modularity is not required within a terminal, then four individual sub-bases can be combined with a 4-way electrical interlinking module to save costs.




The threaded rod/sleeve combination is selected as appropriate to the number and width of the individual sub-bases or sub-base combination.

To add further blocks, simply loosen the tie rod and adapt with extenders.

There are no restrictions on extensions; a tie rod could be constructed almost entirely from extenders.

Sub-base variants			
Illustration	Code	Type	Information
	-	VMPAL-AP-10 VMPAL-AP-14 VMPAL-AP-20	<ul style="list-style-type: none"> <li>Without cartridge</li> <li>Without electrical interlinking module</li> </ul>
		VMPAL-AP-...-QS...-1... VMPAL-AP-...-QS...-2...	<ul style="list-style-type: none"> <li>With cartridge (push-in connector for compressed air tubing with standard O.D.)</li> <li>With electrical interlinking module</li> <li>With/without duct separation</li> </ul>
		VMPAL-AP-...-T1...	<ul style="list-style-type: none"> <li>Duct separation in duct 1</li> <li>With/without cartridge (push-in connector for compressed air tubing with standard O.D.)</li> <li>With/without electrical interlinking module</li> <li>With/without check valve in duct 3 and 5</li> </ul>
		VMPAL-AP-...-T35...	<ul style="list-style-type: none"> <li>Duct separation in ducts 3 and 5</li> <li>Without electrical interlinking module</li> <li>With/without check valve in duct 3 and 5</li> </ul>
		VMPAL-AP-...-T135...	<ul style="list-style-type: none"> <li>Duct separation in ducts 1, 3 and 5</li> <li>Without electrical interlinking module</li> <li>With/without check valve in duct 3 and 5</li> </ul>
		VMPAL-AP-...-RV	<ul style="list-style-type: none"> <li>With check valve in duct 3 and 5</li> <li>Without electrical interlinking module</li> <li>With/without duct separation</li> </ul>
	Combination manifold block: Z	VMPAL-AP-4x10 VMPAL-AP-4x14	<ul style="list-style-type: none"> <li>Four-way block, not suitable for pressure zone separation</li> <li>No duct separation</li> <li>With/without electrical interlinking module</li> <li>With/without cartridge</li> </ul>

## Key features – Pneumatic components

Electrical interlinking module				
Illustration	Code	Type	No. of solenoid coils (valve positions)	Information
	Type of module block 1-40: A	VMPAL-EVAP-10-...-2	2 (1), double solenoid	Each solenoid coil must be assigned to a specific pin of the multi-pin plug for the valve to be activated. Regardless of whether valve positions are fitted with blanking plates or valves, they are used to control: <ul style="list-style-type: none"> <li>• one coil/address (single solenoid valves)</li> <li>• two coils/addresses (double solenoid valves)</li> </ul> The electrical interlinking modules are different colours: <ul style="list-style-type: none"> <li>• Single solenoid – grey</li> <li>• Double solenoid – black</li> </ul>
	Type of module block 1-40: E	VMPAL-EVAP-14-...-2		
	Type of module block 1-40: B	VMPAL-EVAP-20-...-2		
	Type of module block 1-40: C	VMPAL-EVAP-10-...-1	1 (1), single solenoid	
	Type of module block 1-40: F	VMPAL-EVAP-14-...-1		
	Type of module block 1-40: D	VMPAL-EVAP-20-...-1		
	Type of module block 1-40: A	VMPAL-EVAP-10-2-4	8 (4), double solenoid	Each solenoid coil must be assigned to a specific pin of the multi-pin plug for the valve to be activated. Regardless of whether valve positions are fitted with blanking plates or valves, they are used to control: <ul style="list-style-type: none"> <li>• one coil/address (single solenoid valves)</li> <li>• two coils/addresses (double solenoid valves)</li> </ul> The electrical interlinking modules are different colours: <ul style="list-style-type: none"> <li>• Single solenoid – grey</li> <li>• Double solenoid – black</li> </ul>
	Type of module block 1-40: E	VMPAL-EVAP-14-2-4		
	Type of module block 1-40: C	VMPAL-EVAP-10-1-4	4 (4), single solenoid	
	Type of module block 1-40: F	VMPAL-EVAP-14-1-4		
	Type of module block 1-40: U	VMPAL-EVAP-20-SP	–	Electrical interlinking for power supply module

## Key features – Mounting

### Valve terminal mounting

- Sturdy terminal mounting via:
- Four through-holes for wall mounting
  - Additional mounting brackets
  - DIN rail mounting




#### Note

If the terminal is subject to strong vibrations or shock loads, use additional mounting brackets of the type VMPAL-BD for wall mounting.


These should be attached to the valve terminal every 13 cm (one mounting bracket every 10 valve positions).

### Wall mounting – multi-pin plug connection

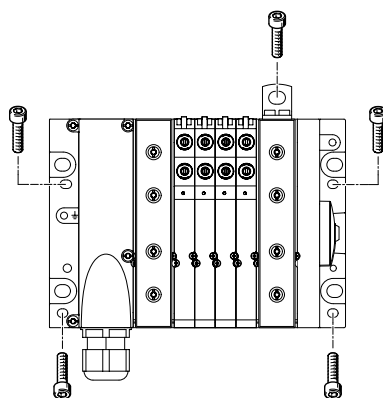


The valve terminal MPA-L is screwed onto the mounting surface using four M4 or M6 screws. The mounting holes are on the multi-pin plug connection and on the right end plate. Optional mounting brackets are also available.

### Wall mounting – Fieldbus interface (CPX terminal)

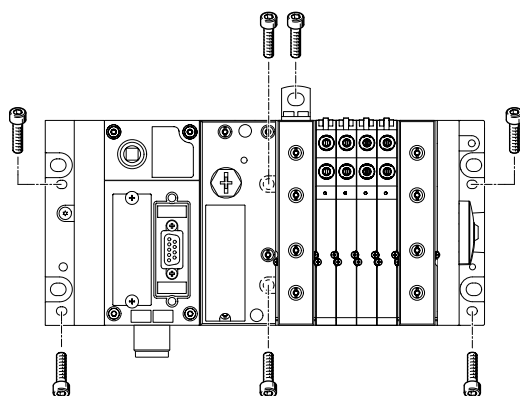

The valve terminal MPA-L is screwed onto the mounting surface using four M4 and two M6 screws or using six M6 screws. The mounting holes are on the left and right end plates and in the pneumatic interface. Optional mounting brackets are also available.

### DIN rail mounting



The valve terminal MPA-L is attached to the DIN rail (see arrow A). The valve terminal MPA-L is then swivelled onto the DIN rail and secured in place with the clamping element (see arrow B).

The following MPA-L mounting kit is required for DIN rail mounting of the valve terminal:

- With multi-pin plug connection:
- CPX-CPA-BG-NRH
- With fieldbus interface (CPX terminal):
- VMPAF-FB-BG-NRH

This enables the valve terminal to be mounted on a DIN rail to EN 60715.




#### Note

The mounting kits (see above) lock the valve terminal in a horizontal mounting position only.

## Key features – Mounting

### Tie rods

#### Configuration

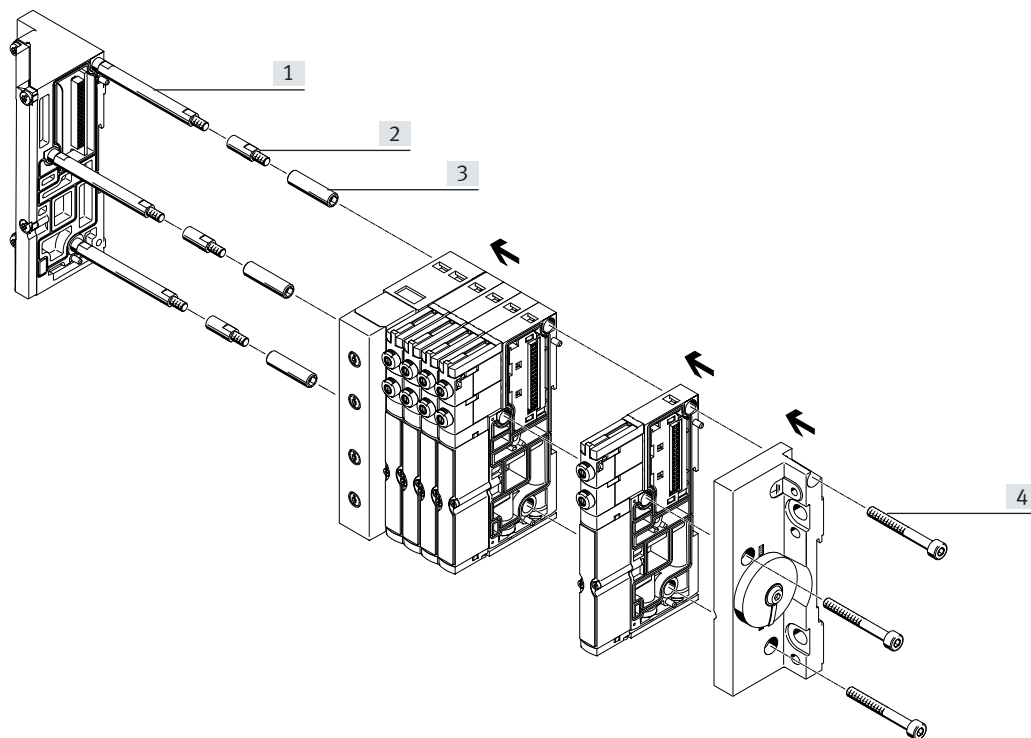

- [1] Threaded rod
- [2] Tie rod extender
- [3] Sleeve
- [4] Screw

#### Operating mode

The tie rod for MPA-L consists of four parts:

- Threaded rod
- Tie rod extender
- Sleeve
- Screw

This enables valve terminals of any length to be created. It takes just 4 steps to assemble the tie rod and the valve terminal:

- Screw the threaded rods into the left end plate
- Screw the sleeves to the threaded rods
- Push the sub-bases and supply modules onto the rod/sleeve combination
- Push on the right end plate and secure with screws that engage into the sleeves

The tie rod enables the valve terminal to be extended at a later

date. This is done by loosening the tie rod screws and disassembling the relevant components. The additional sub-base or supply module is inserted at the required location. The previously disassembled components are then re-assembled.

To compensate for the change in length, the tie rod must be extended by the increase in length. This is done by screwing in extenders between the threaded rod and sleeve. There are suitable extenders for each sub-base, combination of four sub-bases and supply module.

## Key features – Mounting


### Tie rod – Components and design

#### Tie rod (threaded rod)




The threaded rod is used to create a cost-optimised fixed-grid tie rod. The threaded rod is required with valve terminal lengths exceeding 42.45 mm, for example at least four sub-bases (10.7 mm each), since only the combination of a threaded rod and sleeve offers the optimum compensation of tolerances (by compressing the seals between the sub-bases).

#### Tie rod extender



The valve terminal can be extended almost infinitely at any time using tie rod extenders. The tie rod extenders are inserted between the threaded rod and sleeve and are available in appropriate lengths for sub-bases and supply modules.

#### Sleeve




The primary purpose of the sleeve is to compensate for tolerances that occur, for example, when the seals are compressed between the sub-bases during assembly. The sleeves come in different lengths, tailored to the use of a tie rod in a fixed grid as well as generally for the individual modular tie rods.

#### Screw



The entire valve terminal is clamped via the tie rod using the screw. Tolerances that occur, for example when the seals are compressed between the sub-bases during assembly, are compensated for by the interaction of the screw and sleeve.

#### Individual modular tie rod



Tie rods can be constructed entirely using tie rod extenders. The threaded rod and sleeve are required to compensate for tolerances that occur, for example, when the

seals are compressed between the sub-bases during assembly.

#### Fixed-grid tie rod with extension



The tie rod extenders are inserted between the threaded rod and the sleeve.

They are available in suitable lengths for sub-bases and supply modules.


#### Fixed-grid tie rod



The fixed-grid tie rod minimises assembly work when assembling previously defined valve terminals. These valve terminals can be extended at any time.

The threaded rod (and, if applicable, the sleeve too) must be replaced if the valve terminal length is reduced.

#### Short valve terminal



Valve terminals with a small number of valve positions are created by means of the following combinations:

##### Width 10 mm

- Valve terminals with two valve positions and without a supply module are connected solely using screws
- Valve terminals with three valve positions and without a supply module (or with one valve position and one supply module) are connected using a 10 mm tie rod extender and screw

##### Width 14 mm

- Valve terminals with two valve positions and without a supply module are connected using a 10 mm tie rod extender and screw

## Key features – Mounting

Ordering data – Fixed-grid tie rod				
Reference length	Part no.	Type	Part no.	Type
$L = 10.65 \times V + 14.85 \times W + 21.15 \times Z + 21.15 \times E$	Tie rods		Sleeve	
42.30 ... 62.64	561116	VMPAL-ZAS-5	561135	VMPAL-ZAH-36
62.65 ... 72.29	561116	VMPAL-ZAS-5	561136	VMPAL-ZAH-46
72.30 ... 81.94	561116	VMPAL-ZAS-5	561137	VMPAL-ZAH-56
81.95 ... 91.59	561116	VMPAL-ZAS-5	561138	VMPAL-ZAH-66
91.60 ... 101.24	561117	VMPAL-ZAS-45	561135	VMPAL-ZAH-36
101.25 ... 110.89	561117	VMPAL-ZAS-45	561136	VMPAL-ZAH-46
110.90 ... 120.54	561117	VMPAL-ZAS-45	561137	VMPAL-ZAH-56
120.55 ... 130.19	561117	VMPAL-ZAS-45	561138	VMPAL-ZAH-66
130.20 ... 139.84	561118	VMPAL-ZAS-85	561135	VMPAL-ZAH-36
139.85 ... 149.49	561118	VMPAL-ZAS-85	561136	VMPAL-ZAH-46
149.50 ... 159.49	561118	VMPAL-ZAS-85	561137	VMPAL-ZAH-56
159.50 ... 169.14	561118	VMPAL-ZAS-85	561138	VMPAL-ZAH-66
169.15 ... 178.79	561119	VMPAL-ZAS-125	561135	VMPAL-ZAH-36
178.80 ... 188.44	561119	VMPAL-ZAS-125	561136	VMPAL-ZAH-46
188.45 ... 198.09	561119	VMPAL-ZAS-125	561137	VMPAL-ZAH-56
198.10 ... 207.74	561119	VMPAL-ZAS-125	561138	VMPAL-ZAH-66
207.75 ... 217.39	561120	VMPAL-ZAS-165	561135	VMPAL-ZAH-36
217.40 ... 227.04	561120	VMPAL-ZAS-165	561136	VMPAL-ZAH-46
227.05 ... 236.69	561120	VMPAL-ZAS-165	561137	VMPAL-ZAH-56
236.70 ... 246.34	561120	VMPAL-ZAS-165	561138	VMPAL-ZAH-66
246.35 ... 255.99	561121	VMPAL-ZAS-205	561135	VMPAL-ZAH-36
256.00 ... 265.99	561121	VMPAL-ZAS-205	561136	VMPAL-ZAH-46
266.00 ... 275.64	561121	VMPAL-ZAS-205	561137	VMPAL-ZAH-56
275.65 ... 285.29	561121	VMPAL-ZAS-205	561138	VMPAL-ZAH-66
285.30 ... 294.94	561122	VMPAL-ZAS-245	561135	VMPAL-ZAH-36
294.95 ... 304.59	561122	VMPAL-ZAS-245	561136	VMPAL-ZAH-46
304.60 ... 314.24	561122	VMPAL-ZAS-245	561137	VMPAL-ZAH-56
314.25 ... 323.89	561122	VMPAL-ZAS-245	561138	VMPAL-ZAH-66
323.90 ... 333.54	561123	VMPAL-ZAS-285	561135	VMPAL-ZAH-36
333.55 ... 343.19	561123	VMPAL-ZAS-285	561136	VMPAL-ZAH-46
343.20 ... 352.84	561123	VMPAL-ZAS-285	561137	VMPAL-ZAH-56
352.85 ... 362.49	561123	VMPAL-ZAS-285	561138	VMPAL-ZAH-66
362.50 ... 372.49	561124	VMPAL-ZAS-325	561135	VMPAL-ZAH-36
372.50 ... 382.49	561124	VMPAL-ZAS-325	561136	VMPAL-ZAH-46
382.50 ... 392.49	561124	VMPAL-ZAS-325	561137	VMPAL-ZAH-56
392.50 ... 402.49	561124	VMPAL-ZAS-325	561138	VMPAL-ZAH-66
402.50 ... 412.49	561125	VMPAL-ZAS-365	561135	VMPAL-ZAH-36
412.50 ... 422.49	561125	VMPAL-ZAS-365	561136	VMPAL-ZAH-46
422.50 ... 432.49	561125	VMPAL-ZAS-365	561137	VMPAL-ZAH-56
432.50 ... 442.49	561125	VMPAL-ZAS-365	561138	VMPAL-ZAH-66
442.50 ... 452.49	561126	VMPAL-ZAS-405	561135	VMPAL-ZAH-36
452.50 ... 462.49	561126	VMPAL-ZAS-405	561136	VMPAL-ZAH-46
462.50 ... 472.49	561126	VMPAL-ZAS-405	561137	VMPAL-ZAH-56
472.50 ... 482.49	561126	VMPAL-ZAS-405	561138	VMPAL-ZAH-66
482.50 ... 492.49	561127	VMPAL-ZAS-445	561135	VMPAL-ZAH-36
492.50 ... 502.49	561127	VMPAL-ZAS-445	561136	VMPAL-ZAH-46
502.50 ... 512.49	561127	VMPAL-ZAS-445	561137	VMPAL-ZAH-56
512.50 ... 522.49	561127	VMPAL-ZAS-445	561138	VMPAL-ZAH-66

- V Number of valve positions in width 10 mm
- W Number of valve positions in width 14 mm
- Z Number of valve positions in width 20 mm
- E Number of supply modules

## Key features – Mounting

Ordering data – Fixed-grid tie rod				
Reference length	Part no.	Type	Part no.	Type
<b>L = 10.65 x V + 14.85 x W + 21.15 x Z + 21.15 x E</b>	<b>Tie rods</b>		<b>Sleeve</b>	
522.50 ... 532.49	561128	VMPAL-ZAS-485	561135	VMPAL-ZAH-36
532.50 ... 542.49	561128	VMPAL-ZAS-485	561136	VMPAL-ZAH-46
542.50 ... 552.49	561128	VMPAL-ZAS-485	561137	VMPAL-ZAH-56
552.50 ... 562.49	561128	VMPAL-ZAS-485	561138	VMPAL-ZAH-66
562.50 ... 572.49	561129	VMPAL-ZAS-525	561135	VMPAL-ZAH-36
572.50 ... 582.49	561129	VMPAL-ZAS-525	561136	VMPAL-ZAH-46
582.50 ... 592.49	561129	VMPAL-ZAS-525	561137	VMPAL-ZAH-56
592.50 ... 602.49	561129	VMPAL-ZAS-525	561138	VMPAL-ZAH-66
602.50 ... 612.49	561130	VMPAL-ZAS-565	561135	VMPAL-ZAH-36
612.50 ... 622.49	561130	VMPAL-ZAS-565	561136	VMPAL-ZAH-46
622.50 ... 632.49	561130	VMPAL-ZAS-565	561137	VMPAL-ZAH-56
632.50 ... 642.49	561130	VMPAL-ZAS-565	561138	VMPAL-ZAH-66
642.50 ... 652.49	561131	VMPAL-ZAS-605	561135	VMPAL-ZAH-36
652.50 ... 662.49	561131	VMPAL-ZAS-605	561136	VMPAL-ZAH-46
662.50 ... 672.49	561131	VMPAL-ZAS-605	561137	VMPAL-ZAH-56
672.50 ... 682.49	561131	VMPAL-ZAS-605	561138	VMPAL-ZAH-66
682.50 ... 692.49	561132	VMPAL-ZAS-645	561135	VMPAL-ZAH-36
692.50 ... 702.49	561132	VMPAL-ZAS-645	561136	VMPAL-ZAH-46
702.50 ... 712.49	561132	VMPAL-ZAS-645	561137	VMPAL-ZAH-56
712.50 ... 722.49	561132	VMPAL-ZAS-645	561138	VMPAL-ZAH-66
722.50 ... 732.49	561133	VMPAL-ZAS-685	561135	VMPAL-ZAH-36
732.50 ... 742.49	561133	VMPAL-ZAS-685	561136	VMPAL-ZAH-46
742.50 ... 752.49	561133	VMPAL-ZAS-685	561137	VMPAL-ZAH-56
752.50 ... 762.49	561133	VMPAL-ZAS-685	561138	VMPAL-ZAH-66
762.50 ... 772.49	561134	VMPAL-ZAS-725	561135	VMPAL-ZAH-36
772.50 ... 782.49	561134	VMPAL-ZAS-725	561136	VMPAL-ZAH-46
782.50 ... 792.49	561134	VMPAL-ZAS-725	561137	VMPAL-ZAH-56
792.50 ... 802.49	561134	VMPAL-ZAS-725	561138	VMPAL-ZAH-66
802.50 ... 812.49	561175	VMPAL-ZAS-765	561135	VMPAL-ZAH-36
812.50 ... 822.49	561175	VMPAL-ZAS-765	561136	VMPAL-ZAH-46
822.50 ... 832.49	561175	VMPAL-ZAS-765	561137	VMPAL-ZAH-56
832.50 ... 842.49	561175	VMPAL-ZAS-765	561138	VMPAL-ZAH-66
842.50 ... 852.49	561176	VMPAL-ZAS-805	561135	VMPAL-ZAH-36
852.50 ... 862.49	561176	VMPAL-ZAS-805	561136	VMPAL-ZAH-46

- V Number of valve positions in width 10 mm  
W Number of valve positions in width 14 mm  
Z Number of valve positions in width 20 mm  
E Number of supply modules

## Key features – Display and operation

### Display and operation

#### Signal status indication

Every solenoid coil is allocated an LED that indicates its signal status.

- Indicator 12 shows the signal status of the coil for duct 2
- Indicator 14 shows the signal status of the coil for duct 4

#### Manual override


The manual override (MO) enables the valve to be switched when not electrically actuated or energised.

The valve is switched by pushing the manual override.

Alternatives:

- A cover cap (code: N, code: Y or as accessory) enables the manual override to be actuated by pressing it using an appropriate tool.
- A cover cap (code: V) can be fitted over the manual override to prevent it from being accidentally actuated.

### Pneumatic connection and control elements

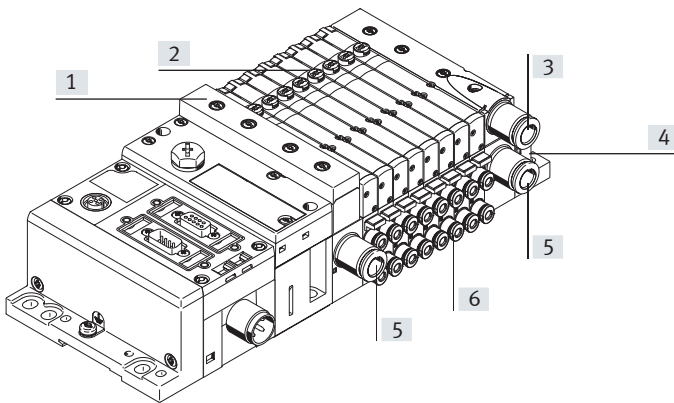


- [1] Flat plate silencer, duct 3/5
- [2] Manual override (for each pilot solenoid, non-detenting or non-detenting/detenting)
- [3] Ducted exhaust air, duct 3/5
- [4] Ports 12/14 for external pilot air supply and 82/84 for pilot exhaust air in the right end plate (depending on version also ducts 1, 3 and 5)
- [5] Supply port, duct 1
- [6] Working ports, ducts 2 and 4, for each valve position

#### Note

A manually actuated valve (using the manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the manual override.


### Manual override (MO)

#### MO with automatic return (non-detenting)



- [1] Press in the plunger of the MO with a pointed object or screwdriver. The pilot valve switches and actuates the main valve.
- [2] Remove the pointed object or screwdriver. The spring force pushes the plunger of the manual override back. The pilot valve returns to its normal position as does the single solenoid main valve (not the case with double solenoid valve code J).

#### MO with lock (detenting)




- [1] Press in the plunger of the MO with a pointed object or screwdriver until the valve switches and then turn the stem 90° clockwise until the stop is reached. The valve remains actuated
- [2] Turn the plunger 90° anti-clockwise until the stop is reached and then remove the pointed object or screwdriver. The spring force pushes the plunger of the manual override back. The valve returns to its normal position (not with double solenoid valve code J).



## Key features – Electrical components


**Manual override (MO)**

MO with cover cap, non-detenting




The MO is actuated by pushing it with a pointed object or screwdriver and reset by spring force (detenting position prevented due to cover cap).

MO with cover cap, detenting without accessories, mounting




Clip the covering onto the pilot valve. The MO is then actuated by moving the slide on the cover cap.

MO with cover cap, detenting without accessories, actuation




Moving the slide on the cover cap in the direction of the arrow results in:

- The slide locks into the end position
- The pilot valve switches and actuates the main valve.



Moving the slide on the cover cap in the direction of the arrow results in:

- The slide locks into the end position
- The spring force pushes the plunger of the manual override back.
- The pilot valve returns to its normal position as does the main single solenoid valve (not the case with double solenoid valve code J).

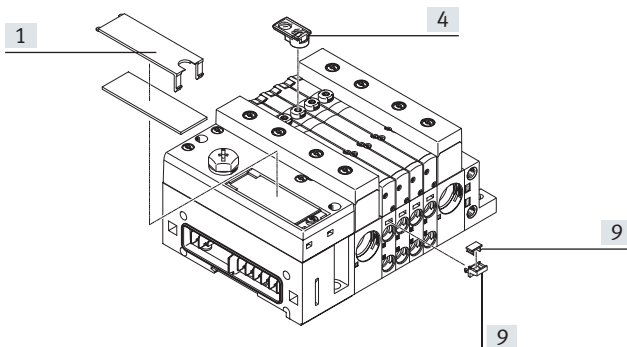**Inscription system**

A label holder VMPAL-ST-AP-10 (part no. 561109) with identification labels (part no. 18576, IBS-6x10) can be mounted on each sub-base for labelling the valves.

The inscription label holder ASLR-D-L1 can be pushed onto the manual override.

Large inscription labels can be attached to the pneumatic interface as an alternative or in addition to the smaller labels.

**Electrical power as a result of current reduction**


Each solenoid coil is protected with a spark arresting protective circuit as well as against polarity reversal.

All valve types are additionally equipped with integrated current reduction.

MPA-L valves are supplied with operating voltage in the range 21.6 ... 26.4 V (24 V +/-10%).

## Key features – Electrical components

### Electrical connection – Left end plate



The electrical connection from the valves to a higher-order controller is in the left end plate of the MPA-L.

Switching between the various connection options is easy: simply swap the left end plate; the pneumatic links remain as they are.

The valves are switched by positive or negative logic (PNP or NPN). Mixed operation is not permitted.

### Guidelines on addressing for valves/solenoid coils







- The numbering of the addresses goes from left to right in ascending consecutive order. The following applies at the individual valve positions: address x for coil 14 and address x+1 for coil 12.
- Each sub-base/electrical interlinking module occupies a defined number of addresses/pins:
  - For single solenoid valve: 1
  - For double solenoid valve: 2
  - For combination of four sub-bases for single solenoid valves: 4
  - For combination of four sub-bases for double solenoid valves: 8



#### Note


If a single solenoid valve is mounted on a double solenoid valve position, the second address (for coil 12) is also occupied and cannot be used.


## Key features – Electrical components

Variants of the left end plate					
Illustration	Code	Type	Max. number of addresses	Degree of protection	Information
<b>Electrical multi-pin plug connection</b>					
	Electrical connection: MS1	VMPAL-EPL-SD25-IP40	24	IP40	Electrical connection: Sub-D, 25-pin
	Electrical connection: MS2	VMPAL-EPL-SD9-IP40	8	IP40	Electrical connection: Sub-D, 9-pin
	Electrical connection: MS3	VMPAL-EPL-SD44-IP40	32	IP40	Electrical connection: Sub-D, 44-pin
	Electrical connection: MS6	VMPAL-EPL-SD25	24	IP67	Electrical connection: Sub-D, 25-pin
	Electrical connection: MS8	VMPAL-EPL-SD44	32	IP67	Electrical connection: Sub-D, 44-pin
	Electrical connection: MF1	VMPAL-EPL-FL40-IP40	32	IP40	Electrical connection: ribbon cable, 40-pin
	Electrical connection: MC	VMPAL-EPL-KL33-IP40	32	IP40	Electrical connection: terminal strip, 33-pin
<b>Fieldbus interface/CPX terminal</b>					
	Electrical connection: CX	VMPAL-EPL-CPX	32	IP67	Electrical connection for CPX link
<b>Interface to the remote I/O system CPX-AP-I</b>					
	Electrical connection: API	VMPAL-EPL-AP	32	IP65 IP67	Electrical connection <ul style="list-style-type: none"> <li>• 2x socket, M8x1, D-coded, 4-pin, AP-COM</li> <li>• M8x1, A-coded, 4-pin for power supply</li> </ul>
<b>I-Port interface/IO-Link®</b>					
	Electrical connection: LK	VMPAL-EPL-IPO32	32	IP65 IP67	Electrical connection: M12, 5-pin, IO-Link®
	Electrical connection: PT	VMPAL-EPL-IPO32	32	IP65 IP67	Electrical connection: M12, 5-pin, I-Port interface

## Key features – Electrical components


Pin allocation for electrical multi-pin plug connection – Sub-D plug, 9-pin


Pin		Address/coil		
	1	0	6	5
	2	1	7	6
	3	2	8	7
	4	3	9	0 V <sup>1)</sup>
	5	4		

 **Note**  
The drawing shows the view onto the pins of the Sub-D plug.

1) 0 V with positive-switching control signals; connect 24 V in the case of negative-switching control signals; mixed operation is not permitted!


Pin allocation for electrical multi-pin plug connection – Sub-D plug, 25-pin


Pin		Address/coil		
	1	0	14	13
	2	1	15	14
	3	2	16	15
	4	3	17	16
	5	4	18	17
	6	5	19	18
	7	6	20	19
	8	7	21	20
	9	8	22	21
	10	9	23	22
	11	10	24	23
	12	11	25	0 V <sup>1)</sup>
	13	12		

 **Note**  
The drawing shows the view onto the pins of the Sub-D plug.

1) 0 V with positive-switching control signals; connect 24 V in the case of negative-switching control signals; mixed operation is not permitted!

Pin allocation for electrical multi-pin plug connection – Sub-D plug, 44-pin



Pin		Address/coil		
	1	0	18	17
	2	1	19	18
	3	2	20	19
	4	3	21	20
	5	4	22	21
	6	5	23	22
	7	6	24	23
	8	7	25	24
	9	8	26	25
	10	9	27	26
	11	10	28	27
	12	11	29	28
	13	12	30	29
	14	13	31	30
	15	14	32	31
	16	15	33	n.c.
	17	16	34	n.c.
		35	n.c.	
		36	n.c.	
		37	n.c.	
		38	n.c.	
		39	n.c.	
		40	n.c.	
		41	0 V <sup>1)</sup>	
		42	0 V <sup>1)</sup>	
		43	0 V <sup>1)</sup>	
		44	0 V <sup>1)</sup>	

 **Note**  
The drawing shows the view onto the pins of the Sub-D plug.

1) 0 V with positive-switching control signals; connect 24 V in the case of negative-switching control signals; mixed operation is not permitted!



## Key features – Electrical components

Pin allocation for electrical multi-pin plug connection – Ribbon cable, 40-pin

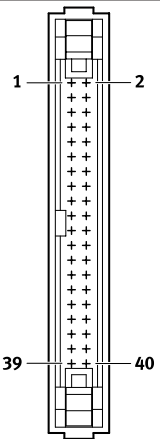Pin		Address/coil		Pin		Address/coil		Pin		Address/coil	
	1	0	18	17	35	0 V <sup>1)</sup>					
	2	1	19	18	36	0 V <sup>1)</sup>					
	3	2	20	19	37	0 V <sup>1)</sup>					
	4	3	21	20	38	0 V <sup>1)</sup>					
	5	4	22	21	39	0 V <sup>1)</sup>					
	6	5	23	22	40	0 V <sup>1)</sup>					
	7	6	24	23	 <b>Note</b> The drawing shows the view onto the pins of the ribbon cable plug. The ribbon cable connection is established using a plug in accordance with DIN EN 60603-13:1998-09 (NECU-FCG40-K). → Internet: necu						
	8	7	25	24							
	9	8	26	25							
	10	9	27	26							
	11	10	28	27							
	12	11	29	28							
	13	12	30	29							
	14	13	31	30							
	15	14	32	31							
	16	15	33	0 V <sup>1)</sup>							
	17	16	34	0 V <sup>1)</sup>							

1) 0 V with positive-switching control signals; connect 24 V in the case of negative-switching control signals; mixed operation is not permitted!

Pin allocation for electrical multi-pin plug connection – Terminal strip, 33-pin

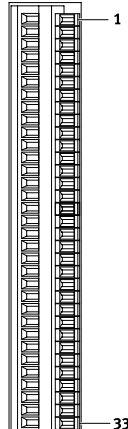Pin		Address/coil		Pin		Address/coil		Pin		Address/coil	
	1	0	16	15	31	30					
	2	1	17	16	32	31					
	3	2	18	17	33	0 V <sup>1)</sup>					
	4	3	19	18	 <b>Note</b> The drawing shows the view onto the pins of the terminal strip. Cables with the following specifications can be connected: <ul style="list-style-type: none"> <li>• Conductor cross-section 0.08 ... 0.5 mm<sup>2</sup></li> <li>• Stripped insulation 5 ... 6 mm</li> </ul>						
	5	4	20	19							
	6	5	21	20							
	7	6	22	21							
	8	7	23	22							
	9	8	24	23							
	10	9	25	24							
	11	10	26	25							
	12	11	27	26							
	13	12	28	27							
	14	13	29	28							
	15	14	30	29							

1) 0 V with positive-switching control signals; connect 24 V in the case of negative-switching control signals; mixed operation is not permitted!

## Key features – Electrical components

### Fieldbus interface/CPX terminal

All functions and features of the electrical peripherals CPX apply in combination with the CPX interface.

This means that:

- The valves and outputs are supplied via the system supply for the CPX terminal
- The valves can optionally be actuated or switched off separately from the outputs

The pneumatic interface (left end plate) serves as an adapter between the two current feeds. In the pneumatic interface, the serial signals from the CPX terminal are converted into parallel signals. The number of addresses (solenoid coils that can be connected) is set in the range 4 ... 32 solenoid coils via a selector (rotary switch) on the pneumatic interface. The default setting upon delivery provides 32 addresses. This

enables extensions to be pre-assigned in a control program and called up using manual settings. After converting or extending the valve terminal, the number of output addresses occupied by the pneumatic components must be checked and if applicable adjusted on the pneumatic interface.



**Note**

More information can be found at:

→ Internet: cpx

### remote I/O system CPX-AP-I

All functions and features of the CPX-AP-I are valid in combination with the remote I/O system CPX-AP-I:

- Power supply via the connection in the left end plate of the MPA-L

- Power supply together with other modules or individually for the valve terminal
- Valves actuated via the communication cable from the preceding module

- Cable length of up to 50 m between the modules
- Up to 80 individual modules/valve terminals per bus interface



**Note**

More information can be found at:

→ Internet: cpx-ap-i

### I-Port interface/IO-Link®

The I-Port interface/IO-Link® enables the valve terminal CPV to be connected to the following systems:

- I-Port master from Festo (CPX terminal)
- Bus node CTEU from Festo

• IO-Link® master  
The maximum distance between the I-Port/IO-Link Master and valve terminal with I-Port interface/IO-Link® is 20 m. The 5-pin connecting cables transmit the power supply for the

valves; the power supply for the internal valve terminal electronics and the control signals are separate from this.



**Note**

More information can be found at:

→ Internet: cteu


### I-Port interface/IO-Link® pin assignment


	Pin	Designation
	1	24 V DC supply voltage for electronics and inputs
	2	24 V DC load voltage supply for valves and outputs
	3	0 V DC supply voltage for electronics and sensors
	4	Communication signal C/Q, data transmission line
	5	0 V DC load voltage supply for valves and outputs

## Key features – Electrical components


Instructions for use			
Operating materials		Bio-oils	Mineral oils
<p>Operate your system with unlubricated compressed air, if possible. Festo valves and cylinders are designed so that, if used as intended, they will not require additional lubrication and will still achieve a long service life.</p> <p>The quality of compressed air downstream of the compressor must correspond to that of unlubricated compressed air. If possible, do not operate the entire system with lubricated compressed air. The lubricators should, where possible, always be installed directly upstream of the actuator requiring them.</p>	<p>Incorrect additional oil and too high an oil content in the compressed air reduce the service life of the valve terminal.</p> <p>Use Festo special oil OFSW-32 or the alternatives listed in the Festo catalogue (as specified in DIN 51524 HLP32; basic oil viscosity 32 CST at 40°C).</p>	<p>When using bio-oils (oils which are based on synthetic or native esters, e.g. rapeseed oil methyl ester), the maximum residual oil content of 0.1 mg/m<sup>3</sup> must not be exceeded (see ISO 8573-1 Class 2).</p>	<p>When using mineral oils (e.g. HLP oils to DIN 51524, parts 1 to 3) or similar oils based on poly-alpha-olefins (PAO), the maximum residual oil content of 5 mg/m<sup>3</sup> must not be exceeded (see ISO 8573-1 Class 4).</p> <p>A higher residual oil content is not permitted, regardless of the compressor oil, because the permanent lubrication would otherwise be flushed out over a period of time.</p>

## Datasheet

-  Flow rate  
up to 870 l/min

-  Width of valves  
10 mm  
14 mm  
20 mm

-  Voltage  
24 V DC

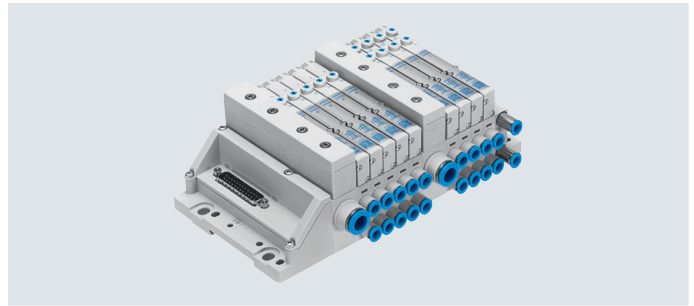

### General technical data

Valve terminal design	Valve sizes can be mixed			
Electrical control	Fieldbus	Multi-pin plug	IO-Link®	I-Port
Electric I/O system	Yes			
Actuation type	Electrical			
Type of control	Electrical			
Nominal operating voltage [V DC]	24			
Permissible voltage fluctuations [%]	±25			
Max. no. of valve positions	32			
Max. no. of pressure zones	20			
Valve size [mm]	10, 14, 20			
Signal status indication	LED			
Switching position indication	LED			
Pilot air supply	Internal or external			
Suitable for vacuum	Yes			
Mounting position	Any			
Manual override	Non-detenting, detenting			
Corrosion resistance class CRC <sup>1)</sup>	3			
Note on materials	RoHS-compliant			
Degree of protection	IP65, IP67			

1) Corrosion resistance class CRC 3 to Festo standard FN 940070  
High corrosion stress. Outdoor exposure under moderate corrosive conditions. External visible parts with primarily functional surface requirements that are in direct contact with a normal industrial environment.

### Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4] → 37			
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)			
Operating pressure	[MPa]	-0.09 ... +1		
	[bar]	-0.9 ... +10		
Ambient temperature [°C]	-5 ... +50			
Temperature of medium [°C]	-5 ... +50			
Storage temperature <sup>1)</sup> [°C]	-20 ... +40			
CE marking (see declaration of conformity)	To EU EMC Directive <sup>2)</sup>			
	To EU RoHS Directive <sup>2)</sup>			
UKCA marking (see declaration of conformity)	To UK EMC regulations <sup>2)</sup>			
	To UK RoHS regulations <sup>2)</sup>			
LABS (PWIS) conformity	VDMA24364-B1/B2-L			
Certification	c UL us - Listed (OL)			

1) Long-term storage

2) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/...) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.



## Datasheet

Technical data – Valve width 10 mm															
Code for position function 1-32		M	J	N	K	H	B	G	E	X	W	D	I		
Design		Piston spool valve													
Sealing principle		Soft													
Overlap		Positive overlap													
Flow direction		Reversible			Not reversible			Reversible			Reversible		Not reversible		
Reset method		Pneumatic spring			Pneumatic spring			Mechanical spring			Pneumatic spring				
Switching times	On	[ms]	10	10	10	10	10	10	10	10	10	10	8		
	Off	[ms]	20	–	20	20	20	35	35	35	20	20	20		
	Change-over	[ms]	–	15	–	–	–	15	15	15	–	–	–		
Standard nominal flow rate		[l/min]	360	360	300	230	300	300	320	240	255	255	230	260	
Standard nominal flow rate with QS-6		[l/min]	360	360	300	230	300	300	320	240	255	255	230	260	
Operating pressure		[MPa]	–0.09 ... +1			0.3 ... 1			–0.09 ... +1			–0.09 ... +1		0.3 ... 1	
		[bar]	–0.9 ... +10			3 ... 10			–0.9 ... +10			–0.9 ... +10		3 ... 10	
Pilot pressure		[MPa]	0.3 ... 0.8												
		[bar]	3 ... 8												
Max. tightening torque for valve mounting		[Nm]	0.25												
Corrosion resistance class CRC <sup>1)</sup>		1													
Materials		Die-cast aluminium													
Product weight		[g]	49	56	56	56	56	56	56	56	49	49	56	56	

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. Dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, or parts that are covered in the application (e.g. drive trunnions).

Technical data – Valve width 10 mm												
Code for position function 1-32		MS	NS	KS	HS	DS	MU	NU	KU	HU		
Design		Piston spool valve					Poppet valve with spring return					
Sealing principle		Soft					Soft					
Overlap		Positive overlap					Negative overlap					
Flow direction		Reversible					Reversible					
Reset method		Mechanical spring					Mechanical spring					
Switching times	On	[ms]	10	14	14	14	14	10	8	10		
	Off	[ms]	27	16	16	16	16	14	8	10		
	Change-over	[ms]	–	–	–	–	–	–	–	–		
Maximum switching frequency		[Hz]	2	–	–	–	–	–	–	–		
Standard nominal flow rate		[l/min]	360	300	230	300	230	140 ... 190	190	160	140 ... 190	
Standard nominal flow rate with QS-6		[l/min]	360	300	230	300	230	140 ... 190	190	160	140 ... 190	
Note on standard nominal flow rate		–					1 → 2: 190 l/min 1 → 4: 140 l/min		–		1 → 2: 190 l/min 1 → 4: 140 l/min	
Operating pressure		[MPa]	–0.09 ... +0.8					–0.09 ... +1				
		[bar]	–0.9 ... +8					–0.9 ... +10				
Pilot pressure		[MPa]	0.3 ... 0.8					0.4 ... 0.8				
		[bar]	3 ... 8					4 ... 8				
Max. tightening torque for valve mounting		[Nm]	0.25					0.25				
Corrosion resistance class CRC <sup>1)</sup>		1					3					
Materials		Die-cast aluminium					Reinforced PPA					
Product weight		[g]	56					35		42		42

1) Corrosion resistance class CRC 1 to Festo standard FN 940070

Low corrosion stress. Dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, or parts that are covered in the application (e.g. drive trunnions).

Corrosion resistance class CRC 3 to Festo standard FN 940070

High corrosion stress. Outdoor exposure under moderate corrosive conditions. External visible parts with primarily functional surface requirements that are in direct contact with a normal industrial environment.

## Datasheet

Technical data – Valve width 14 mm									
Code for position function 1-32		M	J	N	K	H	B	G	E
Design		Piston spool valve							
Sealing principle		Soft							
Overlap		Positive overlap							
Flow direction		Reversible			Not reversible		Reversible		
Reset method		Pneumatic spring					Mechanical spring		
Switching times	On [ms]	13	9	9	10	10	12	10	12
	Off [ms]	30	–	28	28	26	40	40	40
	Change-over [ms]	–	24	–	–	–	18	20	18
Standard nominal flow rate [l/min]		550 ... 670	550 ... 670	550 ... 650	550 ... 600	550 ... 650	550 ... 630	500 ... 610	420 ... 480
Standard nominal flow rate with QS-8 [l/min]		550 ... 720	550 ... 670	550 ... 730	550 ... 760	550 ... 730	550 ... 690	500 ... 660	420 ... 550
Note on standard nominal flow rate [l/min]	MPA-S: 550	MPA-S: 550	MPA-S: 550	MPA-S: 550	MPA-S: 550	MPA-S: 550	MPA-S: 550	MPA-S: 500	MPA-S: 420
	MPA-L: 670	MPA-L: 670	MPA-L: 650	MPA-L: 600	MPA-L: 650	MPA-L: 630	MPA-L: 610	MPA-L: 480	
Operating pressure [MPa]	–0.09 ... +1	0.3 ... 1			–0.09 ... +1				
	–0.9 ... +10 [bar]	3 ... 10			–0.9 ... +10				
Pilot pressure [MPa]	0.3 ... 0.8								
	3 ... 8 [bar]								
Max. tightening torque for valve mounting [Nm]		0.65							
Corrosion resistance class CRC <sup>1)</sup>		1							
Materials		Die-cast aluminium							
Product weight [g]		77							

1) Corrosion resistance class CRC 1 to Festo standard FN 940070  
 Low corrosion stress. Dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, or parts that are covered in the application (e.g. drive trunnions).

Technical data – Valve width 14 mm										
Code for position function 1-32		X	W	D	I	MS	NS	KS	HS	DS
Design		Piston spool valve								
Sealing principle		Soft								
Overlap		Positive overlap								
Flow direction		Reversible			Not reversible		Reversible			
Reset method		Pneumatic spring					Mechanical spring			
Switching times	On [ms]	12	12	9	10	13	12	12	12	10
	Off [ms]	20	20	26	28	41	20	20	23	20
	Change-over [ms]	–	–	–	–	–	–	–	–	–
Maximum switching frequency [Hz]		–	–	–	–	2	–	–	–	–
Standard nominal flow rate [l/min]		360 ... 400	300 ... 340	550 ... 650	550 ... 670	550 ... 670	470 ... 520	470 ... 560	470 ... 520	500 ... 570
Standard nominal flow rate with QS-8 [l/min]		360 ... 510	300 ... 450	550 ... 720	550 ... 730	550 ... 730	470 ... 550	470 ... 600	470 ... 550	500 ... 570
Note on standard nominal flow rate [l/min]	MPA-S: 360	MPA-S: 340	MPA-S: 550	MPA-S: 550	MPA-S: 550	MPA-S: 470	MPA-S: 470	MPA-S: 470	MPA-S: 500	
	MPA-L: 400	MPA-L: 300	MPA-L: 650	MPA-L: 670	MPA-L: 670	MPA-L: 520	MPA-L: 560	MPA-L: 520	MPA-L: 570	
Operating pressure [MPa]	–0.09 ... +1	0.3 ... 1			–0.09 ... +0.8					
	–0.9 ... +10 [bar]	3 ... 10			–0.9 ... +8					
Pilot pressure [MPa]	0.3 ... 0.8									
	3 ... 8 [bar]									
Max. tightening torque for valve mounting [Nm]		0.65				0.65	0.25			
Corrosion resistance class CRC <sup>1)</sup>		1								
Materials		Die-cast aluminium								
Product weight [g]		77								

1) Corrosion resistance class CRC 1 to Festo standard FN 940070  
 Low corrosion stress. Dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, or parts that are covered in the application (e.g. drive trunnions).

## Datasheet

Technical data – Valve width 20 mm											
Code for position function 1-32		M	J	N	K	H	B	G	E		
Design		Piston spool valve									
Sealing principle		Soft									
Overlap		Positive overlap									
Flow direction		Reversible			Not reversible			Reversible			
Reset method		Pneumatic spring						Mechanical spring			
Switching times	On	[ms]	15	9	8	8	8	11	10	11	
	Off	[ms]	28	–	28	28	28	46	40	47	
	Change-over	[ms]	–	22	–	–	–	23	21	23	
Standard nominal flow rate		[l/min]	870	860	550 ... 600	500 ... 550	550	550	750	700	
Standard nominal flow rate with QS-8		[l/min]	–	–	550	500	550	450	–	–	
Standard nominal flow rate with QS-10		[l/min]	870	860	600	550	550	550	750	700	
Note on standard nominal flow rate		[l/min]	–	–	MPA-S: 550	MPA-S: 500	–	–	–	–	
		[l/min]	–	–	MPA-L: 600	MPA-L: 550	–	–	–	–	
Operating pressure		[MPa]	–0.09 ... +1			0.3 ... 1			–0.09 ... +1		
		[bar]	–0.9 ... +10			3 ... 10			–0.9 ... +10		
Pilot pressure		[MPa]	0.3 ... 0.8								
		[bar]	3 ... 8								
Max. tightening torque for valve mounting		[Nm]	0.65								
Corrosion resistance class CRC <sup>1)</sup>			1								
Materials			Die-cast aluminium								
Product weight		[g]	100								

1) Corrosion resistance class CRC 1 to Festo standard FN 940070  
Low corrosion stress. Dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, or parts that are covered in the application (e.g. drive trunnions).

Technical data – Valve width 20 mm											
Code for position function 1-32		X	W	D	I	MS	NS	KS	HS	DS	
Design		Piston spool valve									
Sealing principle		Soft									
Overlap		Positive overlap									
Flow direction		Reversible			Not reversible			Reversible			
Reset method		Pneumatic spring						Mechanical spring			
Switching times	On	[ms]	13	13	7	7	8	12	12	12	
	Off	[ms]	22	22	25	25	36	25	25	25	
	Change-over	[ms]	–	–	–	–	–	–	–	–	
Maximum switching frequency		[Hz]	–	–	–	–	2	–	–	–	
Standard nominal flow rate		[l/min]	350	480	650 ... 840	650 ... 850	670 ... 840	550 ... 580	500	550	
Standard nominal flow rate with QS-8		[l/min]	–	–	650	650	670	550	500	550	
Standard nominal flow rate with QS-10		[l/min]	350	480	840	850	840	580	480	550	
Note on standard nominal flow rate		[l/min]	–	–	MPA-S: 650	MPA-S: 650	MPA-S: 670	MPA-S: 550	MPA-S: 500	–	
		[l/min]	–	–	MPA-L: 840	MPA-L: 850	MPA-L: 840	MPA-L: 580	MPA-L: 480	–	
Operating pressure		[MPa]	–0.09 ... +1			0.3 ... 1			–0.09 ... +0.8		
		[bar]	–0.9 ... +10			3 ... 10			–0.9 ... +8		
Pilot pressure		[MPa]	0.3 ... 0.8								
		[bar]	3 ... 8								
Max. tightening torque for valve mounting		[Nm]	0.65								
Corrosion resistance class CRC <sup>1)</sup>			1								
Materials			Die-cast aluminium								
Product weight		[g]	100								

1) Corrosion resistance class CRC 1 to Festo standard FN 940070  
Low corrosion stress. Dry indoor applications or transport and storage protection. Also applies to parts behind covers, in the non-visible interior area, or parts that are covered in the application (e.g. drive trunnions).

## Datasheet



Safety characteristics		Valve width 10 mm	Valve width 14 mm	Valve width 20 mm
Max. positive test pulse with logic 0	[μs]	400	400	400
Max. negative test pulse with logic 1	[μs]	200	200	900
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27		
Vibration resistant		Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6		
<b>Pneumatic connections</b>				
<b>Right end plate</b>				
Supply	1	Thread G1/4 (straight or angled push-in fitting, for tubing O.D. 6 mm, 8 mm, 10 mm, 12 mm, 5/16", 3/8")		
Exhaust port	3	Thread G1/4 (straight or angled push-in fitting, for tubing O.D. 6 mm, 8 mm, 10 mm, 5/16", 3/8")		
	5	Thread G1/4 (straight or angled push-in fitting, for tubing O.D. 6 mm, 8 mm, 10 mm, 5/16", 3/8")		
Pilot air supply	12/14	Thread M7 (straight or angled push-in fitting, for tubing O.D. 4 mm, 6 mm; straight push-in fitting, for tubing O.D. 3/16", 1/4")		
Pilot exhaust air	82/84	Thread M7 (straight or angled push-in fitting, for tubing O.D. 4 mm, 6 mm; straight push-in fitting, for tubing O.D. 3/16", 1/4")		
<b>Power supply module with exhaust plate</b>				
Supply	1	Cartridge 20 mm (straight cartridge, for tubing O.D. 8 mm, 10 mm, 12 mm, 5/16", 3/8", 1/2", adapter for thread G1/4), flat plate silencer		
Exhaust port	3/5	Cartridge 20 mm (straight cartridge, for tubing O.D. 8 mm, 10 mm, 12 mm, 5/16", 3/8", 1/2", adapter for thread G1/4), flat plate silencer		
<b>Vertical pressure supply plate, width 20 mm</b>				
Supply	1	Thread G1/8 (straight push-in fitting, for tubing O.D. 8 mm, 10 mm, 5/16", 3/8")		
<b>Sub-base, width 10 mm</b>				
Working ports	2	Cartridge 10 mm (straight or angled cartridge, for tubing O.D. 4 mm, 6 mm, 5/32", 1/4", adapter for thread M7)		
	4	Cartridge 10 mm (straight or angled cartridge, for tubing O.D. 4 mm, 6 mm, 5/32", 1/4", adapter for thread M7)		
<b>Sub-base, width 14 mm</b>				
Working ports	2	Cartridge 14 mm (straight or angled cartridge, for tubing O.D. 6 mm, 8 mm, 1/4", 5/16", adapter for thread G1/8)		
	4	Cartridge 14 mm (straight or angled cartridge, for tubing O.D. 6 mm, 8 mm, 1/4", 5/16", adapter for thread G1/8)		
<b>Sub-base, width 20 mm</b>				
Working ports	2	Cartridge 18 mm (straight or angled cartridge, for tubing O.D. 8 mm, 10 mm, 5/16", 3/8", adapter for thread G1/4)		
	4	Cartridge 18 mm (straight or angled cartridge, for tubing O.D. 8 mm, 10 mm, 5/16", 3/8", adapter for thread G1/4)		

# Datasheet

## Pilot pressure p2 as a function of working pressure p1 with external pilot air supply

For valves with code for position function 1-32: M, J, B, G, E, W, X



For valves with code for position function 1-32: N, K, H, D, I

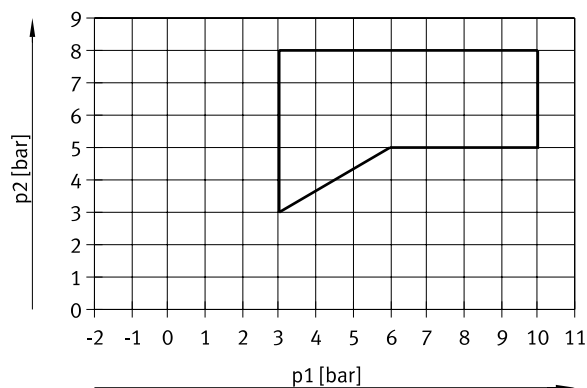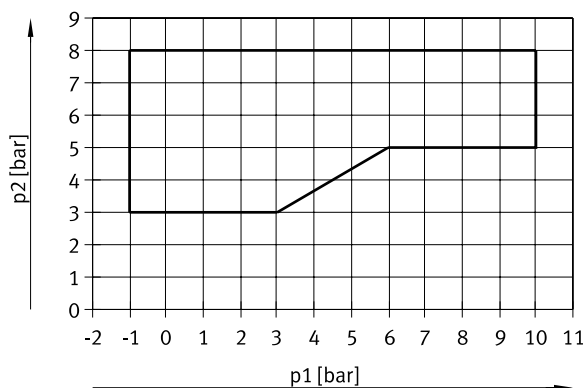

## Pilot pressure p2 as a function of working pressure p1 for valves with mechanical spring return



For valves in width 10 mm with code for position function 1-32: MS, NS, KS, HS, DS

For valves in width 14 mm with code for position function 1-32: MS, NS, KS, HS, DS

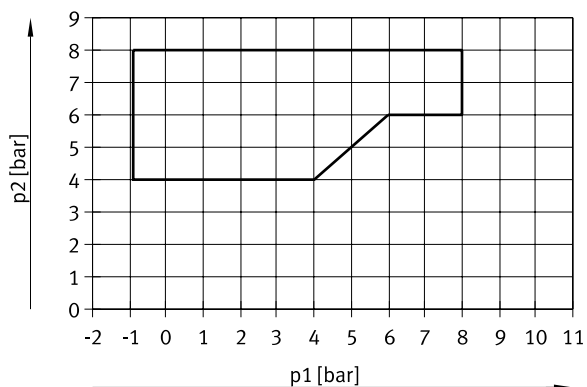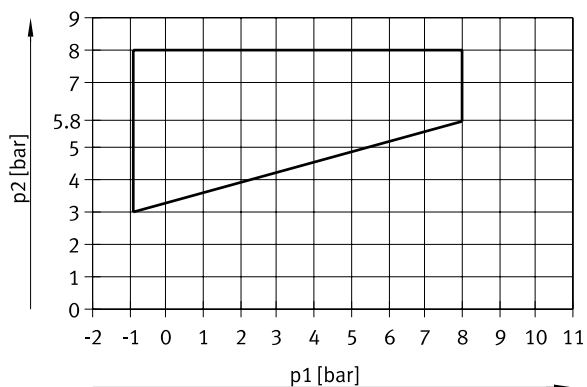

For valves in width 20 mm with code for position function 1-32: MS, NS, KS, HS, DS

For valves in width 10 mm with code for position function 1-32: MU, NU, KU, HU

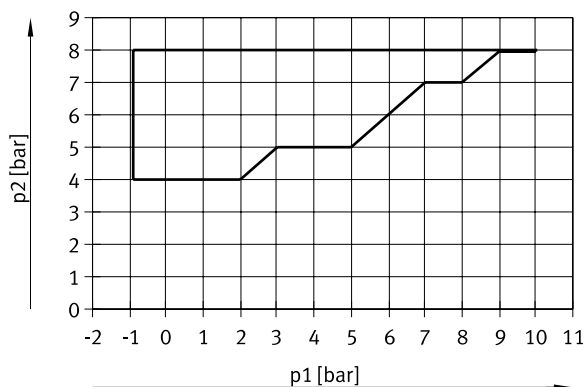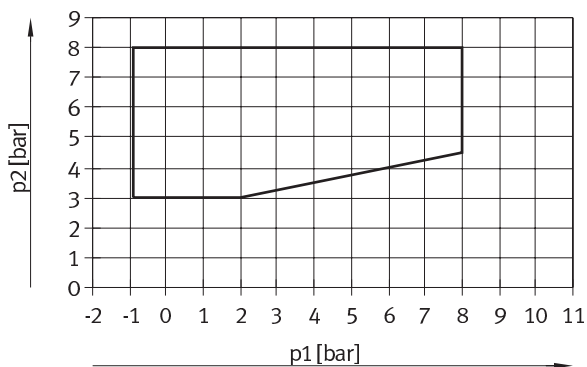

## Datasheet

**Current consumption per solenoid coil at nominal voltage**

		Width		
		10 mm	14 mm	20 mm
Nominal pick-up current	[mA]	50	50	110
Nominal current with current reduction	[mA]	10	10	23
Time until current reduction	[ms]	20	20	20

**Electrical data – MPA-L with electrical connection for CPX terminal****Intrinsic current consumption of the valve terminal (internal electronics, without valves)**

At 24 V $U_{EL/SEN}^{1)}$	[mA]	typ. 13
At 24 V $U_{val}^{2)}$	[mA]	typ. 35

**Diagnostic message**

Undervoltage $U_{AUS}^{3)}$	[V]	17.7 ... 17.8
-----------------------------	-----	---------------

1) Power supply for electronics and sensors

2) Load voltage supply for valves

3) Load voltage outside of function range

**Electrical data – MPA-L with electrical connection for remote I/O system CPX-AP-I****Intrinsic current consumption of the valve terminal (internal electronics, without valves)**

At 24 V $U_{EL/SEN}^{1)}$	[mA]	Typ. 30
At 24 V $U_{val}^{2)}$	[mA]	typ. 15

1) Power supply for electronics and sensors

2) Load voltage supply for valves

**Electrical data – MPA-L with I-Port interface/IO-Link®****Intrinsic current consumption of the valve terminal (internal electronics, without valves)**

Operating voltage	[mA]	30
Load voltage	[mA]	30

**Materials**

Connecting plate	PA
Supply module	PPA
End plate	Die-cast aluminium, PA, PBT
Seals	NBR
Exhaust air plate	PA
Flat plate silencer	PE
Electrical interlinking module	PBT, PA, copper alloy
Pressure regulator plate	PA
Vertical pressure shut-off plate	Reinforced PA, wrought aluminium alloy
Vertical pressure supply plate	Reinforced PA
Tie rods	High-alloy stainless steel

## Datasheet

Product weight [g]	
CPX module (complete)	Approx. 210
Left end plate with interface to the remote I/O system CPX-AP-I	194
Left end plate, multi-pin plug, Sub-D, 44-pin	130
Left end plate, I-Port interface/IO-Link	170
Power supply module with electrical interlinking module, without cartridge	64
Power supply module with electrical interlinking module, with cartridge	70
Right end plate without supply ports	105
Right end plate with supply ports	160
Valve	→ 39
M4 screw for tie rod <sup>1)</sup>	3
M3 screw for linking four sub-bases <sup>2)</sup>	70
Sleeve <sup>1)</sup> , internal hex 4 mm	18/24/27/33 (36/46/56/66 mm for tie rod)
Tie rod extender <sup>1)</sup>	23/31/46 (for extending the valve terminal by one sub-base with a width of 10/14/20 mm)
	279/387 (for extending the valve terminal by four sub-bases with a width of 10/14 mm)
Plate for ducted exhaust air/flat plate silencer	36/40
QSM-M7-4-I	4
QSM-M7-6-I	5
QS-G1/4-8-I	22
QS-G1/4-10-I	23
QSPKG10-3	1.5
QSPKG10-4	1.4
QSPKG10-6	1.8
QSPKG20-8	6
QSPKG20-10	9
QSPKG20-12	13

1) Weight for pack of 3

2) Weight for pack of 10

Product weight [g]	Product weight [g]		
	Width 10 mm	Width 14 mm	Width 20 mm
Black sub-base (with seal, fibre-optic cable)	21	33	47
Electrical interlinking module for one sub-base	9	9	14
Electrical interlink module for combining four sub-bases	29	29	–
Per vacant position L	20	40	45
Pressure regulator plate	74	76	180
Vertical pressure shut-off plate	60	240	–
Vertical pressure supply plate	–	30	70

Product weight – Threaded rod for tie rod																	
Length [mm]	5	45	85	125	165	205	245	285	325	365	405	445	485	525	565	605	645
Product weight <sup>1)</sup> [g]	6	33	60	60	114	141	168	192	219	246	273	300	327	354	378	405	432
Length [mm]	685	725	765	805													
Product weight <sup>1)</sup> [g]	459	483	513	540													


1) Weight for pack of 3

Datasheet

Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Valve terminal with multi-pin plug connection:

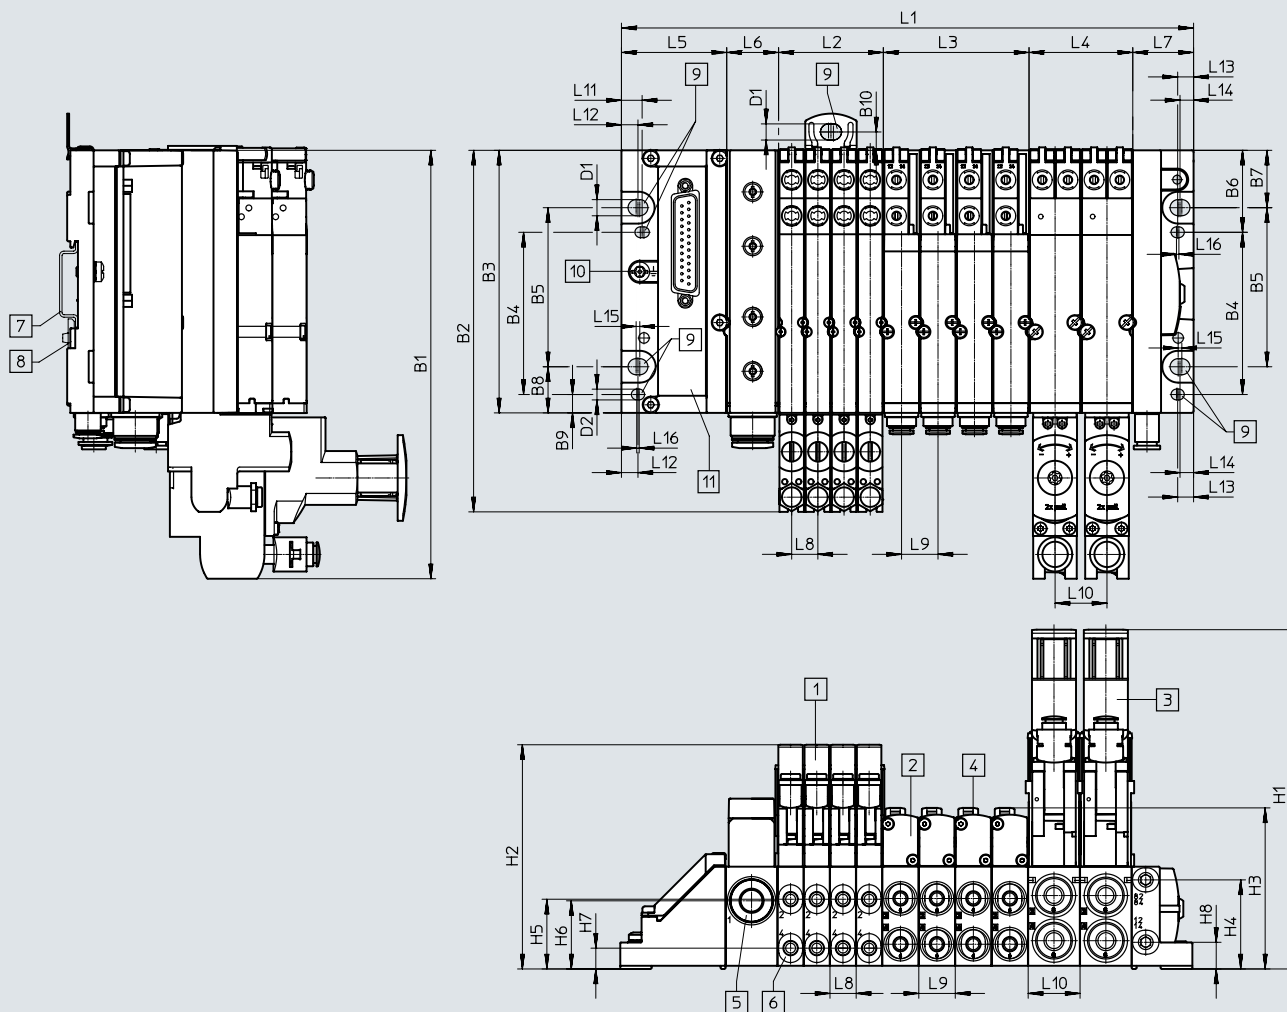

- [1] Solenoid valve VMPA1                      [4] Manual override                      [7] DIN rail                      [10] Earthing screw
- [2] Solenoid valve VMPA14                      [5] Supply module                      [8] DIN mounting                      [11] Multi-pin plug connection
- [3] Solenoid valve VMPA2                      [6] Working ports                      [9] Mounting holes

Type	L1 <sup>1)</sup>	L2 <sup>1)</sup>	L3 <sup>1)</sup>	L4 <sup>1)</sup>	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16
MPA-L	89.1 + L2 + L3 + L4	m x 10.7	n x 14.9	o x 21.2	43	21.2	24.9	10.7	14.9	21.2	8.5	6.8	6.5	5.6	1.5	1

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10
MPA-L	175.1	147.8	107.3	66.3	65	33.5	23.5	18.9	7.5	7.5

Type	D1	D2	H1	H2	H3	H4	H5	H6	H7	H8
MPA-L	6.6	4.4	138.7	92.6	65.7	36.4	28.5	7.9	8.5	10.9

1) m, n, o = number of sub-bases/valve positions (m = width 10 mm, n = width 14 mm, o = width 20 mm)




# Datasheet


## Dimensions – Hood for multi-pin plug connection

Download CAD data → [www.festo.com](http://www.festo.com)

Cable outlet to the front

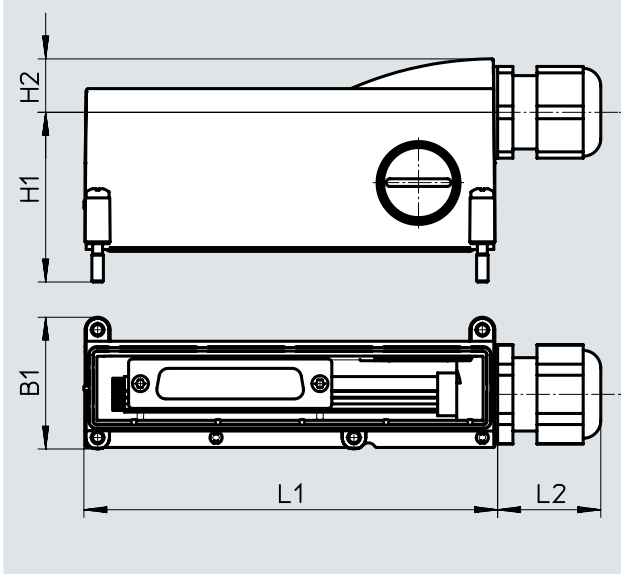

Cable outlet on the side

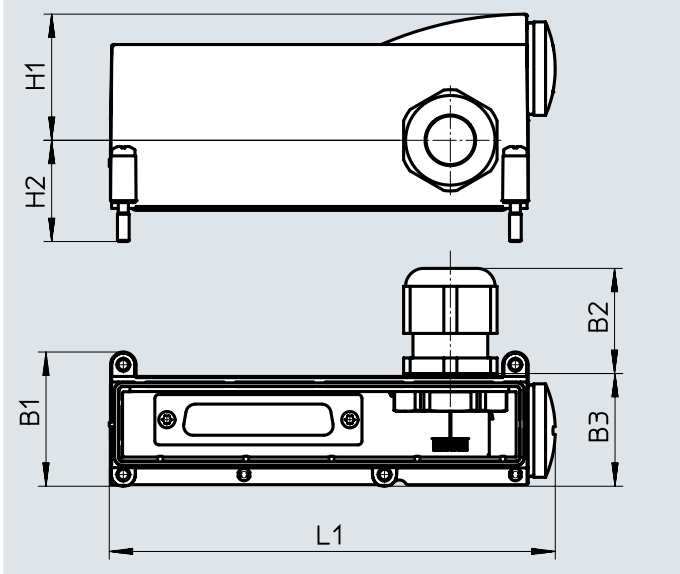


Type	L1	L2	H1	H2	B1	B2	B3
Cable outlet to the front	108.3	27	44.4	14	34.5	–	–
Cable outlet on the side	114.5	–	32.4	26	34.5	27	29

Datasheet

Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Valve terminal with fieldbus interface

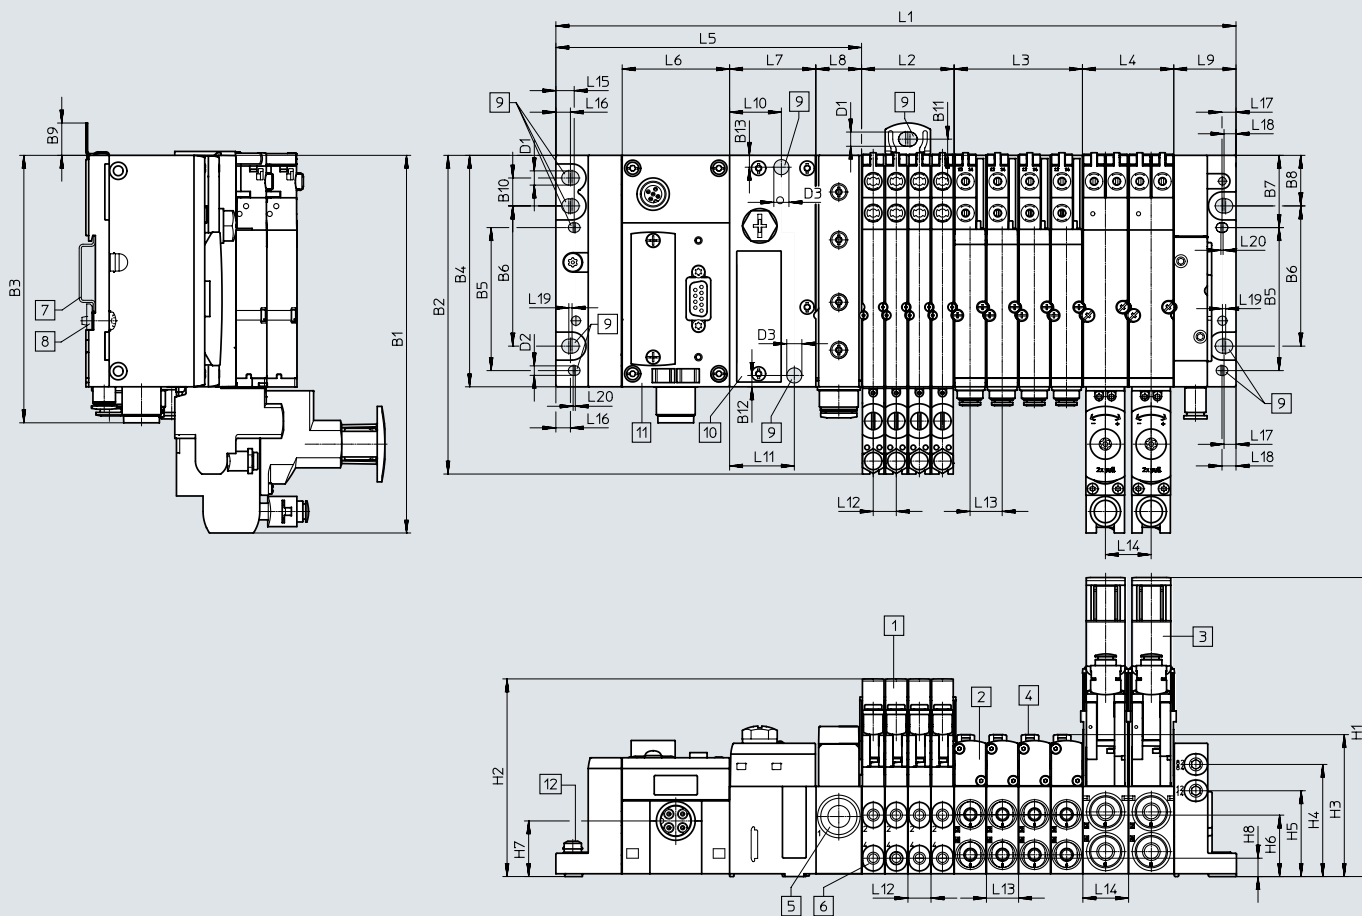

- [1] Solenoid valve VMPA1
- [2] Solenoid valve VMPA14
- [3] Solenoid valve VMPA2
- [4] Manual override
- [5] Supply module
- [6] Working ports
- [7] DIN rail
- [8] DIN mounting
- [9] Mounting holes
- [10] Pneumatic interface, CPX terminal
- [11] CPX module
- [12] Earthing screw

Type	L1 <sup>1)</sup>	L2 <sup>1)</sup>	L3 <sup>1)</sup>	L4 <sup>1)</sup>	L5	L6	L7	L8	L9
MPA-L	170.65 + L2 + L3 + L4	m x 10.7	n x 14.9	o x 21.2	142	50	40.1	21.2	28.8

Type	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19	L20
MPA-L	24	30	10.7	14.9	21.2	8.5	6.75	5.55	6.5	1.5	1

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13
MPA-L	175.1	147.8	124	107.3	66.3	65	33.5	23.45	15	12.95	7.5	5.25	5.5

Type	D1	D2	D3	H1	H2	H3	H4	H5	H6	H7	H8
MPA-L	6.6	4.4	7	138.7	92.6	65.7	52	39.8	28.5	25.8	8.5


1) m, n, o = number of sub-bases/valve positions (m = width 10 mm, n = width 14 mm, o = width 20 mm)

Datasheet

Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Valve terminal with interface to the remote I/O system CPX-AP-I

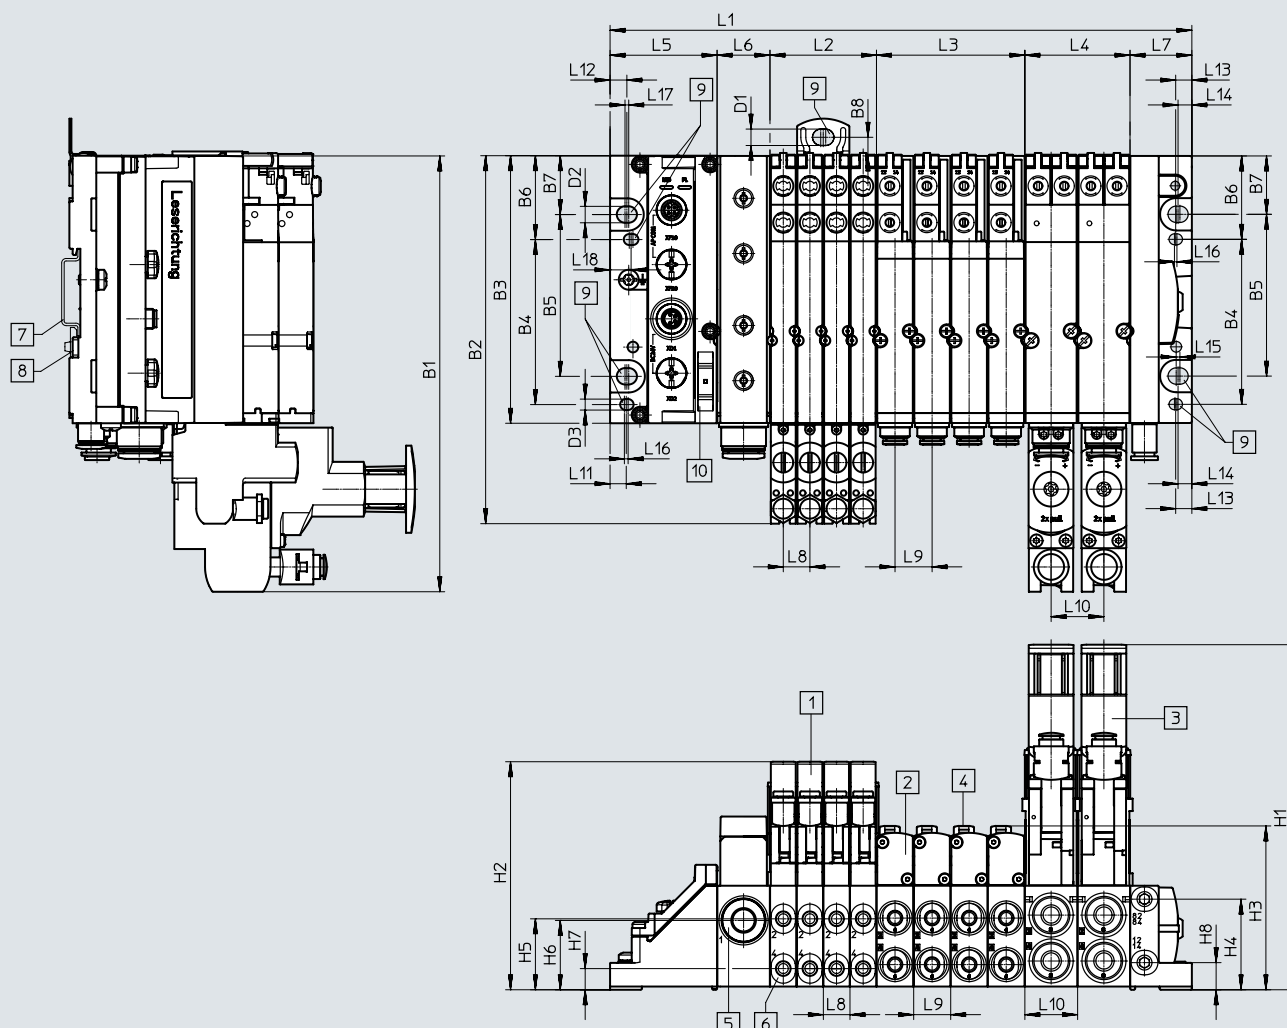

- [1] Solenoid valve VMPA1                      [4] Manual override                      [7] DIN rail                      [10] Left end plate with CPX-AP-I interface
- [2] Solenoid valve VMPA14                      [5] Supply module                      [8] DIN mounting
- [3] Solenoid valve VMPA2                      [6] Working ports                      [9] Mounting holes

Type	B1	B2	B3	B4	B5	B6	B7	B8	D1	D2	D3	H1	H2	H3	H4	H5	H6	H7	H8
MPA-L	175	147.8	107.3	66.3	65	33.7	23.7	18.9	6.6	6.6	4.4	138.7	92.6	65.7	36.4	28.5	27.9	8.5	10.9

Type	L1 <sup>1)</sup>	L2 <sup>1)</sup>	L3 <sup>1)</sup>	L4 <sup>1)</sup>	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18
MPA-L	89.1 + L2 + L3 + L4	m x 10.7	n x 14.9	o x 21.2	43	21.2	24.9	10.7	14.9	21.2	6.5	6.8	6.5	5.6	1.5	1.5	1.5	8.5


1) m, n, o = number of sub-bases/valve positions (m = width 10 mm, n = width 14 mm, o = width 20 mm)

Datasheet

Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

Valve terminal with I-Port interface/IO-Link®

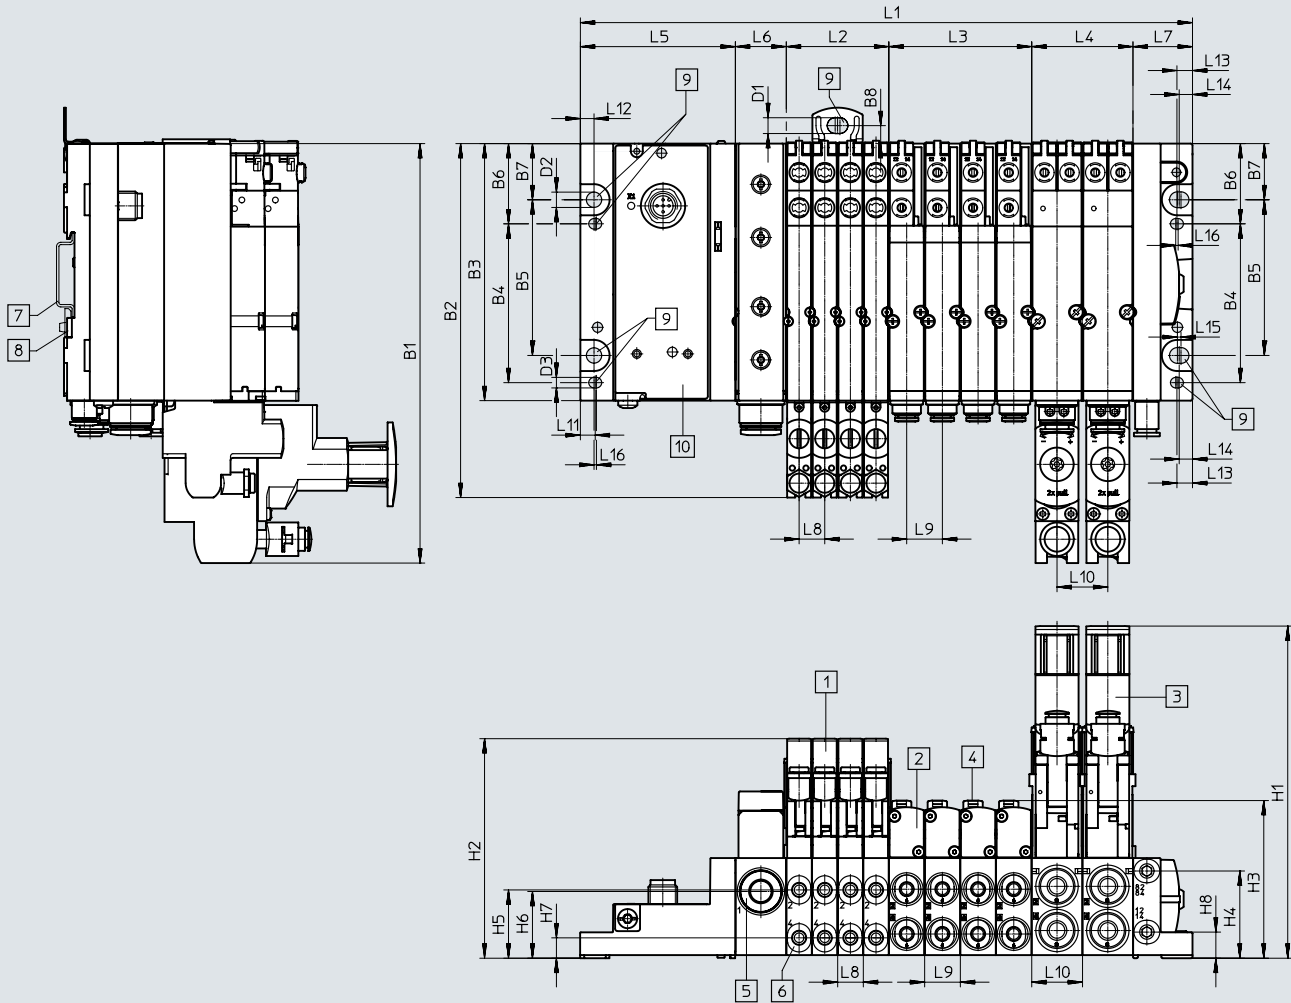



- [1] Solenoid valve VMPA1
- [2] Solenoid valve VMPA14
- [3] Solenoid valve VMPA2
- [4] Manual override
- [5] Supply module
- [6] Working ports
- [7] DIN rail
- [8] DIN mounting
- [9] Mounting holes
- [10] Left end plate with I-Port interface/IO-Link®

Type	B1	B2	B3	B4	B5	B6	B7	B8	D1	D2	D3	H1	H2	H3	H4	H5	H6	H7	H8
MPA-L	175.1	147.8	107.3	66.3	65	33.5	23.5	18.9	6.6	6.4	4.5	138.7	92.6	65.7	36.4	28.5	27.9	8.5	10.9






Type	L1 <sup>1)</sup>	L2 <sup>1)</sup>	L3 <sup>1)</sup>	L4 <sup>1)</sup>	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16
MPA-L	110.9 + L2 + L3 + L4	m x 10.7	n x 14.9	o x 21.2	64.8	21.2	24.9	10.7	14.9	21.2	6.2	5.7	6.5	5.6	1.5	1

1) m, n, o = number of sub-bases/valve positions (m = width 10 mm, n = width 14 mm, o = width 20 mm)




## Accessories

Ordering data				
	Code	Valve function	Part no.	Type
<b>Individual solenoid valve – Width 10 mm</b>				
	<b>5/2-way valve</b>			
	Position function 1-32: M	Single solenoid	533342	VMPA1-M1H-M-PI
	Position function 1-32: MS	Single solenoid, mechanical spring return	571334	VMPA1-M1H-MS-PI
	Position function 1-32: MU	Polymer poppet valve, single solenoid, Mechanical spring return	553113	VMPA1-M1H-MU-PI
	Position function 1-32: J	Double solenoid	533343	VMPA1-M1H-J-PI
	<b>2x 3/2-way valve</b>			
	Position function 1-32: N	Normally open	533348	VMPA1-M1H-N-PI
	Position function 1-32: NS	Normally open, Mechanical spring return	556839	VMPA1-M1H-NS-PI
	Position function 1-32: NU	Polymer poppet valve, normally open, Mechanical spring return	553111	VMPA1-M1H-NU-PI
	Position function 1-32: K	Normally closed	533347	VMPA1-M1H-K-PI
	Position function 1-32: KS	Normally closed, Mechanical spring return	556838	VMPA1-M1H-KS-PI
	Position function 1-32: KU	Polymer poppet valve, normally closed, Mechanical spring return	553110	VMPA1-M1H-KU-PI
	Position function 1-32: H	1x normally open, 1x normally closed	533349	VMPA1-M1H-H-PI
	Position function 1-32: HS	1x normally open, 1x normally closed, Mechanical spring return	556840	VMPA1-M1H-HS-PI
	Position function 1-32: HU	Polymer poppet valve, 1x normally open, 1x normally closed, Mechanical spring return	553112	VMPA1-M1H-HU-PI
	<b>5/3-way valve</b>			
	Position function 1-32: B	Mid-position pressurised	533344	VMPA1-M1H-B-PI
	Position function 1-32: G	Mid-position closed	533345	VMPA1-M1H-G-PI
	Position function 1-32: E	Mid-position exhausted	533346	VMPA1-M1H-E-PI
	<b>1x 3/2-way valve</b>			
	Position function 1-32: W	Normally open, external compressed air supply	540050	VMPA1-M1H-W-PI
	Position function 1-32: X	Normally closed, external compressed air supply	534415	VMPA1-M1H-X-PI
	<b>2x 2/2-way valve</b>			
Position function 1-32: D	Normally closed	533350	VMPA1-M1H-D-PI	
Position function 1-32: DS	Normally closed, Mechanical spring return	556841	VMPA1-M1H-DS-PI	
Position function 1-32: I	1x normally closed, 1x normally closed, reversible only	543605	VMPA1-M1H-I-PI	
<b>Vacant position – Width 10 mm</b>				
	Position function 1-32: L	Cover plate for a valve position, width 10 mm A self-adhesive label is supplied.	533351	VMPA1-RP







Accessories

Ordering data		Code	Description	Part no.	Type	
<b>Vertical stacking modules – Width 10 mm</b>						
	Pressure regulator 1-32: PF	Pressure regulator plate with fixed threaded connection M5	For port 1	0.5 ... 6 bar	<b>564911</b>	<b>VMPA1-B8-R1-M5-06</b>
	Pressure regulator 1-32: PA			0.5 ... 8.5 bar	<b>564908</b>	<b>VMPA1-B8-R1-M5-10</b>
	Pressure regulator 1-32: PH		For port 2	2 ... 6 bar	<b>564912</b>	<b>VMPA1-B8-R2-M5-06</b>
	Pressure regulator 1-32: PC			2 ... 8.5 bar	<b>564909</b>	<b>VMPA1-B8-R2-M5-10</b>
	Pressure regulator 1-32: PG		For port 4	2 ... 6 bar	<b>564913</b>	<b>VMPA1-B8-R3-M5-06</b>
	Pressure regulator 1-32: PB			2 ... 8.5 bar	<b>564910</b>	<b>VMPA1-B8-R3-M5-10</b>
	Pressure regulator 1-32: PF	Pressure regulator plate with swivelling threaded connection M5	For port 1	0.5 ... 6 bar	<b>549052</b>	<b>VMPA1-B8-R1C2-C-06</b>
	Pressure regulator 1-32: PA			0.5 ... 8.5 bar	<b>543339</b>	<b>VMPA1-B8-R1C2-C-10</b>
	Pressure regulator 1-32: PH		For port 2	2 ... 6 bar	<b>549053</b>	<b>VMPA1-B8-R2C2-C-06</b>
	Pressure regulator 1-32: PC			2 ... 8.5 bar	<b>543340</b>	<b>VMPA1-B8-R2C2-C-10</b>
	Pressure regulator 1-32: PG		For port 4	2 ... 6 bar	<b>549054</b>	<b>VMPA1-B8-R3C2-C-06</b>
	Pressure regulator 1-32: PB			2 ... 8.5 bar	<b>543341</b>	<b>VMPA1-B8-R3C2-C-10</b>
	Pressure regulator 1-32: PS	Vertical pressure shut-off plate For manually disconnecting an individual valve from the compressed air supply of the valve terminal (duct 1 and 12/14 pilot air supply), operating pressure 3 ... 8, internal pilot air supply		<b>567805</b>	<b>VMPA1-HS</b>	
	Pressure gauge 1-32: VE	Screw-in pressure gauge with M5 thread for pressure regulator plate with rotatable threaded connection	Unit of measure: bar	<b>132340</b>	<b>MA-15-10-M5</b>	
	Pressure gauge 1-32: VD			Unit of measure: psi	<b>132341</b>	<b>MA-15-145-M5-PSI</b>
	Pressure gauge 1-32: VC	Push-in fitting, self-sealing, with M5 thread for pressure regulator plate		<b>153291</b>	<b>QSK-M5-4</b>	

## Accessories



Ordering data		Code	Description	Part no.	Type
<b>Fixed flow restrictor – Width 10 mm</b>					
	Pneumatic connection 3, 1-40: V03	Hollow bolt, for restricting the exhaust air	3.5 ... 5.5 l/min	572544	VMPA1-FT-NW0.3-10
	Pneumatic connection 5, 1-40: Q03				
	Pneumatic connection 3, 1-40: V05		9 ... 12 l/min	572545	VMPA1-FT-NW0.5-10
	Pneumatic connection 5, 1-40: Q05				
	Pneumatic connection 3, 1-40: V07		18 ... 22 l/min	572546	VMPA1-FT-NW0.7-10
	Pneumatic connection 5, 1-40: Q07				
	Pneumatic connection 3, 1-40: V10		36 ... 41 l/min	572547	VMPA1-FT-NW1.0-10
	Pneumatic connection 5, 1-40: Q10				
	Pneumatic connection 3, 1-40: V12		52 ... 58 l/min	572548	VMPA1-FT-NW1.2-10
	Pneumatic connection 5, 1-40: Q12				
	Pneumatic connection 3, 1-40: V15		81 ... 89 l/min	572549	VMPA1-FT-NW1.5-10
	Pneumatic connection 5, 1-40: Q15				
	Pneumatic connection 3, 1-40: V17		105 ... 115 l/min	572550	VMPA1-FT-NW1.7-10
	Pneumatic connection 5, 1-40: Q17				
<b>Restrictor set – Width 10 mm</b>					
	–	Fixed flow restrictor, two of each size, two retainers and one assembly tool		572543	VMPA1-FT-NW0.3-1.7
<b>Retainer for fixed flow restrictor – Width 10 mm</b>					
	–	Retainer for exhaust outlet in the port plate		572542	VMPA1-FTI-10

## Accessories









Ordering data		Code	Description	Part no.	Type	
<b>Sub-base – Width 10 mm</b>						
	Duct separation to the right of the sub-base 1-40: –	Individual, Without electrical interlinking module, Without cartridge	No duct separation	–	<b>554311</b>	<b>VMPAL-AP-10</b>
				With check valve	<b>8035230</b>	<b>VMPAL-AP-10-RV</b>
	Duct separation to the right of the sub-base 1-40: T		Duct 1 separated	–	<b>554312</b>	<b>VMPAL-AP-10-T1</b>
				With check valve	<b>8035231</b>	<b>VMPAL-AP-10-T1-RV</b>
Duct separation to the right of the sub-base 1-40: TR	Duct 3, 5 separated	–	<b>554313</b>	<b>VMPAL-AP-10-T35</b>		
		With check valve	<b>8035232</b>	<b>VMPAL-AP-10-T35-RV</b>		
Duct separation to the right of the sub-base 1-40: TS	Duct 1 and 3, 5 separated	–	<b>554315</b>	<b>VMPAL-AP-10-T135</b>		
		With check valve	<b>8035233</b>	<b>VMPAL-AP-10-T135-RV</b>		
	–	Individual, with electrical interlinking module, Single solenoid (for 1 solenoid coil), with cartridge	No duct separation, Tubing O.D.	4 mm	<b>560994</b>	<b>VMPAL-AP-10-QS4-1</b>
				6 mm	<b>560987</b>	<b>VMPAL-AP-10-QS6-1</b>
				5/32"	<b>561005</b>	<b>VMPAL-AP-10-QS5/32"-1</b>
				1/4"	<b>560999</b>	<b>VMPAL-AP-10-QS1/4"-1</b>
			Duct 1 separated, Tubing O.D.	4 mm	<b>561017</b>	<b>VMPAL-AP-10-QS4-1-T1</b>
				6 mm	<b>561011</b>	<b>VMPAL-AP-10-QS6-1-T1</b>
				5/32"	<b>561029</b>	<b>VMPAL-AP-10-QS5/32"-1-T1</b>
				1/4"	<b>561023</b>	<b>VMPAL-AP-10-QS1/4"-1-T1</b>
		Individual, With electrical interlinking module, Double solenoid (for 2 solenoid coils), with cartridge	No duct separation, Tubing O.D.	4 mm	<b>560988</b>	<b>VMPAL-AP-10-QS4-2</b>
				6 mm	<b>560993</b>	<b>VMPAL-AP-10-QS6-2</b>
				5/32"	<b>561006</b>	<b>VMPAL-AP-10-QS5/32"-2</b>
			Duct 1 separated, Tubing O.D.	4 mm	<b>561018</b>	<b>VMPAL-AP-10-QS4-2-T1</b>
				6 mm	<b>561012</b>	<b>VMPAL-AP-10-QS6-2-T1</b>
				5/32"	<b>561030</b>	<b>VMPAL-AP-10-QS5/32"-2-T1</b>
		1/4"	<b>561024</b>	<b>VMPAL-AP-10-QS1/4"-2-T1</b>		
<b>Combination of four sub-bases – Width 10 mm</b>						
	Combination manifold block: Z	Without electrical interlinking module, Without cartridge	–	–	<b>560981</b>	<b>VMPAL-AP-4X10</b>
	–	With electrical interlinking module, single solenoid (for 1 solenoid coil), with cartridge	No duct separation Tubing O.D.	4 mm	<b>561089</b>	<b>VMPAL-AP-4X10-QS4-1</b>
				6 mm	<b>561083</b>	<b>VMPAL-AP-4X10-QS6-1</b>
				5/32"	<b>561101</b>	<b>VMPAL-AP-4X10-QS5/32"-1</b>
		With electrical interlinking module, double solenoid (for 2 solenoid coils), with cartridge	No duct separation Tubing O.D.	4 mm	<b>561090</b>	<b>VMPAL-AP-4X10-QS4-2</b>
				6 mm	<b>561084</b>	<b>VMPAL-AP-4X10-QS6-2</b>
				5/32"	<b>561102</b>	<b>VMPAL-AP-4X10-QS5/32"-2</b>
		1/4"	<b>561096</b>	<b>VMPAL-AP-4X10-QS1/4"-2</b>		
<b>Electrical interlinking module – Width 10 mm</b>						
	Type of module block 1-40: C	For one sub-base (1 valve position)	Grey – single solenoid (1 solenoid coil)		<b>560961</b>	<b>VMPAL-EVAP-10-1</b>
	Type of module block 1-40: A			Black – double solenoid (2 solenoid coils)	<b>560962</b>	<b>VMPAL-EVAP-10-2</b>
	Type of module block 1-40: C	For combination of four sub-bases (4 valve positions)	Grey – single solenoid (4 solenoid coils)		<b>560967</b>	<b>VMPAL-EVAP-10-1-4</b>
	Type of module block 1-40: A			Black – double solenoid (8 solenoid coils)	<b>560968</b>	<b>VMPAL-EVAP-10-2-4</b>









## Accessories

Ordering data		Code	Valve function	Part no.	Type	
<b>Individual solenoid valve – Width 14 mm</b>						
	<b>5/2-way valve</b>					
	Position function 1-32: M	Single solenoid		573718	VMPA14-M1H-M-PI	
	Position function 1-32: MS	Single solenoid		573974	VMPA14-M1H-MS-PI	
	Position function 1-32: J	Double solenoid		573717	VMPA14-M1H-J-PI	
	<b>2x 3/2-way valve</b>					
	Position function 1-32: N	Normally open		573725	VMPA14-M1H-N-PI	
	Position function 1-32: NS	Normally open, Mechanical spring return		575977	VMPA14-M1H-NS-PI	
	Position function 1-32: K	Normally closed		573724	VMPA14-M1H-K-PI	
	Position function 1-32: KS	Normally closed, Mechanical spring return		575976	VMPA14-M1H-KS-PI	
	Position function 1-32: H	1x normally open, 1x normally closed		573726	VMPA14-M1H-H-PI	
	Position function 1-32: HS	1x normally open, 1x normally closed, Mechanical spring return		575979	VMPA14-M1H-HS-PI	
	<b>5/3-way valve</b>					
	Position function 1-32: B	Mid-position pressurised		573719	VMPA14-M1H-B-PI	
	Position function 1-32: G	Mid-position closed		573721	VMPA14-M1H-G-PI	
	Position function 1-32: E	Mid-position exhausted		573720	VMPA14-M1H-E-PI	
	<b>3/2-way valve</b>					
	Position function 1-32: W	Normally open, external compressed air supply		573723	VMPA14-M1H-W-PI	
	Position function 1-32: X	Normally closed, external compressed air supply		573722	VMPA14-M1H-X-PI	
	<b>2x 2/2-way valve</b>					
Position function 1-32: D	Normally closed		573727	VMPA14-M1H-D-PI		
Position function 1-32: DS	Normally closed, Mechanical spring return		575978	VMPA14-M1H-DS-PI		
Position function 1-32: I	1x normally closed, 1x normally closed, reversible only		573728	VMPA14-M1H-I-PI		
<b>Vacant position – Width 14 mm</b>						
	Position function 1-32: L	Cover plate for a valve position, width 14 mm A self-adhesive label is supplied.		573729	VMPA14-RP	



Accessories

Ordering data		Code	Description	Part no.	Type		
<b>Vertical stacking modules – Width 14 mm</b>							
	Pressure regulator 1-32: PF	Optional pressure gauge possible	Pressure regulator for 1	0.5 ... 6 bar	<b>8043342</b>	<b>VMPA14-B8-R1C2-C-06</b>	
	Pressure regulator 1-32: PA			0.5 ... 8.5 bar	<b>8043339</b>	<b>VMPA14-B8-R1C2-C-10</b>	
	Pressure regulator 1-32: PH		Pressure regulator for 2	2 ... 6 bar	<b>8043343</b>	<b>VMPA14-B8-R2C2-C-06</b>	
	Pressure regulator 1-32: PC			2 ... 6 bar	<b>8043340</b>	<b>VMPA14-B8-R2C2-C-10</b>	
	Pressure regulator 1-32: PG		Pressure regulator for 4	2 ... 6 bar	<b>8043344</b>	<b>VMPA14-B8-R3C2-C-06</b>	
	Pressure regulator 1-32: PB			2 ... 6 bar	<b>8043341</b>	<b>VMPA14-B8-R3C2-C-10</b>	
	Pressure regulator 1-32: PF	–	Pressure regulator for 1	0.5 ... 6 bar	<b>8043518</b>	<b>VMPA14-B8-R1-M5-06</b>	
	Pressure regulator 1-32: PA			0.5 ... 8.5 bar	<b>8043515</b>	<b>VMPA14-B8-R1-M5-10</b>	
	Pressure regulator 1-32: PH		Pressure regulator for 2	2 ... 6 bar	<b>8043519</b>	<b>VMPA14-B8-R2-M5-06</b>	
	Pressure regulator 1-32: PC			2 ... 6 bar	<b>8043516</b>	<b>VMPA14-B8-R2-M5-10</b>	
	Pressure regulator 1-32: PG		Pressure regulator for 4	2 ... 6 bar	<b>8043520</b>	<b>VMPA14-B8-R3-M5-06</b>	
	Pressure regulator 1-32: PB			2 ... 6 bar	<b>8043517</b>	<b>VMPA14-B8-R3-M5-10</b>	
	Pressure regulator 1-32: PV	Vertical pressure supply plate	Connecting thread	G1/8	<b>8110621</b>	<b>VMPA14-VSP-0</b>	
							
			8 mm	<b>8110622</b>	<b>VMPA14-VSP-QS8</b>		
			10 mm	<b>8110625</b>	<b>VMPA14-VSP-QS10</b>		
			1/4"	<b>8110626</b>	<b>VMPA14-VSP-QS1/4</b>		
				5/16"	<b>8110624</b>	<b>VMPA14-VSP-QS5/16</b>	
			3/8"	<b>8110623</b>	<b>VMPA14-VSP-QS3/8</b>		
	Pressure regulator 1-32: PS	Vertical pressure shut-off plate For manually disconnecting an individual valve from the compressed air supply of the valve terminal (duct 1 and 12/14 pilot air supply), operating pressure 3 ... 8, internal pilot air supply			<b>8110429</b>	<b>VMPA14-HS</b>	
	Pressure gauge 1-32: VE	Screw-in pressure gauge with M5 thread for pressure regulator plate with rotatable threaded connection	Unit of measure: bar	<b>132340</b>	<b>MA-15-10-M5</b>		
	Pressure gauge 1-32: VD			Unit of measure: psi	<b>132341</b>	<b>MA-15-145-M5-PSI</b>	
	Pressure gauge 1-32: VC	Push-in fitting, self-sealing, with M5 thread for pressure regulator plate		<b>153291</b>	<b>QSK-M5-4</b>		
<b>Check valve – Width 14 mm</b>							
	–	Check valve for installation in duct 3 or 5 (scope of delivery: 10 check valves, one assembly tool)		<b>8039820</b>	<b>VMPA14RV</b>		







## Accessories

Ordering data		Code	Valve function	Part no.	Type	
<b>Sub-base – Width 14 mm</b>						
	Duct separation to the right of the sub-base 1-40: –	Individual, Without electrical interlinking module, without cartridge	No duct separation	–	560973	VMPAL-AP-14
	Duct separation to the right of the sub-base 1-40: T			With check valve	8034557	VMPAL-AP-14-RV
			Duct separation to the right of the sub-base 1-40: TR	Duct 1 separated	–	560975
	Duct separation to the right of the sub-base 1-40: TS			Duct 3, 5 separated	–	560977
	–	Individual, With electrical interlinking module, single solenoid (for 1 solenoid coil), with cartridge	No duct separation, Tubing O.D.	6 mm	560995	VMPAL-AP-14-QS6-1
				8 mm	560989	VMPAL-AP-14-QS8-1
				1/4"	561007	VMPAL-AP-14-QS1/4"-1
				5/16"	561001	VMPAL-AP-14-QS5/16"-1
			Duct 1 separated, Tubing O.D.	6 mm	561019	VMPAL-AP-14-QS6-1-T1
				8 mm	561013	VMPAL-AP-14-QS8-1-T1
		1/4"		561031	VMPAL-AP-14-QS1/4"-1-T1	
		5/16"		561025	VMPAL-AP-14-QS5/16"-1-T1	
		Individual, With electrical interlinking module, double solenoid (for 2 solenoid coils), with cartridge	No duct separation, Tubing O.D.	6 mm	560996	VMPAL-AP-14-QS6-2
				8 mm	560990	VMPAL-AP-14-QS8-2
				1/4"	561008	VMPAL-AP-14-QS1/4"-2
				5/16"	561002	VMPAL-AP-14-QS5/16"-2
Duct 1 separated, Tubing O.D.	6 mm		561020	VMPAL-AP-14-QS6-2-T1		
	8 mm		561014	VMPAL-AP-14-QS8-2-T1		
<b>Combination of four sub-bases – Width 14 mm</b>						
	Combination manifold block: Z	Without electrical interlinking module, without cartridge	–	–	560983	VMPAL-AP-4X14
	–	With electrical interlinking module, single solenoid (for 1 solenoid coil), with cartridge	No duct separation Tubing O.D.	6 mm	561091	VMPAL-AP-4X14-QS6-1
				8 mm	561085	VMPAL-AP-4X14-QS8-1
				1/4"	561103	VMPAL-AP-4X14-QS1/4"-1
		With electrical interlinking module, double solenoid (for 2 solenoid coils), with cartridge	No duct separation Tubing O.D.	6 mm	561092	VMPAL-AP-4X14-QS6-2
				8 mm	561086	VMPAL-AP-4X14-QS8-2
				1/4"	561104	VMPAL-AP-4X14-QS1/4"-2
5/16"	561098	VMPAL-AP-4X14-QS5/16"-2				
<b>Electrical interlinking module – Width 14 mm</b>						
	Type of module block 1-40: F	For one sub-base (1 valve position)	Grey – single solenoid (1 solenoid coil)	–	560963	VMPAL-EVAP-14-1
	Type of module block 1-40: E			Black – double solenoid (2 solenoid coils)	560964	VMPAL-EVAP-14-2
	Type of module block 1-40: F	For combination of four sub-bases (4 valve positions)	Grey – single solenoid (4 solenoid coils)	–	560969	VMPAL-EVAP-14-1-4
	Type of module block 1-40: E			Black – double solenoid (8 solenoid coils)	560970	VMPAL-EVAP-14-2-4




Accessories

Ordering data		Code	Valve function	Part no.	Type	
<b>Individual solenoid valve – Width 20 mm</b>						
	<b>5/2-way valve</b>					
	Position function 1-32: M	Single solenoid		8022034	VMPA2-M1BH-M-PI	
	Position function 1-32: MS	Single solenoid, mechanical spring return		571333	VMPA2-M1H-MS-PI	
	Position function 1-32: J	Double solenoid		8022035	VMPA2-M1BH-J-PI	
	<b>2x 3/2-way valve</b>					
	Position function 1-32: N	Normally open		537958	VMPA2-M1H-N-PI	
	Position function 1-32: NS	Normally open, Mechanical spring return		568655	VMPA2-M1H-NS-PI	
	Position function 1-32: K	Normally closed		537957	VMPA2-M1H-K-PI	
	Position function 1-32: KS	Normally closed, Mechanical spring return		568656	VMPA2-M1H-KS-PI	
	Position function 1-32: H	1x normally open, 1x normally closed		537959	VMPA2-M1H-H-PI	
	Position function 1-32: HS	1x normally open, 1x normally closed, Mechanical spring return		568658	VMPA2-M1H-HS-PI	
	<b>5/3-way valve</b>					
	Position function 1-32: B	Mid-position pressurised		8022036	VMPA2-M1BH-B-PI	
	Position function 1-32: G	Mid-position closed		8022037	VMPA2-M1BH-G-PI	
	Position function 1-32: E	Mid-position exhausted		8022038	VMPA2-M1BH-E-PI	
	<b>1x 3/2-way valve</b>					
Position function 1-32: W	Normally open, external compressed air supply		8022040	VMPA2-M1BH-W-PI		
Position function 1-32: X	Normally closed, external compressed air supply		8022039	VMPA2-M1BH-X-PI		
<b>2x 2/2-way valve</b>						
Position function 1-32: D	Normally closed		537960	VMPA2-M1H-D-PI		
Position function 1-32: DS	Normally closed, Mechanical spring return		568657	VMPA2-M1H-DS-PI		
Position function 1-32: I	1x normally closed, 1x normally closed, reversible only		543703	VMPA2-M1H-I-PI		
<b>Vacant position – Width 20 mm</b>						
	Position function 1-32: L	Cover plate for a valve position, width 20 mm A self-adhesive label is supplied.		537962	VMPA2-RP	






## Accessories

Ordering data		Code	Valve function	Part no.	Type			
<b>Vertical stacking modules – Width 20 mm</b>								
	Pressure regulator 1-32: PA	Pressure regulator plate (with 10 mm cartridge connection for pressure gauge)	For port 1	0.5 ... 8.5 bar	<b>543342</b>	<b>VMPA2-B8-R1C2-C-10</b>		
	Pressure regulator 1-32: PF			0.5 ... 6 bar	<b>549055</b>	<b>VMPA2-B8-R1C2-C-06</b>		
	Pressure regulator 1-32: PC		For port 2	2 ... 8.5 bar	<b>543343</b>	<b>VMPA2-B8-R2C2-C-10</b>		
	Pressure regulator 1-32: PH			2 ... 6 bar	<b>549056</b>	<b>VMPA2-B8-R2C2-C-06</b>		
	Pressure regulator 1-32: PB		For port 4	2 ... 8.5 bar	<b>543344</b>	<b>VMPA2-B8-R3C2-C-10</b>		
	Pressure regulator 1-32: PG			2 ... 6 bar	<b>549057</b>	<b>VMPA2-B8-R3C2-C-06</b>		
	Pressure regulator 1-32: PL		For port 2, reversible	0.5 ... 8.5 bar	<b>543347</b>	<b>VMPA2-B8-R6C2-C-10</b>		
	Pressure regulator 1-32: PN			0.5 ... 6 bar	<b>549113</b>	<b>VMPA2-B8-R6C2-C-06</b>		
	Pressure regulator 1-32: PK		For port 4, reversible	0.5 ... 8.5 bar	<b>543348</b>	<b>VMPA2-B8-R7C2-C-10</b>		
	Pressure regulator 1-32: PM			0.5 ... 6 bar	<b>549114</b>	<b>VMPA2-B8-R7C2-C-06</b>		
			Pressure regulator 1-32: PV	Vertical pressure supply plate	Connecting thread	G1/8	<b>8029486</b>	<b>VMPA2-VSP-0</b>
						With fitting for tubing O.D.	6 mm	<b>8035441</b>
		8 mm	<b>8029488</b>		<b>VMPA2-VSP-QS8</b>			
		10 mm	<b>8029489</b>		<b>VMPA2-VSP-QS10</b>			
		1/4"	<b>8035442</b>		<b>VMPA2-VSP-QS1/4</b>			
		5/16"	<b>8029491</b>		<b>VMPA2-VSP-QS5/16</b>			
	Pressure gauge 1-32: T	Pressure gauge, 10 mm cartridge connection, for pressure regulator plate	Display unit bar/psi	0 ... 16 bar	<b>543487</b>	<b>PAGN-26-16-P10</b>		
	–			0 ... 10 bar	<b>543488</b>	<b>PAGN-26-10-P10</b>		
			Display unit MPa	0 ... 1.0 MPa	<b>563736</b>	<b>PAGN-26-1M-P10</b>		
				0 ... 1.6 MPa	<b>563735</b>	<b>PAGN-26-1.6M-P10</b>		
	Pressure gauge 1-32: VF	Threaded adapter for cartridge connection 10 mm to thread G1/8			<b>565811</b>	<b>QSP10-G1/8</b>		
<b>Check valve – Width 20 mm</b>								
	–	Check valve for installation in duct 3 or 5 (scope of delivery: 10 check valves, one assembly tool)			<b>8039821</b>	<b>VMPA2RV</b>		











Accessories

Ordering data		Code	Description	Part no.	Type	
<b>Sub-base – Width 20 mm</b>						
	Duct separation to the right of the sub-base 1-40: –	Individual, Without electrical interlinking module, without cartridge	No duct separation	–	<b>560974</b>	<b>VMPAL-AP-20</b>
				With check valve	<b>8034561</b>	<b>VMPAL-AP-20-RV</b>
	Duct separation to the right of the sub-base 1-40: T		Duct 1 separated	–	<b>560976</b>	<b>VMPAL-AP-20-T1</b>
				With check valve	<b>8034562</b>	<b>VMPAL-AP-20-T1-RV</b>
Duct separation to the right of the sub-base 1-40: TR	Duct 3, 5 separated	–	<b>560978</b>	<b>VMPAL-AP-20-T35</b>		
		With check valve	<b>8034563</b>	<b>VMPAL-AP-20-T35-RV</b>		
Duct separation to the right of the sub-base 1-40: TS	Duct 1 and 3, 5 separated	–	<b>560980</b>	<b>VMPAL-AP-20-T135</b>		
		With check valve	<b>8034564</b>	<b>VMPAL-AP-20-T135-RV</b>		
	–	Individual, With electrical interlinking module, single solenoid (for 1 solenoid coil), with cartridge	No duct separation, Tubing O.D.	8 mm	<b>560997</b>	<b>VMPAL-AP-20-QS8-1</b>
				10 mm	<b>560991</b>	<b>VMPAL-AP-20-QS10-1</b>
				5/16"	<b>561009</b>	<b>VMPAL-AP-20-QS5/16"-1</b>
			Duct 1 separated, Tubing O.D.	3/8"	<b>561003</b>	<b>VMPAL-AP-20-QS3/8"-1</b>
				8 mm	<b>561021</b>	<b>VMPAL-AP-20-QS8-1-T1</b>
				10 mm	<b>561015</b>	<b>VMPAL-AP-20-QS10-1-T1</b>
		Individual, With electrical interlinking module, double solenoid (for 2 solenoid coils), with cartridge	No duct separation, Tubing O.D.	5/16"	<b>561033</b>	<b>VMPAL-AP-20-QS5/16"-1-T1</b>
				3/8"	<b>561027</b>	<b>VMPAL-AP-20-QS3/8"-1-T1</b>
				8 mm	<b>560998</b>	<b>VMPAL-AP-20-QS8-2</b>
			Duct 1 separated, Tubing O.D.	10 mm	<b>560992</b>	<b>VMPAL-AP-20-QS10-2</b>
				5/16"	<b>561010</b>	<b>VMPAL-AP-20-QS5/16"-2</b>
				3/8"	<b>561004</b>	<b>VMPAL-AP-20-QS3/8"-2</b>
Duct 1 separated, Tubing O.D.	8 mm	<b>561022</b>	<b>VMPAL-AP-20-QS8-2-T1</b>			
	10 mm	<b>561016</b>	<b>VMPAL-AP-20-QS10-2-T1</b>			
	5/16"	<b>561034</b>	<b>VMPAL-AP-20-QS5/16"-2-T1</b>			
		3/8"	<b>561028</b>	<b>VMPAL-AP-20-QS3/8"-2-T1</b>		
<b>Electrical interlinking module – Width 20 mm</b>						
	Type of module block 1-40: D	For one sub-base (1 valve position)	Grey – single solenoid (1 solenoid coil)		<b>560965</b>	<b>VMPAL-EVAP-20-1</b>
	Type of module block 1-40: B		Black – double solenoid (2 solenoid coils)		<b>560966</b>	<b>VMPAL-EVAP-20-2</b>

## Accessories








Ordering data		Code	Description	Pack size	Part no.	Type	
<b>Tie rods</b>							
	Tie rod: –	Threaded rod for tie rod, width across flats 5 mm The threaded rod/sleeve combination is selected based on the number and width of the individual sub-bases.	5 mm	3	561116	VMPAL-ZAS-5	
			45 mm	3	561117	VMPAL-ZAS-45	
			85 mm	3	561118	VMPAL-ZAS-85	
			125 mm	3	561119	VMPAL-ZAS-125	
			165 mm	3	561120	VMPAL-ZAS-165	
			205 mm	3	561121	VMPAL-ZAS-205	
			245 mm	3	561122	VMPAL-ZAS-245	
			285 mm	3	561123	VMPAL-ZAS-285	
			325 mm	3	561124	VMPAL-ZAS-325	
			365 mm	3	561125	VMPAL-ZAS-365	
			405 mm	3	561126	VMPAL-ZAS-405	
			445 mm	3	561127	VMPAL-ZAS-445	
			485 mm	3	561128	VMPAL-ZAS-485	
			525 mm	3	561129	VMPAL-ZAS-525	
			565 mm	3	561130	VMPAL-ZAS-565	
				–	Sleeve, internal hex 4 mm	36 mm	3
46 mm	3	561136				VMPAL-ZAH-46	
56 mm	3	561137				VMPAL-ZAH-56	
66 mm	3	561138				VMPAL-ZAH-66	
	–	Tie rod extender for subsequently extending the valve terminal with one sub-base in width				10 mm	3
			14 mm	3	561140	VMPAL-ZAE-14	
		Tie rod extender for subsequently extending the valve terminal with a supply module	20 mm	3	561141	VMPAL-ZAE-20	
			Tie rod extender for subsequently extending the valve terminal with four sub-bases in width	10 mm	3	570779	VMPAL-ZAE-10-4
				14 mm	3	570780	VMPAL-ZAE-14-4
					–	M4 screw with internal hex 2.5 mm, for tie rod	30 mm
<b>Screw</b>							
	–	M3 screw and square nut for linking four sub-bases	39 mm				10

## Accessories







Ordering data						
	Code	Description	Pack size	Part no.	Type	
<b>Mounting</b>						
	–	Mounting bracket Wall brackets should be mounted max. every 13 cm on the valve terminal.	–	<b>560949</b>	<b>VMPAL-BD</b>	
<b>DIN rail mounting</b>						
	Mounting accessories: H	MPA-L with multi-pin plug connection	–	<b>526032</b>	<b>CPX-CPA-BG-NRH</b>	
	Mounting accessories: H	MPA-L with fieldbus interface	–	<b>560798</b>	<b>VMPAF-FB-BG-NRH</b>	
<b>Releasing tool</b>						
	–	For releasing the electrical interlinking module from the sub-base	–	<b>572017</b>	<b>VMPAL-LW</b>	
<b>Cover cap</b>						
	Manual override: N	Cover cap for manual override, non-detenting	–	<b>540897</b>	<b>VMPA-HBT-B</b>	
	Manual override: V	Cover cap for manual override, concealed	–	<b>540898</b>	<b>VMPA-HBV-B</b>	
	Manual override: Y	Cover cap for manual override, detenting without accessories	–	<b>8002234</b>	<b>VAMC-L1-CD</b>	
	–	Holder for an inscription label and covering for the manual override	–	<b>570818</b>	<b>ASLR-D-L1</b>	
<b>Inscription label holders/inscription labels</b>						
	Inscription label holder for sub-bases: TM	Holder for inscription label IBS-6x10	Width 10 mm	10	<b>561109</b>	<b>VMPAL-ST-AP-10</b>
			Width 14 mm	10	<b>561112</b>	<b>VMPAL-ST-AP-14</b>
			Width 20 mm	10	<b>561115</b>	<b>VMPAL-ST-AP-20</b>
	–	Inscription label, 6x10 mm	–	<b>18576</b>	<b>IBS-6X10</b>	



## Accessories






Ordering data		Code	Description	Part no.	Type
<b>Power supply module</b>					
	Type of module block 1-40: U	With electrical interlinking module, without cartridge		<b>560950</b>	<b>VMPAL-SP-0</b>
	Type of module block 1-40: U	With electrical interlinking module, With cartridge for tubing O.D.	8 mm	<b>573645</b>	<b>VMPAL-SP-QS8</b>
			10 mm	<b>560951</b>	<b>VMPAL-SP-QS10</b>
			12 mm	<b>560952</b>	<b>VMPAL-SP-QS12</b>
			5/16"	<b>573646</b>	<b>VMPAL-SP-QS5/16"</b>
			3/8"	<b>560953</b>	<b>VMPAL-SP-QS3/8"</b>
			1/2"	<b>560954</b>	<b>VMPAL-SP-QS1/2"</b>
	Type of module block 1-40: U	Without electrical interlinking module, without cartridge		<b>570774</b>	<b>VMPAL-SP</b>
<b>Plate</b>					
	Exhaust port: UD, UE, UF, UM, UN, UP or UG	Exhaust plate for ducted exhaust air, without cartridge		<b>560956</b>	<b>VMPAL-EG</b>
	Exhaust port: UE	Exhaust plate for ducted exhaust air, with cartridge for tubing O.D. 10 mm		<b>560957</b>	<b>VMPAL-EG-QS10</b>
	Exhaust port: UN	Exhaust plate for ducted exhaust air, with cartridge for tubing O.D. 3/8"		<b>560959</b>	<b>VMPAL-EG-QS3/8"</b>
	Exhaust port: –	Flat plate silencer		<b>560955</b>	<b>VMPAL-EU</b>
<b>Electrical interlinking module</b>					
	Type of module block 1-40: U	Black For supply module (signals are passed through)		<b>571011</b>	<b>VMPAL-EVAP-20-SP</b>

## Accessories










Ordering data		Code	Description	Part no.	Type	
<b>Right end plate</b>						
	Right end plate: –		Low, with ports 12/14, 82/84, with pilot air selector for choosing the pilot air supply (internal or external)	<b>560945</b>	<b>VMPAL-EPR</b>	
	Right end plate: D		High, with ports 1, 3, 5, 12/14, 82/84, with pilot air selector for choosing the pilot air supply (internal or external), reversible operation possible	<b>560947</b>	<b>VMPAL-EPR-SP</b>	
<b>Left end plate</b>						
	Electrical connection: MS2	Electrical interface for multi-pin plug connection, IP40	Sub-D, 9-pin, 8 addresses	<b>570777</b>	<b>VMPAL-EPL-SD9-IP40</b>	
	Electrical connection: MS1		Sub-D, 25-pin, 24 addresses	<b>560940</b>	<b>VMPAL-EPL-SD25-IP40</b>	
	Electrical connection: MS3		Sub-D, 44-pin, 32 addresses	<b>560941</b>	<b>VMPAL-EPL-SD44-IP40</b>	
	Electrical connection: MF1		Ribbon cable, 40-pin, 32 addresses	<b>560942</b>	<b>VMPAL-EPL-FL40-IP40</b>	
	Electrical connection: MC		Terminal strip, 33-pin, 32 addresses	<b>560943</b>	<b>VMPAL-EPL-KL33-IP40</b>	
	Electrical connection: MS6		Electrical interface for multi-pin plug connection, IP67	Sub-D, 25-pin, 24 ad- dresses	<b>560938</b>	<b>VMPAL-EPL-SD25</b>
	Electrical connection: MS8			Sub-D, 44-pin, 32 ad- dresses	<b>560939</b>	<b>VMPAL-EPL-SD44</b>
	Electrical connection: CX	Pneumatic interface for CPX terminal	32 addresses	<b>570783</b>	<b>VMPAL-EPL-CPX</b>	
	Electrical connection: API	Pneumatic interface for remote I/O system CPX-AP-I	32 addresses	<b>8087171</b>	<b>VMPAL-EPL-AP</b>	
	Electrical connection: LK	Node with IO-Link®	32 addresses	<b>575667</b>	<b>VMPAL-EPL-IPO32</b>	
	Electrical connection: PT	Node with I-Port interface				

1) A self-adhesive label is supplied.






## Accessories

Ordering data						
	Code	Description		Part no.	Type	
<b>Connecting cable for multi-pin plug connection with Sub-D plug socket, degree of protection IP40</b>						
	Connecting cable: DA	Socket 9-pin, Sub-D, open cable end 9-pin	2.5 m	531184	KMP6-09P-8-2.5	
	Connecting cable: DB		5 m	531185	KMP6-09P-8-5	
	Connecting cable: DC		10 m	531186	KMP6-09P-8-10	
	–	Socket 25-pin, Sub-D, open cable end 15-pin	2.5 m	530049	KMP6-25P-12-2.5	
	–		5 m	530050	KMP6-25P-12-5	
	–		10 m	530051	KMP6-25P-12-10	
	Connecting cable: DD	Socket 25-pin, Sub-D, open cable end 25-pin	2.5 m	530046	KMP6-25P-20-2.5	
	Connecting cable: DK		5 m	530047	KMP6-25P-20-5	
	Connecting cable: DF		10 m	530048	KMP6-25P-20-10	
	Connecting cable: DG	Socket 44-pin, Sub-D, open cable end 44-pin	2.5 m	575113	NEBV-S1G44-K-2.5-N-LE44-S6	
	Connecting cable: DH		5 m	575114	NEBV-S1G44-K-5-N-LE44-S6	
Connecting cable: DJ	10 m		575115	NEBV-S1G44-K-10-N-LE44-S6		
<b>Connecting cable for multi-pin plug connection with Sub-D plug socket, degree of protection IP67</b>						
	Connecting cable: CA	Cable outlet to the front (only with left end plate MS6)	25-pin	2.5 m	560416	VMPAL-KM-V-SD25-IP67-2.5
	Connecting cable: CB			5 m	560417	VMPAL-KM-V-SD25-IP67-5
	Connecting cable: CC			10 m	560418	VMPAL-KM-V-SD25-IP67-10
	–			0.5 ... 30 m	562389	VMPAL-KM-V-SD25-IP67-
	Connecting cable: CQ	Cable outlet to the front (only with left end plate MS6)	25-pin	2.5 m	560410	VMPAL-KMSK-V-SD25-IP67-2.5
	Connecting cable: CR			5 m	560411	VMPAL-KMSK-V-SD25-IP67-5
	Connecting cable: CS			10 m	560412	VMPAL-KMSK-V-SD25-IP67-10
	–			0.5 ... 30 m	562391	VMPAL-KMSK-V-SD25-IP67-
	Connecting cable: CJ	Cable outlet to the front (only with left end plate MS8)	44-pin	2.5 m	560422	VMPAL-KM-V-SD44-IP67-2.5
	Connecting cable: CK			5 m	560423	VMPAL-KM-V-SD44-IP67-5
	Connecting cable: CL			10 m	560424	VMPAL-KM-V-SD44-IP67-10
–	0.5 ... 30 m			562390	VMPAL-KM-V-SD44-IP67-	
	Connecting cable: CD	Cable outlet on the side (only with left end plate MS6)	25-pin	2.5 m	560419	VMPAL-KM-S-SD25-IP67-2.5
	Connecting cable: CE			5 m	560420	VMPAL-KM-S-SD25-IP67-5
	Connecting cable: CH			10 m	560421	VMPAL-KM-S-SD25-IP67-10
	–			0.5 ... 30 m	562392	VMPAL-KM-S-SD25-IP67-
	Connecting cable: CT	Cable outlet on the side (only with left end plate MS6)	25-pin	2.5 m	560413	VMPAL-KMSK-S-SD25-IP67-2.5
	Connecting cable: CU			5 m	560414	VMPAL-KMSK-S-SD25-IP67-5
	Connecting cable: CV			10 m	560415	VMPAL-KMSK-S-SD25-IP67-10
	–			0.5 ... 30 m	562394	VMPAL-KMSK-S-SD25-IP67-
	Connecting cable: CM	Cable outlet on the side (only with left end plate MS8)	44-pin	2.5 m	560425	VMPAL-KM-S-SD44-IP67-2.5
	Connecting cable: CN			5 m	560426	VMPAL-KM-S-SD44-IP67-5
	Connecting cable: CP			10 m	560427	VMPAL-KM-S-SD44-IP67-10
–	0.5 ... 30 m			562393	VMPAL-KM-S-SD44-IP67-	
<b>Hood for multi-pin plug connection without connecting cable with Sub-D plug socket, degree of protection IP67</b>						
	Electrical multi-pin plug hood: EZ	Cable outlet on the side or the front (only with left end plate MS6)	25-pin	–	560428	VMPAL-KM-SD25-IP67-0
	Electrical multi-pin plug hood: EY	Outlet either at the side or the front (only with left end plate MS8)	44-pin	–	560429	VMPAL-KM-SD44-IP67-0
<b>Plug connector</b>						
	–	Self-assembly plug for ribbon cable, 40-pin, for ribbon cable conductor cross-section 0.08 ... 0.13 mm <sup>2</sup>			570895	NECU-FCG40-K








Accessories

Ordering data		Code	Description	Pack size	Part no.	Type	
<b>Cartridge for sub-base in width 10 mm</b>							
	Standard connection for valve size 10 mm:	AA	10 mm cartridge, polymer, for working ports, connection for tubing O.D.	3 mm	10	132621	QSPKG10-3
		AB		4 mm	10	132622	QSPKG10-4
		–		6 mm	10	132623	QSPKG10-6
		AJ		1/8"	10	132852	QSPKG10-1/8-U
		AQ		5/32"	10	132624	QSPKG10-5/32-U
		AL		1/4"	10	132626	QSPKG10-1/4-U
		–	10 mm cartridge, nickel-plated brass, for working ports, connection for tubing O.D.	4 mm	10	172972	QSP10-4
		–		6 mm	10	172973	QSP10-6
	–		10 mm cartridge, polymer, L-shaped, for working ports, connection for tubing O.D.	3 mm	10	132853	QSPLKG10-3
				4 mm	10	132920	QSPLKG10-4
				6 mm	10	132921	QSPLKG10-6
				1/8"	10	132854	QSPLKG10-1/8-U
				1/4"	10	132924	QSPLKG10-1/4-U
	–		10 mm cartridge, polymer, L-shaped long, for working ports, connection for tubing O.D.	3 mm	10	132861	QSPLKKG10-3
				4 mm	10	132925	QSPLKKG10-4
				6 mm	10	132926	QSPLKKG10-6
				1/8"	10	132862	QSPLKKG10-1/8-U
				1/4"	10	132929	QSPLKKG10-1/4-U
<b>Cartridge for sub-base in width 14 mm</b>							
	Standard connection for valve size 14 mm:	BC	14 mm cartridge, polymer, for working ports, connection for tubing O.D.	6 mm	10	132930	QSPKG14-6
		–		8 mm	10	132931	QSPKG14-8
		BL		1/4"	10	132932	QSPKG14-1/4-U
		BQ		5/16"	10	132933	QSPKG14-5/16-U
	–		14 mm cartridge, polymer, L-shaped, for working ports, connection for tubing O.D.	6 mm	10	132938	QSPLKG14-6
				8 mm	10	132939	QSPLKG14-8
				1/4"	10	132940	QSPLKG14-1/4-U
				5/16"	10	132941	QSPLKG14-5/16-U
	–		14 mm cartridge, polymer, L-shaped long, for working ports, connection for tubing O.D.	6 mm	10	132942	QSPLKKG14-6
				8 mm	10	132943	QSPLKKG14-8
				1/4"	10	132944	QSPLKKG14-1/4-U
				5/16"	10	132945	QSPLKKG14-5/16-U
<b>Cartridge for sub-base in width 20 mm</b>							
	Standard connection for valve size 20 mm:	CD	18 mm cartridge, polymer, for working ports, connection for tubing O.D.	8 mm	10	132649	QSPKG18-8
		–		10 mm	10	132650	QSPKG18-10
		CQ		5/16"	10	132651	QSPKG18-5/16-U
		CT		3/8"	10	132652	QSPKG18-3/8-U
	–		18 mm cartridge, polymer, L-shaped, for working ports, connection for tubing O.D.	8 mm	10	132946	QSPLKG18-8
				10 mm	10	132947	QSPLKG18-10
				5/16"	10	132948	QSPLKG18-5/16-U
				3/8"	10	132949	QSPLKG18-3/8-U
	–		18 mm cartridge, polymer, L-shaped long, for working ports, connection for tubing O.D.	8 mm	10	132950	QSPLKKG18-8
				10 mm	10	132951	QSPLKKG18-10
				5/16"	10	132952	QSPLKKG18-5/16-U
				3/8"	10	132953	QSPLKKG18-3/8-U




## Accessories

Ordering data		Code	Description	Pack size	Part no.	Type
<b>Cartridge for supply module</b>						
	-	20 mm cartridge, polymer, for supply ports, connection for tubing O.D.	8 mm	10	132633	QSPKG20-8
			10 mm	10	132634	QSPKG20-10
			12 mm	10	132635	QSPKG20-12
			5/16"	10	132636	QSPKG20-5/16-U
			3/8"	10	132637	QSPKG20-3/8-U
			1/2"	10	132638	QSPKG20-1/2-U
	-	20 mm cartridge, polymer, L-shaped, for supply ports, connection for tubing O.D.	8 mm	10	132855	QSPLKG20-8
			10 mm	10	132856	QSPLKG20-10
			12 mm	10	132857	QSPLKG20-12
			3/8"	10	132859	QSPLKG20-3/8-U
	-	20 mm cartridge, polymer, L-shaped long, for supply ports, connection for tubing O.D.	8 mm	10	132863	QSPLLKG20-8
			10 mm	10	132864	QSPLLKG20-10
			12 mm	10	132865	QSPLLKG20-12
<b>Adapter for sub-bases</b>						
	Standard connection for valve size 10 mm: AGG	Adapter for cartridge connection 10 mm to thread M7	10	572380	VMPAL-F10-M7	
	Standard connection for valve size 14 mm: BGG	Adapter for cartridge connection 14 mm to thread G1/8	10	574084	VMPAL-F14-G1/8	
	Standard connection for valve size 20 mm: CGG	Adapter for cartridge connection 18 mm to thread G1/4	10	573914	VMPAL-F20-G1/4	
<b>Adapter for supply module/sub-base</b>						
	-	Adapter for cartridge connection 20 mm to thread G1/4	10	572381	VMPAL-FSP-G1/4	

## Accessories

Ordering data						
	Code	Description	Pack size	Part no.	Type	
<b>Push-in fitting</b>						
	-	Connecting thread M7 with sealing ring, with internal hex, for tubing O.D.	4 mm	10	<b>153319</b>	<b>QSM-M7-4-I</b>
			6 mm	10	<b>153321</b>	<b>QSM-M7-6-I</b>
	-	Connecting thread G1/4 with sealing ring, with external hex, for tubing O.D.	6 mm	10	<b>186108</b>	<b>QS-G1/4-6-I</b>
			8 mm	10	<b>186097</b>	<b>QS-G1/4-6</b>
			10 mm	10	<b>186101</b>	<b>QS-G1/4-10</b>
			12 mm	10	<b>578344</b>	<b>NPQH-D-G14-Q12-P10</b>
	-	Connecting thread G1/4, with external hex, flame-retardant, for tubing O.D.	6 mm	-	<b>186316</b>	<b>QS-VO-G1/4-6</b>
			8 mm	-	<b>186317</b>	<b>QS-VO-G1/4-8</b>
			10 mm	-	<b>186318</b>	<b>QS-VO-G1/4-10</b>
<b>Push-in L-connector</b>						
	-	Push-in sleeve diameter	6 mm	10	<b>153057</b>	<b>QSL-6H</b>
			8 mm	10	<b>153058</b>	<b>QSL-8H</b>
		Long push-in sleeve diameter	6 mm	10	<b>153066</b>	<b>QSL-6HL</b>
	-	Push-in fitting with sealing ring, connecting thread M7, with external hex, for tubing O.D.	4 mm	10	<b>186352</b>	<b>QSML-M7-4</b>
			100		<b>130773</b>	<b>QSML-M7-4-100</b>
	-	Long push-in fitting with sealing ring, connecting thread M7, with external hex, for tubing O.D.	6 mm	10	<b>186353</b>	<b>QSML-M7-6</b>
			100		<b>130774</b>	<b>QSML-M7-6-100</b>
	-	Push-in fitting with sealing ring, connecting thread G1/4, with external hex, for tubing O.D.	4 mm	10	<b>186354</b>	<b>QSMLL-M7-4</b>
			6 mm	10	<b>186355</b>	<b>QSMLL-M7-6</b>
-	Push-in fitting with sealing ring, connecting thread G1/4, with external hex, for tubing O.D.	6 mm	10	<b>186118</b>	<b>QSL-G1/4-6</b>	
		8 mm	10	<b>186120</b>	<b>QSL-G1/4-8</b>	
		10 mm	10	<b>186122</b>	<b>QSL-G1/4-10</b>	
	-	Push-in fitting, connecting thread G1/4, With internal hex, for tubing O.D.	6 mm	10	<b>186149</b>	<b>QSLV-G1/4-6-I</b>
			8 mm	10	<b>186151</b>	<b>QSLV-G1/4-8-I</b>
<b>Push-in fittings, self-sealing</b>						
	-	With sealing ring, with external hex, connecting thread G1/4, For tubing O.D.	6 mm	1	<b>186296</b>	<b>QSK-G1/4-6</b>
			8 mm	1	<b>186298</b>	<b>QSK-G1/4-8</b>
			10 mm	1	<b>186300</b>	<b>QSK-G1/4-10</b>
	-	With sealing ring, with external hex, L-shaped, connecting thread G1/4, For tubing O.D.	6 mm	1	<b>186306</b>	<b>QSKL-G1/4-6</b>
			8 mm	1	<b>186308</b>	<b>QSKL-G1/4-8</b>
			10 mm	1	<b>186310</b>	<b>QSKL-G1/4-10</b>
<b>Push-in fittings, rotatable</b>						
	-	With external hex, connecting thread G1/4, For tubing O.D.	6 mm	1	<b>186278</b>	<b>QSR-G1/4-6</b>
			8 mm	1	<b>186280</b>	<b>QSR-G1/4-8</b>
	-	With external hex, L-shaped, connecting thread G1/4, For tubing O.D.	6 mm	1	<b>186287</b>	<b>QSRL-G1/4-6</b>
			8 mm	1	<b>186289</b>	<b>QSRL-G1/4-8</b>

## Accessories

Ordering data						
	Code	Description	Pack size	Part no.	Type	
<b>Silencer</b>						
	-	Connecting thread	M7	1	<b>161418</b>	<b>UC-M7</b>
				50	<b>534218</b>	<b>UC-M7-50</b>
			G1/4	1	<b>165004</b>	<b>UC-1/4</b>
				20	<b>534220</b>	<b>UC-1/4-20</b>
<b>Blanking plug</b>						
	-	Thread	M7	10	<b>174309</b>	<b>B-M7</b>
			G3/8	10	<b>3570</b>	<b>B-3/8</b>
		Cartridge	10 mm	1	<b>172976</b>	<b>QSP10-PTB</b>
			14 mm	1	<b>172987</b>	<b>QSP14-PTB</b>
			18 mm	1	<b>172996</b>	<b>QSP17-PTB</b>
<b>User documentation</b>						
	Documentation: DE	MPA-L pneumatic components	German	-	<b>556353</b>	<b>MPAL-VI-DE</b>
	Documentation: EN		English	-	<b>556354</b>	<b>MPAL-VI-EN</b>