

Motor controllers CMMS-ST, for stepper motors

FESTO






Motor controllers CMMS-ST, for stepper motors

Key features

FESTO

Comparison of motor controllers				
Motor controller for motor type	CMMD-AS Servo motor	CMMS-AS Servo motor	CMMP-AS Servo motor	CMMS-ST Stepper motor
Positioning records	2x 63	63	255	63
Measuring system	Incremental/absolute		Incremental/absolute	Incremental
Extended I/O interface	4 working modes		Flexibly configurable	4 working modes
Notification of remaining distance	1 for n		Separately for all positions	1 for n
Torque reduction	No		Separately for all positions	No
Set linking	Linear		With branching	Linear
STO/SS1	To EN 61800-5-2		To EN 61800-5-2	To EN 61800-5-2

Performance characteristics			
Compactness		Motion control	
<ul style="list-style-type: none">• Small dimensions• Full integration of all components for controller and power section, including RS232 and CANopen interface• Integrated brake chopper• Integrated EMC filters		<ul style="list-style-type: none">• Automatic actuation for a holding brake integrated in the motor• Adheres to the current CE and EN standards without additional external measures (motor cable length of up to 15 m)• Can be operated as a torque, speed or position controller• Integrated positioning controller• Time-optimised (trapezoidal) or jerk-free (S-shaped) positioning• Absolute and relative movements• Point-to-point positioning with and without approximate positioning• Position synchronisation• Electronic gear unit• 63 position sets• 8 travel profiles• Wide range of homing methods	
Fieldbus interfaces		Input/output	Integrated sequence control
Integrated: 	Optional:  	<ul style="list-style-type: none">• Freely programmable I/Os• High-resolution 12-bit analogue input• Jog/teach mode• Simple linking to a higher-level controller via I/O or fieldbus• Synchronous operation• Master/slave mode	<ul style="list-style-type: none">• Automatic sequence of position sets without a higher-level controller• Linear and cyclic position sequences• Adjustable delay times
Integrated safety functions		Interpolating multi-axis movement	
<ul style="list-style-type: none">• The motor controller CMMS-ST support "Safe Torque off (STO)" and "Safe Stop 1 (SS1)" functions with protection against unexpected startup in accordance with EN 61800-5-2		<ul style="list-style-type: none">• With a suitable controller, the CMMS-ST can perform path movements with interpolation via CANopen. The controller specifies setpoint position values in a fixed time pattern to this end. In between, the servo positioning controller independently interpolates the data values between two data points.	

Motor controllers CMMS-ST, for stepper motors

FESTO

Key features


Performance characteristics

Servo mode

- “Servo Lite operation” (closed loop) thanks to encoder option, in other words no step losses, following errors are corrected

Travel program

- Linking of any number of position sets into a travel program
- Step criteria for the travel program possible via digital inputs, for example
MC – motion complete
I/O – digital inputs

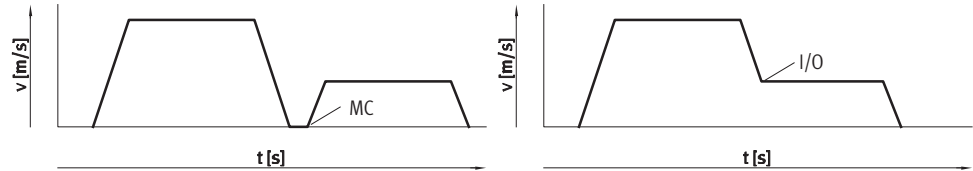

Library for EPLAN

→ www.festo.com/eplan



EPLAN macros for fast and reliable planning of electrical projects in combination with motor controllers,

motors and cables. This enables a high level of planning reliability, standardisation of documentation,

no need to create symbols, graphics and master data.


Motor controllers CMMS-ST, for stepper motors

Key features

FESTO

FCT software – Festo Configuration Tool

Software platform for electric drives from Festo

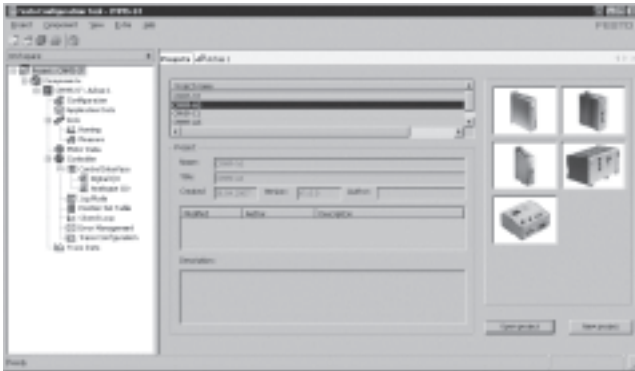

- All drives in a system can be managed and archived in a common project
- Project and data management for all supported device types
- Simple to use thanks to graphically-supported parameter entry
- Universal mode of operation for all drives
- Working offline at your desk or online at the machine

FHPP – Festo Handling and Positioning Profile


Optimised data profile

Festo has developed an optimised data profile, the “Festo Handling and Positioning Profile (FHPP)”, that is tailored to handling and positioning applications.

The FHPP data profile permits the actuation of Festo motor controllers, using a fieldbus interface, via standardised control and status bytes.

The following are defined, among others:

- Operating modes
- I/O data structure
- Parameter objects
- Sequence control

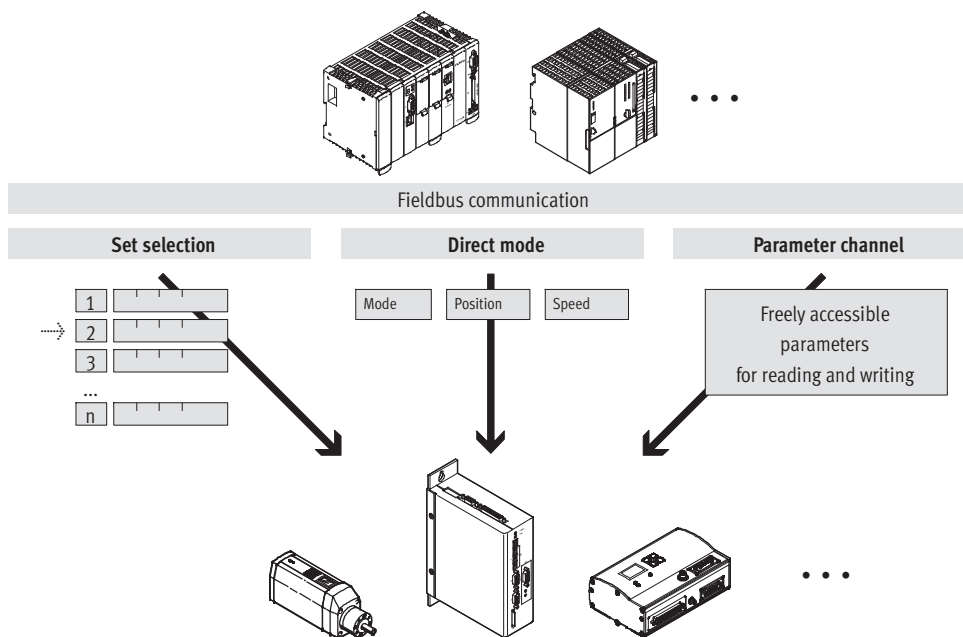

Motor controllers CMMS-ST, for stepper motors

Type codes

		CMMS	–	ST	–	C8	–	7	–	G2
Type										
CMMS	Motor controller, standard									
Motor type										
ST	Stepper motor									
Nominal current										
C8	8 A									
Input voltage										
7	48 V DC									
Generation										
G2	Next generation									

Motor controllers CMMS-ST, for stepper motors

Technical data

FESTO

Fieldbus interfaces

CANopen

PROFIBUS

DeviceNet



General technical data	
Type of mounting	Screwed to a mounting plate
Operating mode	PWM MOSFET power amplifier
Motor actuation	Sinusoidal current impressing
Cycle rate [kHz]	Constant 50
Rotary position generator	Encoder
Display	7-segment display
Parameterisation interface	RS232 (9,600 ... 115,000 bits/s)
Encoder interface input	As speed/position specification for the slave drive in synchronous mode RS422
Encoder interface output	Setpoint specification for downstream slave drive
Brake resistor, integrated [Ω]	17
Pulse power of braking resistor [kVA]	0.5
Bus terminating resistor	Integrated
Impedance of setpoint input [kΩ]	20
Number of analogue outputs	1
Operating range of analogue outputs [V]	±10
Characteristics of digital logic outputs	Freely configurable in some cases
Number of analogue inputs	1
Operating range of analogue inputs [V]	±10
Mains filter	Integrated
Product weight [g]	900

Technical data – Fieldbus interface				
Interfaces	I/O	CANopen	Profibus DP	DeviceNet
Communication profile	–	DS301, FHPP	DP-V0 / FHPP	FHPP
	–	DS301, DSP402	–	
Max. fieldbus transmission rate [Mbit/s]	–	1	12	0.5
Interface	Integrated	■	–	–
	Optional	–	■ → 10	■ → 10

Motor controllers CMMS-ST, for stepper motors

Technical data

Function blocks for PLC programming				
Programming software	Controller manufacturer	Interfaces		
		CANopen	Profibus DP	DeviceNet
CoDeSys	Festo	■	■	■
	Beckhoff			
	Other manufacturers			
RSLogix5000	Rockwell Automation	–	–	■
Step 7	Siemens	–	■	–

Electrical data		
General		
Nominal current setting		Via software
Max. peak current duration	[s]	2
Max. intermediate circuit voltage	[V DC]	48
Load supply		
Nominal voltage	[V DC]	24 ... 48
Nominal current	[A]	8
Peak current	[A]	12
Logic supply		
Nominal voltage	[V DC]	24 ±20%
Nominal current	[A]	0.3
Max. current of digital logic outputs	[mA]	100

Operating and environmental conditions	
Digital logic outputs	Not electrically separated
Logic inputs	Electrically separated
Protection class	IP20
Protective function	I ² t monitoring
	Current monitoring
	Voltage failure detection
	Following error monitoring
	Temperature monitoring
Ambient temperature	[°C] 0 ... +50
Storage temperature	[°C] –25 ... +70
Relative humidity	[%] 0 ... 90 (non-condensing)
CE mark (see declaration of conformity)	To EU EMC Directive ¹⁾
	To EU Machinery Directive
Certification	c UL us - Listed (OL)
	C-Tick
	BIA
Certificate issuing authority	BG MFS 09031
Safety function	Safe Torque off (STO)
Safety Integrity Level (SIL)	Safe Torque off (STO) / SIL 2
Performance Level (PL)	Safe Torque off (STO) / category 3, performance level d
Note on materials	RoHS-compliant

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com → Support → User documentation.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.


Motor controllers CMMS-ST, for stepper motors

Technical data

FESTO


View of motor controller

From the front

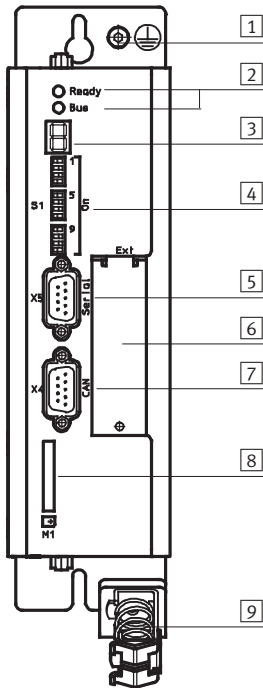


- 1 Earthing
- 2 Ready/bus LED
- 3 Status display
- 4 Fieldbus settings and boot loader
- 5 Interface: RS232/RS485
- 6 Technology module slot
- 7 Interface: CAN bus
- 8 SD memory card
- 9 Screened connection

From above

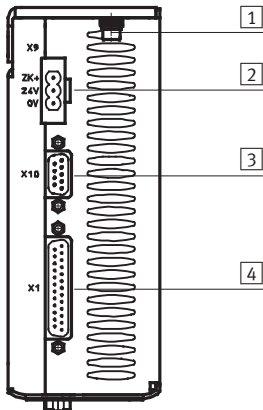

- 1 Earthing screw
- 2 Power supply
- 3 Incremental encoder interface (bidirectional)
- 4 I/O interface

From underneath

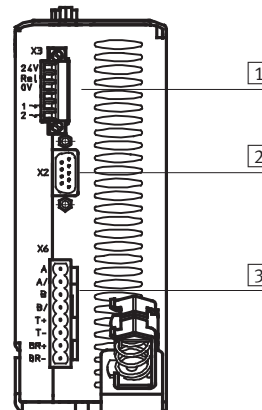


- 1 Safe stop
- 2 Increment encoder input for motor
- 3 Motor connection

Motor controllers CMMS-ST, for stepper motors

Technical data

FESTO


Installation clearance for motor controller

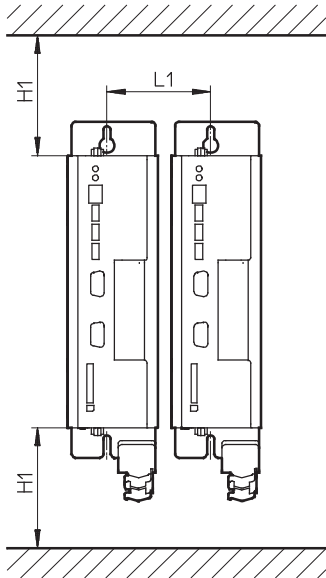

H1	L1
100	69

Dimensions

Download CAD Data → www.festo.com/us/cad

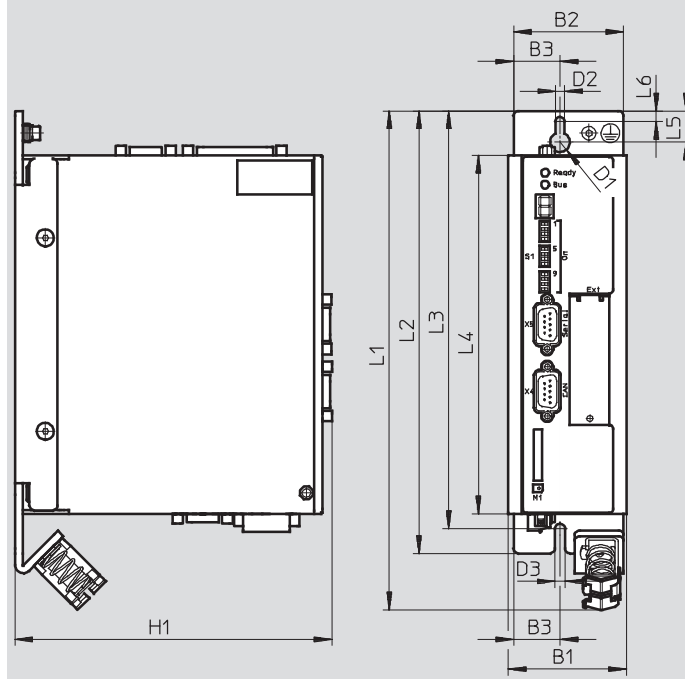


Type	B1	B2	B3	D1 Ø	D2 Ø	D3 Ø	H1
CMMS-ST	60	56	24	10	4.5	5	161

Type	L1	L2	L3	L4	L5	L6
CMMS-ST	252	224	211.5	181	15.75	5.25



Motor controllers CMMS-ST, for stepper motors







Technical data and accessories

FESTO

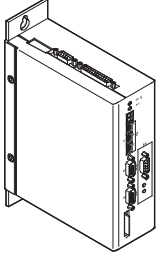Ordering data			
	Brief description	Part No.	Type
	The plug range NEKM (→ 10) and the operating package (→ 11) are included in the scope of delivery	572211	CMMS-ST-C8-7-G2


Accessories

Ordering data – Plug-in cards			
	Brief description	Part No.	Type
	Interface, for Profibus interface	547450	CAMC-PB
	Interface, for DeviceNet interface	547451	CAMC-DN
	Memory card, for data backup and firmware downloads	560626	CAMC-M-S-F1-V1

Ordering data – Cables and plugs				
	Brief description	Cable length [m]	Part No.	Type
	Control cable, for I/O interface to any controller	2.5	552254	NEBC-S1G25-K-2.5N-LE26
	Programming cable	1.5	160786	PS1-ZK11-NULLMODEM-1,5M
	Encoder plug, for incremental encoder interface	–	564264	NECC-A-S-S1G9-C2M
	The plug range is included in the scope of delivery	–	547452	NEKM-C-1
	Plug for Profibus interface	–	533780	FBS-SUB-9-WS-PB-K
	Plug for CANopen interface	–	533783	FBS-SUB-9-WS-CO-K
	Plug for DeviceNet interface	–	525635	FBSD-KL-2X5POL

Motor controllers CMMS-ST, for stepper motors

Accessories


Ordering data – Power supply units					
	Brief description	Input voltage range [V AC]	Nominal output voltage [V DC]	Nominal output current [A]	Part No. Type
	Power supply for motor controller	100 ... 240	24	5	547867 SVG-1/230VAC-24VDC-5A
				10	547868 SVG-1/230VAC-24VDC-10A
			48	5	542403 SVG-1/230VAC-48VDC-5A
				10	542404 SVG-1/230VAC-48VDC-10A
		400 ... 500		20	542405 SVG-3/400VAC-48VDC-20A

Note

If a common power supply unit is used to supply the power section and the control section, the voltage tolerances for the supply to the

control section cannot be maintained at high braking power. This can result in damage to the control section.


Always use separate power supply units to supply the power section and the control section.

Ordering data – Software and documentation			
	Brief description	Part No.	Type
	<p>Operating package contains:</p> <ul style="list-style-type: none"> – CD-ROM – with user documentation for CMMS-ST, in de, en, es, fr, it, sv – with FCT (Festo Configuration Tool) configuration software, in de, en – Brief description <p>This package is included in the scope of delivery</p>	573960	GSIB-CMMS-ST-G2-ML

Motor controllers CMMS-ST, for stepper motors

Accessories

FESTO

Ordering data – Documentation ¹⁾			
	Language	Part No.	Type
		for motor controller	
		Part No.	Type
		Festo Handling and Positioning Profile (FHPP) for the motor controller family CMM...	
	DE	573124	P.BE-CMMS-ST-G2-HW-DE
	EN	573125	P.BE-CMMS-ST-G2-HW-EN
	ES	573126	P.BE-CMMS-ST-G2-HW-ES
	FR	573127	P.BE-CMMS-ST-G2-HW-FR
	IT	573128	P.BE-CMMS-ST-G2-HW-IT
	SV	573129	P.BE-CMMS-ST-G2-HW-SV
		for CANopen interface	
	DE	554351	P.BE-CMMS-FHPP-CO-SW-DE
	EN	554352	P.BE-CMMS-FHPP-CO-SW-EN
	ES	554353	P.BE-CMMS-FHPP-CO-SW-ES
	FR	554354	P.BE-CMMS-FHPP-CO-SW-FR
	IT	554355	P.BE-CMMS-FHPP-CO-SW-IT
	SV	554356	P.BE-CMMS-FHPP-CO-SW-SV
		for Profibus interface	
	DE	554345	P.BE-CMMS-FHPP-PB-SW-DE
	EN	554346	P.BE-CMMS-FHPP-PB-SW-EN
	ES	554347	P.BE-CMMS-FHPP-PB-SW-ES
	FR	554348	P.BE-CMMS-FHPP-PB-SW-FR
	IT	554349	P.BE-CMMS-FHPP-PB-SW-IT
	SV	554350	P.BE-CMMS-FHPP-PB-SW-SV
		for DeviceNet interface	
	DE	554357	P.BE-CMMS-FHPP-DN-SW-DE
	EN	554358	P.BE-CMMS-FHPP-DN-SW-EN
	ES	554359	P.BE-CMMS-FHPP-DN-SW-ES
	FR	554360	P.BE-CMMS-FHPP-DN-SW-FR
	IT	554361	P.BE-CMMS-FHPP-DN-SW-IT
	SV	554362	P.BE-CMMS-FHPP-DN-SW-SV

1) User documentation in paper form is not included in the scope of delivery

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalnepantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com