

Angle seat valves VZXF, NPT

FESTO



Angle seat valves VZXF, NPT

Key features and product range overview



FESTO

Function

The angle seat valve VZXF is an externally controlled 2/2-way valve. Valves of this design are switched by means of an additional pilot medium. The valve is closed by spring force when at rest. It is opened when pilot pressure is applied to

the drive. The supply of the pilot medium into the drive chamber is controlled by an external valve that must be additionally integrated into the supply line for the pilot medium.

General

-  - Connecting thread
NPT1½ ... NPT2
-  - Flow rate Kv
2.8 ... 47.5 m³/h

Design

- Gunmetal (red brass) design
- Stainless steel design

Advantages


- Insensitive to steam or slightly contaminated media
- No pressure differential required between the inlet and outlet
- Low flow resistance
- Long service life
- Low maintenance

Application


- Angle seat valves control suitable gaseous and liquid media in rigid piping systems without the need for any pressure differential

Variants

Gunmetal (red brass) design





Stainless steel design



Angle seat valves VZXF, NPT

Key features and product range overview

FESTO

Version	Type	Process valve connection	Nominal size (DN)	Process valve nominal pressure (PN)	→ Page/Internet
Gunmetal (red brass) design					
	VZXF-L-...-H3B1-...	NPT1½	15	16	6
		NPT¾	20		
		NPT1	25		
		NPT1¼	32		
		NPT1½	40		
		NPT2	50		
Stainless steel design					
	VZXF-L-...-V4V4T-...	NPT1½	15	40	9
		NPT¾	20		
		NPT1	25		
		NPT1¼	32		
		NPT1½	40		
		NPT2	50		

Angle seat valves VZXF, NPT

Type codes

FESTO

VZXF		-	L	-	M22C	-	M	-	A	-	NPT12	-	130	-	M1	-
------	--	---	---	---	------	---	---	---	---	---	-------	---	-----	---	----	---

Type	
VZXF	Angle seat valve, externally controlled

Type of directional control valve	
L	In-line valve

Valve function	
M22C	2/2-way valve, normally closed

Reset method for single solenoid valves	
	None
M	Mechanical spring

Media flow	
A	Over valve seat, closes with the flow of media
B	Under valve seat, closes against the flow of media

Process valve connection	
N12	NPT 1/2
N34	NPT G3/4
N1	NPT G1
N114	NPT G1 1/4
N112	NPT G1 1/2
N2	NPT G2

Nominal size	
120	12 mm
130	13 mm
160	16 mm
180	18 mm
230	23 mm
240	24 mm
290	29 mm
310	31 mm
350	35 mm
430	43 mm
450	45 mm

Temperature range of medium	
	Standard, -10 ... +80 °C
M1	-40 ... +200 °C

Angle seat valves VZXF, NPT

Type codes

FESTO


		H3	B1		-	50	-	10
Housing material								
H3	Gunmetal (red brass)							
V4	Stainless steel							
Housing, drive material								
B1	Brass							
V4	Stainless steel							
Sealing material								
	Standard, NBR							
T	PTFE							
Drive size								
50	50 mm							
80	80 mm							
Operating pressure								
3	Max. 3 bar							
4	Max. 4 bar							
5	Max. 5 bar							
6	Max. 6 bar							
7	Max. 7 bar							
8	Max. 8 bar							
9	Max. 9 bar							
10	Max. 10 bar							
12	Max. 12 bar							
16	Max. 16 bar							
20	Max. 20 bar							
22	Max. 22 bar							
25	Max. 25 bar							
40	Max. 40 bar							

Angle seat valves VZXF, NPT

Technical data – Gunmetal (red brass) design

FESTO

Function

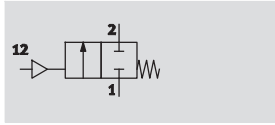

Flow rate Kv
2.8 ... 33.8 m³/h

Connecting thread
NPT1/2 ... NPT2



General technical data			
Process valve connection	NPT1/2	NPT3/4	NPT1
Auxiliary pilot air connection	G1/8		
Nominal size (DN)	15	20	25
Valve function	2/2-way, single solenoid, closed		
Design	Poppet valve with spring return		
Type of mounting	In-line installation		
Mounting position	Any		
Direction of flow	Non-reversible		
Exhaust function	No flow control		
Sealing principle	Soft		
Reset method	Mechanical spring		
Actuation type	Pneumatic		
Type of control	External		
Pilot medium	Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated		
Switching time on [ms]	100		
Switching time off [ms]	310		
Product weight [g]	1,200	1,300	1,500

Process valve connection	NPT1 1/4	NPT1 1/2	NPT2
Auxiliary pilot air connection	G1/8		
Nominal size (DN)	32	40	50
Valve function	2/2-way, single solenoid, closed		
Design	Poppet valve with spring return		
Type of mounting	In-line installation		
Mounting position	Any		
Direction of flow	Non-reversible		
Exhaust function	No flow control		
Sealing principle	Soft		
Reset method	Mechanical spring		
Actuation type	Pneumatic		
Type of control	External		
Pilot medium	Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated		
Switching time on [ms]	110		120
Switching time off [ms]	320		320
Product weight [g]	1,800	2,400	3,500

Angle seat valves VZXF, NPT

Technical data – Gunmetal (red brass) design

FESTO

Operating and environmental conditions				
Process valve connection		NPT1/2	NPT3/4	NPT1
Process valve nominal pressure (PN)		16		
Pilot pressure	[bar]	4 ... 10		
Standard nominal flow rate	[l/min]	3,000	6,800	12,000
Flow rate	[m³/h]	2.8	6.4	11.2
Process valve operating medium		Neutral gases		
		Filtered compressed air, filter with pore width 0.2 mm, lubricated or unlubricated		
		Non-aggressive liquid		
		Water		
		Mineral oil-based hydraulic oil		
		Compressed air		
		Mineral oil		
Max. viscosity	[mm²/s]	600		
Ambient temperature	[°C]	-10 ... +60		
Temperature of medium	[°C]	-10 ... +80		
CE marking (see declaration of conformity)		-		
Corrosion resistance class CRC ¹⁾		1		

- 1) Corrosion resistance class 1 according to Festo standard 940 070
Components subject to low corrosion stress. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Process valve connection	NPT1¼	NPT1½	NPT2
Process valve nominal pressure (PN)	16		
Pilot pressure [bar]	4 ... 10		
Standard nominal flow rate [l/min]	18,600	23,500	36,100
Flow rate [m³/h]	17.5	22	33.8
Process valve operating medium	Neutral gases		
	Filtered compressed air, filter with pore width 0.2 mm, lubricated or unlubricated		
	Non-aggressive liquid		
	Water		
	Mineral oil-based hydraulic oil		
	Compressed air		
	Mineral oil		
Max. viscosity [mm²/s]	600		
Ambient temperature [°C]	−10 ... +60		
Temperature of medium [°C]	−10 ... +80		
CE marking (see declaration of conformity)	To EU Pressure Equipment Directive		
Corrosion resistance class CRC ¹⁾	1		

- 1) Corrosion resistance class 1 according to Festo standard 940 070
Components subject to low corrosion stress. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Materials		
Angle seat valves		Material number
1 Housing	Gunmetal (red brass)	CC499K
2 Drive head	Brass	–
3 Seals	NBR	–
– Note on materials	Contains PWIS (paint-wetting impairment substances), RoHS-compliant	–


Angle seat valves VZXF, NPT

Technical data – Gunmetal (red brass) design

FESTO

Dimensions

Download CAD data → www.festo.com

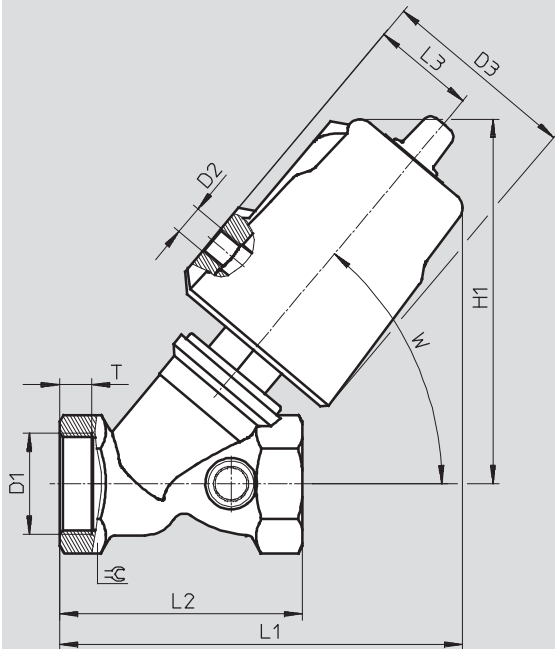

	D1	D2	D3 Ø	H1	L1	L2	L3	T	W	50°
VZXF-L-...-N12-...-H3B1-50-...	NPT1/2	G1/8	62	112	123	66	34	8	50°	27
VZXF-L-...-N34-...-H3B1-50-...	NPT3/4			117	130	75		9		33
VZXF-L-...-N1-...-H3B1-50-...	NPT1			121	133	80		10.5		41
VZXF-L-...-N114-...-H3B1-50-...	NPT1 1/4			139	154	97		12.5		50
VZXF-L-...-N112-...-H3B1-50-...	NPT1 1/2			145	161	107		14.5		56
VZXF-L-...-N2-...-H3B1-50-...	NPT2			154	171	124		16.5		68

Ordering data: Angle seat valve VZXF


	Process valve connection	Part No.	Type
	NPT1/2	1002533	VZXF-L-M22C-M-A-N12-120-H3B1-50-16
		1002534	VZXF-L-M22C-M-B-N12-120-H3B1-50-16
	NPT3/4	1002535	VZXF-L-M22C-M-A-N34-160-H3B1-50-16
		1002536	VZXF-L-M22C-M-B-N34-160-H3B1-50-16
	NPT1	1002537	VZXF-L-M22C-M-A-N1-230-H3B1-50-16
		1002538	VZXF-L-M22C-M-B-N1-230-H3B1-50-10
	NPT1 1/4	1002539	VZXF-L-M22C-M-A-N114-290-H3B1-50-10
		1002540	VZXF-L-M22C-M-B-N114-290-H3B1-50-7
	NPT1 1/2	1002541	VZXF-L-M22C-M-A-N112-350-H3B1-50-8
		1002542	VZXF-L-M22C-M-B-N112-350-H3B1-50-6
	NPT2	1002543	VZXF-L-M22C-M-A-N2-430-H3B1-50-4
		1002544	VZXF-L-M22C-M-B-N2-430-H3B1-50-3


Angle seat valves VZXF, NPT


Technical data – Stainless steel design

FESTO

Function

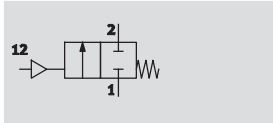

-  - Flow rate Kv
2.8 ... 47.5 m³/h

-  - Connecting thread
NPT1½ ... NPT2



General technical data					
Process valve connection	NPT1/2	NPT3/4	NPT1		NPT1 1/4
Auxiliary pilot air connection	G1/8				
Nominal size (DN)	15	20	25	25	32
Valve function	2/2-way, single solenoid, closed				
Design	Poppet valve with spring return				
Type of mounting	In-line installation				
Mounting position	Any				
Direction of flow	Non-reversible				
Exhaust function	No flow control				
Sealing principle	Soft				
Reset method	Mechanical spring				
Actuation type	Pneumatic				
Type of control	External				
Pilot medium	Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated				
Switching time on [ms]	100			150	110
Switching time off [ms]	310			390	320
Product weight [g]	1,300	1,400	1,600	3,600	2,200

Process valve connection	NPT1¼		NPT1½		NPT2	
Auxiliary pilot air connection	G1/8					
Nominal size (DN)	32	40	40	50	50	
Valve function	2/2-way, single solenoid, closed					
Design	Poppet valve with spring return					
Type of mounting	In-line installation					
Mounting position	Any					
Direction of flow	Non-reversible					
Exhaust function	No flow control					
Sealing principle	Soft					
Reset method	Mechanical spring					
Actuation type	Pneumatic					
Type of control	External					
Pilot medium	Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated					
Switching time on [ms]	150	110	150	120	150	
Switching time off [ms]	390	320	390	320	390	
Product weight [g]	4,200	2,500	4,400	3,500	5,500	

Angle seat valves VZXF, NPT

Technical data – Stainless steel design

FESTO

Operating and environmental conditions					
Process valve connection	NPT½	NPT¾	NPT1		NPT1¼
Process valve nominal pressure (PN)	40				
Pilot pressure [bar]	4 ... 10				
Standard nominal flow rate [l/min]	3,000	6,800	12,000	15,200	18,600
Flow rate [m³/h]	2.8	6.4	11.2	14.3	17.4
Process valve operating medium	Neutral gases				
	Filtered compressed air, filter with pore width 0.2 mm, lubricated or unlubricated				
	Non-aggressive liquid				
	Water				
	Mineral oil-based hydraulic oil				
	Compressed air				
	Mineral oil				
Max. viscosity [mm²/s]	600				
Ambient temperature [°C]	−10 ... +60				
Temperature of medium [°C]	−40 ... +200				
CE marking (see declaration of conformity)	–				To EU Pressure Equipment Directive
Corrosion resistance class CRC ¹⁾	3				

1) Corrosion resistance class 3 according to Festo standard 940 070

Components subject to high corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as solvents and cleaning agents.

Process valve connection	NPT1¼		NPT1½		NPT2	
Process valve nominal pressure (PN)	40					
Pilot pressure [bar]	4 ... 10					
Standard nominal flow rate [l/min]	23,000	23,500	28,200	36,100	50,700	
Flow rate [m³/h]	21.5	22	26.4	33.8	47.5	
Process valve operating medium	Neutral gases					
	Filtered compressed air, filter with pore width 0.2 mm, lubricated or unlubricated					
	Non-aggressive liquid					
	Water					
	Mineral oil-based hydraulic oil					
	Compressed air					
	Mineral oil					
Max. viscosity [mm²/s]	600					
Ambient temperature [°C]	−10 ... +60					
Temperature of medium [°C]	−40 ... +200					
CE marking (see declaration of conformity)	To EU Pressure Equipment Directive					
Corrosion resistance class CRC ¹⁾	3					

1) Corrosion resistance class 3 according to Festo standard 940 070

Components subject to high corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as solvents and cleaning agents.

Materials		
Angle seat valves		Material number
1 Housing	Stainless steel casting	1.4408
2 Drive head	Stainless steel	–
3 Seals	PTFE	–
– Note on materials	Contains PWIS (paint-wetting impairment substances), RoHS-compliant	–


Angle seat valves VZXF, NPT

Technical data – Stainless steel design

FESTO

Dimensions

Download CAD data → www.festo.com

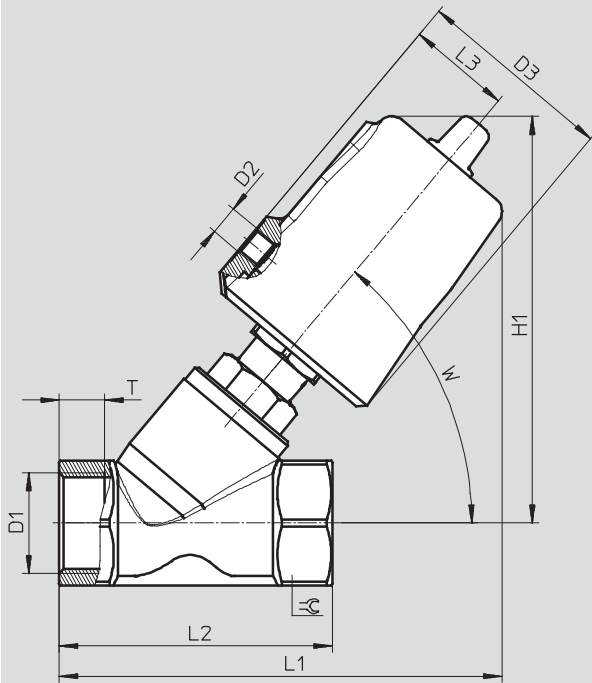


	D1	D2	D3 Ø	H1	L1	L2	L3	T	W	≈C
VZXF-L-...-N12-...-V4V4T-50-...	NPT1/2	G1/8	62	129	135	65	34	12	50°	27
VZXF-L-...-N34-...-V4V4T-50-...	NPT3/4			130	138	75		13		32
VZXF-L-...-N1-...-V4V4T-50-...	NPT1			135	146	90		15		42
VZXF-L-...-N1-...-V4V4T-80-...	NPT1		94	177	184		48			
VZXF-L-...-N114-...-V4V4T-50-...	NPT1 1/4		62	151	155	110	34	17		50
VZXF-L-...-N114-...-V4V4T-80-...	NPT1 1/4		94	183	194		48			
VZXF-L-...-N112-...-V4V4T-50-...	NPT1 1/2		62	155	174	120	34	19		55
VZXF-L-...-N112-...-V4V4T-80-...	NPT1 1/2		94	187	202		48			
VZXF-L-...-N2-...-V4V4T-50-...	NPT2		62	167	193	150	34	21		70
VZXF-L-...-N2-...-V4V4T-80-...	NPT2		94	199	222		48			

Angle seat valves VZXF, NPT

Technical data – Stainless steel design

FESTO

Ordering data: Angle seat valve VZXF			
	Process valve connection	Part No.	Type
	NPT $\frac{1}{2}$	1002545	VZXF-L-M22C-M-A-N12-130-M1-V4V4T-50-25
		1002546	VZXF-L-M22C-M-B-N12-130-M1-V4V4T-50-40
	NPT $\frac{3}{4}$	1002547	VZXF-L-M22C-M-A-N34-180-M1-V4V4T-50-20
		1002548	VZXF-L-M22C-M-B-N34-180-M1-V4V4T-50-20
	NPT1	1002549	VZXF-L-M22C-M-A-N1-240-M1-V4V4T-50-16
		1002550	VZXF-L-M22C-M-B-N1-240-M1-V4V4T-50-10
		1002551	VZXF-L-M22C-M-A-N1-240-M1-V4V4T-80-40
		1002552	VZXF-L-M22C-M-B-N1-240-M1-V4V4T-80-22
	NPT1 $\frac{1}{4}$	1002553	VZXF-L-M22C-M-A-N114-310-M1-V4V4T-50-9
		1002554	VZXF-L-M22C-M-B-N114-310-M1-V4V4T-50-7
		1002555	VZXF-L-M22C-M-A-N114-310-M1-V4V4T-80-25
		1002556	VZXF-L-M22C-M-B-N114-310-M1-V4V4T-80-10
	NPT1 $\frac{1}{2}$	1002557	VZXF-L-M22C-M-A-N112-350-M1-V4V4T-50-7
		1002558	VZXF-L-M22C-M-B-N112-350-M1-V4V4T-50-6
		1002559	VZXF-L-M22C-M-A-N112-350-M1-V4V4T-80-20
		1002560	VZXF-L-M22C-M-B-N112-350-M1-V4V4T-80-8
	NPT2	1002561	VZXF-L-M22C-M-A-N2-450-M1-V4V4T-50-4
		1002562	VZXF-L-M22C-M-B-N2-450-M1-V4V4T-50-3
		1002563	VZXF-L-M22C-M-A-N2-450-M1-V4V4T-80-12
		1002564	VZXF-L-M22C-M-B-N2-450-M1-V4V4T-80-5

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com