FESTO






Product range overview

Method of measurement	Pressure measuring range [bar]	Measured variable	Pneumatic connection	Operating voltage [V DC]	Electrical connection
Piezoresistive pressure sensor	-1 +1 0 2	Relative pressure	G1/4	8 30	Plug M12x1, 4-pin, to EN 60947-5-2,
	0 6				round design
Thin-film metal pressure sensor	0 10 -1 +10 0 16 0 25 0 50 0 100	Relative pressure	G1/4	8 30	Plug M12x1, 4-pin, to EN 60947-5-2, round design

Pressure transmitters SPTW Peripherals overview


FESTO

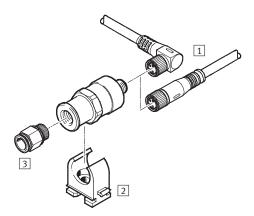

Mou	nting attachments and accessories	→ Page/Internet
1	Connecting cable	8
	NEBU-M12	
2	Pipe clamp	-
	(included in the scope of delivery)	
3	Push-in fitting	8
	QS-1/4	



Type codes

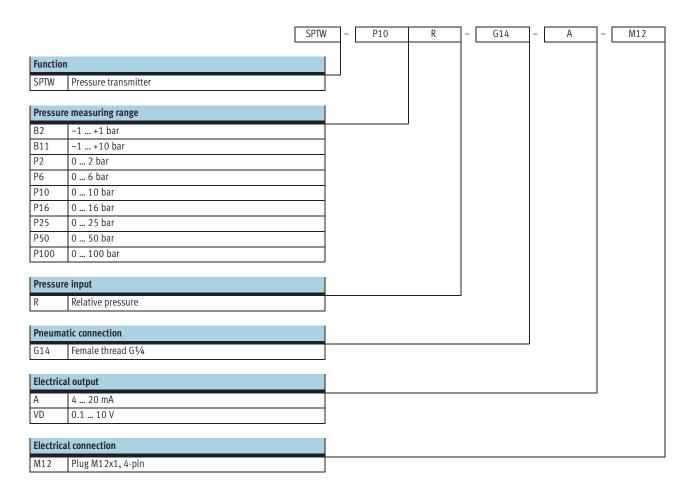

Technical data


FESTO

Function

SPTW-...-A



SPTW-...-VD



Voltage

8 ... 30 V DC

Pressure

-1 ... +100 bar

Temperature range

0 ... 80 °C



• Pressure and vacuum sensing for gaseous and liquid media

• High media resistance

General technical data		
Certification	cULus listed (OL)	
	C-Tick	
CE mark (see declaration of conformity) ¹⁾	To EU EMC Directive	
Note on materials	Contains PWIS (paint wetting impairment substances)	
	RoHS-compliant	

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com > Support > User documentation.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Input signal/measuring element										
SPTW-		B2	P2	P6	P10	B11	P16	P25	P50	P100
Measured variable		Relative pre	Relative pressure							
Method of measurement		Piezoresist	ive pressure	sensor	Thin-film m	etal pressur	e sensor			
Pressure measuring range starting	[bar]	-1	0	0	0	-1	0	0	0	0
value										
Pressure measuring range final	[bar]	1	2	6	10	10	16	25	50	100
value										
Overload pressure	[bar]	2	4	12	20	20	32	50	100	200
Operating medium		Compresse	d air in accor	dance with I	SO 8573-1:2	010 [-:-:-]	•		•	
		Neutral liqu	uids							
		Gaseous m	edia							
Temperature of medium	[°C]	0 80								
Ambient temperature [°C]		0 80								

Output, general		
Accuracy ±FS ¹⁾	[%]	1
Repetition accuracy ±FS ¹⁾	[%]	0.1

1) % FS = % of the measuring range (full scale)

Analogue output				
SPTW		A	VD	
Analogue output	[mA]	4 20	-	
	[V]	-	0.1 10	
Linearity error ±FS ¹⁾	[%]	0.5		

1) % FS = % of the measuring range (full scale)



Technical data

Output, additional data	
Protection against short circuit	Yes

Electronic components		
SPTW	A	VD
Operating voltage range DC [V]	8 30	14 30
Reverse polarity protection	For operating voltage	

Electromechanical components		
Electrical connection	Plug M12x1, 4-pin	
	To EN 60947-5-2	
	Round design	
Plug housing material	PA PA	

Mechanical components			
Type of mounting	Via female thread		
	Via accessories		
Mounting position	Any		
Pneumatic connection	G1/4		
Product weight [g]	80		
Housing materials	High-alloy stainless steel		
	PA		
	VMQ (silicone)		
Materials in contact with the medium	High-alloy stainless steel		

Immissions/emissions	
Protection class	IP67
Corrosion resistance class CRC ¹⁾	4


¹⁾ Corrosion resistance class 4 according to Festo standard 940 070 Components subject to particularly high corrosion stress. Parts used with aggressive media, e.g. in the food or chemical industry. These applications should be supported with special tests with the media if required.

Pin allocation				
SPTWA				
Plug M12x1, 4-pin	Pin	Meaning		
1	1	Operating voltage U _O /signal +		
(+ + + + + + + + + + + + + + + + + + +	3	0 V/signal –		
+				
3				

SPTWVD				
Plug M12x1, 4-pin	Pin	Meaning		
1	1	Operating voltage U_0		
(+++) (A	3	0 V		
(+) -	4	Analogue output		
3				

FESTO

Technical data

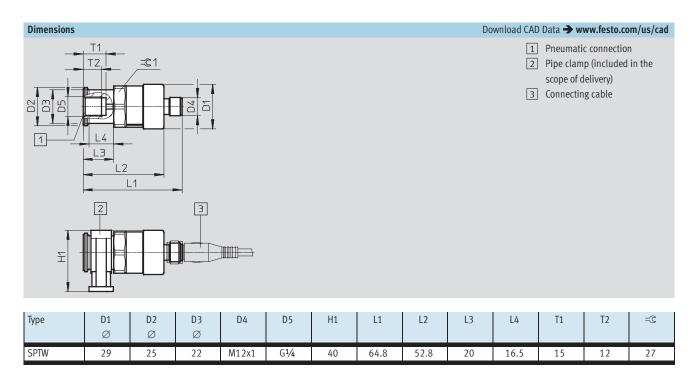

Ordering data					
Pressure measuring range [bar]	Analogue output	Pneumatic connection	Electrical connection	Part No.	Type
-1 +1	4 20 mA	G1/4	Plug M12x1, 4-pin	8000100	SPTW-B2R-G14-A-M12
-1 +10				8000101	SPTW-B11R-G14-A-M12
0 2				8000102	SPTW-P2R-G14-A-M12
0 6				8000103	SPTW-P6R-G14-A-M12
0 10				8000104	SPTW-P10R-G14-A-M12
0 16				8000105	SPTW-P16R-G14-A-M12
0 25				8000106	SPTW-P25R-G14-A-M12
0 50				8000107	SPTW-P50R-G14-A-M12
0 100				8000108	SPTW-P100R-G14-A-M12
-1 +1	0.1 10 V	G1/4	Plug M12x1, 4-pin	8000109	SPTW-B2R-G14-VD-M12
-1 +10				8000110	SPTW-B11R-G14-VD-M12
0 2				8000111	SPTW-P2R-G14-VD-M12
0 6				8000112	SPTW-P6R-G14-VD-M12
0 10				8000113	SPTW-P10R-G14-VD-M12
0 16				8000114	SPTW-P16R-G14-VD-M12
0 25				8000115	SPTW-P25R-G14-VD-M12
0 50				8000116	SPTW-P50R-G14-VD-M12
0 100				8000117	SPTW-P100R-G14-VD-M12

FESTO

Accessories

01.		- 11				
Ordering da	Ordering data – Connecting cables					
				Technical data → Internet: nebu		
	Number of	Cable	Part No.	Type		
	wires/pins	length				
		[m]				
M12x1, straight socket, open end						
	3	2.5	541363	NEBU-M12G5-K-2.5-LE3		
		5	541364	NEBU-M12G5-K-5-LE3		
	4	2.5	550326	NEBU-M12G5-K-2.5-LE4		
		5	541328	NEBU-M12G5-K-5-LE4		
	5	2.5	541330	NEBU-M12G5-K-2.5-LE5		
		5	541331	NEBU-M12G5-K-5-LE5		
M12x1, an	gled socket, op	en end				
	3	2.5	541367	NEBU-M12W5-K-2.5-LE3		
%		5	541370	NEBU-M12W5-K-5-LE3		
	4	2.5	550325	NEBU-M12W5-K-2.5-LE4		
		5	541329	NEBU-M12W5-K-5-LE4		
Socket M12	2x1, straight; p	lug M8x1,	, straight			
	4	2.5	554034	NEBU-		
				M12G5-E-2.5-W2-M8G4-V1 ¹⁾		
4	4]	554033	NEBU-		
				M12G5-E-2.5-W3-M8G4-V2 ²⁾		

1)	Pin allocation designed for connecting the pressure transmitter SPTWA-M12 to the signal converter
	SVE4-IS

Pin allocation designed for connecting the pressure transmitter SPTW-...-VD-M12 to the signal converter SVE4-US

Ordering data – Push-in fittings ¹⁾				
		Technical data → Internet: quick star		
	For tubing O.D.	Part No.	Туре	
	4 mm	190644	QS-1/4-41)	
3	6 mm	153003	QS-1/4-6 ¹⁾	
	8 mm	153005	QS-1/4-8 ¹⁾	

¹⁾ Temperature-dependent operating pressure –0.95 ... 14 bar

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components Complete custom engineered solutions



Custom Control Cabinets Comprehensive engineering support and on-site services



Complete Systems Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical Electromechanical actuators, motors, controllers & drives



Pneumatics Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Festo North America

Festo Regional Contact Center

5300 Explorer Drive Mississauga, Ontario L4W 5G4 Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786) 1.800.96.FESTO (1.800.963.3786) Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786) Fax: 1.800.96.FESTO (1.800.963.3786) Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786) Fax: 1.877.FX.FESTO (1.877.393.3786) Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation 395 Moreland Road P.O. Box 18023 Hauppauge, NY 11788, USA www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330 Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600 Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center 2601 Cambridge Court, Suite 320 Auburn Hills, MI 48326, USA

New York

395 Moreland Road Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788 Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4 Phone: 1.905.624.9000; Fax: 1.905.624.9001; Email: festo.canada@ca.festo.com

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquinahuac, 54020 Tlalnepantla, Edo, de México Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65; Email: festo.mexico@mx.festo.com www.festo.com/mx

Central USA

Festo Corporation 1441 East Business Center Drive Mt. Prospect, IL 60056, USA Phone: 1.847.759.2600 Fax: 1 847 768 9480



Western USA

Festo Corporation 4935 Southfront Road, Livermore, CA 94550. USA

Phone: 1.925.371.1099 Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela