

Valves VMEM, mechanically actuated


FESTO



Valves VMEM, mechanically actuated

Key features

FESTO

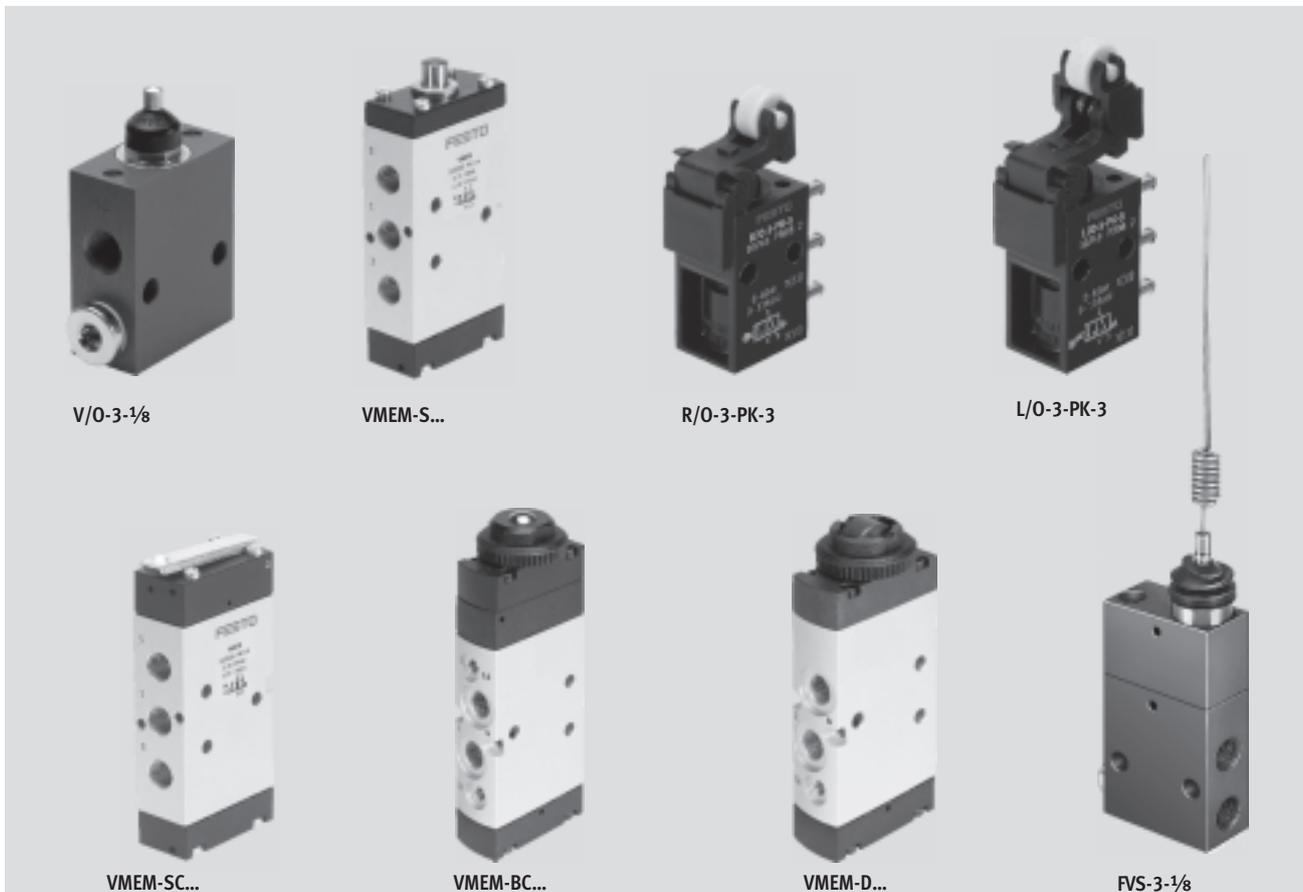

Innovative

- Small and compact for a wide range of pneumatic applications
- Large selection of valve functions; 3/2-way, 4/2-way and 5/2-way functions
- With flow rates of up to 1,000 l/min, valves VMEM offer outstanding pneumatic performance for a great variety of applications
- Low weight
- Minimal actuating forces

Versatile

- Flexibility of the pneumatic working ports provides a practical solution to different requirements
- Round silencer for ducted exhaust air
- Suitable for vacuum in some cases
- Reverse operation possible in some cases
- Actuation: direct and piloted
- Pressure range from vacuum to 10 bar possible
- Version:
 - Stem actuated valve
 - Swivel lever valve
 - Roller lever valve, toggle lever valve
 - Whisker valve
 - Roller actuated valve
 - Ball actuated valve

Reliable


- Durable thanks to proven piston spool and piston poppet valves
- Sturdy thanks to metal or plastic housing and connecting thread or connector

Easy to mount

- Front panel mounting or mounting on bracket

Valves VMEM, mechanically actuated

Key features

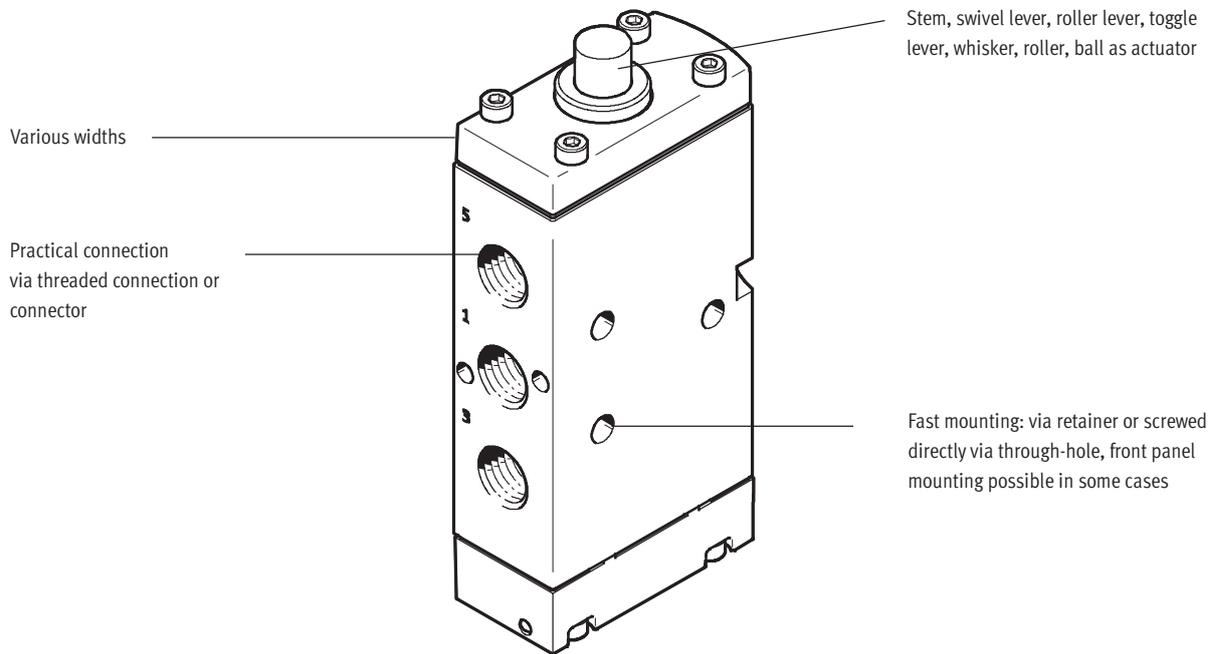

Equipment options

3/2-way valve, monostable

- Normally open/closed
- Mechanical spring
- Vacuum operation possible
- Directly actuated and pneumatically piloted
- Ducted exhaust air

4/2-way valve, monostable

- Mechanical spring
- Pneumatically piloted
- Ducted exhaust air

5/2-way valve, monostable

- Pneumatic spring/mechanical spring
- Vacuum operation possible
- Reverse operation in some cases
- Pneumatically piloted
- Ducted exhaust air

Valve selection

→ Internet: www.festo.com

You order mechanically and manually operated valves using the order code:


Ordering system for valves
 → Internet: mechanically and manually operated directional control valves

Valves VMEM, mechanically actuated


Peripherals overview

Valves, mechanically actuated

5/2-way stem actuated valve VMEM-S

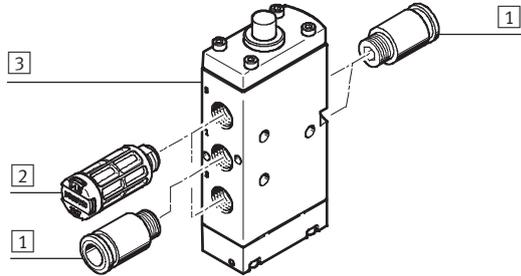


3/2-way roller lever valve R

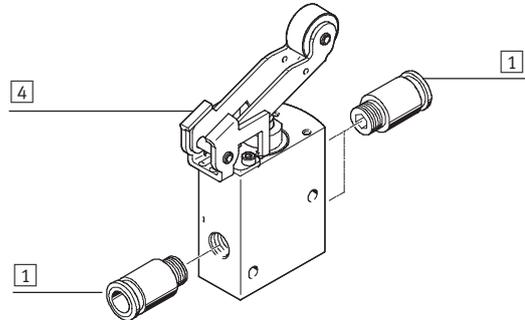


	Brief description	→ Page/Internet	
1	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	41
2	Silencer	For exhaust ports (3, 5)	41
3	Stem actuated valve	VMEM-S	11
4	Roller lever valve	R	26

3/2-way roller lever valve with idle return L

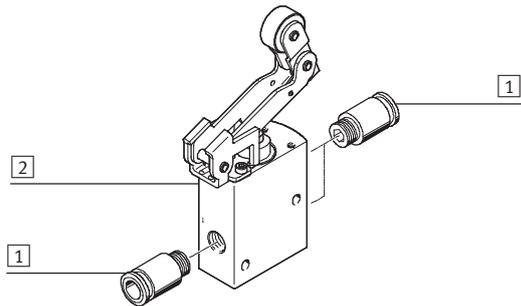


3/2-way toggle lever valve LS

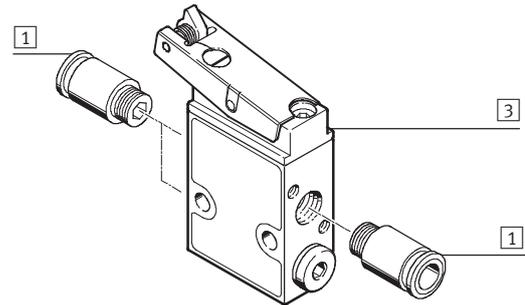


	Brief description	→ Page/Internet	
1	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	41
2	Roller lever valve with idle return	L	26
3	Toggle lever valve	LS	26

5/2-way roller actuated valve VMEM-D

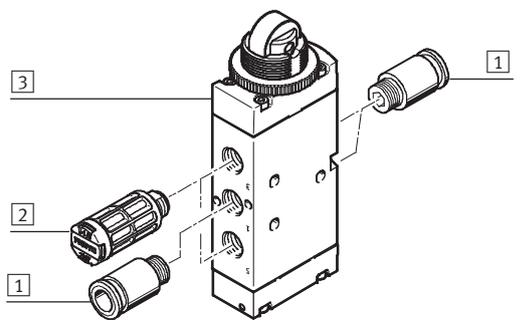

3/2-way ball actuated valve VMEM-B

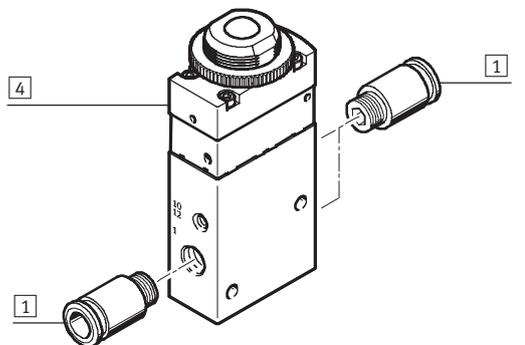

	Brief description	→ Page/Internet	
1	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	41
2	Silencer	For exhaust ports (3, 5)	41
3	Roller actuated valve	VMEM-D	32
4	Ball actuated valve	VMEM-B	37

Valves VMEM, mechanically actuated

Key features – Pneumatic components

Mechanically actuated valves









Mechanically actuated valves are often used as "signal valves" and feed back a pneumatic signal to the controller. This feedback, e.g. "End position reached", is realised via a stem actuated valve or roller actuated

valve. This is a simple application, but it is an extremely popular solution for smaller machines and conveying systems, e.g. for controlling simple clamping and locking operations in

semi-automated assembly and production. The modern design with metal housing combines sturdiness and functionality.

Advantages of mechanically actuated valves:

- No electronic controller required
- No programming effort required
- Easy to adjust and connect
- Control and measurement via sensors

Valve functions		
Circuit symbol	Type	Description
Stem actuated valve		
	VMEM-ST-M32C-M V-3-M5 V-3-1/4-B V/O-3-PK-3	3/2-way valve, monostable • Normally closed • Mechanical spring return • Suitable for vacuum (not V/O-3-PK-3)
	VMEM-ST-M32U-M VO-3-1/4-B	3/2-way valve, monostable • Normally open • Mechanical spring return • Suitable for vacuum
	V/O-3-1/8	3/2-way valve, monostable • Normally open/closed • Mechanical spring return • Suitable for vacuum
	VMEM-STC-M32C-M VS-3-1/8	3/2-way valve, monostable • Normally closed • Pneumatically piloted, internal pilot air • Mechanical spring return
	VMEM-STC-M32U-M	3/2-way valve, monostable • Normally open • Pneumatically piloted, internal pilot air • Mechanical spring return
	VOS-3-1/8	3/2-way valve, monostable • Normally open • Pneumatically piloted, internal pilot air • Mechanical spring return
	VMEM-STCZ-M32C-M	3/2-way valve, monostable • Normally closed • Pneumatically piloted, external pilot air • Mechanical spring return
	VMEM-STCZ-M32U-M	3/2-way valve, monostable • Normally open • Pneumatically piloted, external pilot air • Mechanical spring return
	VS-4-1/8	4/2-way valve, monostable • Pneumatically piloted, internal pilot air • Mechanical spring return

Valves VMEM, mechanically actuated

Key features – Pneumatic components

Valve functions		
Circuit symbol	Type	Description
Stem actuated valve		
	VMEM-S-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum • Reverse operation possible
	VMEM-S-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> • (Internal) pneumatic spring return
	VMEM-S-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> • (External) pneumatic spring return • Suitable for vacuum • Reverse operation possible
	VMEM-SC-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> • Pneumatically piloted, internal pilot air • Mechanical spring return
	VMEM-SC-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> • Pneumatically piloted, internal pilot air • (Internal) pneumatic spring return
	VMEM-SCZ-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> • Pneumatically piloted, external pilot air • Mechanical spring return • Suitable for vacuum • Reverse operation possible
	VMEM-SCZ-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> • Pneumatically piloted, external pilot air • (External) pneumatic spring return • Suitable for vacuum • Reverse operation possible
	V-5-1/4-B	5/2-way valve, monostable <ul style="list-style-type: none"> • Normally open/closed • Mechanical spring return • Suitable for vacuum
Swivel lever valve		
	RW/O-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open/closed • Mechanical spring return • Suitable for vacuum
Whisker valve		
	FVS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed • Mechanical spring return • Pneumatically piloted, internal pilot air
	FVS0-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open • Mechanical spring return • Pneumatically piloted, internal pilot air

Valves VMEM, mechanically actuated

Key features – Pneumatic components

Valve functions – Circuit symbol		
Circuit symbol	Type	Description
Roller lever valve with idle return		
	L/O-3-PK-3	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open/closed • Mechanical spring return
	L-3-M5 L-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed • Mechanical spring return • Suitable for vacuum
	L-5-1/4-B	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum
Toggle lever valve		
	LS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed • Mechanical spring return • Pneumatically piloted, internal pilot air
	LOS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open • Mechanical spring return • Pneumatically piloted, internal pilot air
	LO-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open • Mechanical spring return • Suitable for vacuum
	LS-4-1/8	4/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Pneumatically piloted, internal pilot air

Valves VMEM, mechanically actuated

Key features – Pneumatic components

Valve functions – Circuit symbol		
Circuit symbol	Type	Description
Roller lever, roller actuated valve		
	VMEM-DT-M32C-M R-3-M5 R-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed • Mechanical spring return • Suitable for vacuum
	VMEM-DT-M32U-M RO-3-1/4-B	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open • Mechanical spring return • Suitable for vacuum
	VMEM-D-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum • Reverse operation possible
	VMEM-D-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> • (Internal) pneumatic spring return
	VMEM-D-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> • (External) pneumatic spring return • Suitable for vacuum • Reverse operation possible
	R/O-3-PK-3	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open/closed • Mechanical spring return
	RS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed • Mechanical spring return • Pneumatically piloted, internal pilot air
	ROS-3-1/8	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open • Mechanical spring return • Pneumatically piloted, internal pilot air
	RS-4-1/8	4/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Pneumatically piloted, internal pilot air
	R-5-1/4-B	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum

Valves VMEM, mechanically actuated

Key features – Pneumatic components

Valve functions		
Circuit symbol	Type	Description
Ball actuated valve		
	VMEM-BTC-M32C-M	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed • Mechanical spring return • Pneumatically piloted, internal pilot air
	VMEM-BTC-M32U-M	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open • Mechanical spring return • Pneumatically piloted, internal pilot air
	VMEM-BTCZ-M32C-M	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed • Mechanical spring return • Pneumatically piloted, external pilot air
	VMEM-BTCZ-M32U-M	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally open • Mechanical spring return • Pneumatically piloted, external pilot air
	VMEM-BC-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Pneumatically piloted, internal pilot air
	VMEM-BC-M52-A	5/2-way valve, monostable <ul style="list-style-type: none"> • Pneumatic spring return • Pneumatically piloted, internal pilot air
	VMEM-BCZ-M52-M	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Pneumatically piloted, external pilot air • Suitable for vacuum • Reverse operation possible
	VMEM-BCZ-M52-E	5/2-way valve, monostable <ul style="list-style-type: none"> • Pneumatic spring return • Pneumatically piloted, external pilot air • Suitable for vacuum • Reverse operation possible

Note

A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup).

Valves VMEM, mechanically actuated

Type codes

		VMEM	-	STCZ	-	M32C	-	M	-	G14
Valve series										
VMEM	Mechanically actuated valves									
Version										
Actuation										
S	Stem actuated valve									
D	Valve with roller actuation									
B	Valve with ball actuation									
Design principle										
-	Piston spool									
T	Disk seat									
Actuation method										
-	Directly actuated									
C	Pneumatically piloted									
Pilot air supply										
-	Internal									
Z	External									
Switching function										
-	Monostable valve									
A	Active (spring)									
X	Passive (air)									
Valve function										
M32C	3/2-way valve, monostable, normally closed									
M32U	3/2-way valve, monostable, normally open									
M52	5/2-way valve, monostable									
Reset method										
-	None									
A	Pneumatic spring, internal									
E	Pneumatic spring, external									
M	Mechanical spring									
Pneumatic connection										
G14	Fitting G $\frac{1}{4}$									
G18	Fitting G $\frac{3}{8}$									

Stem actuated valves VMEM


Technical data – Stem actuated valve, standard nominal flow rate 80 ... 140 l/min

 Flow rate
 80 ... 1,000 l/min

Mounting via through-holes

 Pressure
 -0.95 ... +10 bar

 Temperature range
 -10 ... +60 °C

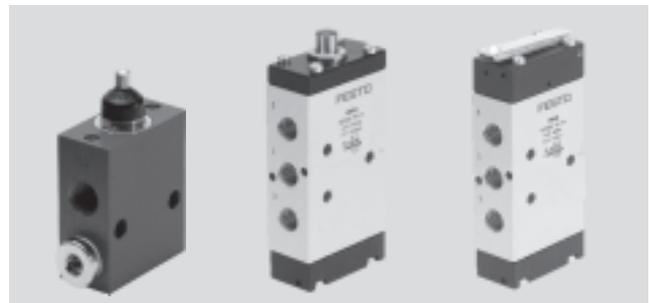

General technical data					
Type	V3-M5	V/O-3-PK-3	V ... -3-1/8	VS-4-1/8	V/O-3-1/8 RW/O-3-1/8
Standard nominal flow rate [l/min] 1 → 2	80		120	120	140
Valve function	3/2-way valve		3/2-way valve	4/2-way valve	3/2-way valve
Design	Disk seat valve, directly actuated		Disk seat valve, piloted	Disk seat valve, piloted	Disk seat valve, directly actuated
Pneumatic connection	M5	PK-3 ¹⁾	G1/8	G1/8	G1/8
Nominal size [mm]	2.0	2.5	3.5	3.5	3.5
Weight [g]	25	20	110	220	90 ²⁾ 150
Actuating force [N]	23.0	17.0	3.1	3.1	28.0
• at 6 bar					
• with normally closed position	[N]	–	17.0	–	–
• with normally open position	[N]	–	24.0	–	–

1) PK-3=Barbed fitting for plastic tubing with 3 mm nominal diameter
 2) Value 90 with stem actuated valve, value 150 with swivel lever valve

Materials					
Type	V3-M5	V/O-3-PK-3	V ... -3-1/8	VS-4-1/8	V/O-3-1/8 RW/O-3-1/8
Seal	NBR				
Housing	Die-cast zinc	POM	Anodised aluminium		

Operating and environmental conditions					
Type	V3-M5	V/O-3-PK-3	V ... -3-1/8	VS-4-1/8	V/O-3-1/8 RW/O-3-1/8
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]				Compressed air – oil mist lubrication
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)				
Operating pressure range [bar]	-0.95 ... 8	0 ... 8	3.5 ... 8		-0.95 ... 8
Temperature of medium [°C]	-10 ... +60				
Ambient temperature [°C]	-10 ... +60	–			

Technical data – Actuator attachment for swivel lever valve RW/O-3-1/8			
Swivel lever, type	ASK-02 (short)	ASL-02 (long)	ASS-02 (rod)
Actuating force [N] Max.	7	Dependent on starting height	
Weight [g]	30	35	30

Materials – Swivel lever	
Swivel lever	Aluminium, steel

Stem actuated valves VMEM

Technical data – Stem actuated valve, standard nominal flow rate 500 l/min

General technical data					
Type	VMEM-ST-M32	VMEM-STC ... -M32	VMEM-S-M52	VMEM-SC-M52	VMEM-SCZ-M52
Standard nominal flow rate [l/min] 1 → 2	500				
Valve function	3/2-way valve		5/2-way valve		
Reset method	Mechanical spring		Mechanical or pneumatic spring		
Design	Disk seat valve, directly actuated	Disk seat valve, piloted	Piston spool valve, directly actuated	Piston spool valve, piloted	Piston spool valve, piloted
Pneumatic connection	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$
Pilot air supply	–	Internal or external	–	Internal	External
Nominal size [mm]	4.0	4.0	4.0	4.0	4.0
Weight [g]	130	152	148	170	170
Actuating force [N]	80 ¹⁾ 130	15.5	28 ²⁾ 39	15.5	15.5

- 1) Value 80 with normally closed valve, value 130 with normally open valve
 2) Value 28 with mechanical spring reset method, value 39 with pneumatic spring reset method

Materials					
Type	VMEM-ST-M32	VMEM-STC ... -M32	VMEM-S-M52	VMEM-SC-M52	VMEM-SCZ-M52
Cover	–	POM	PA		
Seal	NBR				
Housing	Anodised wrought aluminium alloy				
Note on materials	RoHS-compliant				

Operating and environmental conditions					
Type	VMEM-ST-M32	VMEM-STC ... -M32	VMEM-S-M52	VMEM-SC-M52	VMEM-SCZ-M52
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]				
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)				
Operating pressure range [bar]					
N/C valves	–0.95 ... 8	3.5 ... 8	–	–	–
N/O valves	–0.95 ... 8	4.5 ... 8	–0.95 ... 10 ¹⁾	2.5 ... 10 ²⁾	2.5 ... 10
Temperature of medium [°C]	–10 ... +60				
Ambient temperature [°C]	–10 ... +60				

- 1) Suitable for vacuum, mechanical spring or external pneumatic spring reset method (in the type codes Reset method M: Mechanical spring or E: External pneumatic spring)
 2) Not suitable for vacuum, internal pneumatic spring reset method (in the type codes Reset method A: Internal pneumatic spring)

Stem actuated valves VMEM

Technical data – Stem actuated valve, standard nominal flow rate 550 ... 600 l/min

General technical data			
Type	V-5-1/4-B	VO-3-1/4-B	V-3-1/4-B
Standard nominal flow rate [l/min] 1 → 2	550	600	
Valve function	5/2-way valve	3/2-way valve	
Design	Disk seat valve, directly actuated	Disk seat valve, directly actuated	Disk seat valve, directly actuated
Pneumatic connection	G1/4	G1/4	G1/4
Nominal size [mm]	7.0	7.0	7.0
Weight [g]	240	130	130
Actuating force [N]	198.0	93.0	71.0

Materials	
Seal	NBR
Housing	Die-cast aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	-0.95 ... 10
Temperature of medium [°C]	-10 ... +60
Ambient temperature [°C]	-10 ... +60

Stem actuated valves VMEM

Technical data – Stem actuated valve, standard nominal flow rate 1,000 l/min

General technical data				
Type	VMEM-ST	VMEM-S	VMEM-SC	VMEM-SCZ
Standard nominal flow rate [l/min] 1 → 2	1,000			
Valve function	3/2-way valve	5/2-way valve		
Reset method	Mechanical spring	Mechanical or pneumatic spring		
Design	Disk seat valve, directly actuated	Piston spool valve, directly actuated	Piston spool valve, directly actuated	Piston spool valve, directly actuated
Pneumatic connection	G $\frac{1}{4}$	G $\frac{1}{4}$	G $\frac{1}{4}$	G $\frac{1}{4}$
Pilot air supply	–	–	Internal	External
Nominal size [mm]	6.0	6.0	6.0	6.0
Weight [g]	198	320	300	300
Actuating force [N]	80 ¹⁾ 140	38.0 ²⁾ 65.0	15.0	15.5

- 1) Value 80 with normally closed valve, value 140 with normally open valve
 2) Value 38 with mechanical spring reset method, value 65 with pneumatic spring reset method

Materials				
Type	VMEM-ST	VMEM-S	VMEM-SC	VMEM-SCZ
Cover	–	PA		
Seal	NBR			
Housing	Anodised wrought aluminium alloy			
Note on materials	RoHS-compliant			





Operating and environmental conditions				
Type	VMEM-ST	VMEM-S	VMEM-SC	VMEM-SCZ
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]			
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)			
Operating pressure range [bar]				
N/C valves	-0.95 ... 8	–	–	–
N/O valves	-0.95 ... 8	-0.95 ... 10 ¹⁾	2.5 ... 10 ²⁾	2.5 ... 10
Temperature of medium [°C]	-10 ... +60			
Ambient temperature [°C]	-10 ... +60			

- 1) Suitable for vacuum, mechanical spring or external pneumatic spring reset method (in the type codes Reset method M: Mechanical spring or E: External pneumatic spring)
 2) Not suitable for vacuum, internal pneumatic spring reset method (in the type codes Reset method A: Internal pneumatic spring)


Stem actuated valves VMEM

Sectional views


Sectional view
 V-3-1/4-B, normally closed VO-3-1/4-B, normally open V/O-3-PK-3 V/O-3-1/8

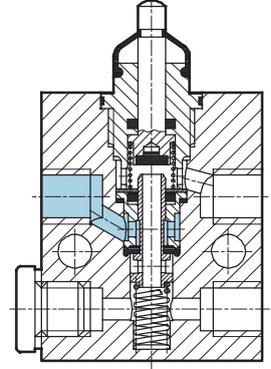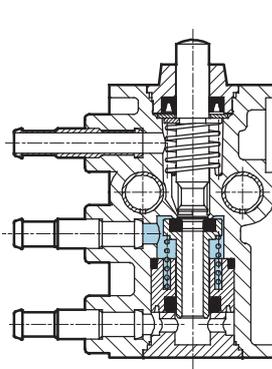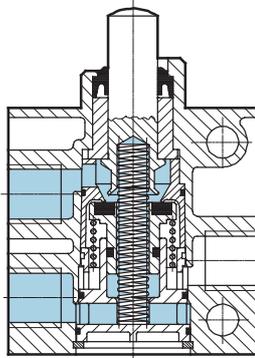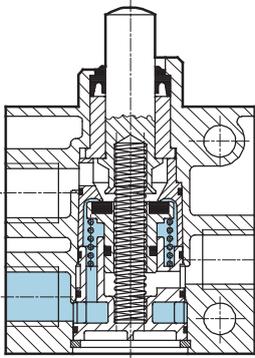


V ... -3-1/8, normally closed

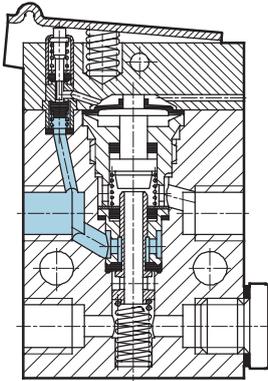


Actuator attachment at left
(number 1 on the attachment above
number 1 on the housing)




V ... -3-1/8, normally open

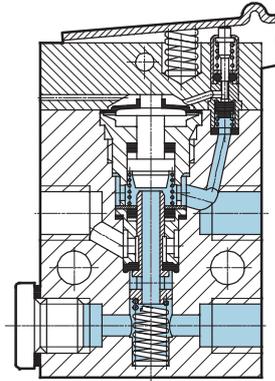

Actuator attachment at right
(number 1 on the attachment above
number 2 on the housing)




VS-4-1/8

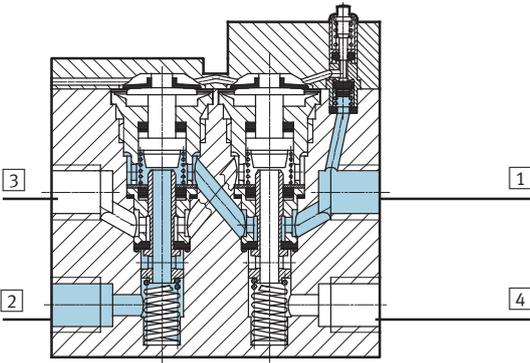

- 1 Supply port
- 2, 4 Working port
- 3 Exhaust port

V-3-M5



Note
 The sectional views, shown on the stem actuated valve, also apply in principle to the roller lever, toggle lever and swivel lever valves. The function remains the same, only the operation via actuator attachments differs.

Stem actuated valves VMEM


Technical data




Dimensions

Download CAD Data → www.festo.com/us/cad

Stem actuated valve V-3-1/4-B, VO-3-1/4-B

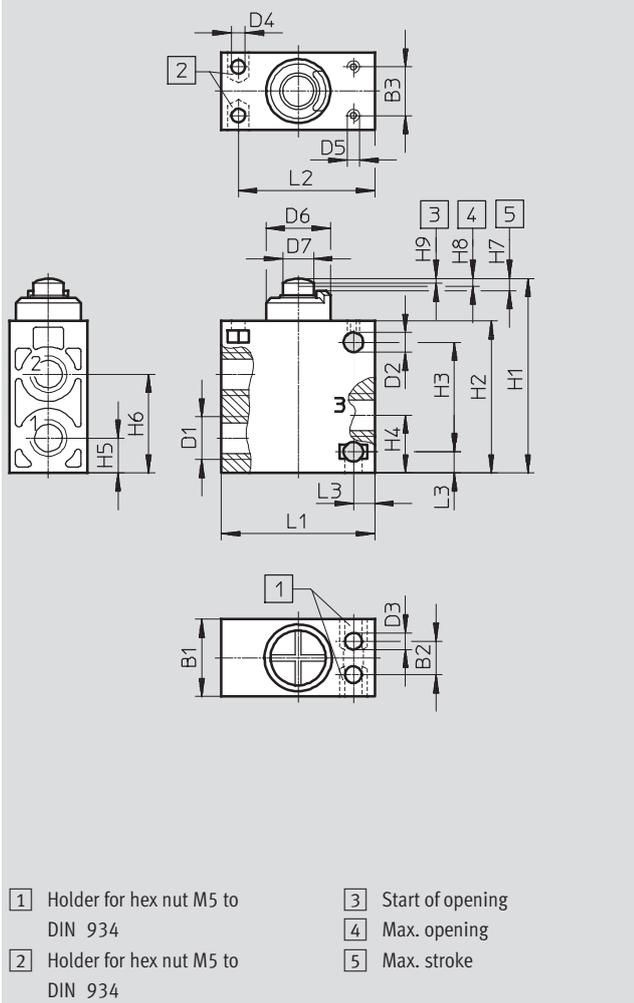

Stem actuated valve V-5-1/4-B

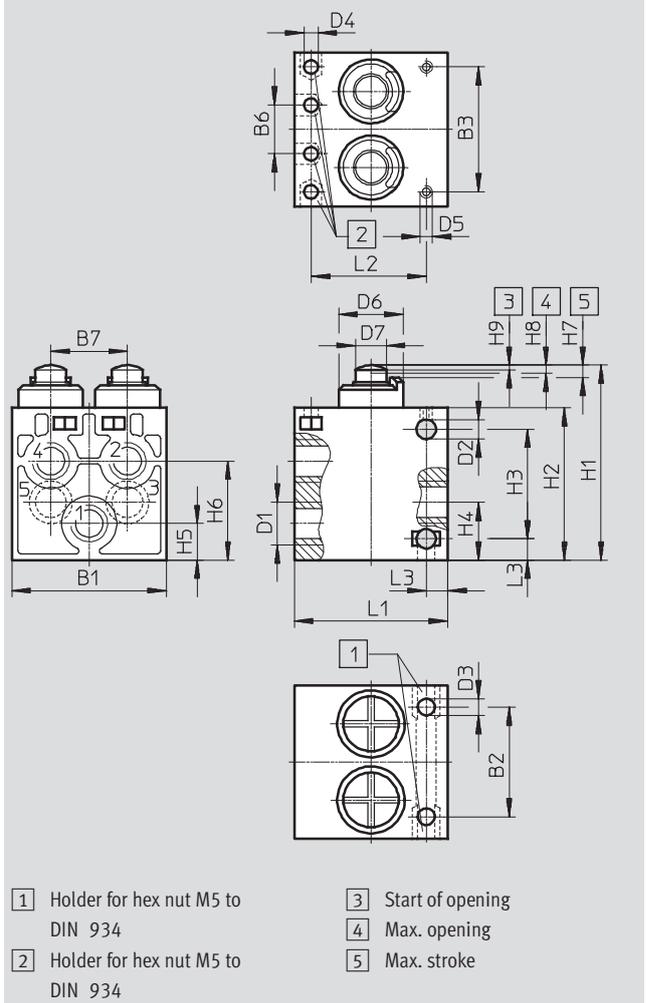

Stem actuated valve	B1	B2	B3	B6	B7	D1	D2	D3	D4	D5	D6	D7
V-3-1/4-B, VO-3-1/4-B	25.4	11	16	-	-	G1/4	6.4	5.5	4.5	M4	21	10
V-5-1/4-B	50.4	36	41	16	25	G1/4	6.4	5.5	4.5	M4	21	10

Stem actuated valve	L1	L2	L3	H1	H2	H3	H4	H5	H6	H7	H8	H9
V-3-1/4-B, VO-3-1/4-B	50	44.5	7	64	50	36	19	11.5	32.5	4	2.6	1.7
V-5-1/4-B	50	37.5	7	64	50	36	19	11.5	32.5	4	2.6	1.7


Stem actuated valves VMEM

Technical data


Dimensions

Download CAD Data → www.festo.com/us/cad


Stem actuated valve V/O-3-PK-3

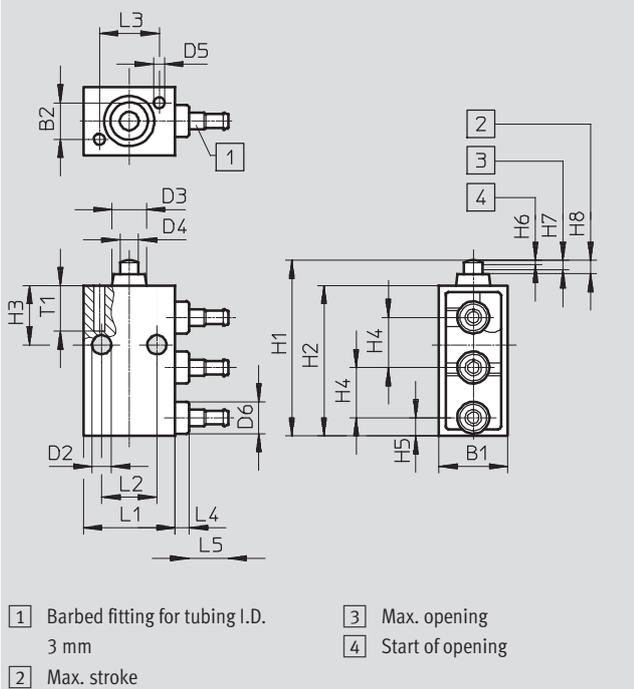

Stem actuated valve V-3-M5

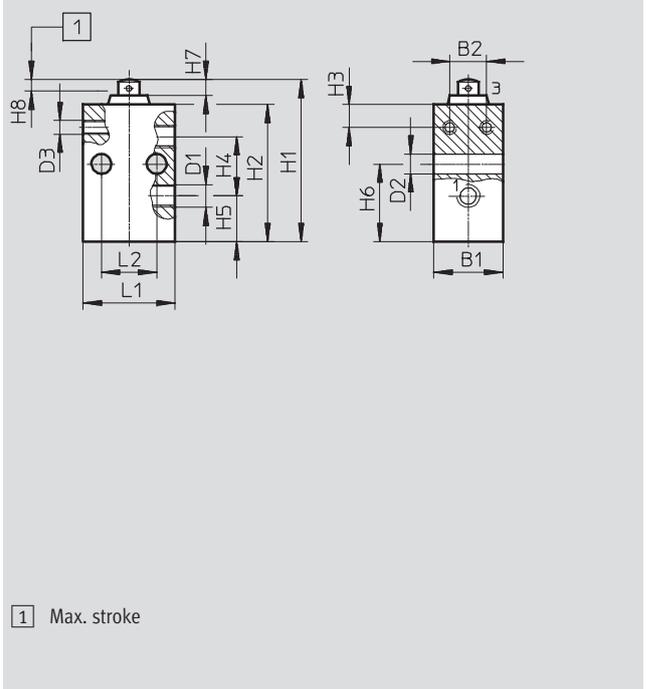

Stem actuated valve VS-4-1/8

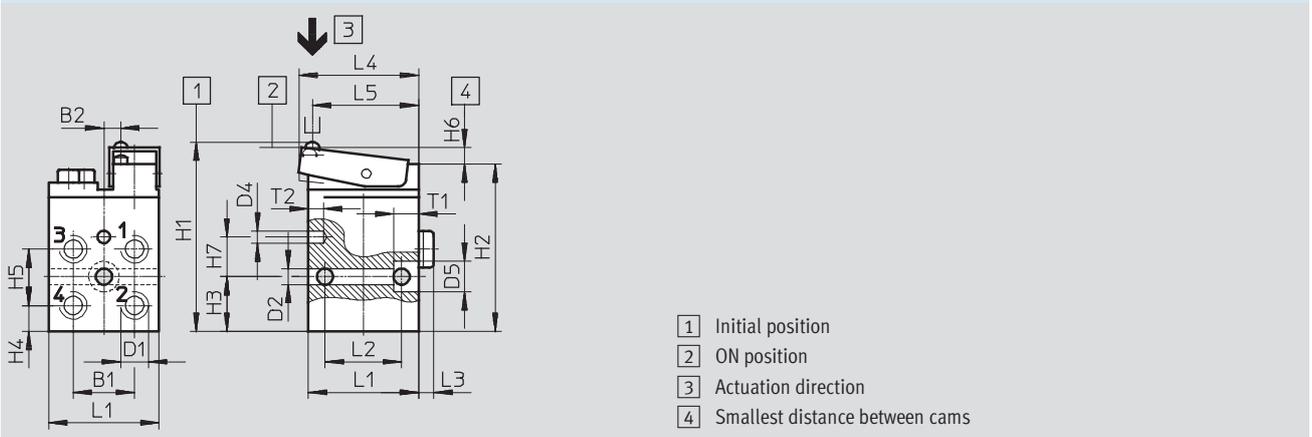

Stem actuated valve	B1	B2	D1	D2	D3	D4	D5	D6	T1	T2
V/O-3-PK-3	15	8	-	4.3	7.5	4	2.4	7	10	-
V-3-M5	15	8	M5	4.3	M3	-	-	-	-	-
VS-4-1/8	20	5.5	G1/8	5.3	-	4.1	10	-	8	5

Stem actuated valve	L1	L2	L3	L4	L5	H1	H2	H3	H4	H5	H6	H7	H8	H14
V/O-3-PK-3	20	12	13	3	8.5	38.5	33	13	11	4	0.9	2.1	2.9	-
V-3-M5	-	-	-	-	-	35.5	30	8	13	10	17	3.5	2.5	-
VS-4-1/8	36	25	5	39	35.5	62.5	55	18	8.5	18.5	5.5	-	-	13

Stem actuated valves VMEM


Technical data




Dimensions

Download CAD Data → www.festo.com/us/cad


Stem actuated valve V/O-3-1/8

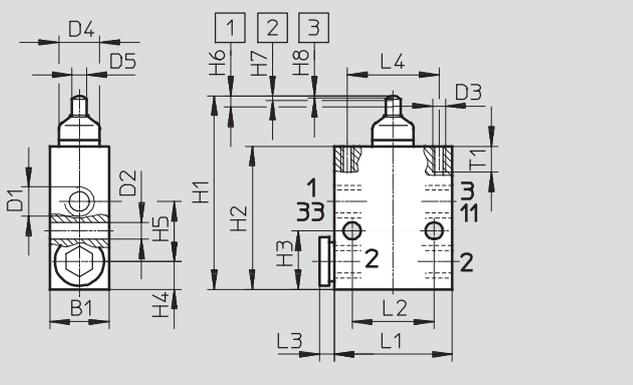

Roller lever AR-01 as actuator attachment for stem actuated valve V/O-3-1/8

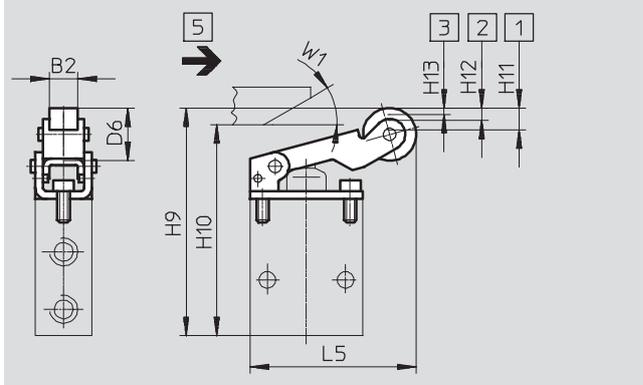

Roller lever with idle return AL-01 as actuator attachment for stem actuated valve V/O-3-1/8

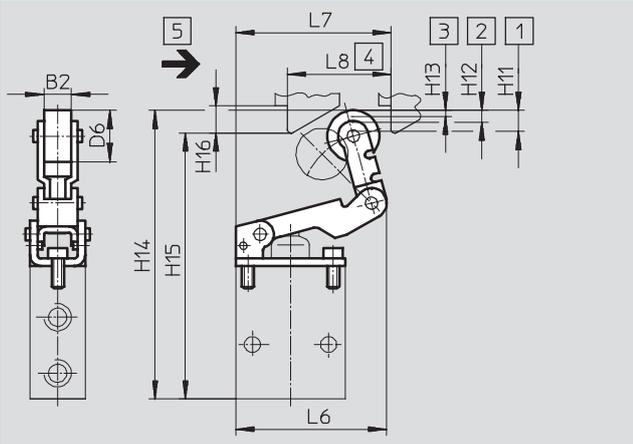

- 1 Max. stroke
- 2 Max. opening
- 3 Start of opening
- 4 Min. actuation stroke
- 5 Actuation direction

Stem actuated valve	B1	D1	D2	D3	D4	D5	L1	L2	L3	L4	H1	H2	H3	H4	H5	H6	H7	H8	T1	
V/O-3-1/8	18	G1/8	5.3	M4	12.5	4.5	36	25	4.5	28	59.5	44	18	8.5	18.5	3.5	1.4	±0.2	±0.2	8

Roller lever	B2	D6	L5	L6	L7	L8	H9	H10	H11	H12	H13	H14	H15	H16	W1
AR-01	8	17	54	-	-	-	71	64	7	4	2	-	-	-	30°
AL-01	8	17	-	50.5	51	34	-	-	7	4	2	93.5	86.5	9	-


Stem actuated valves VMEM

Technical data


Dimensions

Download CAD Data → www.festo.com/us/cad

Mounting bracket HV-M5

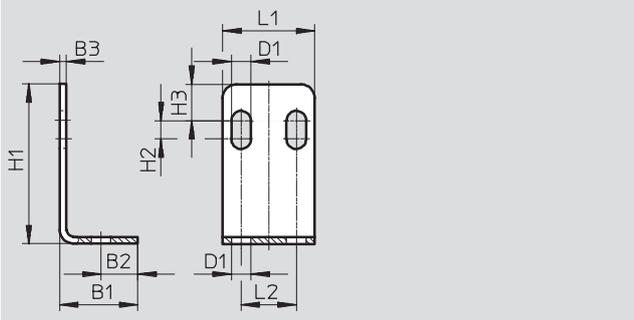

Mounting bracket HV-1/8

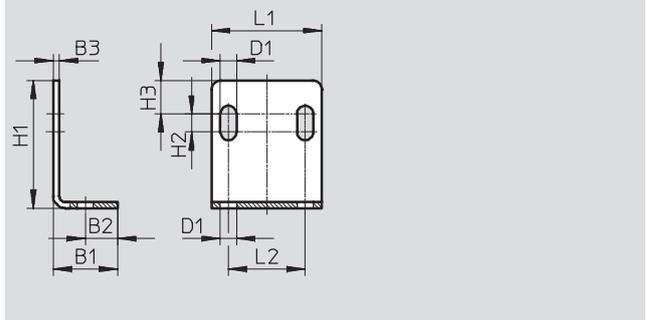

Mounting bracket	B1	B2	B3	D1	L1	L2	H1	H2	H3
HV-M5	17	8	1.5	4.3	20	12	35	4	8
HV-1/8	21	10.5	2	5.3	36	25	42	6	11

Stem actuated valves VMEM


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Stem actuated valve VMEM-ST-M32

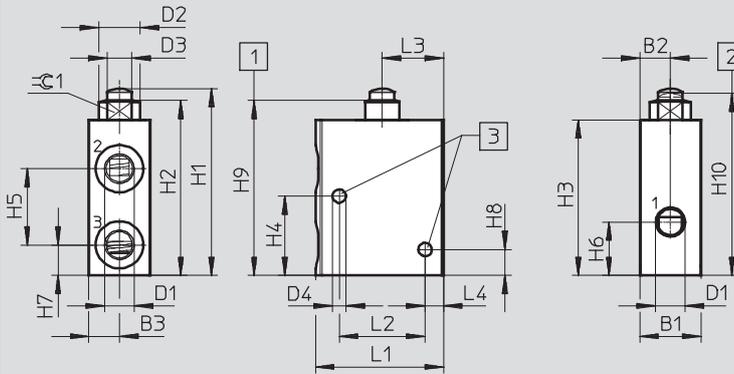


1 Maximum stroke 2 Start of opening 3 Mounting holes

Stem actuated valve	B1	B2	B3	D1	D2	D3	D4	L1	L2	L3	L4	≈C 1
VMEM-ST...32...G18	20	10	10	G1/8	13.5	8	4.4	41.7	28	20	6	11
VMEM-ST...32...G14	25	12.5	12.5	G1/4	15	10	4.4	52.1	36	25	7	13

Stem actuated valve	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10±0.3
VMEM-ST...32...G18	61.6±0.3	57.4	51	26	25	17.5	10	8.5	58.1±0.4	59.8
VMEM-ST...32...G14	73.3±0.2	67.7	61	26	28	23.5	12.5	8	68.6±0.6	70.5

Stem actuated valve VMEM-STC-M32...G18

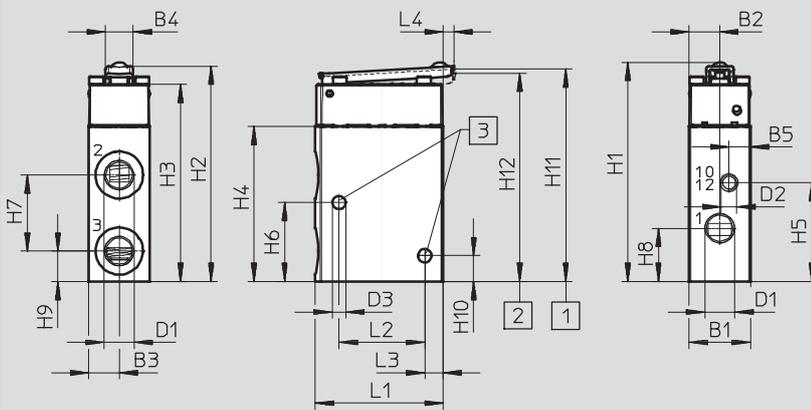

1 Maximum stroke 2 Start of opening 3 Mounting holes

Stem actuated valve	B1	B2	B3	B4	B5	D1	D2	D3	L1	L2	L3	L4
VMEM-STC...32...G18	20	10	10	9	7	G1/8	M5	4.4	41.7	28	6	3.5

Stem actuated valve	H1±0.4	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11±0.4	H12±0.15
VMEM-STC...32...G18	72.1	70.8	64.8	51	32.5	26	25	17.5	10	8.5	71.2	70.35


Stem actuated valves VMEM

Technical data

Dimensions

Download CAD Data → www.festo.com/us/cad

Stem actuated valve VMEM-S-M52

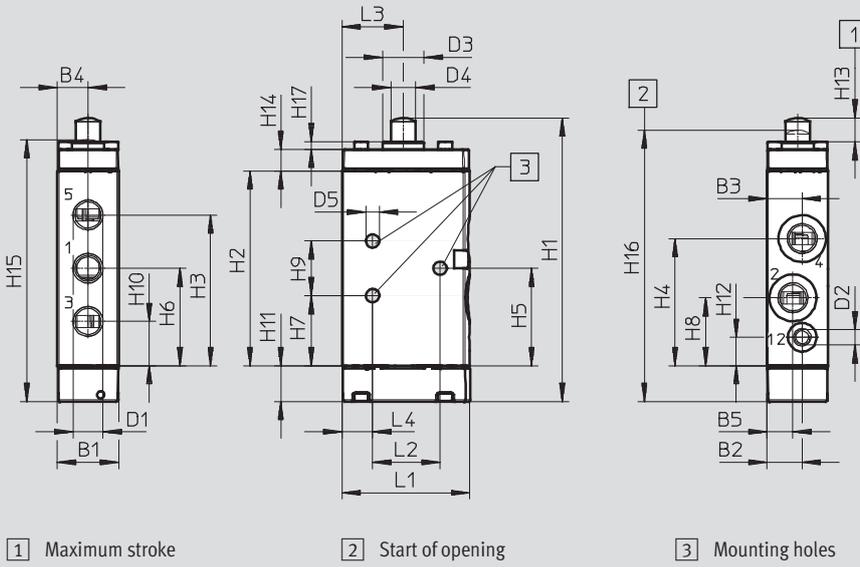

Stem actuated valve	B1	B2	B3	B4	B5	D1	D2	D3	D4	D5	L1	L2	L3	L4
VMEM-S...52...G18	20	11.5	11.5	10	8.5	G $\frac{1}{8}$	M5	13.5	8	4.4	41.7	25	20	7
VMEM-S...52...G14	25	14.2	14.2	12.5	10.8	G $\frac{1}{4}$	M5	15	10	4.4	52.1	31	25	9.5

Stem actuated valve	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15	H16	H17
VMEM-S...52...G18	93.4±0.4	64	49.5	41.8	32	32	23	22.3	18	14.5	11.8	9.3	7.8	7.1	86.3±0.4	89.4±1	2.5
VMEM-S...52...G14	118.5±0.3	87	68.1	60.1	43.5	43.8	31.4	28.5	24.3	19.5	11	10.1	9	8.3	110.1±0.3	113.7±1.3	3

Stem actuated valves VMEM


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Stem actuated valve VMEM-SC ... -M52

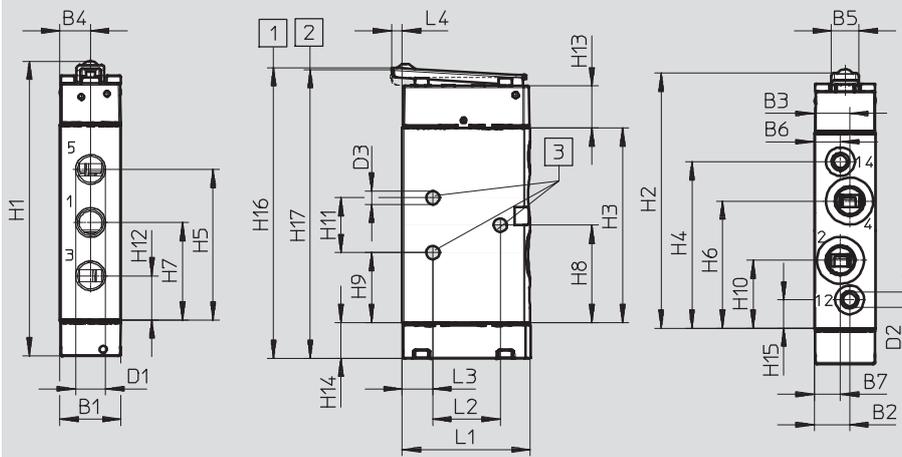

1 Maximum stroke 2 Start of opening 3 Mounting holes

Stem actuated valve	B1	B2	B3	B4	B5	B6	B7	D1	D2	D3	L1	L2	L3	L4
VMEM-SC...52...G18	20	11.5	11.5	10	9	8.5	8.5	G $\frac{1}{8}$	M5	4.4	41.7	25	7	3.5
VMEM-SC...52...G14	25	14.2	14.2	12.5	12	10.8	10.8	G $\frac{1}{4}$	M5	4.4	52.1	31	9.5	4.6

Stem actuated valve	H1±0.4	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15	H16±0.4	H17+0.5
VMEM-SC...52...G18	96.9	83.8	64	54.7	49.5	41.8	32	32	23	22.3	18	14.5	13.8	11.8	9.3	95.6	95.1
VMEM-SC...52...G14	119.4	106.8	87.3	77.5	68.1	59.1	43.8	43.5	31.4	28.5	24.3	19.5	13.8	11	10.1	117.8	117.4

Swivel lever valves VMEM

Technical data – Swivel lever valve, standard nominal flow rate 140 l/min

-  Flow rate
140 l/min
-  Pressure
-0.95 ... 8 bar
-  Temperature range
-10 ... +60 °C

Mounting via through-holes



General technical data	
Type	RW/O-3-1/8
Standard nominal flow rate [l/min] 1 → 2	140
Valve function	3/2-way valve
Design	Disk seat valve, directly actuated
Pneumatic connection	G1/8
Nominal size [mm]	3.5
Weight [g]	150
Actuating force [N] at 6 bar	28.0

Materials	
Seal	NBR
Housing	Anodised aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	-0.95 ... 8
Temperature of medium [°C]	-10 ... +60

Technical data – Actuator attachment for swivel lever valve RW/O-3-1/8				
Swivel lever, type		ASK-02 (short)	ASL-02 (long)	ASS-02 (rod)
Actuating force [N]	Max.	7	Dependent on starting height	Dependent on starting height
Weight [g]		30	35	30


Materials – Swivel lever	
Swivel lever	Aluminium, steel

Swivel lever valves VMEM

Technical data


FESTO

Dimensions Download CAD Data → www.festo.com/us/cad

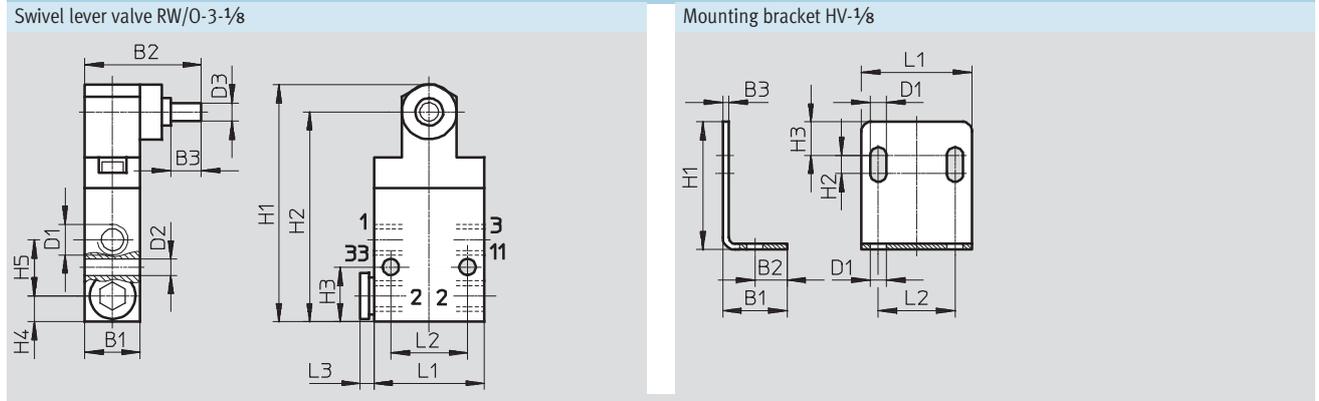

	B1	B2	B3	D1	D2	D3	L1	L2	L3	H1	H2	H3	H4	H5
Swivel lever valve RW/O-3-1/8	18	38	10	G1/8	5.3	6	36	25	4.5	78	69	18	8.5	18.5
Mounting bracket HV-1/8	21	10.5	2	5.3	-	-	36	25	-	42	6	11	-	-

Actuator attachment for swivel lever valve RW/O-3-1/8

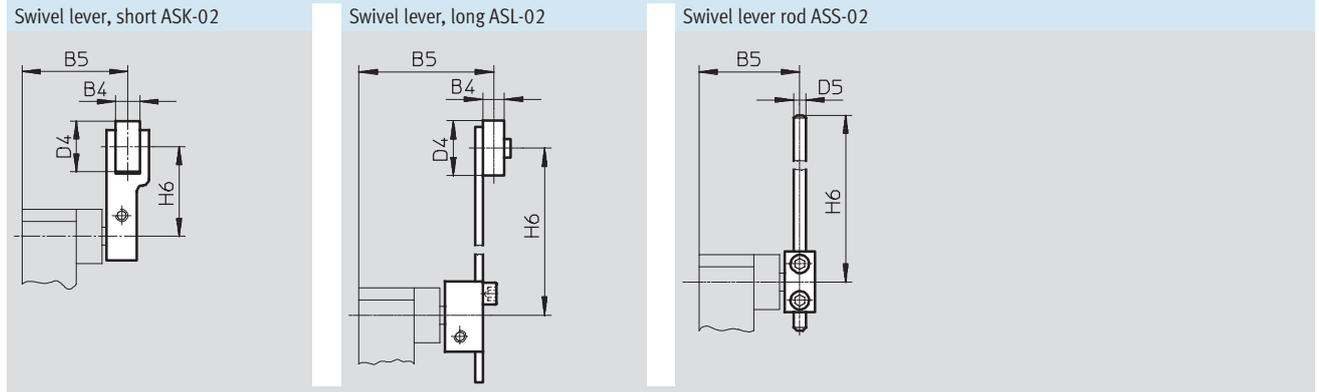


Actuator attachment	B4	B5	D4	D5	D6	H6
ASK-02	8	35	17	-	-	30
ASL-02	7	44	18	-	-	25 ... 85
ASS-02	-	33	-	4	4	30 ... 140

Swivel lever valves VMEM


Technical data

Actuating ranges are set by converting the switching head


Default settings (upon delivery)

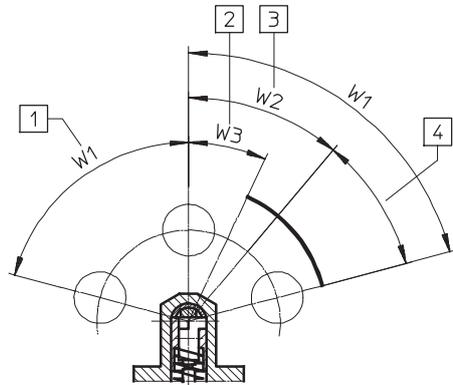

Valve components 1 and 2 turned 90° around the longitudinal axis

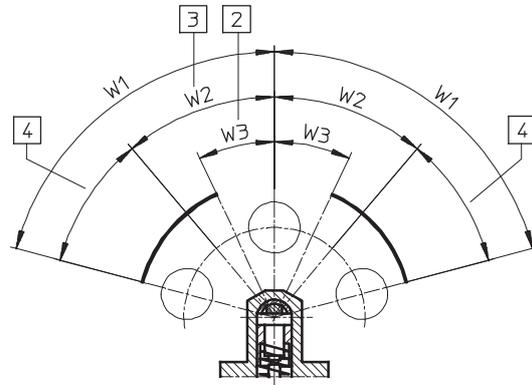

Valve components 1 and 2 turned 180° around the longitudinal axis

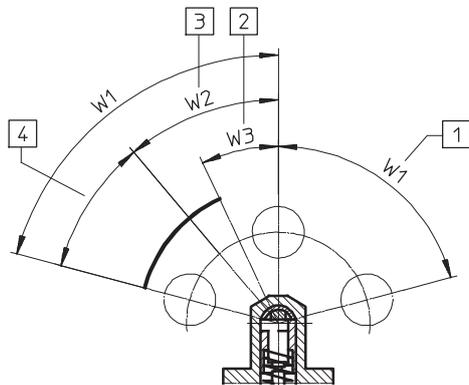

- 1 (w1) Idling, or max. angle position (75°)
- 2 (w3) Start of opening ($25^\circ \pm 5^\circ$)
- 3 (w2) Max. opening angle ($40^\circ \pm 5^\circ$)
- 4 Overtravel

Whisker valves VMEM

Technical data – Whisker valve, standard nominal flow rate 120 l/min

-  Flow rate
120 l/min
 -  Pressure
3.5 ... 8 bar
 -  Temperature range
-10 ... +60 °C
- Mounting via through-holes



General technical data	
Type	Whisker valve FVS, FVSO
Standard nominal flow rate [l/min] 1 → 2	120
Valve function	3/2-way valve
Design	Disk seat valve, piloted
Pneumatic connection	G $\frac{1}{8}$
Nominal size [mm]	3.5
Weight [g]	130
Actuating force at 6 bar [N]	→ Graph
Repetition accuracy of switching point [mm]	±0.1

Materials	
Seal	NBR
Housing	Anodised aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	3.5 ... 8
Temperature of medium [°C]	-10 ... +60
Ambient temperature [°C]	-10 ... +60


Whisker valves VMEM

Technical data



Switching forces F and switching travel l at 6 bar as a function of approach distance L

Whisker valve

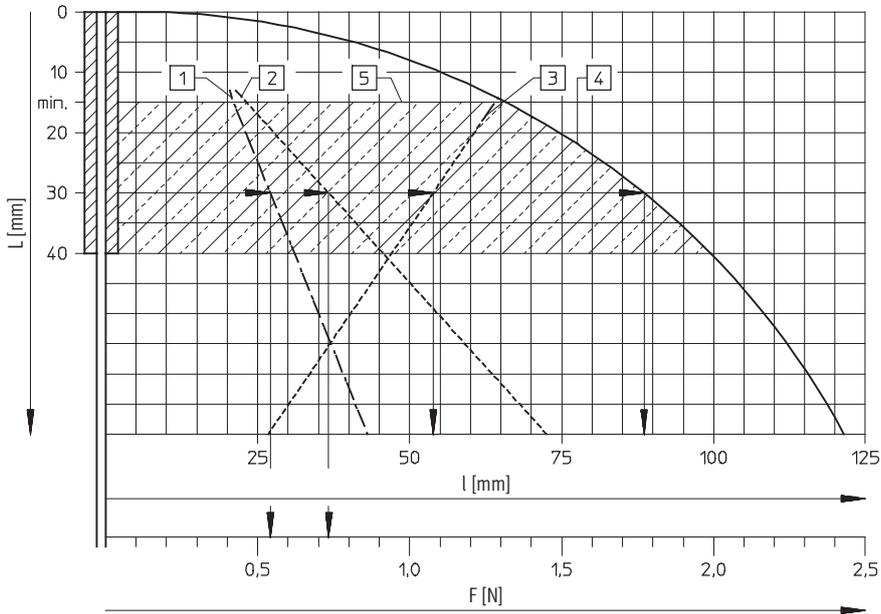

This piloted valve with extremely low actuating forces is particularly suited for systems where dissimilar parts or actuating elements without precision positioning are to be sensed, or where the actuating levels are different. The whisker can be approached from any direction perpendicular to the whisker axis, or can be passed.

- 1 Switching force
- 2 Passing force
- 3 Switching travel
- 4 Overtravel
- 5 Permissible approach range

Example:

A distance of 30 mm from the end of the spring results in:


Switching travel 54 mm
Switching force 0.57 N

Overtravel 88 mm
Passing force 0.75 N

Dimensions

Download CAD Data → www.festo.com/us/cad

Whisker valve FVS, FVSO

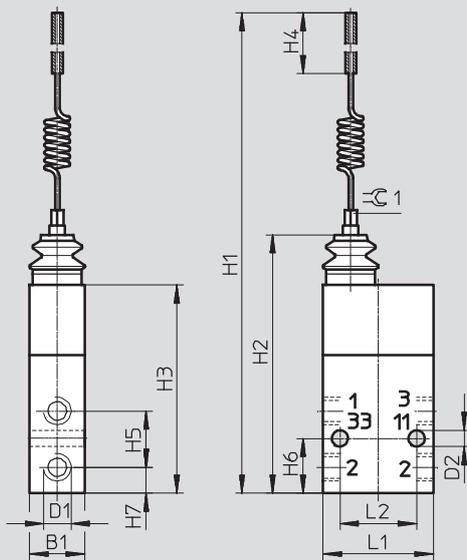

Whisker valve	B1	D1	D2	H1	H2	H3	H4 max.	H5	H6	H7	L1	L2	☞ 1
FVS, FVSO	18	G $\frac{3}{8}$	5.3	220	85	68.5	40	18.5	18	8.5	36	25	4

Roller lever valves with idle return, toggle lever valves VMEM

FESTO


Technical data – Roller lever valve with idle return, toggle lever valve, standard nominal flow rate 80 ... 120 l/min

-  - Flow rate
80 ... 600 l/min

Mounting via through-holes

-  - Pressure
-0.95 ... 8 bar

-  - Temperature range
-10 ... +60 °C

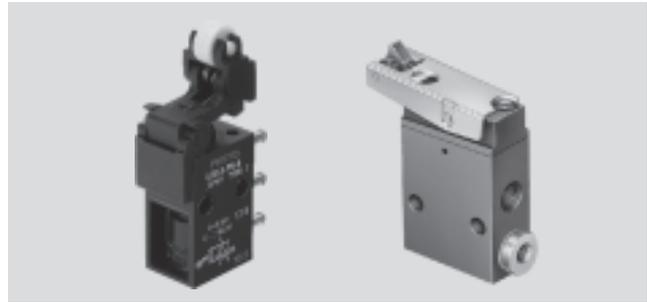

General technical data				
Type	L/O-3-PK-3	L-3-M5	LS-3-1/8 LOS-3-1/8	LS-4-1/8
Version	Roller lever valve with idle return	Roller lever valve with idle return	Toggle lever valve	Toggle lever valve
Standard nominal flow rate [l/min] 1 → 2	80		120	
Valve function	3/2-way valve		3/2-way valve	4/2-way valve
Design	Disk seat valve, directly actuated		Disk seat valve, piloted	Disk seat valve, piloted
Pneumatic connection	PK-3 (barbed fitting for plastic tubing with 3 mm nominal diameter)	M5	G1/8	G1/8
Nominal size [mm]	2.5	2	3.5	3.5
Weight [g]	19	43	110	220
Actuating force [N]	-	16.5	-	2.2
• at 6 bar				
• with normally closed position	[N] 10.0	-	1.8	-
• with normally open position	[N] 13.0	-	1.8	-

Materials				
Type	L/O-3-PK-3	L-3-M5	LS-3-1/8 LOS-3-1/8	LS-4-1/8
Seal	NBR			
Housing	POM	Die-cast zinc	Anodised aluminium	Anodised aluminium

Operating and environmental conditions				
Type	L/O-3-PK-3	L-3-M5	LS-3-1/8 LOS-3-1/8	LS-4-1/8
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]			
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)			
Operating pressure range [bar]	0 ... 8	-0.95 ... 8	3.5 ... 8	3.5 ... 8
Ambient temperature [°C]	-10 ... +60			

Roller lever valves with idle return, toggle lever valves VMEM

FESTO

Technical data – Roller lever valve with idle return, toggle lever valve, standard nominal flow rate 550 ... 600 l/min

General technical data		
Type	L-5-1/4-B	L-3-1/4-B LO-3-1/4-B
Version	Toggle lever valve	Toggle lever valve
Standard nominal flow rate [l/min] 1 → 2	550	600
Valve function	5/2-way valve	3/2-way valve
Design	Disk seat valve, directly actuated	Disk seat valve, directly actuated
Pneumatic connection	G1/4	G1/4
Nominal size [mm]	7.0	7.0
Weight [g]	360	250
Actuating force [N]	53.0	15.0 ¹⁾ 38.0

1) Value 15.0 with normally closed valve, value 38.0 with normally open valve

Materials	
Seal	NBR
Housing	Die-cast aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	-0.95 ... 10
Ambient temperature [°C]	-10 ... +60


Roller lever valves with idle return, toggle lever valves VMEM

Technical data


Dimensions

Download CAD Data → www.festo.com/us/cad


Roller lever valve with idle return L/O-3-PK-3

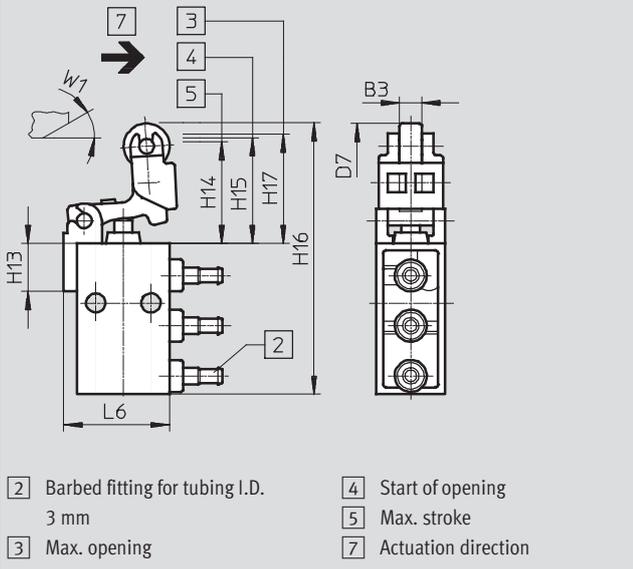


Roller lever valve with idle return L-3-M5

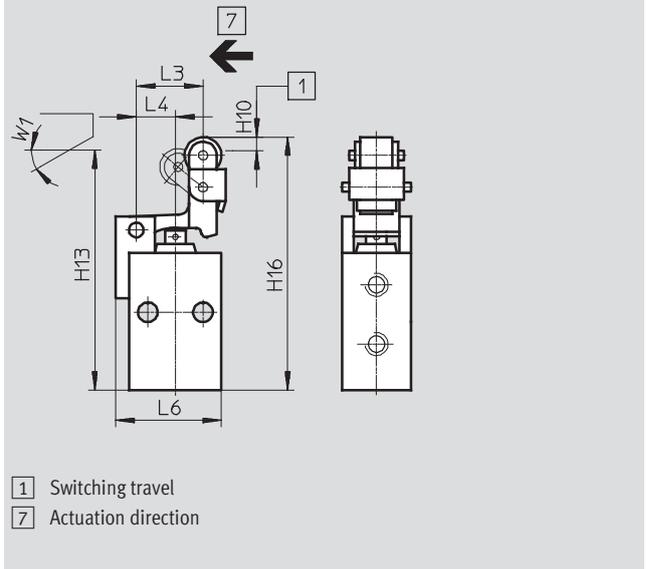

Roller lever valve with idle return L-3-1/4-B, LO-3-1/4-B

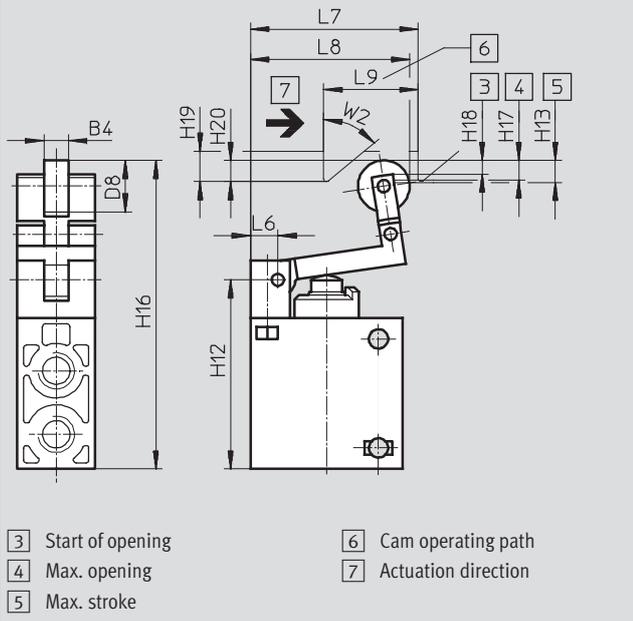

Roller lever valve with idle return L-5-1/4-B

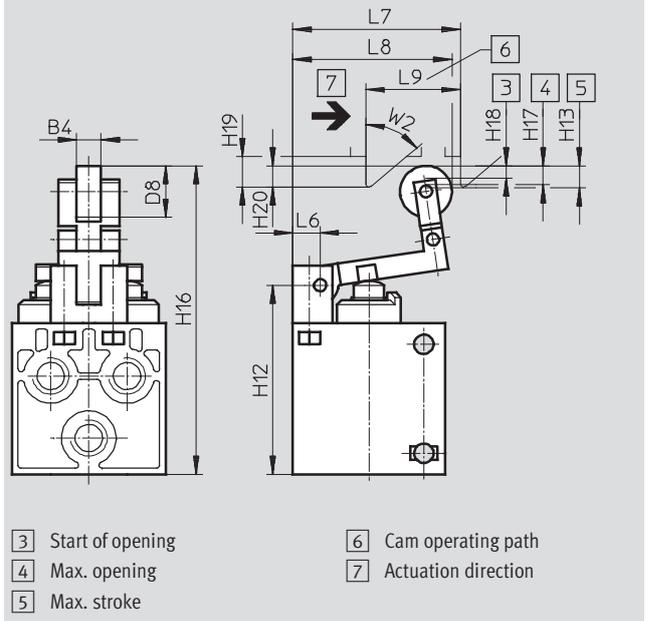

Roller lever valve with idle return	B3	B4	D7	D8	L3	L4	L6	L7	L8	L9
L/O-3-PK-3	4.8	-	10	-	-	-	23	-	-	-
L-3-M5	-	-	-	-	14.5	8.5	23	-	-	-
L-3-1/4-B, LO-3-1/4-B	-	8	-	17	-	-	9	55	54	31
L-5-1/4-B	-	8	-	17	-	-	9	55	54	31

Roller lever valve with idle return	H10	H12	H13	H14	H15	H16	H17	H18	H19	H20	W1	W2
L/O-3-PK-3	-	-	10.5	22.3	23.2	59.5	24	-	-	-	30°	-
L-3-M5	3	-	52.5	-	-	55.5	-	-	-	-	30°	-
L-3-1/4-B, LO-3-1/4-B	-	62.5	7.4	-	-	102	6.3	4.1	10	7	-	50°
L-5-1/4-B	-	62.5	7.4	-	-	102	6.3	4.1	10	7	-	50°

Roller lever valves with idle return, toggle lever valves VMEM

Technical data

Dimensions Download CAD Data → www.festo.com/us/cad

Toggle lever valve LS-3-1/8, LOS-3-1/8

1 Initial position
2 ON position
5 Bottom edge of control rail or cam
6 Idle return
7 Min. switching travel

Toggle lever valve LS-4-1/8

1 Initial position
2 ON position
5 Bottom edge of control rail or cam
6 Idle return
7 Min. switching travel

Toggle lever valve	B4	B5	L8	L9	H10	H11	H12 +0.2, -0.3	H13	W1
LS-3-1/8, LOS-3-1/8	4.4	-	49.5	13.5	66	62.5	7.5	6	50°
LS-4-1/8	4.4	9	49.5	13.5	66	62.5	7.5	6	50°

Mounting bracket HV-M5

Mounting bracket HV-1/8

Mounting bracket	B1	B2	B3	D1	L1	L2	H1	H2	H3
HV-M5	17	8	1.5	4.3	20	12	35	4	8
HV-1/8	21	10.5	2	5.3	36	25	42	6	11

Roller lever valves, roller actuated valves VMEM

FESTO


Technical data – Roller lever valve, roller actuated valve, standard nominal flow rate 80 ... 120 l/min

-  Flow rate
80 ... 500 l/min

Mounting either via through-holes or
on front panel

-  Pressure
-0.95 ... 10 bar

-  Temperature range
-10 ... +60 °C

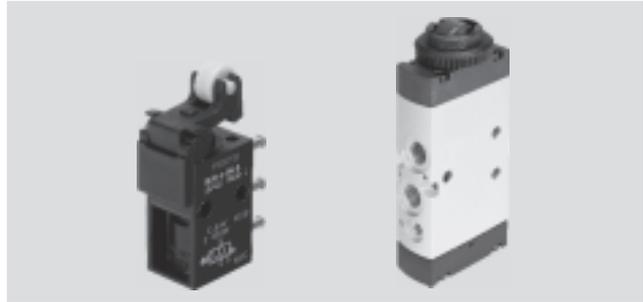

General technical data				
Type	R/O-3-PK-3	R-3-M5	RS-3-1/8 ROS-3-1/8	RS-4-1/8
Version	Roller lever valve	Roller lever valve	Roller lever valve	Roller lever valve
Standard nominal flow rate [l/min] 1 → 2	80		120	
Valve function	3/2-way valve		3/2-way valve	4/2-way valve
Design	Disk seat valve, directly actuated		Disk seat valve, piloted	
Pneumatic connection	PK-3 (barbed fitting for plastic tubing with 3 mm nominal diameter)	M5	G1/8	G1/8
Nominal size [mm]	2.5	2	3.5	3.5
Weight [g]	18	40	120	230
Actuating force [N]	-	16.5	1.8	1.8
• at 6 bar				
• with normally closed position	[N] 10.0	-	-	-
• with normally open position	[N] 15.0	-	-	-

Materials				
Type	R/O-3-PK-3	R-3-M5	RS-3-1/8 ROS-3-1/8	RS-4-1/8
Seal	NBR			
Housing	POM	Die-cast zinc	Anodised aluminium	Anodised aluminium

Operating and environmental conditions				
Type	R/O-3-PK-3	R-3-M5	RS-3-1/8 ROS-3-1/8	RS-4-1/8
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]			
Note about operating/pilot medium	Lubricated operation possible (required during subsequent operation)			
Operating pressure range [bar]	0 ... 8	-0.95 ... 8	3.5 ... 8	3.5 ... 8
Ambient temperature [°C]	-10 ... +60			

Technical data – Actuator attachment		
Type	AR-01	AL-01
Version	Roller lever	Roller lever with idle return
Actuating force [N] Max.	10	12
Weight [g]	42	52

Materials – Actuator attachment	
Actuator attachment	Galvanised steel

Roller lever valves, roller actuated valves VMEM

Technical data – Roller lever valve, roller actuated valve, standard nominal flow rate 550 ... 600 l/min

General technical data		
Type	R-5-1/4-B	R-3-1/4-B RO-3-1/4-B
Version	Roller lever valve	Roller lever valve
Standard nominal flow rate [l/min] 1 → 2	550	600
Valve function	5/2-way valve	3/2-way valve
Design	Disk seat valve, directly actuated	Disk seat valve, directly actuated
Pneumatic connection	G1/4	G1/4
Nominal size [mm]	7.0	7.0
Weight [g]	340	230
Actuating force [N]	35.0	10.0 ¹⁾ 26.0

1) Value 10.0 with normally closed valve, value 26.0 with normally open valve

Materials	
Seal	NBR
Housing	Die-cast aluminium

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)
Operating pressure range [bar]	-0.95 ... 10
Ambient temperature [°C]	-10 ... +60

Roller lever valves, roller actuated valves VMEM

Technical data – Roller lever valve, roller actuated valve, standard nominal flow rate 500 l/min

General technical data			
Type		VMEM-DT	VMEM-D
Standard nominal flow rate	[l/min]	500	
1 → 2			
Valve function		3/2-way valve	5/2-way valve
Reset method		Mechanical spring	Mechanical or pneumatic spring
Design		Disk seat valve, directly actuated	Piston spool valve, directly actuated
Pneumatic connection		G $\frac{3}{8}$	G $\frac{3}{8}$
Pilot air supply		–	–
Nominal size	[mm]	4.0	4.0
Weight	[g]	170	176
Actuating force	[N]	90 ¹⁾	27.5 ²⁾
		130	47

- 1) Value 90 with normally closed valve, value 130 with normally open valve
 2) Value 27.5 with mechanical spring reset method, value 47 with pneumatic spring reset method

Materials	
Cover	PA
Seal	NBR
Housing	Anodised wrought aluminium alloy
Note on materials	RoHS-compliant

Operating and environmental conditions			
Type		VMEM-DT	VMEM-D
Operating medium		Compressed air to ISO 8573-1:2010 [7:-:-]	
Note on operating/ pilot medium	[µm]	Lubricated operation possible (required during subsequent operation)	
Operating pressure range	[bar]	-0.95 ... 8	-0.95 ... 10 ¹⁾ 2.5 ... 10 ²⁾
Temperature of medium	[°C]	-10 ... +60	
Ambient temperature	[°C]	-10 ... +60	

- 1) Suitable for vacuum, mechanical spring or external pneumatic spring reset method (in the type codes Reset method M: Mechanical spring or E: External pneumatic spring)
 2) Not suitable for vacuum, internal pneumatic spring reset method (in the type codes Reset method A: Internal pneumatic spring)

Roller lever valves, roller actuated valves VMEM

Technical data

Dimensions Download CAD Data → www.festo.com/us/cad

Roller lever valve R/O-3-PK-3

2 Barbed fitting for tubing I.D. 3 mm
3 Max. opening
4 Start of opening
5 Max. stroke

Roller lever valve R-3-M5

1 Switching travel

Roller lever valve R-3-1/4-B, RO-3-1/4-B

3 Start of opening
4 Max. opening
5 Max. stroke

Roller lever valve R-5-1/4-B

3 Start of opening
4 Max. opening
5 Max. stroke

Roller lever valve	B3	B4	D7	D8	L3	L4	L5	L6
R/O-3-PK-3	4.8	-	10	-	-	-	-	23
R-3-M5	-	-	-	-	14.5	8.5	-	23
R-3-1/4-B, RO-3-1/4-B	-	8	-	17	-	55.5	39	9
R-5-1/4-B	-	8	-	17	-	55.5	39	9

Roller lever valve	H9	H10	H11	H12	H13	H14	H15	W1
R/O-3-PK-3	14.5	14.3	16.8	18.5	10.5	-	-	30°
R-3-M5	3	48.5	45.5	-	-	-	-	30°
R-3-1/4-B, RO-3-1/4-B	-	79.3	min. 72.5	62.5	7.4	6.5	4.3	30°
R-5-1/4-B	-	79.3	min. 72.5	62.5	7.4	6.5	4.3	30°

Roller lever valves, roller actuated valves VMEM


Technical data




Dimensions

Download CAD Data → www.festo.com/us/cad


Basic valve, stem actuated valve V/O-3-1/8

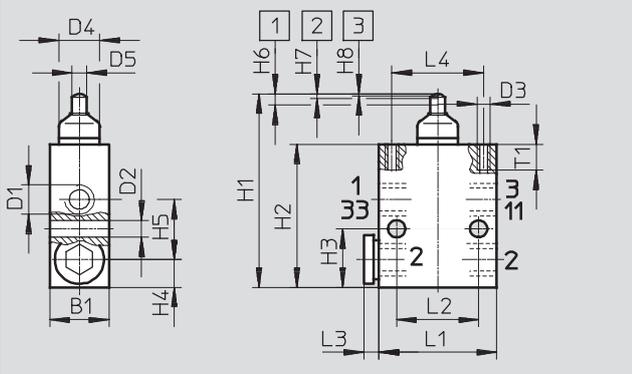

Roller lever AR-01 as actuator attachment for stem actuated valve V/O-3-1/8

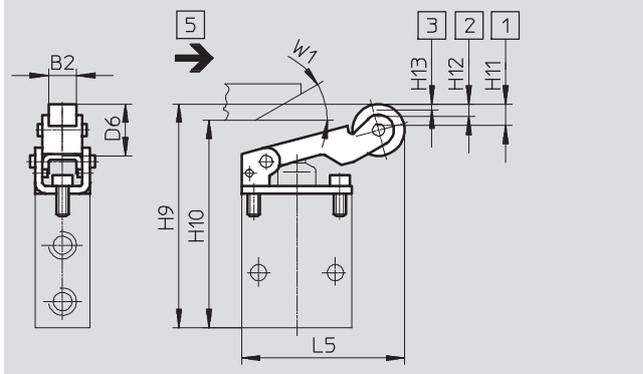

Roller lever with idle return AL-01 as actuator attachment for stem actuated valve V/O-3-1/8

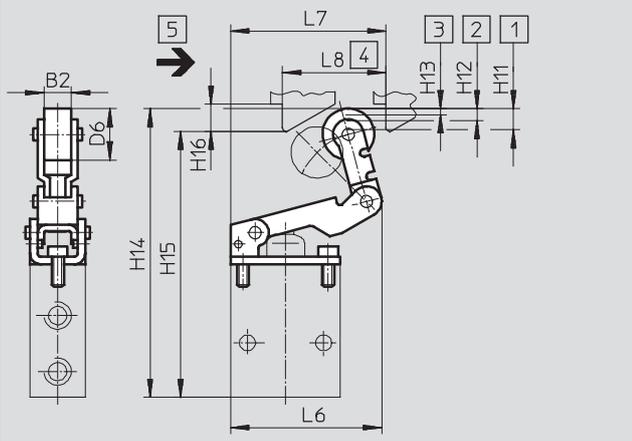

- 1 Max. stroke
- 2 Max. opening
- 3 Start of opening
- 4 Min. actuation stroke
- 5 Actuation direction

Note

The stem actuated valve V/O-3-1/8 can be extended with an actuator attachment for the roller lever or toggle lever valve. The technical data is listed with the stem actuated valve.

Stem actuated valve	B1	D1	D2	D3	D4	D5	L1	L2	L3	L4	H1	H2	H3	H4	H5	H6	H7 ±0.2	H8 ±0.2	T1
V/O-3-1/8	18	G1/8	5.3	M4	12.5	4.5	36	25	4.5	28	59.5	44	18	8.5	18.5	3.5	1.4	0.6	8

Actuator attachment	B2	D6	L5	L6	L7	L8	H9	H10 min.	H11	H12 +0.2	H13 +0.2	H14	H15 min.	H16	W1
AR-01	8	17	54	-	-	-	71	64	7	4	2	-	-	-	30°
AL-01	8	17	-	50.5	51	34	-	-	7	4	2	93.5	86.5	9	-


Roller lever valves, roller actuated valves VMEM

Technical data

Dimensions


Download CAD Data → www.festo.com/us/cad

Roller lever valve RS-3-1/8, ROS-3-1/8

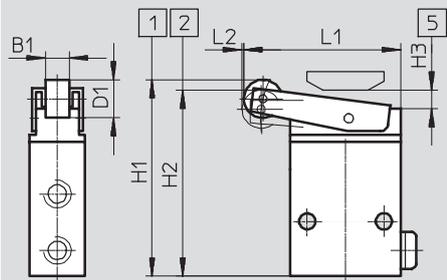

- 1 Initial position
- 2 ON position
- 5 Bottom edge of control rail or cam


Roller lever valve RS-4-1/8

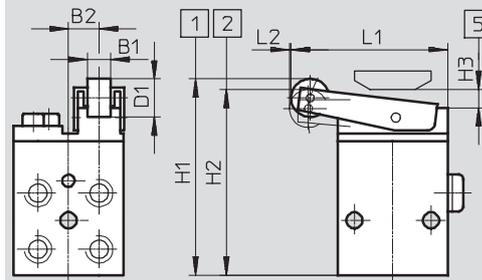


- 1 Initial position
- 2 ON position
- 5 Bottom edge of control rail or cam

Roller lever valve	B1	B2	D1	L1	L2	H1	H2	H3 +0.2, -0.3
RS-3-1/8, ROS-3-1/8	7.7	-	12.5	51.5	0.5	64.5	61	6
RS-4-1/8	7.7	9	12.5	51.5	0.5	64.5	61	6

Mounting bracket HV-M5



Mounting bracket HV-1/8



Mounting bracket	B1	B2	B3	D1	L1	L2	H1	H2	H3
HV-M5	17	8	1.5	4.3	20	12	35	4	8
HV-1/8	21	10.5	2	5.3	36	25	42	6	11

Roller lever valves, roller actuated valves VMEM


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Roller actuated valve VMEM-DT...32...G18

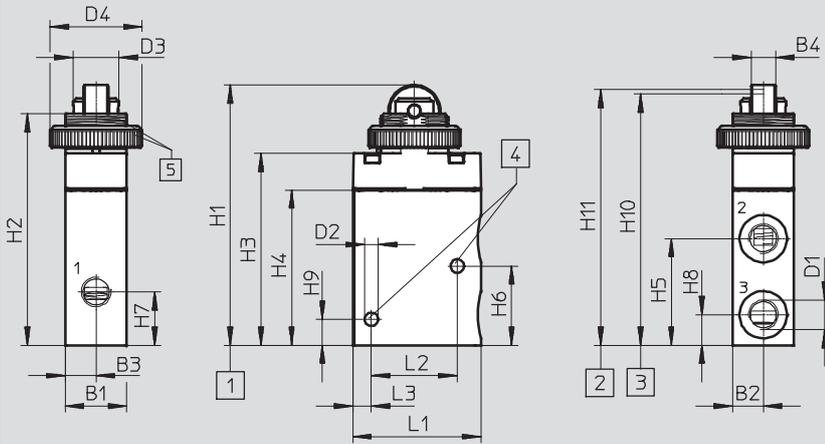


- 1 Maximum stroke
- 2 Start of opening
- 3 Mounting holes
- 4 Thread and nut (M22x1)

Roller actuated valve	B1	B2	B3	B4	D1	D2∅	D3∅	D4∅	L1	L2	L3
VMEM-DT...32...G18	20	10	10	8	G1/8	4.4	15	30	41.7	28	6

Roller actuated valve	H1±0.3	H2	H3	H4	H5	H6	H7	H8	H9	H10±0.4	H11±0.3
VMEM-DT...32...G18	85.8	76	63	51	35	26	18	10	8.5	82.6	84

Roller actuated valve VMEM-D...52...G18

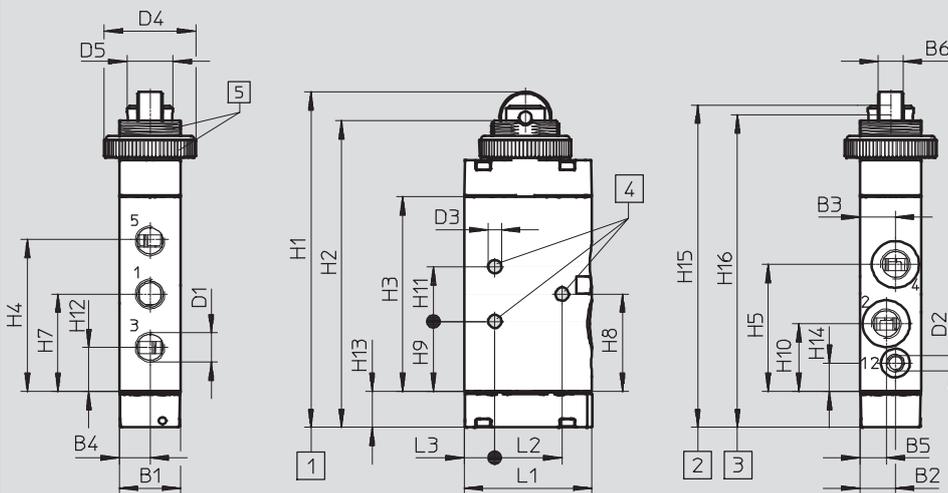

- 1 Maximum stroke
- 2 Start of opening
- 3 End of opening
- 4 Mounting holes
- 5 Thread and nut (M22x1)

Roller actuated valve	B1	B2	B3	B4	B5	B6	D1	D2	D3	D4	D5	L1	L2	L3
VMEM-D...52...G18	20	11.5	11.5	10	8.5	8	G1/8	M5	4.4	30	15	41.7	25	7

Roller actuated valve	H1±0.2	H2	H3	H4	H5	H7	H8	H10	H11	H12	H13	H14	H15	H16±1	H17±0.4
VMEM-D...52...G18	110.6	101.1	64	49.5	41.8	32	32	23	22.3	18	14.5	11.8	9.3	106.6	104

Ball actuated valves VMEM

Technical data – Ball actuated valve, standard nominal flow rate 500 l/min

-  Flow rate
500 l/min
-  Pressure
0.95 ... 10 bar
-  Temperature range
-10 ... +60 °C

Mounting either via through-holes or on front panel



General technical data			
Type	VMEM-BTC	VMEM-BC	VMEM-BCZ
Standard nominal flow rate [l/min] 1 → 2	500		
Valve function	3/2-way valve	5/2-way valve	5/2-way valve
Reset method	Mechanical spring	Mechanical or pneumatic spring	Mechanical or pneumatic spring
Design	Disk seat valve, piloted	Piston spool valve, piloted	Piston spool valve, piloted
Pneumatic connection	G $\frac{1}{8}$	G $\frac{1}{8}$	G $\frac{1}{8}$
Pilot air supply	Internal or external	Internal	External
Nominal size [mm]	4.0	4.0	4.0
Weight [g]	148	182	182
Actuating force [N]	77.8	77.8	77.8

Materials	
Cover	Anodised wrought aluminium alloy
Seal	NBR
Housing	Anodised wrought aluminium alloy
Note on materials	RoHS-compliant

Operating and environmental conditions			
Type	VMEM-BTC	VMEM-BC	VMEM-BCZ
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]		
Note on operating/pilot medium	Lubricated operation possible (required during subsequent operation)		
Operating pressure range [bar]			
N/C valves	3.5 ... 8	-	-
N/O valves	4.5 ... 8	2.5 ... 10 ²⁾	-0.95 ... 10 ¹⁾
Temperature of medium [°C]	-10 ... +60		
Ambient temperature [°C]	-10 ... +60		

1) Suitable for vacuum, mechanical spring or external pneumatic spring reset method (in the type codes Reset method M: Mechanical spring or E: External pneumatic spring)
 2) Not suitable for vacuum, internal pneumatic spring reset method (in the type codes Reset method A: Internal pneumatic spring)

Ball actuated valves VMEM


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Ball actuated valve VMEM-BTC...32...G18

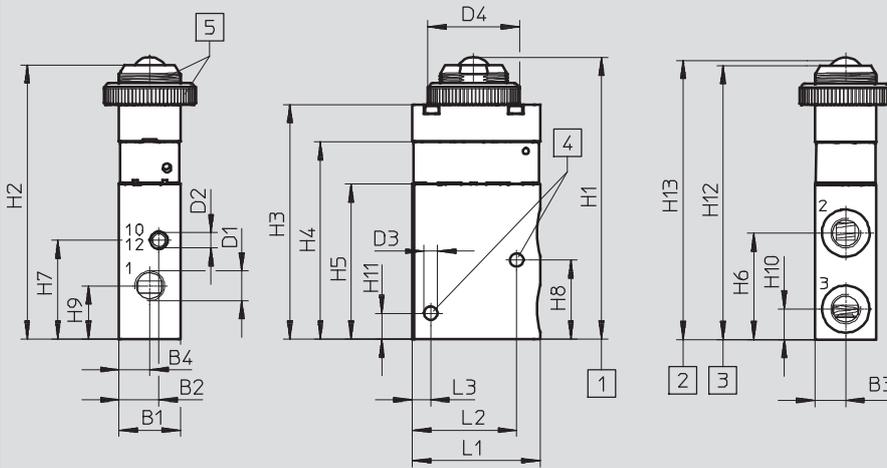


- 1 Maximum stroke 2 Start of opening 3 Mounting holes 4 Thread and nut (M22x1)

Ball actuated valve	B1	B2	B3	B4	D1	D2	D3Ø	D4Ø	L1	L2	L3
VMEM-BTC...32...G18	20	13	10	10	G $\frac{1}{8}$	M5	4.4	30	41.7	28	6

Ball actuated valve	H1±0.3	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12±0.4	H13±0.3
VMEM-BTC...32...G18	92.8	90.1	77.1	64.8	51	35	32.5	26	17.5	10	8.5	90	91

Ball actuated valve VMEM-BC/BCZ...52...G18

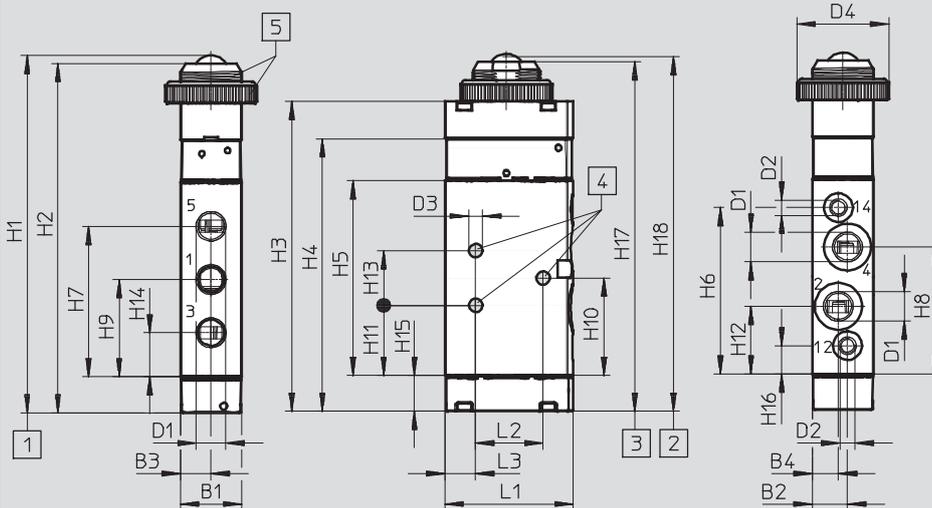

- 1 Maximum stroke 2 Start of opening 3 Mounting holes 4 Thread and nut (M22x1)

Ball actuated valve	B1	B2	B3	B4	D1	D2	D3	D4	L1	L2	L3	H1±0.2	H2	H3
VMEM-BC/BCZ...52...G18	20	11.5	10	8.5	G $\frac{1}{8}$	M5	4.4	30	41.7	25	7	117.3	114.9	101.9

Ball actuated valve	H4	H5	H6	H7	H8	H9	H10	H11	H12	H13	H14	H15	H16	H17±0.2	H18±0.2
VMEM-BC/BCZ...52...G18	89.6	64	54.7	49.5	41.8	32	32	23	22.3	18	14.5	11.8	9.3	115	115.7

Valves VMEM, mechanically actuated

Ordering data

Ordering data							
Nominal flow rate	Valve function	Description	Mechanical reset	Normal position	Pilot air ¹⁾	Part No.	Type
Stem actuated valve							
80 l/min	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	3626	V-3-M5
		Suitable for vacuum	■	Open/closed	–	10747	V/O-3-PK-3
120 l/min	3/2-way valve, monostable	–	■	Closed	–	2334	VS-3-1/8
		–	■	Closed	–	2952	VOS-3-1/8
	4/2-way valve, monostable	–	■	–	–	3394	VS-4-1/8
140 l/min	3/2-way valve, monostable	Suitable for vacuum	■	Open/closed	–	4938	V/O-3-1/8
500 l/min	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	555618	VMEM-ST-M32C-M-G18
				Open	–	555619	VMEM-ST-M32U-M-G18
	5/2-way valve, monostable	Suitable for vacuum, reverse operation	■	–	–	555624	VMEM-S-M52-M-G18
		(Internal) pneumatic reset	–	–	–	555625	VMEM-S-M52-A-G18
		Suitable for vacuum, reverse operation, (external) pneumatic reset	–	–	–	555626	VMEM-S-M52-E-G18
550 l/min	5/2-way valve, monostable	Suitable for vacuum	■	–	–	6809	V-5-1/4-B
600 l/min	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	6808	V-3-1/4-B
				Open	–	9157	VO-3-1/4-B
1,000 l/min	3/2-way valve, monostable	Suitable for vacuum	■	Closed	–	556901	VMEM-ST-M32C-M-G14
				Open	–	556902	VMEM-ST-M32U-M-G14
	5/2-way valve, monostable	Suitable for vacuum, reverse operation	■	–	–	556903	VMEM-S-M52-M-G14
		–	–	–	–	556904	VMEM-S-M52-A-G14
		Suitable for vacuum, reverse operation	–	–	–	556905	VMEM-S-M52-E-G14
Swivel lever valve							
140 l/min	3/2-way valve, monostable	Suitable for vacuum	■	Open/closed	–	4937	RW/O-3-1/8
Whisker valve							
120 l/min	3/2-way valve, monostable	Whisker valve	■	Closed	Internal	3876	FVS-3-1/8
				Open	Internal	3877	FVSO-3-1/8

1) With piloted valves

Valves VMEM, mechanically actuated

FESTO

Ordering data

Ordering data							
Nominal flow rate	Valve function	Description	Mechanical reset	Normal position	Pilot air ¹⁾	Part No.	Type
Roller lever valve with idle return, toggle lever valve							
80 l/min	3/2-way valve, monostable	Roller lever valve with idle return	■	Open/closed	-	10749	L/O-3-PK-3
		Roller lever valve with idle return, suitable for vacuum		Closed		3628	L-3-M5
120 l/min	3/2-way valve, monostable	Toggle lever valve	■	Closed	-	2186	LS-3-1/8
				Open		2950	LOS-3-1/8
	4/2-way valve, monostable	Toggle lever valve	■	-	-	3416	LS-4-1/8
550 l/min	5/2-way valve, monostable	Roller lever valve with idle return, suitable for vacuum	■	-	-	8993	L-5-1/4-B
600 l/min	3/2-way valve, monostable	Roller lever valve with idle return, suitable for vacuum	■	Closed	-	8982	L-3-1/4-B
				Open		8989	LO-3-1/4-B
Roller lever, roller actuated valve							
80 l/min	3/2-way valve, monostable	Roller lever valve	■	Open/closed	-	10748	R/O-3-PK-3
				Closed		3629	R-3-M5
120 l/min	3/2-way valve, monostable	Roller lever valve	■	Closed	-	2272	RS-3-1/8
				Open		2270	ROS-3-1/8
	4/2-way valve, monostable	Roller lever valve	■	-	-	2949	RS-4-1/8
550 l/min	5/2-way valve, monostable	Roller lever valve, suitable for vacuum	■	-	-	8996	R-5-1/4-B
600 l/min	3/2-way valve, monostable	Roller lever valve, suitable for vacuum	■	Closed	-	8985	R-3-1/4-B
				Open		8991	RO-3-1/4-B

1) With piloted valves

Valves VMEM, mechanically actuated

Accessories

FESTO

Ordering data					
	Description		Part No.	Type	PU ¹⁾
Push-in fitting with external hex (Mini version)					
	Connecting thread M5 for tubing O.D.	3 mm	153302	QSM-M5-3	10
		4 mm	153304	QSM-M5-4	10
		6 mm	153306	QSM-M5-6	10
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186264	QSM-G $\frac{1}{8}$ -4	10
		6 mm	186265	QSM-G $\frac{1}{8}$ -6	10
Push-in fitting with external hex (Standard version)					
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186095	QS-G $\frac{1}{8}$ -4	10
		6 mm	186096	QS-G $\frac{1}{8}$ -6	10
	Connecting thread G $\frac{1}{4}$ for tubing O.D.	6 mm	186097	QS-G $\frac{1}{4}$ -6	10
		8 mm	186099	QS-G $\frac{1}{4}$ -8	10
		10 mm	186101	QS-G $\frac{1}{4}$ -10	10
Push-in fitting with internal hex (Mini version)					
	Connecting thread M5 for tubing O.D.	3 mm	153313	QSM-M5-3-I	10
		4 mm	153315	QSM-M5-4-I	10
		6 mm	153315	QSM-M5-6-I	10
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186266	QSM-G $\frac{1}{8}$ -4-I	10
		6 mm	186267	QSM-G $\frac{1}{8}$ -6-I	10
Push-in fitting with internal hex (Standard version)					
	Connecting thread G $\frac{1}{8}$ for tubing O.D.	4 mm	186106	QS-G $\frac{1}{8}$ -4-I	10
		6 mm	186107	QS-G $\frac{1}{8}$ -6-I	10
		8 mm	186109	QS-G $\frac{1}{8}$ -8-I	10
	Connecting thread G $\frac{1}{4}$ for tubing O.D.	6 mm	186108	QS-G $\frac{1}{4}$ -6-I	10
		8 mm	186110	QS-G $\frac{1}{4}$ -8-I	10
		10 mm	186112	QS-G $\frac{1}{4}$ -10-I	10
Tubing					
	Standard I.D. tubing, material: PL (packaging unit: 50 m)	Blue	3453	PL-3-BL	
		Black	4640	PL-3-SW	
	Standard I.D. tubing, material: PU (packaging unit: 50 m)	Blue	5732	PU-3-BL	
		Black	5731	PU-3-SW	
Silencer					
	Connecting thread	G $\frac{1}{8}$	2307	U- $\frac{1}{8}$	1
			161419	UC- $\frac{1}{8}$	1
		G $\frac{1}{4}$	2316	U- $\frac{1}{4}$	1
			6842	U- $\frac{1}{4}$ -B	1
			165004	UC- $\frac{1}{4}$	1
Mounting bracket					
	For valves with push-in connector and threaded connection M5	11 g	9634	HV-M5	1
	For valves with push-in connector and threaded connection G $\frac{1}{8}$	32 g	9635	HV- $\frac{1}{8}$	1

1) Packaging unit

Valves VMEM, mechanically actuated

Accessories

Ordering data				
	Description	Part No.	Type	PU ¹⁾
Actuator attachment				
	For stem actuated valve V/O-3-1/8, roller lever	4936	AR-01	1
	For stem actuated valve V/O-3-1/8, roller lever with idle return	4941	AL-01	1
	For roller lever valve R-3-M5, roller lever with mounting screws	6512	AR-05	1
	For roller lever valve with idle return L-3-M5, roller lever with idle return with mounting screws	6513	AL-05	1
	For swivel lever valve RW/O-3-1/8, short swivel lever	5835	ASK-02	1
	For swivel lever valve RW/O-3-1/8, long swivel lever	5836	ASL-02	1
	For swivel lever valve RW/O-3-1/8, swivel lever rod	4789	ASS-02	1

1) Packaging unit

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com