

## AS-interface® modules CESA

**FESTO**



# AS-interface® modules CESA

FESTO

Key features

## Basic principles and features of the bus system

### Introduction

The AS-interface system permits the transfer of power and data using a single cable.

The advanced technology used to connect stations to the yellow cable and the low connection costs mean that even stations with a small number of inputs and outputs (max. 8 inputs and 8 outputs per valve terminal with two chips) can be networked.

The AS-interface gateways from Festo act as a master for the AS-interface network and a slave for the higher-level fieldbus system (PROFIBUS or CANopen).

From the point of view of the higher-level fieldbus, the AS-interface gateways behave like modular I/O modules. This makes commissioning and troubleshooting much easier. The gateways can be connected to the controllers FED-CEC/-CECCAN (CANopen master), CPX-CEC (CANopen master) and CECX (PROFIBUS DP and CANopen master) from Festo as well as any other controllers with a PROFIBUS or CANopen interface.

For the Festo controllers, the controller functionality is programmed as normal using the CoDeSys programming tool. Larger systems can be easily configured with the help of the AS-interface control software. The data of the connected AS-interface slave devices can be easily diagnosed for servicing.

- Extended AS-interface diagnostic functions that far surpass the standard diagnostic functions according to the AS-interface Specification
- Simple configuration error history enables sporadic configuration errors to be located
- Error counters enable the quality of data communication on the AS-interface cable to be monitored

AS-interface Specification version	Inputs	Outputs	Bus cycle (ms)	No. of slaves, digital	No. of slaves, analogue	$\Sigma$ I/O
2.0	4/4	4	5	31	31	248
2.1	4	3	10	62	31	434
3.0	4/8	4/8	20	62	62	992

### Master/slave principle

- Non-proprietary
- No restrictions in terms of cable layout and/or topology
- Data and power via a single two-wire cable
- Immune to interference
- Medium: unscreened cable 2x 1.5 mm<sup>2</sup>
- With 31 slaves, max. 4 inputs and 4 outputs per slave
- Data and power supply for up to 8 outputs per AS-interface string
- With 62 slaves, max. 4 inputs and 3 outputs per slave (A/B operation as per Specification V2.1)
- Modules for control cabinets (IP20) and harsh industrial environments (IP65, IP67)
- With 31 slaves, 4 analogue inputs or outputs per slave
- Profile 7.3: analogue values (16 bits) per slave (as per Specification V2.1)
- Profile 7.4: parameterisable communication profile, e.g. 16x 16 bits per slave (as per Specification V2.1)
- Profile 7.A.7 permits 4 bits for digital inputs and 4 bits for digital outputs on just one A/B slave. The 4 outputs are transmitted in two A/B bus cycles of 2 bits each. This extends the cycle time (in the worst-case scenario) to 20 ms.
- Insulation displacement technology

- Cable length 100 m, can be extended to up to 200 m through the use of an extension plug and to up to 500 m through the use of repeaters, etc.
- Highly effective error control
- Simple commissioning
- Electronic address selection via the bus connection




Slaves to Specification V3.0 require a master to Specification V3.0

# AS-interface® modules CESA

FESTO

System overview

## Components

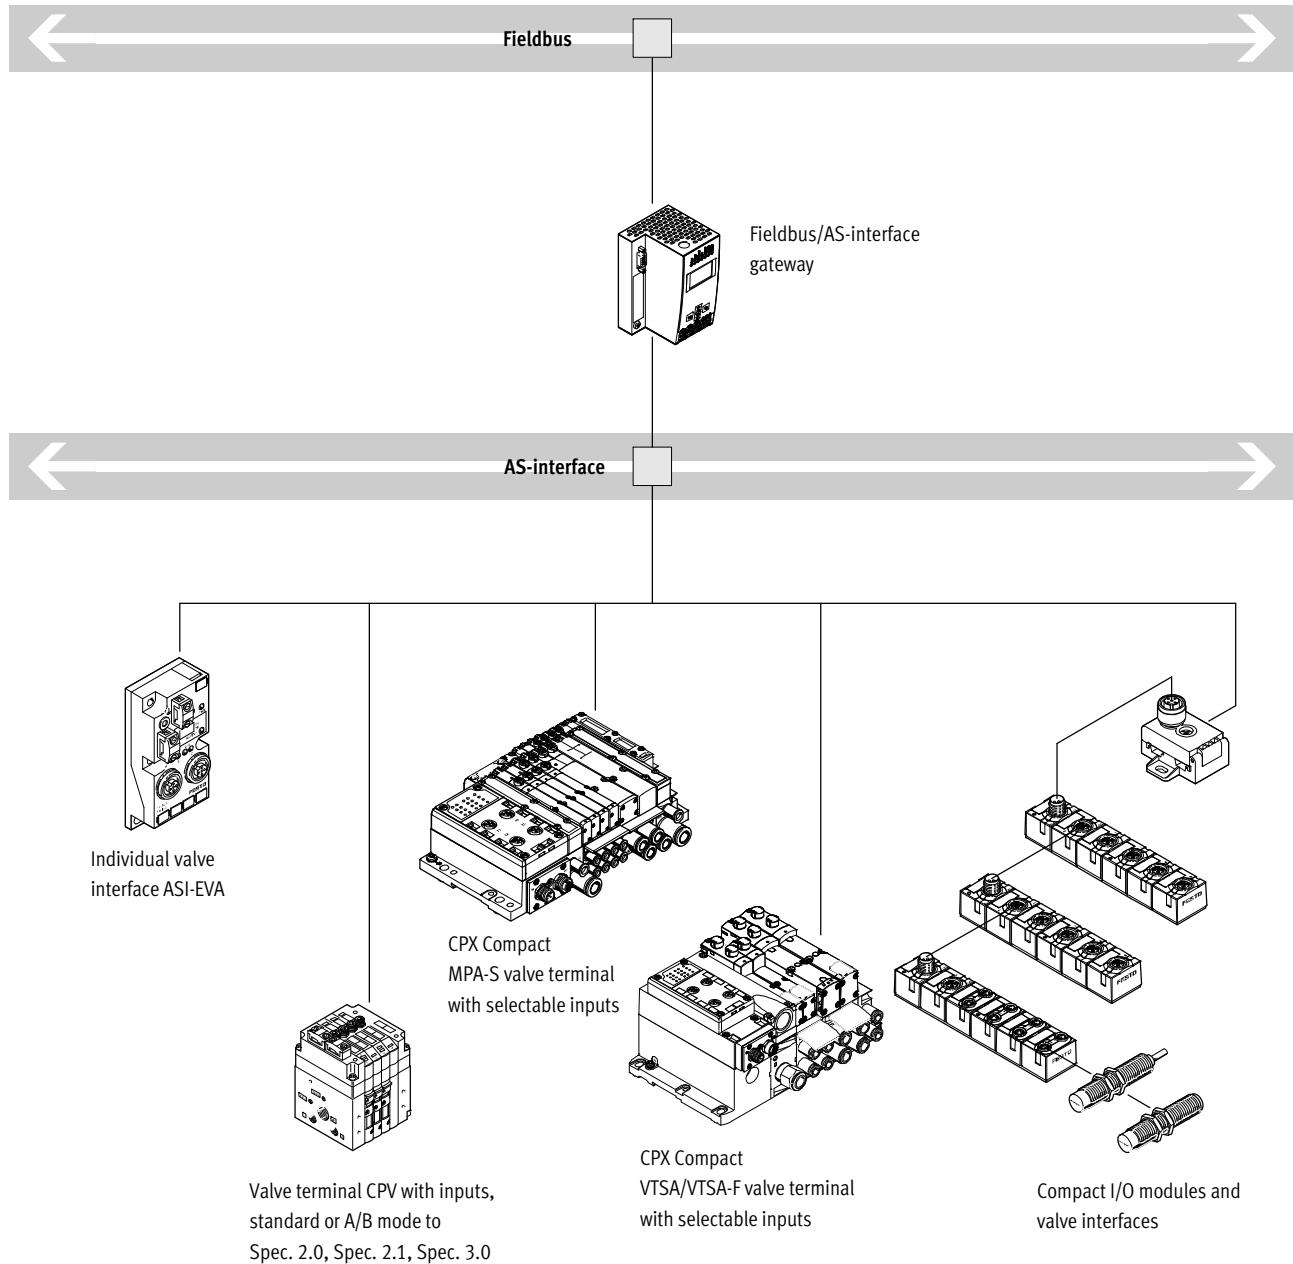


# AS-interface® modules CESA

System overview

FESTO

## Master



AS-interface gateways are used to connect the AS-interface network to a higher-level fieldbus. They behave like a master within the AS-interface network and a slave within the fieldbus network.


The AS-interface gateways from Festo conform to the AS-interface Specification 3.0 and support the extended addressing range with up to 62 AS-interface slaves.

## Versions

- CANopen
- PROFIBUS

## Slaves

### Actuators




Actuators for the process industry  
Quarter turn actuators DRD (Copar)  
Linear valve actuators DLP (Copac)

- Local controllers for actuators for the process industry in exterior applications in the range  $-5 \dots +50^{\circ}\text{C}$

- Individual valve interface ASI-EVA for Namur valves
- Sensor box with visual position detection DAPZ

### Valves




- A universal solution from the individual valve interface up to a compact solution with 8 valves

- Integrated inputs on individual valve interfaces and valve terminals CPV, MPA-S and VTSA/VTSA-F

- More inputs thanks to 4-way and 8-way input modules
- On request:  
Application-specific valves and integration solutions

## Compact I/O modules, valve interfaces



- Highly compact modules
- Sturdy, encapsulated electrics
- Bus and auxiliary power supply 2x M12 looped through


- Inputs 200 mA
- Outputs 1 A

- 8 inputs M8
- 4 inputs and 3 outputs M12

## Accessories



- Addressing device with user-friendly operating and diagnostic functions for the entire AS-interface, for example to perform the following tasks in a fully installed network:
  - change addresses
  - set outputs
  - read inputs
  - and many more



- Power supply unit for AS-interface
- Primary switched mode modular power supply
- Compact, modular and energy-saving power supply system for AS-interface – with integrated earth-fault monitoring system.  
AS-interface load: 4.8 A. Optional auxiliary power supply 24 VDC, load: 5 or 10 A

- Installation accessories for installing the flat cable


# AS-interface® modules CESA

Connection technology and addressing

FESTO


## Handling

### Operation




The AS-interface gateways can be configured and programmed using the GSPF software. An alternative option for programming, commissioning or troubleshooting is to use the operating buttons on the gateway and the LED and LCD displays on the gateway.

### AS-interface connections



The AS-interface network as well as the power supply for the gateway and AS-interface are connected via a terminal strip.

## Mounting

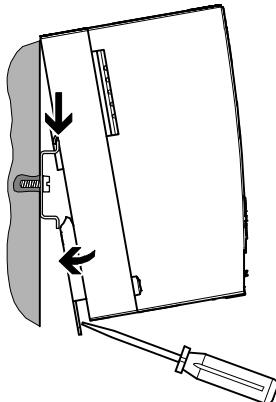

The gateway is mounted using an H-rail.  
There are appropriate lugs on the rear of the device.

### Extended addressing range

The extended addressing range enables a total of 62 slaves to be operated on one AS-interface master. The masters as well as the slaves must be designed for the extended addressing range in order to be able to exploit the full number of slaves. With the extended addressing range, two slaves share one address. Standard slaves do not have this capability. They can be connected to a master

with an extended addressing range, but also occupy a full address. In other words, up to 62 slaves with an extended addressing range but only 31 standard slaves can be connected to a master with an extended addressing range. Slaves with an extended addressing range can be connected like standard slaves to a standard master, but must be configured as an "A" slave.

# AS-interface® modules CESA

FESTO

Type codes

CESA		GW	AS	CO
<b>Type</b>				
CESA	Individual controller			
<b>Function module</b>				
GW	Gateway			
<b>Interface</b>				
AS	AS-interface			
<b>Bus connection</b>				
CO	CANopen			
PB	PROFIBUS DP			

# AS-interface® modules CESA

FESTO

Technical data

## CESA-GW-AS-PB

AS-interface module with PROFIBUS DP connection

The AS-interface modules are used to couple decentralised AS-interface networks to higher-level controllers via a fieldbus.

## CESA-GW-AS-CO

AS-interface module with CANopen connection

The following fieldbus connections are available:

- PROFIBUS DP
- CANopen



## General technical data

	CESA-GW-AS-PB	CESA-GW-AS-CO
Operating elements	4 buttons	
Status displays	LCD display Yellow LED: Projection mode Green LED: AS-interface operating normally Green LED: AS-interface voltage OK Green LED: PROFIBUS master detected Green LED: Slave programming Green LED: Voltage ON Red LED: Configuration error	
Operating voltage	[V DC]	30 (AS-interface voltage)
Current consumption	[mA]	200 (from the AS-interface line)
Protection class		IP20
Resistance test		As per EN 61131-2 (resistance to shock, vibration)
Product weight	[g]	460 520
Dimensions W x L x H	[mm]	75 x 120 x 83 85 x 120 x 83
Materials		
Housing		High-alloy stainless steel
Note on materials		Contains PWIS (paint-wetting impairment substances) RoHS-compliant

## Technical data – Interfaces

	CESA-GW-AS-PB	CESA-GW-AS-CO
Fieldbus interface		
Type	PROFIBUS to DIN 19245 Part 3	CANopen, Device Specification CiA DS-301
Connection technology	Sub-D socket, 9-pin	COMBICON plug, 5-pin
Transmission rate	9.6 kbps ... 12 Mbps	10 kbps ... 1 Mbps
Programming/diagnostic interface		
Type	RS232 serial interface	

## Operating and environmental conditions

	CESA-GW-AS-PB	CESA-GW-AS-CO
Ambient temperature	[°C]	0 ... +55
Storage temperature	[°C]	-25 ... +85
Certification		cULus listed (OL) C-Tick
CE mark (see declaration of conformity) <sup>1)</sup>		To EU EMC Directive

1) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.


If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

# AS-interface® modules CESA

FESTO

Technical data

## Connection and display components

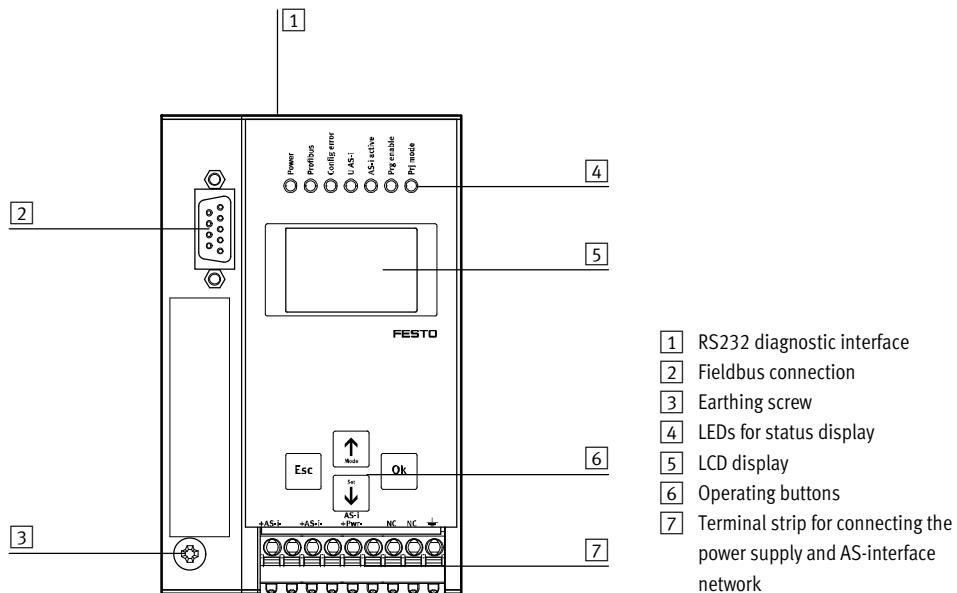

- 1** RS232 diagnostic interface
- 2** Fieldbus connection
- 3** Earthing screw
- 4** LEDs for status display
- 5** LCD display
- 6** Operating buttons
- 7** Terminal strip for connecting the power supply and AS-interface network

## Pin allocation – PROFIBUS

	Pin	Signal	Meaning
Sub-D socket to DIN 50170			
	1	n.c.	Not connected
	2	n.c.	Not connected
	3	RxD/TxD-P	Data transmission line B
	4	n.c.	Not connected
	5	DGND	Data reference potential (0 V)
	6	VP	Supply voltage (+5 V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Data transmission line A
	9	n.c.	Not connected

## Pin allocation – CANopen

	Pin	Signal	Meaning
Terminal strip, 5-pin <sup>1)</sup>			
	1	V+	24 V DC supply CAN interface
	2	CAN_H	Received/transmitted data high
	3	Screened	Connection to FE (functional earth)
	4	CAN_L	Received/transmitted data low
	5	V-	0 V CAN interface

1) The interface is supplied with voltage via the plug.

## Pin allocation – AS-interface

	Signal	Meaning
Screw terminal		
1	+AS-i-	Connection to AS-interface line
2	AS-i +PWR-	Power supply for AS-interface line (max. 8 A)
3	FE	Functional earth


# AS-interface® modules CESA

FESTO


Technical data

## Dimensions

CESA-GW-AS-PB

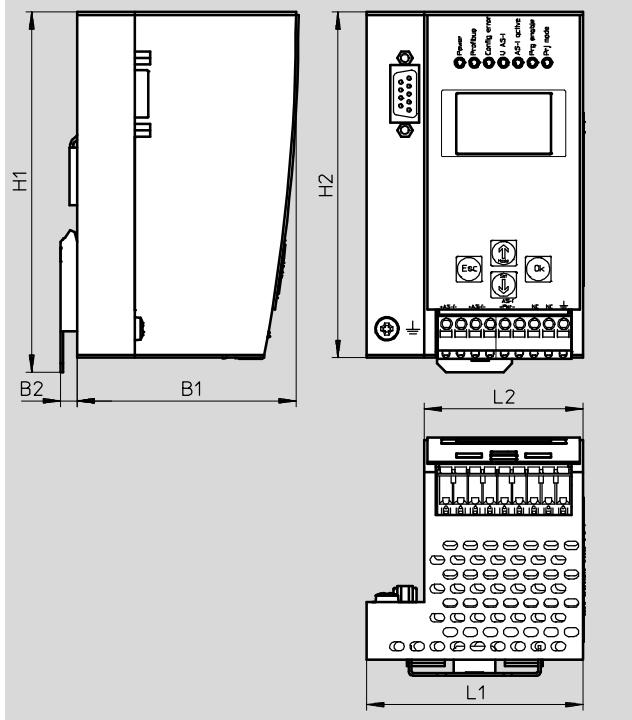

CESA-GW-AS-CO

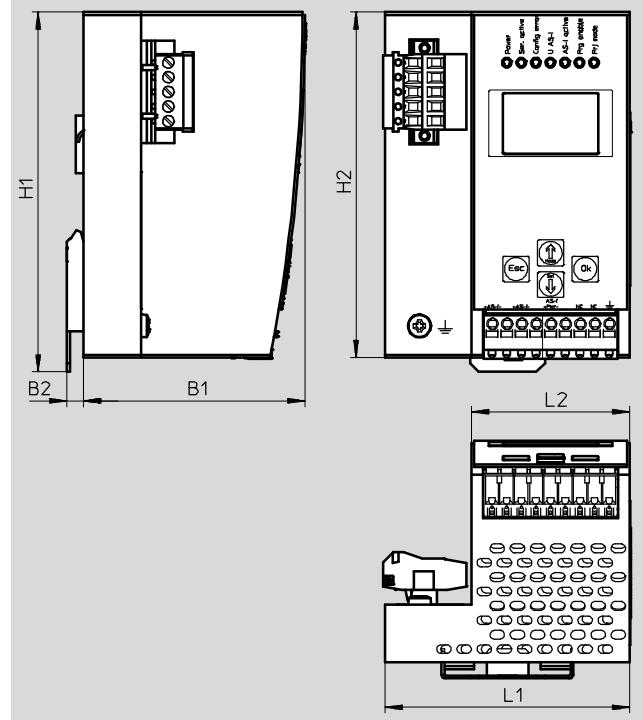



Download CAD data ➔ [www.festo.com](http://www.festo.com)

Type	B1	B2	H1	H2	L1	L2
CESA-GW-AS-PB	76	7	125	120	75	55
CESA-GW-AS-CO	76	7	125	120	85	55

# AS-interface® modules CESA

FESTO

Accessories

Ordering data		Part No.	Type
<b>AS-interface gateway</b>			
	AS-interface master with PROFIBUS DP fieldbus connection	567032	CESA-GW-AS-PB
	AS-interface master with CANopen fieldbus connection	567033	CESA-GW-AS-CO
<b>PROFIBUS bus connection</b>			
	Sub-D plug, angled	533780	FBS-SUB-9-WS-PB-K
<b>AS-interface</b>			
	AS-interface flat cable, yellow	100 m	18940 KASI-1,5-Y-100
	AS-interface flat cable, black	100 m	18941 KASI-1,5-Z-100
	Cable cap for flat cable (pack of 50)	18787	ASI-KK-FK
	Cable sleeve (pack of 20)	165593	ASI-KT-FK
	AS-interface module as bus termination	567035	CACF-BT-AS
	Primary switched mode modular power supply 24 V DC power supply	5 A	2247681 CACN-3A-1-5
		10 A	2247682 CACN-3A-1-10
	H-rail to EN 60715	35430	NRH-35-2000
	Software for configuring the system and diagnosing the AS-interface slaves during servicing	567036	GSPF-BS-1-AF-ML

## Product Range and Company Overview

### A Complete Suite and Company Overview

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



**Custom Automation Components**  
Complete custom engineered solutions



**Custom Control Cabinets**  
Comprehensive engineering support and on-site services



**Complete Systems**  
Shipment, stocking and storage services

### The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



**Electromechanical**  
Electromechanical actuators, motors, controllers & drivers



**Pneumatics**  
Pneumatic linear and rotary actuators, valves, and air supply



**PLCs and I/O Devices**  
PLC's, operator interfaces, sensors and I/O devices


### Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 16,000 employees in 60 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

### Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2013, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmental friendly printing plant.

# Festo North America



**[1] Festo Canada Headquarters**  
**Festo Inc.**  
5300 Explorer Drive  
Mississauga, ON  
L4W 5G4

**[2] Montréal**  
5600, Trans-Canada  
Pointe-Claire, QC  
H9R 1B6

**[3] Québec City**  
2930, rue Watt#117  
Québec, QC  
G1X 4G3



**[4] Festo United States Headquarters**  
**Festo Corporation**  
395 Moreland Road  
Hauppauge, NY  
11788

**[5] Appleton**  
North 922 Tower View Drive, Suite N  
Greenville, WI  
54942

**[7] Detroit**  
1441 West Long Lake Road  
Troy, MI  
48098

**[6] Chicago**  
85 W Algonquin - Suite 340  
Arlington Heights, IL  
60005

**[8] Silicon Valley**  
4935 Southfront Road, Suite F  
Livermore, CA  
94550

## Festo Regional Contact Center

### Canadian Customers

Commercial Support:  
Tel: 1 877 GO FESTO (1 877 463 3786)  
Fax: 1 877 FX FESTO (1 877 393 3786)  
Email: festo.canada@ca.festo.com

Technical Support:  
Tel: 1 866 GO FESTO (1 866 463 3786)  
Fax: 1 877 FX FESTO (1 877 393 3786)  
Email: technical.support@ca.festo.com

### USA Customers

Commercial Support:  
Tel: 1 800 99 FESTO (1 800 993 3786)  
Fax: 1 800 96 FESTO (1 800 963 3786)  
Email: customer.service@us.festo.com

Technical Support:  
Tel: 1 866 GO FESTO (1 866 463 3786)  
Fax: 1 800 96 FESTO (1 800 963 3786)  
Email: product.support@us.festo.com