

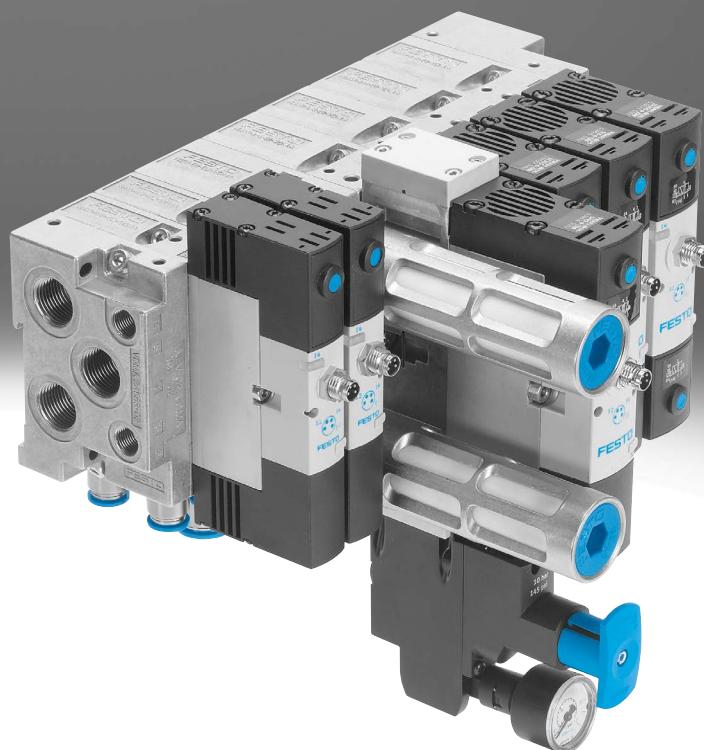
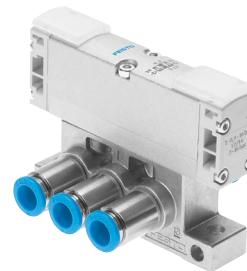


Solenoid/pneumatic valves, ISO 15407-1

FESTO

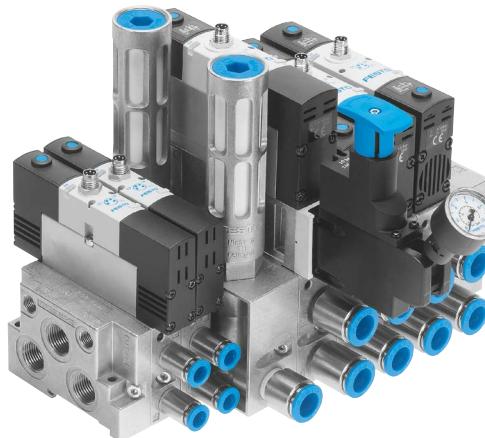

Key features

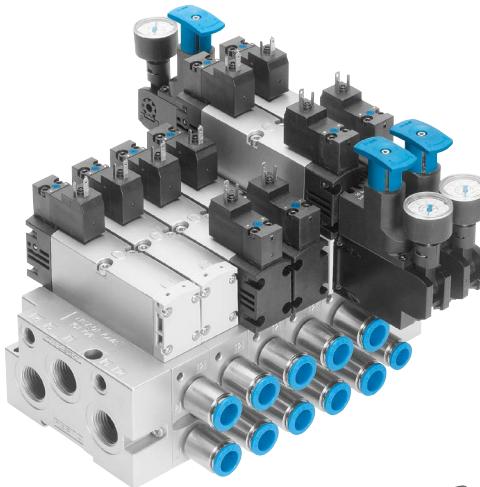

Innovative

- High-performance valves in a sturdy metal housing
- Individual electrical connection via square or round plug sockets
- Valve replacement under pressure possible using vertical pressure shut-off plate
- Reverse operation
- Vacuum operation

Flexible

- Modular system offering a range of configuration options
- Conversions and extensions are possible at any time
- Possible to integrate innovative function modules
 - Regulator plate
 - Throttle plate
 - Vertical pressure shut-off plate
 - Vertical supply plate
- Vertical supply plates permit a flexible air supply and variable pressure zones
- Wide range of valve functions
- Extensive operating voltage range from 12 V DC to 230 V AC

Reliable


- Sturdy and durable metal components
 - Valves
 - Horizontally linked sub-bases
 - Vertically stacked sub-bases
- Fast troubleshooting thanks to LEDs:
 - in the plug socket, or
 - in the illuminating seal, or
 - in the valve
- Reliable servicing thanks to valves that can be replaced quickly and easily
- Manual override
- Durable thanks to tried-and-tested piston spool valves

Easy to install

- Solid wall mounting or DIN rail mounting
- Combinations of manifold assemblies of valve size 18 mm and 26 mm
- Plug-in pressure gauges on the regulator plate

Key features

Single valve manifold assembly VTIA

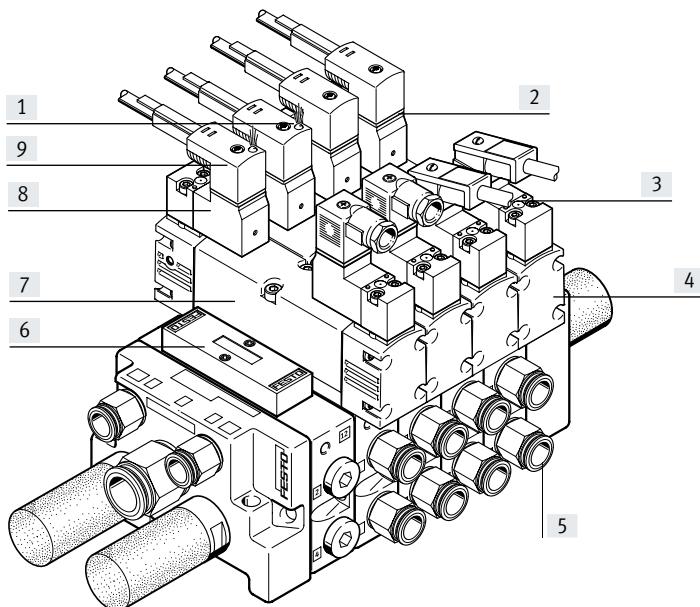

- [1] Signal status indication via LED
- [2] Signal status indication via illuminating seal
- [3] Manual override
- [4] One valve series for different flow rates
- [5] Fittings with external hex
- [6] Cover plate for vacant and expansion positions
- [7] Various valve functions
- [8] Various voltages
- [9] Pilot valve with port pattern to ISO 15218

Equipment options

5/2-way valve

- Single solenoid, pneumatic or spring return
- Double solenoid valve
- Double solenoid valve with dominance at 14

2x 3/2-way valve, single solenoid

- Normally open
- Normally open, reversible (on request)
- Normally closed
- Normally closed, reversible (on request)

5/3-way valve

- Mid-position valve
 - Normally open
 - Normally closed
 - Normally exhausted

2x 2/2-way valve, single solenoid

- Normally closed

Special features

Operation with external pilot air supply

- For vacuum applications
- For operating pressure of less than 0.3 MPa
- For significant pressure fluctuations in the power section. Power unit and pneumatic control unit are isolated
- For heavily lubricated air in the power unit
- For manifolds if the pressure zones are created via ducts 3 and 5 (not possible with 2x 3/2)
- For manifolds or pressure zones that are equipped with reversible 2x 3/2-way valves (valves on request)

Operation with internal pilot air supply

- For small pressure fluctuations in the power section
- For using regulator plates with vertical stacking, also in reverse operation
- As a low-cost solution

Reverse operation with compressed air supply via ducts 3 and 5


- Pressure zone separation via ducts 3 and 5
 - Example: duct 3 vacuum, duct 5 ejector pulse
 - Example: duct 3 high pressure for advancing the piston rod of a double-acting cylinder. Low pressure in duct 5 for retracting the piston rod with low energy consumption
- 2x 3/2-way valves used as 5/4-way valve with controllable overlap and pressure zone separation with the reversible variant

Reverse operation with a regulator plate, compressed air supply via duct 1

- Reversible pressure regulator combined with a reversible 2x 3/2-way valve regulates outputs 2 and 4
 - AB regulator for each of outputs 2 and 4
 - A regulator for output 4
 - B regulator for output 2
- Reversible pressure regulators are in the regulating position immediately after the power supply is switched on
 - Adjustment possible at any time
 - Dynamic response characteristics
 - Reduced regulator load because the supply pressure is maintained when the valve is switched
 - Not exhausted via the regulator

Key features

Valve manifold assembly VTIA with a combination of sizes and vertical stacking

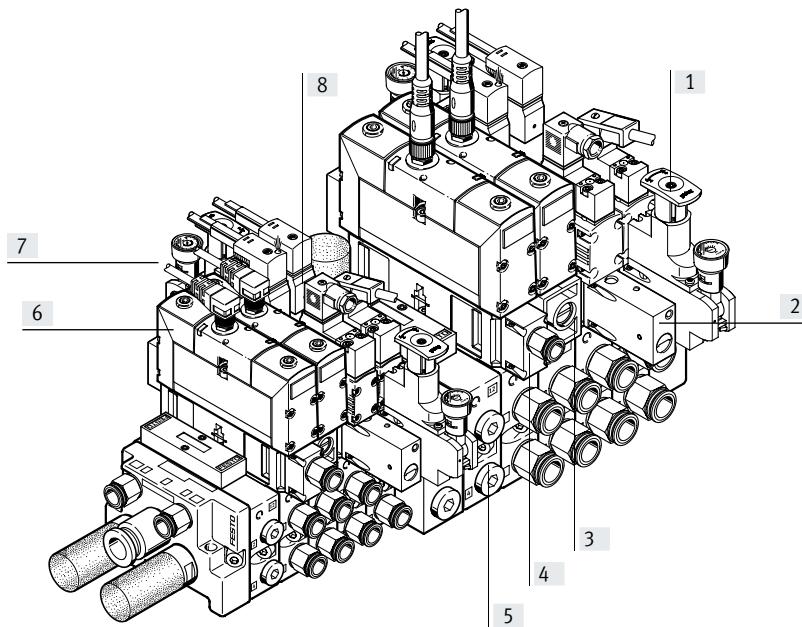

Vertical stacking function

Pressure regulator

- Single variant to regulate the pressure at output 4(A) or 2(B) or at input 1(P)
- Dual variant to regulate the pressure at output 4(A) and 2(B) individually
- Reverse variant for the outputs so that the regulator is in the control position
- With pressure gauge connection

Throttle plate

- Designed with two flow control valves for adjusting the exhaust air flow rate at exhausts 5 or 3. This allows the drive to start moving and the required speed to be set at the manifold using the manual override.


Vertical pressure shut-off plate

- This is equipped with a switch with which the compressed air supply can be shut off. A directional control valve or downstream vertical stacking plate can thus be replaced without switching off the overall air supply.
- If the control chain has a redundant design, the cycle can continue even with cyclical control.

Vertical supply plate


- As additional air supply for a valve
- To supply a third pressure zone

Individual connection with square plug, type C




The directional control valve has a pilot control to ISO 15218 and a plug pattern to EN 175301-803, type C.

Individual connection with square plug, with position sensing




The directional control valve has a pilot control to ISO 15218, a plug pattern to EN 175301-803, type C and an inductive sensor.

Individual connection with square plug, type B



The electrical connection is established using a plug socket with plug pattern type C to industry standard.


Individual connection with central round plug



The electrical connection is established using a standardised M12 or M8 plug socket 24 V DC (EN 61076-2-101).


Key features

Single valve manifold assembly VTIA, directional control valves with square plug, type C

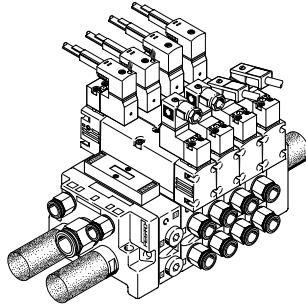


- Valve size 26 mm
- Spare position
- Compressed air supply via duct 1
- External pilot air supply
- With fittings
- Exhausting via silencer for ducts 3 and 5

Single valve manifold assembly VTIA, pressure zones via duct 3 and 5

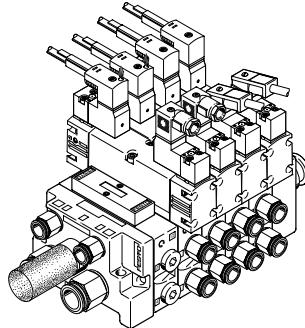


- Valve size 26 mm
- Spare position
- Compressed air supply via ducts 3 and 5
- External pilot air supply
- With fittings
- Exhausting via silencer

Valve manifold assembly VTIA fitted with valve size 18 mm and 26 mm, directional control valves with square plug, type C

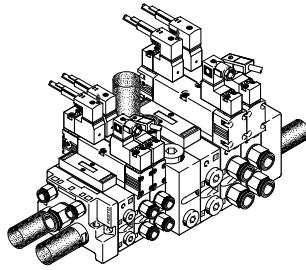


- Valve sizes 18 mm and 26 mm combined via intermediate plate
- Spare position
- Compressed air supply via duct 1
- External pilot air supply
- With fittings
- Exhausting via silencer for ducts 3 and 5 on the end plates and for duct 3 also on the intermediate plate

Valve manifold assembly VTIA fitted with valve size 26 mm, directional control valves with square plug, type B

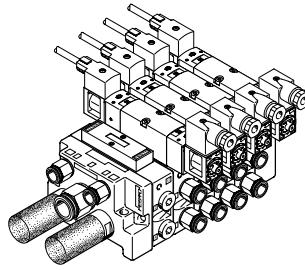


- Valve size 26 mm
- Spare position
- Compressed air supply via duct 1
- Internal pilot air supply
- With fittings
- Exhausting via silencer for ducts 3 and 5
- No regulator plates possible

Valve manifold assembly VTIA fitted with valve size 18 mm and 26 mm, directional control valves with central round plug

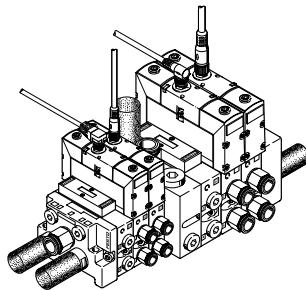


- Valve sizes 18 mm and 26 mm combined via intermediate plate
- Spare position
- Compressed air supply via duct 1
- Internal pilot air supply
- With fittings
- Exhausting via silencer for ducts 3 and 5 on the end plates and for duct 3 also on the intermediate plate

Valve manifold assembly VTIA with maximum expansion using vertical stacking modules

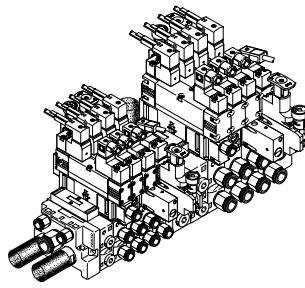


- Valve sizes 18 mm and 26 mm combined via intermediate plate
- Directional control valves with square plug
- Pressure regulators
- Throttle plates
- Shut-off plates
- Supply plates with spare position

Pneumatically actuated directional control valve on individual sub-base



Directional control valves on an individual sub-base can be used for drives that are further away from a valve manifold assembly or when there is only one drive.


Valve manifold assembly VTIA with valve size 18 mm and 26 mm, with pneumatically actuated directional control valves

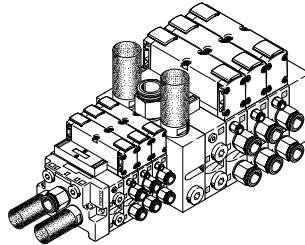

- Valve sizes 18 mm and 26 mm combined via intermediate plate
- Spare position
- Compressed air supply via duct 1
- With fittings
- Exhausting via silencer for ducts 3 and 5 on the end plates and for ducts 3 and 5 also on the intermediate plate


Key features

Solenoid valves with square plug, type C

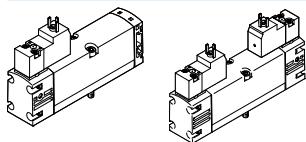


- Valve size 18 mm and 26 mm
- 2x 2/2-way, 2x 3/2-way, 5/2-way and 5/3-way valves
- 2x 3/2-way valves for reverse operation
- Internal or external pilot air supply available
- 12, 24 V DC, 24, 110 or 220 V AC

Solenoid valves with M12 round plug

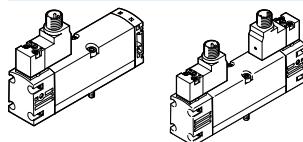


- Valve size 18 mm and 26 mm
- 2x 2/2-way, 2x 3/2-way, 5/2-way and 5/3-way valves
- 2x 3/2-way valves for reverse operation
- Internal or external pilot air supply available
- 24 V DC

Basic valves with interface to ISO 15218

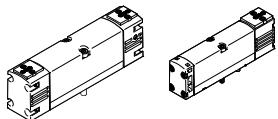


- Valve size 18 mm and 26 mm
- 2x 2/2-way, 2x 3/2-way, 5/2-way and 5/3-way valves
- Internal or external pilot air supply available

Pilot valve with interface to ISO 15218




- With square plug, type C or round plug M12
- For 12, 24 V DC and 24 V AC without PE conductor
- For 110 and 220 V AC with PE conductor
- 3/2-way valve
- Non-detenting or non-detenting/detenting manual override

Valve with position sensing




- Valve size 26 mm
- 5/2-way valves
- Internal or external pilot air supply available
- 24 V DC
- Inductive sensor for monitoring the normal position of the piston spool valve

Solenoid valves with square plug, type B

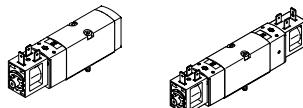


- Valve size 26 mm
- 5/2- and 5/3-way valves
- Internal pilot air supply
- 24 V DC

Solenoid valves with central round plug




- Valve size 18 mm and 26 mm
- 2x 3/2-way, 5/2-way and 5/3-way valves
- Internal or external pilot air supply available
- 24 V DC

Pneumatically actuated directional control valves

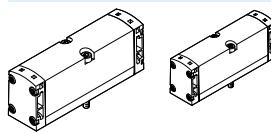


- Valve size 18 mm and 26 mm
- 2x 3/2-way, 5/2-way and 5/3-way valves
- Signal inputs 12 and 14 via the sub-base

Individual sub-base




- Valve size 18 mm and 26 mm
- Ports 12 and 14 for external pilot air supply for solenoid valves and
- Ports signal inputs 12 and 14 for pneumatically actuated valves are the same

Cover plate for vacant position




- Valve size 18 mm and 26 mm

End plate kit

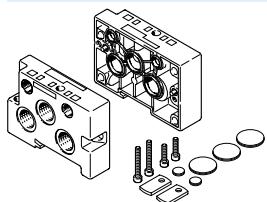

- Valve size 18 mm and 26 mm
- Ports 12 and 14 for external pilot air supply for solenoid valves
- The signal inputs for pneumatically actuated valves are only on suitable manifold sub-bases

Manifold sub-base/series sub-base



- Valve size 18 mm and 26 mm
- For solenoid valves
- For pneumatically actuated valves with additional ports for the signal inputs


Key features

Intermediate plate



- Adapter between valve size 18 mm and 26 mm
- With additional air supply and exhaust ports


Pressure regulator plate with one pressure regulator

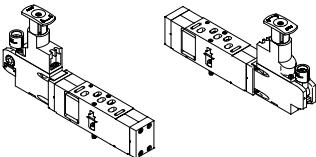

Variants


- Valve size 18 mm and 26 mm
- For pressure regulation at supply input 1 (P). The set pressure for ports 2 and 4 is the same
- For pressure regulation at working port 4 (A)
 - The pressure regulator for reverse operation is supplied via port 1 of the sub-base and supplies port 5 on the directional control valve
 - The directional control valve exhausts via port 1 to ports 3 and 5 of the sub-base
- For pressure regulation at working port 2 (B)
 - Input 3 is supplied here in reverse operation

Intermediate plate kit



- Intermediate plate as adapter between valve sizes 18 mm and 26 mm
- One 18 mm and one 26 mm end plate


Regulator plate with 2 pressure regulators



Variants

- Valve size 18 mm and 26 mm
- For pressure regulation at working ports 4 (A) and 2 (B)
 - The pressure regulators for reverse operation are supplied via port 1 in the sub-base and feed inputs 5 and 3 on the directional control valve
 - The directional control valve exhausts via port 1 to ports 3 and 5 of the sub-base


Vertical supply plate



Variants

- Valve size 18 mm and 26 mm
- As intermediate supply
 - For one valve
 - To supply a third pressure zone
- Can be equipped with a directional control valve


Throttle plate



Variants

- Valve size 18 mm and 26 mm
- Exhaust air restrictors in ducts 3 and 5
 - The flow control plates act as supply air flow control valves for pressure zones that are created via ducts 3 and 5

Vertical pressure shut-off plate



Variants

- Valve size 18 mm and 26 mm
- A switch activated with a slotted head screwdriver shuts off duct 1
 - The throttle plates, pressure regulator plates or directional control valves above it can be replaced
 - Other components of the control chain such as drives, for example, can be replaced once they have been exhausted via the directional control valve

Pressure gauge




Version

- Can be connected to the regulator plates

Key features

Port pattern on sub-base to ISO 15407-1

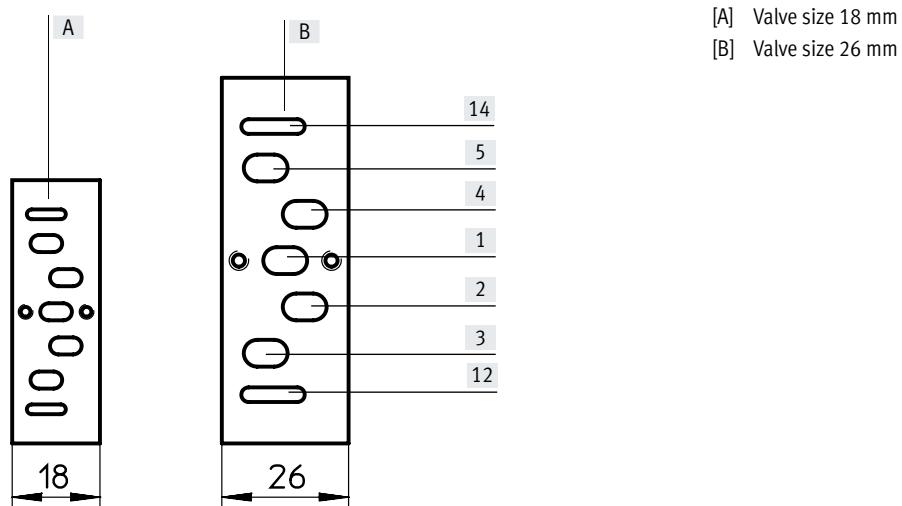


VSA

Conversion of pilot air exhaust

The valve manifold assembly VTIA is supplied with unducted pilot air exhaust. By turning the seal between

the valve and manifold block, exhaust air (pilot air) can be diverted to pilot

duct 12 and can thus be ducted and silenced (see illustration).

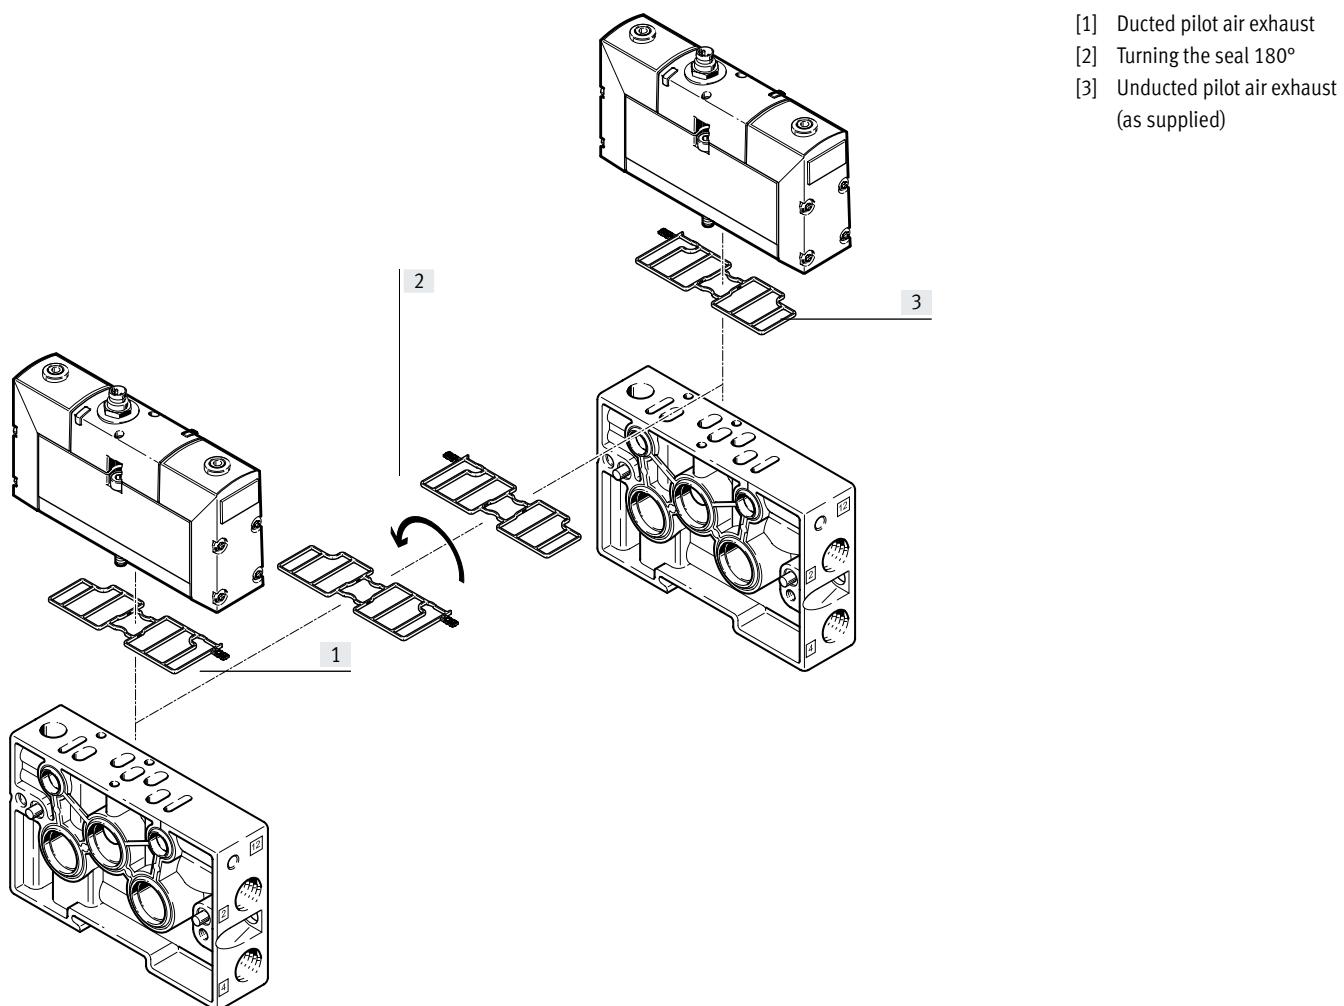

Key features

Use of 2x 3/2-way valve as 5/4-way valve

Code	Circuit symbol	Table of values	Equivalent circuit symbol	Function															
K		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>	Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> Normally exhausted The double-acting drive connected to outputs 2 and 4 is unpressurised when the valve is in the normal position and can be moved by an external force If there is a signal at Y1(14) and Y2(12), there is pressure at outputs 2 and 4
Y1	Y2	A																	
0	0																		
0	1																		
1	0																		
1	1																		
		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>	Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> Normally closed (by combining directional control valve code K and two piloted check valves) The piloted check valves connected to outputs 2 and 4 are unpressurised when the valve is in the normal position and the pressures in the drive close the check valves so it is leak-tight The drive remains stationary when the forces are in equilibrium Leakages can only occur via the drive seals If there is a signal at Y1(14) and Y2(12), the same pressure is present at outputs 2 and 4
Y1	Y2	A																	
0	0																		
0	1																		
1	0																		
1	1																		
N		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>	Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> Normally open The double-acting drive connected to outputs 2 and 4 is supplied with the same compressed air at both ends when the valve is in the normal position and stops when the forces are in equilibrium If there is a signal at Y1(10) and Y2(10), outputs 2 and 4 are exhausted, the drive is unpressurised and can be moved by an external force
Y1	Y2	A																	
0	0																		
0	1																		
1	0																		
1	1																		
H		<table border="1"> <thead> <tr> <th>Y1</th> <th>Y2</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td></td> </tr> <tr> <td>0</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>0</td> <td></td> </tr> <tr> <td>1</td> <td>1</td> <td></td> </tr> </tbody> </table>	Y1	Y2	A	0	0		0	1		1	0		1	1			<ul style="list-style-type: none"> Normally open after port 2 The double-acting drive connected to outputs 2 and 4 is supplied with compressed air via output 2 when the valve is in the normal position. Port 4 is exhausted. When the system is in its initial position, the drive is thus in a clearly defined position, as would also be the case with a 5/2-way single solenoid valve If there is a signal at Y1(14) and Y2(10), output 2 is exhausted and there is pressure at output 4. The drive leaves the initial position A closed circuit can be created with this 2x 3/2-way valve by combining it with piloted non-return valves. However, this is then selected by an active signal at Y2(10).
Y1	Y2	A																	
0	0																		
0	1																		
1	0																		
1	1																		

Product range overview

Function		Type	Valve function	Flow rate of valve [l/min]	Working port on the sub-base		Operating voltage				
					[V DC]	[V AC]	12	24	24	110	230
Valve size											
18 mm			Valve with pilot interface to ISO 15218								
			VSVA-B-T22...A2	2x 2/2-way valve, single solenoid	700	■	-	■	■	■	■
			VSVA-B-T32...A2	2x 3/2-way valve, single solenoid	600	■	-	■	■	■	■
			VSVA-B-M52...A2	5/2-way valve, single solenoid	750	■	-	■	■	■	■
			VSVA-B-B52...A2	5/2-way valve, double-solenoid	750	■	-	■	■	■	■
			VSVA-B-P53...A2	5/3-way valve, mid-position valve	650	■	-	■	■	■	■
			Valve with central plug								
			VSVA-B-T32...A2	2x 3/2-way valve, single solenoid	600	■	-	■	-	-	-
			VSVA-B-M52...A2	5/2-way valve, single solenoid	750	■	-	-	■	-	-
			VSVA-B-B52...A2	5/2-way valve, double-solenoid	750	■	-	-	■	-	-
			VSVA-B-P53...A2	5/3-way valve, mid-position valve	650	■	-	-	■	-	-
			Pneumatic valve								
			VSPA-B-T32...A2	2x 3/2-way valve, monostable	550	■	-	-	-	-	-
			VSPA-B-M52...A2	5/2-way valve, monostable	700	■	-	-	-	-	-
			VSPA-B-B52...A2	5/2-way valve, double-solenoid	700	■	-	-	-	-	-
			VSPA-B-P53...A2	5/3-way valve, mid-position valve	650	■	-	-	-	-	-
Valve size											
26 mm			Valve with pilot interface to ISO 15218								
			VSVA-B-T22...A1	2x 2/2-way valve, single solenoid	1350	-	■	■	■	■	■
			VSVA-B-T32...A1	2x 3/2-way valve, single solenoid	1250	-	■	■	■	■	■
			VSVA-B-M52...A1	5/2-way valve, single solenoid	1400	-	■	■	■	■	■
			VSVA-B-B52...A1	5/2-way valve, double-solenoid	1400	-	■	■	■	■	■
			VSVA-B-P53...A1	5/3-way valve, mid-position valve	1400	-	■	■	■	■	■
			Valve with pilot interface to ISO 15218, with position detection								
			VSVA-B-M52...A1	5/2-way valve, single solenoid	1400	-	■	-	■	-	-
			Valve with square plug type B to industry standard								
			VSVA-B-M52...A1	5/2-way valve, single solenoid	915	-	■	-	■	-	-
			VSVA-B-B52...A1	5/2-way valve, double-solenoid	915	-	■	-	■	-	-
			VSVA-B-P53...A1	5/3-way valve, mid-position valve	924	-	■	-	■	-	-
			Valve with central plug								
			VSVA-B-T32...A1	2x 3/2-way valve, single solenoid	1250	-	■	-	■	-	-
			VSVA-B-M52...A1	5/2-way valve, single solenoid	1400	-	■	-	■	-	-
			VSVA-B-B52...A1	5/2-way valve, double-solenoid	1400	-	■	-	■	-	-
			VSVA-B-P53...A1	5/3-way valve, mid-position valve	1400	-	■	-	■	-	-
			Pneumatic valve								
			VSPA-B-T32...A1	2x 3/2-way valve, monostable	1250	-	■	-	-	-	-
			VSPA-B-M52...A1	5/2-way valve, single solenoid	1400	-	■	-	■	-	-
			VSPA-B-B52...A1	5/2-way valve, double-solenoid	1400	-	■	-	■	-	-
			VSPA-B-P53...A1	5/3-way valve, mid-position valve	1400	-	■	-	■	-	-

Product range overview

Plug		Pilot air			→ Page/ Internet
Square	Round plug	Internal	External		
Type C	Form B	M8x1	M12x1		
Valve with pilot interface to ISO 15218					
■	—	■	■	Pneumatic spring return, normally closed	21
■	—	■	■	Pneumatic spring return, normally closed, open, 1x open/1x closed	21
■	—	■	■	Pneumatic or mechanical spring return	21
■	—	■	■	Dominance: 1st signal or at 14	21
■	—	■	■	Normally closed, exhausted, open	21
Valve with central plug					
—	■	■	■	Pneumatic spring return, normally closed, open, 1x open/1x closed	49
—	■	■	■	Pneumatic or mechanical spring return	49
—	■	■	■	Dominance: 1st signal or at 14	49
—	■	■	■	Normally closed, exhausted, open	49
Pneumatic valve					
—	■	■	■	Pneumatic spring return, normally closed, open, 1x open/1x closed	49
—	■	■	■	Pneumatic or mechanical spring return	49
—	■	■	■	Dominance: 1st signal or at 14	49
—	■	■	■	Normally closed, exhausted, open	49
Valve with pilot interface to ISO 15218					
■	—	■	■	Pneumatic spring return, normally closed	31
■	—	■	■	Pneumatic spring return, normally closed, open, 1x open/1x closed	31
■	—	■	■	Pneumatic or mechanical spring return	31
■	—	■	■	Dominance: 1st signal or at 14	31
■	—	■	■	Normally closed, exhausted, open	31
Valve with pilot interface to ISO 15218, with position detection					
■	—	—	—	Inductive sensor for monitoring the normal position of the piston spool valve	41
Valve with square plug type B to industry standard					
—	■	—	—	Pneumatic or mechanical spring return	45
—	■	—	—	Double solenoid	45
—	■	—	—	Normally exhausted	45
Valve with central plug					
—	■	■	■	Pneumatic spring return, normally closed, open, 1x open/1x closed	54
—	■	■	■	Pneumatic or mechanical spring return	54
—	■	■	■	Dominance: 1st signal or at 14	54
—	■	■	■	Normally closed, exhausted, open	54
Pneumatic valve					
—	■	■	■	Pneumatic spring return, normally closed, open, 1x open/1x closed	62
—	■	■	■	Pneumatic or mechanical spring return	62
—	■	■	■	Dominance: 1st signal or at 14	62
—	■	■	■	Normally closed, exhausted, open	62

Type codes

001	Series	
VSVA	Standards-based valve VSVA	
002	Directional control valve type	
B	Sub-base valve	
003	Valve function	
T22C	2x2/2-way valve, normally closed	
T32U	2x3/2-way valve, normally open	
T32F	2x3/2-way valve, normally open, reversible	
T32C	2x3/2-way valve, normally closed	
T32N	2x3/2-way valve, normally closed, reversible	
T32H	2x3/2-way valve, 1x normally closed, 1x normally open	
T32W	2x3/2-way valve, 1x normally closed, 1x normally open, reversible	
B52	5/2-way valve, double solenoid/bistable	
M52	5/2-way valve, single solenoid/monostable	
D52	5/2-way valve, double solenoid/bistable, dominant signal	
P53U	5/3-way valve, mid-position pressurised	
P53E	5/3-way valve, mid-position exhausted	
P53C	5/3-way valve, mid-position closed	
004	Reset method for monostable/single solenoid valves	
	None	
A	Pneumatic spring	
M	Mechanical spring	
005	Pilot air	
	Internal	
Z	External	
006	Manual override	
D	Non-detenting, detenting	
H	Non-detenting	
007	Pneumatic connection	
A2	18 mm (02) ISO 15407-1/-2	
A1	26 mm (01) ISO 15407-1/-2	
D1	42 mm (1) ISO 5599-1/-2	
D2	52 mm (2) ISO 5599-1/-2	
008	Nominal operating voltage	
1	24 V DC	
009	Electrical connection	
R2	Central connector M8	
R5	Central plug M12	
010	Display	
L	LED	

Type codes

001	Series	
VSVA	Standards-based valve VSVA	
002	Directional control valve type	
B	Sub-base valve	
003	Design principle	
	Piston spool	
K	Piston spool with sealing ring	
004	Valve function	
T22C	2x2/2-way valve, normally closed	
T32U	2x3/2-way valve, normally open	
T32F	2x3/2-way valve, normally open, reversible	
T32C	2x3/2-way valve, normally closed	
T32N	2x3/2-way valve, normally closed, reversible	
T32H	2x3/2-way valve, 1x normally closed, 1x normally open	
T32W	2x3/2-way valve, 1x normally closed, 1x normally open, reversible	
B52	5/2-way valve, double solenoid/bistable	
M52	5/2-way valve, single solenoid/monostable	
D52	5/2-way valve, double solenoid/bistable, dominant signal	
P53U	5/3-way valve, mid-position pressurised	
P53E	5/3-way valve, mid-position exhausted	
P53C	5/3-way valve, mid-position closed	
005	Reset method for monostable/single solenoid valves	
	None	
A	Pneumatic spring	
M	Mechanical spring	
006	Pilot air	
	Internal	
Z	External	
007	Manual override	
	None	
D	Non-detenting, detenting	
H	Non-detenting	
008	Pneumatic connection	
A2	18 mm (02) ISO 15407-1/-2	
A1	26 mm (01) ISO 15407-1/-2	
D1	42 mm (1) ISO 5599-1/-2	
009	Nominal operating voltage	
	None	
1	24 V DC	
1A	24 V AC/50-60 Hz	
2A	110 V AC/50-60 Hz	
3A	230 V AC/50-60 Hz	
5	12 V DC	
010	Electrical connection	
B2	Connection pattern type B, industry standard	
C1	Plug pattern type C, to EN 175301-803	
P1	Interface for pilot valve size 15 mm to ISO 15218 (CNOMO)	
R3	Individual plug M12, to EN 61076-2-101	
011	Position sensing	
	None	
APC	Proximity sensor, PNP with open cable ends	
APP	Proximity sensor, PNP with M8 plug	
APX	Proximity sensor, PNP with cable and plug M12	
ANC	Proximity sensor, NPN with open cable end	
ANP	Proximity sensor, NPN with plug M8	


Type codes

001	Series	
VSPA	Standards-based valve to ISO 15407-1/-2	
002	Directional control valve type	
B	Sub-base valve	
003	Valve function	
T32U	2x3/2-way valve, normally open	
T32C	2x3/2-way valve, normally closed	
T32H	2x3/2-way valve, 1x normally closed, 1x normally open	
M52	5/2-way valve, single solenoid/monostable	
B52	5/2-way valve, double solenoid/bistable	
D52	5/2-way valve, double solenoid/bistable, dominant signal	
P53U	5/3-way valve, mid-position pressurised	
P53E	5/3-way valve, mid-position exhausted	
P53C	5/3-way valve, mid-position closed	

004	Reset method for monostable/single solenoid valves	
	None	
A	Pneumatic spring	
M	Mechanical spring	
005	Pneumatic connection	
A2	18 mm (02) ISO 15407-1/-2	
A1	26 mm (01) ISO 15407-1/-2	

Peripherals overview


Individual mounting

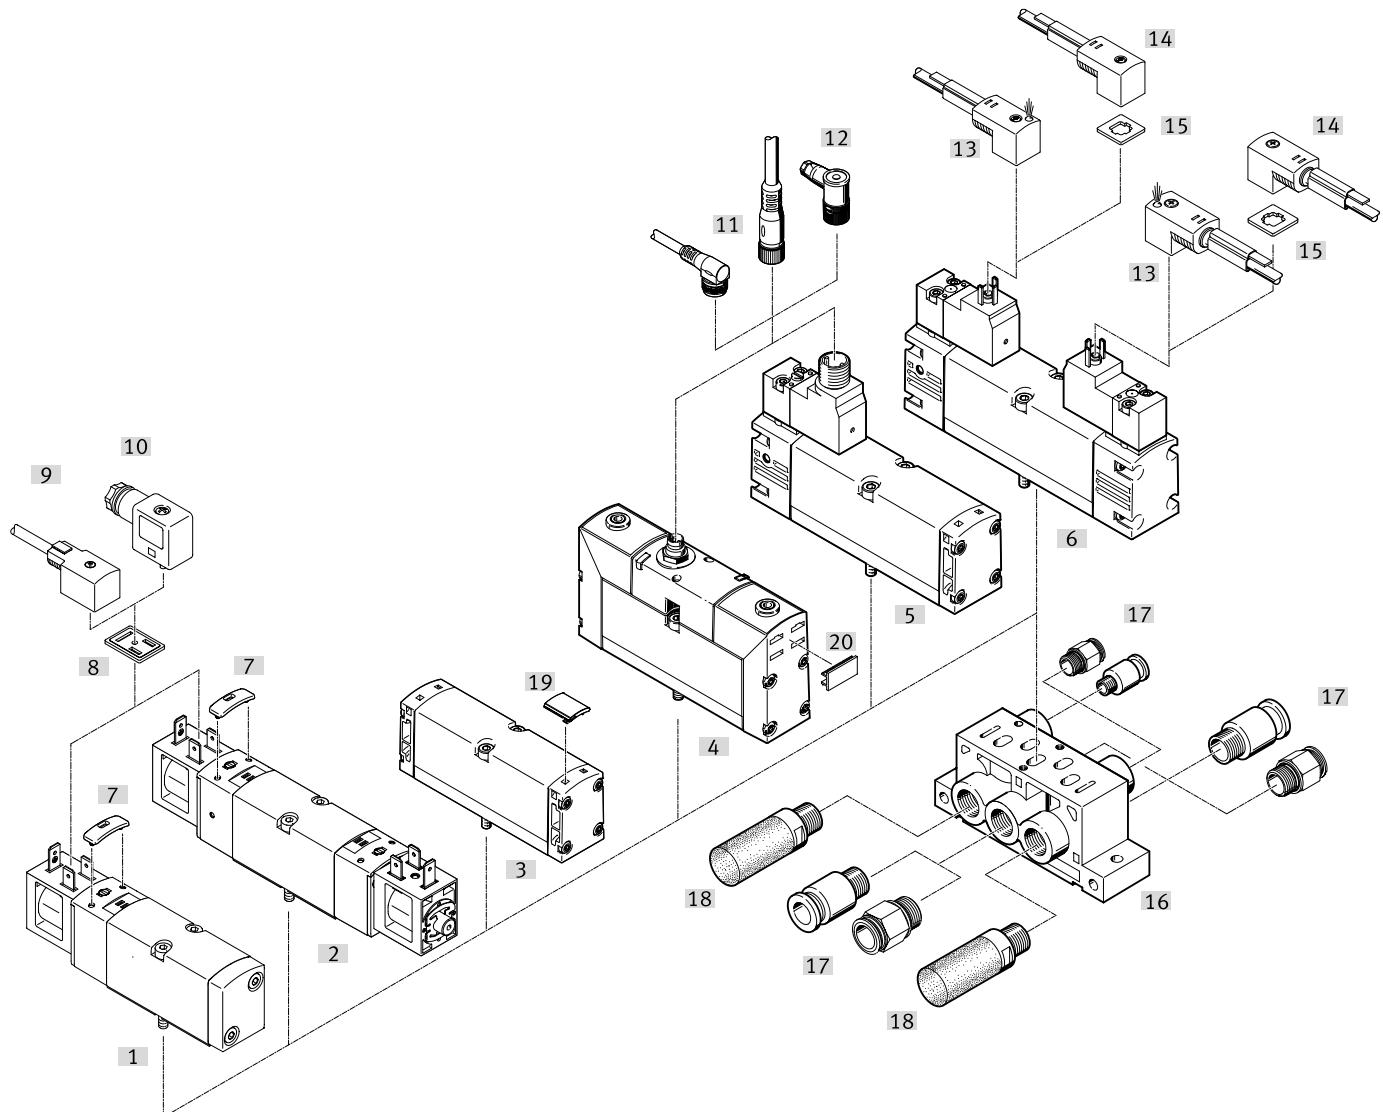

	Type	Brief description	→ Page/Internet	
[1]	Solenoid valve	VSVA-BK...B2	With square plug with plug pattern type B	45
[2]	Solenoid valve	VSVA-BK...B2	With square plug with plug pattern type B	45
[3]	Pneumatic valve	VSPA	Port pattern to ISO 15407-1	59
[4]	Solenoid valve	VSVA-...R	With round plug	49
[5]	Solenoid valve	VSVA-...R3	With interface to ISO 15218 with round plug	21
[6]	Solenoid valve	VSVA-...C	With interface to ISO 15218 and plug pattern type C	21
[7]	Cover cap	VAMC	For manual override, non-detenting or covered	83
[8]	Illuminating seal	MEB-LD	For indicating the signal status, with plug pattern type B	84
[9]	Connecting cable	KMF-1...-LED	With plug pattern type B	84
[10]	Plug socket	MSSD-F	With plug pattern type B	84
[11]	Connecting cable	NEBA	For valves with round plug	84
[12]	Plug socket	SIE-WD-TR	Angled	84
[13]	Connecting cable	KMEB...-LED	With plug pattern type C, with PVC casing and LED	84
[14]	Connecting cable	KMEB	With plug pattern type C, with PVC casing	84
[15]	Illuminating seal	MEB-LD	For indicating the signal status, with plug pattern type C	84
[16]	Individual sub-base	NAS	With lateral ports	71
[17]	Push-in fitting	QS	For standard O.D. tubing	83
[18]	Silencer	U	For fitting in exhaust ports	83
[19]	Inscription label holder	ASCF	For identifying the pneumatic valves VSPA	83
[20]	Inscription labels	IBS-9x20	For identifying the valves VSVA with round plug	83

Peripherals overview


Manifold assembly – Solenoid valves

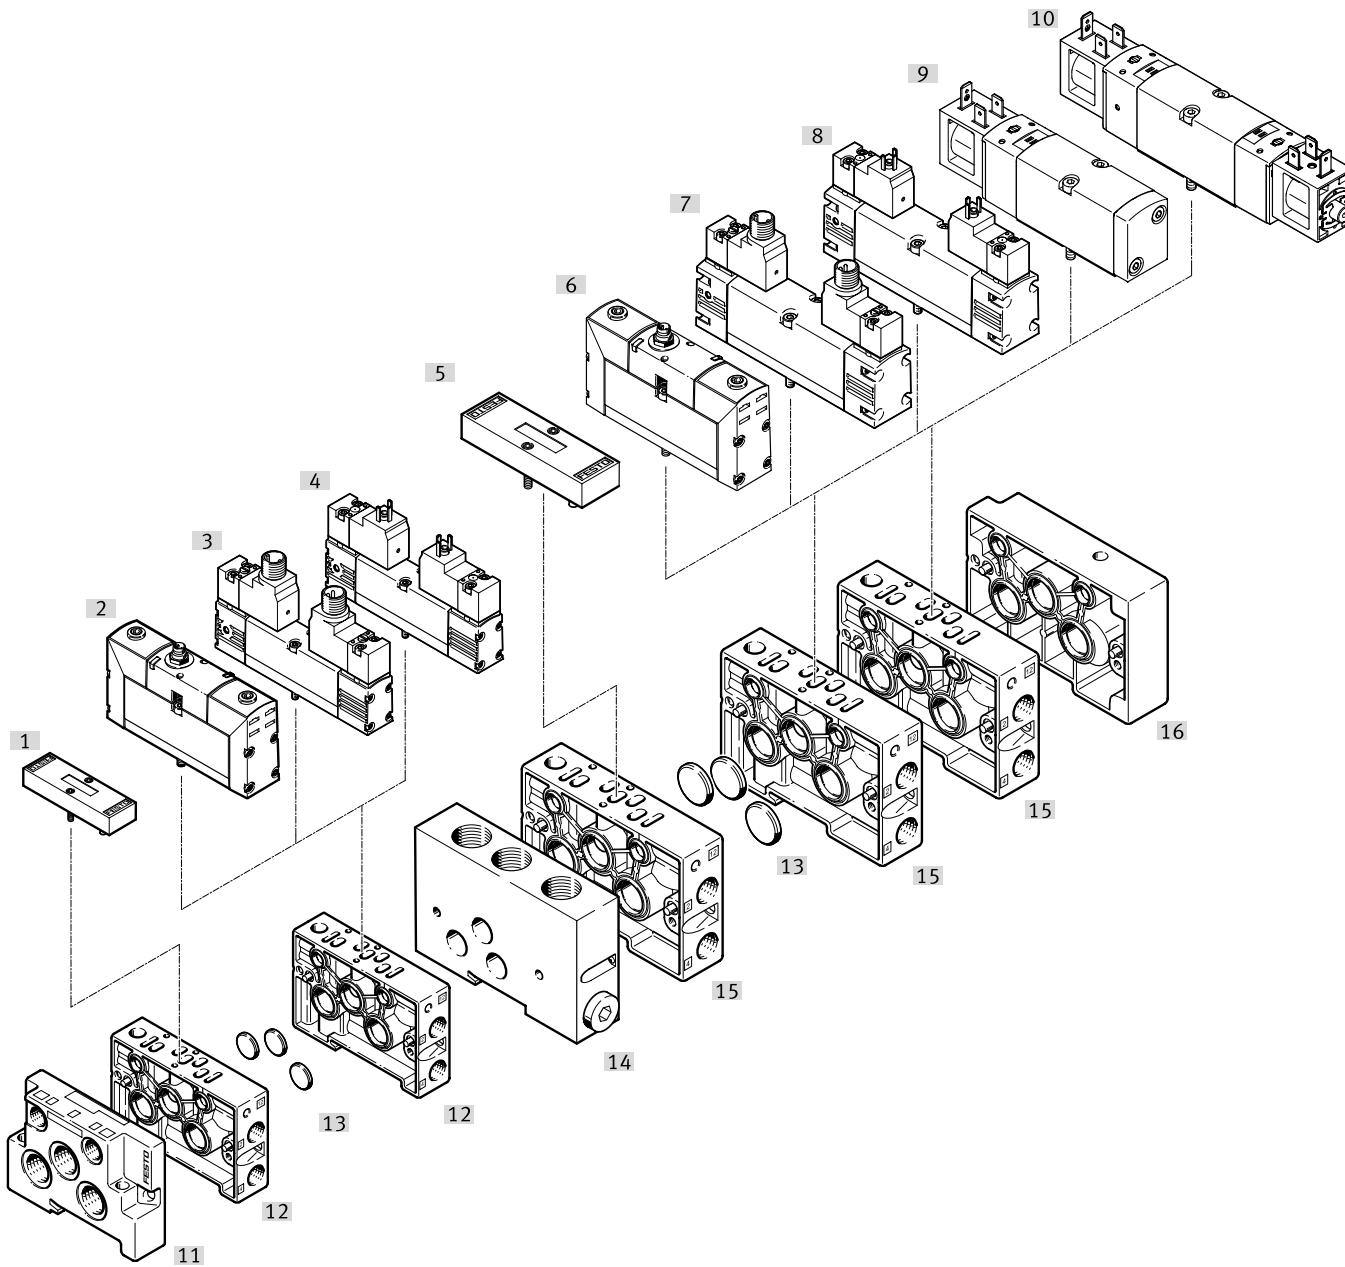

	Type	Brief description	→ Page/Internet
[1]	Cover plate	NDV-02-VDMA	For valve size 18 mm, vacant or spare position
[2]	Solenoid valve	VSPA...A2...R	Valve size 18 mm with round plug
[3]	Solenoid valve	VSPA...A2...R3	Valve size 18 mm, interface to ISO 15218 with round plug
[4]	Solenoid valve	VSPA...A2...C	Valve size 18 mm, interface to ISO 15218 with plug pattern type C
[5]	Cover plate	NDV-01-VDMA	For valve size 26 mm, vacant or spare position
[6]	Solenoid valve	VSPA...A1...R	Valve size 26 mm with round plug
[7]	Solenoid valve	VSPA...A1...R3	Valve size 26 mm, interface to ISO 15218 with round plug
[8]	Solenoid valve	VSPA...A1...C	Valve size 26 mm, interface to ISO 15218 with plug pattern type C
[9]	Solenoid valve	VSPA-BK...B2	Valve size 26 mm, with square plug with plug pattern type B
[10]	Solenoid valve	VSPA-BK...B2	Valve size 26 mm, with square plug with plug pattern type B
[11]	End plate	NEV	For sealing the manifold sub-bases valve size 18 mm
[12]	Manifold sub-base	NAW-1/8-02-VDMA	Valve size 18 mm with lateral ports 2 and 4
[13]	Isolating disc	NSC	For creating pressure zones or for sealing ports on the end plates
[14]	Intermediate plate	NZV-01/02-VDMA	For connecting valve size 18 mm with valve size 26 mm
[15]	Manifold sub-base	NAW-1/4-01-VDMA	Valve size 26 mm with lateral ports 2 and 4
[16]	End plate	NEV	For sealing the manifold sub-bases valve size 26 mm

Peripherals overview


Manifold assembly – Pneumatic valves

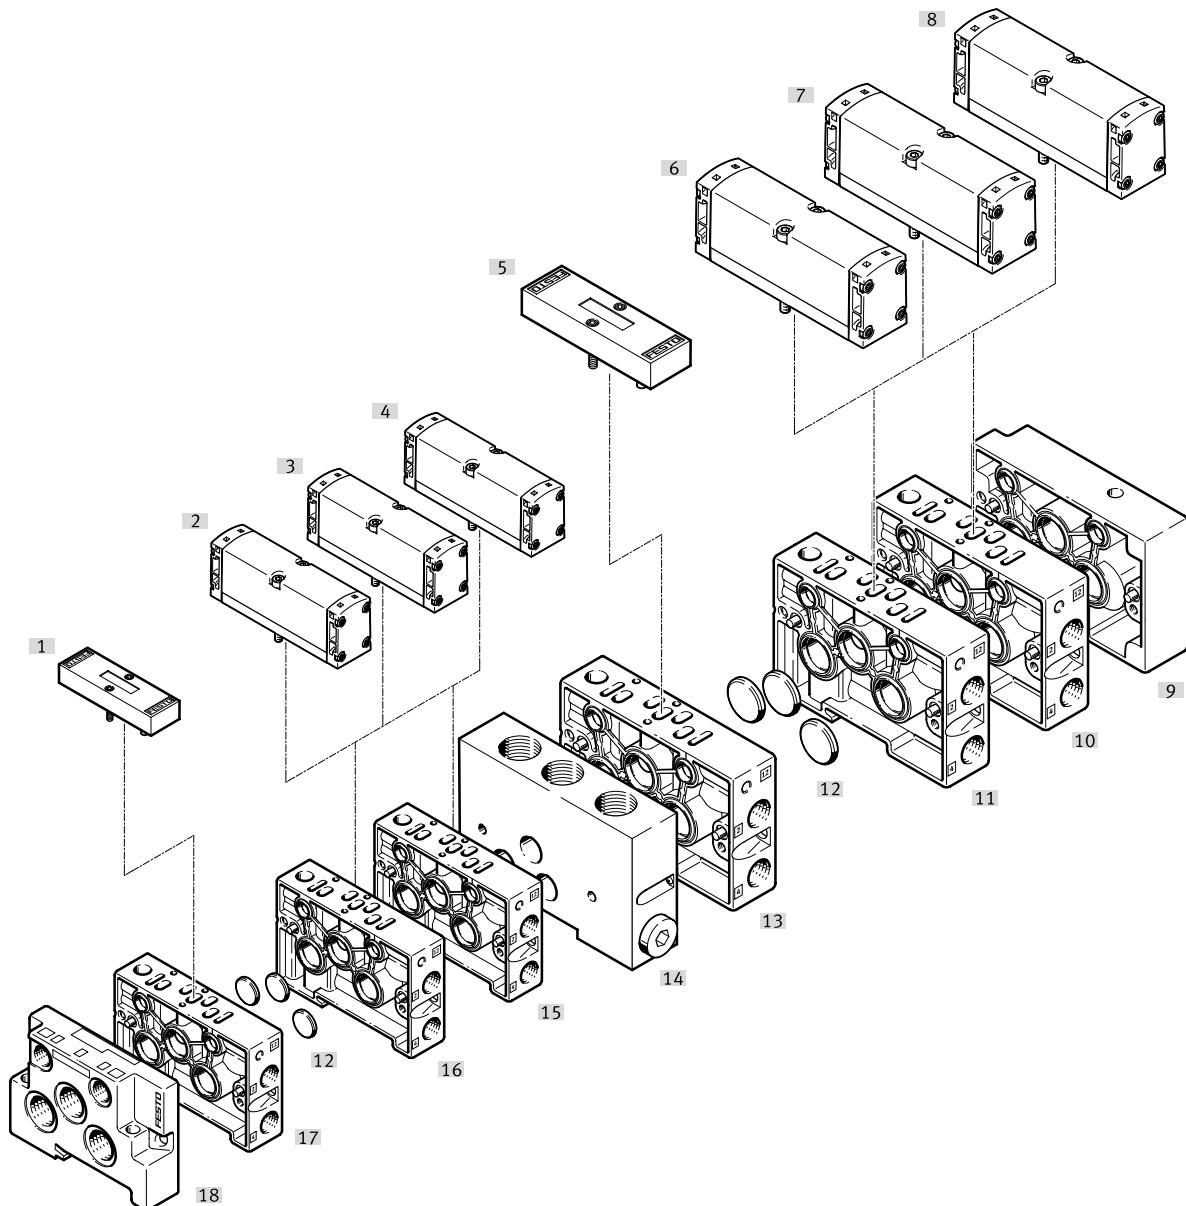

	Type	Brief description	→ Page/Internet
[1]	Cover plate	NDV-02-VDMA	For valve size 18, vacant or spare position
[2]	Pneumatic valve	VSPA...A2	Valve size 18
[3]			
[4]			
[5]	Cover plate	NDV-01-VDMA	For valve size 26, vacant or spare position
[6]	Pneumatic valve	VSPA...A1	Valve size 26
[7]			
[8]			
[9]	End plate	NEV	For sealing the manifold sub-bases valve size 26 mm
[10]	Manifold sub-base	NAW-1/4-01-VDMA	Valve size 26 with lateral ports 2 and 4
[11]			
[12]	Isolating disc	NSC	For creating pressure zones or for sealing ports on the end plates
[13]	Manifold sub-base	NAW-1/4-01-VDMA	Valve size 26 with lateral ports 2 and 4
[14]	Intermediate plate	NZV-01/02-VDMA	For connecting valve size 18 mm with valve size 26 mm
[15]	Manifold sub-base	NAW-1/8-02-VDMA	Valve size 18 with lateral ports 2 and 4
[16]			
[17]			
[18]	End plate	NEV	For sealing the manifold sub-bases valve size 18 mm

Peripherals overview

Manifold assembly with vertical stacking

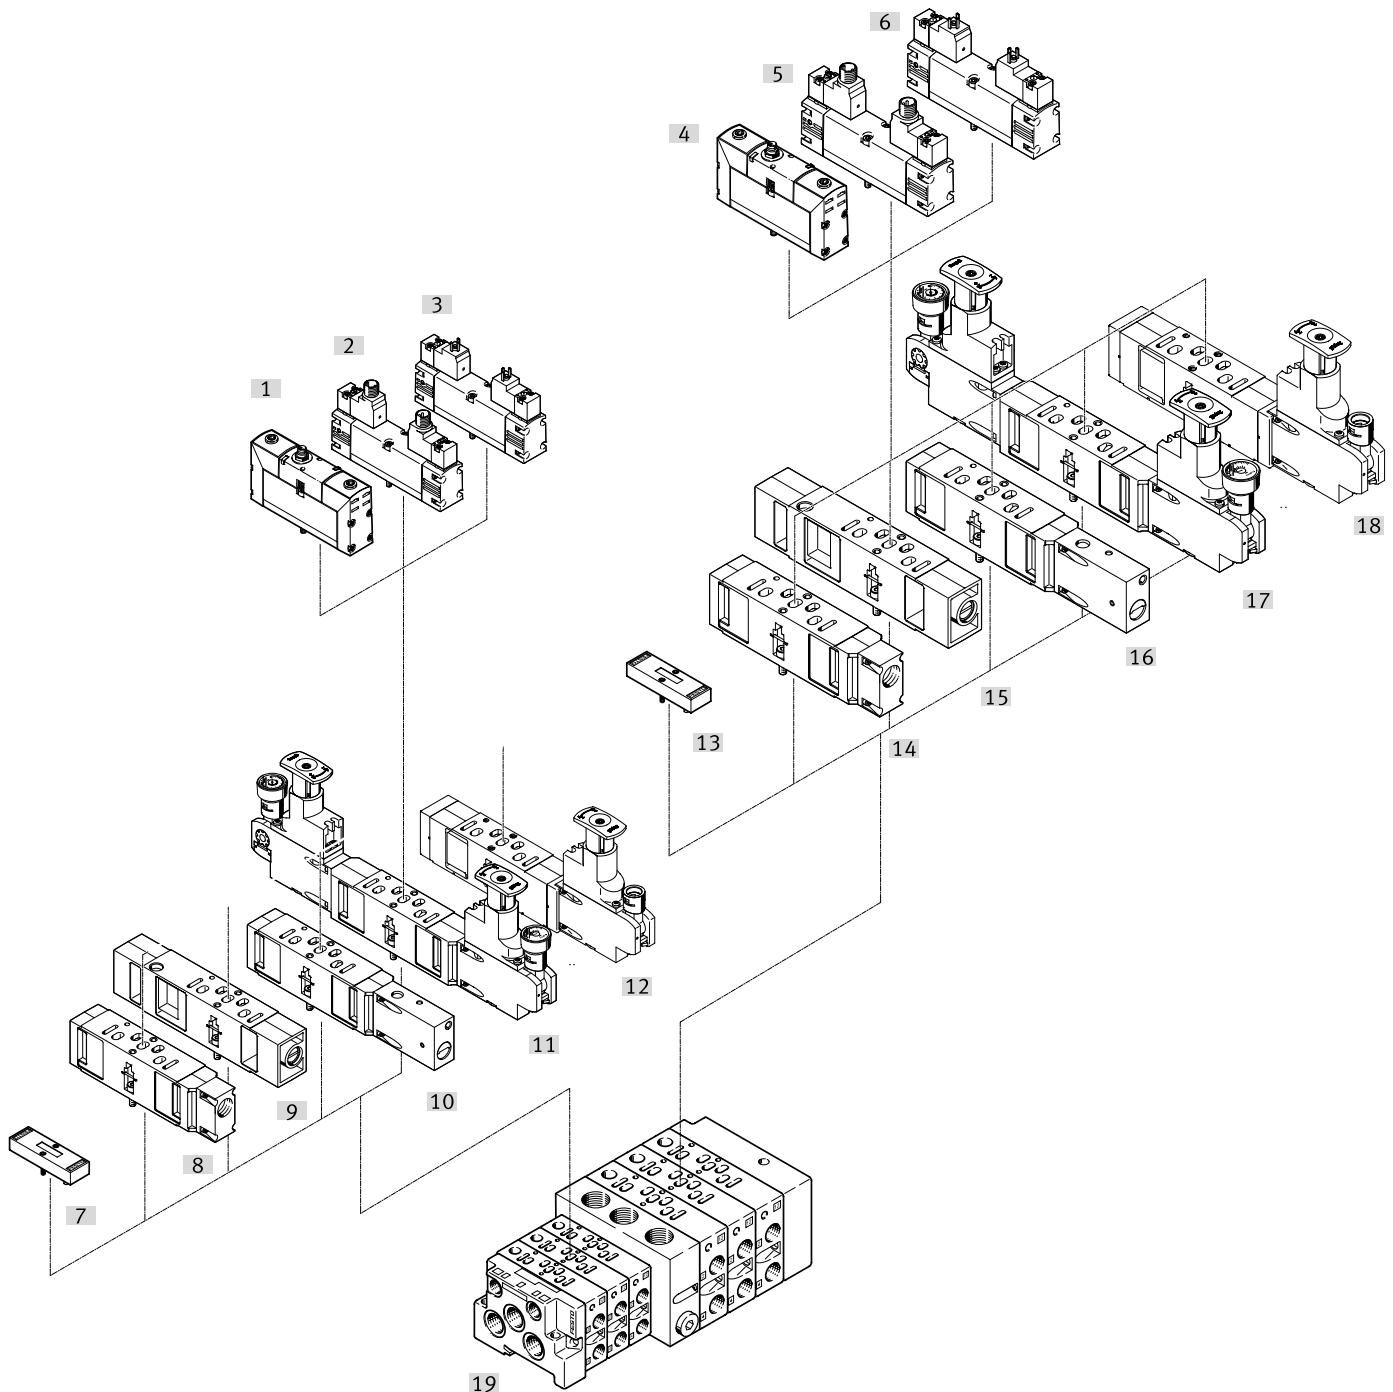


Peripherals overview

	Type	Brief description	→ Page/Internet
[1]	Solenoid valve	VSVA...A2...R	Valve size 18 mm with round plug
[2]	Solenoid valve	VSVA...A2...R3	Valve size 18 mm, interface to ISO 15218 with round plug
[3]	Solenoid valve	VSVA...A2...C	Valve size 18 mm, interface to ISO 15218 with plug pattern type C
[4]	Solenoid valve	VSVA...A1...R	Valve size 26 mm with round plug
[5]	Solenoid valve	VSVA...A1...R3	Valve size 26 mm, interface to ISO 15218 with round plug
[6]	Solenoid valve	VSVA...A1...C	Valve size 26 mm, interface to ISO 15218 with plug pattern type C
[7]	Cover plate	NDV	As vacant or spare position, for valve size 18 mm
[8]	Vertical supply plate	VABF...P1-A3	For intermediate air supply, for valve size 18 mm
[9]	Throttle plate	VABF...F1-B1	For flow control in ducts 3 and 5, for valve size 18 mm
[10]	Vertical pressure shut-off plate	VABF...L1-D1	With switch for manually shutting off duct 1, for valve size 18 mm
[11]	Regulator plate	VABF...R....C2	With 2 pressure regulators for working ports 2 and 4, for valve size 18 mm
[12]	Regulator plate	VABF...R....C2	With one pressure regulator for working ports 2 or 4 or for duct 1, for valve size 18 mm
[13]	Cover plate	NDV	As vacant or spare position, for valve size 26 mm
[14]	Vertical supply plate	VABF...P1-A3	For intermediate air supply, for valve size 26 mm
[15]	Throttle plate	VABF...F1-B1	For flow control in ducts 3 and 5, for valve size 26 mm
[16]	Vertical pressure shut-off plate	VABF...L1-D1	With switch for manually shutting off duct 1, for valve size 26 mm
[17]	Regulator plate	VABF...R....C2	With 2 pressure regulators for working ports 2 and 4, for valve size 26 mm
[18]	Regulator plate	VABF...R....C2	With one pressure regulator for working ports 2 or 4 or for duct 1, for valve size 26 mm
[19]	Valve manifold assembly	VTIA	Combination of manifold sub-bases, isolating disc, intermediate plate, end plates

Peripherals overview

manifold assembly

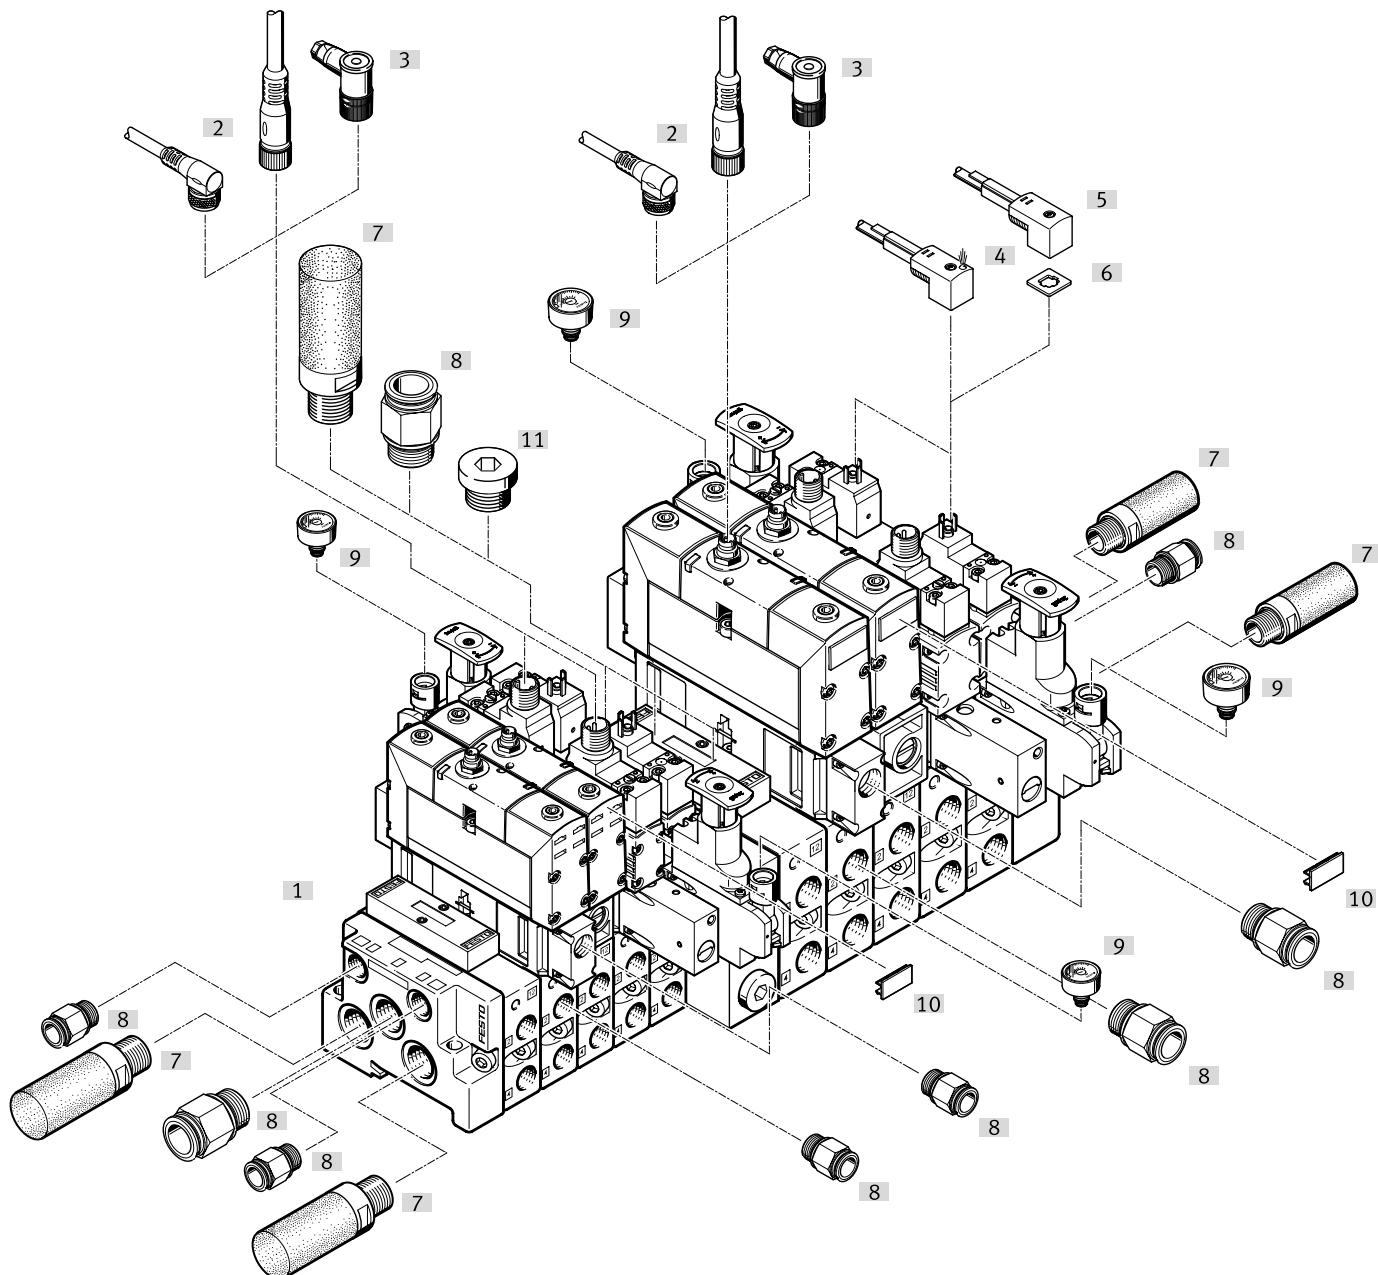


	Type	Brief description	→ Page/Internet
[1]	Valve manifold assembly	VTIA Combination of manifold sub-bases, isolating disc, intermediate plate, end plates, valves, vertical interlinking	–
[2]	Connecting cable	NEBA For valves with round plug	84
[3]	Plug socket	SIE-WD-TR Angled	84
[4]	Connecting cable	KMEB...-LED With PVC casing and LED	84
[5]	Connecting cable	KMEB With PVC casing	84
[6]	Illuminating seal	MEB-LD For displaying the signal status	84
[7]	Silencer	U For fitting in exhaust ports	83
[8]	Push-in fitting	QS For standard O.D. tubing	83
[9]	Pressure gauge	PAGN-26-10-P10 Can be connected to the pressure regulator plate	83
[10]	Inscription labels	IBS-9x20 For identifying the valves VSVA with round plug	83
[11]	Blanking plug	B For sealing ports that are not required	83

Datasheet – Valve size 18 mm

-  - Flow rate
max. 750 l/min

-  - Voltage
12, 24 V DC
24, 110, 230 V AC

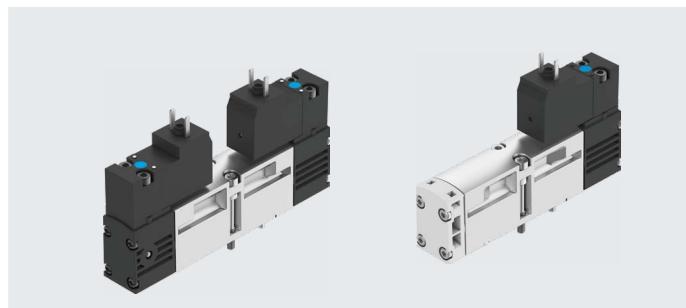

General technical data	2x 2/2-way valve	2x 3/2-way valve	5/2-way valve	5/3-way valve		
Valve function						
Normal position	C ¹⁾	C ¹⁾ , U ²⁾ , H ⁴⁾ , N ⁵⁾ , F ⁶⁾ , W ⁷⁾	–	–		
Stable position	Monostable	Monostable	Monostable	Bistable		
Pneumatic spring return	Yes	Yes	Yes	–		
Mechanical spring return	No	No	Yes	–		
Design	Piston spool					
Overlap	Positive overlap					
Sealing principle	Soft					
Actuation type	Electrical					
Type of control	Piloted					
Pilot interface	To ISO 15218					
Pilot air supply	Internal or external					
Pilot air supply, exhaust air	Not ducted as per standard, or ducted					
Flow direction	Not reversible or reversible	Not reversible or only reversible	Reversible with external pilot air supply			
Exhaust air function	Can be throttled					
Manual override	Non-detenting, non-detenting/detenting					
Type of mounting	On sub-base					
Mounting position	Any					
Nominal width	[mm]	5				
Valve size	[mm]	18				
Ports on the sub-base	1, 2, 3, 4, 5 12, 14	G1/8 M5				
Tightening torque for valve mounting	[Nm]	0.9 ... 1.1				
Product weight	Without pilot valve [g] Solenoid valve [g]	98 174	98 174	89 127	98 174	98 174
Noise level	[dB (A)]	85				
Conforms to standard		ISO 15407-1, VDMA 24563 and for pilot valve interface ISO 15218				

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open

5) N=Normally closed, reverse operation, i.e. the pressure supply ports are 3 and 5, exhausting is via port 1

6) F=Normally open, reverse operation, i.e. the pressure supply ports are 3 and 5, exhausting is via port 1

7) W=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open,

reverse operation, i.e. the pressure supply ports are 3 and 5, exhausting is via port 1

Flow rates	2x 2/2-way valve	2x 3/2-way valve	5/2-way valve	5/3-way valve
Valve function				
Flow rate of valve [l/min]	700	600	750	650
Flow rate of valve on individual sub-base [l/min]	450	450	550	500
Flow rate of pneumatically linked valve [l/min]	500	400	550	450
Standard nominal flow rate [l/min]	500	400	550	450

Datasheet – Valve size 18 mm

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 2/2-way valve		13	21	–	–
2x 3/2-way valve		13	21	–	–
2x 3/2-way valve, reversible		21	13	–	–
5/2-way valve, single solenoid	Pneumatic spring	21	19	–	–
	Mechanical spring	17	35	–	–
5/2-way valve, double solenoid		–	–	18	25
5/3-way valve		18	30	20	–

Safety characteristics					
Type	VSVA-...-1C1	VSVA-...-P1	VSVA-...-5C1	VSVA-...-2AC1	VSVA-...-3AC1
Max. positive test pulse with logic 0 [μs]	1800	–	–	–	–
Max. negative test pulse with logic 1 [μs]	800	–	–	–	–
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27				
Vibration resistant	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6				

Operating and environmental conditions					
Type	VSVA-...-1C1	VSVA-...-P1	VSVA-...-5C1	VSVA-...-2AC1	VSVA-...-3AC1
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)				
Ambient temperature [°C]	–5 ... +50				
Temperature of medium [°C]	–5 ... +50				
Relative humidity [%]	0 ... 90				
CE marking (see declaration of conformity) ¹⁾	–	–	–	–	To EU Low Voltage Directive
UKCA marking (see declaration of conformity) ¹⁾	–	–	–	–	To UK EMC regulations
Certification ²⁾	c UL us - Recognized (OL)	c UL us - Recognized (OL)	–	–	–

1) For information about the area of use, see the declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Datasheet – Valve size 18 mm

Operating and control pressure			2x 2/2-way valve	2x 3/2-way valve	2x 3/2-way valve, reverse operation
Valve function					
Operating pressure	Internal pilot air supply	[MPa]	0.2 ... 1	0.2 ... 1	0.2 ... 1
		[bar]	2 ... 10	2 ... 10	2 ... 10
	External pilot air supply	[MPa]	0.2 ... 1	0.2 ... 1	-0.09 ... 1
		[bar]	2 ... 10	2 ... 10	-0.9 ... 10
Pilot pressure ¹⁾	[MPa]	0.3 ... 1	0.3 ... 1	0.3 ... 1	
	[bar]	3 ... 10	3 ... 10	3 ... 10	

1) Pilot pressure dependent on operating pressure → graph



Operating and control pressure			5/2-way valve	5/3-way valve
Valve function		Pneumatic spring	Mechanical spring	
Operating pressure	Internal pilot air supply	[MPa]	0.2 ... 1	0.3 ... 1
		[bar]	2 ... 10	3 ... 10
	External pilot air supply	[MPa]	-0.09 ... 1	-0.09 ... 1
		[bar]	-0.9 ... 10	-0.9 ... 10
Pilot pressure ¹⁾	[MPa]	0.3 ... 1	0.3 ... 1	0.3 ... 1
	[bar]	3 ... 10	3 ... 10	3 ... 10

1) Pilot pressure dependent on operating pressure → graph

Minimum pilot pressure p12, p14 as a function of operating pressure p1 (external pilot air supply)

2x 3/2-way valve and 2/2-way valve

5/2-way valve and 5/3-way valve

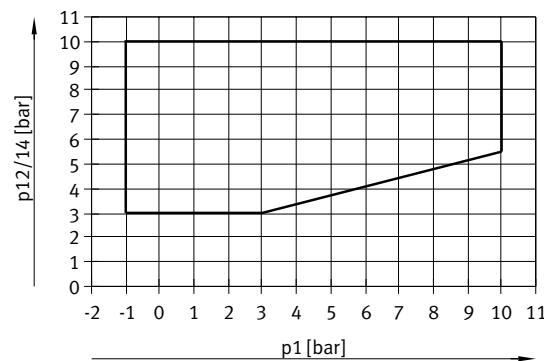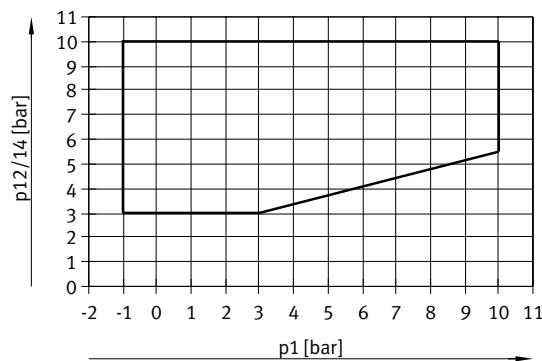

Electrical data

Electrical connection		Plug, square design to EN 175301-803, type C, 110 V/230 V AC with protective earth conductor	Plug M12, round design
Operating voltage	DC voltage	[V DC]	12, 24 +10%/-15%
	Alternating voltage	[V AC]	24, 110, 230 +10%/-15%
Characteristic coil data	DC voltage	[W]	1.8
	Alternating voltage	[VA]	At 24 V AC: • 3.1 pick-up power • 2.3 holding power
Duty cycle	[%]	100	At 110 V AC and 230 V AC: • 2.9 pick-up power • 2.1 holding power
Protection rating to EN 60529		IP65, Nema 4 (in combination with plug socket)	

Materials


Housing	Die-cast aluminium
Seals	HNBR, NBR
Screws	Galvanised steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet – Valve size 18 mm

Dimensions

Download CAD data → www.festo.com

5/2-way valve, single solenoid with plug type C

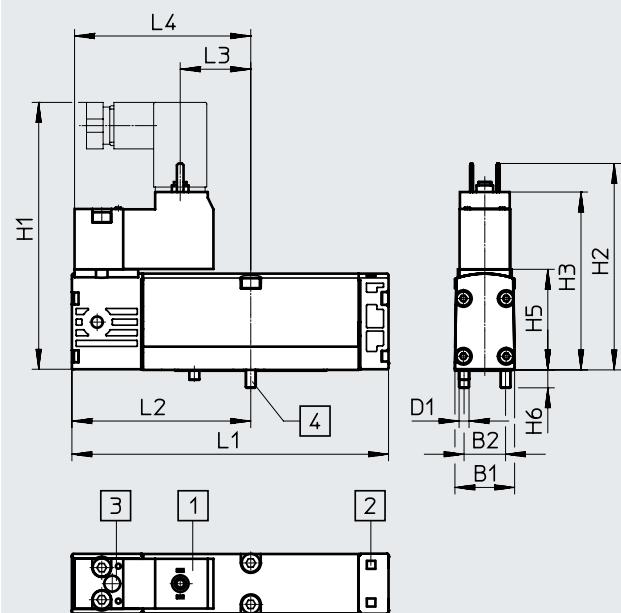


- [1] Connection sizes and connection for power supply to EN 175301-803, type C
- [2] Slot for inscription label
- [3] Manual override
- [4] Captive retaining screws

Type	B1	B2	D1	H1	H2	H3	H5	H6	L1	L2	L3	L4
VSVA-B-M52...C1	18	12.5	M3	80.6	62.2	53.6	30.3	5.4	95.4	53.9	21.3	53.1

Dimensions

Download CAD data → www.festo.com

5/2-way valve, single solenoid with M12 plug

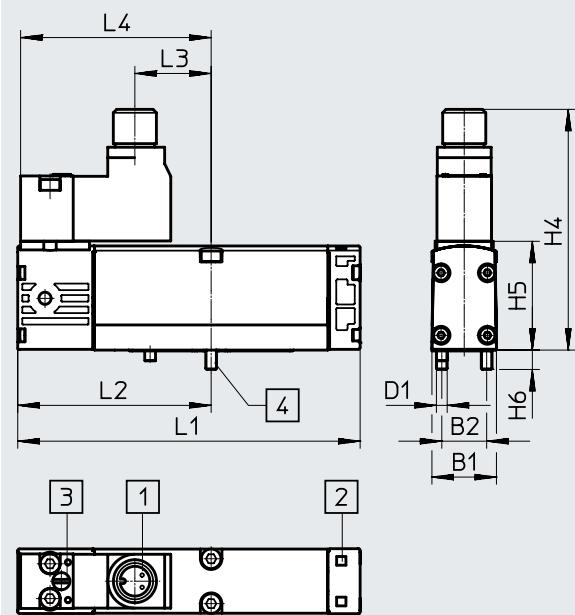

- [1] Connection sizes and connection for power supply, M12 plug
- [2] Slot for inscription label
- [3] Manual override
- [4] Captive retaining screws


Type	B1	B2	D1	H4	H5	H6	L1	L2	L3	L4
VSVA-B-M52...R3	18	12.5	M3	67	30.3	5.4	95.4	53.9	21.3	53.1

Datasheet – Valve size 18 mm

Dimensions

Download CAD data → www.festo.com

2x 2/2-way valve, 2x 3/2-way valve, 5/2-way valve double solenoid, 5/3-way valve

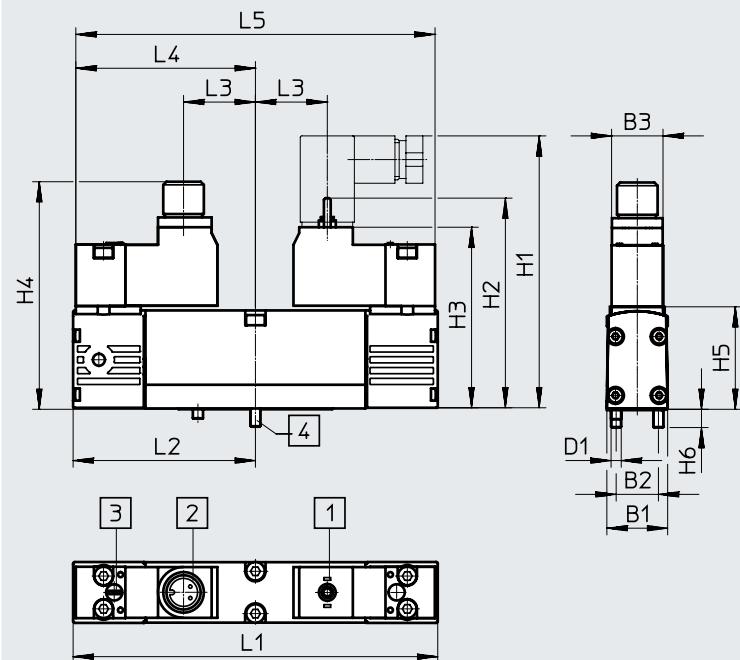

- [1] Connection sizes and connection for power supply to EN 175301-803, type C
- [2] Connection sizes and connection for power supply, M12 plug
- [3] Manual override
- [4] Captive retaining screws


Type	B1	B2	B3	D1	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5
VSVA-B-T22C	18	12.5	15.2	M3	80.6	62.2	53.6	67	30.3	5.4	107.8	53.9	21.3	53.1	102.2
VSVA-B-T32															
VSVA-B-B52															
VSVA-B-D52															
VSVA-B-P53															

Datasheet – Valve size 18 mm

Dimensions

Pilot valve with plug type C, VSCS-...C1

Download CAD data → www.festo.com

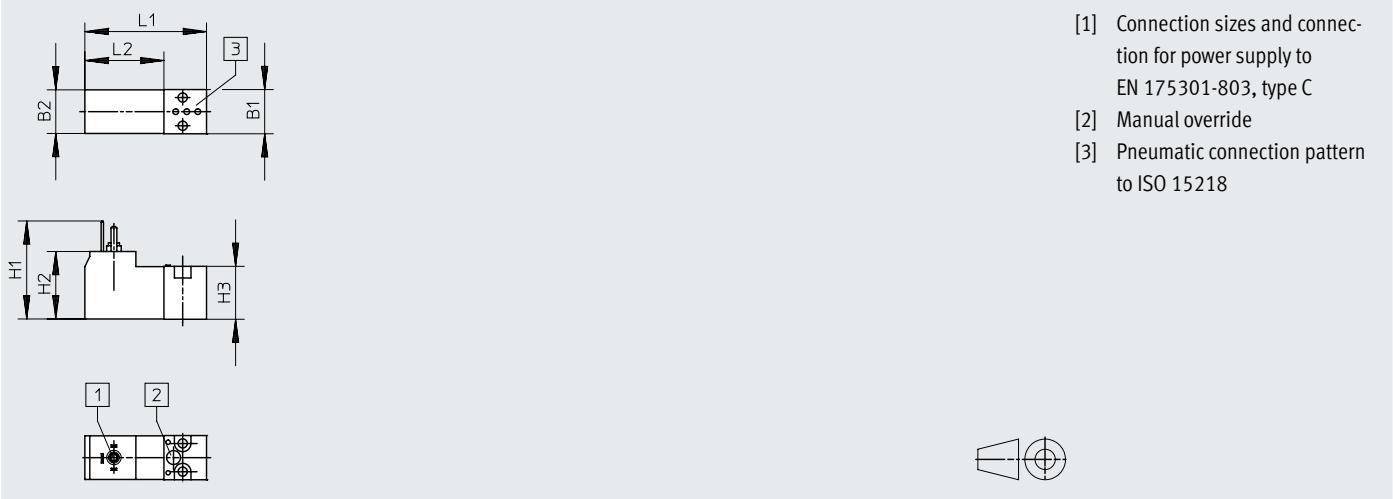


Type	B1	B2	D1	H1	H2	H3	L1	L2
VSCS-...C1	15.2	15	-	33.7	10.5	18.2	41.9	14.7

Dimensions







Pilot valve with M12 plug, VSCS-...R3

Download CAD data → www.festo.com

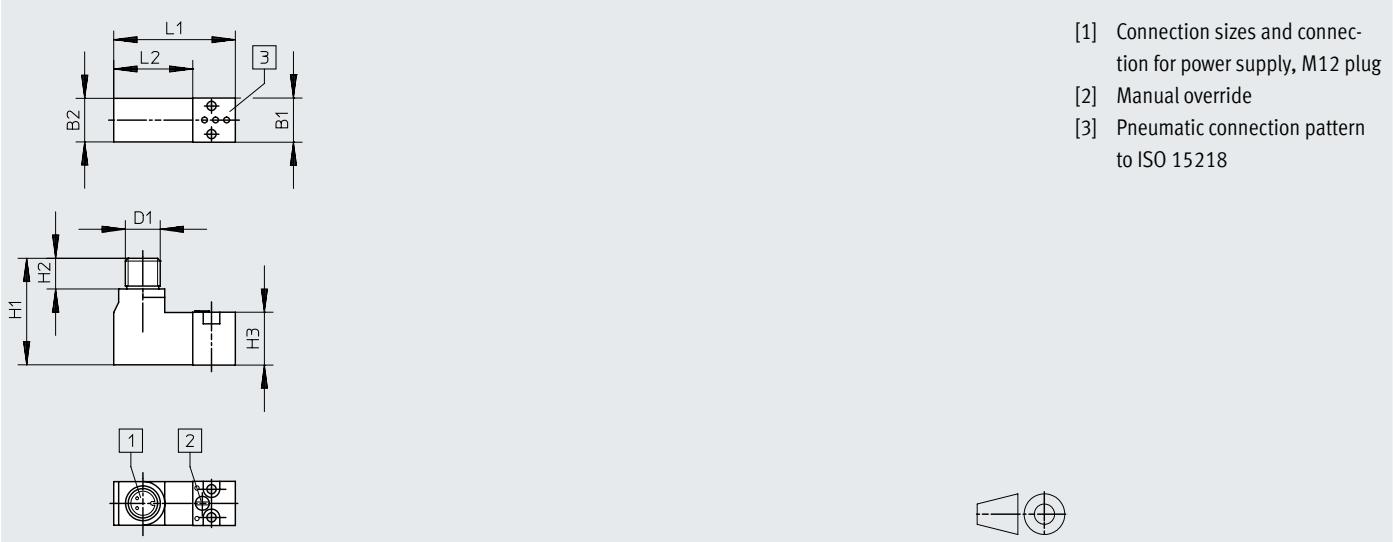

Type	B1	B2	D1	H1	H2	H3	L1	L2
VSCS-...R3	15.2	15	M12	36.7	10.6	18.2	41.9	27.2

Datasheet – Valve size 18 mm

Ordering data – Pilot control fitted			Part no.	Type
Code	Circuit symbol			
2x 2/2-way solenoid valve				
T22C	–	Order via online configurator	–	–
2x 3/2-way solenoid valve, with pilot control with square plug, type C to EN 175301-803				
K		Normal position: 2x normally closed	Internal pilot air supply	24 V DC 12 V DC 230 V AC 110 V AC 24 V AC
N		Normal position: 2x normally open	Internal pilot air supply	24 V DC 12 V DC 230 V AC 110 V AC 24 V AC
H		Normal position: 1x normally closed 1x normally open	Internal pilot air supply	24 V DC 12 V DC 230 V AC 110 V AC 24 V AC
K		Normal position: 2x normally closed	External pilot air supply	24 V DC 12 V DC 230 V AC 110 V AC 24 V AC
N		Normal position: 2x normally open	External pilot air supply	24 V DC 12 V DC 230 V AC 110 V AC 24 V AC
H		Normal position: 1x normally closed 1x normally open	External pilot air supply	24 V DC 12 V DC 230 V AC 110 V AC 24 V AC

Solenoid valves VSVA, with pilot interface to ISO 15218

Datasheet – Valve size 18 mm




Ordering data – Pilot control fitted						
Code	Circuit symbol			Part no.	Type	
5/2-way valve, single solenoid, with pilot control with square plug, type C to EN 175301-803						
M		Pneumatic spring	Internal pilot air supply	24 V DC	546701	VSVA-B-M52-AH-A2-1C1
				12 V DC	547139	VSVA-B-M52-AH-A2-5C1
				230 V AC	547219	VSVA-B-M52-AH-A2-3AC1
				110 V AC	547179	VSVA-B-M52-AH-A2-2AC1
				24 V AC	547099	VSVA-B-M52-AH-A2-1AC1
0		Mechanical spring	Internal pilot air supply	24 V DC	546703	VSVA-B-M52-MH-A2-1C1
				12 V DC	547141	VSVA-B-M52-MH-A2-5C1
				230 V AC	547221	VSVA-B-M52-MH-A2-3AC1
				110 V AC	547181	VSVA-B-M52-MH-A2-2AC1
				24 V AC	547101	VSVA-B-M52-MH-A2-1AC1
M		Pneumatic spring	External pilot air supply	24 V DC	547079	VSVA-B-M52-AZH-A2-1C1
				12 V DC	547159	VSVA-B-M52-AZH-A2-5C1
				230 V AC	547239	VSVA-B-M52-AZH-A2-3AC1
				110 V AC	547199	VSVA-B-M52-AZH-A2-2AC1
				24 V AC	547119	VSVA-B-M52-AZH-A2-1AC1
0		Mechanical spring	External pilot air supply	24 V DC	547081	VSVA-B-M52-MZH-A2-1C1
				12 V DC	547161	VSVA-B-M52-MZH-A2-5C1
				230 V AC	547241	VSVA-B-M52-MZH-A2-3AC1
				110 V AC	547201	VSVA-B-M52-MZH-A2-2AC1
				24 V AC	547121	VSVA-B-M52-MZH-A2-1AC1
5/2-way valve, double solenoid, with pilot control with square plug, type C to EN 175301-803						
J		Dominant 1st signal	Internal pilot air supply	24 V DC	546697	VSVA-B-B52-H-A2-1C1
				12 V DC	547135	VSVA-B-B52-H-A2-5C1
				230 V AC	547215	VSVA-B-B52-H-A2-3AC1
				110 V AC	547175	VSVA-B-B52-H-A2-2AC1
				24 V AC	547095	VSVA-B-B52-H-A2-1AC1
D		Dominant at 14	Internal pilot air supply	24 V DC	546699	VSVA-B-D52-H-A2-1C1
				12 V DC	547137	VSVA-B-D52-H-A2-5C1
				230 V AC	547217	VSVA-B-D52-H-A2-3AC1
				110 V AC	547177	VSVA-B-D52-H-A2-2AC1
				24 V AC	547097	VSVA-B-D52-H-A2-1AC1
J		Dominant 1st signal	External pilot air supply	24 V DC	547075	VSVA-B-B52-ZH-A2-1C1
				12 V DC	547155	VSVA-B-B52-ZH-A2-5C1
				230 V AC	547235	VSVA-B-B52-ZH-A2-3AC1
				110 V AC	547195	VSVA-B-B52-ZH-A2-2AC1
				24 V AC	547115	VSVA-B-B52-ZH-A2-1AC1
D		Dominant at 14	External pilot air supply	24 V DC	547077	VSVA-B-D52-ZH-A2-1C1
				12 V DC	547157	VSVA-B-D52-ZH-A2-5C1
				230 V AC	547237	VSVA-B-D52-ZH-A2-3AC1
				110 V AC	547197	VSVA-B-D52-ZH-A2-2AC1
				24 V AC	547117	VSVA-B-D52-ZH-A2-1AC1

Datasheet – Valve size 18 mm

Ordering data – Pilot control fitted			Code	Circuit symbol	Part no.	Type
5/3-way solenoid valve, with pilot control with square plug, type C to EN 175301-803						
G		Normal position: Closed	Internal pilot air supply	24 V DC	546709	VSVA-B-P53C-H-A2-1C1
				12 V DC	547147	VSVA-B-P53C-H-A2-5C1
				230 V AC	547227	VSVA-B-P53C-H-A2-3AC1
				110 V AC	547187	VSVA-B-P53C-H-A2-2AC1
				24 V AC	547107	VSVA-B-P53C-H-A2-1AC1
B		Normal position: Open	Internal pilot air supply	24 V DC	546705	VSVA-B-P53U-H-A2-1C1
				12 V DC	547143	VSVA-B-P53U-H-A2-5C1
				230 V AC	547223	VSVA-B-P53U-H-A2-3AC1
				110 V AC	547183	VSVA-B-P53U-H-A2-2AC1
				24 V AC	547103	VSVA-B-P53U-H-A2-1AC1
E		Normal position: Exhausted	Internal pilot air supply	24 V DC	546707	VSVA-B-P53E-H-A2-1C1
				12 V DC	547145	VSVA-B-P53E-H-A2-5C1
				230 V AC	547225	VSVA-B-P53E-H-A2-3AC1
				110 V AC	547185	VSVA-B-P53E-H-A2-2AC1
				24 V AC	547105	VSVA-B-P53E-H-A2-1AC1
G		Normal position: Closed	External pilot air supply	24 V DC	547087	VSVA-B-P53C-ZH-A2-1C1
				12 V DC	547167	VSVA-B-P53C-ZH-A2-5C1
				230 V AC	547247	VSVA-B-P53C-ZH-A2-3AC1
				110 V AC	547207	VSVA-B-P53C-ZH-A2-2AC1
				24 V AC	547127	VSVA-B-P53C-ZH-A2-1AC1
B		Normal position: Open	External pilot air supply	24 V DC	547083	VSVA-B-P53U-ZH-A2-1C1
				12 V DC	547163	VSVA-B-P53U-ZH-A2-5C1
				230 V AC	547243	VSVA-B-P53U-ZH-A2-3AC1
				110 V AC	547203	VSVA-B-P53U-ZH-A2-2AC1
				24 V AC	547123	VSVA-B-P53U-ZH-A2-1AC1
E		Normal position: Exhausted	External pilot air supply	24 V DC	547085	VSVA-B-P53E-ZH-A2-1C1
				12 V DC	547165	VSVA-B-P53E-ZH-A2-5C1
				230 V AC	547245	VSVA-B-P53E-ZH-A2-3AC1
				110 V AC	547205	VSVA-B-P53E-ZH-A2-2AC1
				24 V AC	547125	VSVA-B-P53E-ZH-A2-1AC1

Solenoid valves VSVA, with pilot interface to ISO 15218


Datasheet – Valve size 18 mm

Ordering data – Pilot control separate		Part no.	Type		
2x 3/2-way valve without pilot valves					
	Internal pilot air supply	2x normally closed	546732	VSVA-B-T32C-A-A2-P1	
		2x normally open	546734	VSVA-B-T32U-A-A2-P1	
5/2-way single solenoid valve without pilot valve					
	Internal pilot air supply	Pneumatic spring	546740	VSVA-B-M52-A-A2-P1	
		Mechanical spring	546742	VSVA-B-M52-M-A2-P1	
5/2-way double solenoid valve without pilot valve					
	Internal pilot air supply	Dominant 1st signal	546736	VSVA-B-B52-A2-P1	
		Dominant at 14	546738	VSVA-B-D52-A2-P1	
5/3-way mid-position valve without pilot valves					
	Internal pilot air supply	Normally closed	546748	VSVA-B-P53C-A2-P1	
		Normally open	546744	VSVA-B-P53U-A2-P1	
		Normally exhausted	546746	VSVA-B-P53E-A2-P1	
Pilot valve to ISO 15218					
	Square plug, type C to EN 175301-803	12 V DC	Non-detenting manual override	546257	VSCS-B-M32-MH-WA-5C1
			Manual override non-detenting/detenting	571062	VSCS-B-M32-MD-WA-5C1
		24 V DC	Non-detenting manual override	546256	VSCS-B-M32-MH-WA-1C1
			Manual override non-detenting/detenting	571061	VSCS-B-M32-MD-WA-1C1
		24 V AC	Non-detenting manual override	546258	VSCS-B-M32-MH-WA-1AC1
			Manual override non-detenting/detenting	571063	VSCS-B-M32-MD-WA-1AC1
	Square plug, type C to EN 175301-803, With PE conductor	110 V AC	Non-detenting manual override	546259	VSCS-B-M32-MH-WA-2AC1
			Manual override non-detenting/detenting	571064	VSCS-B-M32-MD-WA-2AC1
		230 V AC	Non-detenting manual override	546260	VSCS-B-M32-MH-WA-3AC1
			Manual override non-detenting/detenting	571065	VSCS-B-M32-MD-WA-3AC1
	Round plug M12 to IEC 61076-2-101	24 V DC	Non-detenting manual override	573214	VSCS-B-M32-MH-WA-1R3
			Manual override non-detenting/detenting	573215	VSCS-B-M32-MD-WA-1R3

Datasheet – Valve size 26 mm

-  - Flow rate
max. 1400 l/min

-  - Voltage
12, 24 V DC
24, 110, 230 V AC

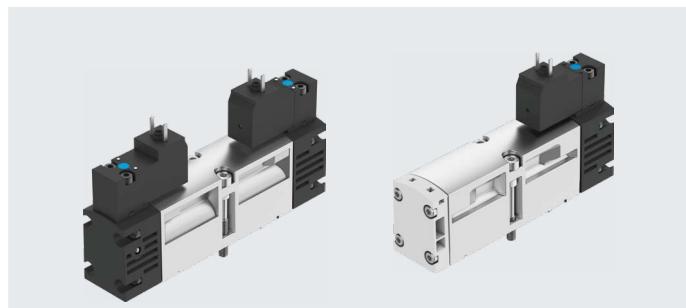

General technical data		2x 2/2-way valve	2x 3/2-way valve	5/2-way valve		5/3-way valve
Valve function				–	–	C ¹⁾ , U ²⁾ , E ³⁾
Normal position		C ¹⁾	C ¹⁾ , U ²⁾ , H ⁴⁾ , N ⁵⁾ , F ⁶⁾ , W ⁷⁾	–	–	C ¹⁾ , U ²⁾ , E ³⁾
Stable position		Monostable	Monostable	Monostable	Bistable	Monostable
Pneumatic spring return	Yes	Yes	Yes	Yes	–	No
Mechanical spring return	No	No	No	Yes	–	Yes
Design	Piston spool					
Overlap	Positive overlap					
Sealing principle	Soft					
Actuation type	Electrical					
Type of control	Piloted					
Pilot interface	To ISO 15218					
Pilot air supply	Internal or external					
Pilot air supply, exhaust air	Not ducted as per standard, or ducted					
Flow direction	Not reversible or reversible	Not reversible or only reversible		Reversible with external pilot air supply		
Exhaust air function	Can be throttled					
Manual override	Non-detenting, non-detenting/detenting					
Type of mounting	On sub-base					
Mounting position	Any					
Nominal width	[mm]	9				
Valve size	[mm]	26				
Ports on the sub-base	1, 2, 3, 4, 5	G1/4				
	12, 14	M5				
Tightening torque for valve mounting	[Nm]	1.8 ... 2.2				
Product weight	Without pilot valve [g]	229	229	142	229	229
	Solenoid valve [g]	305	305	180	305	305
Noise level	[dB (A)]	85				
Conforms to standard		ISO 15407-1, VDMA 24563 and for pilot valve interface ISO 15218				

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open

5) N=Normally closed, reverse operation, i.e. the pressure supply ports are 3 and 5, exhausting is via port 1

6) F=Normally open, reverse operation, i.e. the pressure supply ports are 3 and 5, exhausting is via port 1

7) W=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open,

reverse operation, i.e. the pressure supply ports are 3 and 5, exhausting is via port 1

Flow rates		2x 2/2-way valve	2x 3/2-way valve	5/2-way valve	5/3-way valve
Valve function					
Flow rate of valve	[l/min]	1350	1250	1400	1400
Flow rate of valve on individual sub-base	[l/min]	1000	1000	1100	1100
Flow rate of pneumatically linked valve	[l/min]	1000	900	1100	1000
Standard nominal flow rate	[l/min]	1000	900	1100	1000

Datasheet – Valve size 26 mm

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 2/2-way valve		20	28	–	–
2x 3/2-way valve		20	28	–	–
2x 3/2-way valve, reversible		28	20	–	–
5/2-way valve, single solenoid	Pneumatic spring	35	43	–	–
	Mechanical spring	26	56	–	–
5/2-way valve, double solenoid		–	–	18	18
5/3-way valve		23	58	35	–

Safety characteristics					
Type	VSVA-...-1C1	VSVA-...-P1	VSVA-...-5C1	VSVA-...-2AC1	VSVA-...-3AC1
Max. positive test pulse with logic 0 [μs]	1800	–	–	–	–
Max. negative test pulse with logic 1 [μs]	800	–	–	–	–
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27				
Vibration resistant	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6				

Operating and environmental conditions					
Type	VSVA-...-1C1	VSVA-...-P1	VSVA-...-5C1	VSVA-...-2AC1	VSVA-...-3AC1
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)				
Ambient temperature [°C]	–5 ... +50				
Temperature of medium [°C]	–5 ... +50				
Relative humidity [%]	0 ... 90				
CE marking (see declaration of conformity) ¹⁾	–	–	–	–	To EU Low Voltage Directive
UKCA marking (see declaration of conformity) ¹⁾	–	–	–	–	To UK EMC regulations
Certification ²⁾	c UL us - Recognized (OL)	c UL us - Recognized (OL)	–	–	–

1) For information about the area of use, see the declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

Operating and control pressure					
Valve function	2x 2/2-way valve	2x 3/2-way valve	2x 3/2-way valve, reverse operation		
Operating pressure	Internal pilot air supply [MPa] [bar]	0.2 ... 1 2 ... 10	0.2 ... 1 2 ... 10	0.2 ... 1 2 ... 10	
	External pilot air supply [MPa] [bar]	0.2 ... 1 2 ... 10	0.2 ... 1 2 ... 10	–0.09 ... 1 –0.9 ... 10	
Pilot pressure ¹⁾	[MPa] [bar]	0.3 ... 1 3 ... 10	0.3 ... 1 3 ... 10	0.3 ... 1 3 ... 10	

1) Pilot pressure dependent on operating pressure → graph

Datasheet – Valve size 26 mm



Operating and control pressure			5/2-way valve	5/3-way valve
Valve function		Pneumatic spring	Mechanical spring	
Operating pressure	Internal pilot air supply	[MPa]	0.2 ... 1	0.3 ... 1
		[bar]	2 ... 10	3 ... 10
	External pilot air supply	[MPa]	-0.09 ... 1.6	-0.09 ... 1.6
		[bar]	-0.9 ... 16	-0.9 ... 16
Pilot pressure ¹⁾	[MPa]	0.3 ... 1	0.3 ... 1	0.3 ... 1
	[bar]	3 ... 10	3 ... 10	3 ... 10

1) Pilot pressure dependent on operating pressure → graph

Minimum pilot pressure p12, p14 as a function of operating pressure p1 (external pilot air supply)

2x 3/2-way solenoid valve and 2/2-way solenoid valve

5/2-way solenoid valve and 5/3-way solenoid valve

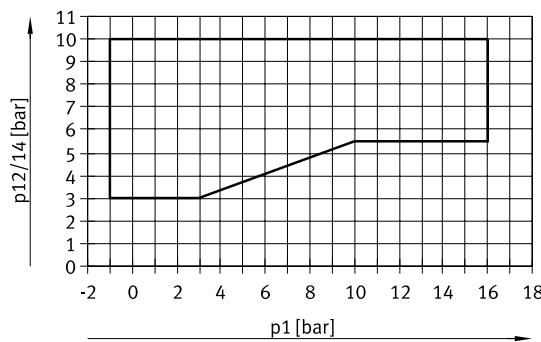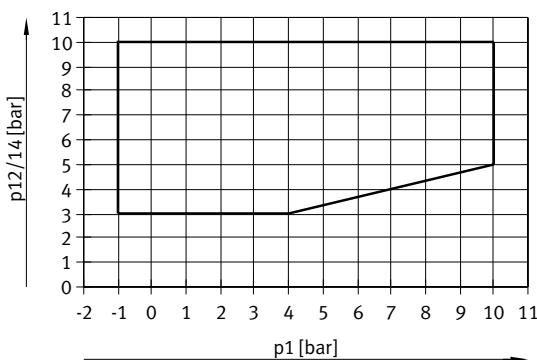

Electrical data

Electrical connection	Plug, square design to EN 175301-803, type C, 110 V/230 V AC with protective earth conductor			Plug M12, round design
Operating voltage	DC voltage	[V DC]	12, 24 +10%/-15%	24 +10%/-15%
	Alternating voltage	[V AC]	24, 110, 230 +10%/-15%	–
Characteristic coil data	DC voltage	[W]	1.8	1.8
	Alternating voltage	[VA]	At 24 V AC: • 3.1 pick-up power • 2.3 holding power	At 110 V AC and 230 V AC: • 2.9 pick-up power • 2.1 holding power
Duty cycle	[%]	100		
Protection rating to EN 60529	IP65, Nema 4 (in combination with plug socket)			

Materials


Housing	Die-cast aluminium
Seals	HNBR, NBR
Screws	Galvanised steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet – Valve size 26 mm

Dimensions

Download CAD data → www.festo.com

5/2-way valve, single solenoid with plug type C

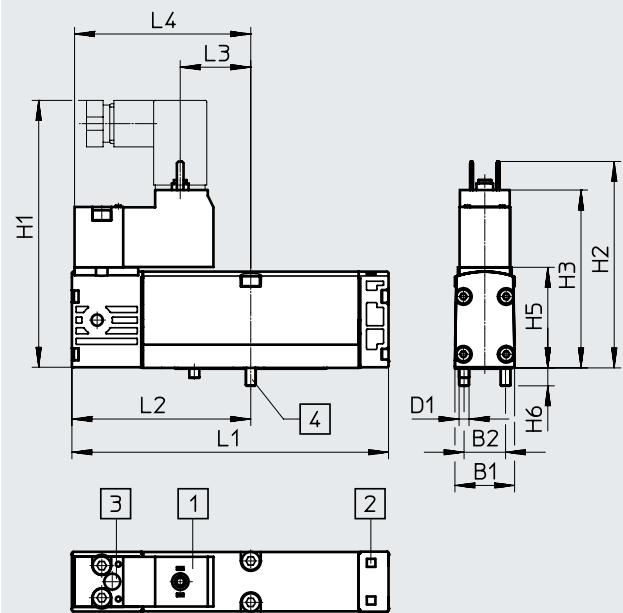


- [1] Connection sizes and connection for power supply to EN 175301-803, type C
- [2] Slot for inscription label
- [3] Manual override
- [4] Captive retaining screws

Type	B1	B2	D1	H1	H2	H3	H5	H6	L1	L2	L3	L4
VSVA-B-M52...C1	26.3	19	M4	89.2	71.2	62.6	39.3	7	113.1	63.1	29.8	61.6

Dimensions

Download CAD data → www.festo.com

5/2-way valve, single solenoid with M12 plug

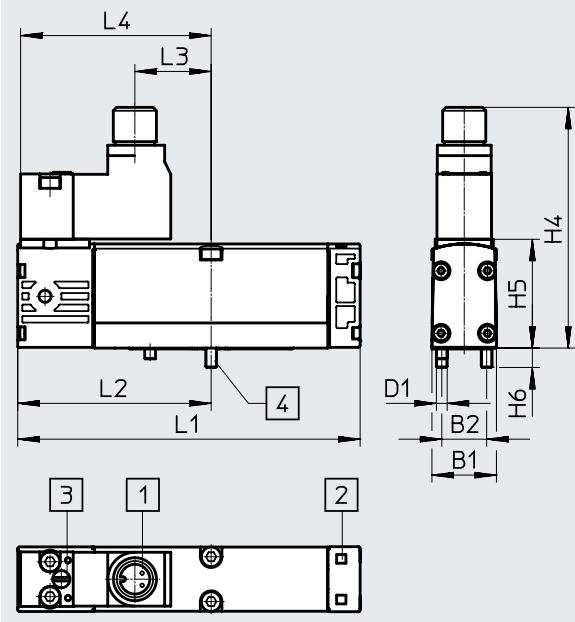

- [1] Connection sizes and connection for power supply, M12 plug
- [2] Slot for inscription label
- [3] Manual override
- [4] Captive retaining screws


Type	B1	B2	D1	H4	H5	H6	L1	L2	L3	L4
VSVA-B-M52...R3	26.3	19	M4	76.1	39.3	7	113.1	63.1	29.8	61.6

Datasheet – Valve size 26 mm

Dimensions

Download CAD data → www.festo.com

2x 2/2-way valve, 2x 3/2-way valve, 5/2-way valve double solenoid, 5/3-way valve

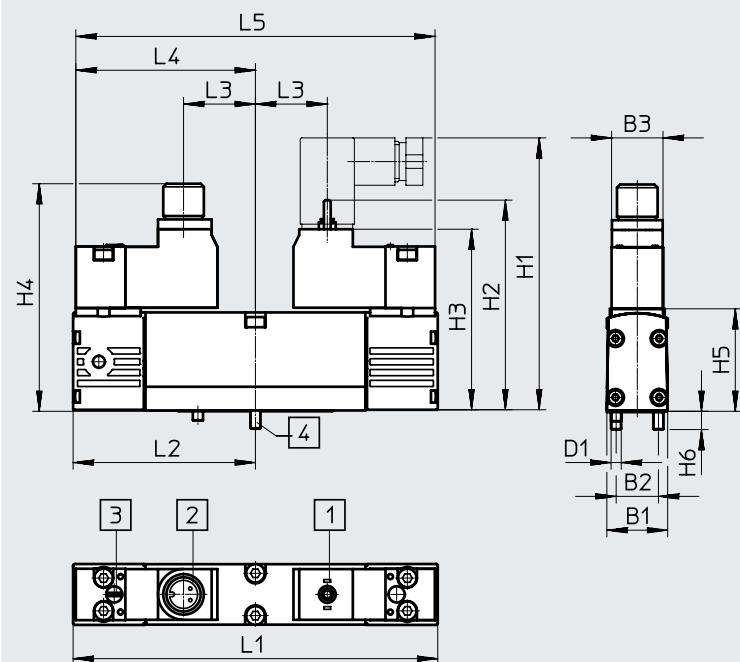

- [1] Connection sizes and connection for power supply to EN 175301-803, type C
- [2] Connection sizes and connection for power supply, M12 plug
- [3] Manual override
- [4] Captive retaining screws


Type	B1	B2	B3	D1	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5
VSVA-B-T22C	26.3	19	15.2	M4	89.2	71.2	62.6	76.1	39.3	7	126.2	63.1	29.8	61.6	123.2
VSVA-B-T32															
VSVA-B-B52															
VSVA-B-D52															
VSVA-B-P53															

Datasheet – Valve size 26 mm

Dimensions

Pilot valve with plug type C, VSCS-...C1

Download CAD data → www.festo.com

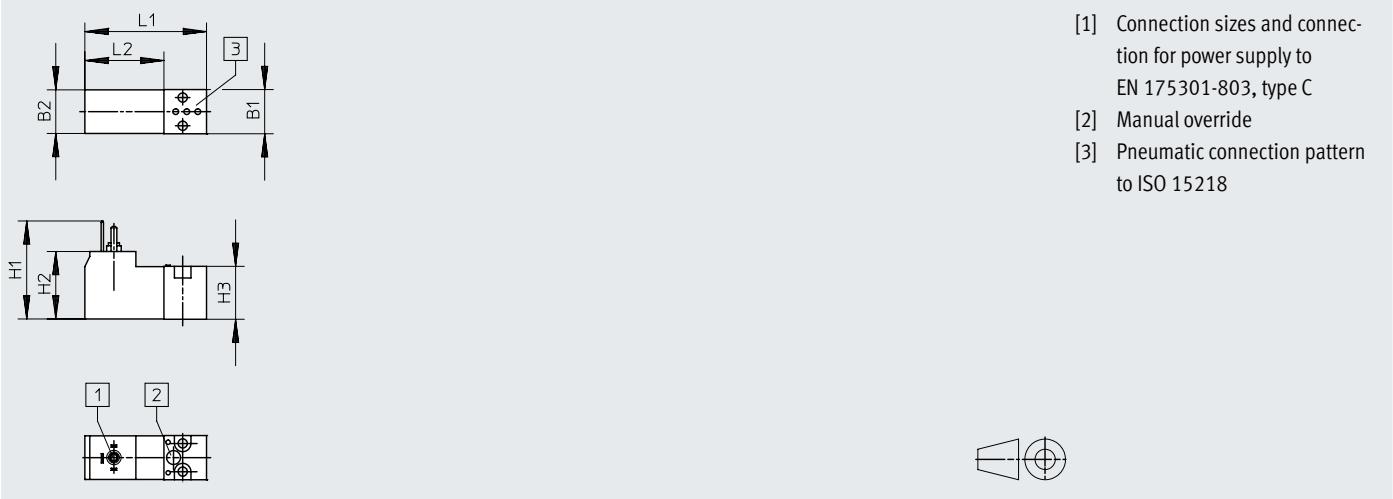


Type	B1	B2	D1	H1	H2	H3	L1	L2
VSCS-...C1	15.2	15	-	33.7	10.5	18.2	41.9	14.7

Dimensions

Pilot valve with M12 plug, VSCS-...R3

Download CAD data → www.festo.com

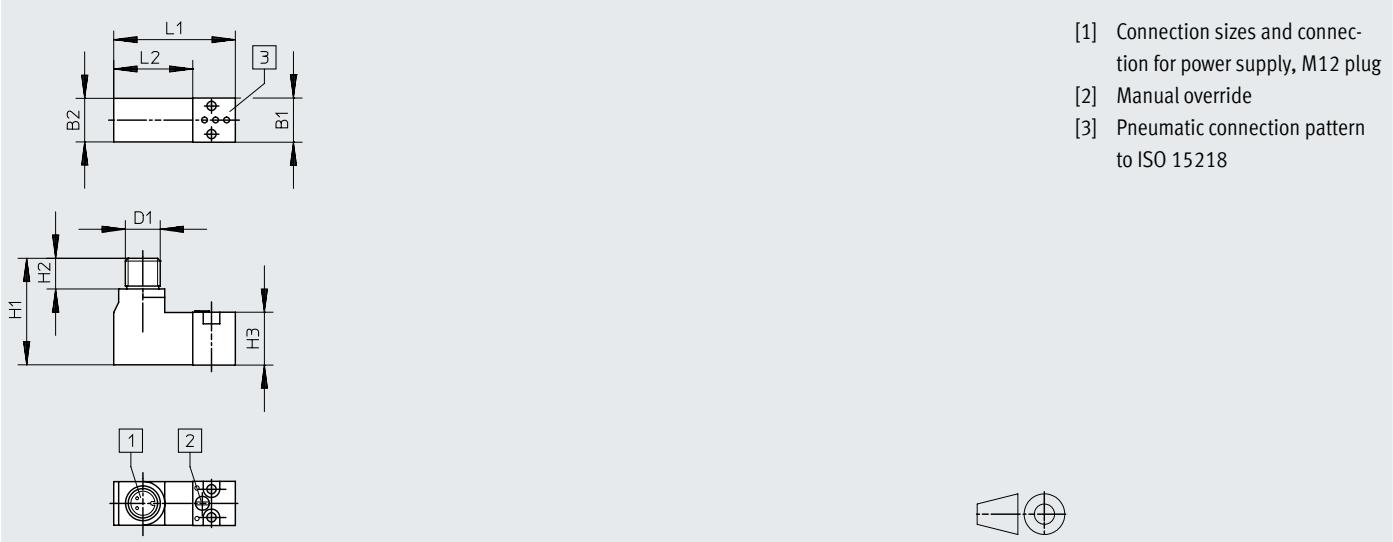

Type	B1	B2	D1	H1	H2	H3	L1	L2
VSCS-...R3	15.2	15	M12	36.7	10.6	18.2	41.9	27.2

Datasheet – Valve size 26 mm

Ordering data – Pilot control fitted			Part no.	Type															
Code	Circuit symbol																		
2x 2/2-way solenoid valve																			
T22C	–	Order via online configurator	–	–															
2x 3/2-way solenoid valve, with pilot control with square plug, type C to EN 175301-803																			
K		Normal position: 2x closed	Internal pilot air supply	<table> <tr><td>24 V DC</td><td>546692</td><td>VSVA-B-T32C-AH-A1-1C1</td></tr> <tr><td>12 V DC</td><td>547128</td><td>VSVA-B-T32C-AH-A1-5C1</td></tr> <tr><td>230 V AC</td><td>547208</td><td>VSVA-B-T32C-AH-A1-3AC1</td></tr> <tr><td>110 V AC</td><td>547168</td><td>VSVA-B-T32C-AH-A1-2AC1</td></tr> <tr><td>24 V AC</td><td>547088</td><td>VSVA-B-T32C-AH-A1-1AC1</td></tr> </table>	24 V DC	546692	VSVA-B-T32C-AH-A1-1C1	12 V DC	547128	VSVA-B-T32C-AH-A1-5C1	230 V AC	547208	VSVA-B-T32C-AH-A1-3AC1	110 V AC	547168	VSVA-B-T32C-AH-A1-2AC1	24 V AC	547088	VSVA-B-T32C-AH-A1-1AC1
24 V DC	546692	VSVA-B-T32C-AH-A1-1C1																	
12 V DC	547128	VSVA-B-T32C-AH-A1-5C1																	
230 V AC	547208	VSVA-B-T32C-AH-A1-3AC1																	
110 V AC	547168	VSVA-B-T32C-AH-A1-2AC1																	
24 V AC	547088	VSVA-B-T32C-AH-A1-1AC1																	
N		Normal position: 2x normally open	Internal pilot air supply	<table> <tr><td>24 V DC</td><td>546694</td><td>VSVA-B-T32U-AH-A1-1C1</td></tr> <tr><td>12 V DC</td><td>547130</td><td>VSVA-B-T32U-AH-A1-5C1</td></tr> <tr><td>230 V AC</td><td>547210</td><td>VSVA-B-T32U-AH-A1-3AC1</td></tr> <tr><td>110 V AC</td><td>547170</td><td>VSVA-B-T32U-AH-A1-2AC1</td></tr> <tr><td>24 V AC</td><td>547090</td><td>VSVA-B-T32U-AH-A1-1AC1</td></tr> </table>	24 V DC	546694	VSVA-B-T32U-AH-A1-1C1	12 V DC	547130	VSVA-B-T32U-AH-A1-5C1	230 V AC	547210	VSVA-B-T32U-AH-A1-3AC1	110 V AC	547170	VSVA-B-T32U-AH-A1-2AC1	24 V AC	547090	VSVA-B-T32U-AH-A1-1AC1
24 V DC	546694	VSVA-B-T32U-AH-A1-1C1																	
12 V DC	547130	VSVA-B-T32U-AH-A1-5C1																	
230 V AC	547210	VSVA-B-T32U-AH-A1-3AC1																	
110 V AC	547170	VSVA-B-T32U-AH-A1-2AC1																	
24 V AC	547090	VSVA-B-T32U-AH-A1-1AC1																	
H		Normal position: 1x normally closed 1x normally open	Internal pilot air supply	<table> <tr><td>24 V DC</td><td>547066</td><td>VSVA-B-T32H-AH-A1-1C1</td></tr> <tr><td>12 V DC</td><td>547132</td><td>VSVA-B-T32H-AH-A1-5C1</td></tr> <tr><td>230 V AC</td><td>547212</td><td>VSVA-B-T32H-AH-A1-3AC1</td></tr> <tr><td>110 V AC</td><td>547172</td><td>VSVA-B-T32H-AH-A1-2AC1</td></tr> <tr><td>24 V AC</td><td>547092</td><td>VSVA-B-T32H-AH-A1-1AC1</td></tr> </table>	24 V DC	547066	VSVA-B-T32H-AH-A1-1C1	12 V DC	547132	VSVA-B-T32H-AH-A1-5C1	230 V AC	547212	VSVA-B-T32H-AH-A1-3AC1	110 V AC	547172	VSVA-B-T32H-AH-A1-2AC1	24 V AC	547092	VSVA-B-T32H-AH-A1-1AC1
24 V DC	547066	VSVA-B-T32H-AH-A1-1C1																	
12 V DC	547132	VSVA-B-T32H-AH-A1-5C1																	
230 V AC	547212	VSVA-B-T32H-AH-A1-3AC1																	
110 V AC	547172	VSVA-B-T32H-AH-A1-2AC1																	
24 V AC	547092	VSVA-B-T32H-AH-A1-1AC1																	
K		Normal position: 2x normally closed	External pilot air supply	<table> <tr><td>24 V DC</td><td>547068</td><td>VSVA-B-T32C-AZH-A1-1C1</td></tr> <tr><td>12 V DC</td><td>547148</td><td>VSVA-B-T32C-AZH-A1-5C1</td></tr> <tr><td>230 V AC</td><td>547228</td><td>VSVA-B-T32C-AZH-A1-3AC1</td></tr> <tr><td>110 V AC</td><td>547188</td><td>VSVA-B-T32C-AZH-A1-2AC1</td></tr> <tr><td>24 V AC</td><td>547108</td><td>VSVA-B-T32C-AZH-A1-1AC1</td></tr> </table>	24 V DC	547068	VSVA-B-T32C-AZH-A1-1C1	12 V DC	547148	VSVA-B-T32C-AZH-A1-5C1	230 V AC	547228	VSVA-B-T32C-AZH-A1-3AC1	110 V AC	547188	VSVA-B-T32C-AZH-A1-2AC1	24 V AC	547108	VSVA-B-T32C-AZH-A1-1AC1
24 V DC	547068	VSVA-B-T32C-AZH-A1-1C1																	
12 V DC	547148	VSVA-B-T32C-AZH-A1-5C1																	
230 V AC	547228	VSVA-B-T32C-AZH-A1-3AC1																	
110 V AC	547188	VSVA-B-T32C-AZH-A1-2AC1																	
24 V AC	547108	VSVA-B-T32C-AZH-A1-1AC1																	
N		Normal position: 2x normally open	External pilot air supply	<table> <tr><td>24 V DC</td><td>547070</td><td>VSVA-B-T32U-AZH-A1-1C1</td></tr> <tr><td>12 V DC</td><td>547150</td><td>VSVA-B-T32U-AZH-A1-5C1</td></tr> <tr><td>230 V AC</td><td>547230</td><td>VSVA-B-T32U-AZH-A1-3AC1</td></tr> <tr><td>110 V AC</td><td>547190</td><td>VSVA-B-T32U-AZH-A1-2AC1</td></tr> <tr><td>24 V AC</td><td>547110</td><td>VSVA-B-T32U-AZH-A1-1AC1</td></tr> </table>	24 V DC	547070	VSVA-B-T32U-AZH-A1-1C1	12 V DC	547150	VSVA-B-T32U-AZH-A1-5C1	230 V AC	547230	VSVA-B-T32U-AZH-A1-3AC1	110 V AC	547190	VSVA-B-T32U-AZH-A1-2AC1	24 V AC	547110	VSVA-B-T32U-AZH-A1-1AC1
24 V DC	547070	VSVA-B-T32U-AZH-A1-1C1																	
12 V DC	547150	VSVA-B-T32U-AZH-A1-5C1																	
230 V AC	547230	VSVA-B-T32U-AZH-A1-3AC1																	
110 V AC	547190	VSVA-B-T32U-AZH-A1-2AC1																	
24 V AC	547110	VSVA-B-T32U-AZH-A1-1AC1																	
H		Normal position: 1x normally closed 1x normally open	External pilot air supply	<table> <tr><td>24 V DC</td><td>547072</td><td>VSVA-B-T32H-AZH-A1-1C1</td></tr> <tr><td>12 V AC</td><td>547152</td><td>VSVA-B-T32H-AZH-A1-5C1</td></tr> <tr><td>230 V AC</td><td>547232</td><td>VSVA-B-T32H-AZH-A1-3AC1</td></tr> <tr><td>110 V AC</td><td>547192</td><td>VSVA-B-T32H-AZH-A1-2AC1</td></tr> <tr><td>24 V AC</td><td>547112</td><td>VSVA-B-T32H-AZH-A1-1AC1</td></tr> </table>	24 V DC	547072	VSVA-B-T32H-AZH-A1-1C1	12 V AC	547152	VSVA-B-T32H-AZH-A1-5C1	230 V AC	547232	VSVA-B-T32H-AZH-A1-3AC1	110 V AC	547192	VSVA-B-T32H-AZH-A1-2AC1	24 V AC	547112	VSVA-B-T32H-AZH-A1-1AC1
24 V DC	547072	VSVA-B-T32H-AZH-A1-1C1																	
12 V AC	547152	VSVA-B-T32H-AZH-A1-5C1																	
230 V AC	547232	VSVA-B-T32H-AZH-A1-3AC1																	
110 V AC	547192	VSVA-B-T32H-AZH-A1-2AC1																	
24 V AC	547112	VSVA-B-T32H-AZH-A1-1AC1																	

Solenoid valves VSVA, with pilot interface to ISO 15218

Datasheet – Valve size 26 mm




Ordering data – Pilot control fitted						
Code	Circuit symbol			Part no.	Type	
5/2-way valve, single solenoid, with pilot control with square plug, type C to EN 175301-803						
M		Pneumatic spring	Internal pilot air supply	24 V DC	546700	VSVA-B-M52-AH-A1-1C1
				12 V DC	547138	VSVA-B-M52-AH-A1-5C1
				230 V AC	547218	VSVA-B-M52-AH-A1-3AC1
				110 V AC	547178	VSVA-B-M52-AH-A1-2AC1
				24 V AC	547098	VSVA-B-M52-AH-A1-1AC1
0		Mechanical spring	Internal pilot air supply	24 V DC	546702	VSVA-B-M52-MH-A1-1C1
				12 V DC	547140	VSVA-B-M52-MH-A1-5C1
				230 V AC	547220	VSVA-B-M52-MH-A1-3AC1
				110 V AC	547180	VSVA-B-M52-MH-A1-2AC1
				24 V AC	547100	VSVA-B-M52-MH-A1-1AC1
M		Pneumatic spring	External pilot air supply	24 V DC	547078	VSVA-B-M52-AZH-A1-1C1
				12 V DC	547158	VSVA-B-M52-AZH-A1-5C1
				230 V AC	547238	VSVA-B-M52-AZH-A1-3AC1
				110 V AC	547198	VSVA-B-M52-AZH-A1-2AC1
				24 V AC	547118	VSVA-B-M52-AZH-A1-1AC1
0		Mechanical spring	External pilot air supply	24 V DC	547080	VSVA-B-M52-MZH-A1-1C1
				12 V DC	547160	VSVA-B-M52-MZH-A1-5C1
				230 V AC	547240	VSVA-B-M52-MZH-A1-3AC1
				110 V AC	547200	VSVA-B-M52-MZH-A1-2AC1
				24 V AC	547120	VSVA-B-M52-MZH-A1-1AC1
5/2-way valve, double pilot valve, with pilot control with square plug, type C to EN 175301-803						
J		Dominant 1st signal	Internal pilot air supply	24 V DC	546696	VSVA-B-B52-H-A1-1C1
				12 V DC	547134	VSVA-B-B52-H-A1-5C1
				230 V AC	547214	VSVA-B-B52-H-A1-3AC1
				110 V AC	547174	VSVA-B-B52-H-A1-2AC1
				24 V AC	547094	VSVA-B-B52-H-A1-1AC1
D		Dominant at 14	Internal pilot air supply	24 V DC	546698	VSVA-B-D52-H-A1-1C1
				12 V DC	547136	VSVA-B-D52-H-A1-5C1
				230 V AC	547216	VSVA-B-D52-H-A1-3AC1
				110 V AC	547176	VSVA-B-D52-H-A1-2AC1
				24 V AC	547096	VSVA-B-D52-H-A1-1AC1
J		Dominant 1st signal	External pilot air supply	24 V DC	547074	VSVA-B-B52-ZH-A1-1C1
				12 V DC	547154	VSVA-B-B52-ZH-A1-5C1
				230 V AC	547234	VSVA-B-B52-ZH-A1-3AC1
				110 V AC	547194	VSVA-B-B52-ZH-A1-2AC1
				24 V AC	547114	VSVA-B-B52-ZH-A1-1AC1
D		Dominant at 14	External pilot air supply	24 V DC	547076	VSVA-B-D52-ZH-A1-1C1
				12 V DC	547156	VSVA-B-D52-ZH-A1-5C1
				230 V AC	547236	VSVA-B-D52-ZH-A1-3AC1
				110 V AC	547196	VSVA-B-D52-ZH-A1-2AC1
				24 V AC	547116	VSVA-B-D52-ZH-A1-1AC1

Datasheet – Valve size 26 mm

Ordering data – Pilot control fitted			Code	Circuit symbol	Part no.	Type
5/3-way solenoid valve, with pilot control with square plug, type C to EN 175301-803						
G		Normal position: Closed	Internal pilot air supply	24 V DC	546708	VSVA-B-P53C-H-A1-1C1
				12 V DC	547146	VSVA-B-P53C-H-A1-5C1
				230 V AC	547226	VSVA-B-P53C-H-A1-3AC1
				110 V AC	547186	VSVA-B-P53C-H-A1-2AC1
				24 V AC	547106	VSVA-B-P53C-H-A1-1AC1
B		Normal position: Open	Internal pilot air supply	24 V DC	546704	VSVA-B-P53U-H-A1-1C1
				12 V DC	547142	VSVA-B-P53U-H-A1-5C1
				230 V AC	547222	VSVA-B-P53U-H-A1-3AC1
				110 V AC	547182	VSVA-B-P53U-H-A1-2AC1
				24 V AC	547102	VSVA-B-P53U-H-A1-1AC1
E		Normal position: Exhausted	Internal pilot air supply	24 V DC	546706	VSVA-B-P53E-H-A1-1C1
				12 V DC	547144	VSVA-B-P53E-H-A1-5C1
				230 V AC	547224	VSVA-B-P53E-H-A1-3AC1
				110 V AC	547184	VSVA-B-P53E-H-A1-2AC1
				24 V AC	547104	VSVA-B-P53E-H-A1-1AC1
G		Normal position: Closed	External pilot air supply	24 V DC	547086	VSVA-B-P53C-ZH-A1-1C1
				12 V DC	547166	VSVA-B-P53C-ZH-A1-5C1
				230 V AC	547246	VSVA-B-P53C-ZH-A1-3AC1
				110 V AC	547206	VSVA-B-P53C-ZH-A1-2AC1
				24 V AC	547126	VSVA-B-P53C-ZH-A1-1AC1
B		Normal position: Open	External pilot air supply	24 V DC	547082	VSVA-B-P53U-ZH-A1-1C1
				12 V DC	547162	VSVA-B-P53U-ZH-A1-5C1
				230 V AC	547242	VSVA-B-P53U-ZH-A1-3AC1
				110 V AC	547202	VSVA-B-P53U-ZH-A1-2AC1
				24 V AC	547122	VSVA-B-P53U-ZH-A1-1AC1
E		Normal position: Exhausted	External pilot air supply	24 V DC	547084	VSVA-B-P53E-ZH-A1-1C1
				12 V DC	547164	VSVA-B-P53E-ZH-A1-5C1
				230 V AC	547244	VSVA-B-P53E-ZH-A1-3AC1
				110 V AC	547204	VSVA-B-P53E-ZH-A1-2AC1
				24 V AC	547124	VSVA-B-P53E-ZH-A1-1AC1

Solenoid valves VSVA, with pilot interface to ISO 15218


Datasheet – Valve size 26 mm

Ordering data – Pilot control separate		Part no.	Type		
2x 3/2-way valve without pilot valves					
	Internal pilot air supply	2x normally closed	546731	VSVA-B-T32C-A-A1-P1	
		2x normally open	546733	VSVA-B-T32U-A-A1-P1	
5/2-way single solenoid valve without pilot valve					
	Internal pilot air supply	Pneumatic	546739	VSVA-B-M52-A-A1-P1	
		Mechanical spring	546741	VSVA-B-M52-M-A1-P1	
5/2-way double solenoid valve without pilot valve					
	Internal pilot air supply	Dominant 1st signal	546735	VSVA-B-B52-A1-P1	
		Dominant at 14	546737	VSVA-B-D52-A1-P1	
5/3-way mid-position valve without pilot valves					
	Internal pilot air supply	Normally closed	546747	VSVA-B-P53C-A1-P1	
		Normally open	546743	VSVA-B-P53U-A1-P1	
		Normally exhausted	546745	VSVA-B-P53E-A1-P1	
Pilot valve to ISO 15218					
	Square plug, type C to EN 175301-803 With PE conductor	12 V DC	Non-detenting manual override	546257	VSCS-B-M32-MH-WA-5C1
			Manual override non-detenting/ detenting	571062	VSCS-B-M32-MD-WA-5C1
		24 V DC	Non-detenting manual override	546256	VSCS-B-M32-MH-WA-1C1
			Manual override non-detenting/ detenting	571061	VSCS-B-M32-MD-WA-1C1
		24 V AC	Non-detenting manual override	546258	VSCS-B-M32-MH-WA-1AC1
			Manual override non-detenting/ detenting	571063	VSCS-B-M32-MD-WA-1AC1
	Square plug, type C to EN 175301-803, Without PE conductor	110 V AC	Non-detenting manual override	546259	VSCS-B-M32-MH-WA-2AC1
			Manual override non-detenting/ detenting	571064	VSCS-B-M32-MD-WA-2AC1
		230 V AC	Non-detenting manual override	546260	VSCS-B-M32-MH-WA-3AC1
			Manual override non-detenting/ detenting	571065	VSCS-B-M32-MD-WA-3AC1
	Round plug M12 to IEC 61076-2-101	24 V DC	Non-detenting manual override	573214	VSCS-B-M32-MH-WA-1R3
			Manual override non-detenting/ detenting	573215	VSCS-B-M32-MD-WA-1R3

Datasheet – Valve size 26 mm, valve with position sensing

-  - Flow rate
max. 1400 l/min

-  - Voltage
24 V DC

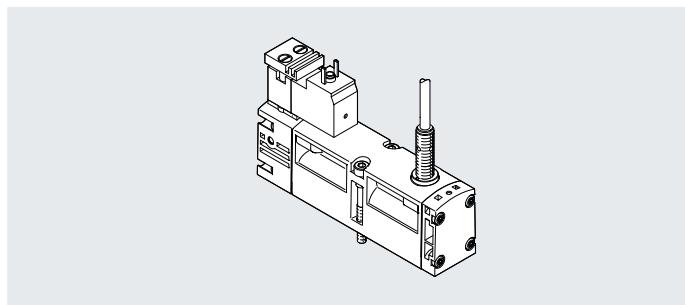**ISO valves with switching position sensing for safety-related pneumatic components**

The 5/2-way single solenoid valve with spring return has an inductive sensor that monitors the normal position of the piston spool valve.

This valve is not a safety device to the Machinery Directive 2006/42/EC.

For use in higher categories, the sensor signal from the valve must be evaluated by a control unit.

This valve is suitable for use in safety-related parts of control systems to EN ISO 13849-1. This valve is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode).

The circuit diagram represents a valve with a proximity switch with a N/O switching output signal. In accordance with ISO 1219-1, this symbol is used both for normally open contacts and for normally closed contacts. The switching element function of the sensors used here is designed as an N/C contact.

General technical data

Valve function	5/2
Piston position sensing	Normal position with sensor
Stable position	Monostable
Reset method	Mechanical spring
Design	Piston spool
Overlap	Positive overlap
Sealing principle	Soft
Actuation type	Electrical
Type of control	Piloted
Pilot interface	To ISO 15218
Pilot air supply	External
Pilot air supply, exhaust air	Optionally ducted/not ducted
Flow direction	Any
Exhaust air function	Can be throttled, via throttle plate, via individual sub-base
Manual override	Concealed
Type of mounting	On sub-base
Mounting position	Any
Nominal width	[mm]
Valve size	9
Ports on the sub-base	[mm]
1, 2, 3, 4, 5	26
12, 14	G1/4
Tightening torque for valve mounting	[Nm]
Product weight	1.8 ... 2.2
With 1x M8 plug	[g]
With open cable end	289
Noise level	[dB (A)]
Conforms to standard	332
	85
	ISO 15407-1, VDMA 24563

Flow rates

Flow rate of valve	[l/min]	1400
Flow rate of valve on individual sub-base	[l/min]	1100
Flow rate of pneumatically linked valve	[l/min]	1100
Standard nominal flow rate	[l/min]	1100

Datasheet – Valve size 26 mm, valve with position sensing

Switching times [ms]		Switching time on	Switching time off
5/2-way valve, single solenoid	Mechanical spring	21	41

Safety characteristics	
CE marking (see declaration of conformity)	To EU EMC Directive ¹⁾
UKCA marking (see declaration of conformity) ¹⁾	To UK EMC regulations
KC marking	KC EMC
Max. positive test pulse with logic 0	[μs] 1000
Max. negative test pulse with logic 1	[μs] 800
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistant	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

1) For information about the area of use, see the declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Operating and environmental conditions					
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]				
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)				
Operating pressure	<table> <tr> <td>[MPa]</td> <td>-0.09 ... 1.6</td> </tr> <tr> <td>[bar]</td> <td>-0.9 ... 16</td> </tr> </table>	[MPa]	-0.09 ... 1.6	[bar]	-0.9 ... 16
[MPa]	-0.09 ... 1.6				
[bar]	-0.9 ... 16				
Pilot pressure	<table> <tr> <td>[MPa]</td> <td>0.3 ... 1</td> </tr> <tr> <td>[bar]</td> <td>3 ... 10</td> </tr> </table>	[MPa]	0.3 ... 1	[bar]	3 ... 10
[MPa]	0.3 ... 1				
[bar]	3 ... 10				
Ambient temperature	[°C] -5 ... +50				
Temperature of medium	[°C] -5 ... +50				
Relative humidity	[%) 0 ... 90				
Certification	c UL us - Recognized (OL) C-Tick				
Certificate-issuing authority	UL MH19482				


Electrical data	
Electrical connection	Plug, square design to EN 175301-803, type C, without PE conductor
Operating voltage	[V DC] 24 +10%/-15%
Characteristic coil data	[W] 1.8
Duty cycle	[%) 100
Signal status indication	With accessories
Protection rating to EN 60529	IP65, Nema 4 (in combination with plug socket)

Datasheet – Valve size 26 mm, valve with position sensing

Electrical data – Sensor		VSVA-B-...P	VSVA-B-...C
Type			
Electrical connection		Plug, M8x1, 3-pin	Open cable end, 2.5 m
Operating voltage	[V DC]	10 ... 30	10 ... 30
Switching element function		N/C	N/C
Measuring principle		Inductive	Inductive
Sensor switching status indication		LED	LED
Reverse polarity protection		For all electrical connections	For all electrical connections
Short circuit current rating		Pulsed	Pulsed
No-load current	[mA]	Max. 10	Max. 10
Output current	[mA]	Max. 200	Max. 200
Switching frequency	[kHz]	Max. 5	Max. 5
Residual ripple	[%]	±10	±10
Voltage drop	[V]	Max. 2	Max. 2
Valve – Sensor switching time	On	[ms]	60
	Off	[ms]	11
			11

Materials	
Housing	Die-cast aluminium, PA
Seals	FPM, NBR
Screws	Galvanised steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L


Dimensions

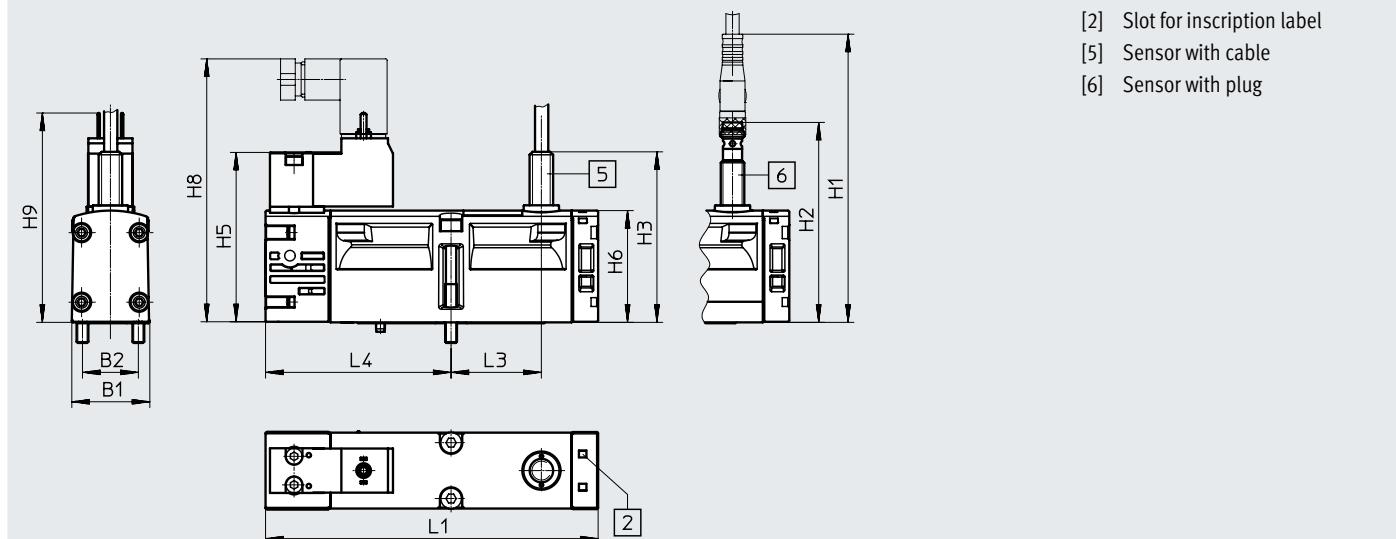Download CAD data → www.festo.com

	B1	B2	H1	H2	H3	H5	H6	H8	H9	L1	L3	L4
VSVA-B-M52-MZ-A1-1C1-A...	26.2	19	98	68.2	58	57.8	38	89.6	71.2	113.1	30.7	63.1

Solenoid valves VSVA, with pilot interface to ISO 15218


Datasheet – Valve size 26 mm, valve with position sensing

Ordering data – Pilot control fitted		Electrical connection for sensor	Part no.	Type		
5/2-way valve, single solenoid, with pilot control with square plug, type C to EN 175301-803						
SO		Inductive sensor with PNP output	Plug, M8x1, 3-pin Open cable end, 2.5 m	560726 560725	VSVA-B-M52-MZ-A1-1C1-APP VSVA-B-M52-MZ-A1-1C1-APC	
-		Inductive sensor with NPN output	Plug, M8x1, 3-pin Open cable end, 2.5 m	560745 560744	VSVA-B-M52-MZ-A1-1C1-ANP VSVA-B-M52-MZ-A1-1C1-ANC	
SQ						
-						
Ordering data – Accessories		Description	Part no.	Type		
Plug socket for plug pattern to EN 175301-803, type C						
-		Angled socket, type C, 3-pin, screw terminal	Cable fitting PG7 Cable fitting M12	151687 539712	MSSD-EB MSSD-EB-M12	
Illuminating seal for connection pattern to EN 175301-803, type C					Datasheets → Internet: meb-ld	
-		For plug socket MSSD, 12 ... 24 V DC		151717	MEB-LD-12-24DC	
Connecting cable for plug pattern to EN 175301-803, type C						
GG		Angled socket, type C, with LED Open end, 3-core	3-pin, cable sheath PVC	2.5 m 5 m 10 m	151688 151689 193457	KMEB-1-24-2.5-LED KMEB-1-24-5-LED KMEB-1-24-10-LED
GH						
GJ						
Connecting cable for electrical connection of the position detection sensor						
GM		Straight socket, M8x1, 3-pin Open end, 3-core		2.5 m 5 m	8078223 8078224	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8G3-U-5-N-LE3
GN						
GO		Angled socket, M8x1, 3-pin Open end, 3-core		2.5 m 5 m	8078230 8078231	NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3
GP						

Datasheet – Valve size 26 mm

-  - Flow rate
max. 924 l/min

-  - Voltage
24 V DC

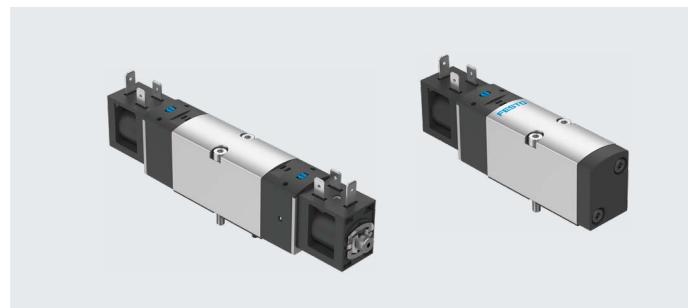**General technical data**

Valve function	5/2-way, single solenoid	5/2-way, double solenoid	5/3-way, exhausted	
Reset method	Pneumatic spring	Mechanical spring	–	
Design	Piston slide with sealing ring			
Overlap	Negative overlap			
Sealing principle	Soft			
Actuation type	Electrical			
Type of control	Piloted			
Pilot air supply	Internal			
Flow direction	Not reversible			
Exhaust air function	Can be throttled			
Manual override	Non-detenting; detenting			
Type of mounting	On sub-base			
Mounting position	Any			
Nominal width [mm]	6.4			
Valve size [mm]	26			
Pneumatic connection	1, 2, 3, 4, 5	Connecting plate size 26 mm to ISO 15407-1		
Connection for venting hole	Not ducted			
b value	0.29	0.29	0.3	0.29
Cvalue [l/sbar]	3.94	3.98	3.92	3.99
Tightening torque for valve mounting [Nm]	2.4			
Product weight [g]	240	242	319	320
Conforms to standard	ISO 15407-1			

Flow rates

Valve function	5/2-way, single solenoid	5/2-way, double solenoid	5/3-way, exhausted
Reset method	Pneumatic spring	Mechanical spring	–
Flow rate of valve [l/min]	915	915	915
Flow rate of valve on individual sub-base [l/min]	915	915	915
Flow rate of pneumatically linked valve [l/min]	880	880	880
Standard nominal flow rate [l/min]	900	900	900

Switching times

Valve function	5/2-way, single solenoid	5/2-way, double solenoid	5/3-way, exhausted
Reset method	Pneumatic spring	Mechanical spring	–
Switching time on [ms]	14.3	16.2	–
Switching time off [ms]	25.2	22.8	–
Switching time changeover [ms]	–	–	10.8
			18.9

Solenoid valves VSVA, with square plug type B to industry standard

Datasheet – Valve size 26 mm

Safety characteristics		
Max. positive test pulse with 0 signal	[μs]	2500
Max. negative test pulse with 1 signal	[μs]	1100
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistant		Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

Operating and environmental conditions		
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure	[MPa]	0.3 ... 0.8
	[bar]	3 ... 8
Ambient temperature	[°C]	-5 ... +50
Temperature of medium	[°C]	-5 ... +50
Corrosion resistance class CRC ¹⁾		1 - Low corrosion stress

1) More information www.festo.com/x/topic/crc

Electrical data		
Electrical connection		Form B
		To industry standard (11 mm)
Nominal operating voltage	[V DC]	24
Characteristic coil data		24 V DC: 3.3 W
Permissible voltage fluctuations	[%]	±10
Duty cycle	[%]	100
Degree of protection		IP65
		With plug socket
		To IEC 60529
Signal status indication		With accessories


Materials		
Housing		Wrought aluminium alloy
Seals		NBR, HNBR
Piston spool		Wrought aluminium alloy
Screws		Galvanised steel
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364 zone III

Datasheet – Valve size 26 mm

Dimensions

Download CAD data → www.festo.com

5/2-way valve, single solenoid

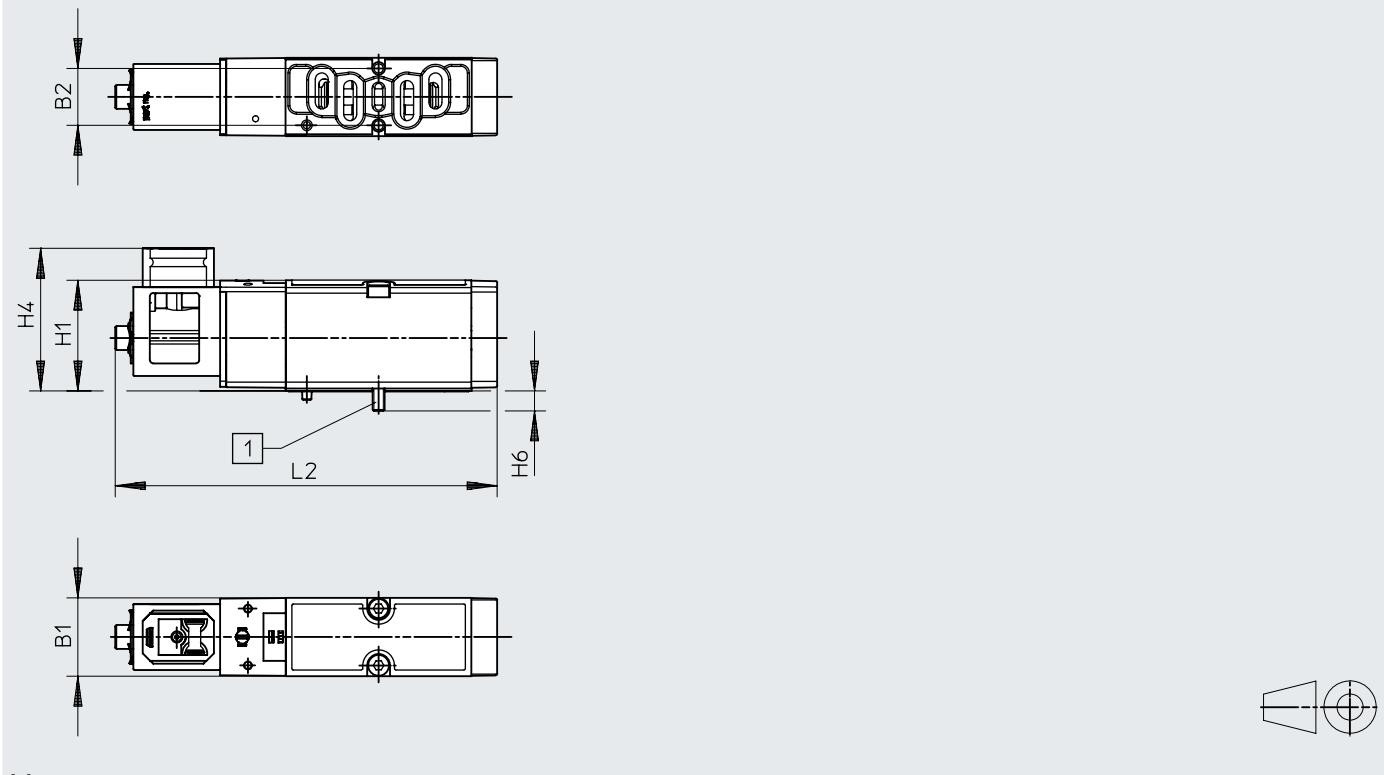

[1] Retaining screws M4

Type	B1	B2	H1	H4	H6	L1
VSVA-BK-M52...	26.2	19	37	47.7	6.7	127.7


Solenoid valves VSVA, with square plug type B to industry standard

Datasheet – Valve size 26 mm

Dimensions

Download CAD data → www.festo.com

5/2-way double solenoid valve and 5/3-way solenoid valve

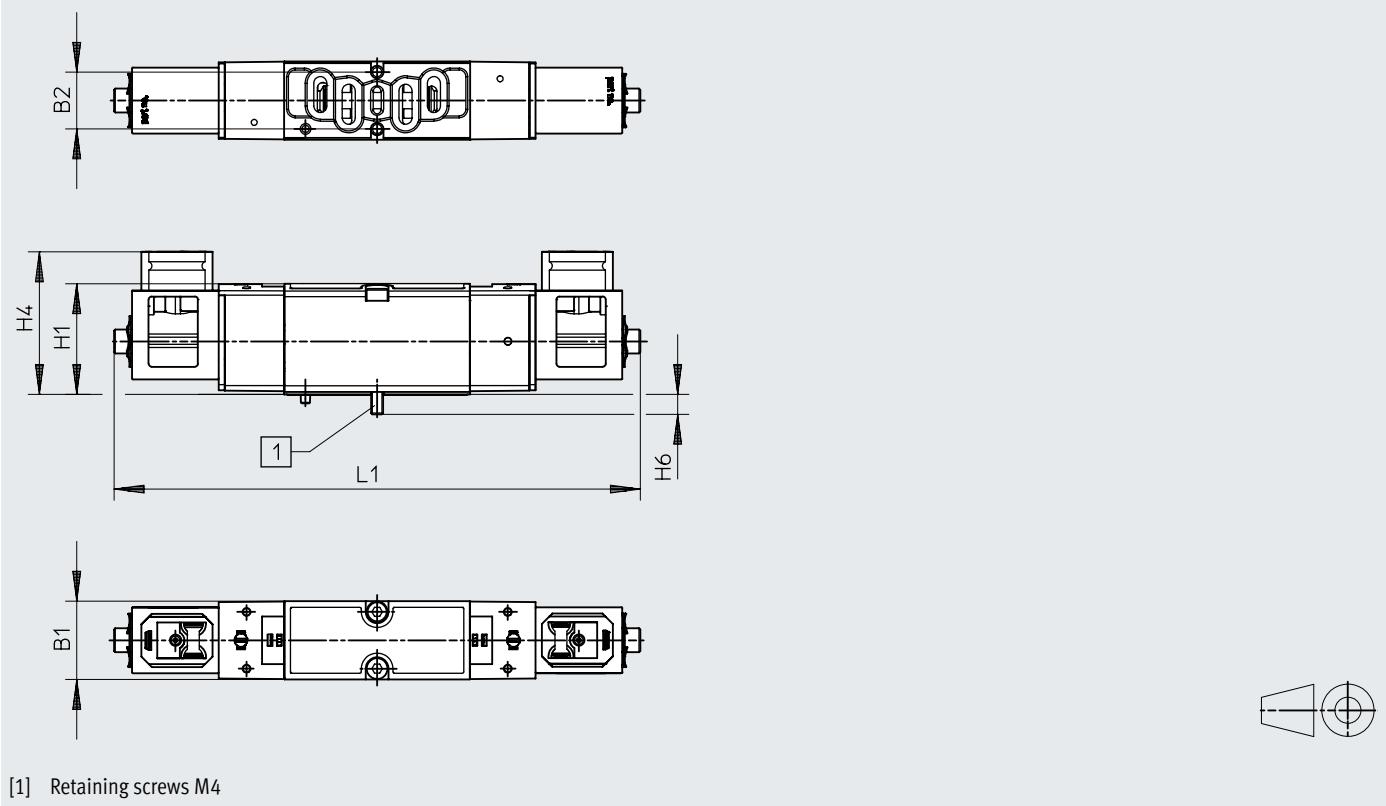

[1] Retaining screws M4

Type	B1	B2	H1	H4	H6	L1
VSVA-BK-B52...	26.1	19	37	47.7	6.7	176.1
VSVA-BK-P53...						

Ordering data	Code	Circuit symbol	Part no.	Type
5/2-way valve, single solenoid				
-			8150869	VSVA-BK-M52-MD-A1-1B2
-			8150870	VSVA-BK-M52-AD-A1-1B2
5/2-way valve, double solenoid				
-			8150871	VSVA-BK-B52-D-A1-1B2
5/3-way solenoid valve				
-			8150872	VSVA-BK-P53E-D-A1-1B2

Datasheet – Valve size 18 mm

-  - Flow rate
max. 750 l/min

-  - Voltage
24 V DC



General technical data		2x 3/2-way valve	5/2-way valve	5/3-way valve
Valve function				
Normal position	C ¹⁾ , U ²⁾ , H ⁴⁾	–	–	C ¹⁾ , U ²⁾ , E ³⁾
Stable position	Monostable		Bistable	Monostable
Pneumatic spring return	Yes	Yes	–	No
Mechanical spring return	No	Yes	–	Yes
Design	Piston spool			
Overlap	Positive overlap			
Sealing principle	Soft			
Actuation type	Electrical			
Type of control	Piloted			
Pilot air supply	Internal or external			
Flow direction	Not reversible	Reversible with external pilot air supply		
Exhaust air function	Can be throttled			
Manual override	Non-detenting			
Type of mounting	On sub-base			
Mounting position	Any			
Nominal width	[mm]	5		
Valve size	[mm]	18		
Ports on the sub-base	1, 2, 3, 4, 5 12, 14	G1/8 M5		
Tightening torque for valve mounting	[Nm]	0.9 ... 1.1		
Product weight	[g]	140		
Noise level	[dB (A)]	85		
Conforms to standard		ISO 15407-1, VDMA 24563		

- 1) C = Normally closed
- 2) U = Normally open
- 3) E = Normally exhausted
- 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open

Flow rates		2x 3/2-way valve	5/2-way valve	5/3-way valve
Valve function				
Flow rate of valve	[l/min]	600	750	650
Flow rate of valve on individual sub-base	[l/min]	450	550	500
Flow rate of pneumatically linked valve	[l/min]	400	550	450
Standard nominal flow rate	[l/min]	400	550	450

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 3/2-way valve		10	22	–	–
5/2-way valve, single solenoid	Pneumatic spring	20	25	–	–
	Mechanical spring	12	34	–	–
5/2-way valve, double solenoid		–	–	10	10
5/3-way valve		15	36	–	–

Solenoid valves VSVA, with central plug M8x1, M12x1

Datasheet – Valve size 18 mm

Safety characteristics			
Type	VSVA-B-...-A2-1R...	VSVA-B-T32C-AZH-A2-1R2L VSVA-B-T32U-AZH-A2-1R2L VSVA-B-T32H-AZH-A2-1R2L VSVA-B-T32U-AH-A2-1R5L	
CE marking (see declaration of conformity)	To EU EMC Directive ¹⁾		To EU EMC Directive ¹⁾
UKCA marking (see declaration of conformity) ¹⁾	To UK EMC regulations To UK RoHS regulations		– –
Max. positive test pulse with logic 0	[µs]	500	500
Max. negative test pulse with logic 1	[µs]	500	500
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27
Vibration resistant	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6		Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6

1) For information about the area of use, see the declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Operating and environmental conditions			
Valve function	2x 3/2-way valve	5/2-way valve	5/3-way valve
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]		
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)		
Operating pressure	Internal pilot air supply [MPa] [bar]	0.3 ... 0.8 3 ... 8	0.3 ... 0.8 3 ... 8
	External pilot air supply [MPa] [bar]	0.3 ... 1 3 ... 10	-0.09 ... 1 -0.9 ... 10
Pilot pressure	[MPa] [bar]	0.3 ... 0.8 3 ... 8	0.3 ... 0.8 3 ... 8
Ambient temperature	[°C]	-5 ... +50	
Temperature of medium	[°C]	-5 ... +50	
Relative humidity	[%]	0 ... 90	
Corrosion resistance class CRC ¹⁾		2	
Certification	c UL us - Recognized (OL) C-Tick		

1) More information www.festo.com/x/topic/crc

Electrical data			
Electrical connection	Central plug, round design, M8x1 4-pin or M12x1 3-pin		
Characteristic coil data	Voltage Power	[V DC] [W]	24±10% = 21.6 ... 26.4 High-current phase: 2.4 Low-current phase: 1 ¹⁾
Duty cycle	%	100	
Protection rating to EN 60529	IP65 (in combination with plug socket)		
Signal status indication	LED		
Reverse polarity protection	For all electrical connections		
Additional functions	Holding current reduction Safety shut-off		
Protection against direct and indirect contact	PELV		

1) Controlled by integrated current reduction

Datasheet – Valve size 18 mm


Materials

Housing	Die-cast aluminium, POM
Seals	NBR
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Dimensions

Download CAD data → www.festo.com

Valve with central plug M8x1, VSVA-B-...-1R2L

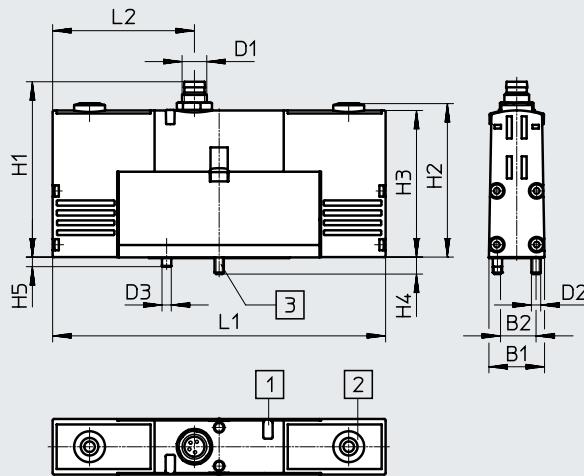


[1] Light emitting diode

[2] Manual override

[3] Captive retaining screws

Valve with central plug M12x1, VSVA-B-...-1R5L

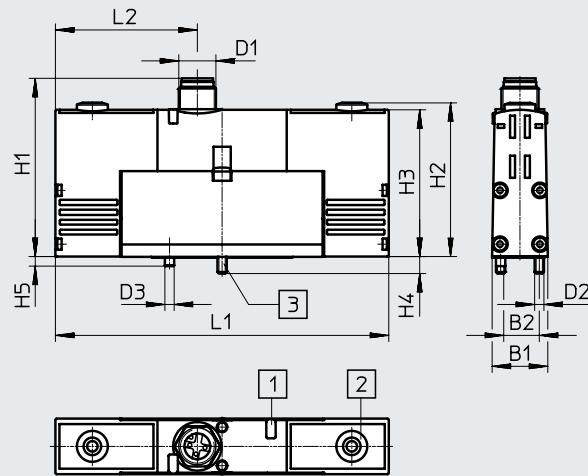

[1] Light emitting diode


[2] Manual override

[3] Captive retaining screws

Type	B1	B2	D1	D2	D3	H1	H2	H3	H4	H5	L1	L2
VSVA-B-...-1R2L	18	12.5	M8x1	M3	3	54.4	49.8	47.6	5.4	3	107.8	46.9
VSVA-B-...-1R5L			M12x1			58.2						


Terminal allocation

M8x1



- 1 Unused
- 2 Signal (+) solenoid 12/10
- 3 com (-)
- 4 Signal (+) solenoid 14/10










M12x1



- 2 Signal (+) Solenoid 12
- 3 com (-)
- 4 Signal (+) Solenoid 14

Solenoid valves VSVA, with central plug M8x1, M12x1

Datasheet – Valve size 18 mm

Ordering data			Part no.	Type
Code	Circuit symbol			
2x 3/2-way solenoid valve				
K		Normal position: 2x normally closed	Internal pilot air supply	M8x1 534771 VSVA-B-T32C-AH-A2-1R2L
				M12x1 546764 VSVA-B-T32C-AH-A2-1R5L
N		Normal position: 2x normally open	Internal pilot air supply	M8x1 534772 VSVA-B-T32U-AH-A2-1R2L
				M12x1 546765 VSVA-B-T32U-AH-A2-1R5L
H		Normal position: 1x normally closed 1x normally open	Internal pilot air supply	M8x1 534773 VSVA-B-T32H-AH-A2-1R2L
				M12x1 546766 VSVA-B-T32H-AH-A2-1R5L
K		Normal position: 2x normally closed	External pilot air supply	M8x1 534781 VSVA-B-T32C-AZH-A2-1R2L
				M12x1 546774 VSVA-B-T32C-AZH-A2-1R5L
N		Normal position: 2x normally open	External pilot air supply	M8x1 534782 VSVA-B-T32U-AZH-A2-1R2L
				M12x1 546775 VSVA-B-T32U-AZH-A2-1R5L
H		Normal position: 1x normally closed 1x normally open	External pilot air supply	M8x1 534783 VSVA-B-T32H-AZH-A2-1R2L
				M12x1 546776 VSVA-B-T32H-AZH-A2-1R5L
5/2-way valve, single solenoid				
M		Pneumatic spring	Internal pilot air supply	M8x1 534774 VSVA-B-M52-AH-A2-1R2L
				M12x1 546767 VSVA-B-M52-AH-A2-1R5L
O		Mechanical spring	Internal pilot air supply	M8x1 534775 VSVA-B-M52-MH-A2-1R2L
				M12x1 546768 VSVA-B-M52-MH-A2-1R5L
M		Pneumatic spring	External pilot air supply	M8x1 534784 VSVA-B-M52-AZH-A2-1R2L
				M12x1 546777 VSVA-B-M52-AZH-A2-1R5L
O		Mechanical spring	External pilot air supply	M8x1 534785 VSVA-B-M52-MZH-A2-1R2L
				M12x1 546778 VSVA-B-M52-MZH-A2-1R5L

Datasheet – Valve size 18 mm

Ordering data				Part no.	Type
Code	Circuit symbol				
5/2-way valve, double pilot					
J		Dominant 1st signal	Internal pilot air supply	M8x1	534776 VSVA-B-B52-H-A2-1R2L
				M12x1	546769 VSVA-B-B52-H-A2-1R5L
D		Dominant at 14	Internal pilot air supply	M8x1	534777 VSVA-B-D52-H-A2-1R2L
				M12x1	546770 VSVA-B-D52-H-A2-1R5L
J		Dominant 1st signal	External pilot air supply	M8x1	534786 VSVA-B-B52-ZH-A2-1R2L
				M12x1	546779 VSVA-B-B52-ZH-A2-1R5L
D		Dominant at 14	External pilot air supply	M8x1	534787 VSVA-B-D52-ZH-A2-1R2L
				M12x1	546780 VSVA-B-D52-ZH-A2-1R5L
5/3-way solenoid valve					
G		Normally closed	Internal pilot air supply	M8x1	534778 VSVA-B-P53C-H-A2-1R2L
				M12x1	546771 VSVA-B-P53C-H-A2-1R5L
B		Normally open	Internal pilot air supply	M8x1	534780 VSVA-B-P53U-H-A2-1R2L
				M12x1	546773 VSVA-B-P53U-H-A2-1R5L
E		Normally exhausted	Internal pilot air supply	M8x1	534779 VSVA-B-P53E-H-A2-1R2L
				M12x1	546772 VSVA-B-P53E-H-A2-1R5L
G		Normally closed	External pilot air supply	M8x1	534788 VSVA-B-P53C-ZH-A2-1R2L
				M12x1	546781 VSVA-B-P53C-ZH-A2-1R5L
B		Normally open	External pilot air supply	M8x1	534790 VSVA-B-P53U-ZH-A2-1R2L
				M12x1	546783 VSVA-B-P53U-ZH-A2-1R5L
E		Normally exhausted	External pilot air supply	M8x1	534789 VSVA-B-P53E-ZH-A2-1R2L
				M12x1	546782 VSVA-B-P53E-ZH-A2-1R5L

Solenoid valves VSVA, with central plug M8x1, M12x1

Datasheet – Valve size 26 mm

-  Flow rate
max. 1400 l/min

-  Voltage
24 V DC



General technical data																
Valve function	2x 3/2-way valve			5/2-way valve		5/3-way valve										
Normal position	C ¹⁾	U ²⁾	H ⁴⁾	–	–	C ¹⁾	U ²⁾	E ³⁾								
Stable position	Monostable			Monostable	Bistable	Monostable										
Pneumatic spring return	Yes			Yes	–	No										
Mechanical spring return	No			Yes	–	Yes										
Design	Piston spool															
Overlap	Positive overlap															
Sealing principle	Soft															
Actuation type	Electrical															
Type of control	Piloted															
Pilot air supply	Internal or external															
Flow direction	Not reversible			Reversible with external pilot air supply												
Exhaust air function	Can be throttled, via throttle plate, via individual sub-base															
Manual override	Non-detenting															
Type of mounting	On sub-base															
Mounting position	Any															
Nominal width	[mm]	9														
Valve size	[mm]	26														
Ports on the sub-base	1, 2, 3, 4, 5	G1/4														
	12, 14	M5														
b value	0.25	–	–	0.25	–	0.24	–	0.3								
c value	[l/sbar]	4	–	–	4.5	–	4.35	–								
Tightening torque for valve mounting	[Nm]	1.8 ... 2.2														
Product weight	[g]	270														
Conforms to standard	ISO 15407-1															

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open

Flow rates								
Valve function	2x 3/2-way valve			5/2-way valve		5/3-way valve		
Flow rate of valve	[l/min]	1250		1400		1400		
Flow rate of valve on individual sub-base	[l/min]	1000		1100		1100		
Flow rate of pneumatically linked valve	[l/min]	900		1100		1000		
Standard nominal flow rate	[l/min]	900		1100		1000		

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 3/2-way valve		20	33	–	–
5/2-way valve, single solenoid	Pneumatic spring	25	40	–	–
	Mechanical spring	20	52	–	–
5/2-way valve, double solenoid		–	–	15	25
5/3-way valve		20	52	–	–

Datasheet – Valve size 26 mm

Safety characteristics		
CE marking (see declaration of conformity)	To EU EMC Directive ¹⁾	
UKCA marking (see declaration of conformity) ¹⁾	To UK EMC regulations To UK RoHS regulations	
Max. positive test pulse with logic 0	[μs] 400	
Max. negative test pulse with logic 1	[μs] 100	
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	
Vibration resistant	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	

1) For information about the area of use, see the declaration of conformity at: [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Operating and environmental conditions				
Valve function	2x 3/2-way valve	5/2-way valve	5/3-way valve	
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]			
Pilot medium	Compressed air to ISO 8573-1:2010 [7:4:4]			
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)			
Operating pressure	Internal pilot air supply	[MPa] 0.3 ... 0.8 [bar] 3 ... 8	0.3 ... 0.8 3 ... 8	0.3 ... 0.8 3 ... 8
	External pilot air supply	[MPa] 0.3 ... 1 [bar] 3 ... 10	-0.09 ... 1.6 -0.9 ... 16	-0.09 ... 1.6 -0.9 ... 16
Pilot pressure ¹⁾		[MPa] 0.3 ... 0.8 [bar] 3 ... 8	0.3 ... 0.8 3 ... 8	0.3 ... 0.8 3 ... 8
Ambient temperature		[°C] -5 ... +50		
Temperature of medium		[°C] -5 ... +50		
Relative humidity		[%) 0 ... 90		
Corrosion resistance class CRC ²⁾		2		
Certification		c UL us - Recognized (OL) RCM Mark		



1) Pilot pressure dependent on operating pressure → graph

2) More information: www.festo.com/x/topic/crc

Minimum pilot pressure p12, p14 as a function of operating pressure p1 (external pilot air supply)

2x 3/2-way valve

5/2-way valve and 5/3-way valve

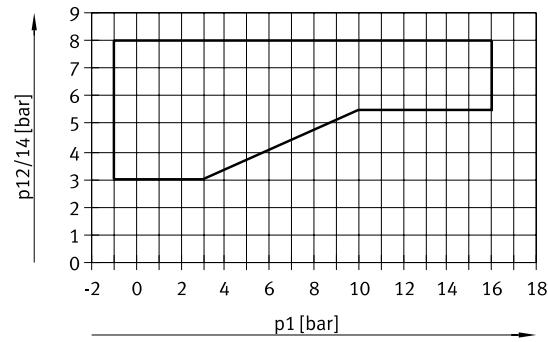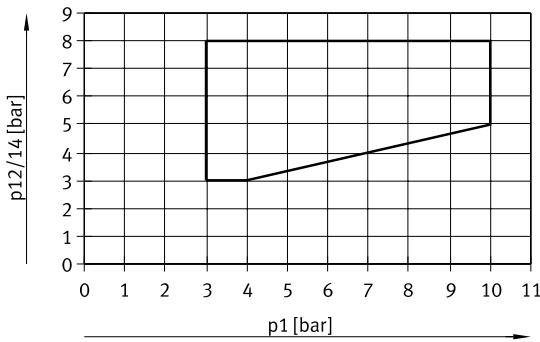

Solenoid valves VSVA, with central plug M8x1, M12x1

Datasheet – Valve size 26 mm


Electrical data							
Electrical connection	Central plug, round design, M8x1 4-pin or M12x1 3-pin						
Characteristic coil data	<table> <tr> <td>Voltage</td><td>[V DC]</td><td>24±10% = 21.6 ... 26.4</td></tr> <tr> <td>Power</td><td>[W]</td><td>High-current phase: 2.4 Low-current phase: 1¹⁾</td></tr> </table>	Voltage	[V DC]	24±10% = 21.6 ... 26.4	Power	[W]	High-current phase: 2.4 Low-current phase: 1 ¹⁾
Voltage	[V DC]	24±10% = 21.6 ... 26.4					
Power	[W]	High-current phase: 2.4 Low-current phase: 1 ¹⁾					
Nominal pick-up current per solenoid coil	[mA] 110 to 20 ms						
Nominal current with current reduction	[mA] 30 after 20 ms						
Duty cycle	% 100						
Protection rating to EN 60529	IP65, Nema 4 (in combination with plug socket)						
Signal status indication	LED						
Reverse polarity protection	For all electrical connections						
Additional functions	Holding current reduction Safety shut-off						
Protection against direct and indirect contact	PELV						

1) Controlled by integrated current reduction

Materials	
Housing	Die-cast aluminium, POM
Seals	HNBR, NBR, FPM
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Dimensions Download CAD data → www.festo.com

Valve with central plug M8x1, VSVA-B-...-1R2L

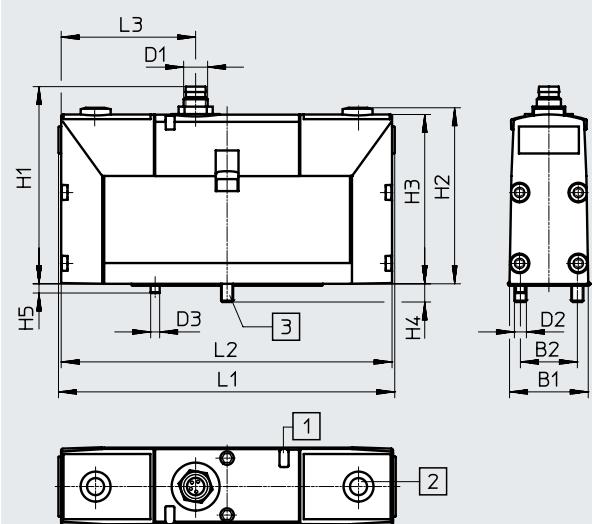


[1] Light emitting diode

[2] Manual override

[3] Captive retaining screws

Valve with central plug M12x1, VSVA-B-...-1R5L

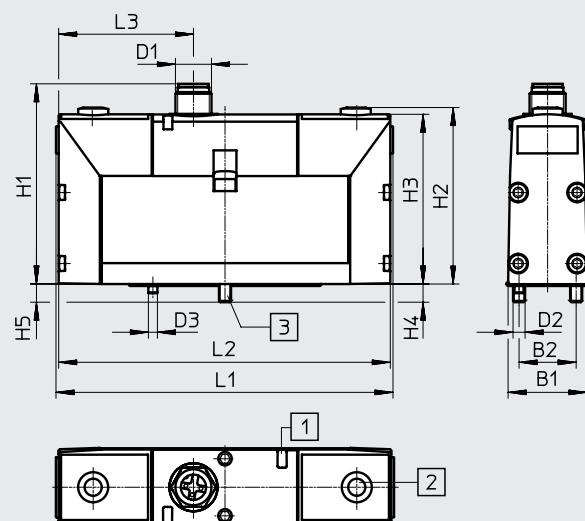

[1] Light emitting diode


[2] Manual override

[3] Captive retaining screws

Type	B1	B2	D1	D2	D3	H1	H2	H3	H4	H5	L1	L2	L3
VSVA-B-...-1R2L	26.3	19	M8x1	M4	3	63.3	59.2	56.6	6	3	112.5	110.7	46.5
VSVA-B-...-1R5L			M12x1			66.6							


Terminal allocation

M8x1



- 1 Unused
- 2 Signal (+) solenoid 12/10
- 3 com (-)
- 4 Signal (+) solenoid 14/10

M12x1



- 2 Signal (+) Solenoid 12
- 3 com (-)
- 4 Signal (+) Solenoid 14

Datasheet – Valve size 26 mm

Ordering data				Part no.	Type	
Code	Circuit symbol					
2x 3/2-way solenoid valve						
K		Normal position: 2x normally closed	Internal pilot air supply	M8x1	534532	VSVA-B-T32C-AH-A1-1R2L
				M12x1	534552	VSVA-B-T32C-AH-A1-1R5L
N		Normal position: 2x normally open	Internal pilot air supply	M8x1	534533	VSVA-B-T32U-AH-A1-1R2L
				M12x1	534553	VSVA-B-T32U-AH-A1-1R5L
H		Normal position: 1x normally closed 1x normally open	Internal pilot air supply	M8x1	534534	VSVA-B-T32H-AH-A1-1R2L
				M12x1	534554	VSVA-B-T32H-AH-A1-1R5L
K		Normal position: 2x normally closed	External pilot air supply	M8x1	534522	VSVA-B-T32C-AZH-A1-1R2L
				M12x1	534542	VSVA-B-T32C-AZH-A1-1R5L
N		Normal position: 2x normally open	External pilot air supply	M8x1	534523	VSVA-B-T32U-AZH-A1-1R2L
				M12x1	534543	VSVA-B-T32U-AZH-A1-1R5L
H		Normal position: 1x normally closed 1x normally open	External pilot air supply	M8x1	534524	VSVA-B-T32H-AZH-A1-1R2L
				M12x1	534544	VSVA-B-T32H-AZH-A1-1R5L
5/2-way valve, single solenoid						
M		Pneumatic spring	Internal pilot air supply	M8x1	534535	VSVA-B-M52-AH-A1-1R2L
				M12x1	534555	VSVA-B-M52-AH-A1-1R5L
O		Mechanical spring	Internal pilot air supply	M8x1	534536	VSVA-B-M52-MH-A1-1R2L
				M12x1	534556	VSVA-B-M52-MH-A1-1R5L
M		Pneumatic spring	External pilot air supply	M8x1	534525	VSVA-B-M52-AZH-A1-1R2L
				M12x1	534545	VSVA-B-M52-AZH-A1-1R5L
O		Mechanical spring	External pilot air supply	M8x1	534526	VSVA-B-M52-MZH-A1-1R2L
				M12x1	534546	VSVA-B-M52-MZH-A1-1R5L


Solenoid valves VSVA, with central plug M8x1, M12x1

Datasheet – Valve size 26 mm

Ordering data			Part no.	Type
Code	Circuit symbol			
5/2-way valve, double pilot				
J		Dominant 1st signal	Internal pilot air supply	M8x1 534537 VSVA-B-B52-H-A1-1R2L
				M12x1 534557 VSVA-B-B52-H-A1-1R5L
D		Dominant at 14	Internal pilot air supply	M8x1 534538 VSVA-B-D52-H-A1-1R2L
				M12x1 534558 VSVA-B-D52-H-A1-1R5L
J		Dominant 1st signal	External pilot air supply	M8x1 534527 VSVA-B-B52-ZH-A1-1R2L
				M12x1 534547 VSVA-B-B52-ZH-A1-1R5L
D		Dominant at 14	External pilot air supply	M8x1 534528 VSVA-B-D52-ZH-A1-1R2L
				M12x1 534548 VSVA-B-D52-ZH-A1-1R5L
5/3-way solenoid valve				
G		Normally closed	Internal pilot air supply	M8x1 534539 VSVA-B-P53C-H-A1-1R2L
				M12x1 534559 VSVA-B-P53C-H-A1-1R5L
B		Normally open	Internal pilot air supply	M8x1 534541 VSVA-B-P53U-H-A1-1R2L
				M12x1 534561 VSVA-B-P53U-H-A1-1R5L
E		Normally exhausted	Internal pilot air supply	M8x1 534540 VSVA-B-P53E-H-A1-1R2L
				M12x1 534560 VSVA-B-P53E-H-A1-1R5L
G		Normally closed	External pilot air supply	M8x1 534529 VSVA-B-P53C-ZH-A1-1R2L
				M12x1 534549 VSVA-B-P53C-ZH-A1-1R5L
B		Normally open	External pilot air supply	M8x1 534531 VSVA-B-P53U-ZH-A1-1R2L
				M12x1 534551 VSVA-B-P53U-ZH-A1-1R5L
E		Normally exhausted	External pilot air supply	M8x1 534530 VSVA-B-P53E-ZH-A1-1R2L
				M12x1 534550 VSVA-B-P53E-ZH-A1-1R5L

Datasheet – Valve size 18 mm

-  - Flow rate
550 ... 750 l/min

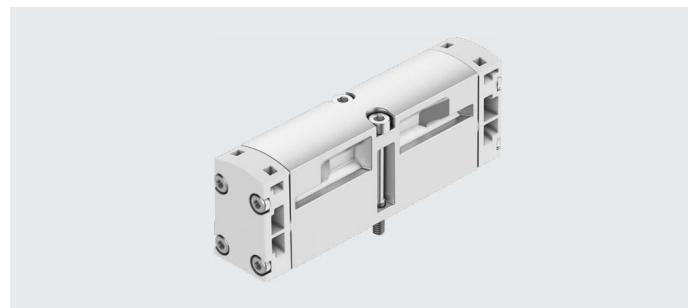

General technical data		2x 3/2-way valve	5/2-way valve		5/3-way valve
Valve function					
Normal position		C ¹⁾ , U ²⁾ , H ⁴⁾	–		C ¹⁾ , U ²⁾ , E ³⁾
Stable position		Monostable	Monostable	Bistable	Monostable
Pneumatic spring return		Yes	Yes	–	No
Mechanical spring return		No	Yes	–	Yes
Design		Piston spool			
Overlap		Positive overlap			
Sealing principle		Soft			
Actuation type		Pneumatic			
Type of control		Direct			
Flow direction		Not reversible	Reversible	Reversible	Reversible
Exhaust air function		Can be throttled			
Type of mounting		On sub-base			
Mounting position		Any			
Nominal width	[mm]	5			
Valve size	[mm]	18			
Ports on the sub-base	1, 2, 3, 4, 5 12, 14	G1/8 M5			
Tightening torque for valve mounting	[Nm]	0.9 ... 1.1			
Product weight	[g]	80			
Conforms to standard		ISO 15407-1, VDMA 24563			

- 1) C = Normally closed
- 2) U = Normally open
- 3) E = Normally exhausted
- 4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open



Flow rates	Valve function	2x 3/2-way valve	5/2-way valve		5/3-way valve
			Single solenoid	Double solenoid	
Flow rate of valve	[l/min]	600	750	750	650
Flow rate of valve on individual sub-base	[l/min]	450	550	550	500
Flow rate of pneumatically linked valve	[l/min]	400	550	550	450
Standard nominal flow rate	[l/min]	400	550	550	450

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 3/2-way valve		10	15	–	–
5/2-way valve, single solenoid	Pneumatic spring	11	20	–	–
	Mechanical spring	8	18	–	–
5/2-way valve, double solenoid		–	–	6	6
5/3-way valve		9	18	–	–

Datasheet – Valve size 18 mm










Operating and environmental conditions		2x 3/2-way valve	5/2-way valve Single solenoid	5/2-way valve Double solenoid	5/3-way valve
Valve function					
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]			
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]			
Note on the operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)			
Operating pressure	With pneumatic spring [bar]	2 ... 10	2 ... 10	-0.9 ... 10	-
	With mechanical spring [bar]	-	-0.9 ... 10	-	-0.9 ... 10
Pilot pressure	With pneumatic spring [bar]	2 ... 10	2 ... 10	2 ... 10	-
	With mechanical spring [bar]	-	3 ... 10	-	3 ... 10
Ambient temperature	[°C]	-10 ... +60			
Temperature of medium	[°C]	-10 ... +60			
Relative humidity	[%]	0 ... 90			

Materials	
Housing	Die-cast aluminium
Seals	NBR
Screws	Galvanised steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

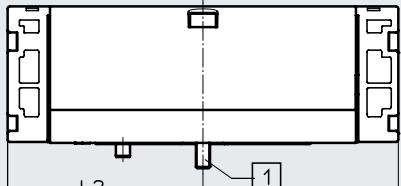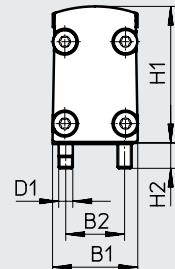Dimensions		Download CAD data → www.festo.com
		
[1] Captive screws	[2] Slot for inscription label	


Type	B1	B2	D1	H1	H2	L1	L2
VSPA-B	18	12.5	M3	29	5.4	83	41.5

Datasheet – Valve size 18 mm

Ordering data			Part no.	Type
Code	Circuit symbol			
2x 3/2-way pneumatic valve				
K		2x normally closed	546721	VSPA-B-T32C-A2
N		2x normally open	546722	VSPA-B-T32U-A2
H		Normal position: 1x normally closed 1x normally open	546723	VSPA-B-T32H-A2
5/2-way pneumatic valve, monostable				
M		Pneumatic spring	546726	VSPA-B-M52-A-A2
O		Mechanical spring	546727	VSPA-B-M52-M-A2
5/2-way pneumatic valve, bistable				
J		Dominant 1st signal	546724	VSPA-B-B52-A2
D		Dominant at 14	546725	VSPA-B-D52-A2
5/3-way pneumatic valve				
G		Normally closed	546730	VSPA-B-P53C-A2
B		Normally open	546728	VSPA-B-P53U-A2
E		Normally exhausted	546729	VSPA-B-P53E-A2

Datasheet – Valve size 26 mm

-  Flow rate
1250 ... 1400 l/min

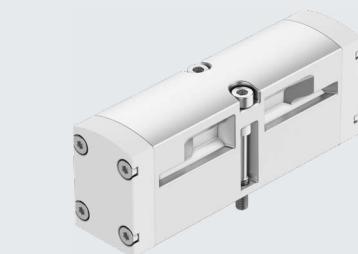

General technical data	2x 3/2-way valve	5/2-way valve	5/3-way valve
Valve function			
Normal position	C ¹⁾ , U ²⁾ , H ⁴⁾	–	–
Stable position	Monostable	Monostable	Bistable
Pneumatic spring return	Yes	Yes	–
Mechanical spring return	No	Yes	–
Design	Piston spool		
Overlap	Positive overlap		
Sealing principle	Soft		
Actuation type	Pneumatic		
Type of control	Direct		
Flow direction	Not reversible	Reversible	Reversible
Exhaust air function	Can be throttled		
Type of mounting	On sub-base		
Mounting position	Any		
Nominal width	[mm]	9	
Valve size	[mm]	26	
Ports on the sub-base	1, 2, 3, 4, 5 12, 14	G1/4 M5	
Tightening torque for valve mounting	[Nm]	1.8 ... 2.2	
Product weight	[g]	180	
Conforms to standard		ISO 15407-1, VDMA 24563	

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H=2x 3/2-way valve in one housing with 1x normally closed and 1x normally open


Flow rates	Valve function	2x 3/2-way valve	5/2-way valve		5/3-way valve
			Single solenoid	Double solenoid	
Flow rate of valve	[l/min]	1250	1400	1400	1400
Flow rate of valve on individual sub-base	[l/min]	1000	1100	1100	1100
Flow rate of pneumatically linked valve	[l/min]	900	1100	1100	1000
Standard nominal flow rate	[l/min]	900	1100	1100	1000

Switching times [ms]		Switching time on	Switching time off	Switching time changeover	Switching time changeover (dominant)
2x 3/2-way valve		15	28	–	–
5/2-way valve, single solenoid	Pneumatic spring	18	30	–	–
	Mechanical spring	10	35	–	–
5/2-way valve, double solenoid		–	–	10	10
5/3-way valve		13	32	–	–

Datasheet – Valve size 26 mm

Operating and environmental conditions		2x 3/2-way valve	5/2-way valve Single solenoid	5/2-way valve Double solenoid	5/3-way valve
Valve function					
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]			
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]			
Note on the operating/pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)			
Operating pressure	With pneumatic spring [bar]	2 ... 10	2 ... 10	-0.9 ... 16	-
	With mechanical spring [bar]	-	-0.9 ... 16	-	-0.9 ... 16
Pilot pressure	With pneumatic spring [bar]	2 ... 10	2 ... 10	2 ... 10	-
	With mechanical spring [bar]	-	3 ... 10	-	3 ... 10
Ambient temperature	[°C]	-10 ... +60			
Temperature of medium	[°C]	-10 ... +60			
Relative humidity	[%]	0 ... 90			

Materials	
Housing	Die-cast aluminium
Seals	NBR
Screws	Galvanised steel
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

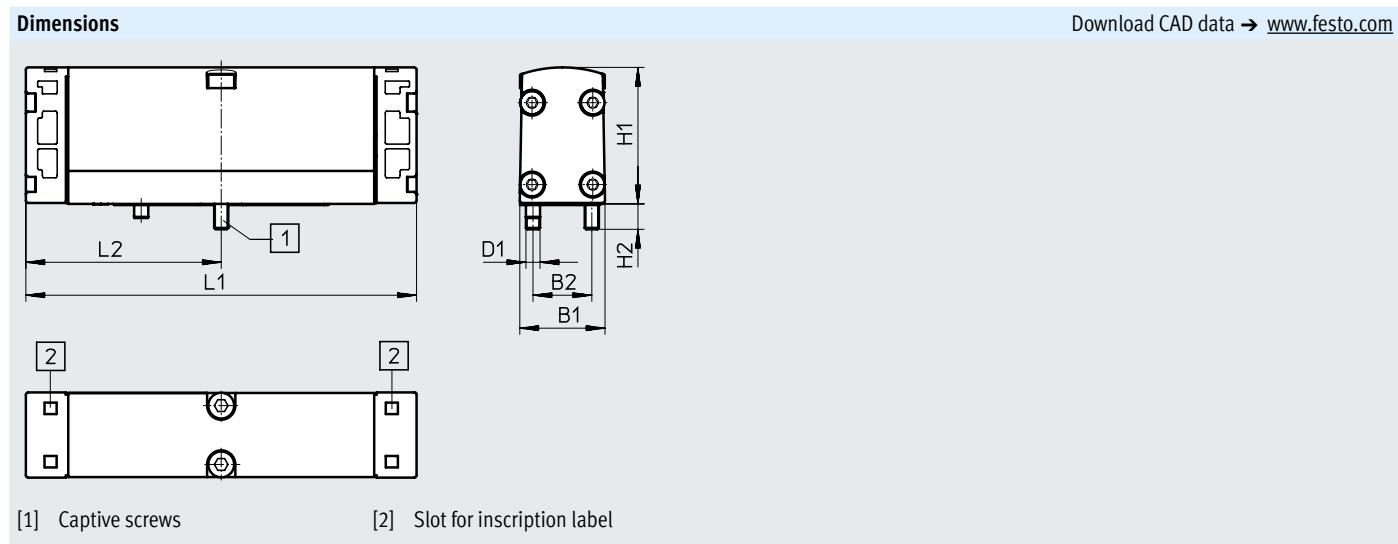

Datasheet – Valve size 26 mm

Ordering data			Part no.	Type
Code	Circuit symbol			
2x 3/2-way pneumatic valve				
K		2x normally closed	546711	VSPA-B-T32C-A1
N		2x normally open	546712	VSPA-B-T32U-A1
H		Normal position: 1x normally closed 1x normally open	546713	VSPA-B-T32H-A1
5/2-way pneumatic valve, monostable				
M		Pneumatic spring	546716	VSPA-B-M52-A-A1
O		Mechanical spring	546717	VSPA-B-M52-M-A1
5/2-way pneumatic valve, bistable				
J		Dominant 1st signal	546714	VSPA-B-B52-A1
D		Dominant at 14	546715	VSPA-B-D52-A1
5/3-way pneumatic valve				
G		Normally closed	546720	VSPA-B-P53C-A1
B		Normally open	546718	VSPA-B-P53U-A1
E		Normally exhausted	546719	VSPA-B-P53E-A1

Vertical stacking

Regulator plate

VABF-S3-2-R

VABF-S3-1-R

- - Temperature range
-5 ... +50 °C

- - Input pressure
0.5 ... 10 bar

Pressure regulation ranges:

- 0.05 ... 0.6 MPa
- 0.05 ... 0.85 MPa
- 0.2 ... 0.6 MPa
- 0.2 ... 0.85 MPa

Output pressure constant with secondary venting

Material:


Housing: Die-cast aluminium
Control section: PA

Note on materials:

RoHS-compliant

LABS (PWIS) conformity:

VDMA24364-B1/B2-L

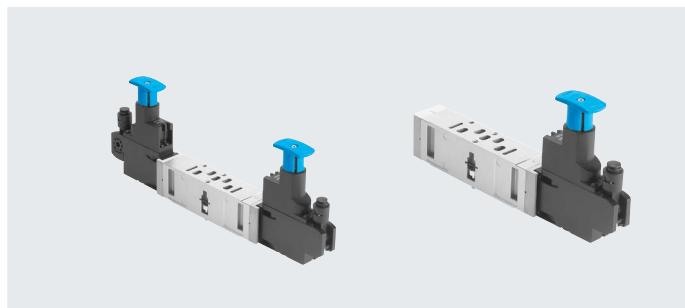

General technical data

Based on standard	ISO 15407-1	
Mounting position	Any	
Regulator function	Output pressure constant With secondary exhausting	
Type of mounting for vertical stacking	On manifold sub-base On individual sub-base	
Optional pressure gauge	possible	
Pressure gauge connection	With retaining clamp	
Input pressure 1	[bar]	0.5 ... 10


Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	
Ambient temperature	[°C]	-5 ... +50
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress	
Degree of protection	IP65 NEMA 4	

1) More information: www.festo.com/x/topic/crc

Vertical stacking

Dimensions

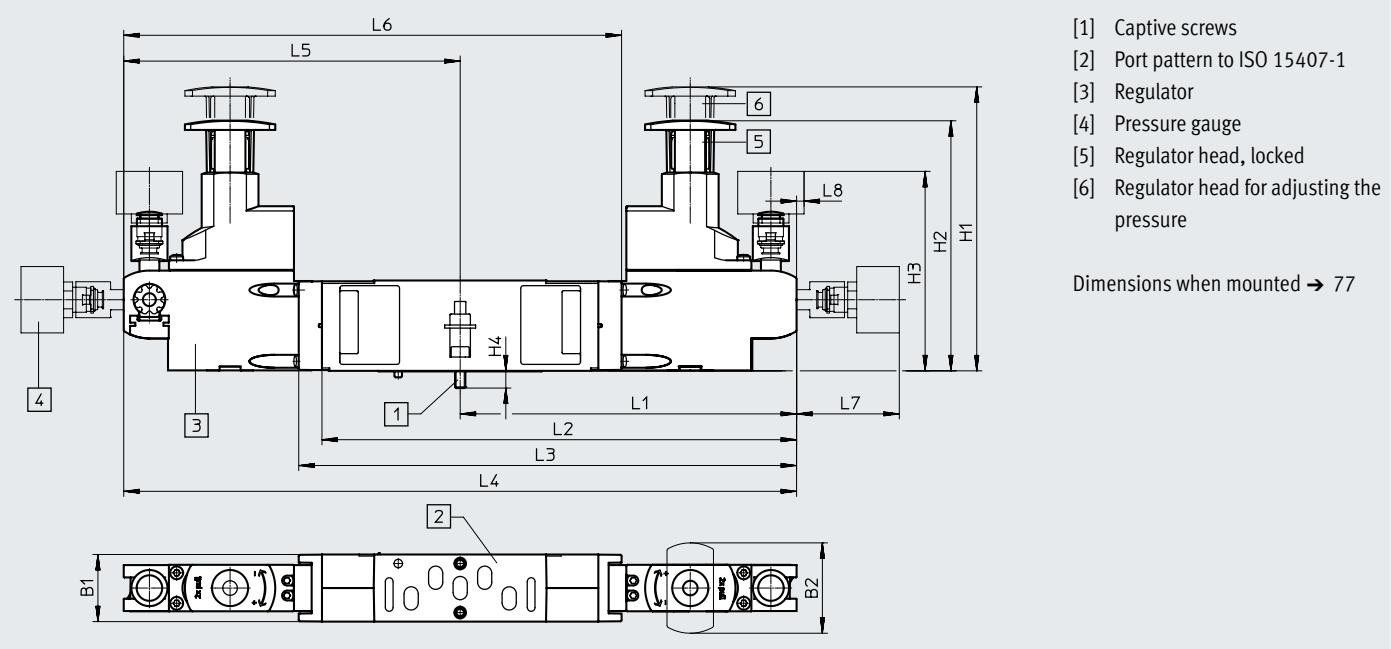Download CAD data → www.festo.com

Type	B1	B2	H1	H2	H3	H4	L1	L2	L3	L4	L5	L6	L7	L8
VABFS3-2-R1	18	35	110	97	77.3	5.6	126.7	180.6	—	—	—	—	39.8	2.9
VABF-S3-2-R2							126.7	—	187.7	—	—	—		
VABFS3-2-R3							—	—	—	—	126.7	187.7		
VABFS3-2-R4							126.7	—	—	253.4	—	—		
VABFS3-2-R5							126.7	—	—	253.4	—	—		
VABFS3-2-R6							126.7	—	187.7	—	—	—		
VABFS3-2-R7							—	—	—	—	126.7	187.7		
VABFS3-1-R1	26	35	110	97	77.3	5.6	130.4	183.9	183.9	—	—	—	39.8	2.9
VABFS3-1-R2							130.4	—	192.9	—	—	—		
VABFS3-1-R3							—	—	—	—	130.4	192.9		
VABFS3-1-R4							130.4	—	—	260.7	—	—		
VABFS3-1-R5							130.4	—	—	260.7	—	—		
VABFS3-1-R6							130.4	195	195	—	—	—		
VABFS3-1-R7							—	—	—	—	130.4	192.9		

Vertical stacking

Ordering data		Regulating range	Valve size [mm]	Weight [g]	Part no.	Type
Pressure regulator for 1						
ZA		0.05 ... 0.85 MPa 0.5 ... 8.5 bar 7.25 ... 123.25 psi	18	370	543526	VABF-S3-2-R1C2-C-10
			26	305	543527	VABF-S3-1-R1C2-C-10
ZF		0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	18	370	543524	VABF-S3-2-R1C2-C-6
			26	305	543525	VABF-S3-1-R1C2-C-6
Pressure regulator for 2						
ZC		0.2 ... 0.85 MPa 2 ... 8.5 bar 29 ... 123.25 psi	18	245	543534	VABF-S3-2-R2C2-C-10
			26	305	543535	VABF-S3-1-R2C2-C-10
ZH		0.2 ... 0.6 MPa 2 ... 6 bar 29 ... 87 psi	18	245	543532	VABF-S3-2-R2C2-C-6
			26	305	543533	VABF-S3-1-R2C2-C-6
Pressure regulator for 4						
ZB		0.2 ... 0.85 MPa 2 ... 8.5 bar 29 ... 123.25 psi	18	245	543530	VABF-S3-2-R3C2-C-10
			26	305	543531	VABF-S3-1-R3C2-C-10
ZG		0.2 ... 0.6 MPa 2 ... 6 bar 29 ... 87 psi	18	245	543528	VABF-S3-2-R3C2-C-6
			26	305	543529	VABF-S3-1-R3C2-C-6
Pressure regulator for 2 and 4						
ZD		0.2 ... 0.85 MPa 2 ... 8.5 bar 29 ... 123.25 psi	18	370	543538	VABF-S3-2-R4C2-C-10
			26	430	543539	VABF-S3-1-R4C2-C-10
ZI		0.2 ... 0.6 MPa 2 ... 6 bar 29 ... 87 psi	18	370	543536	VABF-S3-2-R4C2-C-6
			26	430	543537	VABF-S3-1-R4C2-C-6
Pressure regulator for 2 and 4 reversible						
ZE		0.05 ... 0.85 MPa 0.5 ... 8.5 bar 7.25 ... 123.25 psi	18	245	543542	VABF-S3-2-R5C2-C-10
			26	430	543543	VABF-S3-1-R5C2-C-10
ZJ		0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	18	245	543540	VABF-S3-2-R5C2-C-6
			26	430	543541	VABF-S3-1-R5C2-C-6
Pressure regulator for 2 reversible						
ZL		0.05 ... 0.85 MPa 0.5 ... 8.5 bar 7.25 ... 123.25 psi	18	245	546788	VABF-S3-2-R6C2-C-10
			26	305	546789	VABF-S3-1-R6C2-C-10
ZN		0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	18	245	546786	VABF-S3-2-R6C2-C-6
			26	305	546787	VABF-S3-1-R6C2-C-6
Pressure regulator for 4 reversible						
ZK		0.05 ... 0.85 MPa 0.5 ... 8.5 bar 7.25 ... 123.25 psi	18	245	546792	VABF-S3-2-R7C2-C-10
			26	305	546793	VABF-S3-1-R7C2-C-10
ZM		0.05 ... 0.6 MPa 0.5 ... 6 bar 7.25 ... 87 psi	18	245	546790	VABF-S3-2-R7C2-C-6
			26	305	546791	VABF-S3-1-R7C2-C-6

Vertical stacking

Throttle plate

VABF-S3-2-F**VABF-S3-1-F**

- Temperature range
-5 ... +50 °C
- Operating pressure
-0.9 ... 10 bar

Material:


Housing: Die-cast aluminium

Note on materials:

RoHS-compliant

LABS (PWIS) conformity:

VDMA24364-B1/B2-L

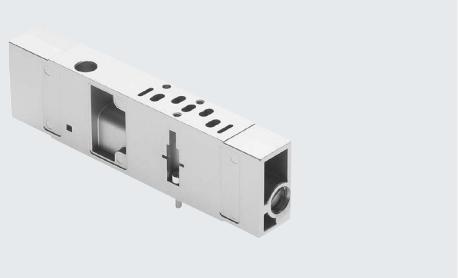

General technical data


Based on standard	ISO 15407-1
Mounting position	Any
Pneumatic vertical stacking	Throttle plate, exhaust air flow control
Type of mounting for vertical stacking	On manifold sub-base On individual sub-base

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure	[bar] -0.9 ... 10
Ambient temperature	[°C] -5 ... +50
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress
Degree of protection	IP65 NEMA 4

1) More information www.festo.com/x/topic/crc

Dimensions

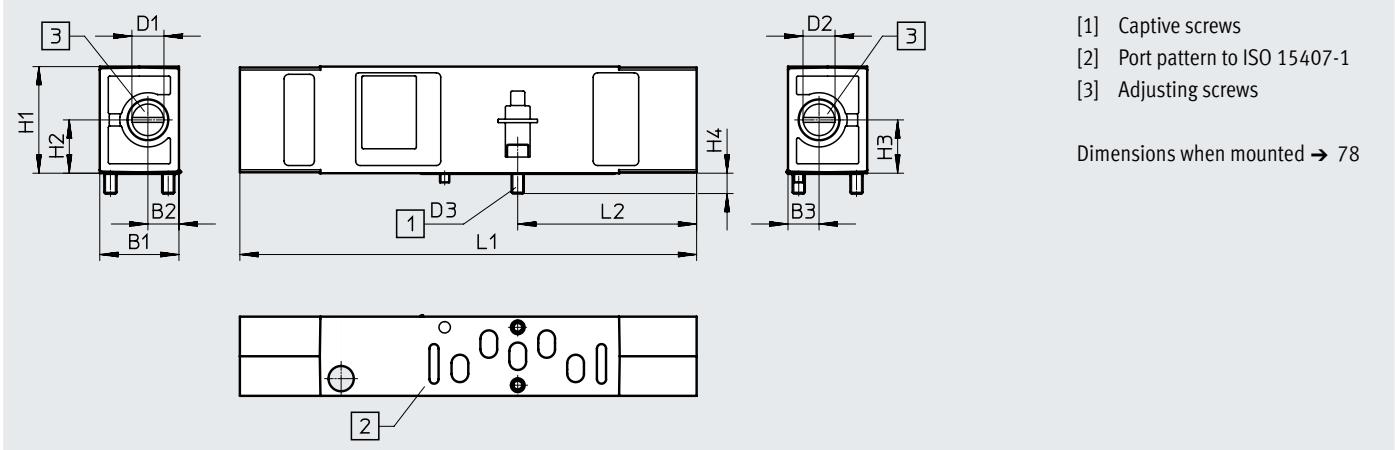Download CAD data → www.festo.com

Type	B1	B2	B3	D1	D2	D3	H1	H2	H3	H4	L1	L2
VABF-S3-2-F1B1-C	18	6.5	6.5	9.3	9.3	M3x 12	35	12	12	5.6	130	43.3
VABF-S3-1-F1B1-C	26	10.2	10.2	11.2	11.2	M4x 12	35	17.5	17.5	6.7	150	58.8

Ordering data

Code	Circuit symbol	Description	Valve size [mm]	Weight [g]	Part no.	Type
X		For exhaust air flow control in ducts 3 and 5 on the valve	18	228	543603	VABF-S3-2-F1B1-C
			26	320	543604	VABF-S3-1-F1B1-C

Vertical stacking

Vertical supply plate

VABF-S3-2-P

VABF-S3-1-P

- - Temperature range
-5 ... +50 °C
- - Operating pressure
-0.9 ... +10 bar

Material:

Housing: Die-cast aluminium

Note on materials:

RoHS-compliant

LABS (PWIS) conformity:

VDMA24364-B1/B2-L



General technical data

Based on standard	ISO 15407-1
Mounting position	Any
Pneumatic vertical stacking	Alternative compressed air supply for 1
Type of mounting for vertical stacking	On manifold sub-base
	On individual sub-base

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure	[bar] -0.9 ... 10
Ambient temperature	[°C] -5 ... +50
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress
Degree of protection	IP65
	NEMA 4

1) More information www.festo.com/x/topic/crc


Dimensions

Download CAD data → www.festo.com

[1] Captive screws

[2] Port pattern to ISO 15407-1

Dimensions when mounted → 79

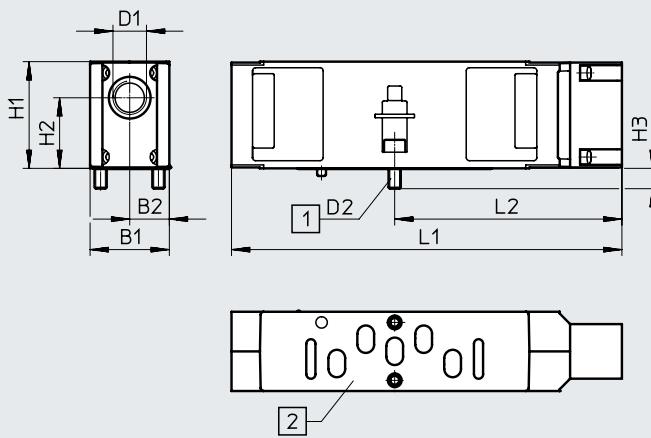

Type	B1	B2	D1	D2	H1	H2	H3	L1	L2
VABF-S3-2-P1A3-G18	18	9	G1/8	M3x 12	35	23.4	5.6	121.6	67.7
VABF-S3-1-P1A3-G14	26	13	G1/4	M4x 12	35	23.2	6.7	128.1	74.6

Ordering data

Code	Circuit symbol	Description	Valve size [mm]	Flow rate [l/min]	Weight [g]	Part no.	Type
ZU		For the independent supply of a valve	18	500	146	544435	VABF-S3-2-P1A3-G18
			26	1000	201	544434	VABF-S3-1-P1A3-G14

Vertical stacking

Vertical pressure shut-off plate

VABF-S3-2-L**VABF-S3-1-L**

- Temperature range
-5 ... +50 °C
- Input pressure
-0.9 ... +10 bar

Material:

Housing: Die-cast aluminium

Note on materials:

RoHS-compliant

LABS (PWIS) conformity:

VDMA24364-B1/B2-L



General technical data


Based on standard	ISO 15407-1
Mounting position	Any
Pneumatic vertical stacking	Shut-off for 1
Type of mounting for vertical stacking	On manifold sub-base On individual sub-base

Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure	[bar] -0.9 ... 10
Ambient temperature	[°C] -5 ... +50
Corrosion resistance class CRC ¹⁾	0 - no corrosion stress
Degree of protection	IP65 NEMA 4

1) More information www.festo.com/x/topic/crc

Dimensions

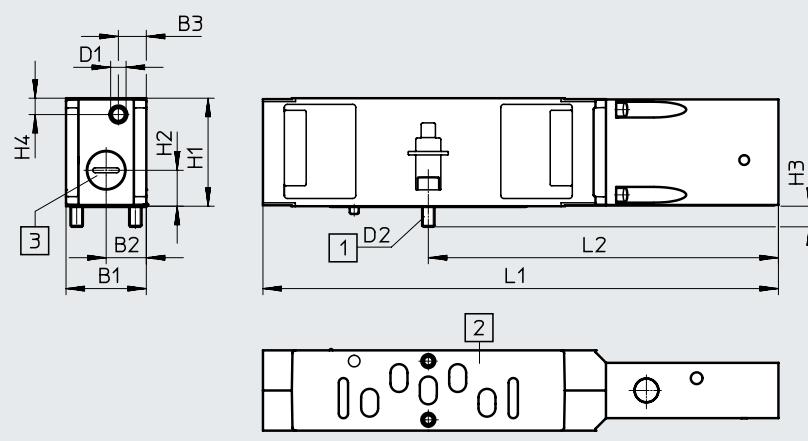Download CAD data → www.festo.com

- [1] Captive screws
[2] Port pattern to ISO 15407-1
[3] Plug screw

Dimensions when mounted → 80

Type	B1	B2	B3	D1	D2	H1	H2	H3	H4	L1	L2
VABF-S3-2-L1D1-C	18	9	5.1	M5	M3x 12	35	11.7	5.6	5.3	163.7	109.8
VABF-S3-1-L1D1-C	26	13	9.1	M5	M4x 12	35	11.6	6.7	5.3	167	113.4

Ordering data

Code	Circuit symbol	Description	Valve size [mm]	Flow rate [l/min]	Weight [g]	Part no.	Type
ZT		For shutting off a valve from the supply pressure	18	400	212	543601	VABF-S3-2-L1D1-C
			26	800	286	543602	VABF-S3-1-L1D1-C

Individual linking

Individual sub-base NAS

Materials:

Die-cast aluminium

LABS (PWIS) conformity:

VDMA24364-B1/B2-L




Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)

Dimensions

Download CAD data → www.festo.com

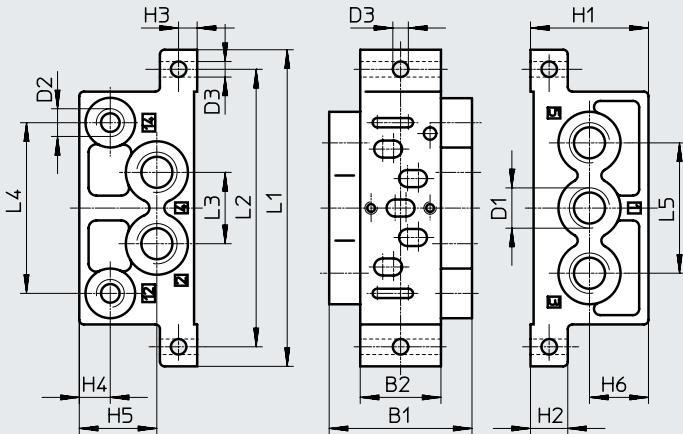

Type	B1	B2	D1	D2	D3	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5
NAS-1/8-02-VDMA	28.5	18	G1/8	M5	5.5	31	10	5	7	20	14.5	79	66.5	17	40	32
NAS-1/4-01-VDMA	46	26	G1/4	G1/8	5	38	12	6	10	25	19	102	89.4	23	55	42

Ordering data

Type of mounting	Valve size [mm]	Pneumatic connection		Weight [g]	Part no.	Type
		1, 2, 3, 4, 5	12, 14			
Two through-holes in the housing	18	G1/8	M5	67	161115	NAS-1/8-02-VDMA
	26	G1/4	G1/8	160	161109	NAS-1/4-01-VDMA

Horizontal stacking

Manifold sub-base NAW

Materials:

Die-cast aluminium

LABS (PWIS) conformity:
VDMA24364-B1/B2-L



General technical data

Based on standard

ISO 15407-1

Operating and environmental conditions

Operating medium

Compressed air to ISO 8573-1:2010 [7:4:4]

Note on the operating/pilot medium

Lubricated operation possible (in which case lubricated operation will always be required)

Ordering data

Manifold sub-base	Valve size [mm]	Pneumatic connection 2, 4	Pneumatic connection 12, 14	Weight [g]	Part no.	Type
For solenoid valves	18	G1/8	–	130	161110	NAW-1/8-02-VDMA
	26	G1/4	–	225	161102	NAW-1/4-01-VDMA
For pneumatic valves	18	G1/8	M5	130	161111	NAW-1/8-02-VDMA-VL
	26	G1/4	M5	225	161103	NAW-1/4-01-VDMA-VL

Dimensions → 74

End plate kit NEV

Materials:

Die-cast aluminium

LABS (PWIS) conformity:
VDMA24364-B1/B2-L



Operating and environmental conditions

Operating medium

Compressed air to ISO 8573-1:2010 [7:4:4]

Note on the operating/pilot medium

Lubricated operation possible (in which case lubricated operation will always be required)

Ordering data

Scope of delivery	Valve size [mm]	Pneumatic connection 1, 3, 5	Pneumatic connection 12, 14	Weight [g]	Part no.	Type
End plate left and right, screws, DIN rail mounting, one isolating disc each for ports 1, 3, 5, 12 and 14	18	G3/8	G1/8	280	161112	NEV-02-VDMA
	26	G1/2	G1/8	445	161104	NEV-01-VDMA
End plate left 18 mm and right 26 mm, screws, DIN rail mounting	18, 26	G3/8, G1/2	G1/8	372	191405	NEV-02-01-VDMA

Dimensions → 74

Horizontal stacking

Intermediate plate NZV

For combining manifold with valve sizes 18 mm and 26 mm

Materials:
Die-cast aluminium

LABS (PWIS) conformity:
VDMA24364-B1/B2-L




Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)

Dimensions

Download CAD data → www.festo.com

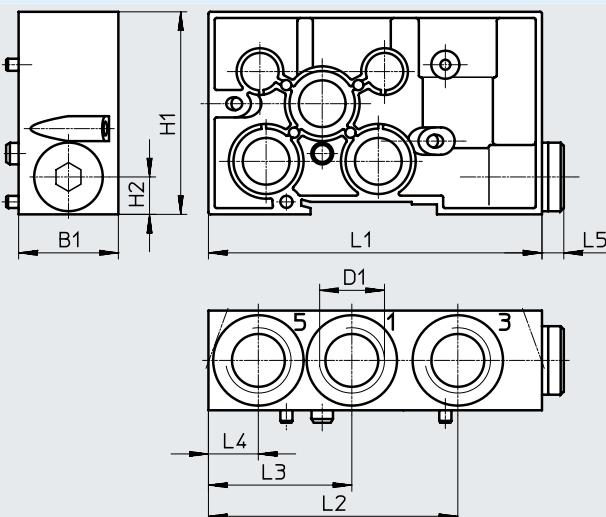


Type	B1	D1	H1	H2	L1	L2	L3	L4	L5
NZV-0 1/02-VDMA	32	G1/2	65	12	107	80	46	16	7

Ordering data

Description	Valve size [mm]	Pneumatic connection		Weight [g]	Part no.	Type
		1, 3, 5	12, 14			
Intermediate plate to combine manifold sub-bases of valve size 18 mm and 26 mm	18 and 26	G1/2	–	270	161108	NZV-01/02-VDMA

Datasheet

Dimensions – Manifold sub-bases without valves

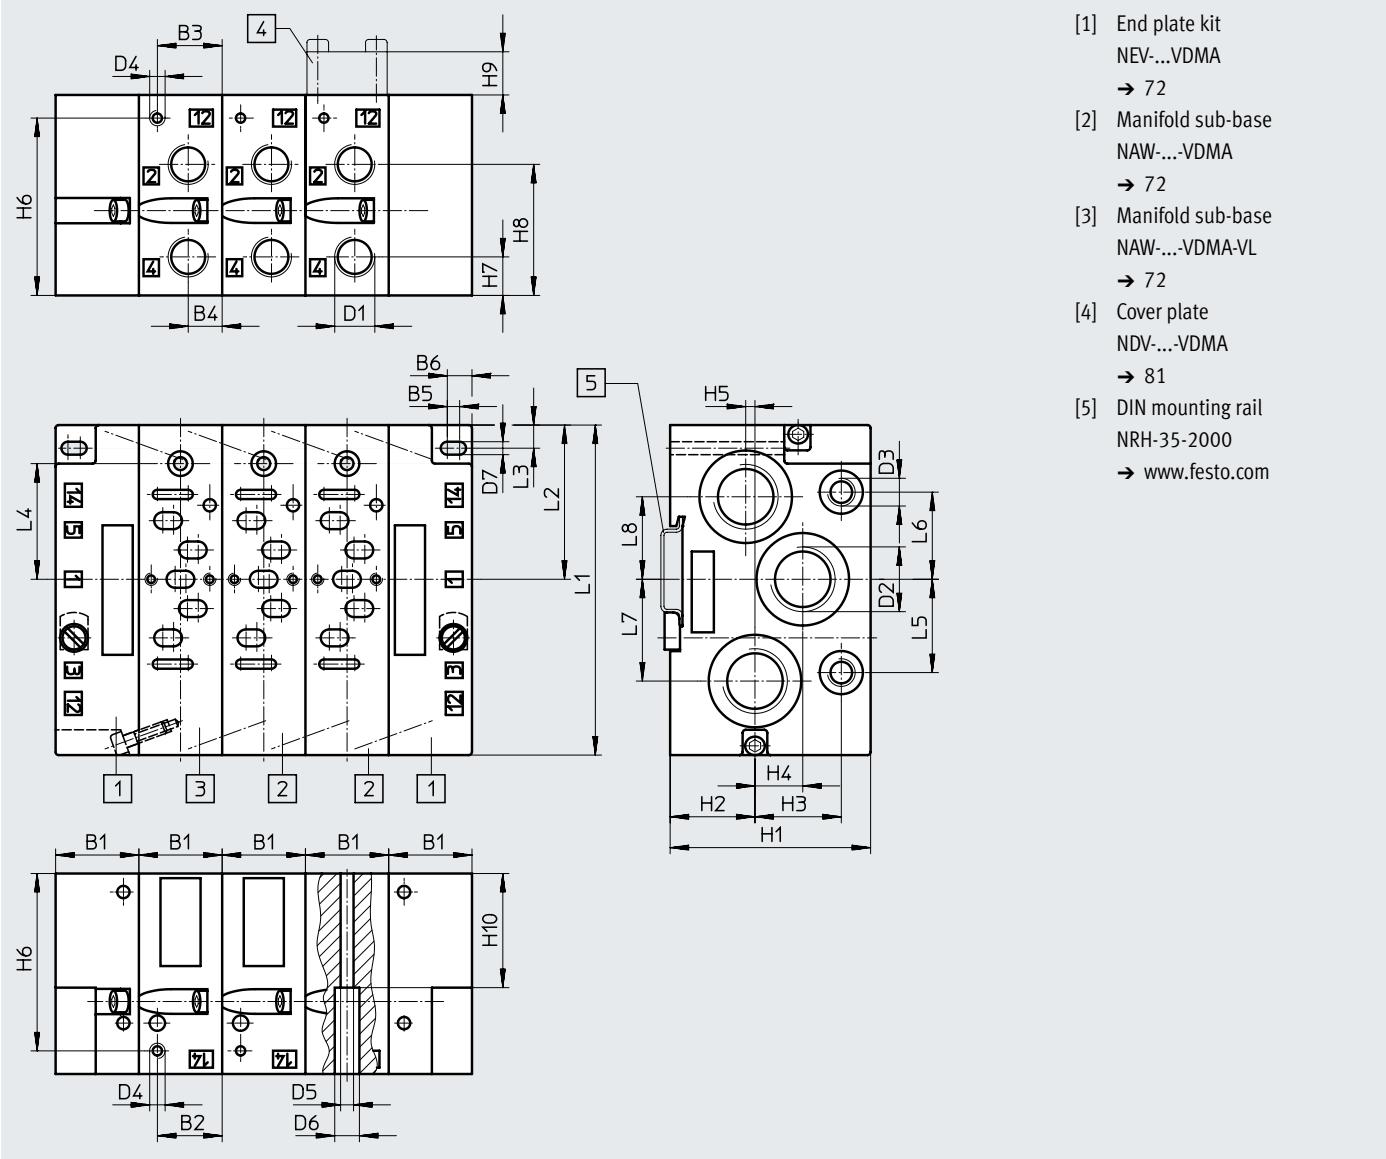Download CAD data → www.festo.com


- [1] End plate kit
NEV-...-VDMA
→ 72
- [2] Manifold sub-base
NAW-...-VDMA
→ 72
- [3] Manifold sub-base
NAW-...-VDMA-VL
→ 72
- [4] Cover plate
NDV-...-VDMA
→ 81
- [5] DIN mounting rail
NRH-35-2000
→ www.festo.com

Valve size [mm]	B1	B2	B3	B4	B5	B6	D1	D2	D3	D4	D5	D6	D7
18	19	6	13	7.5	1	4.5	G1/8	G3/8	G1/8	M5	3.3	6.3	4.3
26	27	21	21	11	4	8	G1/4	G1/2	G1/8	M5	4.2	8	4.2

Valve size [mm]	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	L1	L2	L3	L4	L5	L6	L7	L8
18	55	17	28.8	18.5	—	48	10.5	35.5	12	40	81	36.5	5.6	30.9	20	20	18	18
26	65	27.5	28	15.5	3	57.5	12.5	42.5	14	37	107	50	7.5	37.5	30.3	28.3	33	26.8

Datasheet

Dimensions – Manifold assembly, valve size 18 mm

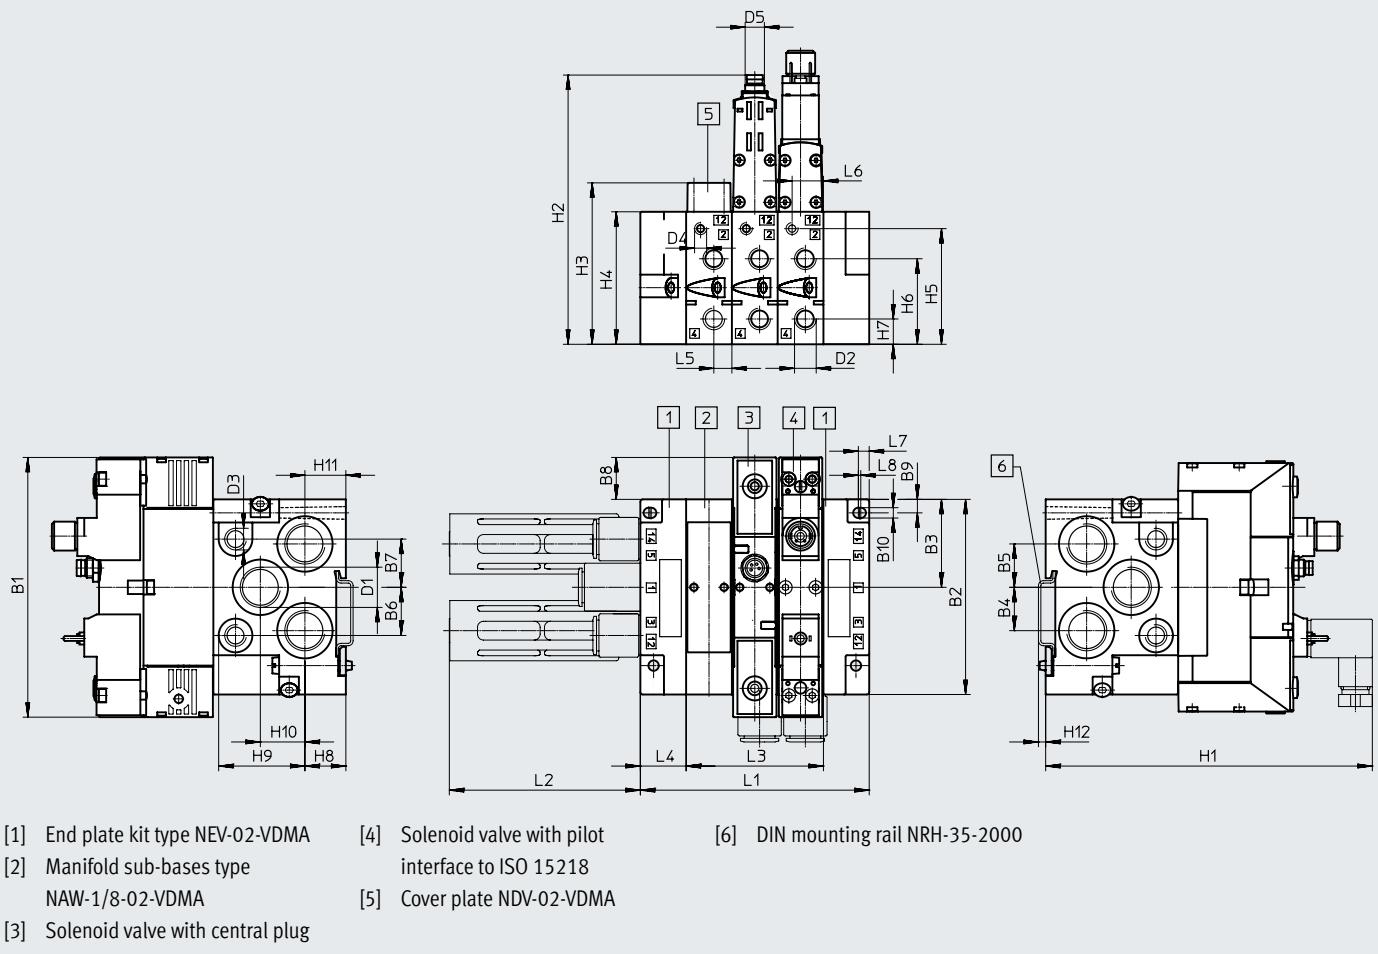
Download CAD data → www.festo.com

Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	D1	D2	D3	D4	D5	H1	H2	H3
VSVA-B...A2	107.8	81	36.5	18	18	20	20	17.4	5.6	4.3	G3/8	G1/8	G1/8	M5	–	135.6	55	67
VSVA-B-M52...A2	95.4	81	36.5	18	18	20	20	5	5.6	4.3	G3/8	G1/8	G1/8	M5	–	135.6	55	67
VSVA-B...A2-R2L	107.8	81	36.5	18	18	20	20	17.4	5.6	4.3	G3/8	G1/8	G1/8	M5	M8	121.8	111.8	67
VSVA-B...A2-R5L	107.8	81	36.5	18	18	20	20	17.4	5.6	4.3	G3/8	G1/8	G1/8	M5	M12	121.8	111.8	67

Type	H4	H5	H6	H7	H8	H9	H10	H11	H12	L1	L2	L3	L4	L5	L6	L7	L8
VSVA-B...A2	55	48	35.5	10.5	17	35.9	18.5	17	3.5	38 + nx 19	79.1	nx 19	19	7.5	13	4.5	1
VSVA-B-M52...A2	55	48	35.5	10.5	17	35.9	18.5	17	3.5	38 + nx 19	79.1	nx 19	19	7.5	13	4.5	1
VSVA-B...A2-R2L	55	48	35.5	10.5	17	35.8	18.5	17	3.5	38 + nx 19	79.1	nx 19	19	7.5	13	4.5	1
VSVA-B...A2-R5L	55	48	35.5	10.5	17	35.8	18.5	17	3.5	38 + nx 19	79.1	nx 19	19	7.5	13	4.5	1

Datasheet

Dimensions – Manifold assembly, valve size 26 mm

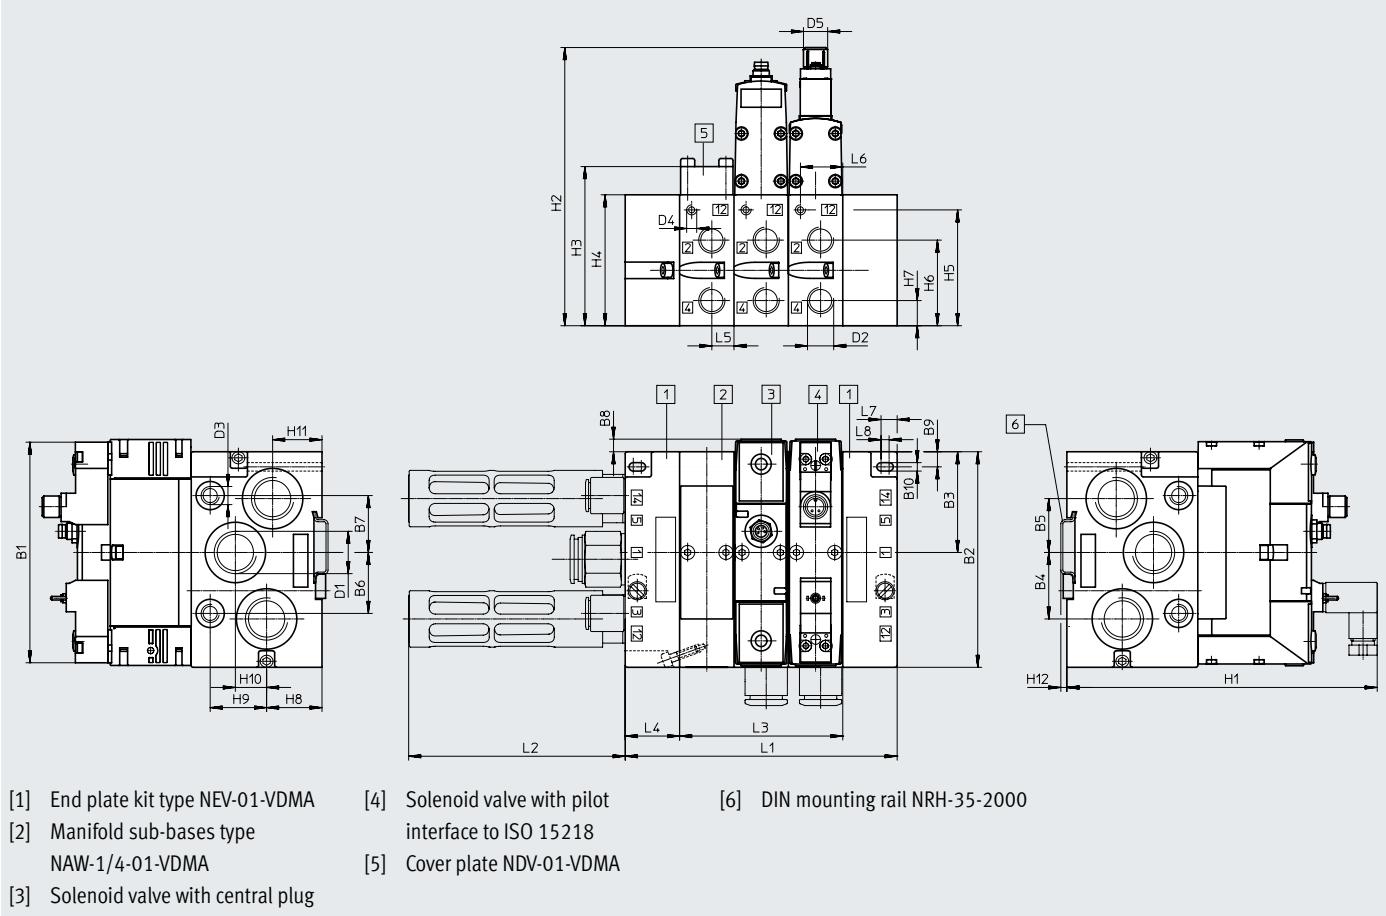Download CAD data → www.festo.com


Type	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	D1	D2	D3	D4	D5	H1	H2
VSPA-B-...A1	113.1	107	50	33	26.8	30.3	28.3	13.1	7.5	4.2	G1/2	G1/4	G1/8	M5	–	154.2	65
VSPA-B-M52-...A1	126.2	107	50	33	26.8	30.3	28.3	13.1	7.5	4.2	G1/2	G1/4	G1/8	M5	–	154.2	65
VSPA-B-...A1-R2L	112.5	107	50	33	26.8	30.3	28.3	6.3	7.5	4.2	G1/2	G1/4	G1/8	M5	M8x 1	157	128.3
VSPA-B-...A1-R5L	112.5	107	50	33	26.8	30.3	28.3	6.3	7.5	4.2	G1/2	G1/4	G1/8	M5	M12x 1	157	131.6

Type	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	L1	L2	L3	L4	L5	L6	L7	L8
VSPA-B-...A1	79	65	57.5	42.5	12.5	27.5	28	15.5	24.5	3.5	54 + nx 27	107.5	nx 27	27	11	21	8	4
VSPA-B-M52-...A1	79	65	57.5	42.5	12.5	27.5	28	15.5	24.5	3.5	54 + nx 27	107.5	nx 27	27	11	21	8	4
VSPA-B-...A1-R2L	79	65	57.5	42.5	12.5	27.5	28	15.5	24.5	3.5	54 + nx 27	107.5	nx 27	27	11	21	8	4
VSPA-B-...A1-R5L	79	65	57.5	42.5	12.5	27.5	28	15.5	24.5	3.5	54 + nx 27	107.5	nx 27	27	11	21	8	4

Datasheet

Dimensions - Pressure regulator


Valve size 18 mm with manifold sub-base and solenoid valve with central plug

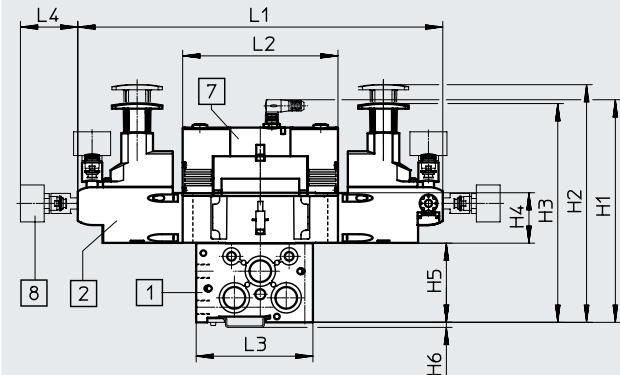

- [1] Manifold sub-base NAW
- [2] Regulator plate
- [7] Solenoid valve VSVA


Download CAD data → www.festo.com

Valve size 18 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

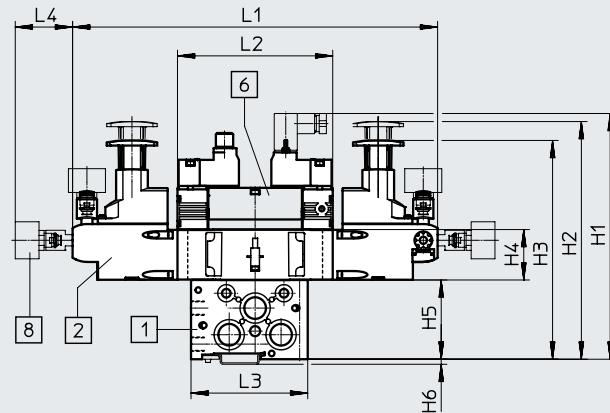


- [1] Manifold sub-base NAW
- [2] Regulator plate
- [6] Solenoid valve VSVA
- [8] Pressure gauge, freely positionable

Valve size 26 mm with manifold sub-base and solenoid valve with central plug

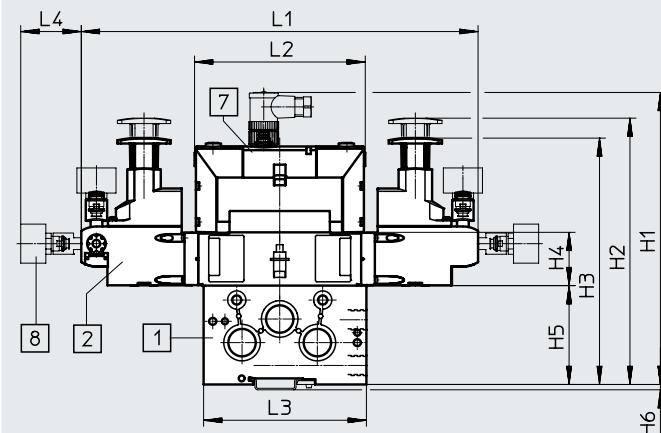

- [1] Manifold sub-base NAW
- [2] Regulator plate
- [7] Solenoid valve VSVA
- [8] Pressure gauge, freely positionable

Valve size 26 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

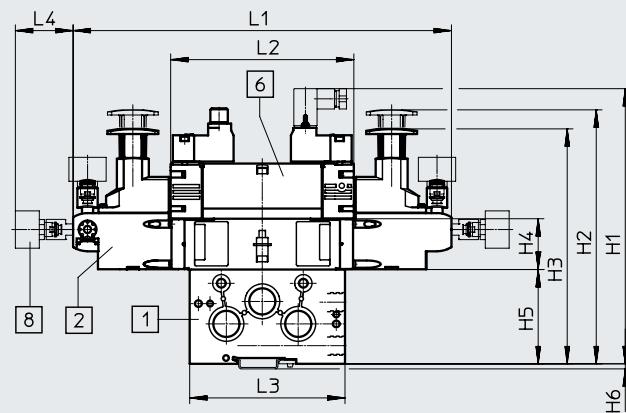


- [1] Manifold sub-base NAW
- [2] Regulator plate
- [6] Solenoid valve VSVA
- [8] Pressure gauge, freely positionable

Valve size [mm]	Solenoid valve	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4
18	With central plug	156.8	165	152	35	55	3.5	253.4	107.8	81	39.8
	With pilot interface to ISO 15218	170.6									
26	With central plug	192	175	162	35	65	3.5	260.7	112.5	107	39.8
	With pilot interface to ISO 15218	189.6							126.2		

Datasheet


Dimensions – Throttle plate

Valve size 18 mm with manifold sub-base and solenoid valve with central plug

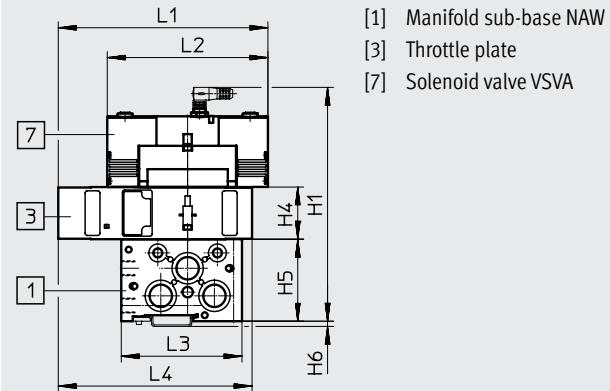


Download CAD data → www.festo.com


Valve size 18 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

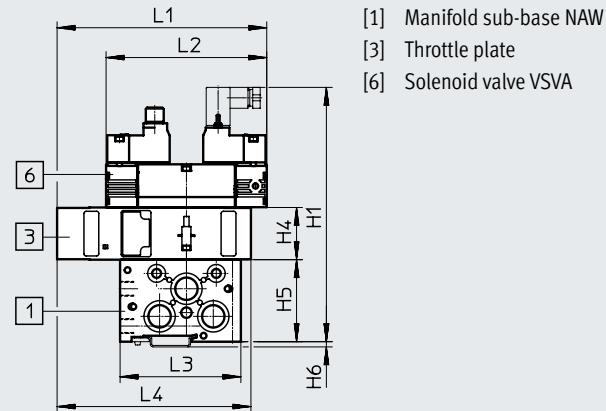

Valve size 26 mm with manifold sub-base and solenoid valve with central plug

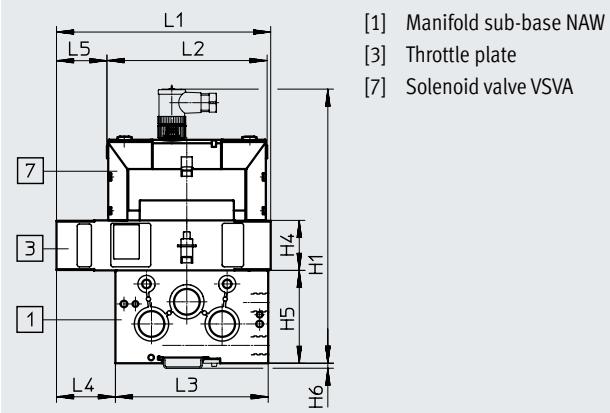

Valve size 26 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

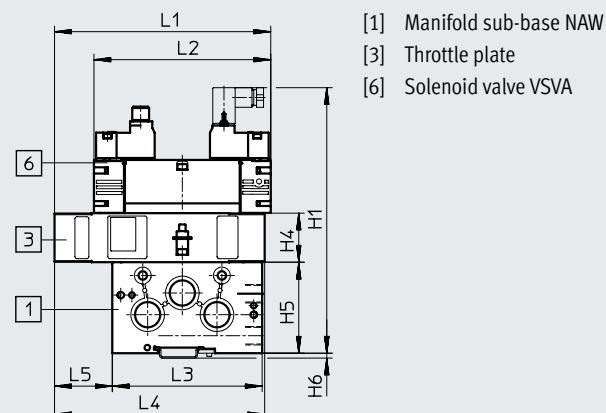


Valve size [mm]	Solenoid valve	H1	H4	H5	H6	L1	L2	L3	L4	L5
18	With central plug	156.8	35	55	3.5	140.8	107.8	81	130	–
	With pilot interface to ISO 15218	170.6								
26	With central plug	192	35	65	3.5	150	112.5	107	41.3	35
	With pilot interface to ISO 15218	189.6				154.4	126.2		150	41.3


Datasheet

Dimensions – Vertical supply plate


Valve size 18 mm with manifold sub-base and solenoid valve with central plug

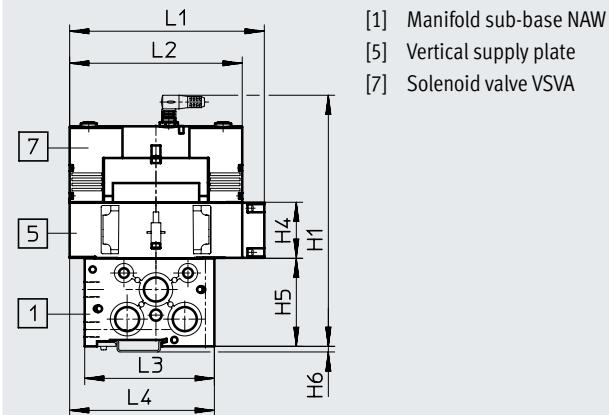Download CAD data → www.festo.com


Valve size 18 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

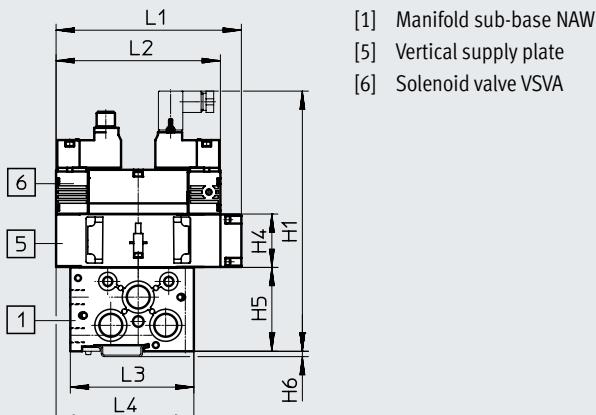

Valve size 26 mm with manifold sub-base and solenoid valve with central plug

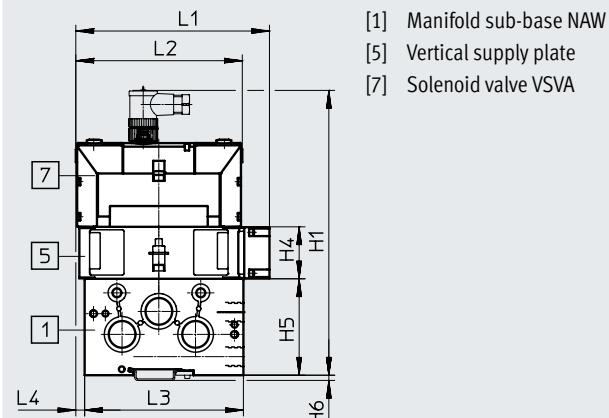

Valve size 26 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

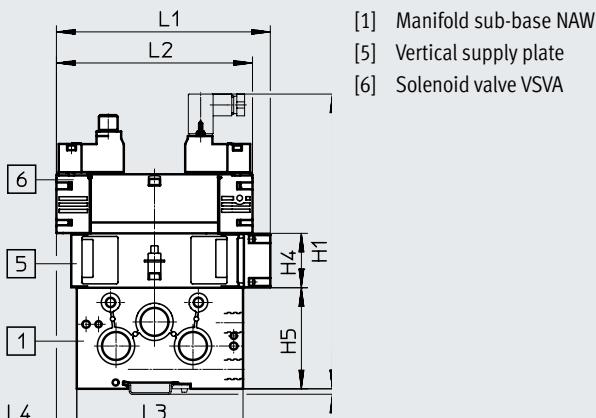


Valve size [mm]	Solenoid valve	H1	H4	H5	H6	L1	L2	L3	L4
18	With central plug	156.8	35	55	3.5	121.55	107.8	81	90.4
	With pilot interface to ISO 15218	170.6							
26	With central plug	192	35	65	3.5	130.8	112.5	107	6.3
	With pilot interface to ISO 15218	189.6							

Datasheet


Dimensions – Vertical pressure shut-off plate

Valve size 18 mm with manifold sub-base and solenoid valve with central plug

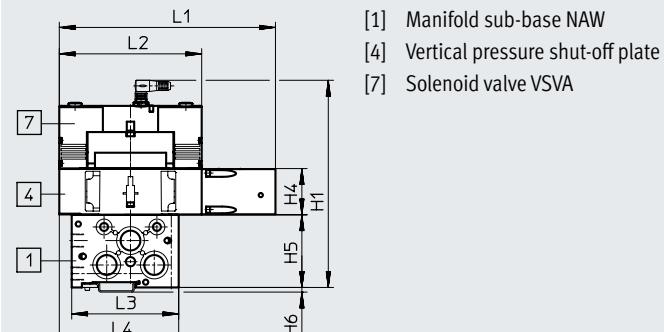


Download CAD data → www.festo.com


Valve size 18 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

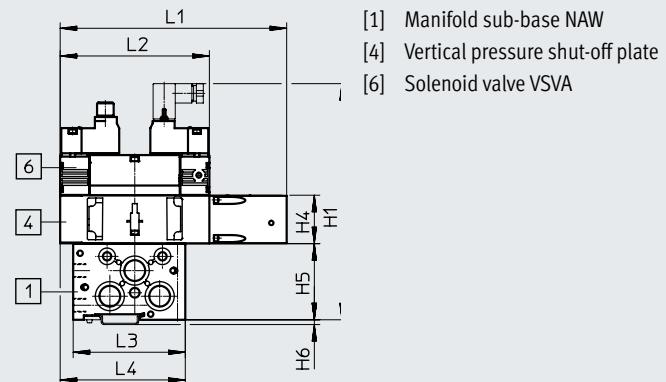

Valve size 26 mm with manifold sub-base and solenoid valve with central plug

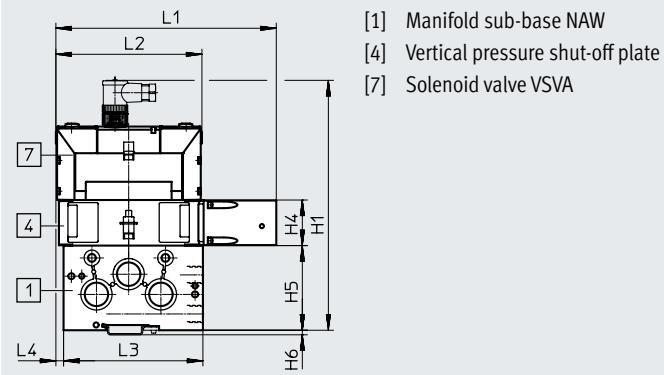

Valve size 26 mm with manifold sub-base and solenoid valve with central plug to ISO 15218

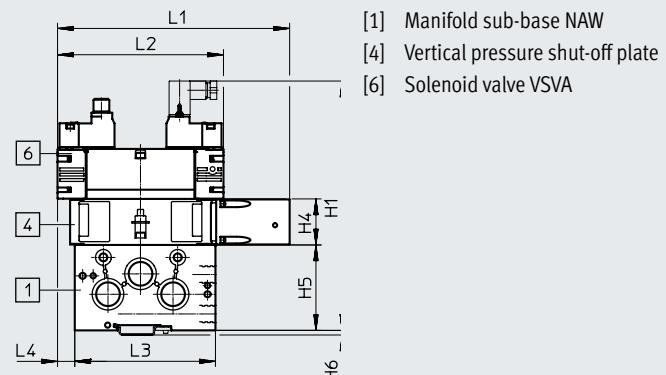

Valve size [mm]	Solenoid valve	H1	H4	H5	H6	L1	L2	L3	L4
18	With central plug	156.8	35	55	3.5	163.8	107.8	81	90.4
	With pilot interface to ISO 15218	170.6							
26	With central plug	192	35	65	3.5	169.7	112.5	107	6.3
	With pilot interface to ISO 15218	189.6				176.5	126.2		13.1

Accessories

Isolating disc NSC

Materials:
Aluminium

LABS (PWIS) conformity:
VDMA24364-B1/B2-L



Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]		
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)		

Ordering data

Description	Valve size [mm]	Weight [g]	Part no.	Type
Isolating disc for ports 1, 3, 5 (solenoid/pneumatic valves)	18	2	161113	NSC-3/8-02-VDMA
	26	2	161105	NSC-1/2-01-VDMA
Isolating disc for ports 12, 14 (pneumatic valves)	18	2	161106	NSC-1/8-01-VDMA
	26	2	161106	NSC-1/8-01-VDMA

Cover plate NDV

Materials:
POM

LABS (PWIS) conformity:
VDMA24364-B1/B2-L





Operating and environmental conditions

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]		
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)		



Ordering data

Description	Valve size [mm]	Weight [g]	Part no.	Type
Cover plate to seal spare or vacant valve positions	18	22	161114	NDV-02-VDMA
	26	36	161107	NDV-01-VDMA






Accessories

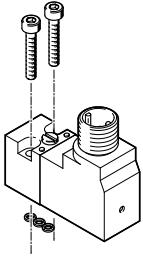Ordering data – Pilot valve to ISO 15218								
	Power [W]	Voltage [V AC]	Voltage [V DC]	Part no.	Type			
Square plug, type C EN 175301-803								
	Non-detenting manual override	1.8	–	12	–	546257	VSCS-B-M32-MH-WA-5C1	
				24		546256	VSCS-B-M32-MH-WA-1C1	
		–	3.1/2.3	–	24	546258	VSCS-B-M32-MH-WA-1AC1	
			2.9/2.1		110	546259	VSCS-B-M32-MH-WA-2AC1	
			2.9/2.1		230	546260	VSCS-B-M32-MH-WA-3AC1	
	Manual override non-detenting/detenting	1.8	–	12	–	571062	VSCS-B-M32-MD-WA-5C1	
				24		571061	VSCS-B-M32-MD-WA-1C1	
		–	3.1/2.3	–	24	571063	VSCS-B-M32-MD-WA-1AC1	
			2.9/2.1		230	571065	VSCS-B-M32-MD-WA-3AC1	
			2.9/2.1		110	571064	VSCS-B-M32-MD-WA-2AC1	
M12 plug IEC 61076-2-101								
	Manual override non-detenting/detenting		1.8	–	24	–	573215	VSCS-B-M32-MD-WA-1R3
	Manual override, detenting		1.8	–	24	–	573214	VSCS-B-M32-MH-WA-1R3
Tool for manual override								
	For manual override, detenting, with pilot valve VSCS-B-M32-MT					157601	AHB-MEB	








Accessories

Ordering data		Part no.	Type		
Pressure gauge Datasheets → Internet: pagn					
	With cartridge connection for regulator	0 ... 1 MPa 0 ... 1.6 MPa 0 ... 10 bar 0 ... 16 bar 0 ... 145 psi 0 ... 232 psi	563736 563735 543488 543487 563732 563731	PAGN-26-1M-P10 PAGN-26-1.6M-P10 PAGN-26-10-P10 PAGN-26-16-P10 PAGN-26-145P-P10 PAGN-26-232P-P10	
Cartridge for regulator plate		4 mm	Pack of 10		
	For tubing O.D.	4 mm	Pack of 10	172972	QSP10-4
Push-in fitting Datasheets → Internet: qs					
	Connecting thread M5 for tubing O.D. Connecting thread G1/8 for tubing O.D. Connecting thread G1/4 for tubing O.D. Connecting thread G3/8 for tubing O.D. Connecting thread G1/2 for tubing O.D.	4 mm 6 mm 6 mm 8 mm 8 mm 10 mm 12 mm 16 mm 12 mm 16 mm	Pack of 10 Pack of 1 Pack of 1 Pack of 1	★ 153315 ★ 153317 ★ 186096 ★ 186098 ★ 186099 ★ 186101 ★ 186103 186347 ★ 186104 186105	QSM-M5-4-I QSM-M5-6-I QS-G1/8-6 QS-G1/8-8 QS-G1/4-8 QS-G1/4-10 QS-G3/8-12 QS-G3/8-16 QS-G1/2-12 QS-G1/2-16
Blanking plug Datasheets → Internet: b					
	For sealing ports that are not required	For M5 thread For G1/8 thread For G1/4 thread For G3/8 thread For G1/2 thread	Pack of 10 Pack of 10 Pack of 10 Pack of 10 Pack of 10	★ 3843 ★ 3568 ★ 3569 ★ 3570 ★ 3571	B-M5 B-1/8 B-1/4 B-3/8 B-1/2
Silencer Datasheets → Internet: u					
	For reducing noise at exhaust ports	For G1/8 thread For G1/4 thread For G3/8 thread For G1/2 thread	Pack of 10 Pack of 10 Pack of 10 Pack of 10	6841 6842 6843 6844	U-1/8-B U-1/4-B U-3/8-B U-1/2-B
Inscription label Datasheets → Internet: ibs					
	Inscription label, 9x20 mm, for valves	In frames	Pack of 24	18182	IBS-9x20
Inscription label holder Datasheets → Internet: ascf					
	Clip-on inscription label holder for valve cap, for pneumatic valves VSPA	Pack of 5	540888	ASCF-T-S6	
Cover cap					
	For manual override, non-detenting or covered			8049538	VAMC-B10-20-CH2-S

Accessories

Ordering data		Part no.	Type	
Plug socket for plug pattern to EN 175301-803, type C			Datasheets → Internet: mssd	
	Via screw terminals	Cable fitting Pg7	★ 151687 MSSD-EB	
		Cable fitting M12	539712 MSSD-EB-M12	
	With insulation displacement connection	Cable fitting M14	192745 MSSD-EB-S-M14	
Plug socket for connection pattern type B, industry standard				
	Via screw terminals	Cable fitting M16	539710 MSSD-F-M16	
		Cable fitting Pg9	★ 34431 MSSD-F	
Connecting cable for plug pattern to EN 175301-803, type C			Datasheets → Internet: kmeb	
	With LED signal status indication	24 VDC	2.5 m	★ 151688 KMEB-1-24-2.5-LED
		24 VDC	5 m	151689 KMEB-1-24-5-LED
		24 V DC	10 m	193457 KMEB-1-24-10-LED
	Without signal status indication	Up to 240 V	2.5 m	151690 KMEB-1-230AC-2.5
		Up to 240 V	5 m	151691 KMEB-1-230AC-5
Connecting cable for plug pattern type B, industry standard				
	With LED signal status indication	24 V DC	2.5 m	★ 30935 KMF-1-24DC-2.5-LED
			5 m	30937 KMF-1-24DC-5-LED
			10 m	193458 KMF-1-24-10-LED
Illuminating seal			Datasheets → Internet: meb-ld	
	Plug pattern to EN 175301-803, type C	12 ... 24 V DC	151717 MEB-LD-12-24DC	
		230 V AC	151718 MEB-LD-230AC	
	Plug pattern type B to industry standard	24 V DC	19143 MF-LD-12-24DC	
Sockets for valves, round plug M12x1			Datasheets → Internet: necu	
	Angled socket, 4-pin, type A, screw terminal	Cable fitting Pg7	12956 SIE-WD-TR	
Connecting cable for valves with round plug M8x1			Datasheets → Internet: neba	
	Modular system for a choice of connecting cables → Internet: neba	0.1 ... 20 m	8078221 NEBA-....	
	Straight socket, M8x1, 4-pin Open end, 4-core	2.5 m	8078227 NEBA-M8G4-U-2.5-N-LE4	
		5 m	8078228 NEBA-M8G4-U-5-N-LE4	
	Angled socket, M8x1, 4-pin Open end, 4-core	2.5 m	8078233 NEBA-M8W4-U-2.5-N-LE4	
		5 m	8078234 NEBA-M8W4-U-5-N-LE4	

Accessories

Ordering data		Part no.	Type
Connecting cable for valves with round plug M12x1			Datasheets → Internet: neba
	Modular system for a choice of connecting cables → Internet: neba	0.1 ... 20 m	8078221 NEBA-...
	Straight socket, M12x1, 5-pin Open end, 4-core	2.5 m	8078239 NEBA-M12G5-U-2.5-N-LE4
		5 m	8078240 NEBA-M12G5-U-5-N-LE4
	Angled socket, M12x1, 5-pin, Open end, 4-core	2.5 m	8078248 NEBA-M12W5-U-2.5-N-LE4
		5 m	8078249 NEBA-M12W5-U-5-N-LE4
Connecting cable for electrical connection of the switching status sensor			
	Modular system for a choice of connecting cables → Internet: neba	0.1 ... 20 m	8078221 NEBA-...
	Straight socket, M8x1, 3-pin Open end, 3-core	2.5 m	8078223 NEBA-M8G3-U-2.5-N-LE3
		5 m	8078224 NEBA-M8G3-U-5-N-LE3
	Angled socket, M8x1, 3-pin Open end, 3-core	2.5 m	8078230 NEBA-M8W3-U-2.5-N-LE3
		5 m	8078231 NEBA-M8W3-U-5-N-LE3
DIN rail mounting			
	For end plate, valve size 18 mm	Pack of 2	553996 VAME-S3-2-H
	For end plate, valve size 26 mm	Pack of 2	553995 VAME-S3-1-H
User documentation			
	Valve manifold assembly VTIA	German	538928 P.BE-VTIA-DE
		English	538929 P.BE-VTIA-EN
		French	538931 P.BE-VTIA-FR
		Spanish	538930 P.BE-VTIA-ES
		Italian	538932 P.BE-VTIA-IT