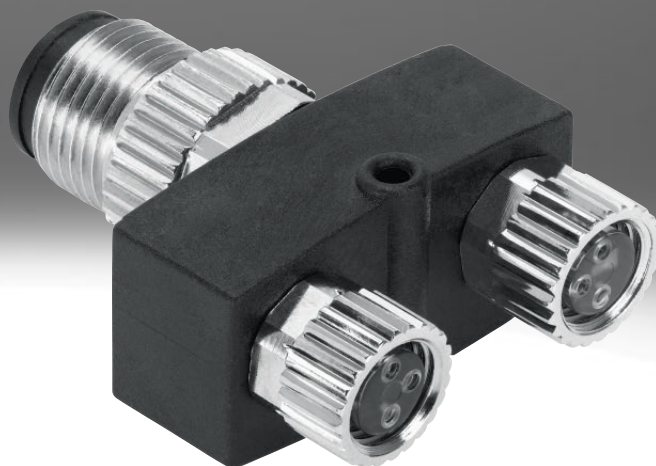


Sensor/actuator distributors

FESTO



Key features

Scope of features

Function description

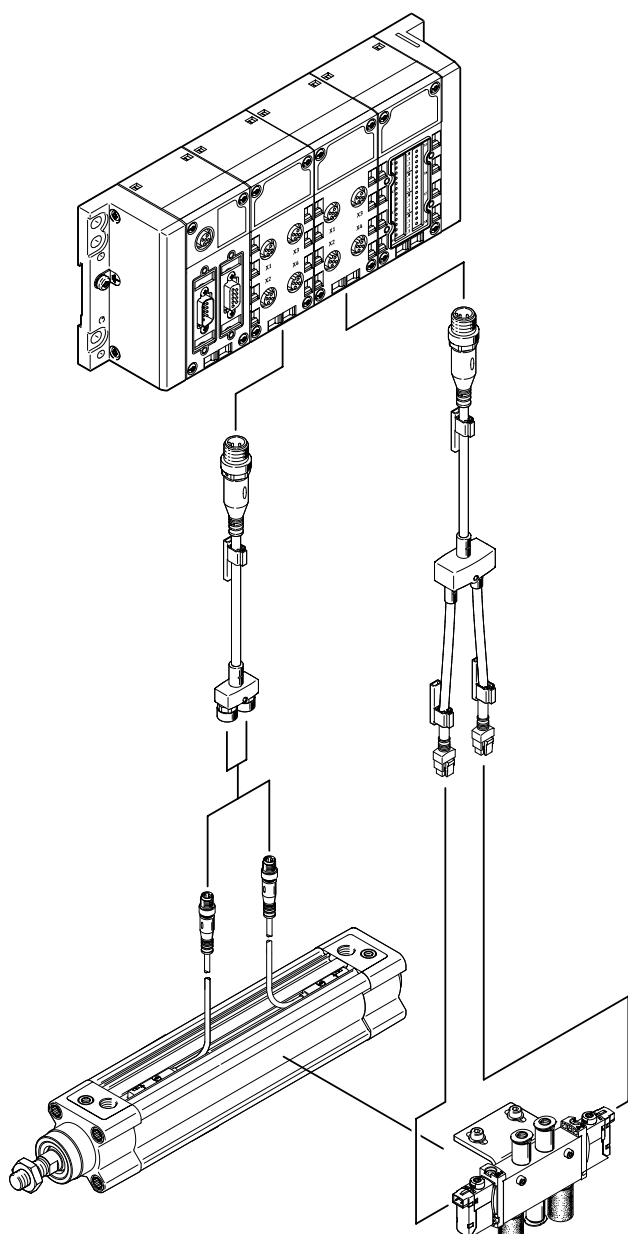
The distributors NEDY can perform two different tasks:

- Collecting signals between field devices (sensors) and controller inputs with double assignment
- Distributing signals between controller outputs with double assignment and field devices (actuators, e.g. valves)

Depending on the chosen task, the distributors will differ in terms of their:

- Design of the electrical connections
- Wiring
- LED indicators and holding current reduction

Variants



Controller side, connection no. 1

- Connection technology M8, M12
- Open cable end

Transmission path

- Maximum length: 30 m (entire string length)
- Many types quickly available with standard lengths 2.5 m and 5 m
- Mounting for T-slot
- Optimised cable material for installation in contact with pneumatic tubing; free from phosphoric acid ester

Energy chains and robot-compatible cables for:


- Harsh environments
- High mechanical loads
- Energy chains (5 million cycles for radius from 28 mm)
- Torsion loads

Field device side, connection no. 2 and no. 4

- Connection technology M8, M12
- Standards-based plug connectors for valves and solenoid coils type A, B, C
- Festo-specific plug connectors for valves and solenoid coils ZB and ZC
- Open cable end

Key features

Ordering data – Product options




Configurable product
This product and all its product options can be ordered using the configurator.

The configurator can be found at
→ www.festo.com/catalogue/...
Enter the part number or the type.


Part no.	Type
8032867	NEDY-

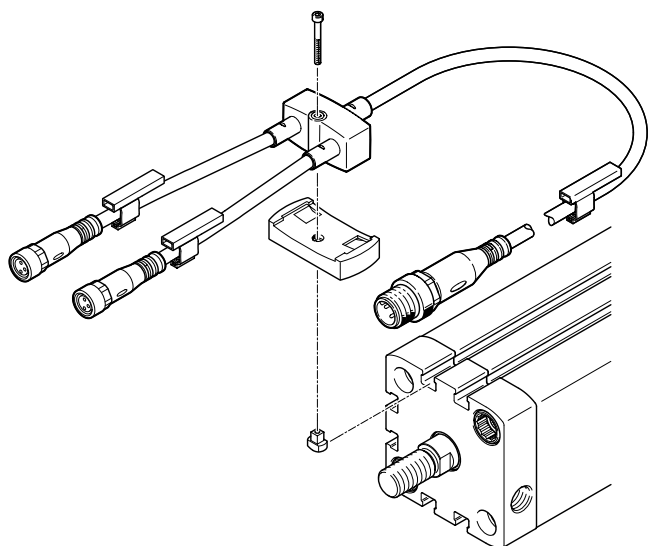Assembly



The distributors NEDY have a through-hole suitable for an M2 screw on the distributor housing.
A mounting kit in two sizes is available for mounting in T-slots.

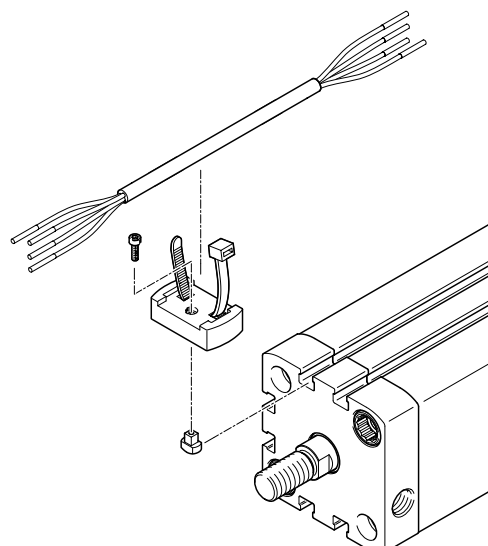The distributors NEDY can be easily and safely mounted using the mounting kit or for pneumatic tubing and electrical connecting cables using a cable tie.







The mounting kit guarantees secure mounting in T-slots from Festo. The geometry of the retaining bracket and of the slot nut are precisely adapted to these T-slots.

The distributor can be mounted parallel or at right angles to the T-slot and the slot nut can be inserted into the T-slot from above or from the side.

Key features


Version Connection technology			
The type of plug for the connecting cable can be selected (e.g. angled or straight).	The rotatable version is a special type: with an angled socket, the cable outlet can be rotated 360° in increments of 15°.	Benefit: The cable outlet can be rotated to the optimum position in tight installation conditions.	The rotatable plug is not designed to be constantly adjusted.

Assembly

			
Observe the orientation of the pins.	Connect the plug to the socket.	Adjust the cable outlet	Tighten the union nut


Indicators and identification		
LED indicator	Inscription label holder	Housing identification
Depending on the selected connection technology, the field device side of the distributor can be equipped with an LED display or a circuit for reducing the holding current.	Inscription label holders can be fitted to the individual cables of the distributor for identification. The inscription label holders can be ordered in combination with the cables for the distributor or separately as accessories.	The field device-side connections on the distributor housing are identified with the numbers 2 and 4. This makes them easy to match to the circuit diagrams: • Controller side – connection no. 1 • Field device side – connection no. 2 and no. 4

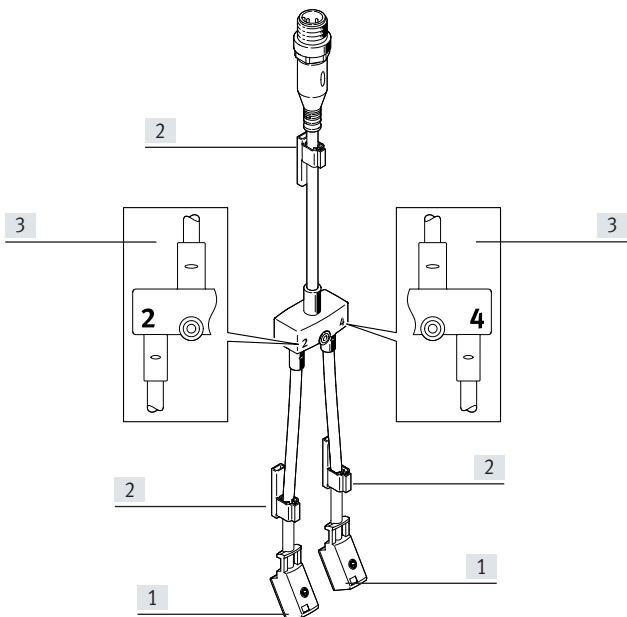LED indicator and identification elements


	[1] LED indicator, field device side [2] Label holder [3] Housing identification
---	--


Product range overview – Field device side

Y-distributor without cable	Field device side				Controller side				→ Page
					Plug M12x1	Plug M8x1	Open cable end		
					4-pin	4-pin	3-core	4-core	
	Socket M8x1	3-pin	Straight	–	■	■	–	–	8
	Socket M12x1	5-pin	Straight	–	■	–	–	–	25

Y-distributor with cable, field device side	Field device side				Controller side				→ Page
					Plug M12x1	Plug M8x1	Open cable end		
					4-pin	4-pin	3-core	4-core	
	Socket M8x1	3-pin	Straight	–	■	■	–	–	8
			Angled	–	■	■	–	–	8
				Switching status indication and ready status indication (for PNP sensors only)	■	■	–	–	8
			Rotatable	–	■	■	–	–	8
		4-pin	Straight	–	■	■	–	–	17
				Signal status indication (for valves only)	■	■	–	–	17
			Angled	–	■	■	–	–	17
				Signal status indication (for valves only)	■	■	–	–	17
	Socket M12x1	5-pin	Straight	–	■	■	–	–	25
			Angled	–	■	■	–	–	25
				Switching status indication and ready status indication (for PNP sensors only)	■	■	–	–	25
	Socket, type A	4-pin	To EN 175301-803		■	■	–	–	34
	Socket, type B	3-pin	To EN 175301-803		■	■	–	–	41
			To industry standard, 11 mm		■	■	–	–	47
	Socket, type C	4-pin	To EN 175301-803		■	■	–	–	54
			To industry standard, 9.4 mm		■	■	–	–	61
	Socket, plug pattern H	3-pin	–		■	■	–	–	67
	Socket, plug pattern ZB	2-pin	–		■	■	–	–	73
	Socket, plug pattern ZC	2-pin	Self-tapping screw		■	■	–	–	79
			Metric screw	Signal status indication (for valves only)	■	■	–	–	85
				Signal status indication and holding current reduction (for valves without holding current reduction only)	■	■	–	–	85
	Open cable end	3-core	–		■	■	–	–	92

Product range overview – Possible combinations

Y-distributor with cable, controller side	Field device side				Controller side				→ Page
					Plug M12x1	Plug M8x1	Open cable end		
					4-pin	4-pin	3-core	4-core	
	Socket M8x1	3-pin	Straight	–	■	■	–	■	8
	Socket M12x1	5-pin	Straight	–	■	■	–	■	25

Y-distributor with cables on both sides	Field device side				Controller side				→ Page
					Plug M12x1	Plug M8x1	Open cable end		
					4-pin	4-pin	3-core	4-core	
	Socket M8x1	3-pin	Straight	–	■	■	–	■	8
			Angled	–	■	■	–	■	8
				Switching status indication and ready status indication (for PNP sensors only)	■	■	–	■	8
			Rotatable	–	■	■	–	■	8
		4-pin	Straight	–	■	■	–	■	17
				Signal status indication (for valves only)	■	■	■	–	17
			Angled	–	■	■	–	■	17
				Signal status indication (for valves only)	■	■	■	–	17
	Socket M12x1	5-pin	Straight	–	■	■	–	■	25
			Angled	–	■	■	–	■	25
				Switching status indication and ready status indication (for PNP sensors only)	■	■	–	■	25
	Socket, type A	4-pin	To EN 175301-803		■	■	■	–	34
	Socket, type B	3-pin	To EN 175301-803		■	■	■	–	41
			To industry standard, 11 mm		■	■	■	–	47
	Socket, type C	4-pin	To EN 175301-803		■	■	■	–	54
			To industry standard, 9.4 mm		■	■	■	–	61
	Socket, plug pattern H	3-pin	–		■	■	■	–	67
	Socket, plug pattern ZB	2-pin	–		■	■	■	–	73
	Socket, plug pattern ZC	2-pin	Self-tapping screw		■	■	■	–	79
			Metric screw	Signal status indication (for valves only)	■	■	■	–	85
				Signal status indication and holding current reduction (for valves without holding current reduction only)	■	■	■	–	85
	Open cable end	3-core	–		■	■	–	■	92

Type codes

001	Series	
NEDY	Distributor	

002	Distributor type	
L2R1	Y-distributor	

003	Circuitry	
V1	Standard variant (see circuit diagram, standard)	

004	Connection technology left, field device side	
A1	Socket type A, EN 175301-803	
B1	Socket type B, EN 175301-803	
B2	Socket type B, industry standard, 11 mm	
C1	Socket type C, EN 175301-803	
E1	Socket type C, industry standard 9.4 mm	
H1	Socket connection pattern H	
LE	Open end	
M8	Socket M8x1 A-coded, EN 61076-2-104	
M12	Socket M12x1 A-coded, EN 61076-2-101	
Z1	Socket connection pattern ZB, self-tapping screw	
Z3	Socket connection pattern ZC, self-tapping screw	
Z4	Socket connection pattern ZC, metric screw	

005	Cable outlet left	
	None	
G	Straight	
R	Rotating	
W	Angled	

006	Number of pins/wires on the left	
2	2	
3	3	
4	4	
5	5	

007	Display	
	None	
L	LED signal status, DC	
P	LED switching state, PNP	
Z	LED signal status, holding current reduction	

008	Cable characteristic	
	Without cable	
U	Suitable for energy chains	

009	Cable length left	
	None	
...L	0.3 ... 30 m	

010	Cable identification	
	With label holder	
N	Without label holder	

011	Connection technology right, controller side	
LE	Open end	
M8	Plug M8x1 A-coded, EN 61076-2-104	
M12	Plug M12x1 A-coded, EN 61076-2-101	

012	Cable outlet right	
	None	
G	Straight	
W	Angled	


013	Number of pins/wires on the right	
3	3	
4	4	

014	Cable length right	
	None	
...R	0.3 ... 30 m	

Datasheet

Distributor NEDY-L2R1-V1-M8

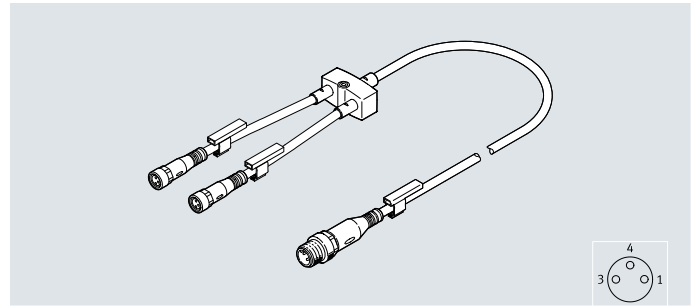- Dual distributor
- For connecting valves
- For connecting sensors
- With LED indicator for ready and switching status for connecting PNP sensors



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Angled, straight, rotatable
Design	Round
Connection technology	M8x1, A-coded to EN 61076-2-104
Number of pins/cores	3
Assigned pins/cores	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl Rotatable
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock
Display	None Green LED and yellow LED, ready and switching status

Technical data – Electrics

Electrical connection 2	2x socket M8x1	Rotatable cable outlet	Indicator P
Operating voltage range	[V DC] 0 ... 30 [V AC] 0 ... 30	0 ... 30 0 ... 30	10 ... 30 –
Surge resistance	[kV] 0.8	0.8	0.8
Current rating at 40 °C	[A] 3	0.5	3
Pollution degree	3	3	3

Technical data – Cable

	Field device side	Controller side
Cable diameter [mm]	3.8	4.5
Nominal conductor cross-section [mm ²]	0.25	0.25
Cable characteristic	Suitable for energy chains/robots	Suitable for energy chains/robots
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m
Bending radius, flexible cable installation [mm]	39	46

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	4
Assigned pins/cores	4	4	4
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, PC, TPE-U(PUR)
Housing colour	Black
Union nut	Nickel-plated brass
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions




Ambient temperature [°C]	–25 ... +80
Note on ambient temperature [°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation [°C]	–20 ... +80
Storage temperature [°C]	–25 ... +80
Degree of protection	IP65/IP68, IP69K
CE marking (see declaration of conformity) ¹⁾	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK RoHS regulations
Corrosion resistance class CRC2)	2

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).






If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
M8x1	8	3-core	41	With cable outlet	10	4-core	26.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0
The weight of the individual components must be added together to determine the overall weight: socket + length x cable + distributor + length x cable + plug Example: NEDY-L2R1-V1-M8G3-U-3L-LE4-10R 8 g + 3x 41 g + 10 g + 10x 26.5 g + 0 g = 406 g									

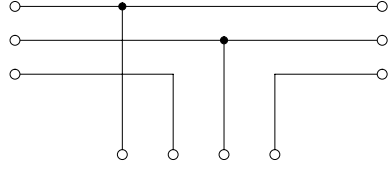
Datasheet

Wiring (socket/plug view)			Wiring			Wiring		
Connection no. 4	Pin	Wire colour ¹⁾				Wire colour ¹⁾	Pin	Connection no. 2
	1	BN				BN	1	
	3	BU				BU	3	
	4	BK				BK	4	
			Wire colour ¹⁾	BN	BK	BU	WH	
			Pin	1	4	3	2	
			Plug M8x1					
								
			Plug M12x1					
								

1) To IEC 757

Dimensions

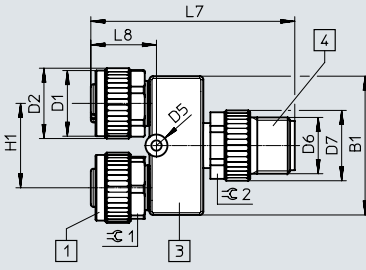
Y-distributor without cable



[1] Socket, field device side [3] Distributor [4] Plug, controller side

Download CAD data → www.festo.com

Distributor body front view



Electrical connection, controller side	B1	D1	D2 Ø	D5 Ø	D6	D7 Ø	H1	L7	L8	⌀ 1	⌀ 2
Plug M8x1	21	M8	10	2.2	M8	10	12.2	31.8	10.2	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	2.2	M12	15	18	39.5	10.2	A/F 9	A/F 13


Distributor body front view		B1	H1
Size 1:	- Y-distributor without cable with plug M8x1 - Y-distributor with cable, field device side and plug M8x1 - Y-distributor with cable, controller side	12	21
Size 2:	- Y-distributor without cable with plug M12x1 - Y-distributor with cable, field device side and plug M12x1 - Y-distributor with cables on both sides	16.2	29.6

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

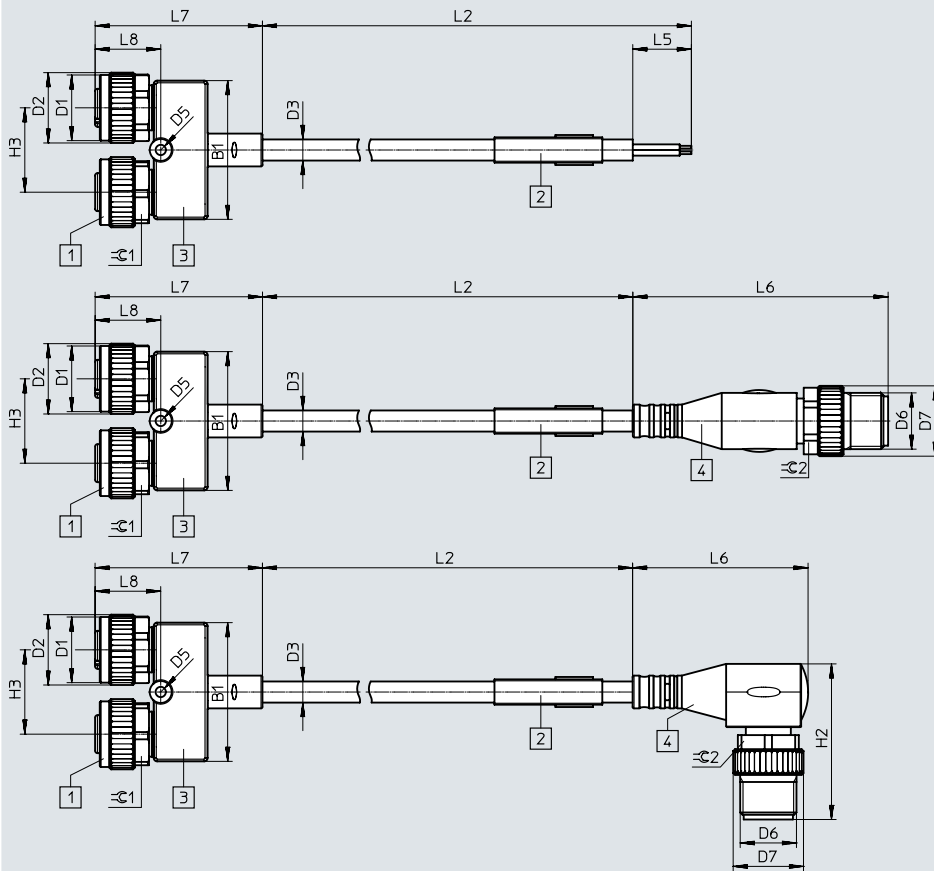Y-distributor with cable, controller side



[1] Socket, field device side

[2] Inscription label

[3] Distributor

[4] Plug, controller side


Electrical connection, controller side		B1	D1	D2 ø	D3 ø	D5 ø	D6	D7 ø	H2	H3	L2	L5	L6	L7	L8	≙ 1	≙ 2
Open cable end		21	M8	10	4.5	2.2	–	–	–	12.2	300 ... 30000	50	–	28.5	10.2	A/F 9	–
Plug M8x1	Straight	21	M8	10	4.5	2.2	M8	10	–	12.2	300 ... 30000	–	41.1	28.5	10.2	A/F 9	A/F 9
	Angled	21	M8	10	4.5	2.2	M8	10	24	12.2	300 ... 30000	–	26.9	28.5	10.2	A/F 9	A/F 9
Plug M12x1	Straight	21	M8	10	4.5	2.2	M12	15	–	12.2	300 ... 30000	–	54.5	28.5	10.2	A/F 9	A/F 13
	Angled	21	M8	10	4.5	2.2	M12	15	33.2	12.2	300 ... 30000	–	37.5	28.5	10.2	A/F 9	A/F 13

Datasheet

Dimensions

Download CAD data → www.festo.com

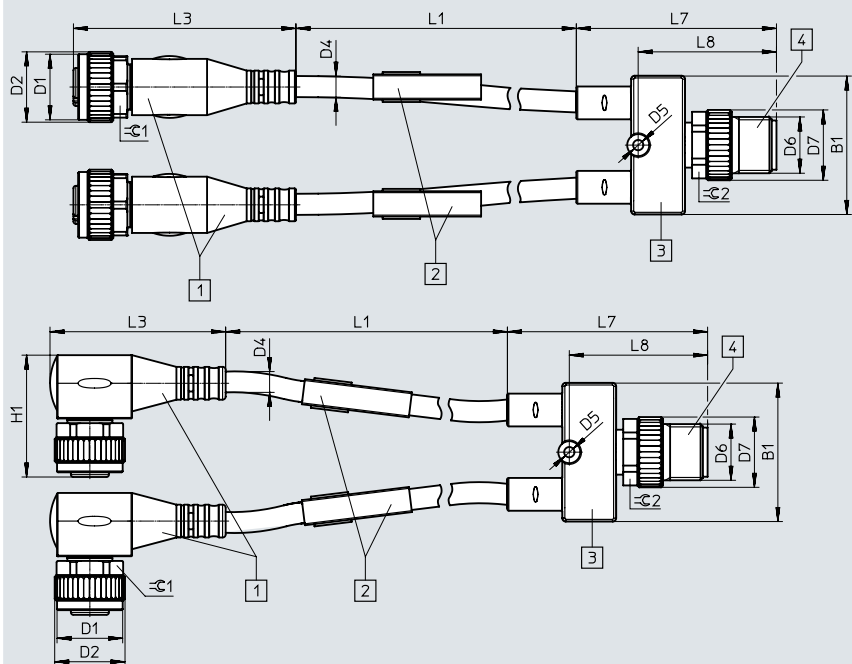Y-distributor with cable, field device side



[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side


Electrical connection, controller side	B1	D1	D2	D4	D5	D6	D7	H1	L1	L3	L7	L8	≙ 1	≙ 2
Electrical connection, field device side, straight														
Plug M8x1	21	M8	10	3.8	2.2	M8	10	–	300 ... 30000	34.6	35	21.6	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	3.8	2.2	M12	15	–	300 ... 30000	34.6	42.7	29.5	A/F 9	A/F 13
Electrical connection, field device side, angled														
Plug M8x1	21	M8	10	3.8	2.2	M8	10	17	300 ... 30000	26.9	35	21.6	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	3.8	2.2	M12	15	17	300 ... 30000	26.9	42.7	29.5	A/F 9	A/F 13
Electrical connection, field device side, rotatable														
Plug M8x1	21	M8	10	3.8	2.2	M8	10	16.3	300 ... 30000	20.9	35	21.6	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	3.8	2.2	M12	15	16.3	300 ... 30000	20.9	42.7	29.5	A/F 9	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

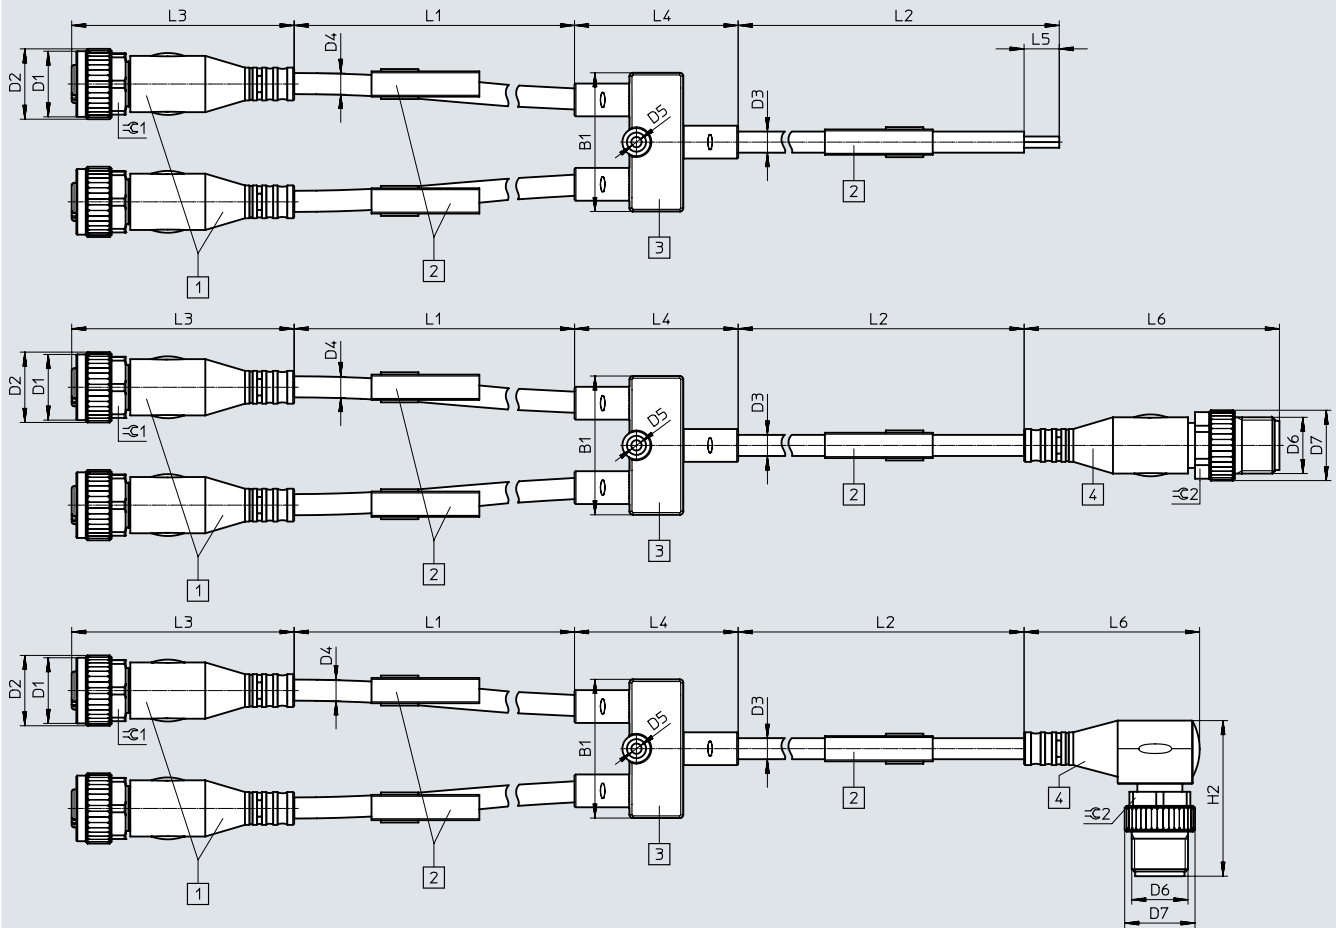Y-distributor with cables on both sides



[1] Socket, field device side

[2] Inscription label

[3] Distributor

[4] Plug, controller side

Electrical connection, controller side		B1	D1	D2 Ø	D3 Ø	D4 Ø	D5 Ø	D6	H2
Open cable end		29.6	M8	10	4.5	3.8	2.2	–	–
Plug M8x1	Straight	29.6	M8	10	4.5	3.8	2.2	M8	–
	Angled	29.6	M8	10	4.5	3.8	2.2	M8	24
Plug M12x1	Straight	29.6	M8	10	4.5	3.8	2.2	M12	–
	Angled	29.6	M8	10	4.5	3.8	2.2	M12	33.2


Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≅ 1	≅ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	50	–	A/F 9	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	41.1	A/F 9	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	26.9	A/F 9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	54.5	A/F 9	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	37.5	A/F 9	A/F 13

Datasheet

Dimensions

Download CAD data → www.festo.com

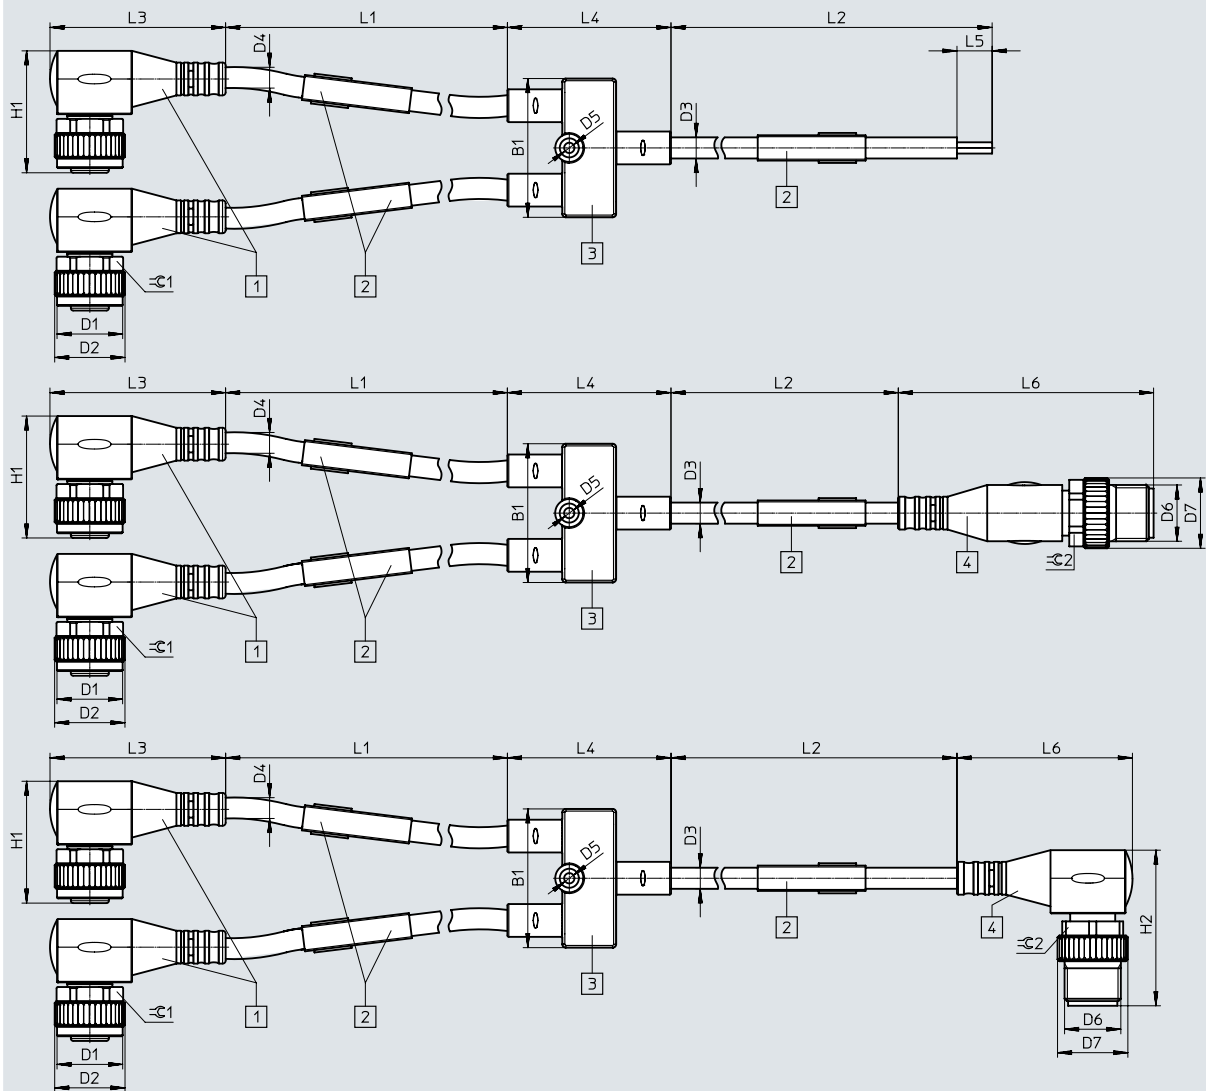Y-distributor with cables on both sides





[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side

Electrical connection, controller side		B1	D1	D2 ø	D3 ø	D4 ø	D5 ø	D6	H1		H2
									Cable outlet on the left, angled	Cable outlet on the left, rotatable	
Open cable end		29.6	M8	10	4.5	3.8	2.2	–	17	16.3	–
Plug M8x1	Straight	29.6	M8	10	4.5	3.8	2.2	M8	17	16.3	–
	Angled	29.6	M8	10	4.5	3.8	2.2	M8	17	16.3	24
Plug M12x1	Straight	29.6	M8	10	4.5	3.8	2.2	M12	17	16.3	–
	Angled	29.6	M8	10	4.5	3.8	2.2	M12	17	16.3	33.2

Electrical connection, controller side		L1	L2	L3		L4	L5	L6	≈C 1	≈C 2
				Cable outlet on the left, angled	Cable outlet on the left, rotatable					
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	20.9	34.9	50	–	A/F 9	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	20.9	34.9	–	41.1	A/F 9	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	20.9	34.9	–	26.9	A/F 9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	20.9	34.9	–	54.5	A/F 9	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	20.9	34.9	–	37.5	A/F 9	A/F 13

Datasheet

Ordering data						
	Field device side	Controller side		Weight [g]	Part no.	Type
	Cable length [m]	Electrical connection	Cable length [m]			
Y-distributor without cable						
	0	Plug, straight, M8x1	0	10.5	8005312	NEDY-L2R1-V1-M8G3-N-M8G4
		Plug, straight, M12x1		20	8005311	NEDY-L2R1-V1-M8G3-N-M12G4
Y-distributor with cable, controller side						
	0	Plug, straight, M8x1	2.5	79	8005303	NEDY-L2R1-V1-M8G3-U-M8G4-2.5R
			5	145	8005304	NEDY-L2R1-V1-M8G3-U-M8G4-5R
		Plug, straight, M12x1	2.5	86	8005301	NEDY-L2R1-V1-M8G3-U-M12G4-2.5R
			5	153	8005302	NEDY-L2R1-V1-M8G3-U-M12G4-5R
Y-distributor with cable on both sides						
	0.3	Plug, straight, M8x1	2.5	102	8035485	NEDY-L2R1-V1-M8G3-U-0.3L-M8G4-2.5R
			5	168	8035774	NEDY-L2R1-V1-M8G3-U-0.3L-M8G4-5R
		Plug, straight, M12x1	2.5	109	8032309	NEDY-L2R1-V1-M8G3-U-0.3L-M12G4-2.5R
			5	176	8035484	NEDY-L2R1-V1-M8G3-U-0.3L-M12G4-5R
Ordering data – Accessories						
	Mounting for T-slot				Part no.	Type
		- For Y-distributor without cable with plug M8x1 - For Y-distributor with cable on field device side and plug M8x1 - For Y-distributor with cable, controller side			8032868	NEAU-A-N8-1
		- For Y-distributor without cable with plug M12x1 - For Y-distributor with cable on field device side and plug M12x1 - For Y-distributor with cable on both sides			8032869	NEAU-A-N8-2

Ordering data – Modular product system

Ordering table


		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket M8x1, A-coded, EN 61076-2-104		-M8	-M8
Cable outlet on the left	Straight		G	
	Rotatable		R	
	Angled		W	
Number of pins/cores on the left	3-pin		3	3
Display	Without	[1]		
	LED: ready for operation and switching status (for PNP sensors only)	[2]	P	
Cable characteristic	None			
	Suitable for energy chains/robots	[3]	-U	
Cable length on the left [m]	None			
	0.3 ... 30	[4]	-...L	
Cable designation	With inscription label holder	[3]		
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None			
	Straight	[5]	G	
	Angled	[5]	W	
Number of pins/cores on the right	3-pin	[6]	3	
	4-pin		4	
Cable length on the right [m]	None			
	0.3 ... 30	[7]	-...R	

- 1) Not in conjunction with number of poles/cores on the right 3
- 2) P Not in combination with cable outlet on the left G, R
- 3) -U Only with cable length on the left or cable length on the right
- 4) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
Mandatory specification in combination with cable outlet on the left, R or W
- 5) G, W Not in combination with connection technology on the right, controller side LE
- 6) 3 Only with connection technology on the right, LE
Not in combination with Indicator P
- 7) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
Mandatory specification in combination with cable outlet on the right, W
Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-M8

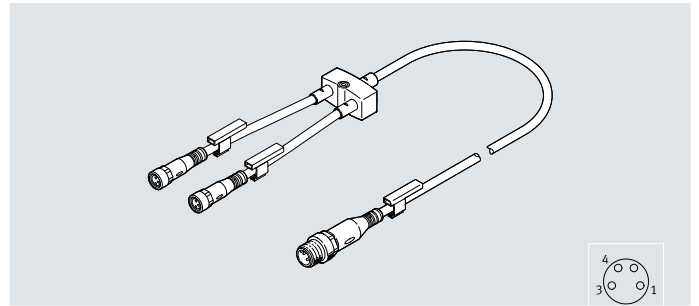- Dual distributor
- For connecting valves
- With LED indicator for signal status for connecting valves
- For connecting sensors



General technical data		
Display	None	Yellow LED, signal status
Design	Y-distributor	
Type of distributor	Y type	
Type of mounting	Via accessories, via through-hole for M2 screw	
Cable designation	Via inscription label holder (optional)	
Based on standard	EN 61076-2-101, EN 61076-2-104	

Electrical connection 2		
Function	Field device side	
Connection type	2 x socket	
Cable outlet	Angled, straight	
Design	Round	
Connection technology	M8x1, A-coded to EN 61076-2-104	
Number of pins/cores	4	
Assigned pins/cores	3	2
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	
	Rotatable	
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock	

Technical data – Electrics			
Electrical connection 2		2x socket M8x1	Indicator L
Operating voltage range	[V DC]	0 ... 30	21.6 ... 30
	[V AC]	0 ... 30	–
Surge resistance	[kV]	0.8	0.8
Current rating at 40 °C	[A]	3	3
Pollution degree		3	3

Technical data – Cable			
Electrical connection 2		2x socket M8x1	Indicator L
Cable diameter, controller side	[mm]	4.5	4.5
Cable diameter, field device side	[mm]	4.5	3.3
Nominal conductor cross-section	[mm ²]	0.25	
Cable characteristic	Suitable for energy chains/robots		
Note on cable characteristics	–		Standard for field device side
Bending radius, flexible cable in- stallation, controller side	[mm]	46	46
Bending radius, flexible cable in- stallation, field device side	[mm]	46	34

Technical data – Cable test conditions		
Cable characteristic	Standard	Suitable for energy chains/robots
Flexural strength	To Festo standard	To Festo standard
Test conditions	On request	On request
Energy chain	1.5 million cycles	5 million cycles
Bending radius	[mm]	28
Torsional strength	–	> 300000 cycles, ±270°/0.1 m

Datasheet

Technical data – Electrical connection 1

Function	Controller side			
Connection type	Plug		Open end	
Cable outlet	Straight, angled	Straight, angled	–	–
Design	Round	Round	–	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–	–
Number of pins/cores	4	4	3	4
Assigned pins/cores	4	4	3	4
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl		–	–
	Rotatable		–	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–	–
Display	–	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–	–

Materials

Housing	PA, PC, TPE-U(PUR)
Housing colour	Black
Union nut	Nickel-plated brass
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions




Ambient temperature	[°C]	–25 ... +80
Note on ambient temperature	[°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation	[°C]	–20 ... +80
Storage temperature	[°C]	–25 ... +80
Degree of protection		IP65/IP68, IP69K
CE marking (see declaration of conformity) ¹⁾		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		To UK RoHS regulations
Corrosion resistance class CRC2)		2

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
M8x1	8	2-core	31	With cable outlet	10	3-core	19.5	M8x1	4.5
Socket M8x1 with LED	7	3-core	41	With plug M12x1	17	4-core	26.5	M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
								Open end	0


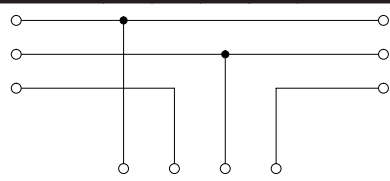



The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:






NEDY-L2R1-V1-M8G4-U-3L-LE4-10R

8 g + 3x 41 g + 10 g + 10x 26.5 g + 0 g = 406 g

Datasheet

Wiring without signal status display (view of socket/plug)											
Connection no. 4		Pin	Wire colour ¹⁾	Wiring				Wire colour ¹⁾	Pin	Connection no. 2	
	1	BN		BN	1						
	3	BU		BU	3						
	4	BK		BK	4						
			Wire colour ¹⁾	BN	BK	BU	WH				
			Pin	1	4	3	2				
			Plug M8x1								
		Plug M12x1									

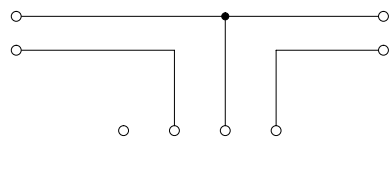1) To IEC 757

Wiring with signal status indicator (view of socket/plug)											
Connection no. 4		Pin	Wire colour ¹⁾	Wiring				Wire colour ¹⁾	Pin	Connection no. 2	
	3	BU		BU	3						
	4	BN		BN	4						
			Wire colour ¹⁾	–	BK	BU	BN				
			Pin	–	4	3	2				
			Plug M8x1								
		Plug M12x1									


1) To IEC 757

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

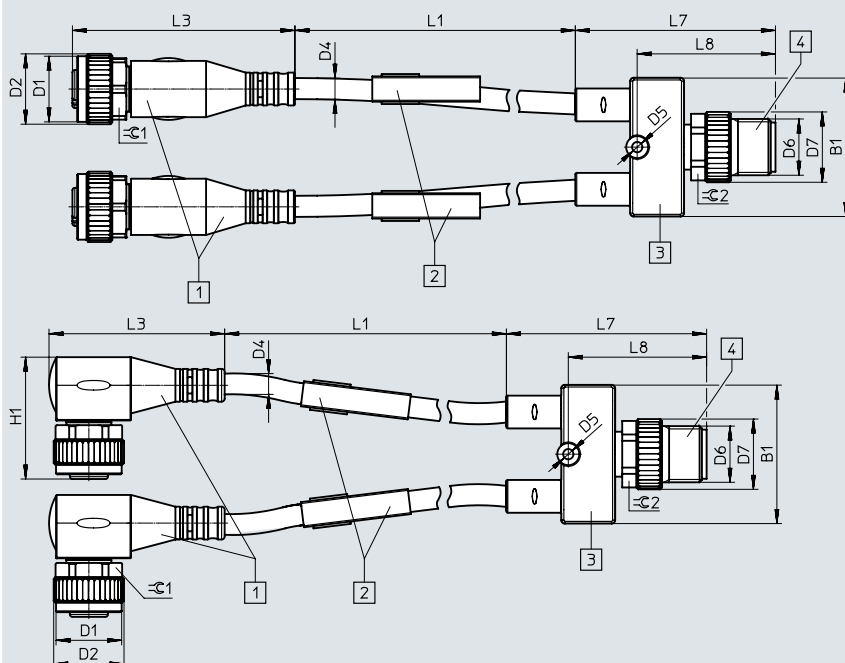Y-distributor with cable, field device side



[1] Socket, field device side

[2] Inscription label

[3] Distributor

[4] Plug, controller side


Electrical connection, controller side	B1	D1	D2	D4	D5	D6	D7	H1	L1	L3	L7	L8	≙ 1	≙ 2
Electrical connection on field device side, straight, without signal status indication														
Plug M8x1	21	M8	10	3.8	2.2	M8	10	–	300 ... 30000	34.6	35	21.6	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	3.8	2.2	M12	15	–	300 ... 30000	34.6	42.7	29.5	A/F 9	A/F 13
Electrical connection on field device side, straight, with signal status indication														
Plug M8x1	21	M8	10	3.3	2.2	M8	10	–	300 ... 30000	34.6	35	21.6	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	3.3	2.2	M12	15	–	300 ... 30000	34.6	42.7	29.5	A/F 9	A/F 13
Electrical connection on field device side, angled, without signal status indication														
Plug M8x1	21	M8	10	3.8	2.2	M8	10	17	300 ... 30000	26.9	35	21.6	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	3.8	2.2	M12	15	17	300 ... 30000	26.9	42.7	29.5	A/F 9	A/F 13
Electrical connection on field device side, angled, with signal status indication														
Plug M8x1	21	M8	10	3.3	2.2	M8	10	17	300 ... 30000	26.9	35	21.6	A/F 9	A/F 9
Plug M12x1	29.6	M8	10	3.3	2.2	M12	15	17	300 ... 30000	26.9	42.7	29.5	A/F 9	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

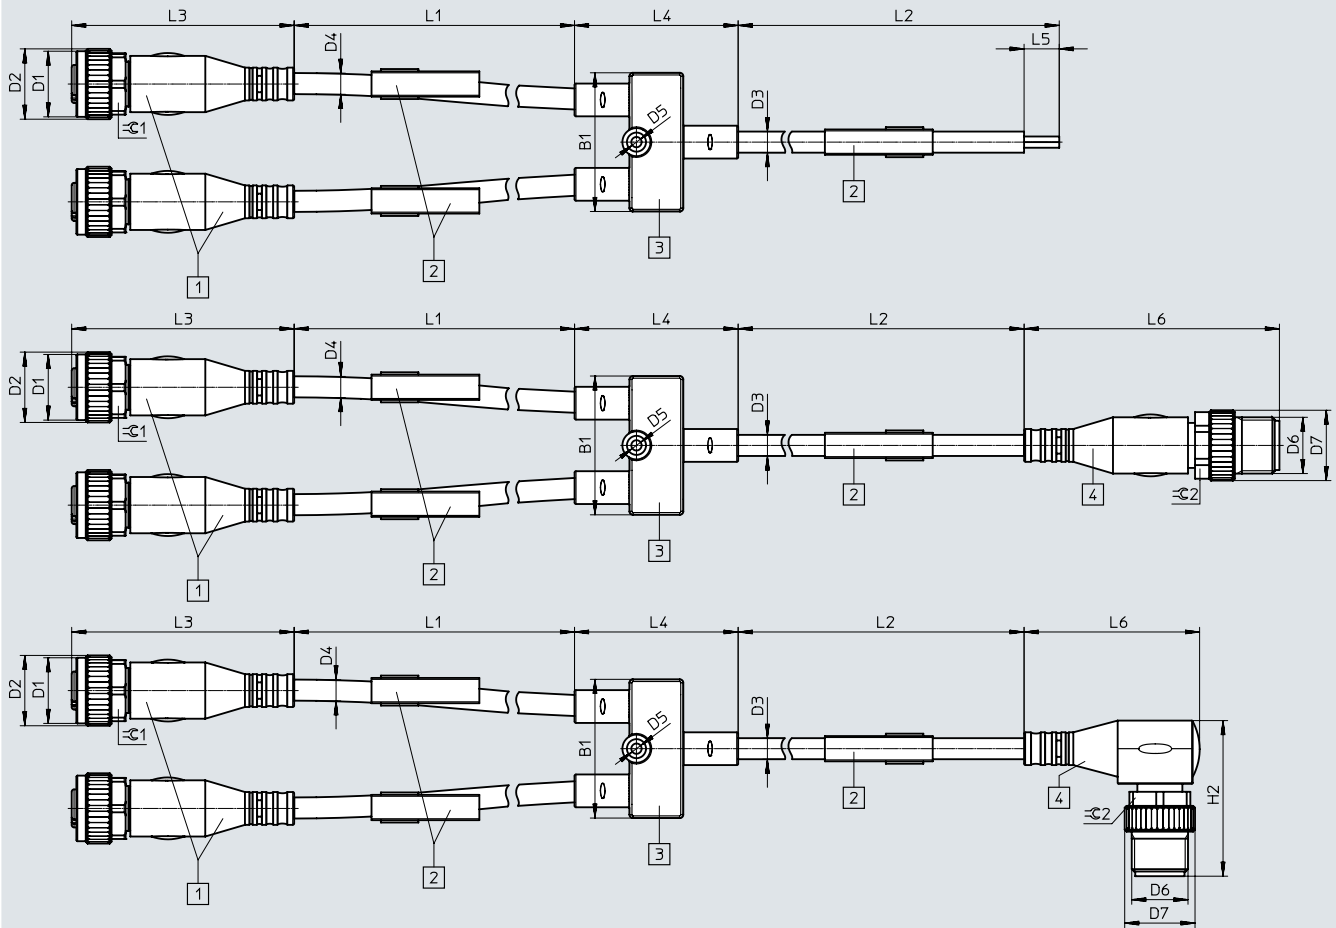Y-distributor with cables on both sides



[1] Socket, field device side

[2] Inscription label

[3] Distributor

[4] Plug, controller side

Electrical connection, controller side		B1	D1	D2 ø	D3 ø	D4 ø		D5 ø	D6	H2
						Without LED	With LED			
Open cable end		29.6	M8	10	4.5	3.8	3.3	2.2	–	–
Plug M8x1	Straight	29.6	M8	10	4.5	3.8	3.3	2.2	M8	–
	Angled	29.6	M8	10	4.5	3.8	3.3	2.2	M8	24
Plug M12x1	Straight	29.6	M8	10	4.5	3.8	3.3	2.2	M12	–
	Angled	29.6	M8	10	4.5	3.8	3.3	2.2	M12	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≅ 1	≅ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	50	–	A/F 9	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	41.1	A/F 9	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	26.9	A/F 9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	54.5	A/F 9	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	34.6	34.9	–	37.5	A/F 9	A/F 13

Download CAD data → www.festo.com

The image displays three technical drawings of cable assemblies, labeled A, B, and C, showing different configurations of components and dimensions.

Variant A: Shows a cable assembly with a connector (1) on the left, a cable (2) in the middle, and a connector (3) on the right. Dimensions include L3, L1, L4, L2, L5, H1, D4, D1, D2, D3, D5, and B1. A callout 1 points to the connector (1).

Variant B: Shows a cable assembly with a connector (1) on the left, a cable (2) in the middle, and a connector (4) on the right. Dimensions include L3, L1, L4, L2, L6, H1, D4, D1, D2, D3, D5, B1, D6, and D7. A callout 1 points to the connector (1).


Variant C: Shows a cable assembly with a connector (1) on the left, a cable (2) in the middle, and a connector (4) on the right. Dimensions include L3, L1, L4, L2, L6, H1, D4, D1, D2, D3, D5, B1, D6, D7, and H2. A callout 1 points to the connector (1).

[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side

Electrical connection, controller side		B1	D1	D2 Ø	D3 Ø	D4 Ø		D5 Ø	D6	H1	H2
						Without LED	With LED				
Open cable end		29.6	M8	10	4.5	3.8	3.3	2.2	–	17	–
Plug M8x1	Straight	29.6	M8	10	4.5	3.8	3.3	2.2	M8	17	–
	Angled	29.6	M8	10	4.5	3.8	3.3	2.2	M8	17	24
Plug M12x1	Straight	29.6	M8	10	4.5	3.8	3.3	2.2	M12	17	–
	Angled	29.6	M8	10	4.5	3.8	3.3	2.2	M12	17	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≧ 1	≧ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	50	–	A/F 9	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	41.1	A/F 9	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	26.9	A/F 9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	54.5	A/F 9	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	37.5	A/F 9	A/F 13

Datasheet

Ordering data – Accessories			Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1	8032868	NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1	8032869	NEAU-A-N8-2
		• For Y-distributor with cable on both sides		

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket M8x1, A-coded, EN 61076-2-104		-M8	-M8
Cable outlet on the left	Straight		G	
	Angled		W	
Number of pins/cores on the left	4-pin		4	4
Display	Without	[1]		
	Signal status LED (for valves only)		L	
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[2]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None			
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[4]	3	
	4-pin		4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) Not in conjunction with number of poles/cores on the right 3
- 2) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 3 Only with connection technology on the right, LE
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
Mandatory specification in combination with cable outlet on the right, W
Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-M12

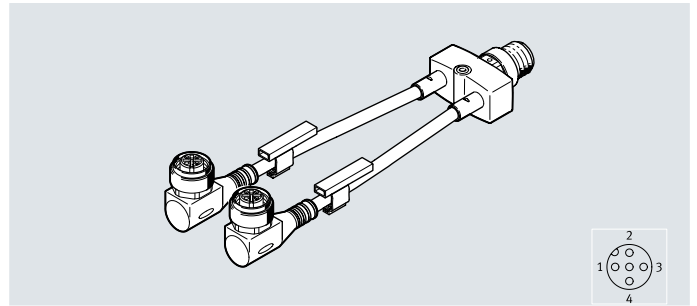- Dual distributor
- For connecting valves
- For connecting sensors
- With LED indicator for ready and switching status for connecting PNP sensors



General technical data

Display	None	Yellow LED, ready and switching status
Design	Y-distributor	
Type of distributor	Y type	
Type of mounting	Via accessories, via through-hole for M2 screw	
Cable designation	Via inscription label holder (optional)	
Based on standard	EN 61076-2-101, EN 61076-2-104	

Electrical connection 2

Function	Field device side	
Connection type	2 x socket	
Cable outlet	Angled, straight	Angled
Design	Round	
Connection technology	M12x1, A-coded to EN 61076-2-101	
Number of pins/cores	5	
Assigned pins/cores	4	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	
	Rotatable	
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock	

Technical data – Electrics

		Electrical connection 1			Electrical connection 2	
		Plug M12x1	Plug M8x1	Open end	No display	Indicator P
Operating voltage range	[V DC]	0 ... 30	0 ... 30	0 ... 30	0 ... 30	10 ... 30
	[V AC]	0 ... 30	0 ... 30	0 ... 30	–	–
Surge resistance	[kV]	0.8	0.8	0.8	0.8	0.8
Current rating at 40 °C	[A]	4	3	4	4	4
Pollution degree		3	3	3	3	3

Technical data – Cable

Cable diameter, controller side	[mm]	4.5
Cable diameter, field device side	[mm]	4.5
Nominal conductor cross-section	[mm ²]	0.25
Cable characteristic	Suitable for energy chains/robots	
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m	
Bending radius, flexible cable installation	[mm]	46

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	4
Assigned pins/cores	4	4	4
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, TPE-U(PUR)
Housing colour	Black
Union nut	Nickel-plated brass
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions




Ambient temperature	[°C]	–25 ... +80
Note on ambient temperature	[°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation	[°C]	–20 ... +80
Storage temperature	[°C]	–25 ... +80
Degree of protection		IP65/IP68, IP69K
CE marking (see declaration of conformity) ¹⁾		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		To UK RoHS regulations
Corrosion resistance class CRC2)		2

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
M12x1, straight	18	3-core	41	With cable outlet	10	4-core	26.5	M8x1	4.5
M12x1, angled	20	4-core	53	With plug M12x1	17			M12x1, straight	12
				With socket M12x1	19			M12x1, angled	12.5
				With plug M8x1	7			Open end	0

The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:

NEDY-L2R1-V1-M12G5-U-3L-LE4-10R

18 g + 3x 53 g + 10 g + 10x 26.5 g + 0 g = 452 g

Datasheet

Wiring without indication (socket/plug view)								
Connection no. 4	Pin	Wire colour ¹⁾	Wiring	Wire colour ¹⁾	Pin	Connection no. 2		
	1	BN		BN	1			
	2	WH		WH	2			
	3	BU		BU	3			
	4	BK		BK	4			
	5	–		–	5			
		Wire colour ¹⁾	BN	BK	BU	WH		
		Pin	1	4	3	2		
		Plug M8x1						
		Plug M12x1						

1) To IEC 757

Wiring with indication (socket/plug view)									
Connection no. 4	Pin	Wire colour ¹⁾	Wiring				Wire colour ¹⁾	Pin	Connection no. 2
	1	BN					BN	1	
	3	BU					BU	3	
	4	BK					BK	4	
	2	–					–	2	
	5	–					–	5	
		Wire colour ¹⁾	BN	BK	BU	WH			
		Pin	1	4	3	2			
		Plug M8x1							
		Plug M12x1							

1) To IEC 757

Datasheet

Dimensions

Y-distributor without cable

[1] Socket, field device side
[3] Distributor
[4] Plug, controller side

Download CAD data → www.festo.com

Distributor body front view

Electrical connection, controller side	B1	D1	D2 Ø	D5 Ø	D6	D7 Ø	H1	L7	L8	⌀ 1	⌀ 2
Plug M12x1	29.6	M12	15	2.2	M12	15	18	43.5	14	A/F 13	A/F 13

Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor without cable • Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

Y-distributor with cable, field device side

[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side


Electrical connection, controller side	B1	D1	D2 Ø	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	⌀ 1	⌀ 2
Electrical connection, field device side, straight														
Plug M12x1	29.6	M12	15	4.5	2.2	M12	15	–	300 ... 30000	47.5	42.7	29.5	A/F 13	A/F 13
Electrical connection, field device side, angled														
Plug M12x1	29.6	M12	15	4.5	2.2	M12	15	26	300 ... 30000	37.5	42.7	29.5	A/F 13	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

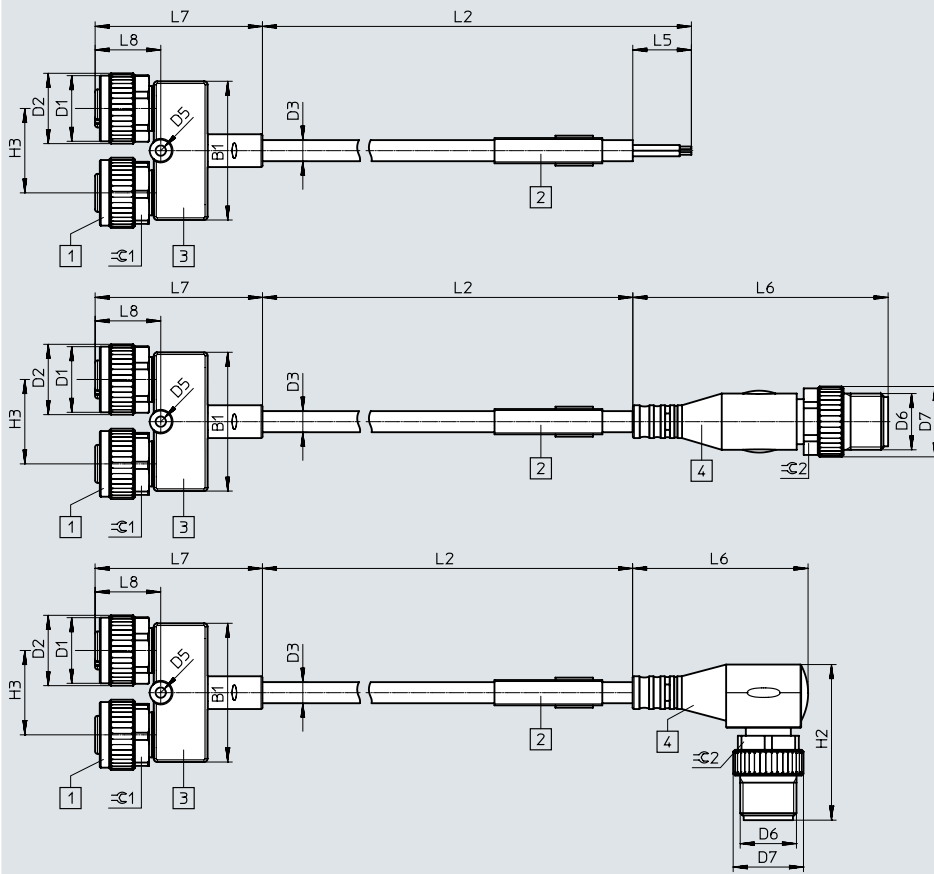Y-distributor with cable, controller side



[1] Socket, field device side

[2] Inscription label

[3] Distributor


[4] Plug, controller side

Electrical connection, controller side		B1	D1	D2 ø	D3 ø	D5 ø	D6	D7 ø	H2	H3	L2	L5	L6	L7	L8	≙ 1	≙ 2
Open cable end		29.6	M12	15	4.5	2.2	–	–	–	18	300 ... 30000	50	–	35.7	14	A/F 13	–
Plug M8x1	Straight	29.6	M12	15	4.5	2.2	M8	10	–	18	300 ... 30000	–	41.1	35.7	14	A/F 13	A/F 9
	Angled	29.6	M12	15	4.5	2.2	M8	10	24	18	300 ... 30000	–	26.9	35.7	14	A/F 13	A/F 9
Plug M12x1	Straight	29.6	M12	15	4.5	2.2	M12	15	–	18	300 ... 30000	–	54.5	35.7	14	A/F 13	A/F 13
	Angled	29.6	M12	15	4.5	2.2	M12	15	33.2	18	300 ... 30000	–	37.5	35.7	14	A/F 13	A/F 13

Datasheet

Dimensions Download CAD data → www.festo.com

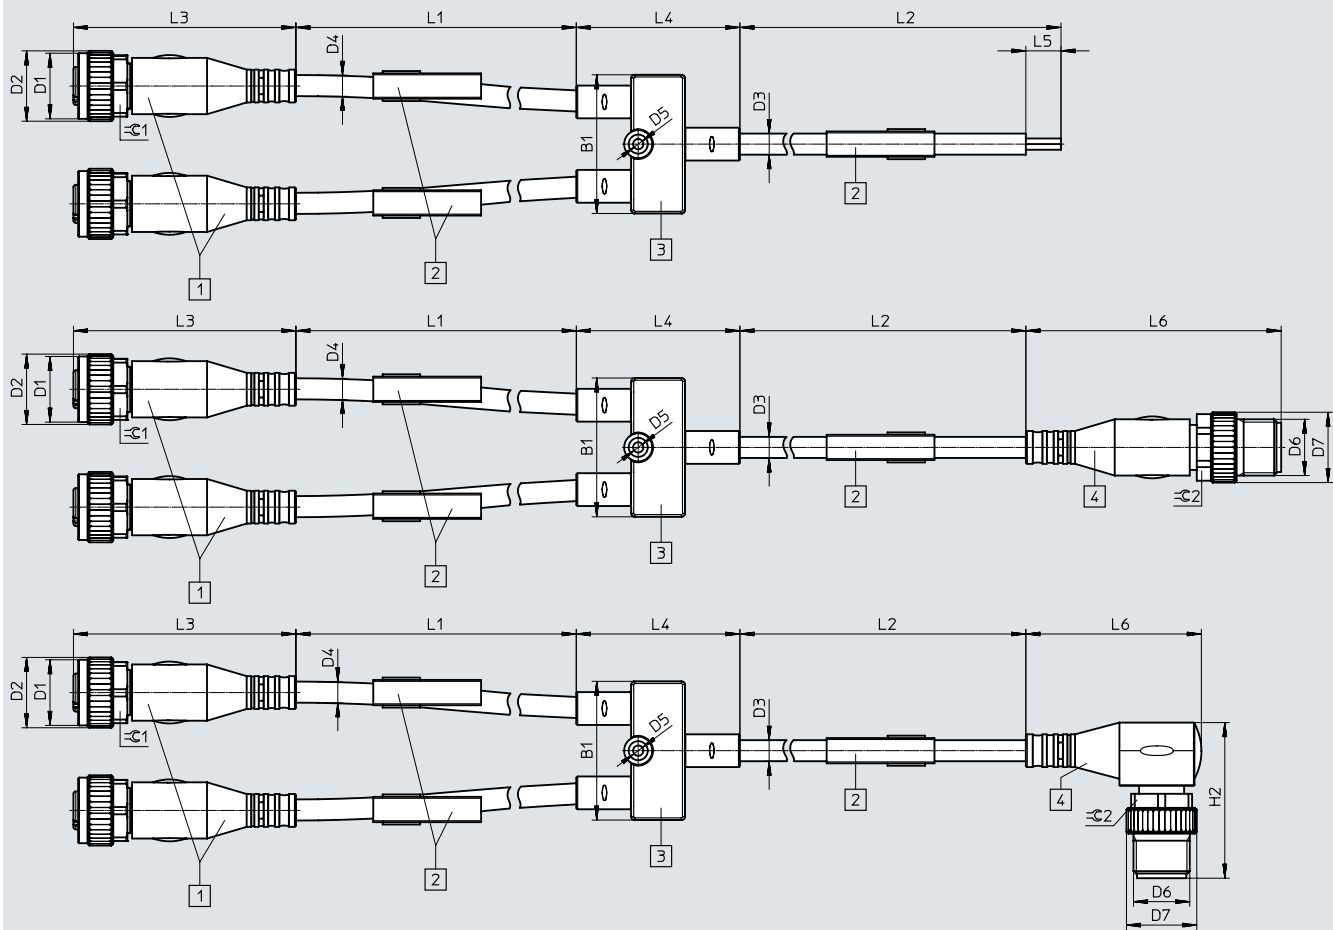Y-distributor with cables on both sides



[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side

Electrical connection, controller side		B1	D1	D2 Ø	D3 Ø	D4 Ø	D5 Ø	D6	H2
Open cable end		29.6	M12	15	4.5	4.5	2.2	–	–
Plug M8x1	Straight	29.6	M12	15	4.5	4.5	2.2	M8	–
	Angled	29.6	M12	15	4.5	4.5	2.2	M8	24
Plug M12x1	Straight	29.6	M12	15	4.5	4.5	2.2	M12	–
	Angled	29.6	M12	15	4.5	4.5	2.2	M12	33.2


Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≯ 1	≯ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	47.5	34.9	50	–	A/F 13	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	47.5	34.9	–	41.1	A/F 13	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	47.5	34.9	–	26.9	A/F 13	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	47.5	34.9	–	54.5	A/F 13	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	47.5	34.9	–	37.5	A/F 13	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

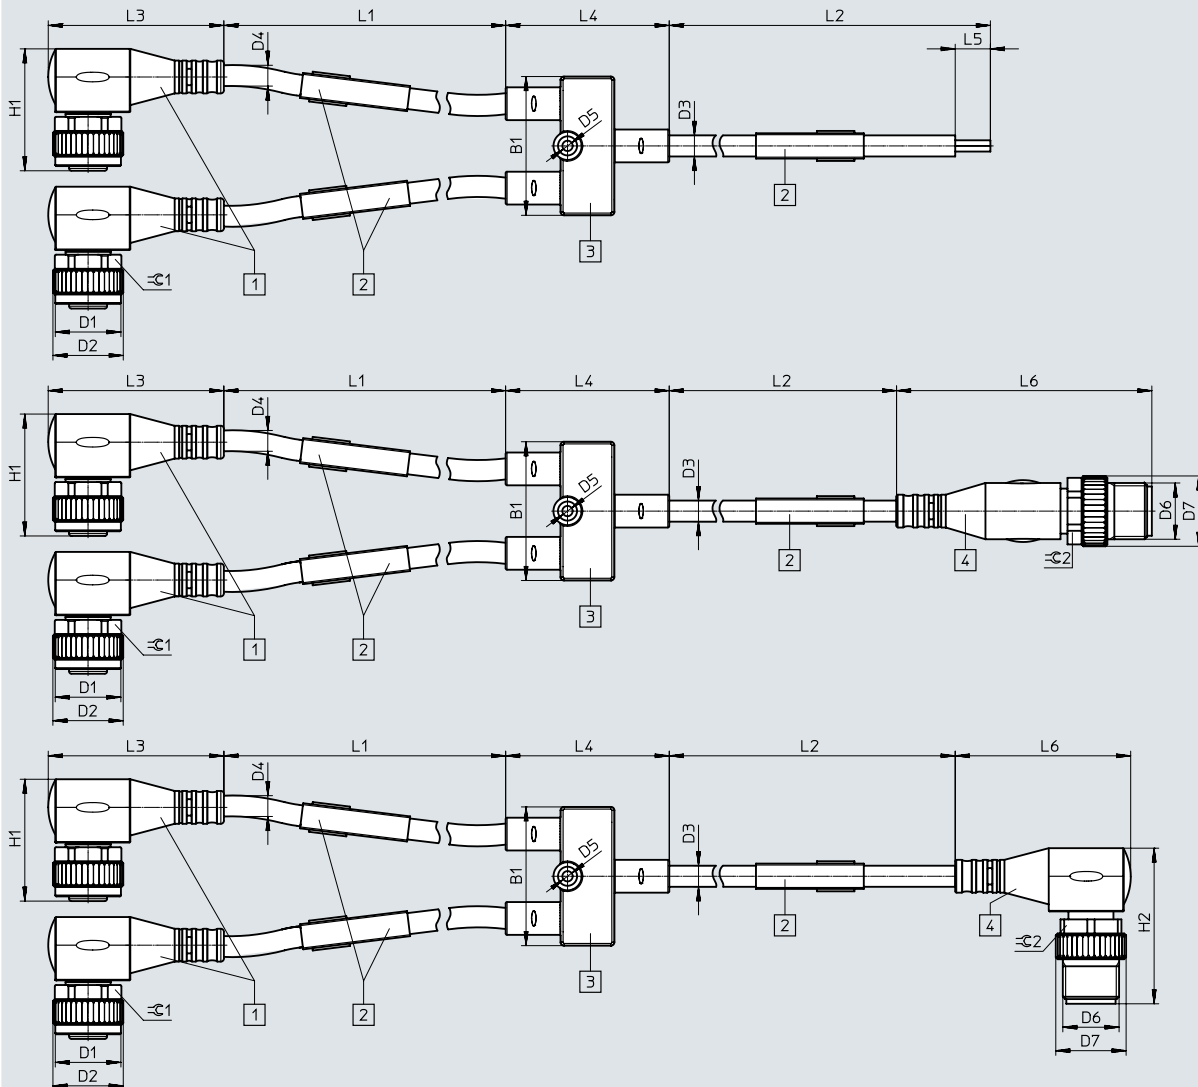Y-distributor with cables on both sides



[1] Socket, field device side

[2] Inscription label



[3] Distributor

[4] Plug, controller side

Electrical connection, controller side		B1	D1	D2 ø	D3 ø	D4 ø	D5 ø	D6	H1	H2
Open cable end		29.6	M12	15	4.5	4.5	2.2	–	26	–
Plug M8x1	Straight	29.6	M12	15	4.5	4.5	2.2	M8	26	–
	Angled	29.6	M12	15	4.5	4.5	2.2	M8	26	24
Plug M12x1	Straight	29.6	M12	15	4.5	4.5	2.2	M12	26	–
	Angled	29.6	M12	15	4.5	4.5	2.2	M12	26	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≙ 1	≙ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	37.5	34.9	50	–	A/F 13	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	37.5	34.9	–	41.1	A/F 13	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	37.5	34.9	–	26.9	A/F 13	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	37.5	34.9	–	54.5	A/F 13	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	37.5	34.9	–	37.5	A/F 13	A/F 13

Datasheet

Ordering data						
	Field device side	Controller side		Weight [g]	Part no.	Type
	Cable length [m]	Electrical connection	Cable length [m]			
Y-distributor without cable						
	0	Plug, straight, M12x1	0	27	8005310	NEDY-L2R1-V1-M12G5-N-M12G4
Y-distributor with cable, controller side						
	0	Plug, straight, M8x1	2.5	90	8032307	NEDY-L2R1-V1-M12G5-U-M8G4-2.5R
		Plug, straight, M12x1	2.5	97	8005305	NEDY-L2R1-V1-M12G5-U-M12G4-2.5R
			5	164	8005306	NEDY-L2R1-V1-M12G5-U-M12G4-5R
Y-distributor with cable on both sides						
	0.3	Plug, straight, M12x1	2.5	120	8035775	NEDY-L2R1-V1-M12G5-U-0.3L-M12G4-2.5R
			5	187	8035776	NEDY-L2R1-V1-M12G5-U-0.3L-M12G4-5R
Ordering data – Accessories						
					Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1			8032868	NEAU-A-N8-1
		• For Y-distributor without cable • For Y-distributor with cable on field device side and plug M12x1 • For Y-distributor with cable, controller side • For Y-distributor with cable on both sides			8032869	NEAU-A-N8-2

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket M12x1, A-coded, EN 61076-2-101		-M12	-M12
Cable outlet on the left	Straight		G	
	Angled		W	
Number of pins/cores on the left	5-pin		5	5
Display	Without			
	LED: ready for operation and switching status (for PNP sensors only)	[1]	P	
Cable characteristic	None			
	Suitable for energy chains/robots	[2]	-U	
Cable length on the left [m]	None			
	0.3 ... 30	[3]	-...L	
Cable designation	With inscription label holder	[2]		
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104	[2]	-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None			
	Straight	[4]	G	
	Angled	[4]	W	
Number of pins/cores on the right	4-pin		4	4
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) P Not in combination with cable outlet on the left, G
- 2) -U, -M8 Only with cable length on the left or cable length on the right
- 3) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 4) G, W Not in combination with connection technology on the right, controller side LE
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right W
- Mandatory specification in combination with connection technology on the right, controller side M8
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-A1

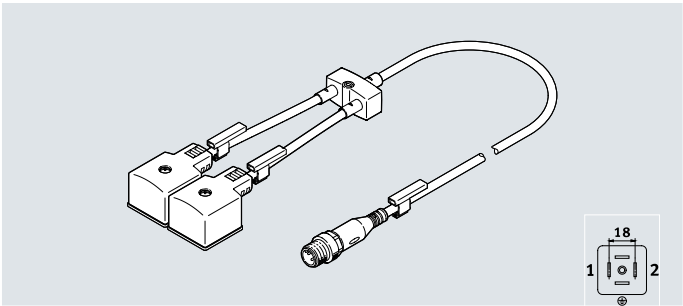- Dual distributor
- For connecting valves



General technical data				
Design	Y-distributor			
Type of distributor	Y type			
Type of mounting	Via accessories, via through-hole for M2 screw			
Cable designation	Via inscription label holder (optional)			
Based on standard	EN 175301-803, EN 61076-2-101, EN 61076-2-104			
Electrical connection 2				
Function	Field device side			
Connection type	2 x socket			
Cable outlet	Angled			
Design	Square			
Connection technology	Plug pattern type A to EN 175301-803			
Number of pins/cores	4			
Assigned pins/cores	2			
Type of mounting	On solenoid valve via M3 central screw			
Display	Yellow LED, signal status indication			
Technical data – Electrics				
Electrical connection 1		Plug M8x1	Plug M12x1	Open end
Operating voltage range	[V DC]	20.4 ... 27.6	20.4 ... 27.6	20.4 ... 27.6
Surge resistance	[kV]	0.8	0.8	0.8
Current rating at 40 °C	[A]	3	4	4
Pollution degree		3	3	3
Technical data – Cable				
Cable diameter	[mm]	3.8		
Nominal conductor cross-section	[mm²]	0.25		
Cable characteristic		Suitable for energy chains/robots		
Test conditions, cable		Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m		
Bending radius, flexible cable installation	[mm]	39		

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, PC, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy, silver-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions





Ambient temperature [°C]	–20 ... +80
Note on ambient temperature [°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation [°C]	–20 ... +80
Storage temperature [°C]	–20 ... +80
Degree of protection	IP65/IP67
CE marking (see declaration of conformity) ¹⁾	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK RoHS regulations
Corrosion resistance class CRC2)	1

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).





If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern type A	41	3-core	41	With cable outlet	10	3-core	19.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0
The weight of the individual components must be added together to determine the overall weight: socket + length x cable + distributor + length x cable + plug Example: NEDY-L2R1-V1-A1W4L-U-3L-LE3-10R 41 g + 3x 41 g + 10 g + 10x 19.5 g + 0 g = 369 g									

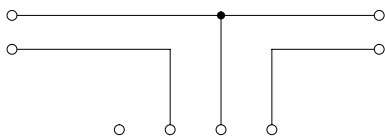Datasheet

Wiring (socket/plug view)		Pin		Wire colour ¹⁾		Wiring		Wire colour ¹⁾		Pin		Connection no. 2	
Connection no. 4		1		BN				BN		1			
		2		BU				BU		2			
				Wire colour ¹⁾		–		BK		BU		BN	
				Pin		1		4		3		2	
				Plug M8x1									
													
				Plug M12x1									


1) To IEC 757

Datasheet

Dimensions


[Download CAD data → www.festo.com](http://www.festo.com)

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

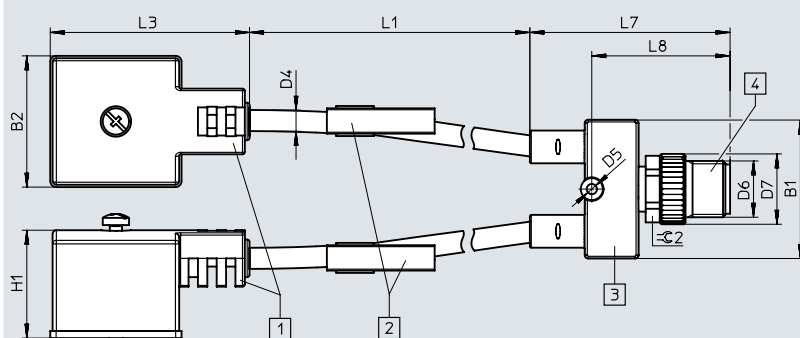Y-distributor with cable, field device side



[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side

Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	≈ 2°
Plug M8x1	21	27	3.8	2.2	M8	10	23.6	300 ... 30000	42	35	21.6	A/F 9
Plug M12x1	29.6	27	3.8	2.2	M12	15	23.6	300 ... 30000	42	42.7	29.5	A/F 13

Download CAD data → www.festo.com

Technical drawings of three cable assemblies (A, B, C) showing dimensions and labels. The drawings are arranged vertically.

Assembly A (Top): Shows a cable assembly with dimensions L3, L1, L4, L2, and L5. Labels 1, 2, 3, and 4 indicate specific components. Dimensions B2, H1, D4, B1, D5, D3, and D2 are also shown.

Assembly B (Middle): Shows a cable assembly with dimensions L3, L1, L4, L2, and L6. Labels 1, 2, 3, and 4 indicate specific components. Dimensions B2, H1, D4, B1, D5, D3, and D2 are also shown.


Assembly C (Bottom): Shows a cable assembly with dimensions L3, L1, L4, L2, and L6. Labels 1, 2, 3, and 4 indicate specific components. Dimensions B2, H1, D4, B1, D5, D3, D2, H2, D6, and D7 are also shown.


[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side

Electrical connection, controller side		B1	B2	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	27	3.8	3.8	2.2	–	23.6	–
Plug M8x1	Straight	29.6	27	3.8	3.8	2.2	M8	23.6	–
	Angled	29.6	27	3.8	3.8	2.2	M8	23.6	24
Plug M12x1	Straight	29.6	27	3.8	3.8	2.2	M12	23.6	–
	Angled	29.6	27	3.8	3.8	2.2	M12	23.6	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≅ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	42	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	42	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	42	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	42	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	42	34.9	–	37.5	A/F 13

Datasheet

Ordering data						
	Field device side	Controller side		Weight [g]	Part no.	Type
	Cable length [m]	Electrical connection	Cable length [m]			
Y-distributor with cable on both sides						
	0.3	Plug, straight, M12x1	2.5	123	8035791	NEDY-L2R1-V1-A1W4L-U-0.3L-M12G4-2.5R

Ordering data – Accessories				Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1		8032868	NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1		8032869	NEAU-A-N8-2
		• For Y-distributor with cable on both sides			

Ordering data – Modular product system

Ordering table


		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket type A, EN 175301-803		-A1	-A1
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	4-pin		4	4
Display	Signal status LED (for valves only)		L	L
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right, W
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-B1

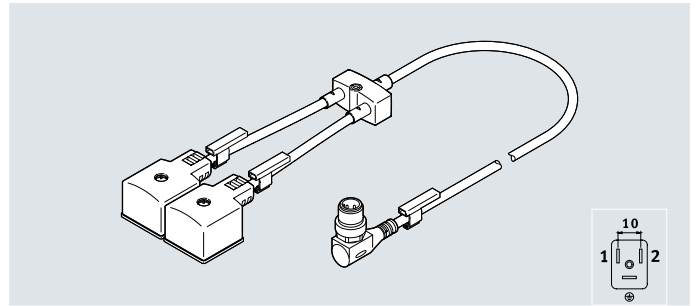- Dual distributor
- For connecting valves



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 175301-803, EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Angled
Design	Square
Connection technology	Plug pattern type B to EN 175301-803
Number of pins/cores	3
Assigned pins/cores	2
Type of mounting	On solenoid valve via M3 central screw
Display	Yellow LED, signal status indication

Technical data – Electrics

Electrical connection 1	Plug M8x1	Plug M12x1	Open end
Operating voltage range [V DC]	20.4 ... 27.6	20.4 ... 27.6	20.4 ... 27.6
Surge resistance [kV]	0.8	0.8	0.8
Current rating at 40 °C [A]	3	4	4
Pollution degree	3	3	3

Technical data – Cable

Cable diameter [mm]	3.8
Nominal conductor cross-section [mm ²]	0.25
Cable characteristic	Suitable for energy chains/robots
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m
Bending radius, flexible cable in-stallation [mm]	39

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, PC, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy, silver-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions






Ambient temperature	[°C]	–20 ... +80
Note on ambient temperature	[°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation	[°C]	–20 ... +80
Storage temperature	[°C]	–20 ... +80
Degree of protection		IP65/IP67
CE marking (see declaration of conformity) ¹⁾		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		To UK RoHS regulations
Corrosion resistance class CRC2)		1

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern type B	40	3-core	41	With cable outlet	10	3-core	19.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0

The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:

NEDY-L2R1-V1-B1W3L-U-3L-LE3-10R

40 g + 3x 41 g + 10 g + 10x 19.5 g + 0 g = 368 g

Datasheet

Wiring (socket/plug view)		Connection no. 4		Connection no. 2													
Pin	Wire colour ¹⁾	Wiring		Wire colour ¹⁾	Pin												
1	BN			BN	1												
2	BU			BU	2												
		<table border="1"> <thead> <tr> <th>Wire colour¹⁾</th> <th>–</th> <th>BK</th> <th>BU</th> <th>BN</th> <th></th> </tr> </thead> <tbody> <tr> <td>Pin</td> <td>1</td> <td>4</td> <td>3</td> <td>2</td> <td></td> </tr> </tbody> </table>		Wire colour ¹⁾	–	BK	BU	BN		Pin	1	4	3	2			
Wire colour ¹⁾	–	BK	BU	BN													
Pin	1	4	3	2													
		Plug M8x1 															
		Plug M12x1 															


1) To IEC 757

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

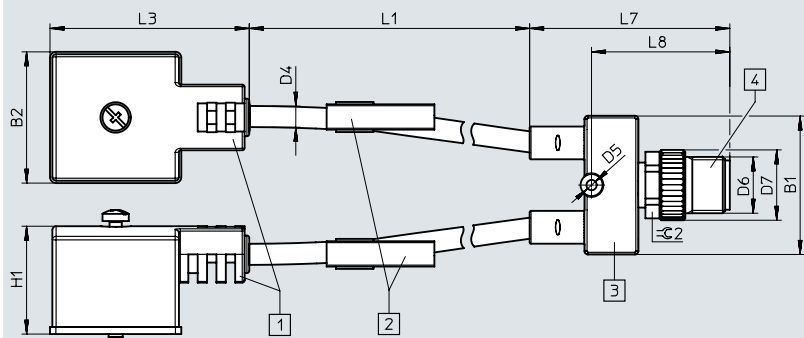Y-distributor with cable, field device side



- [1] Socket, field device side
- [2] Inscription label
- [3] Distributor
- [4] Plug, controller side


Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	≈ 2
Plug M8x1	21	21	3.8	2.2	M8	10	23.9	300 ... 30000	43	35	21.6	A/F 9
Plug M12x1	29.6	21	3.8	2.2	M12	15	23.9	300 ... 30000	43	42.7	29.5	A/F 13

Datasheet

Dimensions

Y-distributor with cables on both sides

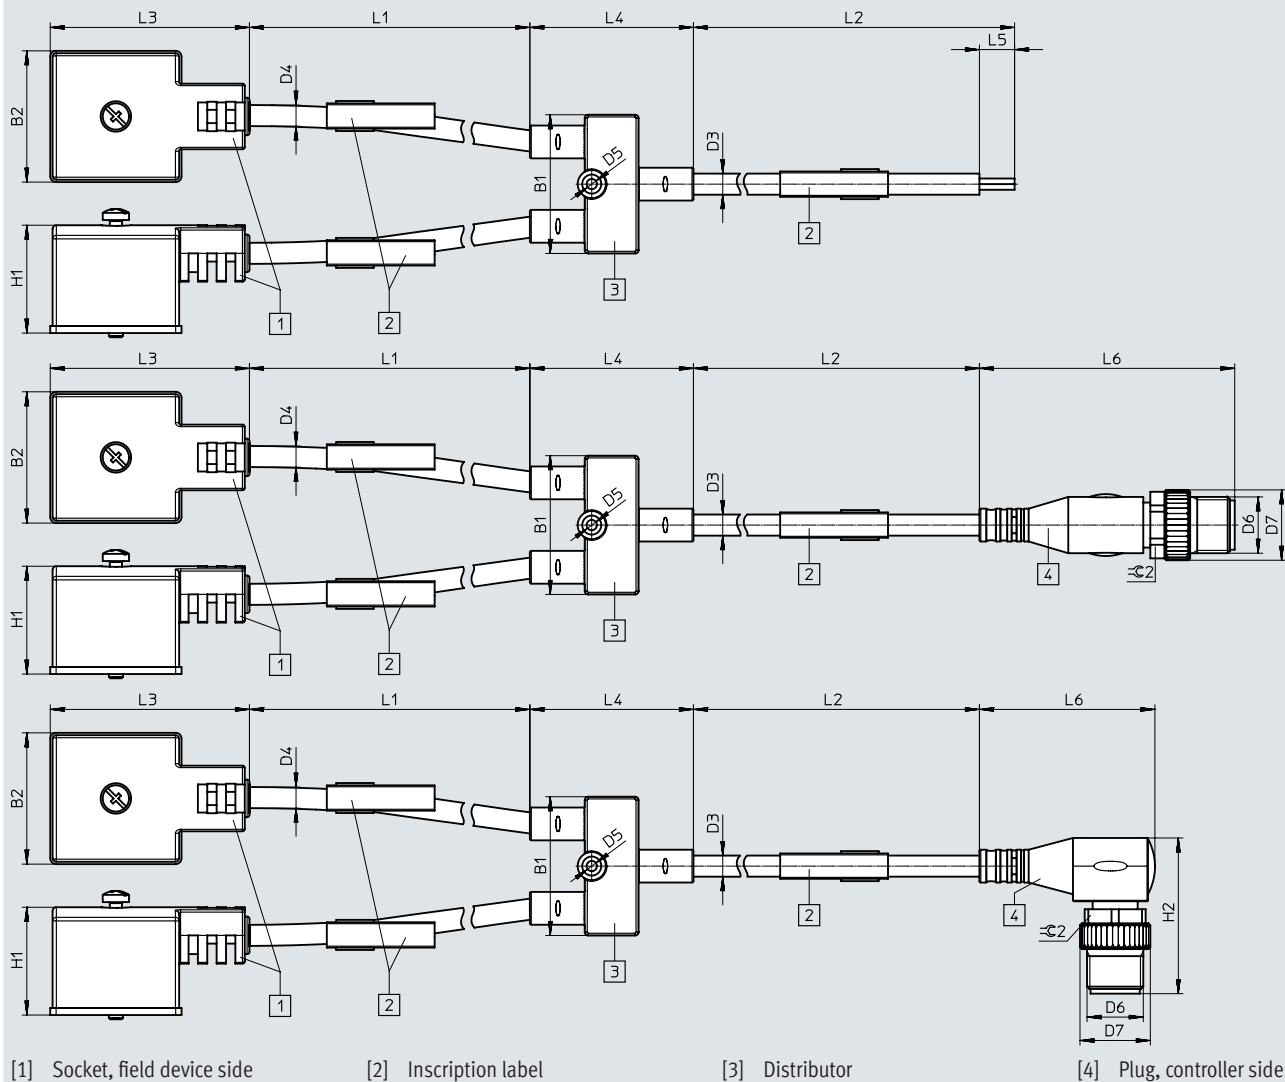Download CAD data → www.festo.com



Electrical connection, controller side		B1	B2	D3 ø	D4 ø	D5 ø	D6	H1	H2
Open cable end		29.6	21	3.8	3.8	2.2	–	23.9	–
Plug M8x1	Straight	29.6	21	3.8	3.8	2.2	M8	23.9	–
	Angled	29.6	21	3.8	3.8	2.2	M8	23.9	24
Plug M12x1	Straight	29.6	21	3.8	3.8	2.2	M12	23.9	–
	Angled	29.6	21	3.8	3.8	2.2	M12	23.9	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≅ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	37.5	A/F 13

Ordering data – Accessories

		Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1	8032868 NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1	8032869 NEAU-A-N8-2
		• For Y-distributor with cable on both sides	

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket type B, EN 175301-803		-B1	-B1
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	3-pin		3	3
Display	Signal status LED (for valves only)		L	L
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right, W
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-B2

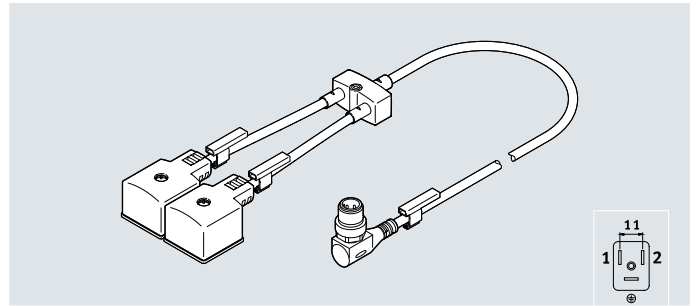- Dual distributor
- For connecting valves



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Angled
Design	Square
Connection technology	Plug pattern type B to industry standard, 11 mm
Number of pins/cores	3
Assigned pins/cores	2
Type of mounting	On solenoid valve via M3 central screw
Display	Yellow LED, signal status indication

Technical data – Electrics

Electrical connection 1	Plug M8x1	Plug M12x1	Open end
Operating voltage range [V DC]	20.4 ... 27.6	20.4 ... 27.6	20.4 ... 27.6
Surge resistance [kV]	0.8	0.8	0.8
Current rating at 40 °C [A]	3	4	4
Pollution degree	3	3	3

Technical data – Cable

Cable diameter [mm]	3.8
Nominal conductor cross-section [mm ²]	0.25
Cable characteristic	Suitable for energy chains/robots
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m
Bending radius, flexible cable in-stallation [mm]	39

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, PC, TPE-U(PUR)
Housing colour	Black
Union nut	Nickel-plated brass
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy, silver-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions





Ambient temperature	[°C]	–20 ... +80
Note on ambient temperature	[°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation	[°C]	–20 ... +80
Storage temperature	[°C]	–20 ... +80
Degree of protection		IP65/IP67
CE marking (see declaration of conformity) ¹⁾		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		To UK RoHS regulations
Corrosion resistance class CRC2)		1

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern type B	40	3-core	41	With cable outlet	10	3-core	19.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0

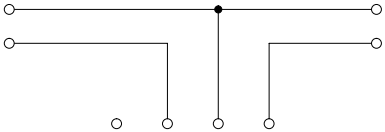




The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:

NEDY-L2R1-V1-B2W3L-U-3L-LE3-10R

40 g + 3x 41 g + 10 g + 10x 19.5 g + 0 g = 368 g

Datasheet

Wiring (socket/plug view)		Pin		Wire colour ¹⁾		Wiring		Wire colour ¹⁾		Pin		Connection no. 2			
Connection no. 4		1		BN				BN		1					
		2		BU				BU		2					
															
				Wire colour ¹⁾		–		BK		BU		BN			
				Pin		1		4		3		2			
								Plug M8x1							
															
								Plug M12x1							
															


1) To IEC 757

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

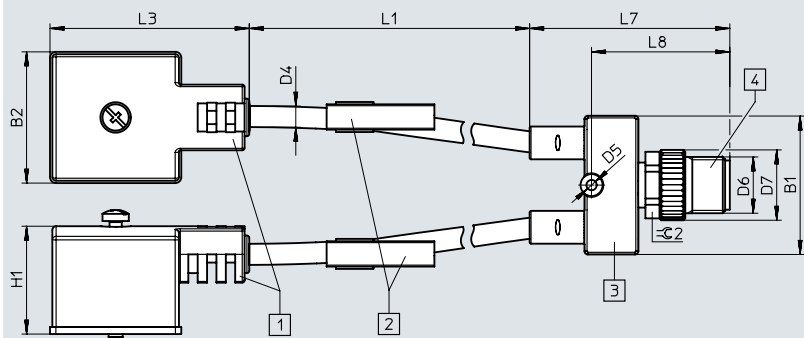Y-distributor with cable, field device side



- [1] Socket, field device side
- [2] Inscription label
- [3] Distributor
- [4] Plug, controller side


Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	≈ 2
Plug M8x1	21	21	3.8	2.2	M8	10	23.9	300 ... 30000	43	35	21.6	A/F 9
Plug M12x1	29.6	21	3.8	2.2	M12	15	23.9	300 ... 30000	43	42.7	29.5	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

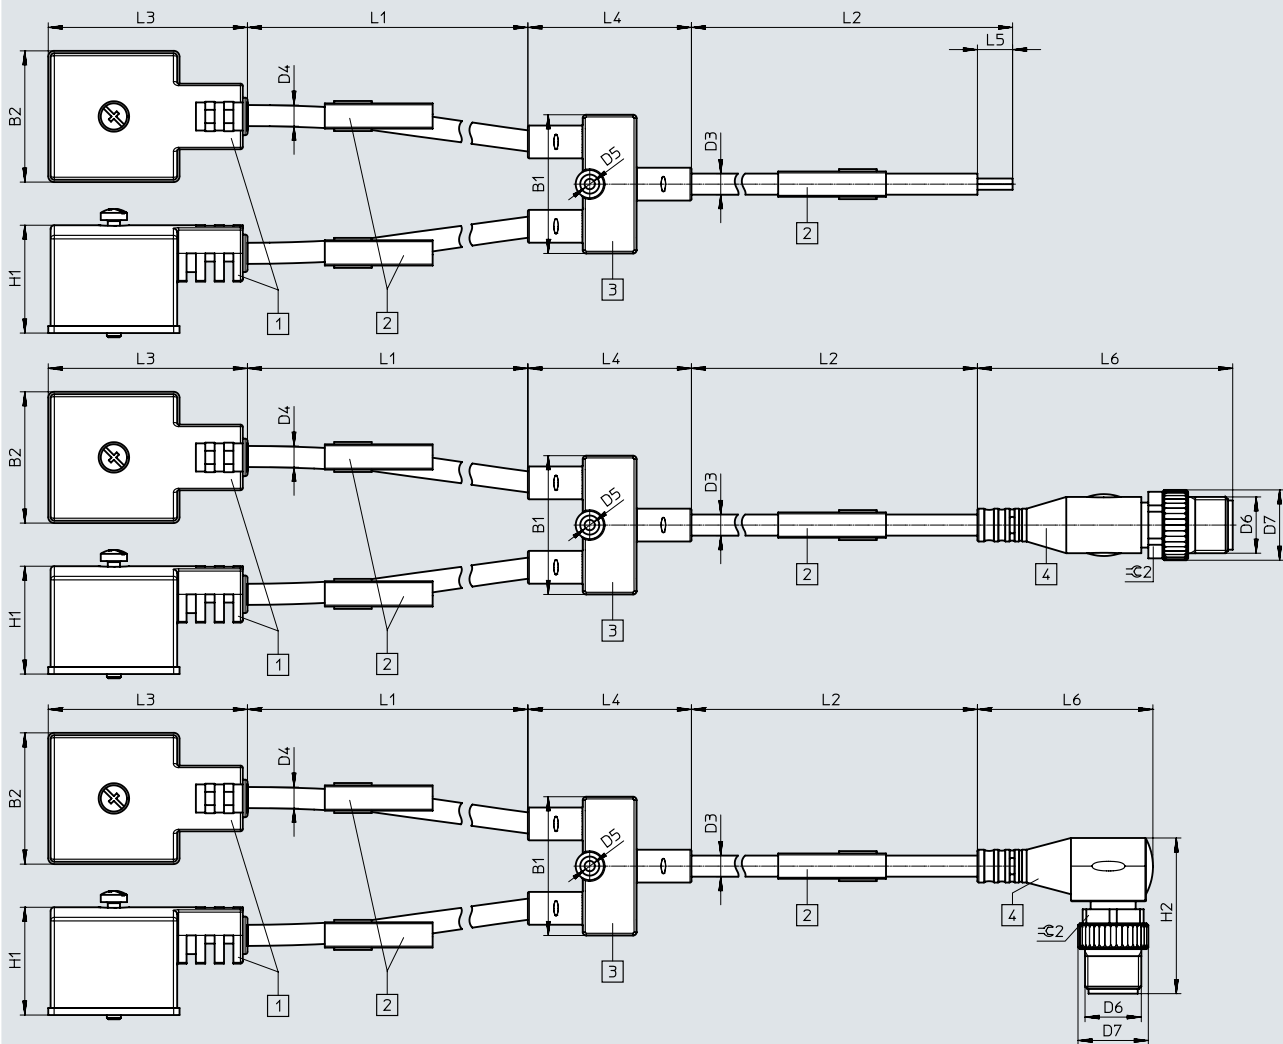Y-distributor with cables on both sides



[1] Socket, field device side

[2] Inscription label


[3] Distributor


[4] Plug, controller side

Electrical connection, controller side		B1	B2	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	21	3.8	3.8	2.2	–	23.9	–
Plug M8x1	Straight	29.6	21	3.8	3.8	2.2	M8	23.9	–
	Angled	29.6	21	3.8	3.8	2.2	M8	23.9	24
Plug M12x1	Straight	29.6	21	3.8	3.8	2.2	M12	23.9	–
	Angled	29.6	21	3.8	3.8	2.2	M12	23.9	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≈ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	43	34.9	–	37.5	A/F 13

Datasheet

Ordering data						
	Field device side	Controller side		Weight [g]	Part no.	Type
	Cable length [m]	Electrical connection	Cable length [m]			
Y-distributor with cable on both sides						
	0.3	Plug, straight, M12x1	2.5	124	8035779	NEDY-L2R1-V1-B2W3L-U-0.3L-M12G4-2.5R

Ordering data – Accessories				
	Mounting for T-slot		Part no.	Type
		• For Y-distributor with cable on field device side and plug M8x1	8032868	NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1	8032869	NEAU-A-N8-2
		• For Y-distributor with cable on both sides		

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket type B, industry standard, 11 mm		-B2	-B2
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	3-pin		3	3
Display	Signal status LED (for valves only)		L	L
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right, W
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-C1

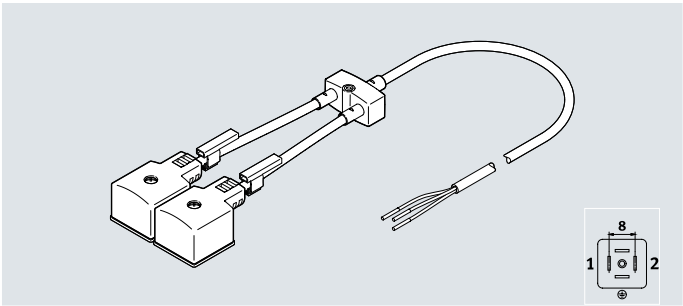- Dual distributor
- For connecting valves



General technical data				
Design		Y-distributor		
Type of distributor		Y type		
Type of mounting		Via accessories, via through-hole for M2 screw		
Cable designation		Via inscription label holder (optional)		
Based on standard		EN 175301-803, EN 61076-2-101, EN 61076-2-104		
Electrical connection 2				
Function		Field device side		
Connection type		2 x socket		
Cable outlet		Angled		
Design		Square		
Connection technology		Plug pattern type C to EN 175301 803		
Number of pins/cores		4		
Assigned pins/cores		2		
Type of mounting		On solenoid valve with M2.5 central screw		
Display		Yellow LED, signal status indication		
Technical data – Electrics				
Electrical connection 1		Plug M8x1	Plug M12x1	Open end
Operating voltage range	[V DC]	20.4 ... 27.6	20.4 ... 27.6	20.4 ... 27.6
Surge resistance	[kV]	0.8	0.8	0.8
Current rating at 40 °C	[A]	3	4	4
Pollution degree		3	3	3
Technical data – Cable				
Cable diameter	[mm]	3.8		
Nominal conductor cross-section	[mm²]	0.25		
Cable characteristic		Suitable for energy chains/robots		
Test conditions, cable		Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m		
Bending radius, flexible cable in-stallation	[mm]	39		

Datasheet

Technical data – Electrical connection 1			
Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl		–
	Rotatable		–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–





Materials	
Housing	PA, PC, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy, silver-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions	
Ambient temperature [°C]	–20 ... +80
Note on ambient temperature [°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation [°C]	–20 ... +80
Storage temperature [°C]	–20 ... +80
Degree of protection	IP65/IP67
CE marking (see declaration of conformity) ¹⁾	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK RoHS regulations
Corrosion resistance class CRC2)	1






1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight									
									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern type C		3-core		With cable outlet		3-core		M8x1	
20		41		10		19.5		4.5	
				With plug M12x1				M12x1, straight	
				17				12	
				With plug M8x1				M12x1, angled	
				7				12.5	
				With socket M8x1				Open end	
				8				0	
The weight of the individual components must be added together to determine the overall weight: socket + length x cable + distributor + length x cable + plug									
Example: NEDY-L2R1-V1-C1W4L-U-3L-LE3-10R 20 g + 3x 41 g + 10 g + 10x 19.5 g + 0 g = 348 g									

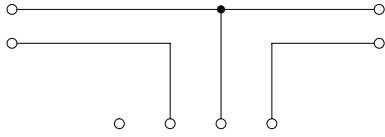Datasheet

Wiring (socket/plug view)		Pin		Wire colour ¹⁾		Wiring		Wire colour ¹⁾		Pin		Connection no. 2			
Connection no. 4		1	BN					BN		1					
		2	BU					BU		2					
															
				Wire colour ¹⁾											
				Pin											
				Plug M8x1											
				Plug M12x1											
															
															


1) To IEC 757

Datasheet

Dimensions


[Download CAD data → www.festo.com](http://www.festo.com)

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

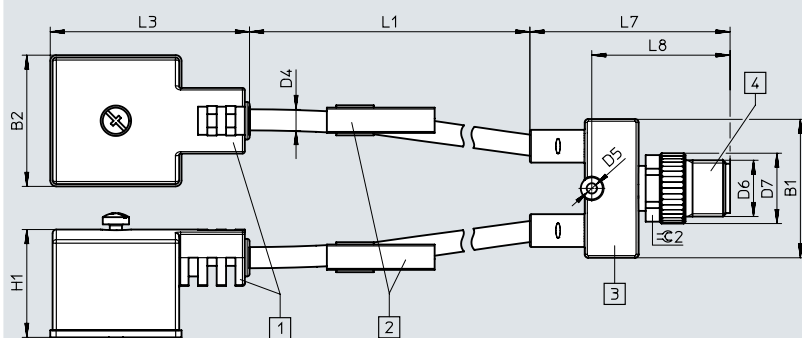Y-distributor with cable, field device side



[1] Socket, field device side

[2] Inscription label

[3] Distributor

[4] Plug, controller side


Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	≈ 2°
Plug M8x1	21	16	3.8	2.2	M8	10	21.3	300 ... 30000	30.5	35	21.6	A/F 9
Plug M12x1	29.6	16	3.8	2.2	M12	15	21.3	300 ... 30000	30.5	42.7	29.5	A/F 13

Datasheet

Dimensions

Download CAD data → www.festo.com

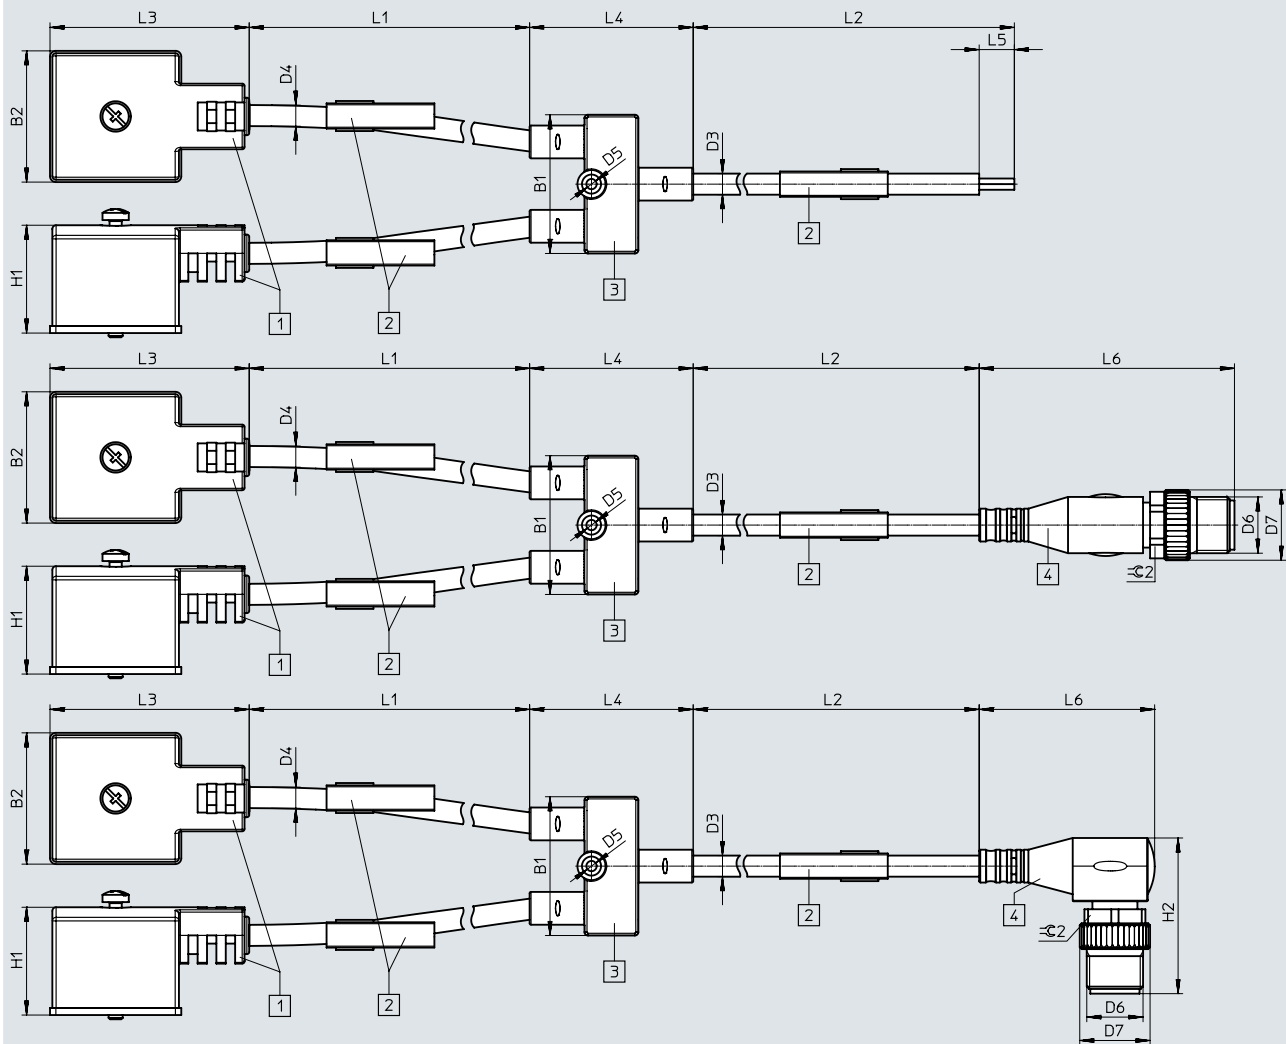Y-distributor with cables on both sides





[1] Socket, field device side [2] Inscription label [3] Distributor [4] Plug, controller side

Electrical connection, controller side		B1	B2	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	16	3.8	3.8	2.2	–	21.3	–
Plug M8x1	Straight	29.6	16	3.8	3.8	2.2	M8	21.3	–
	Angled	29.6	16	3.8	3.8	2.2	M8	21.3	24
Plug M12x1	Straight	29.6	16	3.8	3.8	2.2	M12	21.3	–
	Angled	29.6	16	3.8	3.8	2.2	M12	21.3	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≅ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	37.5	A/F 13

Datasheet

Ordering data						
	Field device side	Controller side		Weight [g]	Part no.	Type
	Cable length [m]	Electrical connection	Cable length [m]			
Y-distributor with cable on both sides						
	0.3	Plug, straight, M12x1	2.5	104	8035783	NEDY-L2R1-V1-C1W4L-U-0.3L-M12G4-2.5R
			5	153	8035784	NEDY-L2R1-V1-C1W4L-U-0.3L-M12G4-5R

Ordering data – Accessories				Part no.	Type
	Mounting for T-slot				
		For Y-distributor with cable on field device side and plug M8x1		8032868	NEAU-A-N8-1
		- For Y-distributor with cable on field device side and plug M12x1 - For Y-distributor with cable on both sides		8032869	NEAU-A-N8-2

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket type C, EN 175301-803		-C1	-C1
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	4-pin		4	4
Display	Signal status LED (for valves only)		L	L
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right, W
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-E1

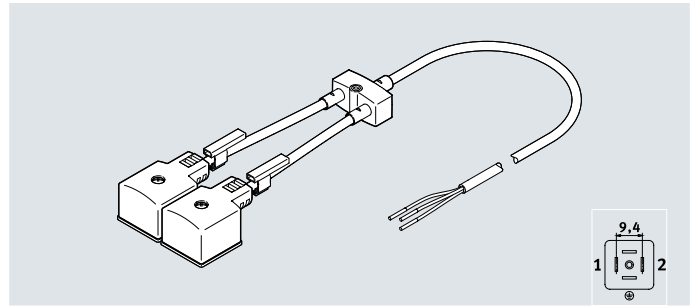- Dual distributor
- For connecting valves



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Angled
Design	Square
Connection technology	Plug pattern type C to industry standard, 9.4 mm
Number of pins/cores	4
Assigned pins/cores	2
Type of mounting	On solenoid valve via M3 central screw
Display	Yellow LED, signal status indication

Technical data – Electrics

Electrical connection 1	Plug M8x1	Plug M12x1	Open end
Operating voltage range [V DC]	20.4 ... 27.6	20.4 ... 27.6	20.4 ... 27.6
Surge resistance [kV]	0.8	0.8	0.8
Current rating at 40 °C [A]	3	4	4
Pollution degree	3	3	3

Technical data – Cable

Cable diameter [mm]	3.8
Nominal conductor cross-section [mm ²]	0.25
Cable characteristic	Suitable for energy chains/robots
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m
Bending radius, flexible cable in-stallation [mm]	39

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, PC, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy, silver-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions






Ambient temperature	[°C]	–20 ... +80
Note on ambient temperature	[°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation	[°C]	–20 ... +80
Storage temperature	[°C]	–20 ... +80
Degree of protection		IP65/IP67
CE marking (see declaration of conformity) ¹⁾		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		To UK RoHS regulations
Corrosion resistance class CRC2)		1

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern type C	20	3-core	41	With cable outlet	10	3-core	19.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0


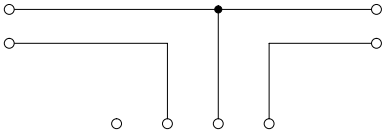



The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:

NEDY-L2R1-V1-E1W4L-U-3L-LE3-10R

20 g + 3x 41 g + 10 g + 10x 19.5 g + 0 g = 348 g

Datasheet


Wiring (socket/plug view)											
Connection no. 4		Pin	Wire colour ¹⁾	Wiring					Wire colour ¹⁾	Pin	Connection no. 2
	1	BN						BN	1		
	2	BU						BU	2		
			Wire colour ¹⁾	–	BK	BU	BN				
			Pin	1	4	3	2				
		Plug M8x1									
											
		Plug M12x1									
											

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

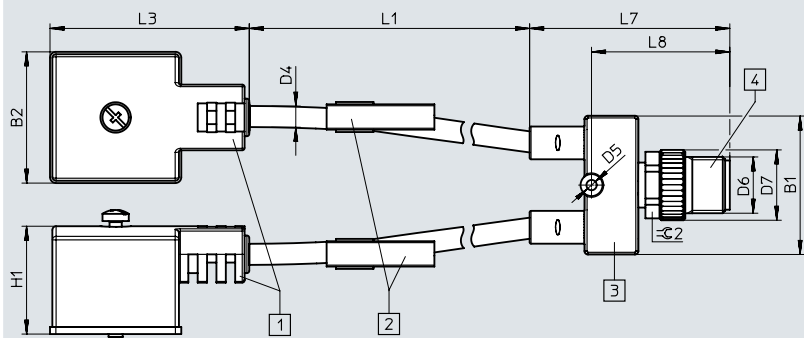Y-distributor with cable, field device side



- [1] Socket, field device side
- [2] Inscription label
- [3] Distributor
- [4] Plug, controller side


Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	≅ 2
Plug M8x1	21	16	3.8	2.2	M8	10	21.2	300 ... 30000	30.5	35	21.6	A/F 9
Plug M12x1	29.6	16	3.8	2.2	M12	15	21.2	300 ... 30000	30.5	42.7	29.5	A/F 13

Datasheet

Dimensions

Download CAD data → www.festo.com

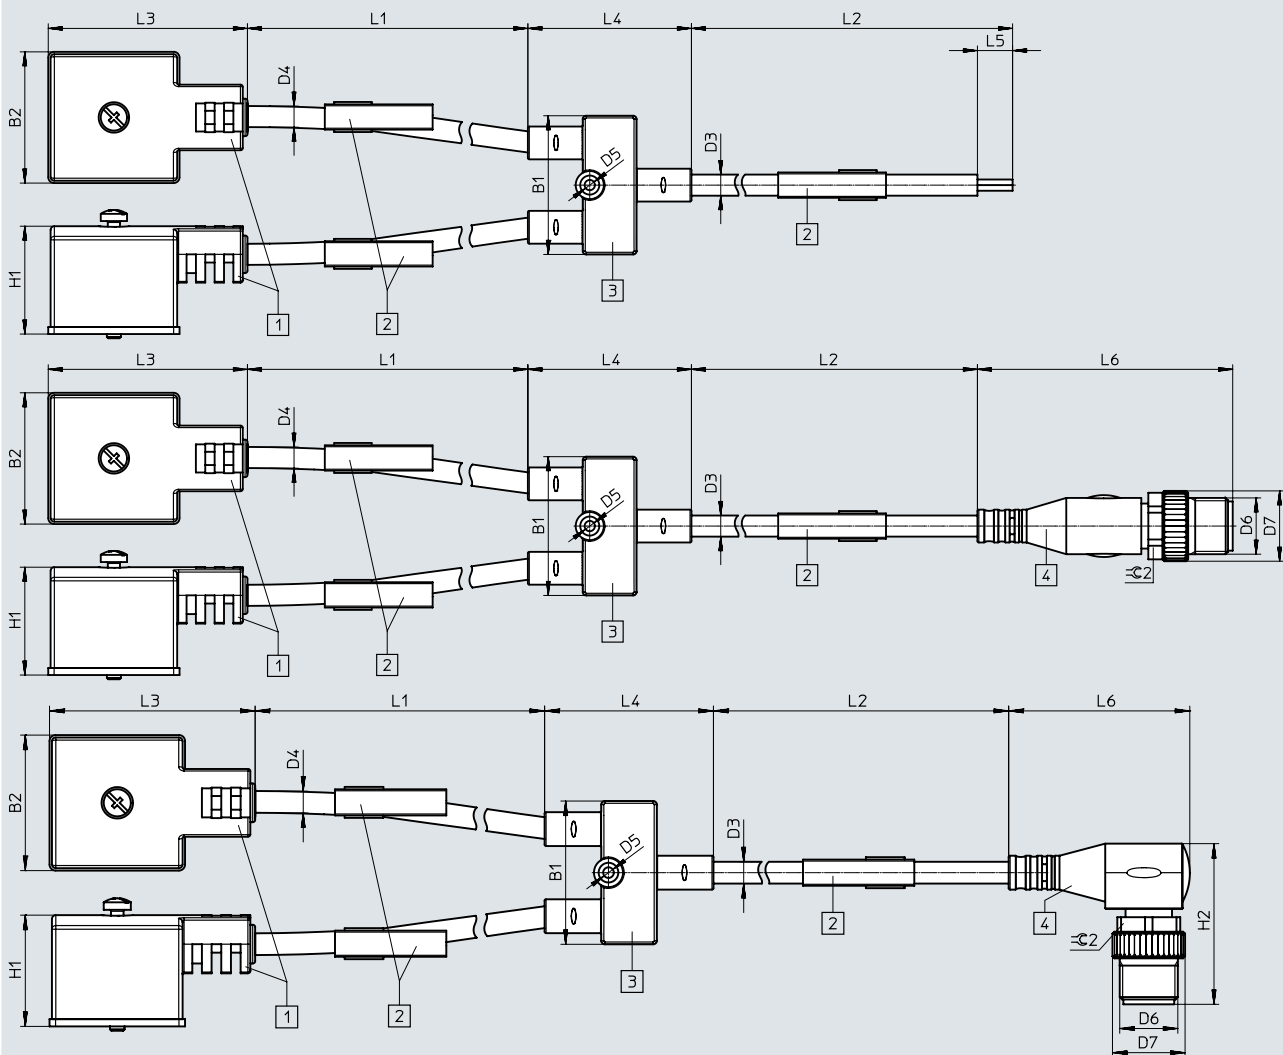Y-distributor with cables on both sides



[1] Socket, field device side

[2] Inscription label

[3] Distributor

[4] Plug, controller side

Electrical connection, controller side		B1	B2	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	16	3.8	3.8	2.2	–	21.2	–
Plug M8x1	Straight	29.6	16	3.8	3.8	2.2	M8	21.2	–
	Angled	29.6	16	3.8	3.8	2.2	M8	21.2	24
Plug M12x1	Straight	29.6	16	3.8	3.8	2.2	M12	21.2	–
	Angled	29.6	16	3.8	3.8	2.2	M12	21.2	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≈ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	30.5	34.9	–	37.5	A/F 13

Ordering data – Accessories

		Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1	8032868 NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1	8032869 NEAU-A-N8-2
		• For Y-distributor with cable on both sides	

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket type C, industry standard, 9.4 mm		-E1	-E1
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	4-pin		4	4
Display	Signal status LED (for valves only)		L	L
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right, W
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-H1

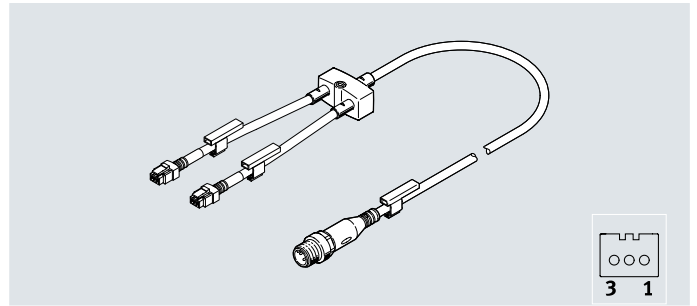- Dual distributor
- For connecting valves



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Straight
Design	Square
Connection technology	Plug pattern H
Number of pins/cores	3
Assigned pins/cores	2
Type of mounting	Inserted
Display	—

Technical data – Electrics

Operating voltage range	[V DC]	0 ... 30
Surge resistance	[kV]	0.8
Current rating at 40 °C	[A]	3
Pollution degree		3

Technical data – Cable

	Field device side	Controller side
Cable diameter	[mm]	3.4
Nominal conductor cross-section	[mm ²]	0.14
Cable characteristic	Standard	Suitable for energy chains/robots
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Resistance to bending: 10000 cycles • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m
Bending radius, flexible cable installation	[mm]	34
		39

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, POM, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy, tin-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions






Ambient temperature	[°C]	–20 ... +80
Note on ambient temperature	[°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation	[°C]	–5 ... +70
Storage temperature	[°C]	–20 ... +70
Degree of protection		IP40
CE marking (see declaration of conformity) ¹⁾		To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾		To UK RoHS regulations
Corrosion resistance class CRC2)		4

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern H	2	2-core	31	With cable outlet	10	3-core	19.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0






The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:

NEDY-L2R1-V1-H1G3-U-3L-LE3-10R

2 g + 3x 31 g + 10 g + 10x 19.5 g + 0 g = 300 g

Datasheet

Wiring (socket/plug view)			Wiring			Wiring		
Connection no. 4			Pin	Wire colour ¹⁾		Wire colour ¹⁾	Pin	Connection no. 2
 3 1	1	RD				RD	1	 3 1
	2	–				–	2	
	3	BK				BK	3	
			Wire colour ¹⁾	–	BK	BU	BN	
			Pin	1	4	3	2	
			Plug M8x1					
								
			Plug M12x1					
								


1) To IEC 757

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

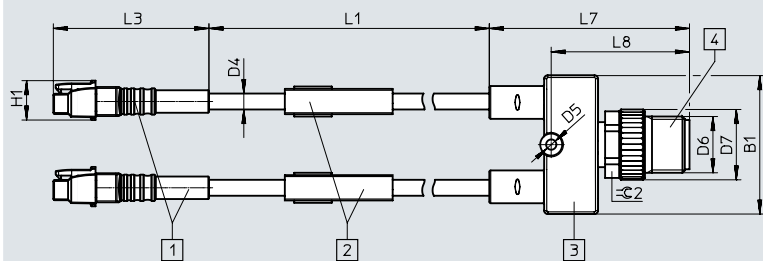Y-distributor with cable, field device side



- [1] Socket, field device side
- [2] Inscription label
- [3] Distributor
- [4] Plug, controller side


Electrical connection, controller side	B1	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	∠ 2
Plug M8x1	21	3.4	2.2	M8	10	8.4	300 ... 30000	33.2	35	21.6	A/F 9
Plug M12x1	29.6	3.4	2.2	M12	15	8.4	300 ... 30000	33.2	42.7	29.5	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

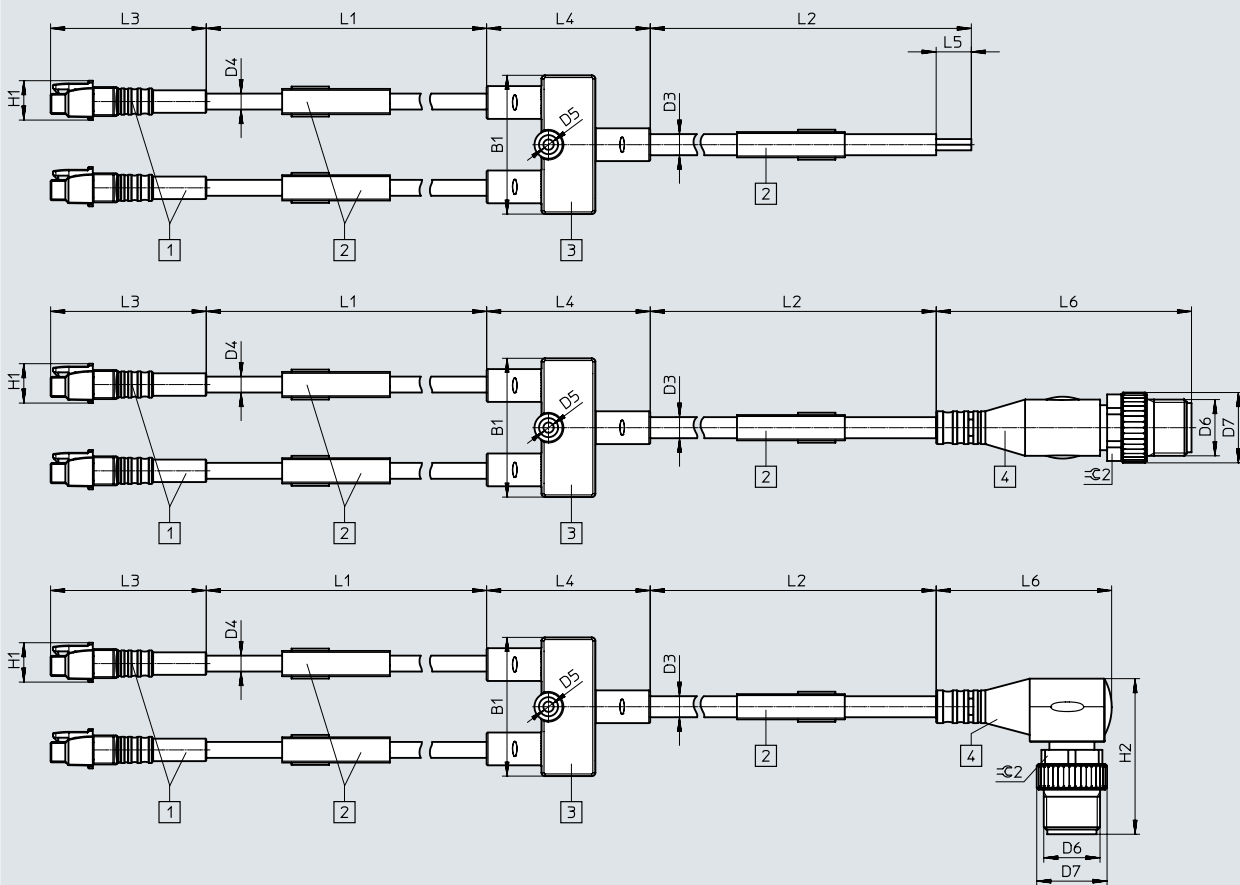Y-distributor with cable on both sides



[1] Socket, field device side

[2] Inscription label

[3] Distributor

[4] Plug, controller side

Electrical connection, controller side		B1	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	3.8	3.4	2.2	–	8.4	–
Plug M8x1	Straight	29.6	3.8	3.4	2.2	M8	8.4	–
	Angled	29.6	3.8	3.4	2.2	M8	8.4	24
Plug M12x1	Straight	29.6	3.8	3.4	2.2	M12	8.4	–
	Angled	29.6	3.8	3.4	2.2	M12	8.4	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	±C 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	33.2	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	33.2	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	33.2	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	33.2	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	33.2	34.9	–	37.5	A/F 13

Ordering data – Accessories

		Part no.	Type
	Mounting for T-slot	8032868	NEAU-A-N8-1
		8032869	NEAU-A-N8-2

- For Y-distributor with cable on field device side and plug M8x1
- For Y-distributor with cable on field device side and plug M12x1
- For Y-distributor with cable on both sides

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket, plug pattern H		-H1	-H1
Cable outlet on the left	Straight		G	G
Number of pins/cores on the left	3-pin		3	3
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
 2) 3 Only with connection technology on the right, LE
 3) G, W Not in combination with connection technology on the right, controller side LE
 4) 4 Only with connection technology on the right M8 or M12
 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
 Mandatory specification in combination with cable outlet on the right, W
 Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-Z1

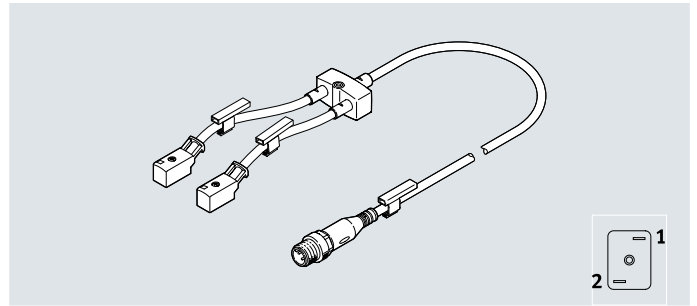- Dual distributor
- For connecting valves



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Angled
Design	Square
Connection technology	Plug pattern ZB, self-tapping screw
Number of pins/cores	2
Assigned pins/cores	2
Type of mounting	On solenoid valve via self-tapping screw
Display	Yellow LED, signal status indication

Technical data – Electrics

Operating voltage range	[V DC]	20.4 ... 26.4
Surge resistance	[kV]	0.8
Current rating at 40 °C	[A]	1
Pollution degree		3

Technical data – Cable

	Field device side	Controller side
Cable diameter	[mm]	3.4
Nominal conductor cross-section	[mm ²]	0.25
Cable characteristic	Standard	Suitable for energy chains/robots
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 1.5 million cycles, bending radius 75 mm • Resistance to bending: 20000 cycles	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, ±270°/0.1 m
Bending radius, flexible cable installation	[mm]	34
		39

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Seals	NBR, TPE-O
Pin contacts	Gold-plated copper alloy, tin-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions



Ambient temperature [°C]	–10 ... +50
Note on ambient temperature [°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation [°C]	–5 ... +50
Storage temperature [°C]	–10 ... +50
Degree of protection	IP65
CE marking (see declaration of conformity) ¹⁾	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK RoHS regulations
Corrosion resistance class CRC2)	2

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern ZB	5	2-core	31	With cable outlet	10	3-core	19.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0




The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:

NEDY-L2R1-V1-Z1W2L-U-3L-LE3-10R

5 g + 3x 31 g + 10 g + 10x 19.5 g + 0 g = 303 g

Datasheet

Wiring (socket/plug view)			Wiring						Wire colour ¹⁾		Pin		Connection no. 2						
Connection no. 4			Pin		Wire colour ¹⁾								Wire colour ¹⁾		Pin		Connection no. 2		
 1 2			1		BK								BK		1		 1 2		
			2		BK								BK		2				
			Wire colour ¹⁾		–		BK		BU		BN								
			Pin		1		4		3		2								


1) To IEC 757

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

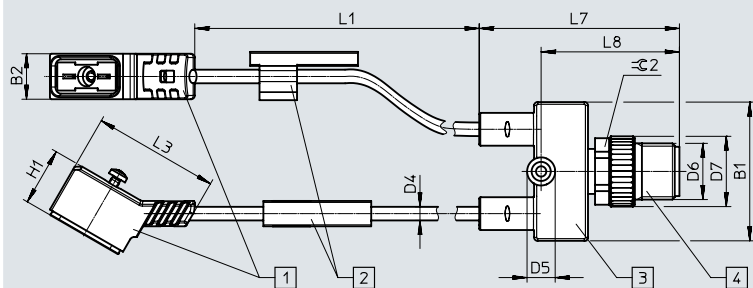Y-distributor with cable, field device side



- [1] Socket, field device side
- [2] Inscription label
- [3] Distributor
- [4] Plug, controller side


Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	≈ 2
Plug M8x1	21	9.7	3.4	2.2	M8	10	11.3	300 ... 30000	28.4	35	21.6	A/F 9
Plug M12x1	29.6	9.7	3.4	2.2	M12	15	11.3	300 ... 30000	28.4	42.7	29.5	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

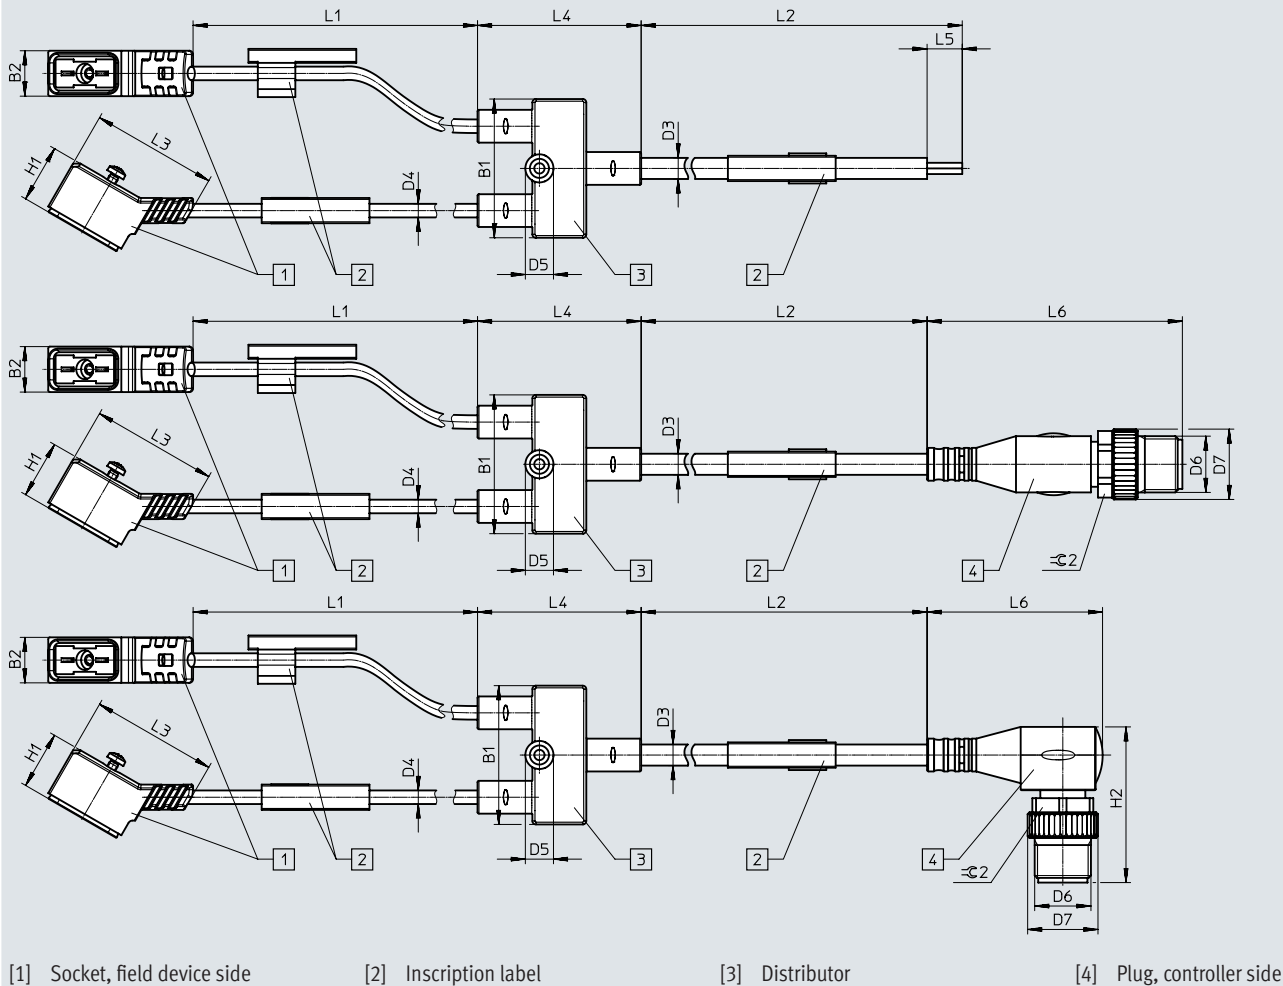Y-distributor with cables on both sides



Electrical connection, controller side		B1	B2	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	9.7	3.8	3.4	2.2	–	11.3	–
Plug M8x1	Straight	29.6	9.7	3.8	3.4	2.2	M8	11.3	–
	Angled	29.6	9.7	3.8	3.4	2.2	M8	11.3	24
Plug M12x1	Straight	29.6	9.7	3.8	3.4	2.2	M12	11.3	–
	Angled	29.6	9.7	3.8	3.4	2.2	M12	11.3	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	∅ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	28.4	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	28.4	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	28.4	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	28.4	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	28.4	34.9	–	37.5	A/F 13

Ordering data – Accessories

			Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1	8032868	NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1	8032869	NEAU-A-N8-2
		• For Y-distributor with cable on both sides		

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket, plug pattern ZB, self-tapping screw		-Z1	-Z1
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	2-pin		2	2
Display	Signal status LED (for valves only)		L	L
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right, W
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-Z3

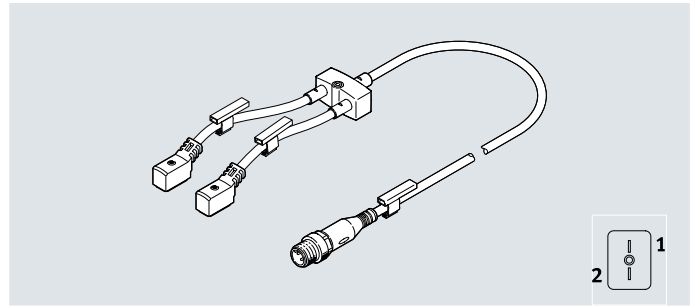- Dual distributor
- With LED indicator for signal status and holding current reduction for connecting valves without holding current reduction



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Angled
Design	Square
Connection technology	Plug pattern ZC, self-tapping screw
Number of pins/cores	2
Assigned pins/cores	2
Type of mounting	On solenoid valve via self-tapping screw
Display	Yellow LED, signal status indication
Additional function	Holding current reduction

Technical data – Electrics

Operating voltage range	[V DC]	20.4 ... 26.4
Surge resistance	[kV]	0.8
Current rating at 40 °C	[A]	1
Pollution degree		3

Technical data – Cable

	Field device side	Controller side
Cable diameter	[mm]	2.9
Nominal conductor cross-section	[mm ²]	0.14
Cable characteristic	Suitable for energy chains/robots	Suitable for energy chains/robots
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m
Bending radius, flexible cable in-stallation	[mm]	30
		39

Datasheet

Technical data – Electrical connection 1			
Function	Controller side		
Connection type	Plug	Open end	
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–





Materials	
Housing	PA, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Pin contacts	Gold-plated copper alloy, tin-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions	
Ambient temperature [°C]	–10 ... +50
Note on ambient temperature [°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation [°C]	–5 ... +50
Storage temperature [°C]	–10 ... +50
CE marking (see declaration of conformity) ¹⁾	To EU EMC Directive
	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK EMC regulations
	To UK RoHS regulations
Certification	RCM
Degree of protection	IP65
Corrosion resistance class CRC ²⁾	3




1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight					
					
					
2 x socket [g]		2x cable [g/m]		Distributor [g]	
Plug pattern ZC	5	2-core	21	With cable outlet	10
				With plug M12x1	17
				With plug M8x1	7
				With socket M8x1	8
				Cable [g/m]	
				3-core	19.5
				Plug [g]	
				M8x1	4.5
				M12x1, straight	12
				M12x1, angled	12.5
				Open end	0
The weight of the individual components must be added together to determine the overall weight: socket + length x cable + distributor + length x cable + plug Example: NEDY-L2R1-V1-Z3W2Z-U-3L-LE3-10R 5 g + 3x 21 g + 10 g + 10x 19.5 g + 0 g = 273 g					

Datasheet

Wiring (socket/plug view)		Pin		Wire colour ¹⁾		Wiring		Wire colour ¹⁾		Pin		Connection no. 2	
Connection no. 4		1		BK				BK		1			
		2		BK				BK		2			
	2												
				Wire colour ¹⁾		–		BK		BU		BN	
				Pin		1		4		3		2	


1) To IEC 757

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

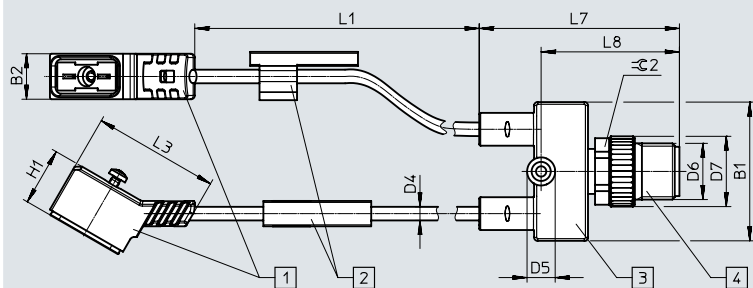Y-distributor with cable, field device side



- [1] Socket, field device side
- [2] Inscription label
- [3] Distributor
- [4] Plug, controller side


Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	≈ 2
Plug M8x1	21	9.7	2.9	2.2	M8	10	12	300 ... 30000	26.9	35	21.6	A/F 9
Plug M12x1	29.6	9.7	2.9	2.2	M12	15	12	300 ... 30000	26.9	42.7	29.5	A/F 13

Datasheet

Dimensions

Y-distributor with cables on both sides

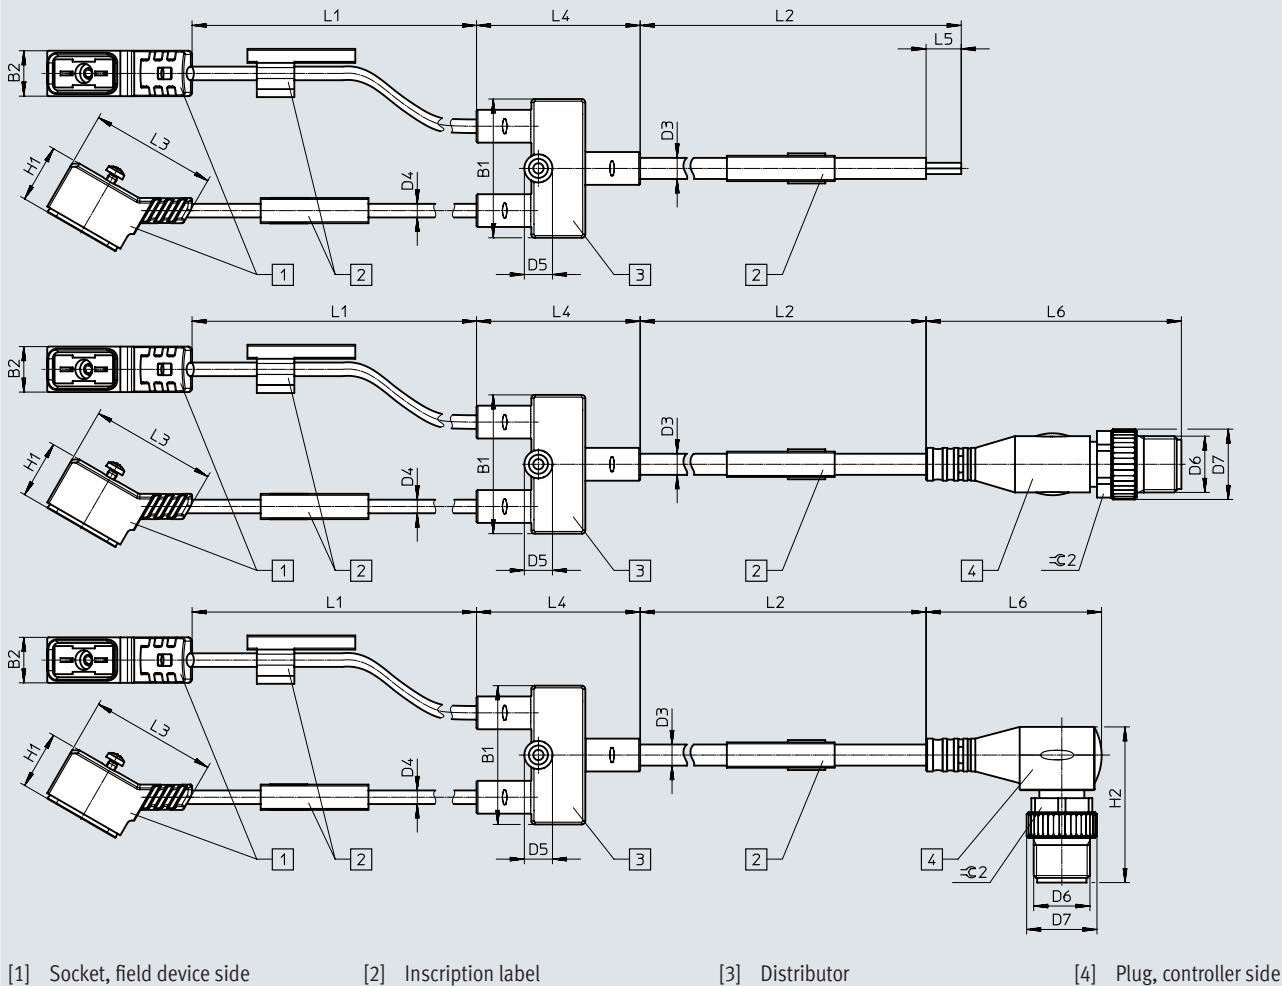Download CAD data → www.festo.com



Electrical connection, controller side		B1	B2	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	9.7	3.8	2.9	2.2	–	12	–
Plug M8x1	Straight	29.6	9.7	3.8	2.9	2.2	M8	12	–
	Angled	29.6	9.7	3.8	2.9	2.2	M8	12	24
Plug M12x1	Straight	29.6	9.7	3.8	2.9	2.2	M12	12	–
	Angled	29.6	9.7	3.8	2.9	2.2	M12	12	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	⌀ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	37.5	A/F 13

Ordering data – Accessories

		Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1	8032868 NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1	8032869 NEAU-A-N8-2
		• For Y-distributor with cable on both sides	

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket, plug pattern ZC, self-tapping screw		-Z3	-Z3
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	2-pin		2	2
Display	Signal status, holding current reduction LED (only for valves)		Z	Z
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
- Mandatory specification in combination with cable outlet on the right, W
- Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-Z4

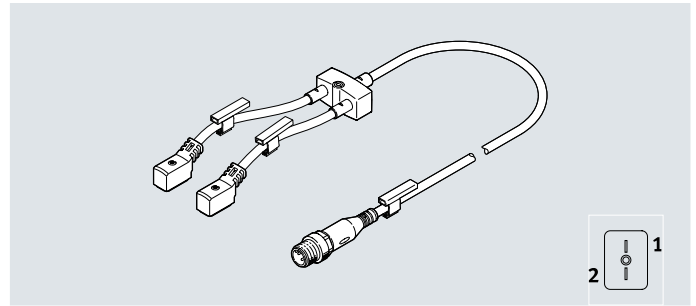- Dual distributor
- With LED indicator for signal status for connecting valves
- With LED indicator for signal status and holding current reduction for connecting valves without holding current reduction



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2 x socket
Cable outlet	Angled
Design	Square
Connection technology	Plug pattern ZC, metric screw
Number of pins/cores	2
Assigned pins/cores	2
Type of mounting	On solenoid valve via M2 central screw
Display	Yellow LED, signal status indication
Additional function	Holding current reduction

Technical data – Electrics

Operating voltage range	[V DC]	20.4 ... 26.4
Surge resistance	[kV]	0.8
Current rating at 40 °C	[A]	1
Pollution degree		3

Technical data – Cable

	Field device side	Controller side
Cable diameter	[mm]	2.9
Nominal conductor cross-section	[mm ²]	0.14
Cable characteristic	Suitable for energy chains/robots	Suitable for energy chains/robots
Note on cable characteristics	Standard for field device side	–
Test conditions, cable	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m
Note on connector cable test conditions	For standard cable characteristics: energy chain: 1.5 million cycles, bending radius 75 mm, flexural strength: as per Festo standard, test conditions on request	–
Bending radius, flexible cable installation	[mm]	30
		39

Datasheet

Technical data – Electrical connection 1

Function	Controller side		
Connection type	Plug	Open end	
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	3
Assigned pins/cores	3	3	3
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl	Screw-type lock with hex A/F 13 mm and longitudinal knurl	–
	Rotatable	Rotatable	–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–

Materials

Housing	PA, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Pin contacts	Gold-plated copper alloy, tin-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions





Ambient temperature [°C]	–10 ... +50
Note on ambient temperature [°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation [°C]	–5 ... +50
Storage temperature [°C]	–10 ... +50
CE marking (see declaration of conformity) ¹⁾	To EU EMC Directive
	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK EMC regulations
	To UK RoHS regulations
Certification	RCM
Degree of protection	IP65
Corrosion resistance class CRC ²⁾	3

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight

									
2 x socket [g]		2x cable [g/m]		Distributor [g]		Cable [g/m]		Plug [g]	
Plug pattern ZC	5	2-core	21	With cable outlet	10	3-core	19.5	M8x1	4.5
				With plug M12x1	17			M12x1, straight	12
				With plug M8x1	7			M12x1, angled	12.5
				With socket M8x1	8			Open end	0




The weight of the individual components must be added together to determine the overall weight:
socket + length x cable + distributor + length x cable + plug

Example:

NEDY-L2R1-V1-Z4W2L-U-3L-LE3-10R

5 g + 3x 21 g + 10 g + 10x 19.5 g + 0 g = 273 g

Datasheet

Wiring (socket/plug view)		Pin		Wire colour ¹⁾		Wiring		Wire colour ¹⁾		Pin		Connection no. 2	
Connection no. 4		1		BK				BK		1			
		2		BK				BK		2			
2 													
		Wire colour ¹⁾		–		BK		BU		BN			
		Pin		1		4		3		2			


1) To IEC 757

Datasheet

Dimensions


Download CAD data → www.festo.com

Distributor body front view



Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

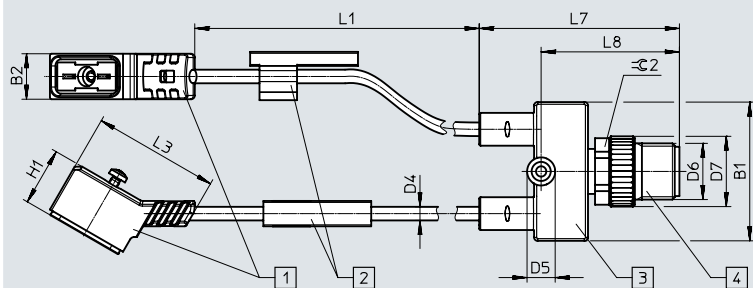Y-distributor with cable, field device side



- [1] Socket, field device side
- [2] Inscription label
- [3] Distributor
- [4] Plug, controller side


Electrical connection, controller side	B1	B2	D4 Ø	D5 Ø	D6	D7 Ø	H1	L1	L3	L7	L8	±2
Plug M8x1	21	9.7	2.9	2.2	M8	10	12	300 ... 30000	26.9	35	21.6	A/F 9
Plug M12x1	29.6	9.7	2.9	2.2	M12	15	12	300 ... 30000	26.9	42.7	29.5	A/F 13

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

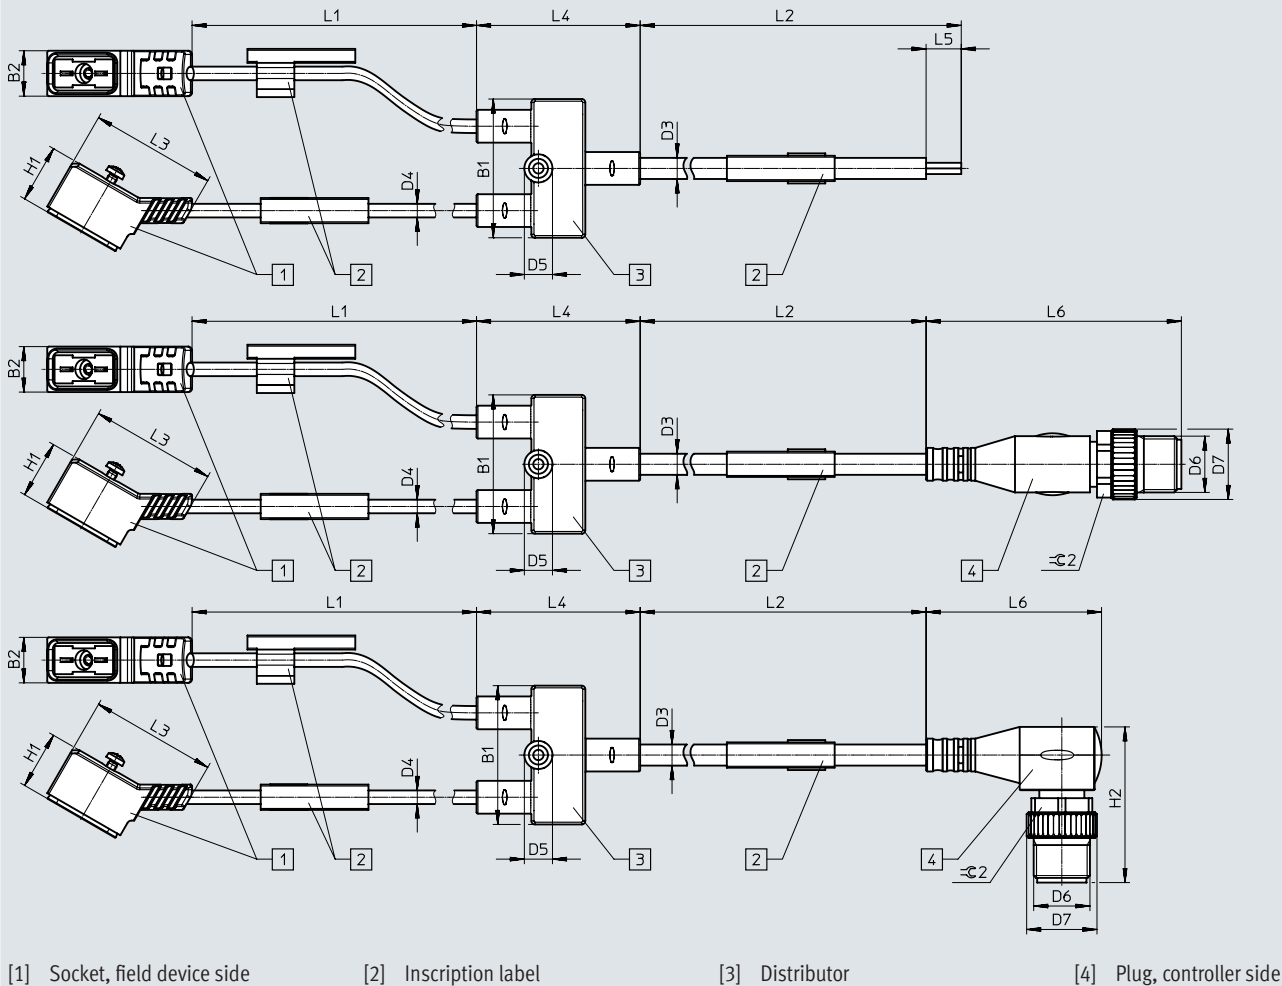
Y-distributor with cables on both sides



Electrical connection, controller side		B1	B2	D3 Ø	D4 Ø	D5 Ø	D6	H1	H2
Open cable end		29.6	9.7	3.8	2.9	2.2	–	12	–
Plug M8x1	Straight	29.6	9.7	3.8	2.9	2.2	M8	12	–
	Angled	29.6	9.7	3.8	2.9	2.2	M8	12	24
Plug M12x1	Straight	29.6	9.7	3.8	2.9	2.2	M12	12	–
	Angled	29.6	9.7	3.8	2.9	2.2	M12	12	33.2

Electrical connection, controller side		L1	L2	L3	L4	L5	L6	≙ 2
Open cable end		(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	50	–	–
Plug M8x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	41.1	A/F 9
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	26.9	A/F 9
Plug M12x1	Straight	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	54.5	A/F 13
	Angled	(300 ... 30000)-L2	(300 ... 30000)-L1	26.9	34.9	–	37.5	A/F 13

Datasheet

Ordering data						
	Field device side	Controller side		Weight [g]	Part no.	Type
	Cable length [m]	Electrical connection	Cable length [m]			
Y-distributor with cables on both sides, with holding current reduction						
	0.3	Plug, straight, M12x1	2.5	90	8035787	NEDY-L2R1-V1-Z4W2Z-U-0.3L-M12G4-2.5R

Ordering data – Accessories				Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1		8032868	NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1		8032869	NEAU-A-N8-2
		• For Y-distributor with cable on both sides			

Ordering data – Modular product system


Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Socket, plug pattern ZC, metric screw		-Z4	-Z4
Cable outlet on the left	Angled		W	W
Number of pins/cores on the left	2-pin		2	2
Display	Signal status LED (for valves only)		L	
	Signal status, holding current reduction LED (only for valves)		Z	
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None	[2]		
	Straight	[3]	G	
	Angled	[3]	W	
Number of pins/cores on the right	3-pin	[2]	3	
	4-pin	[4]	4	
Cable length on the right [m]	None			
	0.3 ... 30	[5]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) 3 Only with connection technology on the right, LE
- 3) G, W Not in combination with connection technology on the right, controller side LE
- 4) 4 Only with connection technology on the right M8 or M12
- 5) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
Mandatory specification in combination with cable outlet on the right, W
Mandatory specification in combination with connection technology on the right, controller side LE

Datasheet

Distributor NEDY-L2R1-V1-LE

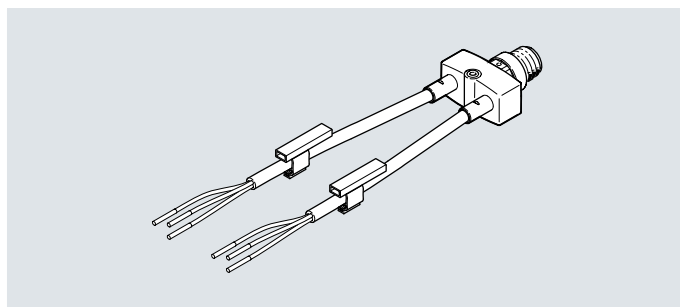- Dual distributor
- For self-assembly



General technical data

Design	Y-distributor
Type of distributor	Y type
Type of mounting	Via accessories, via through-hole for M2 screw
Cable designation	Via inscription label holder (optional)
Based on standard	EN 61076-2-101, EN 61076-2-104

Electrical connection 2

Function	Field device side
Connection type	2x open end
Number of pins/cores	3
Assigned pins/cores	3
Display	None

Technical data – Electrics

Electrical connection 1		Plug M8x1	Plug M12x1	Open end
Operating voltage range	[V DC]	0 ... 30	0 ... 30	0 ... 30
	[V AC]	0 ... 30	0 ... 30	0 ... 30
Surge resistance	[kV]	0.8	0.8	0.8
Current rating at 40 °C	[A]	3	4	4
Pollution degree		3	3	3

Technical data – Cable

		Field device side	Controller side
Cable diameter	[mm]	3.8	4.5
Nominal conductor cross-section	[mm ²]	0.25	0.25
Cable characteristic		Suitable for energy chains/robots	Suitable for energy chains/robots
Test conditions, cable		Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m	Resistance to bending: to Festo standard; test conditions on request • Energy chain: > 5 million cycles, bending radius 28 mm • Torsional strength: > 300000 cycles, $\pm 270^\circ/0.1$ m
Bending radius, flexible cable installation	[mm]	39	46

Datasheet

Technical data – Electrical connection 1			
Function	Controller side		
Connection type	Plug		Open end
Cable outlet	Straight, angled	Straight, angled	–
Design	Round	Round	–
Connection technology	M8x1, A-coded	M12x1, A-coded	–
Number of pins/cores	4	4	4
Assigned pins/cores	4	4	4
Type of mounting	Screw-type lock with hex A/F 9 mm and longitudinal knurl		–
	Rotatable		–
Compatible mounting type	Compatible with rotatable/non-rotatable screw-type lock		–
Display	–	–	–
Based on standard	To EN 61076-2-104	To EN 61076-2-101	–


Materials	
Housing	PA, TPE-U(PUR)
Housing colour	Black
Threaded sleeve	Nickel-plated brass
Seals	NBR
Pin contacts	Gold-plated copper alloy
Cable sheath	TPE-U(PUR)
Cable sheath colour	Grey
Note on materials	RoHS-compliant
	Free of halogen and phosphoric acid ester
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions	
Ambient temperature [°C]	–25 ... +80
Note on ambient temperature [°C]	–10 ... +40 with mounting via through-hole
Ambient temperature with flexible cable installation [°C]	–20 ... +80
Storage temperature [°C]	–25 ... +80
Degree of protection	IP65/IP68, IP69K
CE marking (see declaration of conformity) ¹⁾	To EU RoHS Directive
UKCA marking (see declaration of conformity) ¹⁾	To UK RoHS regulations
Corrosion resistance class CRC2)	4

1) For information about the area of use, see the EC declaration of conformity at: [www.festo.com/catalogue/... d Support/Downloads](http://www.festo.com/catalogue/...d%20Support/Downloads).

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

2) More information www.festo.com/x/topic/crc

Product weight					
					
–		2x cable [g/m]		Distributor [g]	
–		3-core 41		With cable outlet 10	
				With plug M12x1 17	
				With plug M8x1 7	
				Cable [g/m]	
				4-core 26.5	
				Plug [g]	
				M8x1 4.5	
				M12x1, straight 12	
				M12x1, angled 12.5	
				Open end 0	
The weight of the individual components must be added together to determine the overall weight: socket + length x cable + distributor + length x cable + plug					
Example: NEDY-L2R1-V1-LE3-U-3L-LE4-10R 0 g + 3x 41 g + 10 g + 10x 26.5 g + 0 g = 398 g					

Datasheet

Wiring (socket/plug view)			Wiring			Wiring		
Connection no. 4	Pin	Wire colour ¹⁾				Wire colour ¹⁾	Pin	Connection no. 2
	–	BN				BN	–	
	–	BU				BU	–	
	–	BK				BK	–	
			Wire colour ¹⁾	BN	BK	BU	WH	
			Pin	1	4	3	2	
			Plug M8x1					
			Plug M12x1					

1) To IEC 757

Dimensions

Y-distributor with cable, field device side

[2] Inscription label [3] Distributor [4] Plug, controller side

Download CAD data → www.festo.com

Distributor body front view

Electrical connection, controller side	B1	D4 ø	D5 ø	D6	D7 ø	L1	L5	L7	L8	≅ 2
Plug M8x1	21	3.8	2.2	M8	10	300 ... 30000	50	35	21.6	A/F 9
Plug M12x1	29.6	3.8	2.2	M12	15	300 ... 30000	50	42.7	29.5	A/F 13


Distributor body front view		B1	H1
Size 1:	• Y-distributor with cable, field device side and plug M8x1	12	21
Size 2:	• Y-distributor with cable, field device side and plug M12x1 • Y-distributor with cables on both sides	16.2	29.6

Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

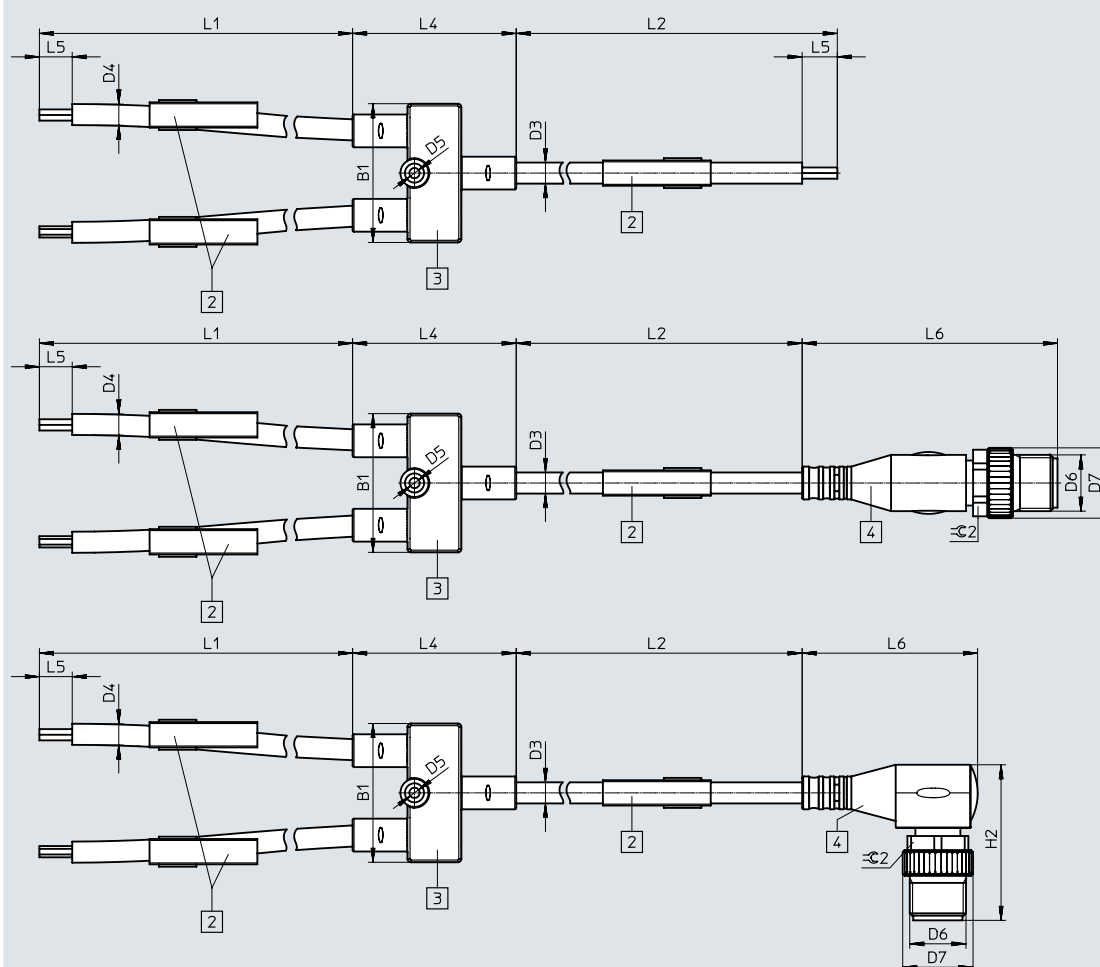Y-distributor with cables on both sides



[2] Inscription label

[3] Distributor

[4] Plug, controller side

Electrical connection, controller side		B1	D3 Ø	D4 Ø	D5 Ø	D6	D7	H2	L1	L2	L4	L5	L6	⌀ 2
Open cable end		29.6	4.5	3.8	2.2	–	–	–	(300 ... 30000)-L2	(300 ... 30000)-L1	34.9	50	–	–
Plug M8x1	Straight	29.6	4.5	3.8	2.2	M8	10	–	(300 ... 30000)-L2	(300 ... 30000)-L1	34.9	50	41.1	A/F 9
	Angled	29.6	4.5	3.8	2.2	M8	10	24	(300 ... 30000)-L2	(300 ... 30000)-L1	34.9	50	26.9	A/F 9
Plug M12x1	Straight	29.6	4.5	3.8	2.2	M12	15	–	(300 ... 30000)-L2	(300 ... 30000)-L1	34.9	50	54.5	A/F 13
	Angled	29.6	4.5	3.8	2.2	M12	15	33.2	(300 ... 30000)-L2	(300 ... 30000)-L1	34.9	50	37.5	A/F 13

Ordering data – Accessories

			Part no.	Type
	Mounting for T-slot	• For Y-distributor with cable on field device side and plug M8x1	8032868	NEAU-A-N8-1
		• For Y-distributor with cable on field device side and plug M12x1	8032869	NEAU-A-N8-2
		• For Y-distributor with cable on both sides		

Ordering data – Modular product system

Ordering table		Condi- tions	Code	Enter code
Module no.	8032867			
Distributor	Sensor/actuator distributor		NEDY	NEDY
Type of distributor	Y type		-L2R1	-L2R1
Wiring	Standard variant (see circuit diagram, standard)		-V1	-V1
Connection technology on the left, field device side	Open end		-LE	-LE
Number of pins/cores on the left	3-pin		3	3
Cable characteristic	Suitable for energy chains/robots		-U	-U
Cable length on the left [m]	0.3 ... 30	[1]	-...L	
Cable designation	With inscription label holder			
	Without inscription label holder		-N	
Connection technology on the right, controller side	Open end		-LE	
	Plug M8x1, A-coded, EN 61076-2-104		-M8	
	M12 plugx1 A-coded, EN 61076-2-101		-M12	
Cable outlet on the right	None			
	Straight	[2]	G	
	Angled	[2]	W	
Number of pins/cores on the right	4-pin		4	4
Cable length on the right [m]	None			
	0.3 ... 30	[3]	-...R	

- 1) -...L The sum of the cable length on the left and cable length on the right must not exceed 30 m
- 2) G, W Not in combination with connection technology on the right, controller side LE
- 3) -...R The sum of the cable length on the left and cable length on the right must not exceed 30 m
Mandatory specification in combination with cable outlet on the right, W
Mandatory specification in combination with connection technology on the right, controller side LE