

Solenoid coil VACF

FESTO



Type code

001	Series	
VACF	Solenoid coil VACF	
002	Solenoid coil type	
A	Solenoid coil size 30/8	
B	Solenoid coil, size 22/8	
003	Electrical connection	
A1	Plug pattern type A, to EN 175301-803	
B2	Connection pattern type B, industry standard	
C1	Plug pattern type C, to EN 175301-803	
E1	Plug pattern type C, industry standard	
K1	Cable	
R1	Individual connector M8, 4-pin	
R3	Single plug M12 A-coded, according to EN 61076-2-101	
R4	Single plug M12 A-coded, pin assignment according to DESINA	
R8	Individual connector M8, 3-pin	
004	Nominal operating voltage	
1	24 V DC	
1A	24 V AC/50-60 Hz	
3A	230 V AC/50-60 Hz	
3W	230 V AC/240 V AC/50-60 Hz	
5	12 V DC	
7	48 V DC	
7A	48 V AC/50-60 Hz	
16B	120 V AC/60 Hz and 110V AC/50-60 Hz	

005	Circuitry	
	None	
RA	Holding current reduction, analogue, with integrated protective circuit	
006	Display	
	None	
L	LED	
007	Cable length [m]	
	Without	
1	1 m	
5	5 m	
10	10 m	
20	20 m	
008	EU certification	
	None	
EX4	II 2GD	
009	Type of ignition protection	
	None	
M	Encapsulation	

Datasheet

General technical data - Solenoid coils width 30 mm for Armature tube 8 mm, with electrical connection form A



Electrical connection	Type A, To EN 175301-803
Conforms to standard	IEC 61010-1
Type of mounting	Via knurled nut
Mounting position	optional

Electrical data - Solenoid coils width 30 mm for Armature tube 8 mm, with electrical connection form A

Nominal operating voltage	24 V DC	24 V AC/50-60 Hz	230 V AC/240 V AC/50-60 Hz	12 V DC	48 V DC	48 V AC/50-60 Hz	120 V AC/60 Hz and 110V AC/50-60 Hz
Characteristic coil data	24 V DC: 2.6 W	24 V AC: 50/60 Hz, pick-up power 2.5 VA, holding power 1.7 VA	230/240 V AC: 50/60 Hz, pick-up power 3.9 VA, holding power 2.8 VA	12 V DC: 2.8 W	48 V DC: 2.8 W	48 V AC: 50/60 Hz, pick-up power 2.5 VA, holding power 1.7 VA	110/120 V AC: 50/60 Hz, pick-up power 2.7 VA, holding power 1.9 VA
Permissible voltage fluctuations	+/- 10%						
Immunity to surge	-		4	-			2.5
Duty cycle	100%						
Degree of protection	IP65						
Insulation material class	H						
Pollution degree	-		3	-			3

Materials - Solenoid coils width 30 mm for Armature tube 8 mm, with electrical connection form A

Material solenoid coil	Copper, Steel, Thermoplastic
Material housing	PA, Steel
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet

Operating and environmental conditions - Solenoid coils width 30 mm for Armature tube 8 mm, with electrical connection form A

Nominal operating voltage	24 V DC	24 V AC/50-60 Hz	230 V AC/240 V AC/50-60 Hz	12 V DC	48 V DC	48 V AC/50-60 Hz	120 V AC/60 Hz and 110V AC/50-60 Hz
Ambient temperature	-20 ... 60°C						
Media temperature	-20 ... 50°C						
Restrictions for environmental and media temperature	-20 - 50°C						
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress						
CE mark (see declaration of conformity) ²⁾	-		To EU Low Voltage Directive	-		To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ³⁾	-		To UK regulations for electrical equipment	-		To UK regulations for electrical equipment	
Approval	c UL us - Recognized (OL)						
Maritime classification ⁴⁾	See certificate						
Certificate issuing authority	DNVGL-TAA000011) UL MH18122						

1) More information www.festo.com/x/topic/kbk

2) More information www.festo.com/catalogue/... Support/Downloads.

3) More information www.festo.com/catalogue/... Support/Downloads.

4) More information www.festo.com/catalogue/... Support/Downloads.

General technical data - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form B, according to industry standard

Electrical connection	Type B, To industry standard (11 mm)						
Conforms to standard	IEC 61010-1						
Type of mounting	Via knurled nut						
Mounting position	optional						

Electrical data - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form B, to industry standard

Nominal operating voltage	24 V DC	24 V AC/50-60 Hz	230 V AC/240 V AC/50-60 Hz	12 V DC	48 V DC	48 V AC/50-60 Hz	120 V AC/60 Hz and 110V AC/50-60 Hz
Characteristic coil data	24 V DC: 3.3 W	24 V AC: 50/60 Hz, pick-up power 3.9 VA, holding power 2.6 VA	230/240 V AC: 50/60 Hz, pick-up power 5.8 VA, holding power 4.6 VA	12 V DC: 3.4 W	48 V DC: 3.4 W	48 V AC: 50/60 Hz, pick-up power 3.9 VA, holding power 2.7 VA	110/120 V AC: 50/60 Hz, pick-up power 4.4 VA, holding power 3.3 VA
Permissible voltage fluctuations	+/- 10%						
Immunity to surge	-		4	-		2.5	
Duty cycle	100%						
Degree of protection	IP65						
Insulation material class	H						
Pollution degree	-		3	-		3	

Datasheet

Materials - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form B, to industry standard

Material solenoid coil	Copper, Steel, Thermoplastic
Material housing	PA, Steel
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Operating and environmental conditions - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form B, according to industry standard

Nominal operating voltage	24 V DC	24 V AC/50-60 Hz	230 V AC/240 V AC/50-60 Hz	12 V DC	48 V DC	48 V AC/50-60 Hz	120 V AC/60 Hz and 110V AC/50-60 Hz
Ambient temperature	-20 ... 60°C						
Media temperature	-20 ... 50°C						
Restrictions for environmental and media temperature	-20 - 50°C						
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress						
CE mark (see declaration of conformity) ²⁾	-		To EU Low Voltage Directive	-		To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ³⁾	-		To UK regulations for electrical equipment	-		To UK regulations for electrical equipment	
Approval	c UL us - Recognized (OL)						
Maritime classification ⁴⁾	See certificate						
Certificate issuing authority	DNVGL-TAA000011J UL MH18122						

1) More information at www.festo.com/x/topic/kbk

2) More information www.festo.com/catalogue/... Support/Downloads.

3) More information www.festo.com/catalogue/... Support/Downloads.

4) More information www.festo.com/catalogue/... Support/Downloads.

General technical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection form C, according to EN 175301-803

Electrical connection	Type C, To EN 175301-803
Conforms to standard	IEC 61010-1
Type of mounting	Via knurled nut
Mounting position	optional

Datasheet

Electrical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection form C, according to EN 175301-803


Nominal operating voltage	24 V DC	24 V AC/50-60 Hz	230 V AC/240 V AC/50-60 Hz	12 V DC	48 V DC	48 V AC/50-60 Hz	120 V AC/60 Hz and 110V AC/50-60 Hz
Characteristic coil data	24 V DC: 3.3 W	24 V AC: 50/60 Hz, pick-up power 3.9 VA, holding power 2.6 VA	230/240 V AC: 50/60 Hz, pick-up power 5.8 VA, holding power 4.6 VA	12 V DC: 3.4 W	48 V DC: 3.4 W	48 V AC: 50/60 Hz, pick-up power 3.9 VA, holding power 2.7 VA	110/120 V AC: 50/60 Hz, pick-up power 4.4 VA, holding power 3.3 VA
Permissible voltage fluctuations	+/- 10%						
Immunity to surge	-		4	-		2.5	
Duty cycle	100%						
Degree of protection	IP65						
Insulation material class	H						
Pollution degree	-		3	-		3	

Material - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection form C, according to EN 175301-803

Material solenoid coil	Copper, Steel, Thermoplastic
Material housing	PA, Steel
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Operating and environmental conditions - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection form C, according to EN 175301-803

Nominal operating voltage	24 V DC	24 V AC/50-60 Hz	230 V AC/240 V AC/50-60 Hz	12 V DC	48 V DC	48 V AC/50-60 Hz	120 V AC/60 Hz and 110V AC/50-60 Hz
Ambient temperature	-20 ... 60°C						
Media temperature	-20 ... 50°C						
Restrictions for environmental and media temperature	-20 - 50°C						
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress						
CE mark (see declaration of conformity) ²⁾	-		To EU Low Voltage Directive	-		To EU Low Voltage Directive	
UKCA marking (see declaration of conformity) ³⁾	-		To UK regulations for electrical equipment	-		To UK regulations for electrical equipment	
Approval	c UL us - Recognized (OL)						
Certificate issuing authority	UL MH18122						

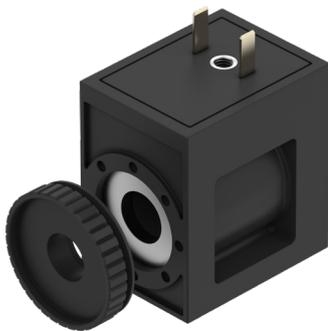1) More information www.festo.com/x/topic/kbk2) More information www.festo.com/catalogue/... Support/Downloads.3) More information www.festo.com/catalogue/... Support/Downloads.**General technical data - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form C, to industry standard**

Electrical connection	Plug pattern type C to industry standard, 9.4 mm
Type of actuation	Electric
Conforms to standard	IEC 61010-1
Mounting position	optional
Type of mounting	Via knurled nut

Datasheet

Electrical data - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form C, to industry standard

Characteristic coil data	24 V DC: 3.3 W
Permissible voltage fluctuations	+/- 10%
Duty cycle	100%
Degree of protection	IP65
Insulation material class	H
Insulation material class of enamelled wire	H
Pollution degree	–

Materials - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form C, to industry standard

Material solenoid coil	Copper, Steel, Thermoplastic
Material housing	PA, Steel
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Operating and environmental conditions - Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form C, according to industry standard

Ambient temperature	-20 ... 60°C
Media temperature	-20 ... 60°C
Restrictions for environmental and media temperature	-20 - 50°C, with block mounting
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress
CE mark (see declaration of conformity) ²⁾	–
UKCA marking (see declaration of conformity) ³⁾	–
Approval	c UL us - Recognized (OL)
Certificate issuing authority	UL MH18122
Impact energy value	IK06

1) More information at www.festo.com/x/topic/kbk

2) More information www.festo.com/catalogue/... Support/Downloads.

3) More information www.festo.com/catalogue/... Support/Downloads.

General technical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection Cable with open end

Electrical connection	3-wire, Cable with open end
Type of mounting	Via knurled nut
Mounting position	optional
Switching position indicator	no

Datasheet

Electrical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection Cable with open end

Characteristic coil data	110 V AC: 50/60 Hz, power 4.18 VA	230 V AC: 50/60 Hz, power 5.0 VA	24 V AC: 50/60 Hz, power 3.85 VA	24 V DC: 4.36 W
Nominal cross section conductor	0.75 mm ²			
Permissible voltage fluctuations	+/- 10%			
Permissible frequency fluctuations	+/- 5%			-
Min. pick-up time	10			
Duty cycle	100%			
Degree of protection	IP65			

ATEX - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection Cable with open end

ATEX category gas	II 2G
Explosion ignition protection type for gas	Ex mb IIC T5 Gb
ATEX category dust	II 2D
Explosion ignition protection type for dust	Ex mb IIIC T95°C Db
Explosion ambient temperature	-30°C ≤ Ta ≤ +40°C
Explosion protection certification outside the EU	EPL Db (BR) EPL Db (CN) EPL Db (GB) EPL Db (IEC-EX) EPL Gb (BR) EPL Gb (CN) EPL Gb (GB) EPL Gb (IECEX)
Certificate issuing authority	CML22UKEX5255X DNV17.0013X GYJ23.1154X IBExU 16 ATEX1146X IECEX IBE16.0024X

Materials - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection Cable with open end

Material solenoid coil	Aluminium, Epoxy resin, Copper, Steel
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWS) conformity	VDMA24364-C1-L

Operating and environmental conditions - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection Cable with open end

Ambient temperature	-30 ... 40°C
Corrosion resistance class CRC ¹⁾	0 - No corrosion stress
CE mark (see declaration of conformity) ²⁾	To EU Explosion Protection Directive (ATEX) In accordance with EU RoHS Directive
UKCA marking (see declaration of conformity)	To UK EX instructions To UK RoHS instructions

1) More information www.festo.com/x/topic/kbk2) More information www.festo.com/catalogue/... Support/Downloads.

Datasheet

General technical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 4-pin



Electrical connection 1, connection type	Plugs
Electrical connection 1, connector system	M8x1, A-coded, to EN 61076-2-104
Electrical connection 1, number of connections/cores	4
Electrical connection 1, type of mounting	Screw-type lock
Type of actuation	Electric
Conforms to standard	IEC 61010-1; ISO 20401
Signal status display	LED
Mounting position	optional
Type of mounting	Via knurled nut

Electrical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 4-pin

Characteristic coil data	24 V DC: 3.4 W	24VDC: NS1,2: HS3.3
Permissible voltage fluctuations	+/- 10%	
Nominal pick-up current per solenoid coil	–	138 mA up to 70 ms
Nominal current with current reduction	–	50 mA after 70 ms
Duty cycle	100%	
Degree of protection	IP65	
Insulation material class	H	
Insulation material class of enamelled wire	H	

Materials - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 4-pin

Material housing	PA; Steel
Material solenoid coil	Copper; Steel; Thermoplastic
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet

Operating and environmental conditions - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 4-pin

Circuitry	None	Holding current reduction, analogue, with integrated protective circuit
Ambient temperature	-20 ... 60°C	
Media temperature	-20 ... 60°C	
Restrictions for environmental and media temperature	-20 - 50°C, with block mounting	-
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress	
Approval	c UL us - Recognized (OL)	
Certificate issuing authority	UL MH18122	
Impact energy value	IK06	

1) More information www.festo.com/x/topic/kbk

General technical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 2-pin

Electrical connection 1, connection type	Plugs	
Electrical connection 1, connector system	M12x1, A-coded to EN 61076-2-101	
Electrical connection 1, number of connections/cores	2	
Electrical connection 1, type of mounting	Screw-type lock	
Type of actuation	Electric	
Conforms to standard	IEC 61010-1; ISO 20401	
Signal status display	LED	
Mounting position	optional	
Type of mounting	Via knurled nut	

Electrical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 2-pin

Characteristic coil data	24 V DC: 3.4 W	24VDC: NS1,2: HS3.3
Permissible voltage fluctuations	+/- 10%	
Nominal pick-up current per solenoid coil	-	138 mA up to 70 ms
Nominal current with current reduction	-	50 mA after 70 ms
Duty cycle	100%	
Degree of protection	IP65	
Insulation material class	H	
Insulation material class of enamelled wire	H	

Datasheet

Material - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 2-pole

Material housing	PA; Steel
Material solenoid coil	Copper; Steel; Thermoplastic
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Operating and environmental conditions - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 2-pin

Circuitry	None	Holding current reduction, analogue, with integrated protective circuit
Ambient temperature	-20 ... 60°C	
Media temperature	-20 ... 60°C	
Restrictions for environmental and media temperature	-20 - 50°C, with block mounting	-
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress	
Approval	c UL us - Recognized (OL)	
Certificate issuing authority	UL MH18122	
Impact energy value	IK06	

1) More information www.festo.com/x/topic/kbk

General technical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 4-pin



Electrical connection 1, connection type	Plugs
Electrical connection 1, connector system	M12x1, A-coded to EN 61076-2-101
Electrical connection 1, number of connections/cores	4
Electrical connection 1, type of mounting	Screw-type lock
Type of actuation	Electric
Conforms to standard	DESINA; IEC 61010-1
Signal status display	LED
Mounting position	optional
Type of mounting	Via knurled nut

Datasheet

Electrical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 4-pin

Characteristic coil data	24 V DC: 3.4 W	24VDC: NS1,2: HS3.3
Permissible voltage fluctuations	+/- 10%	
Nominal pick-up current per solenoid coil	–	138 mA up to 70 ms
Nominal current with current reduction	–	50 mA after 70 ms
Duty cycle	100%	
Degree of protection	IP65	
Insulation material class	H	
Insulation material class of enamelled wire	H	

Materials - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 4-pin

Material housing	PA; Steel	
Material solenoid coil	Copper; Steel; Thermoplastic	
Material winding	Copper	
Note on materials	RoHS-compliant	
LABS (PWIS) conformity	VDMA24364-B1/B2-L	

Operating and environmental conditions - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 4-pin

Circuitry	None	Holding current reduction, analogue, with integrated protective circuit
Ambient temperature	-20 ... 60°C	
Media temperature	-20 ... 60°C	
Restrictions for environmental and media temperature	-20 - 50°C, with block mounting	–
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress	
Approval	c UL us - Recognized (OL)	
Certificate issuing authority	UL MH18122	
Impact energy value	IK06	

1) More information www.festo.com/x/topic/kbk

Datasheet

General technical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 3-pin



Electrical connection 1, connection type	Plugs
Electrical connection 1, connector system	M8x1, A-coded, to EN 61076-2-104
Electrical connection 1, number of connections/cores	3
Electrical connection 1, type of mounting	Screw-type lock
Type of actuation	Electric
Conforms to standard	IEC 61010-1; ISO 20401
Signal status display	LED
Mounting position	optional
Type of mounting	Via knurled nut

Electrical data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 3-pin

Characteristic coil data	24 V DC: 3.4 W	24VDC: NS1,2: HS3.3
Permissible voltage fluctuations	+/- 10%	
Nominal pick-up current per solenoid coil	–	138 mA up to 70 ms
Nominal current with current reduction	–	50 mA after 70 ms
Duty cycle	100%	
Degree of protection	IP65	
Insulation material class	H	
Insulation material class of enamelled wire	H	

Material - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 3-pin

Material housing	PA; Steel
Material solenoid coil	Copper; Steel; Thermoplastic
Material winding	Copper
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B1/B2-L

Datasheet


Operating and environmental conditions - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 3-pin		
Circuitry	None	Holding current reduction, analogue, with integrated protective circuit
Ambient temperature	-20 ... 60°C	
Media temperature	-20 ... 60°C	
Restrictions for environmental and media temperature	-20 - 50°C, with block mounting	-
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress	
Approval	c UL us - Recognized (OL)	
Certificate issuing authority	UL MH18122	
Impact energy value	IK06	

1) More information www.festo.com/x/topic/kbk

Dimensions

Dimensions – Solenoid coils width 30 mm for Armature tube 8 mm, with electrical connection form A

Download CAD data www.festo.com

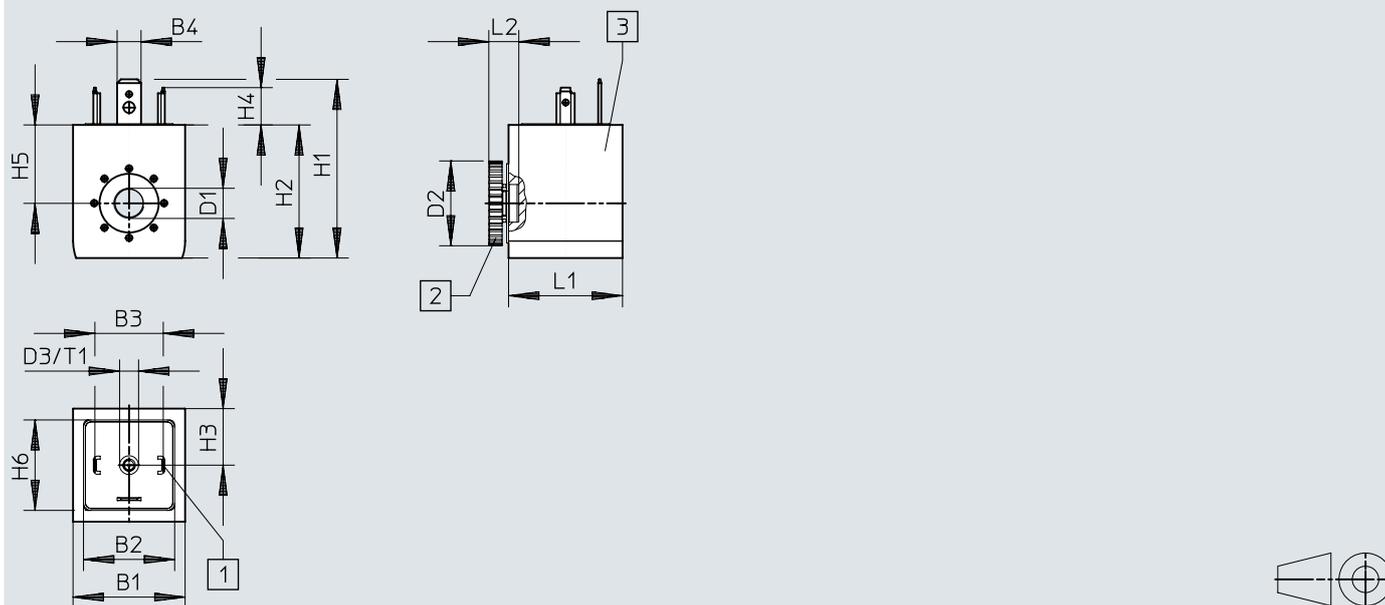

[1] Plug pattern according to EN 175301-803, type A

[2] Knurled nut (seal set for solenoid coil)


[3] Solenoid coil (can be rotated in increments of 45° on the armature, can be pushed on in any direction)

	B1	B2	B3	B4	D1	D2	D3	H1	H2	H3	H4	H5	H6	L1	L2	T1
VACF-A-A1-...	29,5	24	18	6,3	8,2	22,5	M3	47,4	35,3	15	9,9	20,8	24	30	7,9	5

Dimensions

Dimensions – Solenoid coils width 22 mm for armature tube 8 mm, with electrical connection form B, according to industry standard

Download CAD data www.festo.com

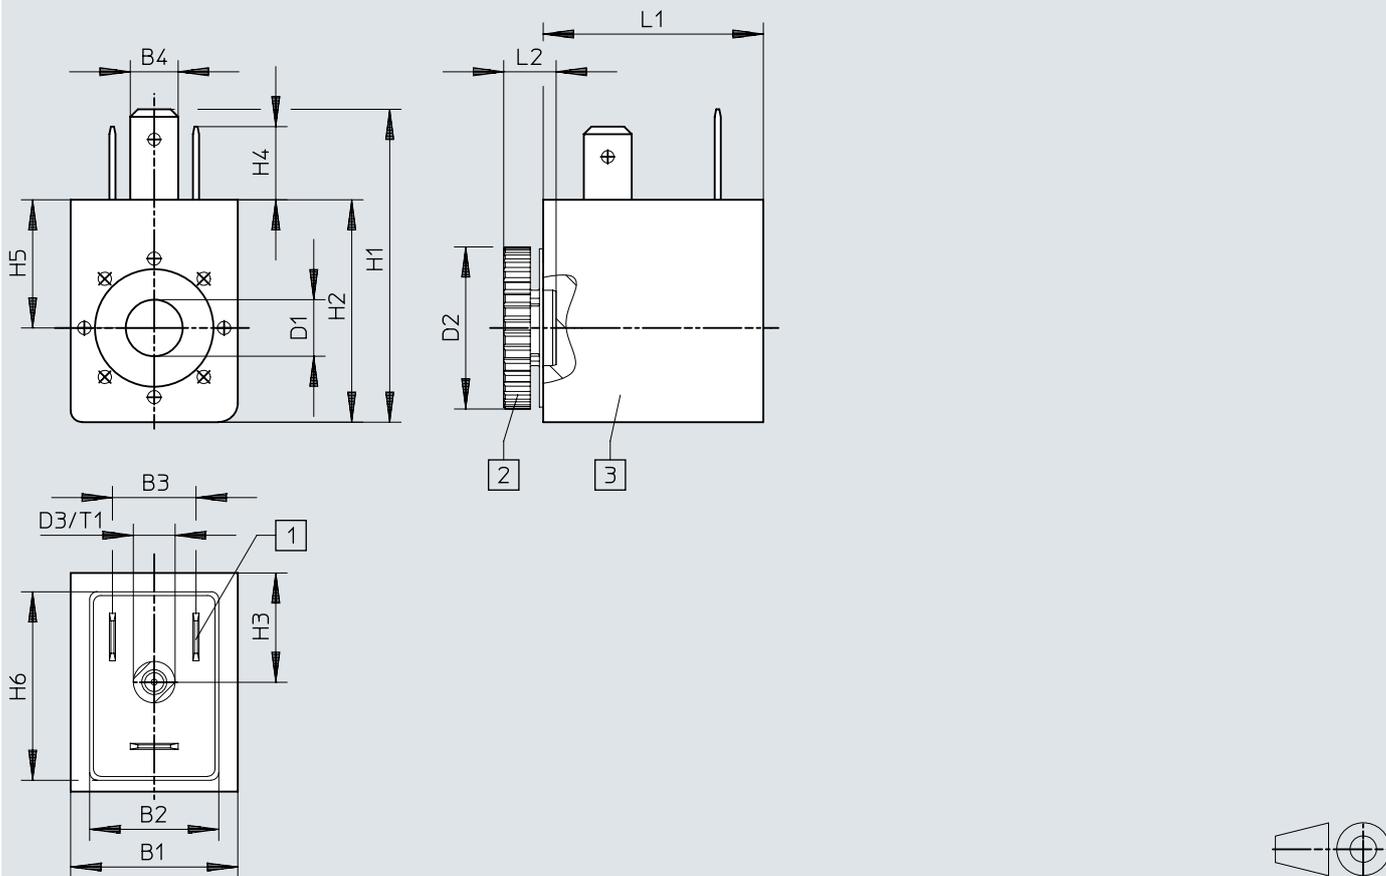


- [1] Plug pattern to industry standard, type B
- [2] Knurled nut (seal set for solenoid coil)
- [3] Solenoid coil (can be rotated in increments of 45° on the armature, can be pushed on in any direction)

	B1	B2	B3	B4	D1 ∅	D2 ∅	D3	H1	H2	H3	H4	H5	H6	L1	L2	T1
VACF-B-B2-...	22	17	11	6,3	8,2	21,5	M3	41,7	29,7	14,5	9,7	17	25	29	6,9	5

Dimensions

Dimensions – Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection form C, according to EN 175301-803

Download CAD data www.festo.com

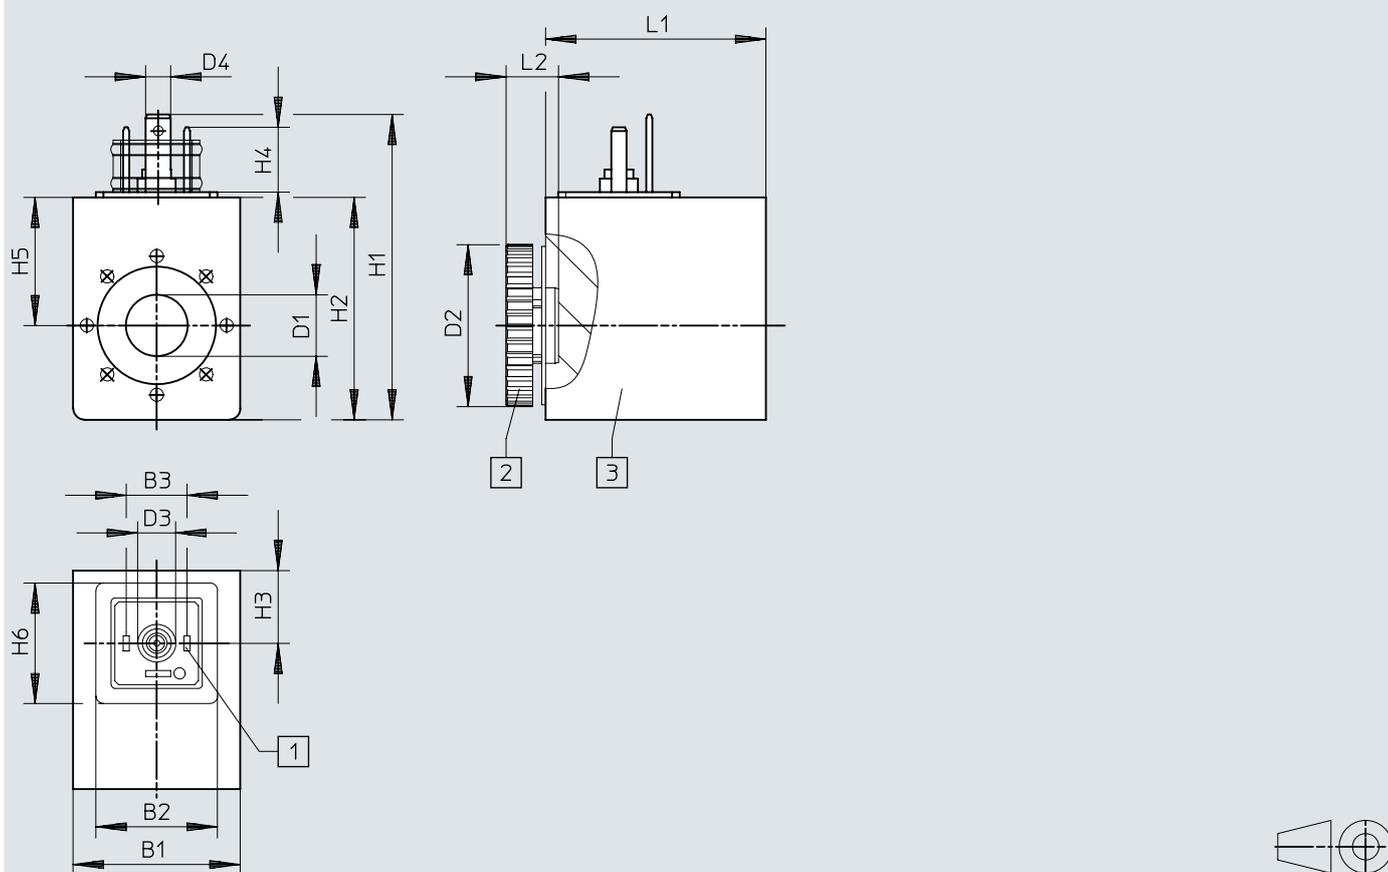


- [1] Plug pattern to EN 175301-803, type C
 [2] Knurled nut (seal set for solenoid coil)
 [3] Solenoid coil (can be rotated in increments of 45° on the armature, can be pushed on in any direction)

	B1	B2	B3	D1	D2	D3	D4	H1	H2	H3	H4	H5	H6	L1	L2
VACF-B-C1-...	22	16	8	8,2	21,5	27	3,3	40,5	29,5	9,7	8,6	17	16	29	6,9

Dimensions

Dimensions – Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection form C according to industry standard

Download CAD data www.festo.com

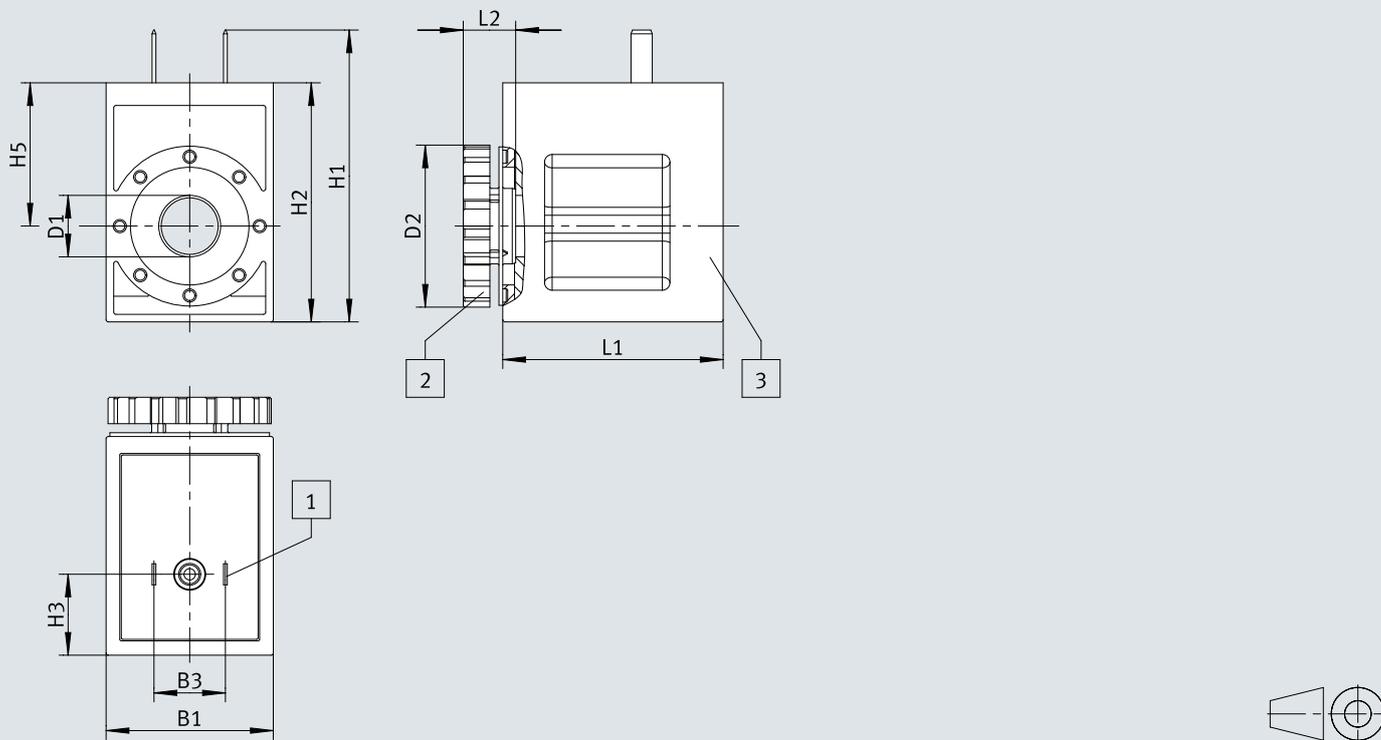


- [1] Plug pattern to EN 175301-803, type C
- [2] Knurled nut (seal set for solenoid coil)
- [3] Solenoid coil (can be rotated in increments of 45° on the armature, can be pushed on in any direction)

	B1	B3	D1 ∅	D2 ∅	H1	H2	H3	H5	L1	L2
VACF-B-E1-1	22	9,4	8,2	21,5	38,7	31,7	10,7	19	29	6,9

Dimensions

Dimensions – Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection Cable with open end

Download CAD data www.festo.com

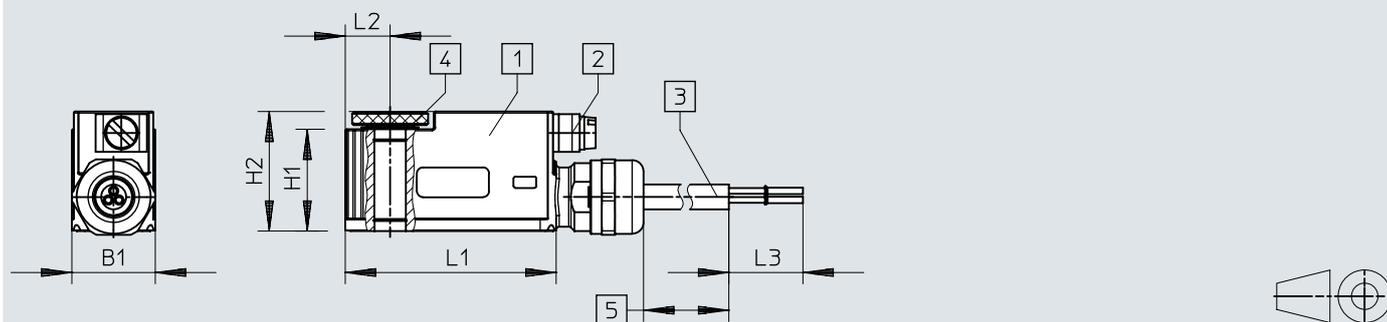


- [1] Solenoid coil
- [2] Equipotential bonding connection terminal
- [3] Heat-resistant rubber tubing
- [4] Knurled nut
- [5] Length depending on order

	B1	H1	H2	L1	L2	L3
VACF-B-K1-...	22	27	31,7	55,5	11,8	50

Dimensions

Dimensions – Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 4-pin

Download CAD data www.festo.com

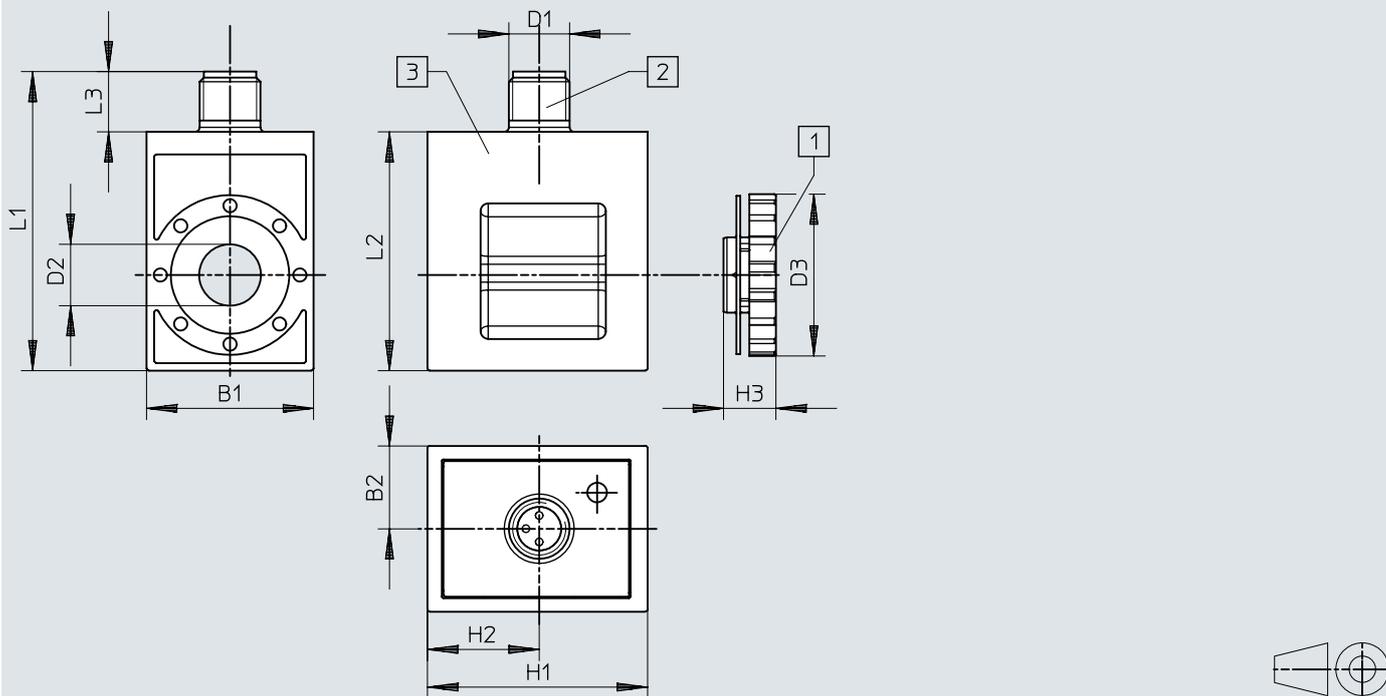


- [1] Knurled nut
- [2] Plug, M8x1 A-coded to EN 61076-2-104
- [3] Solenoid coil

	B1	B2	D1	D2 ∅	D3 ∅	H1	H2	H3	L1	L2	L3
VACF-B-R1...	22	11	M8	8,2	21,5	29	14,7	6,9	39,7	31,7	6,5
VACF-B-R8...											

Dimensions

Dimensions – Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 2-pin

Download CAD data www.festo.com

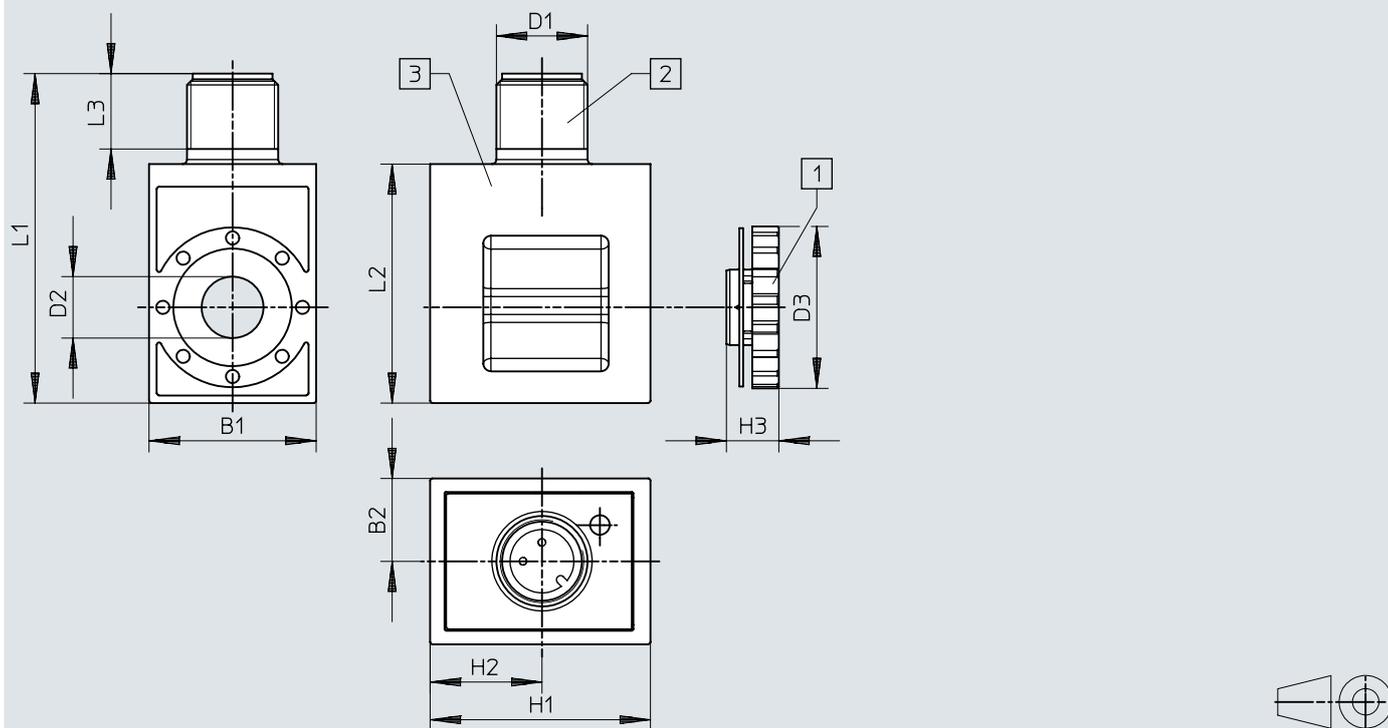


- [1] Knurled nut
- [2] Plug M12x1
- [3] Solenoid coil

	B1	B2	D1	D2 ∅	D3 ∅	H1	H2	H3	L1	L2	L3
VACF-B-R3-...	22	11	M12	8,2	21,5	29	14,7	6,9	43,7	31,7	10
VACF-B-R4-...											

Dimensions

Dimensions – Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M12 4-pin

Download CAD data www.festo.com

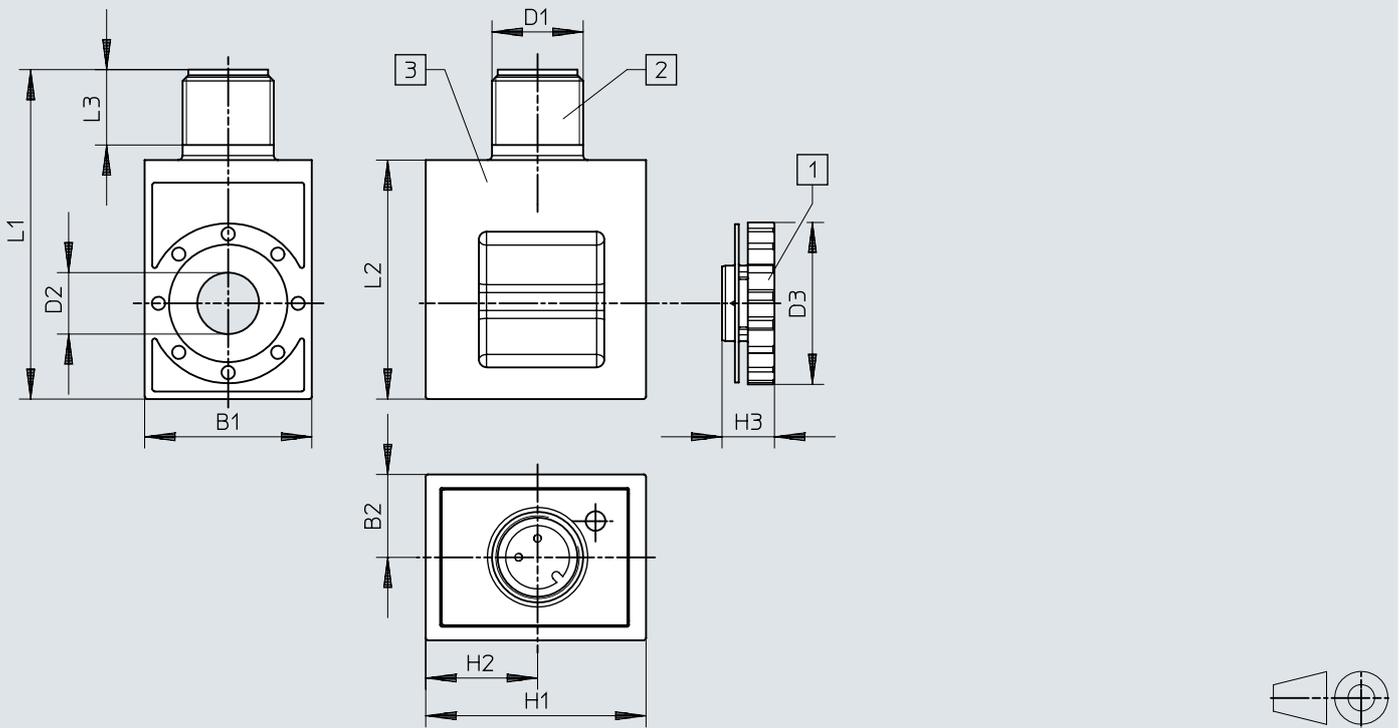


- [1] Knurled nut
- [2] Plug M12x1
- [3] Solenoid coil

	B1	B2	D1	D2 ∅	D3 ∅	H1	H2	H3	L1	L2	L3
VACF-B-R4...	22	11	M12	8,2	21,5	29	14,7	6,9	43,7	31,7	10

Dimensions

Dimensions – Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug M8 3-pin

Download CAD data www.festo.com

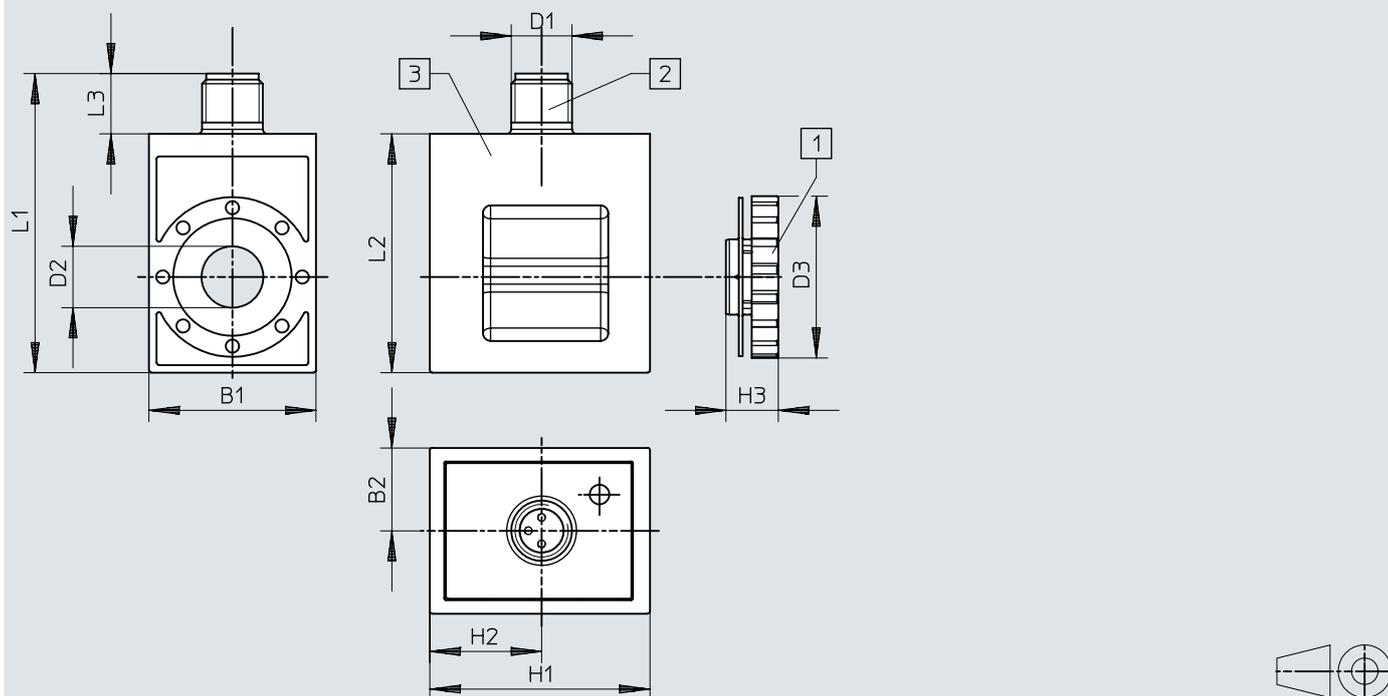

- [1] Knurled nut
 [2] Plug, M8x1 A-coded to EN 61076-2-104
 [3] Solenoid coil

	B1	B2	D1	D2 ∅	D3 ∅	H1	H2	H3	L1	L2	L3
VACF-B-R8-...	22	11	M8	8,2	21,5	29	14,7	6,9	39,7	31,7	6,5

Ordering data

Ordering data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical connection plug							
Circuitry	Nominal operating voltage	Electrical connection	Electrical connection 1, connector system	Product weight	Part no.	Type	
None	24 V DC	Connection pattern type B, industry standard		56.5 g	8030802	VACF-B-B2-1	
		Plug pattern type C, to EN 175301-803		54.1 g	8030811	VACF-B-C1-1	
		Plug pattern type C, industry standard		48.5 g	8153947	VACF-B-E1-1	
		Individual connector M8, 4-pin	M8x1, A-coded, to EN 61076-2-104	49 g	8150875	VACF-B-R1-1L	
		Single plug M12 A-coded, according to EN 61076-2-101	M12x1, A-coded to EN 61076-2-101	49.5 g	8150876	VACF-B-R3-1L	
		Single plug M12 A-coded, pin assignment according to DESINA			8150877	VACF-B-R4-1L	
		Individual connector M8, 3-pin	M8x1, A-coded, to EN 61076-2-104	48.5 g	8150874	VACF-B-R8-1L	
	24 V AC/50-60 Hz	Connection pattern type B, industry standard		55.8 g	8030804	VACF-B-B2-1A	
		Plug pattern type C, to EN 175301-803		54 g	8030813	VACF-B-C1-1A	
	230 V AC/240 V AC/50-60 Hz	Connection pattern type B, industry standard		53 g	8030808	VACF-B-B2-3W	
		Plug pattern type C, to EN 175301-803		51.1 g	8030817	VACF-B-C1-3W	
	12 V DC	Connection pattern type B, industry standard		55.6 g	8030801	VACF-B-B2-5	
		Plug pattern type C, to EN 175301-803		52.4 g	8030810	VACF-B-C1-5	
	48 V DC	Connection pattern type B, industry standard		55.9 g	8030803	VACF-B-B2-7	
		Plug pattern type C, to EN 175301-803		54.3 g	8030812	VACF-B-C1-7	
	48 V AC/50-60 Hz	Connection pattern type B, industry standard		55.3 g	8030805	VACF-B-B2-7A	
		Plug pattern type C, to EN 175301-803		53.5 g	8030814	VACF-B-C1-7A	
	120 V AC/60 Hz and 110V AC/50-60 Hz	Connection pattern type B, industry standard		52.3 g	8030806	VACF-B-B2-16B	
		Plug pattern type C, to EN 175301-803		51 g	8030815	VACF-B-C1-16B	
	Holding current reduction, analogue, with integrated protective circuit	24 V DC	Individual connector M8, 4-pin	M8x1, A-coded, to EN 61076-2-104	49 g	8150879	VACF-B-R1-1RAL
			Single plug M12 A-coded, according to EN 61076-2-101	M12x1, A-coded to EN 61076-2-101	49.5 g	8150873	VACF-B-R3-1RAL
Single plug M12 A-coded, pin assignment according to DESINA			8150880			VACF-B-R4-1RAL	
Individual connector M8, 3-pin			M8x1, A-coded, to EN 61076-2-104	49 g	8150878	VACF-B-R8-1RAL	

Ordering data

Ordering data - Solenoid coils width 22 mm for Armature tube 8 mm, with electrical cable connection						
Circuitry	Nominal operating voltage	Electrical connection	Cable length	Product weight	Part no.	Type
None	24 V DC	Cable	1 m	170 g	8059804	VACF-B-K1-1-1-EX4-M
			5 m		8059805	VACF-B-K1-1-5-EX4-M
			10 m		8059806	VACF-B-K1-1-10-EX4-M
			20 m		8059807	VACF-B-K1-1-20-EX4-M
	24 V AC/50-60 Hz		1 m		8059808	VACF-B-K1-1A-1-EX4-M
	230 V AC/50-60 Hz		5 m		8059809	VACF-B-K1-3A-1-EX4-M
					8059810	VACF-B-K1-3A-5-EX4-M
					8059811	VACF-B-K1-16B-1-EX4-M
					8059812	VACF-B-K1-16B-5-EX4-M
			120 V AC/60 Hz and 110V AC/50-60 Hz		5 m	

Ordering data - Solenoid coils width 30 mm for Armature tube 8 mm, with electrical connection plug						
Circuitry	Nominal operating voltage	Electrical connection	Product weight	Part no.	Type	
None	24 V DC	Plug pattern type A, to EN 175301-803	82.6 g	8030822	VACF-A-A1-1	
	24 V AC/50-60 Hz		83.4 g	8030824	VACF-A-A1-1A	
	230 V AC/240 V AC/50-60 Hz		79.2 g	8030828	VACF-A-A1-3W	
	12 V DC		83.1 g	8030821	VACF-A-A1-5	
	48 V DC		82.7 g	8030823	VACF-A-A1-7	
	48 V AC/50-60 Hz		82.3 g	8030825	VACF-A-A1-7A	
	120 V AC/60 Hz and 110V AC/50-60 Hz		82.4 g	8030826	VACF-A-A1-16B	

Accessories

Seal set	Size	Part no.	Type
	Solenoid coil size 30/8	8034611	VAMC-B10-A-B-S8
	Solenoid coil, size 22/8	8034609	VAMC-B10-B-B-S8