

On-off/soft-start valves HE/HEE/HEP/HEL, D series










FESTO



On-off/soft-start valves HE/HEE/HEP/HEL, D series, metal design

FESTO

Product range overview D series service units, metal design

Type		Size	Pneumatic connection										Pressure regulation range [bar]			Grade of filtration			
																[µm]			
			M5	M7	G1/8	G1/4	G3/8	G1/2	G3/4	G1	QS4	QS6	0.5 ...	0.5 ...	2.5 ...	0.01	1	5	40
		Micro	■	■	■	–	–	–	–	–	■	■	■	–	–	–	–	■	–
		Mini	–	–	■	■	■	–	–	–	–	–	■	■	–	–	–	■	■
		Midi	–	–	–	■	■	■	■	–	–	–	■	■	–	–	–	■	■
		Maxi	–	–	–	–	–	■	■	■	–	–	■	■	–	–	–	■	■
Service unit combinations																			
		Micro	–																
		Mini	–	–	■	■	–	–	–	–	–	–	–	■	■	–	–	–	■
		Midi	–	–	–	■	■	■	–	–	–	–	–	■	■	–	–	–	■
		Maxi	–	–	–	–	–	■	■	–	–	–	–	■	■	–	–	–	■
		Micro	–																
		Mini	–	–	■	■	–	–	–	–	–	–	–	■	■	–	–	–	■
		Midi	–	–	–	■	■	■	–	–	–	–	–	■	■	–	–	–	■
		Maxi	–	–	–	–	–	■	■	–	–	–	–	■	■	–	–	–	■
Individual devices																			
		Micro	■	■	■	–	–	–	–	–	■	■	■	–	–	–	–	■	–
		Mini	–	–	■	■	■	–	–	–	–	–	■	■	–	–	–	■	■
		Midi	–	–	–	■	■	■	■	–	–	–	■	■	–	–	–	■	■
		Maxi	–	–	–	–	–	■	■	■	–	–	■	■	–	–	–	■	■
		Micro	■	■	■	–	–	–	–	–	■	■	–	–	–	–	–	■	–
		Mini	–	–	■	■	■	–	–	–	–	–	–	–	–	–	–	■	■
		Midi	–	–	–	■	■	■	■	–	–	–	–	–	–	–	–	■	■
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–	–	–	–	■	■
		Micro	–																
		Mini	–	–	■	■	■	–	–	–	–	–	–	–	–	■	■	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–	–	■	■	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–	–	■	■	–	–
		Micro	–																
		Mini	–	–	■	■	■	–	–	–	–	–	–	–	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–	–	–	–	–	–
		Micro	–																
		Mini	–	–	■	■	■	–	–	–	–	–	–	–	■	■	–	–	
		Midi	–	–	–	■	■	■	■	–	–	–	–	–	■	■	–	–	
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–	■	■	–	–	
		Micro	■	■	■	–	–	–	–	–	■	■	■	–	–	–	–	–	–
		Mini	–	–	■	■	■	–	–	–	–	–	■	■	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	■	■	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	■	■	–	–	–	–	–

On-off/soft-start valves HE/HEE/HEP/HEL, D series, metal design

FESTO









Product range overview D series service units, metal design

Type	Size	Bowl guard		Condensate drain			Pressure indication		Actuator lock		Supply voltage			Options			→ Page/ Internet
		Metal bowl guard	Plastic bowl	Manual rotary	Semi-automatic	Fully automatic	With pressure gauge	Without pressure gauge	Rotary knob with detent	Rotary knob with integrated lock	24 V DC	110 V AC	230 V AC	Directly actuated pressure regulator with integrated return flow function	Pilot actuated pressure regulator with integrated return flow function	Differential pressure indicator	
Service units																	
FRC/FRCS	Micro	–	■	■	■	–	■	■	■	–	–	–	–	–	–	–	frc
	Mini	■	–	■	–	■	■	■	■	■	–	–	–	–	–	–	
	Midi	■	–	■	–	■	■	■	■	■	–	–	–	–	–	–	
	Maxi	■	–	■	–	■	■	■	■	■	–	–	–	■	■	–	
Service unit combinations																	
FRC-K	Micro	–															frc
	Mini	■	–	■	–	■	■	–	■	–	–	–	–	–	–	–	
	Midi	■	–	■	–	■	■	–	■	–	–	–	–	–	–	–	
	Maxi	■	–	■	–	■	■	–	■	–	–	–	–	■	■	–	
LFR-K LFRS-K	Micro	–															lfr
	Mini	■	–	■	–	■	■	–	■	■	■	–	–	–	–	–	
	Midi	■	–	■	–	■	■	–	■	■	■	–	–	–	–	–	
	Maxi	■	–	■	–	■	■	–	■	■	■	–	–	■	■	–	
Individual devices																	
Filter regulators LFR/LFRS	Micro	–	■	■	■	–	■	■	■	–	–	–	–	–	–	–	lfr
	Mini	■	–	■	–	■	■	■	■	■	–	–	–	–	–	–	
	Midi	■	–	■	–	■	■	■	■	■	–	–	–	–	–	–	
	Maxi	■	–	■	–	■	■	■	■	■	–	–	–	■	■	–	
Filters LF	Micro	–	■	■	■	–	–	–	–	–	–	–	–	–	–	–	lf
	Mini	■	–	■	–	■	–	–	–	–	–	–	–	–	–	–	
	Midi	■	–	■	–	■	–	–	–	–	–	–	–	–	–	–	
	Maxi	■	–	■	–	■	–	–	–	–	–	–	–	–	–	–	
Fine and micro filters LFMA/LFMB	Micro	–															lfma, lfmb
	Mini	■	–	■	–	■	–	–	–	–	–	–	–	–	–	■	
	Midi	■	–	■	–	■	–	–	–	–	–	–	–	–	–	■	
	Maxi	■	–	■	–	■	–	–	–	–	–	–	–	–	–	■	
Active carbon filters LFX	Micro	–															lfx
	Mini	■	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
	Midi	■	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
	Maxi	■	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Filter combinations LFMBA	Micro	–															lfmba
	Mini	■	–	■	–	■	–	–	–	–	–	–	–	–	–	■	
	Midi	■	–	■	–	■	–	–	–	–	–	–	–	–	–	■	
	Maxi	■	–	■	–	■	–	–	–	–	–	–	–	–	–	■	
Pressure regulators LR/LRS	Micro	–	–	–	–	–	■	■	■	–	–	–	–	–	–	–	lr
	Mini	–	–	–	–	–	■	■	■	■	–	–	–	■	–	–	
	Midi	–	–	–	–	–	■	■	■	■	–	–	–	■	–	–	
	Maxi	–	–	–	–	–	■	■	■	■	–	–	–	■	■	–	

On-off/soft-start valves HE/HEE/HEP/HEL, D series, metal design

FESTO

Product range overview D series service units, metal design

Type		Size	Pneumatic connection										Pressure regulation range [bar]	
			M5	M7	G1/8	G1/4	G3/8	G1/2	G3/4	G1	QS4	QS6	0.5 ... 7	0.5 ... 12
Individual devices														
Pressure regulators LRB/LRBS		Micro	–											
		Mini	–	–	–	■	–	–	–	–	–	–	■	■
		Midi	–	–	–	–	■	–	–	–	–	–	■	■
		Maxi	–											
Pressure regulator combinations LRB-K		Micro	–											
		Mini	–	–	–	■	■	–	–	–	–	–	■	■
		Midi	–	–	–	–	■	■	–	–	–	–	■	■
		Maxi	–											
Lubricators LOE		Micro	■	■	■	–	–	–	–	–	■	■	–	–
		Mini	–	–	■	■	■	–	–	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–
On-off valves HE		Micro	–											
		Mini	–	–	■	■	■	–	–	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–
On-off valves, electrical HEE		Micro	–											
		Mini	–	–	■	■	■	–	–	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–
On-off valves, pneumatic HEP		Micro	–											
		Mini	–	–	■	■	■	–	–	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–
Soft-start valves HEL		Micro	–											
		Mini	–	–	■	■	■	–	–	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–
Membrane air dryers LDM1		Micro	–											
		Mini	–											
		Midi	–											
		Maxi	–	–	–	–	–	–	■	■	■	–	–	–
Branching modules FRM		Micro	–											
		Mini	–	–	■	■	■	–	–	–	–	–	–	–
		Midi	–	–	–	■	■	■	■	–	–	–	–	–
		Maxi	–	–	–	–	–	■	■	■	–	–	–	–
Distributor block FRZ		Micro	–	–	–	–	–	–	–	–	–	–	–	–
		Mini	–	–	–	–	–	–	–	–	–	–	–	–
		Midi	–	–	–	–	–	–	–	–	–	–	–	–
		Maxi	–	–	–	–	–	–	–	–	–	–	–	–

On-off/soft-start valves HE/HEE/HEP/HEL, D series, metal design

Product range overview D series service units, metal design

Type	Size	Bowl guard		Pressure indication		Actuator lock		Supply voltage			Options		→ Page/ Internet
		Metal bowl guard	Plastic bowl	With pressure gauge	Without pressure gauge	Rotary knob with detent	Rotary knob with integrated lock	24 V DC	110 V AC	230 V AC	Non-return function	Pressure switch	
Individual devices													
Pressure regulators LRB/LRBS	Micro	-											lrb
	Mini	-	-	-	■	■	■	-	-	-	-	-	
	Midi	-	-	-	■	■	■	-	-	-	-	-	
	Maxi	-											
Pressure regulator combinations LRB-K	Micro	-											lrb
	Mini	-	-	-	■	■	-	-	-	-	-	-	
	Midi	-	-	-	■	■	-	-	-	-	-	-	
	Maxi	-											
Lubricators LOE	Micro	-	■	-	■	-	-	-	-	-	-	-	loe
	Mini	■	-	-	■	-	-	-	-	-	-	-	
	Midi	■	-	-	■	-	-	-	-	-	-	-	
	Maxi	■	-	-	■	-	-	-	-	-	-	-	
On-off valves HE	Micro	-											6
	Mini	-	-	-	■	■	-	-	-	-	-	-	
	Midi	-	-	-	■	■	-	-	-	-	-	-	
	Maxi	-	-	-	■	■	-	-	-	-	-	-	
On-off valves, electrical HEE	Micro	-											11
	Mini	-	-	-	■	-	-	■	■	■	-	-	
	Midi	-	-	-	■	-	-	■	■	■	-	-	
	Maxi	-	-	-	■	-	-	■	■	■	-	-	
On-off valves, pneumatic HEP	Micro	-											17
	Mini	-	-	-	■	-	-	-	-	-	-	-	
	Midi	-	-	-	■	-	-	-	-	-	-	-	
	Maxi	-	-	-	■	-	-	-	-	-	-	-	
Soft-start valves HEL	Micro	-											22
	Mini	-	-	-	■	-	-	-	-	-	-	-	
	Midi	-	-	-	■	-	-	-	-	-	-	-	
	Maxi	-	-	-	■	-	-	-	-	-	-	-	
Membrane air dryers LDM1	Micro	-											ldm1
	Mini	-											
	Midi	-											
	Maxi	■	-	-	■	-	-	-	-	-	-	-	
Branching modules FRM	Micro	-											frm
	Mini	-	-	-	■	-	-	-	-	-	■	■	
	Midi	-	-	-	■	-	-	-	-	-	■	■	
	Maxi	-	-	-	■	-	-	-	-	-	■	■	
Distributor block FRZ	Micro	-	-	-	■	-	-	-	-	-	-	-	frz
	Mini	-	-	-	■	-	-	-	-	-	-	-	
	Midi	-	-	-	■	-	-	-	-	-	-	-	
	Maxi	-	-	-	■	-	-	-	-	-	-	-	

On-off valves HE, D series, metal design



Peripherals overview and Type codes

FESTO

Mini/Midi/Maxi

Individual unit with connection plates

Individual unit without connection plates, for service unit combination

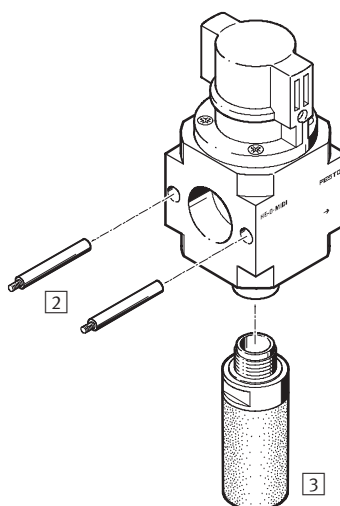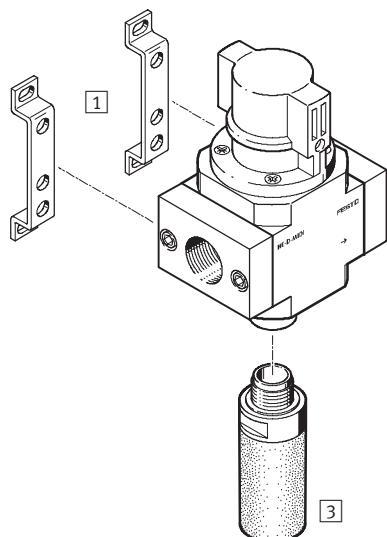

Mounting attachments and accessories					
	Individual unit		Combination		→ Page/ Internet
	with connection plates	without connection plates	with connection plates	without connection plates	
1 Mounting bracket HFOE	■	–	■	–	hfoe-d
2 Threaded pin (included in scope of delivery) FRB	–	–	■	■	frb-d
3 Silencer U	■	■	■	■	27


		HE	–	1/4	–	D	–	MIDI
Basic function								
HE	On-off valve, manual							
Pneumatic connection								
1/8	Thread G1/8							
1/4	Thread G1/4							
3/8	Thread G3/8							
1/2	Thread G1/2							
3/4	Thread G3/4							
1	Thread G1							
Series								
D	Series							
Size								
MINI	Grid dimension 40 mm (without connecting plates)							
MIDI	Grid dimension 55 mm (without connecting plates)							
MAXI	Grid dimension 66 mm (without connecting plates)							

On-off valves HE, D series, metal design

FESTO

Technical data

Function



Flow rate

1000 ... 6500 l/min

Temperature range

-10 ... +60 °C



Operating pressure
0 ... 16 bar



- 3/2-way manual shut-off valve
- The unit is vented when switched off
- Ducted exhaust possible via a threaded connection
- The switching position is immediately recognisable
- Commercially available padlock can be used for security

General technical data										
Size	Mini			Midi				Maxi		
Pneumatic connection	G1/8	G1/4	G3/8	G1/4	G3/8	G1/2	G3/4	G1/2	G3/4	G1
Operating medium	Filtered compressed air, lubricated or unlubricated, grade of filtration 50 µm									
Design	Piston spool valve									
Type of mounting	Via accessories									
	In-line installation									
Assembly position	Any									
Operating pressure [bar]	0 ... 16									
Valve function	3/2-way valve, single solenoid									
Exhaust function	Without flow control									
Reset method	Mechanical spring									
C value [l/(s*bar)]	4.4	7.2	7.5	9.9	15.7	17.0	17.3	23.7	26.8	25.9
b value	0.44	0.28	0.27	0.45	0.30	0.30	0.42	0.32	0.35	0.37
Direction of flow	Non-reversible									

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Standard nominal flow rate ¹⁾ qnN [l/min]						
Connection	G1/8	G1/4	G3/8	G1/2	G3/4	G1
Mini						
HE	1000	1500	1600	–	–	–
Midi						
HE	–	2600	3200	3600	3800	–
Maxi						
HE	–	–	–	5600	6000	6500

1) Measured at p1 = 6 bar and Δp = 1 bar.

On-off valves HE, D series, metal design

FESTO

Technical data

Ambient conditions				
Size		Mini	Midi	Maxi
Ambient temperature	[°C]	-10 ... +60		
Temperature of medium	[°C]	-10 ... +60		
Corrosion resistance class	CRC ¹⁾	2		


1) Corrosion resistance class 2 according to Festo standard 940 070

Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Weight [g]			
Size	Mini	Midi	Maxi
HE	192	511	796

Materials

Sectional view

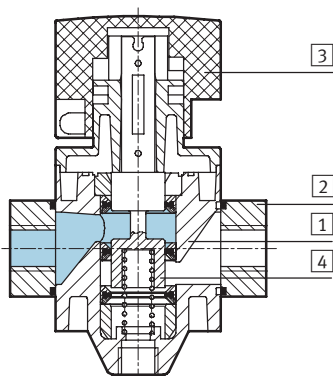

On-off valve		
1	Housing	Die-cast aluminium
2	Connecting plates	Wrought aluminium alloy
3	Rotary knob	Polyamide
4	Piston	Stainless steel
-	Seals	Nitrile rubber
Note on materials		Free of copper, PTFE and silicone

On-off valves HE, D series, metal design

Technical data


FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Mini/Midi/Maxi


With threaded connecting plates

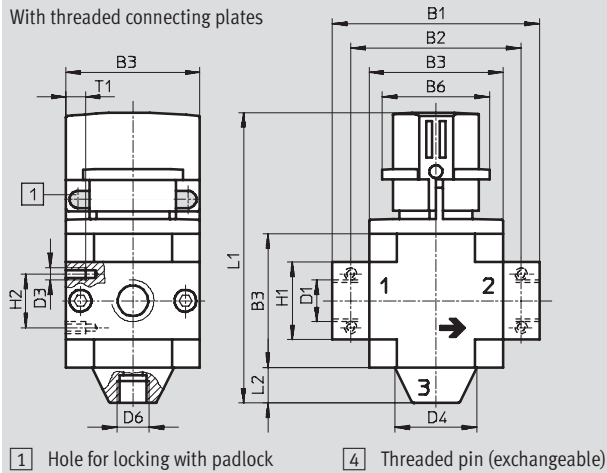

1 Hole for locking with padlock

4 Threaded pin (exchangeable)

Without threaded connecting plates

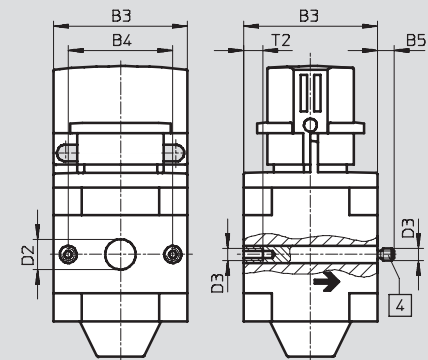

→ Flow direction

Type	B1	B2	B3	B4	B5	B6	D1	D2 Ø	D3	D4 Ø	D6	H1	H2	L1	L2	T1	T2
Mini																	
HE-1/8-D-MINI	64	52	40	30	-	32	G1/8	-	M4	24	G1/8	20	11	100	11	7	-
HE-1/4-D-MINI							G1/4										
HE-3/8-D-MINI	70						G3/8										
HE-D-MINI	-	-			5.8		-	11				-	-			-	10
Midi																	
HE-1/4-D-MIDI	85	70	55	43	-	44	G1/4	-	M5	34	G1/4	32	22	121	14	8	-
HE-3/8-D-MIDI							G3/8										
HE-1/2-D-MIDI							G1/2										
HE-3/4-D-MIDI							G3/4										
HE-D-MIDI	-	-			6.8		-	24				-	-			-	11
Maxi																	
HE-1/2-D-MAXI	96	80	66	46	-	44	G1/2	-	M5	38	G3/8	32	22	134	16	8	-
HE-3/4-D-MAXI							G3/4										
HE-1-D-MAXI	116	91					G1					40					
HE-D-MAXI	-	-			6.8		-	30				-	-			-	11

Note: This product conforms to ISO 1179-1 and to ISO 228-1

On-off valves HE, D series, metal design

FESTO

Technical data

Ordering data		
3/2-way valve, operating pressure 0 ... 16 bar, normally closed		
Size	Part No.	Type
Without threaded connecting plates		
Mini	170681	HE-D-MINI
Midi	170682	HE-D-MIDI
Maxi	170683	HE-D-MAXI

Ordering data			
3/2-way valve, operating pressure 0 ... 16 bar, normally closed			
Size	Connection	Part No.	Type
With threaded connecting plates			
Mini	G1/8	162806	HE-1/8-D-MINI
	G1/4	162807	HE-1/4-D-MINI
	G3/8	162808	HE-3/8-D-MINI
Midi	G1/4	186513	HE-1/4-D-MIDI
	G3/8	162809	HE-3/8-D-MIDI
	G1/2	162810	HE-1/2-D-MIDI
	G3/4	162811	HE-3/4-D-MIDI
Maxi	G1/2	186514	HE-1/2-D-MAXI
	G3/4	162812	HE-3/4-D-MAXI
	G1	162813	HE-1-D-MAXI

On-off valves HEE, D series, metal design



Peripherals overview

FESTO

Mini/Midi/Maxi

Individual unit with connection plates

Individual unit without connection plates, for service unit combination

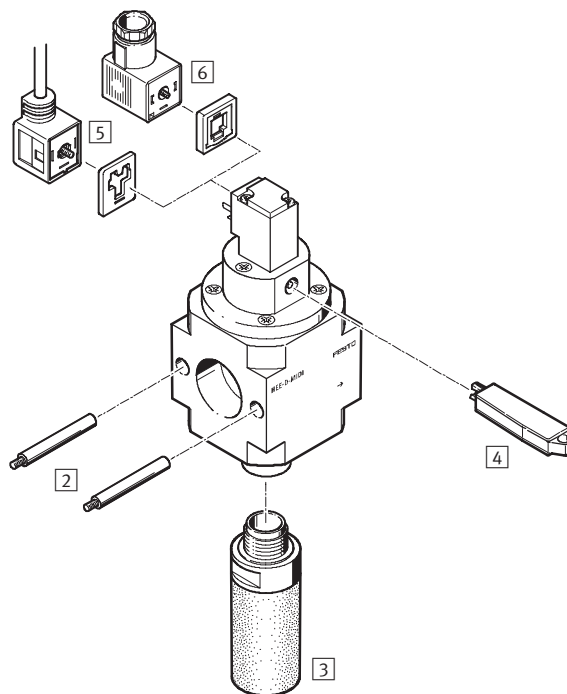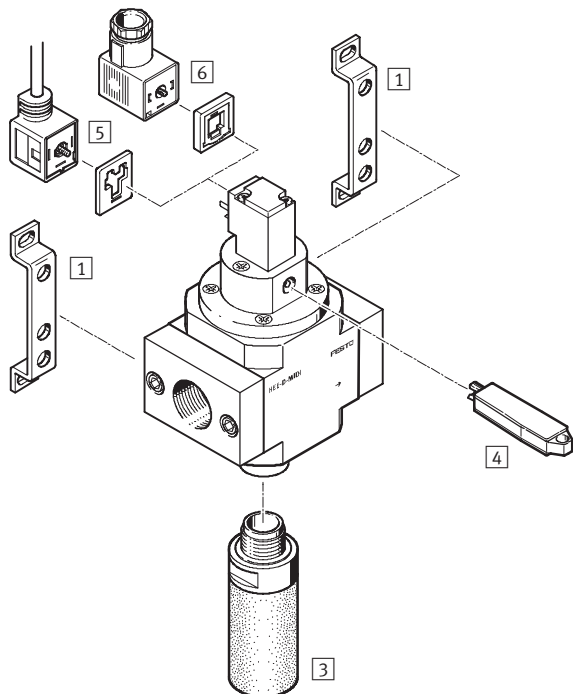

Mounting attachments and accessories

	Individual unit		Combination		→ Page/ Internet
	with connection plates	without connection plates	with connection plates	without connection plates	
1 Mounting bracket HFOE	■	–	■	–	hfoe-d
2 Threaded pin (included in scope of delivery) FRB	–	–	■	■	frb-d
3 Silencer U	■	■	■	■	27
4 Manual override tool, non-detenting AHB-MD/MF/MY	■	■	■	■	–
5 Plug socket with cable KMEB-1	■	■	■	■	27
6 Plug socket MSSD-EB	■	■	■	■	27

On-off valves HEE, D series, metal design

Type codes

FESTO


		HEE	–	1/4	–	D	–	MIDI	–	110
Basic function										
HEE	On-off valve, electrical									
Pneumatic connection										
1/8	Thread G1/8									
1/4	Thread G1/4									
3/8	Thread G3/8									
1/2	Thread G1/2									
3/4	Thread G3/4									
1	Thread G1									
Series										
D	Series									
Size										
MINI	Grid dimension 40 mm (without connecting plates)									
MIDI	Grid dimension 55 mm (without connecting plates)									
MAXI	Grid dimension 66 mm (without connecting plates)									
Voltage										
24	Supply voltage 24 V DC									
110	Supply voltage 110 V AC									
230	Supply voltage 230 V AC									

On-off valves HEE, D series, metal design

FESTO

Technical data

Function



Flow rate

1000 ... 6500 l/min

Temperature range

-10 ... +60 °C



Operating pressure
2.5 ... 16 bar



- Electrical on-off valve for pressurising and venting pneumatic installations
- With solenoid coil without plug socket
- Three voltage ranges can be selected
- Manual override via pushing and detenting (using override tool AHB-MD/MF/MV)
- Solenoid head can be repositioned by 4 x 90°

General technical data											
Size	Mini			Midi				Maxi			
Pneumatic connection 1, 2	G1/8	G1/4	G3/8	G1/4	G3/8	G1/2	G3/4	G1/2	G3/4	G1	
Pneumatic connection 3	G1/8			G1/4				G3/8			
Design	Piston spool valve										
Type of mounting	Via accessories										
	In-line installation										
Assembly position	Any										
Valve function	3/2-way valve, single solenoid										
Exhaust function	Without flow control										
Type of actuation	Mechanical spring										
Direction of flow	Non-reversible										
Sealing principle	Soft										
C value [l/(s*bar)]	4.4	7.0	7.3	9.7	15.7	17.0	17.3	24.2	28.0	27.6	
b value	0.44	0.31	0.28	0.47	0.33	0.30	0.41	0.30	0.32	0.32	

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Electrical data		
Coil characteristics	24	24 V DC: 3.0 W; perm. voltage fluctuations ±10%
	110	110 V AC: 50/60 Hz; pick-up power 5.0 W; holding power 3.7 W; perm. voltage fluctuations ±10%
	230	230 V AC: 50/60 Hz; pick-up power 5.0 W; holding power 3.7 W; perm. voltage fluctuations -14%/+10%
Electrical connection	Plug to DIN EN 175301-803, type C	
Protection class for solenoid coil	IP65	
Duty cycle [%]	100	

On-off valves HEE, D series, metal design

FESTO

Technical data

Standard nominal flow rate ¹⁾ qnN [l/min]						
Connection	G1/8	G1/4	G3/8	G1/2	G3/4	G1
Mini						
HEE	1000	1500	1600	–	–	–
Midi						
HEE	–	2400	3200	3600	3800	–
Maxi						
HEE	–	–	–	5600	6000	6500

1) Measured at p1 = 6 bar and Δp = 1 bar.


Operating and environmental conditions			
Size	Mini	Midi	Maxi
Operating pressure [bar]	2.5 ... 16		
Operating medium	Filtered compressed air, lubricated or unlubricated, grade of filtration 50 µm		
Ambient temperature [°C]	–10 ... +60		
Temperature of medium [°C]	–10 ... +60		
Corrosion resistance class CRC ¹⁾	2		
Certification	Germanischer Lloyd (only with supply voltage 24 V DC and 110 V AC)		
ATEX	Specified types → www.festo.com		

1) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Weight [g]			
Size	Mini	Midi	Maxi
HEE	223	500	800

Materials

Sectional view



On-off valve		
1	Housing	Die-cast aluminium
2	Connecting plates	Wrought aluminium alloy
3	Solenoid and intermediate plate	Polyamide
4	Piston	Stainless steel
–	Seals	Nitrile rubber
Note on materials		Free of copper and PTFE

On-off valves HEE, D series, metal design

Technical data

FESTO


Dimensions

Download CAD Data → www.festo.com/us/cad

Mini/Midi/Maxi, with threaded connecting plates

Supply voltage 110/230 V AC


Supply voltage 24 V DC

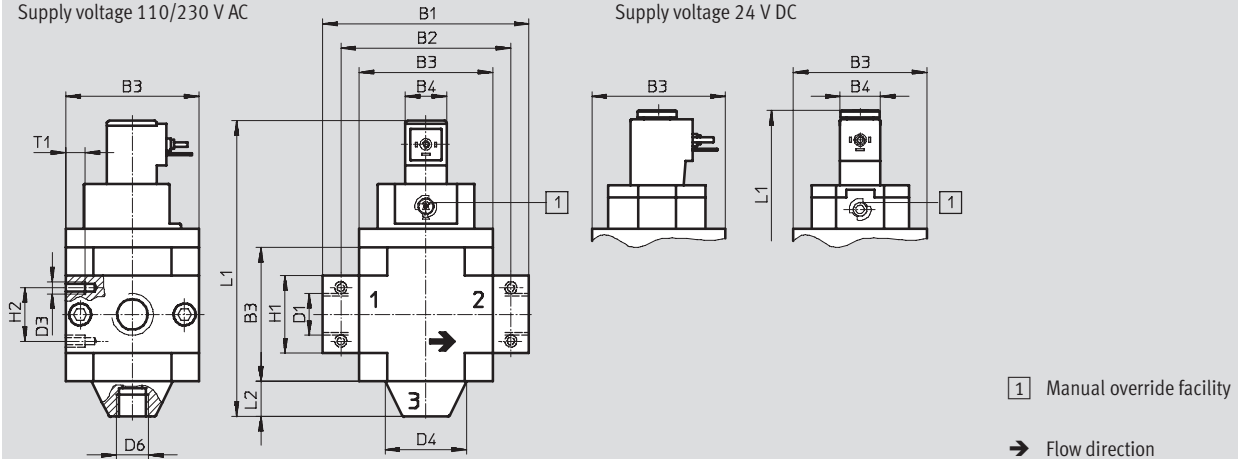

Mini/Midi/Maxi, without threaded connecting plates

Supply voltage 110/230 V AC

Supply voltage 24 V DC

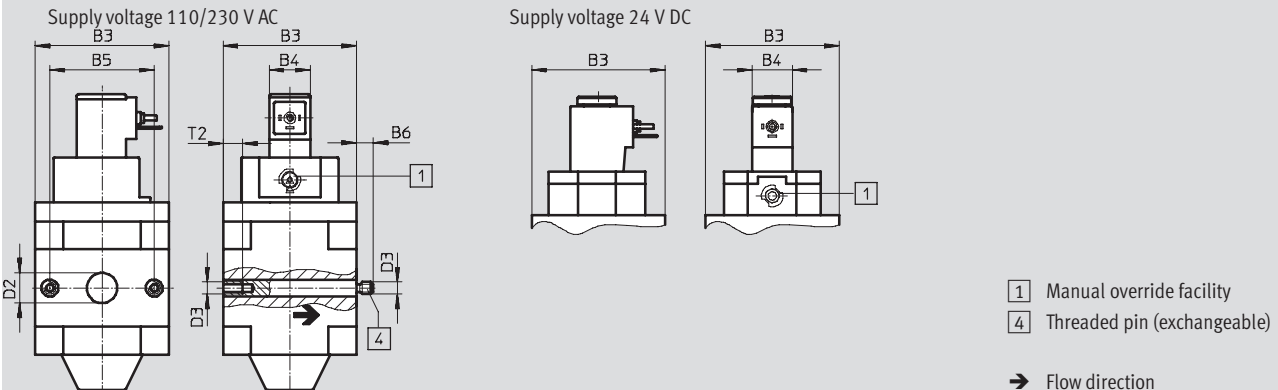

Type	B1	B2	B3	B4	B5	B6	D1	D2 Ø	D3	D4 Ø	D6	H1	H2	L1		L2	T1	T2
														24 V DC	110 V AC 230 V AC			
Mini																		
HEE-1/8-D-MINI	64	52	40	17	30	-	G1/8	-	M4	24	G1/8	20	11	108	104	11	7	-
HEE-1/4-D-MINI							G1/4										-	
HEE-3/8-D-MINI	70						G3/8										-	10
HEE-D-MINI	-	-				5.8	-	11				-	-				-	10
Midi																		
HEE-1/4-D-MIDI	85	70	55	17	43	-	G1/4	-	M5	34	G1/4	32	22	126	122	14	8	-
HEE-3/8-D-MIDI							G3/8											
HEE-1/2-D-MIDI							G1/2											
HEE-3/4-D-MIDI							G3/4											
HEE-D-MIDI	-	-				6.8	-	24				-	-				-	11
Maxi																		
HEE-1/2-D-MAXI	96	80	66	17	46	-	G1/2	-	M5	38	G3/8	32	22	139	135	16	8	-
HEE-3/4-D-MAXI							G3/4											
HEE-1-D-MAXI	116	91					G1					40						
HEE-D-MAXI	-	-					6.8					-					30	-

Note: This product conforms to ISO 1179-1 and to ISO 228-1

On-off valves HEE, D series, metal design

FESTO

Technical data

Ordering data							
3/2-way valve, operating pressure 2.5 ... 16 bar, normally closed							
Size	Connection	24 V DC		110 V AC		230 V AC	
		Part No.	Type	Part No.	Type	Part No.	Type
Without threaded connecting plates							
Mini		172956	HEE-D-MINI-24	172957	HEE-D-MINI-110	172958	HEE-D-MINI-230
Midi		172959	HEE-D-MIDI-24	172960	HEE-D-MIDI-110	172961	HEE-D-MIDI-230
Maxi		172962	HEE-D-MAXI-24	172963	HEE-D-MAXI-110	172964	HEE-D-MAXI-230

Ordering data						
3/2-way valve, operating pressure 2.5 ... 16 bar, normally closed						
Size	Connection	24 V DC		110 V AC		230 V AC
		Part No.	Type	Part No.	Type	Part No. Type
With threaded connecting plates						
Mini	G1/8	165068	HEE-1/8-D-MINI-24	165069	HEE-1/8-D-MINI-110	165070 HEE-1/8-D-MINI-230
	G1/4	165071	HEE-1/4-D-MINI-24	165072	HEE-1/4-D-MINI-110	165073 HEE-1/4-D-MINI-230
	G3/8	165074	HEE-3/8-D-MINI-24	165075	HEE-3/8-D-MINI-110	172940 HEE-3/8-D-MINI-230
Midi	G1/4	186515	HEE-1/4-D-MIDI-24	186517	HEE-1/4-D-MIDI-110	186516 HEE-1/4-D-MIDI-230
	G3/8	172941	HEE-3/8-D-MIDI-24	172942	HEE-3/8-D-MIDI-110	172943 HEE-3/8-D-MIDI-230
	G1/2	172944	HEE-1/2-D-MIDI-24	172945	HEE-1/2-D-MIDI-110	172946 HEE-1/2-D-MIDI-230
	G3/4	172947	HEE-3/4-D-MIDI-24	172948	HEE-3/4-D-MIDI-110	172949 HEE-3/4-D-MIDI-230
Maxi	G1/2	186518	HEE-1/2-D-MAXI-24	186520	HEE-1/2-D-MAXI-110	186519 HEE-1/2-D-MAXI-230
	G3/4	172950	HEE-3/4-D-MAXI-24	172951	HEE-3/4-D-MAXI-110	172952 HEE-3/4-D-MAXI-230
	G1	172953	HEE-1-D-MAXI-24	172954	HEE-1-D-MAXI-110	172955 HEE-1-D-MAXI-230



On-off valves HEP, D series, metal design

Peripherals overview and Type codes

Mini/Midi/Maxi

Individual unit with connection plates

Individual unit without connection plates, for service unit combination

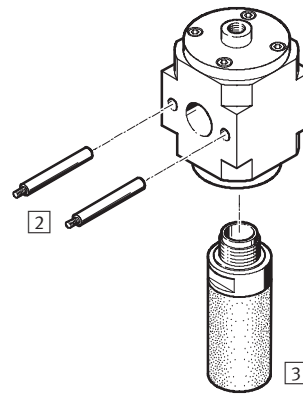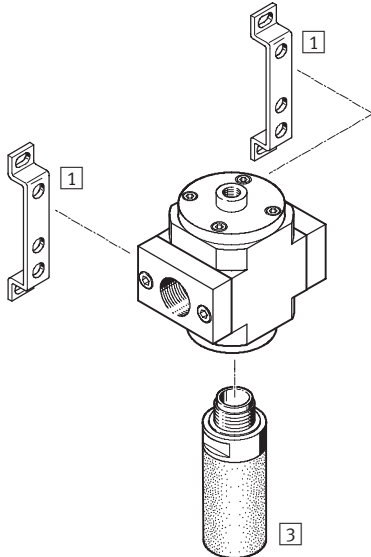

Mounting attachments and accessories						
		Individual unit		Combination		➔ Page/ Internet
		with connection plates	without connection plates	with connection plates	without connection plates	
1	Mounting bracket HFOE	■	–	■	–	hfoe-d
2	Threaded pin (included in scope of delivery) FRB	–	–	■	■	frb-d
3	Silencer U	■	■	■	■	27


		HEP	–	1/4	–	D	–	MIDI
Basic function								
HEP	On-off valve, pneumatic							
Pneumatic connection								
1/8	Thread G1/8							
1/4	Thread G1/4							
3/8	Thread G3/8							
1/2	Thread G1/2							
3/4	Thread G3/4							
1	Thread G1							
Series								
D	Series							
Size								
MINI	Grid dimension 40 mm (without connecting plates)							
MIDI	Grid dimension 55 mm (without connecting plates)							
MAXI	Grid dimension 66 mm (without connecting plates)							

On-off valves HEP, D series, metal design

Technical data

FESTO

Function



Flow rate

800 ... 6500 l/min

Temperature range

-10 ... +60 °C



Operating pressure
2 ... 16 bar



- Pneumatically actuated on-off valve for pressurising and venting pneumatic installations
- The valve can be used as a single unit or in combination with other D series modules
- These valves are particularly suitable for applications in explosion protection areas

General technical data										
Size	Mini			Midi				Maxi		
Pneumatic connection	G1/8	G1/4	G3/8	G1/4	G3/8	G1/2	G3/4	G1/2	G3/4	G1
Operating medium	Filtered compressed air, lubricated or unlubricated, grade of filtration 50 µm									
Design	Piston spool valve									
Type of mounting	Via accessories									
	In-line installation									
Assembly position	Any									
Operating pressure [bar]	2 ... 16									
Pilot pressure [bar]	3 ... 16									
Valve function	3/2-way valve									
Exhaust function	Without flow control									
Type of actuation	Mechanical spring									
C value [l/(s*bar)]	4.3	7.2	7.7	10.1	15.5	16.6	16.2	24.2	28.0	27.6
b value	0.48	0.34	0.30	0.46	0.33	0.40	0.47	0.30	0.32	0.32
Direction of flow	Non-reversible									

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Standard nominal flow rate ¹⁾ qnN [l/min]						
Connection	G1/8	G1/4	G3/8	G1/2	G3/4	G1
Mini						
HEP	1000	1500	1600	–	–	–
Without threaded connecting plates	800			–	–	–
Midi						
HEP	–	2600	3500	3900	4100	–
Without threaded connecting plates	–	1900				–
Maxi						
HEP	–	–	–	5600	6000	6500
Without threaded connecting plates	–	–	–	2400		

1) Measured at p1 = 6 bar and Δp = 1 bar.

On-off valves HEP, D series, metal design

FESTO

Technical data

Ambient conditions				
Size		Mini	Midi	Maxi
Ambient temperature	[°C]	-10 ... +60 °C		
Temperature of medium	[°C]	-10 ... +60 °C		
Corrosion resistance class	CRC ¹⁾	2		


1) Corrosion resistance class 2 according to Festo standard 940 070

Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Weight [g]			
Size	Mini	Midi	Maxi
HEP	223	500	800

Materials

Sectional view



On-off valve		
1	Housing	Die-cast aluminium
2	Connecting plates	Wrought aluminium alloy
3	Piston	Stainless steel
-	Seals	Nitrile rubber
Note on materials		Free of copper, PTFE and silicone

On-off valves HEP, D series, metal design

Technical data


FESTO

Dimensions


Download CAD Data → www.festo.com/us/cad

Mini/Midi/Maxi

With threaded connecting plates

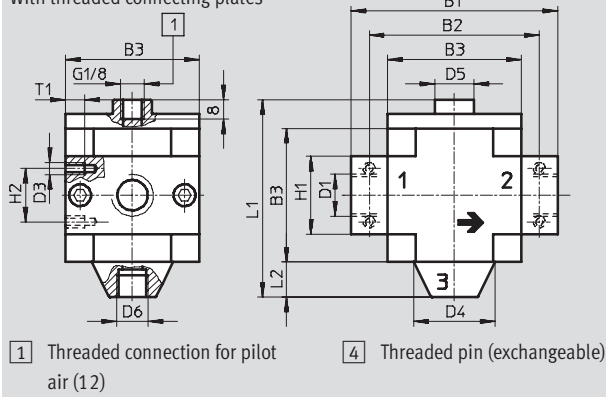

Without threaded connecting plates

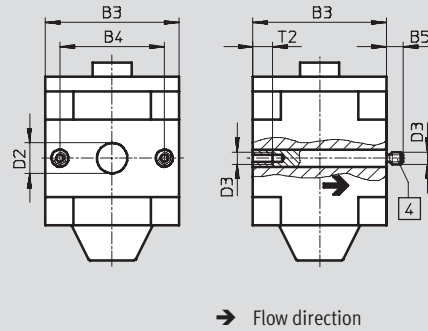

Type	B1	B2	B3	B4	B5	D1	D2	D3	D4	D5	D6	H1	H2	L1	L2	T1	T2
Mini																	
HEP-1/8-D-MINI	64	52	40	30	-	G1/8	-	M4	24	16	G1/8	20	11	73.8	11	7	-
HEP-1/4-D-MINI						G1/4											
HEP-3/8-D-MINI	70					G3/8											
HEP-D-MINI	-	-			5.8	-	11					-	-			-	10
Midi																	
HEP-1/4-D-MIDI	85	70	55	43	-	G1/4	-	M5	34	32	G1/4	32	22	94.6	14	8	-
HEP-3/8-D-MIDI						G3/8											
HEP-1/2-D-MIDI						G1/2											
HEP-3/4-D-MIDI						G3/4											
HEP-D-MIDI	-	-			6.8	-	24					-	-			-	11
Maxi																	
HEP-1/2-D-MAXI	96	80	66	46	-	G1/2	-	M5	38	16	G3/8	32	22	95.6	16	8	-
HEP-3/4-D-MAXI						G3/4											
HEP-1-D-MAXI						G1											
HEP-D-MAXI	-	-			6.8	-	30					-	-			-	11

Note: This product conforms to ISO 1179-1 and to ISO 228-1

On-off valves HEP, D series, metal design

FESTO

Technical data

Ordering data		
Pneumatic actuation, 3/2-way valve, operating pressure 2 ... 16 bar, normally closed		
Size	Part No.	Type
Without threaded connecting plates		
Mini	193242	HEP-D-MINI
Midi	193249	HEP-D-MIDI
Maxi	193257	HEP-D-MAXI

Ordering data			
Pneumatic actuation, 3/2-way valve, operating pressure 2 ... 16 bar, normally closed			
Size	Connection	Part No.	Type
With threaded connecting plates			
Mini	G1/8	193243	HEP-1/8-D-MINI
	G1/4	193244	HEP-1/4-D-MINI
	G3/8	193245	HEP-3/8-D-MINI
Midi	G1/4	193250	HEP-1/4-D-MIDI
	G3/8	193251	HEP-3/8-D-MIDI
	G1/2	193252	HEP-1/2-D-MIDI
	G3/4	193253	HEP-3/4-D-MIDI
Maxi	G1/2	193258	HEP-1/2-D-MAXI
	G3/4	193259	HEP-3/4-D-MAXI
	G1	193260	HEP-1-D-MAXI

Soft-start valves HEL, D series, metal design



Peripherals overview and Type codes

FESTO

Mini/Midi/Maxi

Individual unit with connection plates

Individual unit without connection plates, for service unit combination

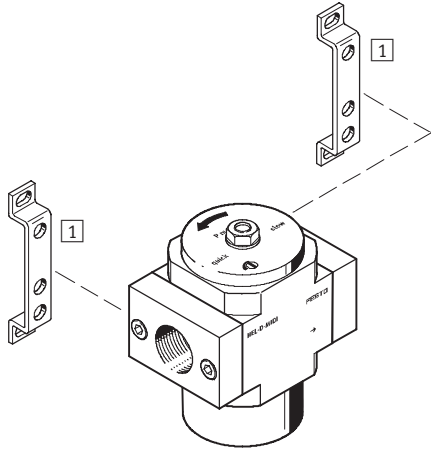

Mounting attachments and accessories

	Individual unit		Combination		→ Page/ Internet
	with connection plates	without connection plates	with connection plates	without connection plates	
1 Mounting bracket HFOE	■	–	■	–	hfoe-d
2 Threaded pin (included in scope of delivery) FRB	–	–	■	■	frb-d


		HEL	–	1/4	–	D	–	MIDI
Basic function								
HEL	Soft-start valve, gradual pressure build-up							
Pneumatic connection								
1/8	Thread G1/8							
1/4	Thread G1/4							
3/8	Thread G3/8							
1/2	Thread G1/2							
3/4	Thread G3/4							
1	Thread G1							
Series								
D	Series							
Size								
MINI	Grid dimension 40 mm (without connecting plates)							
MIDI	Grid dimension 55 mm (without connecting plates)							
MAXI	Grid dimension 66 mm (without connecting plates)							

Soft-start valves HEL, D series, metal design

FESTO

Technical data

Function



Flow rate

1000 ... 6500 l/min

Temperature range

-10 ... +60 °C



Operating pressure
3 ... 16 bar



- Soft-start valve for gradual pressure build-up (for use with on-off valves HE and HEE)
- Drives are moved slowly and safely to their initial positions
- Sudden and erratic movements are avoided
- Pressure switching approx. 50% of input pressure
- Adjustable switching time delay

General technical data										
Size	Mini			Midi				Maxi		
Pneumatic connection	G1/8	G1/4	G3/8	G1/4	G3/8	G1/2	G3/4	G1/2	G3/4	G1
Operating medium	Filtered compressed air, lubricated or unlubricated, grade of filtration 50 µm									
Design	Piston spool valve									
Type of mounting	Via accessories									
	In-line installation									
Assembly position	Any									
Operating pressure [bar]	3 ... 16									
Valve function	2/2-way valve, single solenoid, closed									
Exhaust function	Flow control									
Reset method	Mechanical spring									
C value [l/(s*bar)]	4.4	7.9	9.1	10.0	18.4	21.0	22.5	26.9	31.0	29.0
b value	0.46	0.38	0.29	0.49	0.33	0.29	0.36	0.36	0.30	0.38
Type of actuation	Direct									
Direction of flow	Non-reversible									

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Standard nominal flow rate ¹⁾ qnN [l/min]						
Connection	G1/8	G1/4	G3/8	G1/2	G3/4	G1
Mini						
HEL	1000	1500	1600	–	–	–
Midi						
HEL	–	2600	3200	3600	3800	–
Maxi						
HEL	–	–	–	5600	6000	6500

1) Measured at p1 = 6 bar and Δp = 1 bar.

Soft-start valves HEL, D series, metal design

FESTO

Technical data

Ambient conditions			
Size	Mini	Midi	Maxi
Ambient temperature [°C]	-10 ... +60		
Temperature of medium [°C]	-10 ... +60		
Corrosion resistance class CRC ¹⁾	2		


1) Corrosion resistance class 2 according to Festo standard 940 070

Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Weight [g]			
Size	Mini	Midi	Maxi
HEL	184	586	850

Materials


Sectional view



On-off valve		
1	Housing	Die-cast aluminium
2	Connecting plates	Wrought aluminium alloy
3	Piston	Stainless steel
-	Seals	Nitrile rubber
Note on materials		Free of copper, PTFE and silicone

Switching point

Pressure p as a function of time t

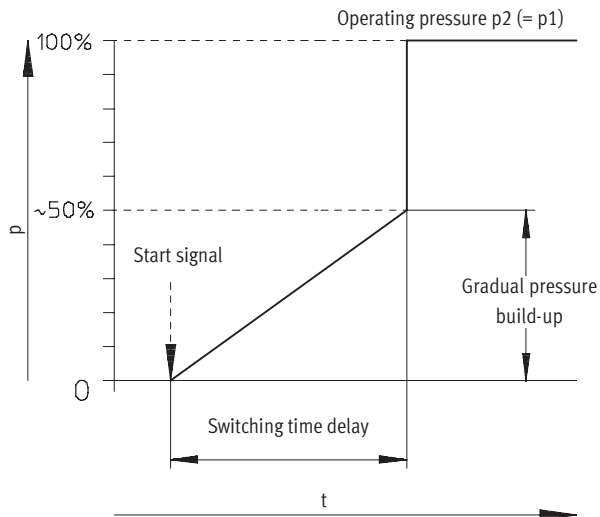

Soft-start valves HEL, D series, metal design

Technical data


FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Mini


With threaded connecting plates

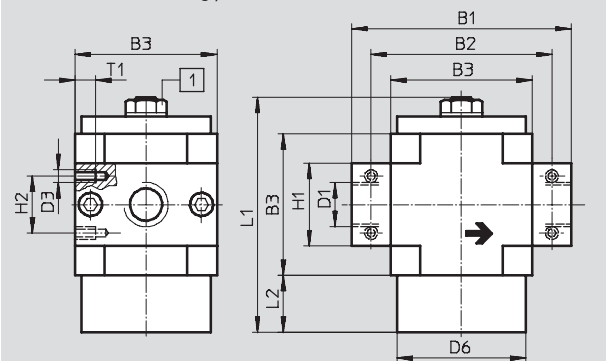

1 Regulating screw for flow control valve

4 Threaded pin (exchangeable)


Without threaded connecting plates

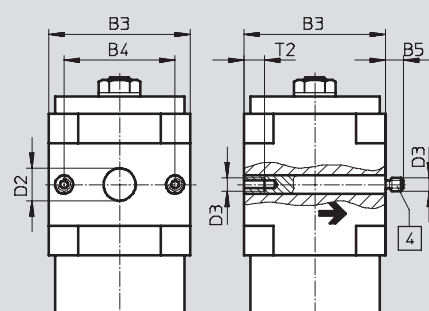

→ Flow direction

Midi/Maxi


With threaded connecting plates

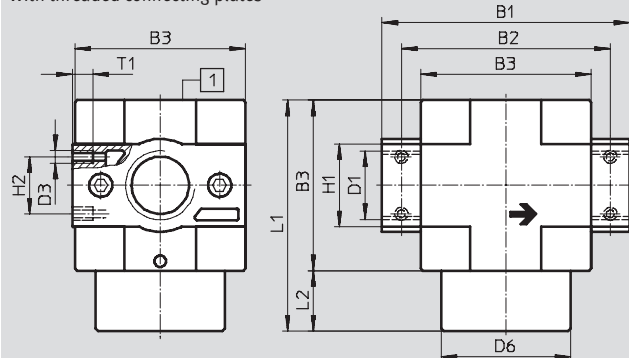

1 Regulating screw in housing

4 Threaded pin (exchangeable)

Without threaded connecting plates

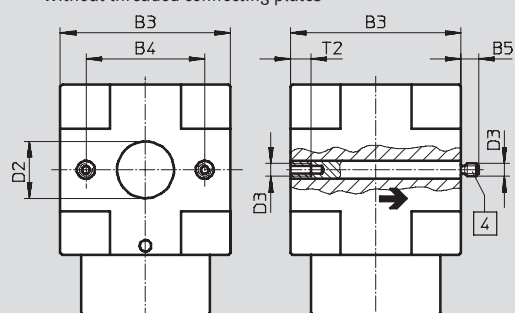

→ Flow direction

Type	B1	B2	B3	B4	B5	D1	D2 Ø	D3	D6	H1	H2	L1	L2	T1	T2
Mini															
HEL-1/8-D-MINI	64	52	40	30	-	G1/8	-	M4	30	20	11	66	16	7	-
HEL-1/4-D-MINI	70	-	-	-	-	G3/8	-	-	-	-	-	-	-	-	-
HEL-3/8-D-MINI	-	-	-	-	5.8	-	11	-	-	-	-	-	-	-	10
HEL-D-MINI	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Midi															
HEL-1/4-D-MIDI	85	70	55	43	-	G1/4	-	M5	50	32	22	77	22	8	-
HEL-3/8-D-MIDI	-	-	-	-	-	G3/8	-	-	-	-	-	-	-	-	-
HEL-1/2-D-MIDI	-	-	-	-	-	G1/2	-	-	-	-	-	-	-	-	-
HEL-3/4-D-MIDI	-	-	-	-	-	G3/4	-	-	-	-	-	-	-	-	-
HEL-D-MIDI	-	-	-	-	6.8	-	24	-	-	-	-	-	-	-	11
Maxi															
HEL-1/2-D-MAXI	96	80	66	46	-	G1/2	-	M5	50	32	22	89	23	8	-
HEL-3/4-D-MAXI	116	91	-	-	-	G3/4	-	-	-	40	-	-	-	-	-
HEL-1-D-MAXI	-	-	-	-	-	G1	-	-	-	-	-	-	-	-	-
HEL-D-MAXI	-	-	-	-	6.8	-	30	-	-	-	-	-	-	-	11

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start valves HEL, D series, metal design

Technical data

FESTO

Ordering data		
Gradual pressure build-up, 2/2-way valve, operating pressure 3 ... 16 bar, normally closed		
Size	Part No.	Type
Without threaded connecting plates		
Mini	170690	HEL-D-MINI
Midi	170691	HEL-D-MIDI
Maxi	170692	HEL-D-MAXI


Ordering data			
Gradual pressure build-up, 2/2-way valve, operating pressure 3 ... 16 bar, normally closed			
Size	Connection	Part No.	Type
With threaded connecting plates			
Mini	G1/8	165076	HEL-1/8-D-MINI
	G1/4	165077	HEL-1/4-D-MINI
	G3/8	165078	HEL-3/8-D-MINI
Midi	G1/4	186521	HEL-1/4-D-MIDI
	G3/8	165079	HEL-3/8-D-MIDI
	G1/2	165080	HEL-1/2-D-MIDI
	G3/4	165081	HEL-3/4-D-MIDI
Maxi	G1/2	186522	HEL-1/2-D-MAXI
	G3/4	165082	HEL-3/4-D-MAXI
	G1	165083	HEL-1-D-MAXI

On-off/soft-start valves HE/HEE/HEP/HEL, D series

FESTO

Accessories

Ordering data – Plug socket MSSD				Technical data → Internet: mssd	
	Operating voltage range	Electrical connection	Type of mounting cable connection	Part No.	Type
	≤ 250 V AC/DC	3-pin	Clamping screws	151687	MSSD-EB
		4-pin	Insulation displacement technology	192745	MSSD-EB-S-M14

Ordering data – Plug socket with cable KMEB					Technical data → Internet: kmeb	
	Operating voltage range	Electrical connection	Switching status display	Cable length [m]	Part No.	Type
	24 V DC	3-pin	LED	2.5	151688	KMEB-1-24-2,5-LED
				5	151689	KMEB-1-24-5-LED
				10	193457	KMEB-1-24-10-LED
	230 V AC	3-pin	–	2.5	151690	KMEB-1-230AC-2,5
				5	151691	KMEB-1-230AC-5

Ordering data – Illuminating seal MEB-LD			Technical data → Internet: meb	
	Description	Operating voltage range	Part No.	Type
	for plug socket with cable KMEB and plug socket MSSD-EB	12 ... 24 V DC	151717	MEB-LD-12-24DC
		230 V DC/AC ±10%	151718	MEB-LD-230AC

Ordering data – Silencer U		Technical data → Internet: u	
	Pneumatic connection	Part No.	Type
	G1/8	6841	U-1/8-B
	G1/4	6842	U-1/4-B
	G3/8	6843	U-3/8-B
	G1/2	6844	U-1/2-B
	G3/4	6845	U-3/4-B
	G1	151990	U-1-B

Ordering data – Padlock LRVS-D		
	Weight [g]	Part No. Type
	120	193786 LRVS-D

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com