


Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

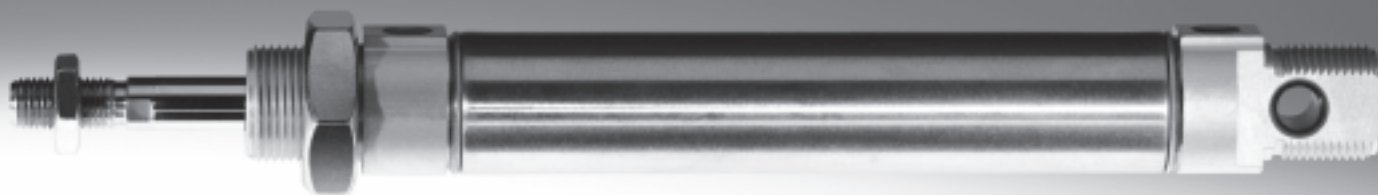

New **DSNUP/bellows DADB/cushioning PPS**

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

Key features

FESTO

At a glance



ISO 6432
DIN ISO 6432



- Round cylinders with piston diameters from 8 to 25 mm conform to ISO 6432, DIN ISO 6432. Variants are based on these standards
- The series is not repairable
- Stainless steel piston rod
- The cap is swaged onto the barrel

Wide choice of variants

DSNU-...

- Cylinder barrel made of stainless steel
- Bearing and end caps made of wrought aluminium alloy



DSNUP-...

- Cylinder barrel made of wrought aluminium alloy
- Bearing and end caps made of polyamide
- Cost optimised



DSNU/ESNU-...MA

- Threaded bearing cap
- Short end cap with axial supply port



DSNU-...MQ

- Threaded bearing cap
- Short end cap with lateral supply port



DSNU-...MH

- Direct mounting on bearing cap
- Short end cap with lateral supply port



DSNU-...KP

- With clamping unit



DSNU-...Q

- With square piston rod



Cushioning types

Cushioning P

Mode of operation

- The drive is fitted with flexible polymer end position cushioning

Application

- Small loads
- Low speeds
- Low impact energy

Advantages

- No adjustment required
- Time-saving

Cushioning PPS

- The drive is fitted with self-adjusting end position cushioning

- Small to medium loads
- Low to medium speeds
- Medium impact energy

- No adjustment required
- Time-saving
- Powerful

Cushioning PPV

- The drive is fitted with adjustable end position cushioning

- Medium to large loads
- High speeds
- High impact energy

- Very powerful

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Key features

Additional variants		
Symbol	Key features	Description
	S2 Through piston rod	For working at both ends with the same force in the advance and return stroke, for attaching external stops
	S6 Heat resistant seals	Temperature resistance up to max. 120 °C
	S10 Constant (slow speed) operation at low piston speeds	Suitable for slow stroke movements at a constant, stick-slip-free speed over the full stroke of the cylinder. Seal contains silicone grease (not free of paint-wetting impairment substances)
	S11 Low friction	The special seals considerably reduce system wear. This corresponds to a considerably lower response pressure. Seal contains silicone grease (not free of paint-wetting impairment substances)
	K2 Extended male piston rod thread	–
	K3 Female piston rod thread	–
	K5 Special thread on piston rod	Metric standard thread to ISO
	K6 Shortened male piston rod thread	–
	K8 Extended piston rod	–
	R3 High corrosion protection	All external cylinder surfaces comply with corrosion resistance class 3 to Festo standard 940 070. The piston rod is made from corrosion and acid resistant steel

Longer service life with bellows kit DADB



The bellows kit is a leak-free system. To prevent unwanted media from being drawn in, the supply and exhaust air of the kit must be ducted via a venting hole in the connection section **1**.








The kit protects the piston rod, seal and bearing against a wide variety of media, for example:

- dust
- chippings
- oil
- grease
- fuel

Standard cylinders DSNU/DSNUP/DSN, ISO 6432

Product range overview

FESTO

Function	Version	Piston Ø	Stroke	Variable stroke ¹⁾	Piston rod					
					Through	Extended	Male thread			Female thread
							Extended	Shortened	Special thread	
		[mm]	[mm]	[mm]	S2	K8	K2	K6	K5	K3
Double-acting	Basic version with position sensing (cylinder barrel made of stainless steel)									
		8, 10	10, 25, 40, 50,	1 ... 100	■	■	■	■	■	■
		12, 16	80, 100, 125,	1 ... 200						
		20	160, 200, 250,	1 ... 320						
		25	300, 320, 400, 500	1 ... 500						
	Basic version with or without position sensing (cylinder barrel made of aluminium)									
		16	25, 50, 100	2)	-	-	-	-	-	-
		20								
		25								
	Protected against rotation									
		12, 16	-	5 ... 160	■	■	■	■	■	■
		20	-	5 ... 200						
		25	-	5 ... 250						
	Lateral air connection									
		8, 10	-	1 ... 100	-	■	■	■	■	■
		12, 16	-	1 ... 200						
		20	-	1 ... 320						
		25	-	1 ... 500						
	Axial air connection									
		8, 10	-	1 ... 100	-	■	■	■	■	■
		12, 16	-	1 ... 200						
		20	-	1 ... 320						
		25	-	1 ... 500						
Direct mounting										
	8, 10	-	1 ... 100	-	■	■	■	■	■	
	12, 16	-	1 ... 200							
	20	-	1 ... 320							
	25	-	1 ... 500							
Basic version without position sensing										
	8, 10	10, 25, 40, 50,	1 ... 100	■	-	-	-	-	-	
	12, 16	80, 100, 125,	1 ... 200							
	20	160, 200, 250,	1 ... 320							
	25	300, 320, 400, 500	1 ... 500							

1) Cylinders with position sensing require a minimum stroke of 10 mm to ensure reliable sensing

2) Variable stroke on request

Standard cylinders DSNU/DSNUP/DSN, ISO 6432

Product range overview




Version	Cushioning			Position sensing	Clamping unit	Heat-resistant seal	Slow speed (constant motion operation)	Low friction	Corrosion protection	→ Page/Internet
	Fixed	Adjustable Ø 16 and above PPV ²⁾	Self-adjusting Ø 16 and above PPS							
	P			A	KP	S6	S10	S11	R3	
Basic version with position sensing (cylinder barrel made of stainless steel)										
DSNU	■	■	■	■	■	■	■	■	■	12
Basic version with or without position sensing (cylinder barrel made of aluminium)										
DSNUP	■	–	–	■	–	–	–	–	–	21
Protected against rotation										
DSNU-Q	■ Ø 12	■ Ø 16 ... 25	–	■	■	–	–	–	■ Ø 12 ... 25	24
Lateral air connection										
DSNU-MQ	■	■	■	■	■	■	–	–	■	12
Axial air connection										
DSNU-MA	■	–	–	■	■	■	–	–	■	12
Direct mounting										
DSNU-MH	■	■	–	■	–	■	–	–	■	12
Basic version without position sensing										
DSN	■	■	–	–	–	–	–	–	–	44

2) In the modular product system from Ø 12 mm

Standard cylinders ESN/ESN, ISO 6432

Product range overview

FESTO

Function	Version	PistonØ [mm]	Stroke [mm]	Variable stroke ¹⁾ [mm]	Cushioning Fixed P	Position sensing A
Single-actin g	Basic version with position sensing					
	ESNU 	8, 10, 12, 16, 20, 25	10, 25, 50	1 ... 50	■	■
	Axial air connection					
	ESNU-MA 	8, 10, 12, 16, 20, 25	–	1 ... 50	■	■
	Basic version without position sensing					
	ESN 	8, 10, 12, 16, 20, 25	10, 25, 50	1 ... 50	■	–

1) Cylinders with position sensing require a minimum stroke of 10 mm to ensure reliable sensing

Standard cylinders ESNU/ESN, ISO 6432

Product range overview


FESTO

Version	Piston rod					→ Page/Internet
	Extended	Male thread			Female thread	
		Extended	Shortened	Special thread		
	K8	K2	K6	K5	K3	
Basic version with position sensing						
ESNU						36
Axial air connection						
ESNU-MA						36
Basic version without position sensing						
ESN	—	—	—	—	—	50

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

Peripherals overview

FESTO

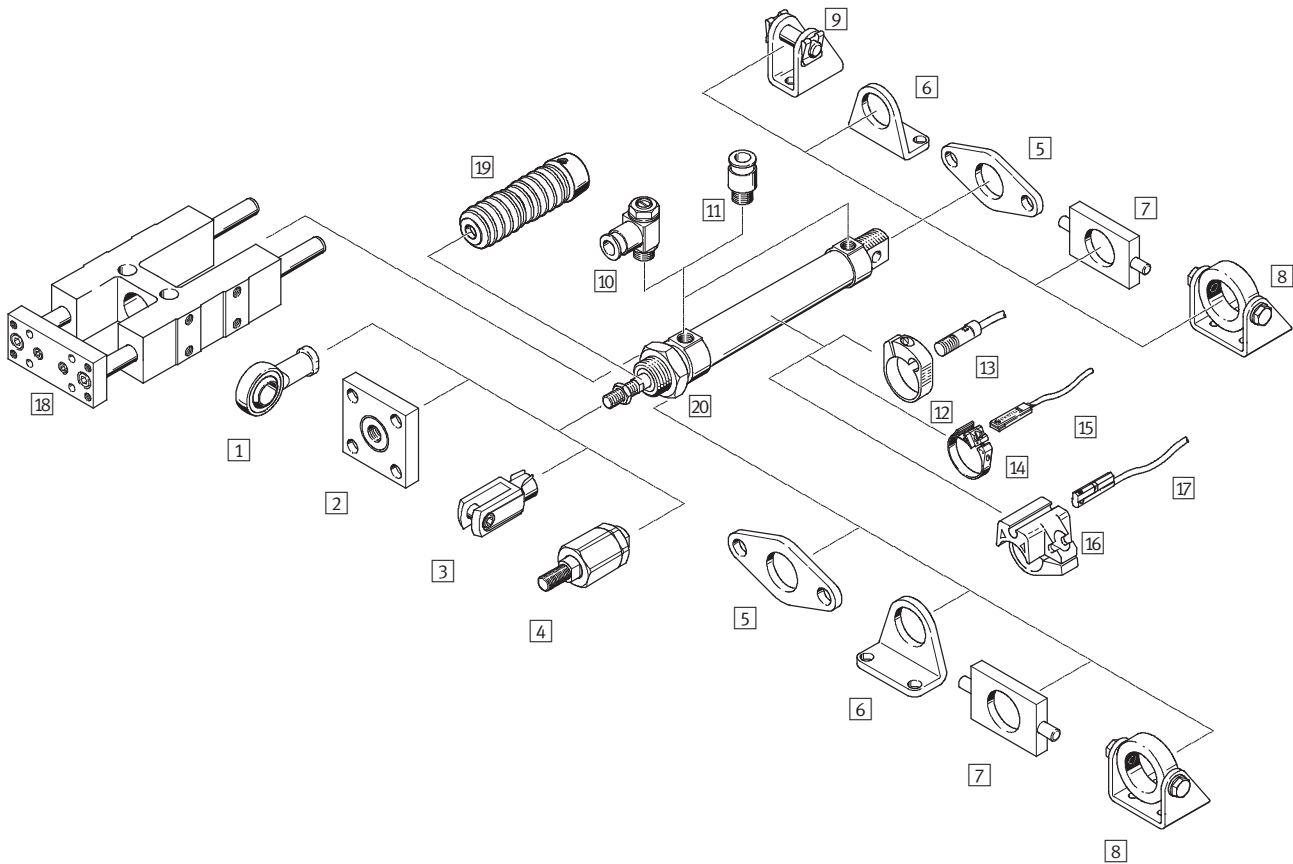


Variants


DSNU-MQ

DSNU-MA


DSNU-MH



DSNU-Q



DSNU-KP






Mounting options

Mounting front and rear

Mounting with hex nut

Swivel mounting







Installation variants with mounting attachments

Foot mounting (for short strokes)

Foot mounting

Flange mounting

Swivel mounting



Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Peripherals overview

Mounting attachments and accessories									
	DSNU/ESNU	DSNUP	DSNU/ESNU	DSNU			DSNU-Q	DSN/ESN	→ Page/Internet
			MA	MQ	MH	KP			
1 Rod eye SGS/CRSGS	■	■	■	■	■	■	■	■	57
2 Coupling piece KSG/KSZ	■	■	■	■	■	■	■	■	57
3 Rod clevis SG/CRSG	■	■	■	■	■	■	■	■	57
4 Self-aligning rod coupler FK	■	■	■	■	■	■	■	■	57
5 Flange mounting FBN/CRFBN	■	■	■	■	–	■	■	■	55
6 Foot mounting HBN/CRHBN	■	■	■	■	–	■	■	■	54
7 Swivel mounting ¹⁾ WBN	■	■	■	■	–	■	■	■	56
8 Swivel mounting ¹⁾ SBN	■	–	■	■	–	■	■	■	55
9 Clevis foot LBN/CRLBN	■	■	–	–	–	■	■	■	56
10 One-way flow control valve ²⁾ GRLA/GRLZ/CRGRLA	■	■	■	■	■	■	■	■	65
11 Push-in fitting ²⁾ QS	■	■	■	■	■	■	■	■	quick star
12 Mounting kit SMBR/CRSMBR	■	–	■	■	■	■	■	–	62
13 Proximity sensor SMEO/SMT0/CRSMEO-4	■	–	■	■	■	■	■	–	62
14 Mounting kit SMBR-8	■	■	■	■	■	■	■	–	63
15 Proximity sensor SME/SMT-8	■	■	■	■	■	■	■	–	63
16 Mounting kit SMBR-10	■	–	■	■	■	■	■	–	64
17 Proximity sensor SME/SMT-10	■	–	■	■	■	■	■	–	64
18 Guide unit FEN	■	–	■	■	–	–	–	■	57
19 Bellows kit ³⁾ DADB	■	–	■	■	–	–	–	–	58
20 Hex nut MSK	■	–	■	■	■	■	■	■	57

Note

- 1) Cannot be used on the bearing cap in combination with bellows kit DADB.
 - 2) Only push-in fittings or one-way flow control valves with cylindrical connecting thread (M or G thread) may be used for the compressed air ports in conjunction with the DSNUP.
 - 3) The bellows kit protects the cylinder (piston rod, seal and bearings) against a wide range of media and thus prevents premature wear.
- It can only be used in combination with an extended piston rod (K8).

- 1 - Types DSNU-...-CT/ESNU-...-CT discontinued
Available up until 2010

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Type codes

		DSNU	–	25	–	80	–	PPV	–	A	–	MQ
Type												
Double-acting												
DSNU/DSN	Standard cylinder											
Single-acting												
ESNU/ESN	Standard cylinder											
Piston Ø [mm]												
Stroke [mm]												
Cushioning												
P	Flexible cushioning rings/pads at both ends											
PPV	Pneumatic cushioning, adjustable at both ends											
PPS	Pneumatic cushioning, self-adjusting at both ends											
Position sensing												
A	Via proximity sensor											
Variant												
MQ	Lateral air connection											
MA	Axial air connection											
MH	With mounting flange on bearing cap											
CT	Free of copper, PTFE and silicone											

Modular product system

Individually configurable

DSNU → 32

ESNU → 42

- Square piston rod (protection against rotation)
- Through piston rod (piston rod type)
- Extended male piston rod thread
- Male piston rod thread, shortened at one end
- Female piston rod thread (female thread)
- Special piston rod thread (special thread)
- Extended piston rod at front
- Clamping unit on the piston rod
- Heat-resistant seals for temperatures up to 120 °C (temperature resistance)
- Slow speed (constant motion at low piston rod speeds)
- Low friction
- All external cylinder surfaces conform to corrosion resistance class CRC 3 (corrosion protection)

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432



Type codes

		DSNUP	–	20	–	50	–	P	–	A
Type										
Double-acting										
DSNUP	Standard cylinder									
Piston Ø [mm]										
Stroke [mm]										
Cushioning										
P	Flexible cushioning rings/pads at both ends									
Position sensing										
A	Via proximity sensor									



- 1 - Types DSNU-...-CT/ESNU-...-CT discontinued
Available up until 2010

Standard cylinders DSNU, ISO 6432

Technical data

FESTO

Function



Ø - Diameter
8 ... 25 mm


┌ - Stroke length
1 ... 500 mm

Variant

CT-free

Additional variants

➔ 17

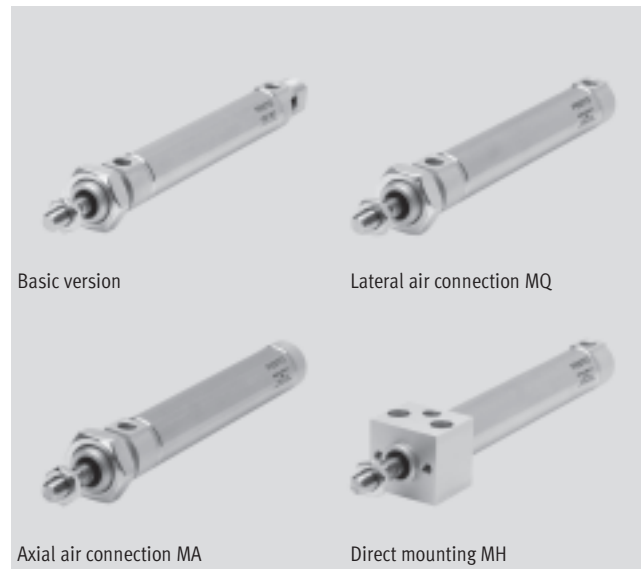

General technical data						
Piston Ø	8	10	12	16	20	25
Pneumatic connection	M5	M5	M5	M5	G1/8	G1/8
Piston rod thread	M4	M4	M6	M6	M8	M10x1.25
Constructional design	Piston					
	Piston rod					
	Cylinder barrel					
Cushioning	P	Flexible cushioning rings/pads at both ends				
	PPV	Adjustable cushioning at both ends				
	PPS	Self-adjusting cushioning at both ends				
Cushioning length	PPV	[mm]	9	12	15	17
	PPS	[mm]	12	15	17	
Position sensing	Via proximity sensor					
Type of mounting	Direct mounting (MH variant only)					
	Via accessories					
Mounting position	Any					

Note: This product conforms to ISO 1179-1 and ISO 228-1

Operating conditions						
Piston Ø	8	10	12	16	20	25
Operating medium	Filtered compressed air, lubricated or unlubricated					
Operating pressure	Basic version	[bar]	1.5 ... 10 ¹⁾	1 ... 10		
	S10		1.5 ... 10	1 ... 10		
	S11		0.45 ... 10	0.3 ... 10		

1) With DSNU-12-...-PPV (pneumatic cushioning adjustable at both ends); 2 ... 10 bar

Ambient conditions						
Standard cylinder	Basic version	CT	S6	S10	S11	R3
Ambient temperature ¹⁾	[°C]	-20 ... +80	0 ... +120	+5 ... +80		-20 ... +80
Corrosion resistance class CRC ²⁾		2	2	2	2	3
ATEX	Specified types ➔ www.festo.com					

1) Note operating range of proximity sensors.

2) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 3 as per Festo standard 940 070

Components requiring higher corrosion resistance. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface.

Standard cylinders DSNU, ISO 6432

FESTO

Technical data

Speed [mm/s]			
Piston Ø	16	20	25
Speed with stick-slip-free operation, horizontal, without load, at 6 bar	10 ... 100		
Minimum speed, advancing S10	2.7	5.3	<1 ¹⁾
Minimum speed, retracting S11	3.2	4.7	<1 ¹⁾


1) Measurements of less than 1 mm/s were not conducted

Force [N] and impact energy [J]						
Piston Ø	8	10	12	16	20	25
Theoretical force at 6 bar, advancing	30	47	68	121	189	295
Theoretical force at 6 bar, retracting	23	40	51	104	158	247
Max. impact energy at the end positions for flexible cushioning elements ¹⁾	0.03	0.05	0.07	0.15	0.20	0.30

1) The values are reduced by approx. 50% at an ambient temperature of 80 °C


Average piston speed v as a function of applied load m in combination with PPS cushionings

Piston Ø 16

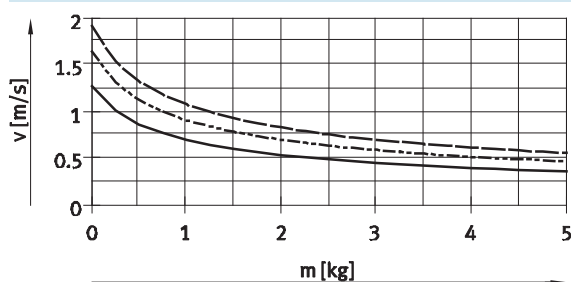


— DSNU-16-50
 - - - DSNU-16-100
 - · - DSNU-16-200

Piston Ø 20

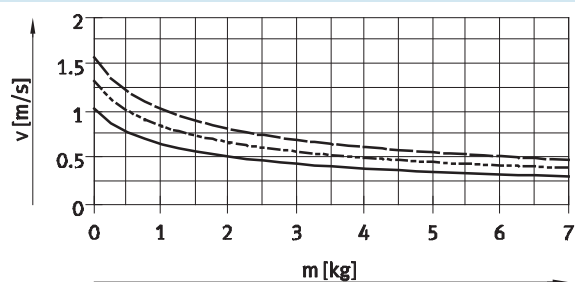

— DSNU-20-50
 - - - DSNU-20-100
 - · - DSNU-20-200

Piston Ø 25

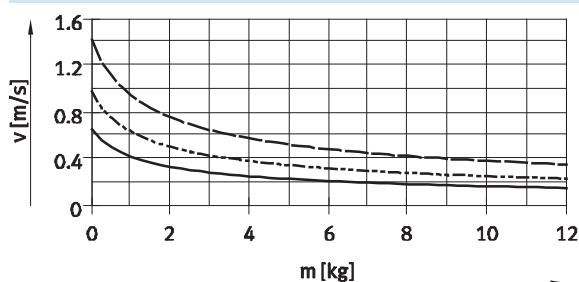

— DSNU-25-50
 - - - DSNU-25-100
 - · - DSNU-25-200

Note

Average piston speed
 = stroke/movement time

Note

Design software
 for flexible cushioning elements
 → ProDrive

Additional graphs
 for PPS cushioning
 → www.festo.com

Design software
 for PPV cushioning
 → ProDrive


Standard cylinders DSNU, ISO 6432

Technical data


FESTO

Weight [g]						
Piston Ø	8	10	12	16	20	25
Product weight with 0 mm stroke	34.6	37.3	75	89.9	186.8	238
Additional weight per 10 mm stroke	2.4	2.7	4	4.6	7.2	11


Max. lateral force F_q as a function of stroke length l



Basic version

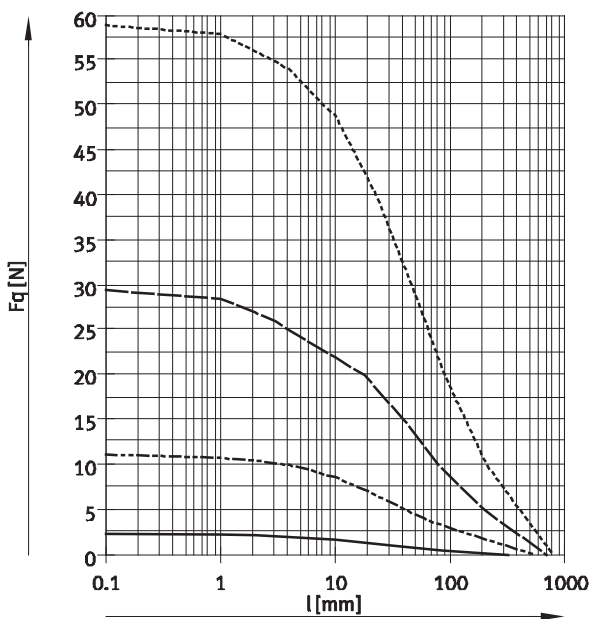


S2 – Through piston rod

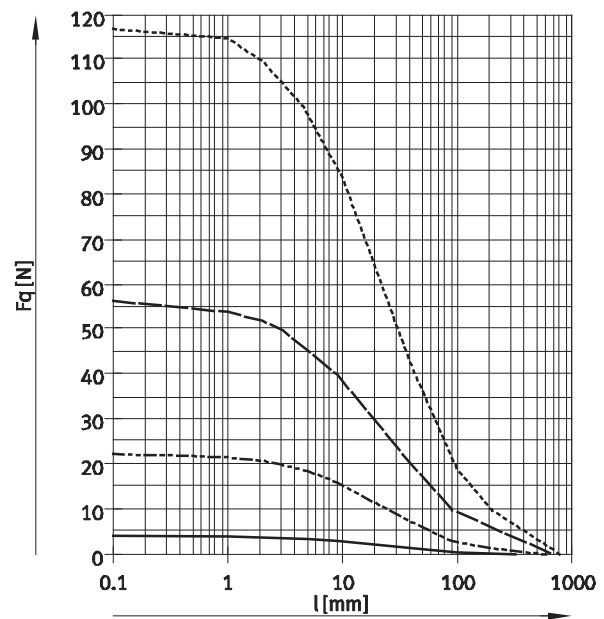

- Ø 8/10
- - - Ø 12/16
- · - Ø 20
- Ø 25

Materials

Sectional view

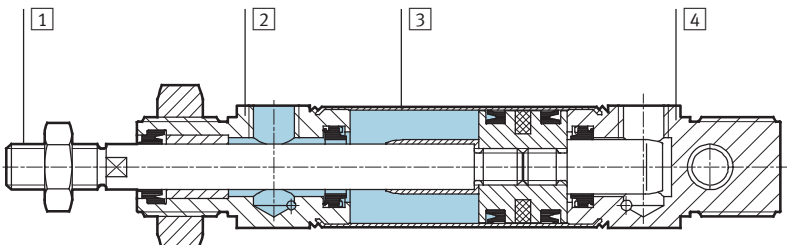

Standard cylinder		Basic version	R3	S6	S10	S11
1	Piston rod	High-alloy stainless steel				
2	Bearing cap	Anodised aluminium				
3	Cylinder barrel	High-alloy stainless steel				
4	End cap	Anodised aluminium				
–	Seals	Polyurethane, nitrile rubber		Fluoro elastomer		
	Note on materials	RoHS compliant				

Standard cylinders DSNU, ISO 6432


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Basic version

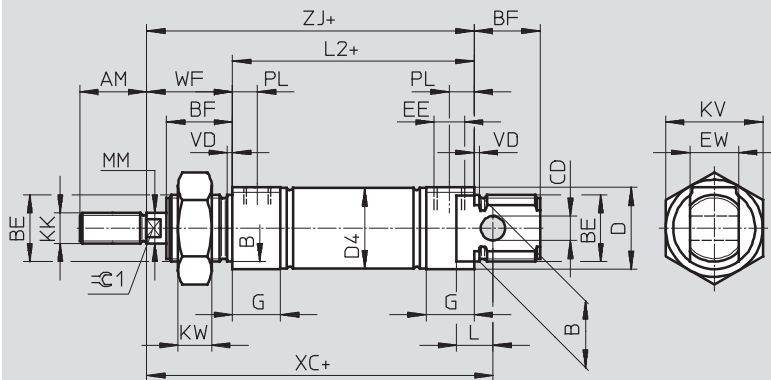

Note

Piston rod nut is not included in scope of delivery for Ø 8 ... 20.

+ = plus stroke length

Ø [mm]	AM	B Ø h9	BE	BF	CD Ø E10	D Ø	D4 Ø	EE	EW	G	KK	KV
8	12	12	M12x1.25	12	4	15	9.3	M5	8	10	M4	19
10							11.3					
12	16	16	M16x1.5	17	6	20	13.3		12		M6	24
16							17.3					
20	20	22	M22x1.5	20	8	27	21.3	G½	16	16	M8	32
25	22			22			26.5				M10x1.25	

Ø [mm]	KW	L	L2	MM Ø	PL	TO	VD	WF	XC ±1	ZJ	≈C1
8	6	6	46	4	6	18	2	16	64	62	–
10											
12	8	9	50	6		23		22	75	72	5
16			56		82			78			
20	11	12	68	8	8.2	31		24	95	92	7
25			69.5	10		28	104	97.5	9		

Note: This product conforms to ISO 1179-1 and ISO 228-1

Standard cylinders DSNU, ISO 6432

Technical data



FESTO

Dimensions


Download CAD Data → www.festo.com/us/cad

MQ – Lateral air connection

MA – Axial air connection

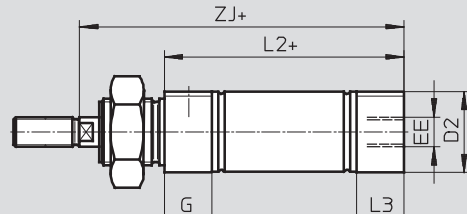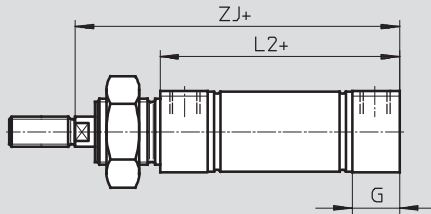

MH – With direct mounting

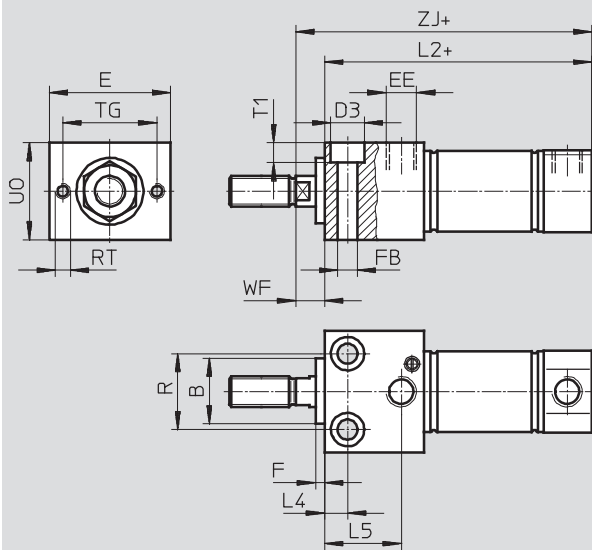

+ = plus stroke length

Ø [mm]	B Ø h9	D2 Ø	D3 Ø	E	EE	F	FB Ø	G	L2		
									-MQ	-MA	-MH
8	12	10.5	6	24	M5	3	3.4	10	46	43.6	53.5
10		12.5								43.1	53.8
12	16	14.5	8	30			4.5		50	47.7	62
16		17.5								56	53.7
20	22	21.7	10	40	G ¹ / ₈		5.5	16	68	66.5	81.5
25		26.7	11				6.6		69.5	68.5	86.2

Ø [mm]	L3	L4	L5	R	RT	TG	T1	UO	WF	ZJ		
										-MQ	-MA	-MH
8	7.6	5	14	12	M3	18	3.4	16	8	62	59.6	61.5
10	7.1										59.1	61.8
12	7.7	6	18.1	16	M4	23	4.5	22	10	72	69.7	72
16										78	75.7	77.8
20	14.5	7.5	22.4	22	M5	31	5.5	28		92	90.5	91.5
25	14		25.2	25			6.6	32		97.5	96.5	97.2

Note: This product conforms to ISO 1179-1 and ISO 228-1

Standard cylinders DSNU, ISO 6432


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

S2 – Through piston rod

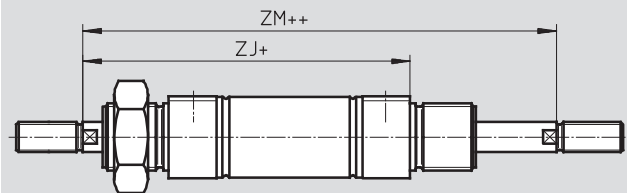


Note


The thread types at both piston rod ends are identical. In combination with variant Q, the left-hand piston rod end is square, the right-hand piston rod end round.

+ = plus stroke length
++ = plus 2x stroke length


K2 – Extended male piston rod thread




K6 – Shortened male piston rod thread




K3 – Female piston rod thread



K5 – Special thread on piston rod



K8 – Extended piston rod



Note

If variant K8 is required in combination with S2, the piston rod will only be extended on one side.

Ø [mm]	A1 max.	A2 max.	A3 max.	AM	AF	KF	KK		T4	WF	ZJ			ZM
							Basic thread	Special thread ¹⁾			-MQ	-MA	-MH	
8	15	50	4	12	–	–	M4	–	–	16	62	59.6	61.5	78.4
10					–	–		–	–			59.1	61.8	
12	20	100		16	–	–	M6	–	–	22	72	69.7	72	94
16					–	–		–	–		78	75.7	77.8	100
20	25	110	8	20	12	M4	M8	–	2	24	92	90.5	91.5	116
25	35	150		22		M6	M10x1.25	M10	2.6	28	97.5	96.5	97.2	125.5

1) The special threads are only available as male threads. The scope of delivery does not include a hex nut for the piston rod thread.

Standard cylinders DSNU, ISO 6432

Technical data

FESTO

Ordering data								
Type	Piston Ø	Stroke	P – Flexible cushioning rings/ pads at both ends A – With position sensing		PPV – Pneumatic cushioning, adjustable at both ends A – With position sensing			
	[mm]	[mm]	Part No.	Type	Part No.	Type		
Basic version								
	8	10	19 177	DSNU-8-10-P-A	–			
		25	19 178	DSNU-8-25-P-A				
		40	19 179	DSNU-8-40-P-A				
		50	19 180	DSNU-8-50-P-A				
		80	19 181	DSNU-8-80-P-A				
		100	19 182	DSNU-8-100-P-A				
	10	10	19 183	DSNU-10-10-P-A	–			
		25	19 184	DSNU-10-25-P-A				
		40	19 185	DSNU-10-40-P-A				
		50	19 186	DSNU-10-50-P-A				
		80	19 187	DSNU-10-80-P-A				
		100	19 188	DSNU-10-100-P-A				
	12	10	19 189	DSNU-12-10-P-A	–			
		25	19 190	DSNU-12-25-P-A				
		40	19 191	DSNU-12-40-P-A				
		50	19 192	DSNU-12-50-P-A				
		80	19 193	DSNU-12-80-P-A				
		100	19 194	DSNU-12-100-P-A				
		125	19 195	DSNU-12-125-P-A				
		160	19 196	DSNU-12-160-P-A				
	16	200	19 197	DSNU-12-200-P-A	–			
		10	19 198	DSNU-16-10-P-A				
		25	19 199	DSNU-16-25-P-A			33 973	DSNU-16-25-PPV-A
		40	19 200	DSNU-16-40-P-A			19 229	DSNU-16-40-PPV-A
		50	19 201	DSNU-16-50-P-A			19 230	DSNU-16-50-PPV-A
		80	19 202	DSNU-16-80-P-A			19 231	DSNU-16-80-PPV-A
		100	19 203	DSNU-16-100-P-A			19 232	DSNU-16-100-PPV-A
		125	19 204	DSNU-16-125-P-A			19 233	DSNU-16-125-PPV-A
		160	19 205	DSNU-16-160-P-A			19 234	DSNU-16-160-PPV-A
		200	19 206	DSNU-16-200-P-A			19 235	DSNU-16-200-PPV-A
	20	10	19 207	DSNU-20-10-P-A	–			
		25	19 208	DSNU-20-25-P-A				
		40	19 209	DSNU-20-40-P-A			33 974	DSNU-20-25-PPV-A
		50	19 210	DSNU-20-50-P-A			19 236	DSNU-20-40-PPV-A
		80	19 211	DSNU-20-80-P-A			19 237	DSNU-20-50-PPV-A
		100	19 212	DSNU-20-100-P-A			19 238	DSNU-20-80-PPV-A
		125	19 213	DSNU-20-125-P-A			19 239	DSNU-20-100-PPV-A
		160	19 214	DSNU-20-160-P-A			19 240	DSNU-20-125-PPV-A
		200	19 215	DSNU-20-200-P-A			19 241	DSNU-20-160-PPV-A
		250	19 216	DSNU-20-250-P-A			19 242	DSNU-20-200-PPV-A
		300	19 217	DSNU-20-300-P-A			19 243	DSNU-20-250-PPV-A
		320	34 718	DSNU-20-320-P-A			19 244	DSNU-20-300-PPV-A
							34 720	DSNU-20-320-PPV-A

Standard cylinders DSNU, ISO 6432

Technical data

FESTO

Ordering data					
Type	Piston Ø	Stroke	P – Flexible cushioning rings/ pads at both ends A – With position sensing		PPV – Pneumatic cushioning, adjustable at both ends A – With position sensing
	[mm]	[mm]	Part No.	Type	Part No. Type
Basic version					
	25	10	19 218	DSNU-25-10-P-A	–
		25	19 219	DSNU-25-25-P-A	33 975 DSNU-25-25-PPV-A
		40	19 220	DSNU-25-40-P-A	19 245 DSNU-25-40-PPV-A
		50	19 221	DSNU-25-50-P-A	19 246 DSNU-25-50-PPV-A
		80	19 222	DSNU-25-80-P-A	19 247 DSNU-25-80-PPV-A
		100	19 223	DSNU-25-100-P-A	19 248 DSNU-25-100-PPV-A
		125	19 224	DSNU-25-125-P-A	19 249 DSNU-25-125-PPV-A
		160	19 225	DSNU-25-160-P-A	19 250 DSNU-25-160-PPV-A
		200	19 226	DSNU-25-200-P-A	19 251 DSNU-25-200-PPV-A
		250	19 227	DSNU-25-250-P-A	19 252 DSNU-25-250-PPV-A
		300	19 228	DSNU-25-300-P-A	19 253 DSNU-25-300-PPV-A
		320	34 719	DSNU-25-320-P-A	34 721 DSNU-25-320-PPV-A
		400	35 191	DSNU-25-400-P-A	35 193 DSNU-25-400-PPV-A
		500	35 192	DSNU-25-500-P-A	35 194 DSNU-25-500-PPV-A

Ordering data					
Type	Piston Ø	Stroke	P – Flexible cushioning rings/ pads at both ends A – With position sensing		PPV – Pneumatic cushioning, adjustable at both ends A – With position sensing
	[mm]	[mm]	Part No.	Type	Part No. Type
Variable stroke lengths					
	8	10 ... 100	14 326	DSNU-8-...-P-A	–
	10	10 ... 100	14 325	DSNU-10-...-P-A	
	12	10 ... 200	14 324	DSNU-12-...-P-A	
	16	10 ... 200	14 323	DSNU-16-...-P-A	14 320 DSNU-16-...-PPV-A
	20	10 ... 320	14 328	DSNU-20-...-P-A	14 321 DSNU-20-...-PPV-A
	25	10 ... 500	14 327	DSNU-25-...-P-A	14 322 DSNU-25-...-PPV-A
Variable stroke lengths, free of copper, PTFE and silicone					
 CT-free	8	10 ... 100	170 121	DSNU-8-...-P-A-CT	–
	10	10 ... 100	170 122	DSNU-10-...-P-A-CT	
	12	10 ... 200	170 123	DSNU-12-...-P-A-CT	
	16	10 ... 200	170 124	DSNU-16-...-P-A-CT	170 127 DSNU-16-...-PPV-A-CT
	20	10 ... 320	170 125	DSNU-20-...-P-A-CT	170 128 DSNU-20-...-PPV-A-CT
	25	10 ... 500	170 126	DSNU-25-...-P-A-CT	170 129 DSNU-25-...-PPV-A-CT

Note

Additional variants can be configured and ordered via the DSNU product modules → 32.

Standard cylinders DSNU, ISO 6432

Technical data

FESTO

Ordering data						
Type	Piston Ø	Stroke	PPS – Pneumatic cushioning, self-adjustable at both ends Without position sensing		PPS – Pneumatic cushioning, self-adjustable at both ends A – With position sensing	
	[mm]	[mm]	Part No.	Type	Part No.	Type
Basic version						
	16	25	–		559 263	DSNU-16-25-PPS-A
		40	559 234	DSNU-16-40-PPS	559 264	DSNU-16-40-PPS-A
		50	559 235	DSNU-16-50-PPS	559 265	DSNU-16-50-PPS-A
		80	559 236	DSNU-16-80-PPS	559 266	DSNU-16-80-PPS-A
		100	559 237	DSNU-16-100-PPS	559 267	DSNU-16-100-PPS-A
		125	559 238	DSNU-16-125-PPS	559 268	DSNU-16-125-PPS-A
		160	559 239	DSNU-16-160-PPS	559 269	DSNU-16-160-PPS-A
		200	559 240	DSNU-16-200-PPS	559 270	DSNU-16-200-PPS-A
	20	25	–		559 271	DSNU-20-25-PPS-A
		40	559 241	DSNU-20-40-PPS	559 272	DSNU-20-40-PPS-A
		50	559 242	DSNU-20-50-PPS	559 273	DSNU-20-50-PPS-A
		80	559 243	DSNU-20-80-PPS	559 274	DSNU-20-80-PPS-A
		100	559 244	DSNU-20-100-PPS	559 275	DSNU-20-100-PPS-A
		125	559 245	DSNU-20-125-PPS	559 276	DSNU-20-125-PPS-A
		160	559 246	DSNU-20-160-PPS	559 277	DSNU-20-160-PPS-A
		200	559 247	DSNU-20-200-PPS	559 278	DSNU-20-200-PPS-A
		250	559 248	DSNU-20-250-PPS	559 279	DSNU-20-250-PPS-A
		300	559 249	DSNU-20-300-PPS	559 280	DSNU-20-300-PPS-A
		320	559 250	DSNU-20-320-PPS	559 281	DSNU-20-320-PPS-A
	25	25	–		559 282	DSNU-25-25-PPS-A
		40	559 251	DSNU-25-40-PPS	559 283	DSNU-25-40-PPS-A
		50	559 252	DSNU-25-50-PPS	559 284	DSNU-25-50-PPS-A
		80	559 253	DSNU-25-80-PPS	559 285	DSNU-25-80-PPS-A
		100	559 254	DSNU-25-100-PPS	559 286	DSNU-25-100-PPS-A
		125	559 255	DSNU-25-125-PPS	559 287	DSNU-25-125-PPS-A
		160	559 256	DSNU-25-160-PPS	559 288	DSNU-25-160-PPS-A
		200	559 257	DSNU-25-200-PPS	559 289	DSNU-25-200-PPS-A
		250	559 258	DSNU-25-250-PPS	559 290	DSNU-25-250-PPS-A
		300	559 269	DSNU-25-300-PPS	559 291	DSNU-25-300-PPS-A
		320	559 260	DSNU-25-320-PPS	559 292	DSNU-25-320-PPS-A
		400	559 261	DSNU-25-400-PPS	559 293	DSNU-25-400-PPS-A
		500	559 262	DSNU-25-500-PPS	559 294	DSNU-25-500-PPS-A


Note

Variable stroke lengths and additional variants can be configured and ordered via the DSNU product modules → 32.

Standard cylinders DSNUP, ISO 6432

Technical data

Function



-  - Diameter
16 ... 25 mm
-  - Stroke length
25 ... 100 mm



General technical data			
Piston Ø	16	20	25
Pneumatic connection	M5	G $\frac{1}{8}$	G $\frac{1}{8}$
Constructional design	Piston		
	Piston rod		
	Cylinder barrel		
Mode of operation	Double-acting		
Cushioning	Flexible cushioning rings/pads at both ends		
Position sensing	Via proximity sensor		
Type of mounting	Via accessories		
Mounting position	Any		

Operating and environmental conditions	
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure ¹⁾ [bar]	1 ... 8
Ambient temperature [°C]	-10 ... +60
Corrosion resistance class CRC ²⁾	2

1) Note operating range of proximity sensors

2) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Force [N] and impact energy [J]			
Piston Ø	16	20	25
Theoretical force at 6 bar, advancing	121	189	295
Theoretical force at 6 bar, retracting	104	158	247
Impact energy at end positions	0.15	0.20	0.30

Weight [g]			
Piston Ø	16	20	25
Product weight with 0 mm stroke	47	83	111
Additional weight per 10 mm stroke	4	6	8
Moving load at 0 mm stroke	23	44	71
Additional load per 10 mm stroke	2	4	6

Standard cylinders DSNUP, ISO 6432


Technical data

FESTO

Speed without applied load [m/s]			
Piston Ø	16	20	25
Advancing			
Minimum	0.015	0.02	0.015
Maximum	2.3	2.3	2.3
Retracting			
Minimum	0.015	0.02	0.015
Maximum	1.9	1.7	2.0


Materials

Sectional view

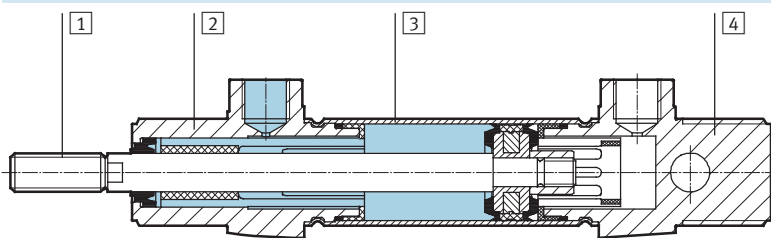


Standard cylinder		
1	Piston rod	High-alloy stainless steel
2	Bearing cap	Polyamide
3	Cylinder barrel	Wrought aluminium alloy
4	End cap	Polyamide
–	Seals	Polyurethane, nitrile rubber
Note on materials		RoHS-compliant

Permissible lateral force F_q as a function of stroke length l

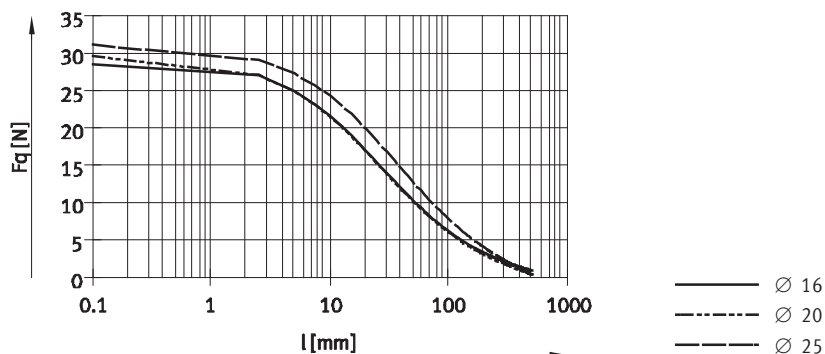


Permissible piston rod displacement f as a function of stroke length l

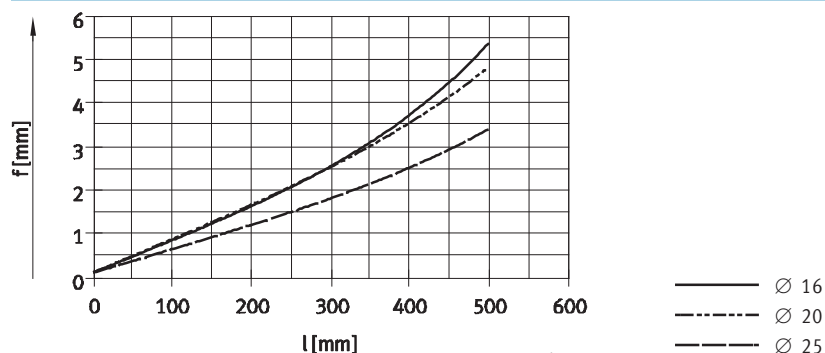

Standard cylinders DSNUP, ISO 6432

Technical data

Dimensions

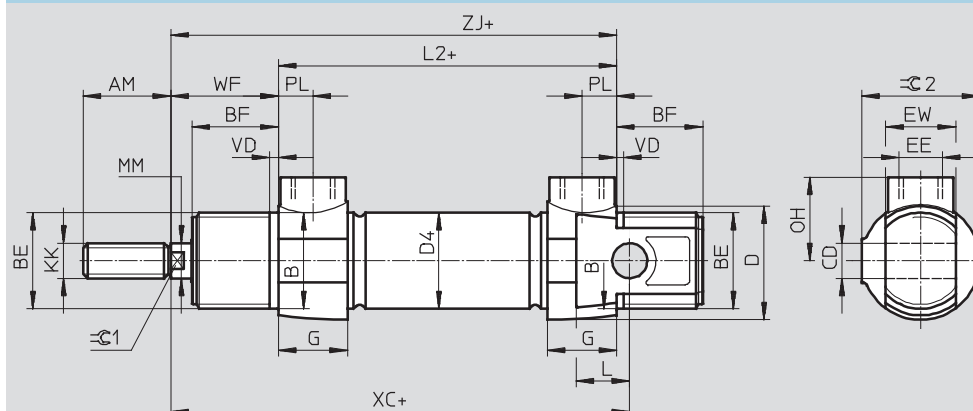Download CAD Data → www.festo.com/us/cad


Note

For the compressed air ports only push-in fittings or one-way flow control valves with cylindrical connecting thread (M or G thread) may be used.
Piston rod nut is not included in scope of delivery for Ø 16/20.

Ø	AM	B	BE	BF	CD	D	D4	EE
[mm]		Ø h9			Ø H9	Ø	Ø	
16	16	16	M16x1.5	17	6	20	18	M5
20	20	22	M22x1.5	20	8	27	22	G ¹ / ₈
25	22	22	M22x1.5	22	8	27	27	G ¹ / ₈

Ø	EW	G	KK	L	L2	MM	OH	PL	VD
[mm]						Ø			
16	12	10	M6	8	56	6	14	4.9	2
20	16	16	M8	12	68	8	19	7.9	2
25	16	16	M10x1.25	12	70	10	19	7.9	2

Ø	WF	XC	ZJ	≈ 1	≈ 2	Max. tightening torque of thread [Nm]	
[mm]		±1				BE ¹⁾	EE
16	22	82	78	5	19	12/8	1.3
20	24	95	92	7	27	22/15	6
25	28	104	98	9	27	22/15	6

1) Bearing cap/end cap

Note

Variable strokes on request.

Ordering data



Piston Ø [mm]	Stroke [mm]	Part No.	Type
16	25	551 668	DSNUP-16-25-P-A
	50	551 669	DSNUP-16-50-P-A
	100	551 670	DSNUP-16-100-P-A
20	25	551 671	DSNUP-20-25-P-A
	50	551 672	DSNUP-20-50-P-A
	100	551 673	DSNUP-20-100-P-A
25	25	551 674	DSNUP-25-25-P-A
	50	551 675	DSNUP-25-50-P-A
	100	551 676	DSNUP-25-100-P-A

Standard cylinders DSNU-Q, protected against rotation

FESTO

Technical data

Function



Ø - Diameter
12 ... 25 mm

└ - Stroke length
1 ... 250 mm



General technical data				
Piston Ø	12	16	20	25
Pneumatic connection	M5	M5	G $\frac{1}{8}$	G $\frac{1}{8}$
Piston rod thread	M6	M6	M8	M10x1.25
Operating medium	Compressed air, filtered, lubricated or unlubricated			
Constructional design	Piston Protected against rotation with square piston rod			
Max. torque at the piston rod [Nm]	0.10	0.10	0.20	0.45
Cushioning	Flexible cushioning rings/pads at both ends Adjustable cushioning at both ends			
Cushioning length (PPV) [mm]	–	12	15	17
Position sensing	Via proximity sensor			
Type of mounting	Via accessories			
Mounting position	Any			

Note: This product conforms to ISO 1179-1 and ISO 228-1

Operating conditions				
Piston Ø	12	16	20	25
Operating medium	Filtered compressed air, lubricated or unlubricated			
Operating pressure [bar]	1.5 ... 10 ¹⁾	1 ... 10		

1) With DSNU-12- ... -Q- PPV (pneumatic cushioning adjustable at both ends); 2 ... 10 bar

Ambient conditions		
Standard cylinder	Basic version	R3
Ambient temperature ¹⁾ [°C]	–20 ... +80	
Corrosion resistance class CRC ²⁾	2	3

1) Note operating range of proximity sensors.

2) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 3 as per Festo standard 940 070

Components requiring higher corrosion resistance. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface.

Standard cylinders DSNU-Q, protected against rotation

FESTO

Technical data


Forces [N] and impact energy [J]				
Piston Ø	12	16	20	25
Theoretical force at 6 bar, advancing	68	121	189	295
Theoretical force at 6 bar, retracting	51	104	158	247
Max. impact energy at the end positions for flexible cushioning elements ¹⁾	0.07	0.15	0.20	0.30

1) The values are reduced by approx. 50% at an ambient temperature of 80 °C

Weight [g]				
Piston Ø	12	16	20	25
Product weight with 0 mm stroke	80	110	215	275
Additional weight per 10 mm stroke	4.1	4.7	7.1	10.9

Materials

Sectional view

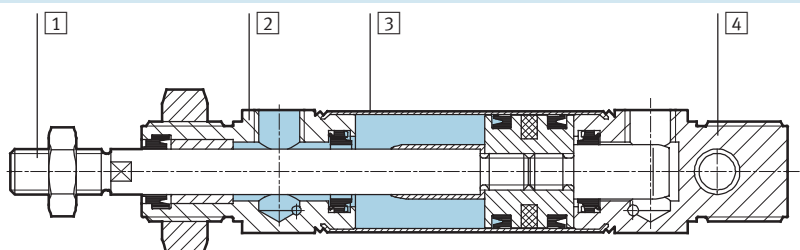

Standard cylinder		
1	Piston rod	High-alloy stainless steel
2	Bearing cap	Anodised aluminium
3	Cylinder barrel	High-alloy stainless steel
4	End cap	Anodised aluminium
–	Seals	Polyurethane, nitrile rubber

Standard cylinders DSNU-Q, protected against rotation


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Basic version

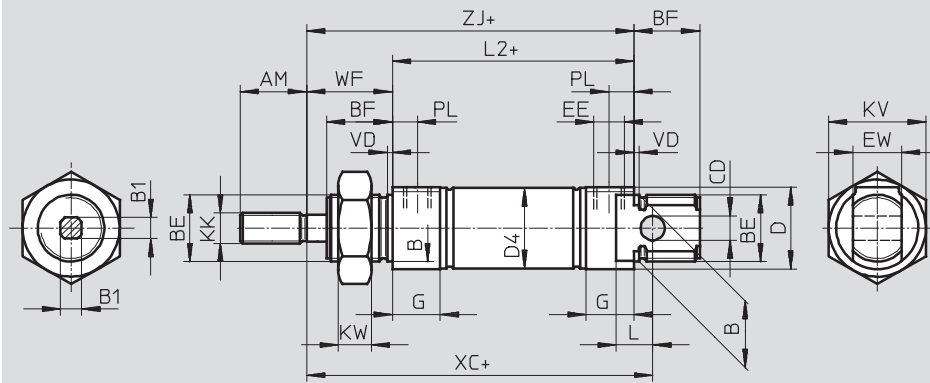

Note

Piston rod nut is not included in scope of delivery for Ø 12 ... 20.

+ = plus stroke length

Ø [mm]	AM	B Ø h9	B1 □	BE	BF	CD Ø E10	D Ø	D4 Ø	EE	EW
12	16	16	5.5	M16x1.5	17	6	20	13.3	M5	12
16								17.3		
20	22	22	7	M22x1.5	20	8	27	21.3	G1/8	16
25								26.5		

Ø [mm]	G	KK	KV	KW	L	L2	PL	VD	WF	XC ±1	ZJ
12	10	M6	24	8	9	50	6	2	22	75	72
16						56				82	78
20	16	M8	32	11	12	68	8.2		24	95	92
25		M10x1.25				69.5			28	104	97.5



Note: This product conforms to ISO 1179-1 and ISO 228-1

Standard cylinders DSNU-KP, with clamping unit

FESTO

Technical data

Function



⌀ - Diameter
8 ... 25 mm

└ - Stroke length
1 ... 500 mm

Note

Additional measures are required for use in safety-related applications; in Europe, for example, the standards listed under the EC Machinery Directive must be observed. Without additional measures in accordance with statutory minimum requirements, the product is not suitable for use in safety-related sections of control systems.



General technical data								
Piston Ø		8	10	12	16	20	25	
Pneumatic connection		M5	M5	M5	M5	G¼	G¼	
Piston rod thread		M4	M4	M6	M6	M8	M10x1.25	
Constructional design		Piston						
		Piston rod						
		Cylinder barrel						
Cushioning	P	Flexible cushioning rings/pads at both ends						
	PPV	–			Pneumatic cushioning, adjustable at both ends			
	PPS	–			Self-adjusting cushioning at both ends			
Cushioning length	PPV	[mm]	–		9	12	15	17
	PPS	[mm]	–			12	15	17
Position sensing		Via proximity sensor						
Type of mounting		Via through-holes						
		Via accessories						
Mounting position		Any						
Holding force of the clamping unit	[N]	80	80	180	180	350	350	
Max. axial backlash with clamped piston rod without load	[mm]	0.2			0.3			0.5
Pneumatic connection of the clamping unit		M5						

Note: This product conforms to ISO 1179-1 and ISO 228-1

Operating conditions						
Piston ⌀	8	10	12	16	20	25
Operating medium	Filtered compressed air, lubricated or unlubricated					
Operating pressure [bar]	3 ... 10					

Ambient conditions		
Standard cylinder	Basic version	R3
Ambient temperature ¹⁾ [°C]	–10 ... +80	
Corrosion resistance class CRC ²⁾	2	3

1) Note operating range of proximity sensors.

2) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 3 as per Festo standard 940 070

Components requiring higher corrosion resistance. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface.

Standard cylinders DSNU-KP, with clamping unit

FESTO


Technical data

Force [N] and impact energy [J]						
Piston Ø	8	10	12	16	20	25
Theoretical force at 6 bar, advancing	30	47	68	121	189	295
Theoretical force at 6 bar, retracting	23	40	51	104	158	247
Max. impact energy at the end positions for flexible cushioning elements ¹⁾	0.03	0.05	0.07	0.15	0.20	0.30

1) The values are reduced by approx. 50% at an ambient temperature of 80 °C


Average piston speed v as a function of applied load m in combination with cushioning PPS

Piston Ø 16

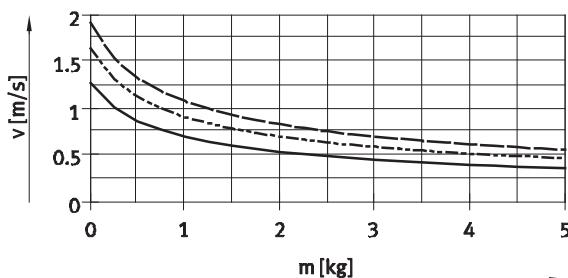


— DSNU-16-50
 - - - DSNU-16-100
 - · - DSNU-16-200

Piston Ø 20

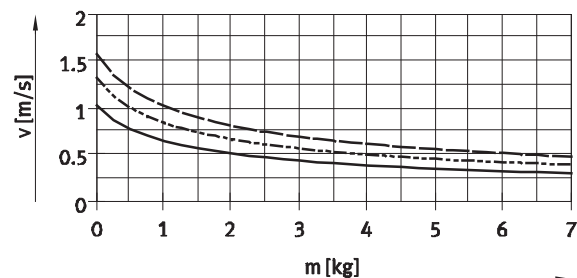

— DSNU-20-50
 - - - DSNU-20-100
 - · - DSNU-20-200

Piston Ø 25

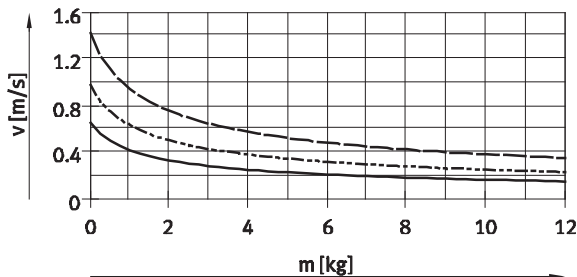

— DSNU-25-50
 - - - DSNU-25-100
 - · - DSNU-25-200

Note

Average piston speed
 = stroke/movement time

Note

Design software
 for flexible cushioning elements
 → ProDrive

Additional graphs
 for PPS cushioning
 → www.festo.com

Design software
 for PPV cushioning
 → ProDrive


Weight [g]						
Piston Ø	8	10	12	16	20	25
Product weight with 0 mm stroke	97.6	100.3	193	207.9	393.8	456
Additional weight per 10 mm stroke	2.4	2.7	4	4.6	7.2	11

Standard cylinders DSNU-KP, with clamping unit


FESTO

Technical data


Max. lateral force F_q as a function of the projection l



Basic version

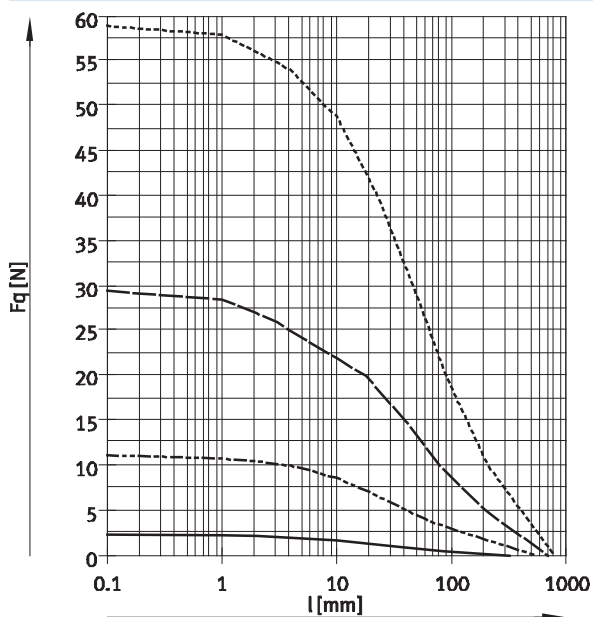


S2 – Through piston rod

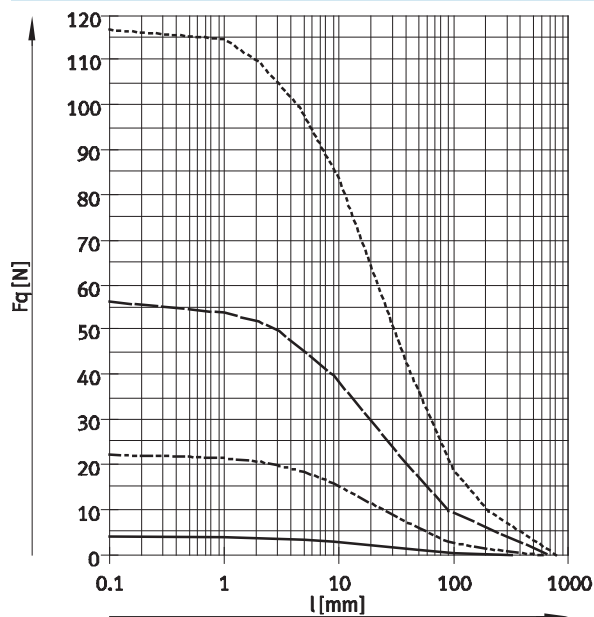

- $\varnothing 8/10$
- - - $\varnothing 12/16$
- · - $\varnothing 20$
- · · $\varnothing 25$

Materials

Sectional view

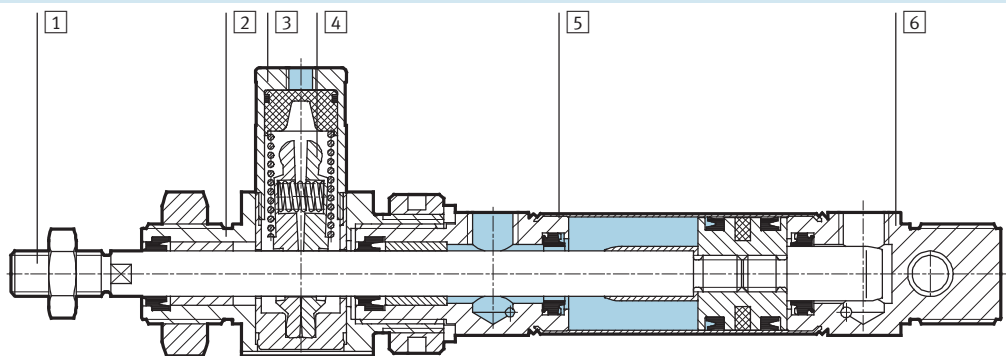

Standard cylinder

1	Piston rod	High-alloy stainless steel
2	Bearing cap	Anodised aluminium
3	Housing, clamping unit	Wrought aluminium alloy
4	Clamping jaws	Brass
5	Cylinder barrel	High-alloy stainless steel
6	End cap	Anodised aluminium
-	Piston, clamping unit	Polyacetate
-	Spring	Spring steel
-	Seals	Polyurethane, nitrile rubber

Standard cylinders DSNU-KP, with clamping unit


Technical data

FESTO


Dimensions

Download CAD Data → www.festo.com/us/cad

Basic version

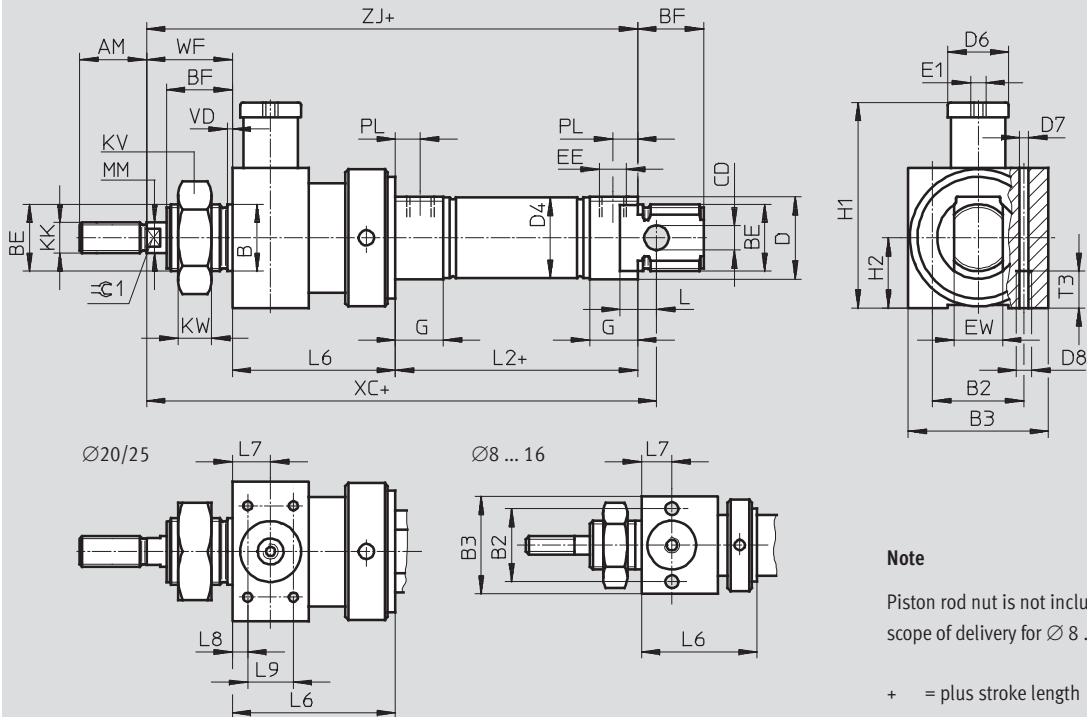

S2 – Through piston rod

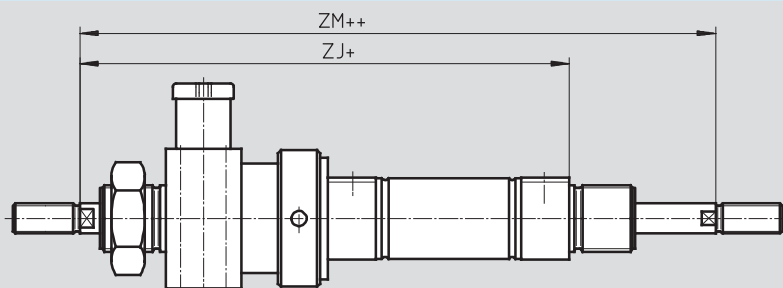

Note

The thread types at both piston rod ends are identical. The clamping unit is mounted on only one side. In

combination with variant Q, the right-hand piston rod is square, the left-hand piston rod round. The

clamping unit is mounted on the left-hand, round piston rod.

+ = plus stroke length
++ = plus 2x stroke length

Standard cylinders DSNU-KP, with clamping unit

FESTO

Technical data

Ø [mm]	AM	B Ø h9	B2	B3	BE	BF	CD Ø E10	D Ø	D4 Ø	D6 Ø	D7 Ø	D8
8	12	12	19.5	27	M12x1.25	12	4	15	9.3	12	4.2	M5
10									11.3			
12	16	16	24	32	M16x1.5	17	6	20	13.3			
16									17.3			
20	20	22	27	36	M22x1.5	20	8	27	21.3			
25	22					22			26.5			

Ø [mm]	E1	EE	EW	G	H1	H2	KK	KV	KW	MM Ø	L	L2
8	M5	M5	8	10	34.5	13.5	M4	19	6	4	6	46
10			12		41	16	M6	24	8	6	9	50
12												56
16		G¼	16	16	62.5	18	M8	32	11	8	12	68
20							M10x1.25			10		69.5
25												

Ø	L6	L7	L8	L9	T3	PL	VD	WF	XC	ZJ	ZM	≈C1
[mm]									±1			
8	29 ±0.65	8	–	–	11	6	2	16	93	91	107	–
10			–	–								–
12	38 ±0.75	10	–	–				22	113	110	132	5
16			–	–								
20	47 ±0.75	13	4.5	20		8.2		24	142	139	163	7
25	48 ±0.75							28	152	145.5	173.5	9

Note: This product conforms to ISO 1179-1 and ISO 228-1

Standard cylinders DSNU, ISO 6432

Ordering data – Modular products

FESTO

M Mandatory data					O Options			→
Module No.	Function	Piston Ø	Stroke	Cushioning	Position sensing	Cylinder end cap	Type of piston rod	
193 986	DSNU	8	1 ... 500	P PPV PPS	A	MQ MA MH	S2	
193 987		10						
193 988		12						
193 989		16						
193 990		20						
193 991		25						
Order example								
193 991	DSNU	- 25	- 350	- PPV	- A	- MH	- S2	

Ordering table										
Size		8	10	12	16	20	25	Condition s	Code	Enter code
M	Module No.	193 986	193 987	193 988	193 989	193 990	193 991			
	Function	Standard cylinder, double-acting, based on ISO 6432							DSNU	DSNU
	Piston Ø [mm]	8	10	12	16	20	25		-...	
	Stroke [mm]	1 ... 100		1 ... 200		1 ... 320	1 ... 500		-...	
	Cushioning	Flexible cushioning rings/pads at both ends							-P	
		–	–	Pneumatic cushioning, adjustable at both ends				1	-PPV	
		–	–	–	Pneumatic cushioning, self-adjusting at both ends			13	-PPS	
O	Position sensing	Via proximity sensor						2	-A	
	Cylinder end cap	Lateral supply port, end cap						3	-MQ	
		Axial supply port, end cap						3	-MA	
		With mounting flange at front (direct mounting), bearing cap						4	-MH	
	↓	Type of piston rod	Through piston rod						5	-S2

- 1 **PPV** Not with MA.
In combination with S6, S10, S11 not with piston Ø 12 mm
- 2 **A** Minimum stroke: 10 mm
- 3 **MQ, MA** Not with S2, S10, S11

- 4 **MH** Not with combination S6-R3.
Not with KP, S10, S11
- 5 **S2** Not with S10, S11
- 13 **PPS** Not with MA, MH, S6, S10, S11
and not with combination MQ-R3

Note

The bellows kit DADB must not be used in combination with the variant MH.

The running characteristics change slightly when the bellows kit DADB is combined with the variant S10 or S11.

Transfer order code

DSNU - - - - - -

Standard cylinders DSNU, ISO 6432

Ordering data – Modular products

FESTO

→ 0 Options									
Extended male thread	Shortened male thread	Female thread	Special thread	Extended piston rod	Clamping unit	Temperature resistance	Slow speed (constant motion)	Low friction	Corrosion protection
...K2	...K6	K3	"... "K5	...K8	KP	S6	S10	S11	R3
-	- 7K6	-	- "M10"K5	-	-	-	-	-	- R3

Ordering table									
Size	8	10	12	16	20	25	Conditions	Code	Enter code
Extended male thread	Extended male piston rod thread								
[mm]	1 ... 15	1 ... 20	1 ... 25	1 ... 35	6				
Shortened male thread	Shortened male piston rod thread								
[mm]	1 ... 4	1 ... 8	1 ... 10	7					
Female thread	Female piston rod thread								
	-	-	-	-	(M4)	(M6)	8		
Special thread	Piston rod with special thread								
	-	-	-	-	-	M10			
Piston rod extended at one end	Extended piston rod at one end								
[mm]	1 ... 50	1 ... 100	1 ... 110	1 ... 150					
Clamping unit	Attached						9		
Temperature resistance	Heat-resistant seals for temperatures up to 120 °C						10		
Slow speed (constant motion)	-	-	Slow speed (constant motion at low piston speeds)			11			
Low friction	-	-	Low friction			12			
Corrosion protection	-	-	High corrosion protection						

- 6 **K2** Not with K3, K6
 7 **K6** Not with K3
 8 **K3** Not with K5
 9 **KP** Not with S6, S10, S11, R3

- 10 **S6** Not with S10, S11
 11 **S10** Not with S11, R3
 12 **S11** Not with R3

Transfer order code

- - - - - - - - - -

Standard cylinders DSNU-Q, protected against rotation

FESTO

Ordering data – Modular products

M Mandatory data					O Options			
Module No.	Function	Piston Ø	Stroke	Cushioning	Position sensing	Cylinder end cap	Protection against rotation	Type of piston rod
193 988 193 989 193 990 193 991	DSNU	12 16 20 25	1 ... 500	P PPV	A	MQ MA MH	Q	S2
Order example								
193 990	DSNU	- 20	- 150	- PPV	- A	- MQ	- Q	-

Ordering table								
Size		12	16	20	25	Condition s	Code	Enter code
[M]	Module No.	193 988	193 989	193 990	193 991			
	Function	Standard cylinder, double-acting, based on ISO 6432					DSNU	
	Piston Ø [mm]	12	16	20	25		-...	
	Stroke [mm]	5 ... 160		5 ... 200	5 ... 250		-...	
	Cushioning	Flexible cushioning rings/pads at both ends					-P	
		-	Pneumatic cushioning, adjustable at both ends				-PPV	
[O]	Position sensing	Via proximity sensor				1	-A	
	Cylinder end cap	Lateral supply port, end cap				2	-MQ	
		Axial supply port, end cap				2	-MA	
		-	With mounting flange at front (direct mounting), bearing cap			3	-MH	
	Protection against rotation	Square piston rod					-Q	-Q
↓	Type of piston rod	Through piston rod					-S2	

- 1 A Minimum stroke: 10 mm
2 MQ, MA Not with S2

- 3 MH Not with combination Q-R3

Note

The bellows kit DADB must not be used in combination with the variant Q.

Transfer order code

DSNU - - - - - Q -

Standard cylinders DSNU-Q, protected against rotation

FESTO

Ordering data – Modular products

→ 0 Options						
Extended male thread	Shortened male thread	Female thread	Special thread	Extended piston rod	Clamping unit	Corrosion protection
...K2	...K6	K3	"..."K5	...K8	KP	R3
- 20K2	-	-	-	- 60K8	- KP	-

Ordering table							
Size	12	16	20	25	Conditions	Code	Enter code
Extended male thread	Extended male piston rod thread						
[mm]	1 ... 20		1 ... 25	1 ... 35	4	-...K2	
Shortened male thread	Shortened male piston rod thread						
[mm]	1 ... 4		1 ... 8	1 ... 10	5	-...K6	
Female thread	Female piston rod thread						
	-	-	(M4)	(M6)	6	-K3	
Special thread	Piston rod with special thread						
	-	-	-	M10		-"...K5	
Piston rod extended at one end	Extended piston rod at one end						
[mm]	1 ... 100		1 ... 110	1 ... 150		...K8	
Clamping unit	Attached				7	-KP	
Corrosion protection	High corrosion protection					-R3	

- 4 K2 Not with K3, K6
 5 K6 Not with K3
 6 K3 Not with K5

- 7 KP Only with S2.
 Not with R3

Transfer order code

- - - - - - -

- 1 - Types DSNU-...-CT/ESNU-...-CT discontinued
Available up until 2010

Standard cylinders ESNU, ISO 6432

Technical data

FESTO

Function



- Ø - Diameter
8 ... 25 mm

- l - Stroke length
1 ... 50 mm

Variant

CT-free

Additional variants

→ 39



Basic version



Axial air connection MA

General technical data						
Piston Ø	8	10	12	16	20	25
Pneumatic connection	M5	M5	M5	M5	G1/8	G1/8
Piston rod thread	M4	M4	M6	M6	M8	M10x1.25
Constructional design	Piston					
	Piston rod					
	Cylinder barrel					
Cushioning	Flexible cushioning rings/pads at both ends					
Position sensing	Via proximity sensor					
Type of mounting	Via accessories					
Mounting position	Any					

Note: This product conforms to ISO 1179-1 and ISO 228-1

Operating conditions						
Piston Ø	8	10	12	16	20	25
Operating medium	Filtered compressed air, lubricated or unlubricated					
Operating pressure [bar]	1.5 ... 10			1.2 ... 10		

Ambient conditions	
Standard cylinder	
Ambient temperature ¹⁾ [°C]	-20 ... +80
Corrosion resistance class CRC ²⁾	2

1) Note operating range of proximity sensors.

2) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Standard cylinders ESNU, ISO 6432

FESTO

Technical data

Force [N] and impact energy [J]						
Piston Ø	8	10	12	16	20	25
Theoretical force at 6 bar, advancing	24	41	61	107	169	270
Spring return force						
10 mm stroke	4.9	4.9	6.3	13.2	18.3	22.9
25 mm stroke	4.1	4.1	5.4	11.9	16.5	21.2
50 mm stroke	2.8	4.8	3.9	9.8	13.6	18.5
Max. impact energy at the end positions ¹⁾	0.03	0.05	0.07	0.15	0.20	0.30


1) The values are reduced by approx. 50% at ambient temperatures of 80 °C

Weight ESNU-... [g]						
Piston Ø	8	10	12	16	20	25
Product weight with 0 mm stroke	35	37.3	75	89.9	186.8	238
Additional weight per 10 mm stroke	2.4	2.7	4	4.6	7.2	11

Weight ESNU-...-MA [g]						
Piston Ø	8	10	12	16	20	25
Product weight with 0 mm stroke	30	33	65	81	167	222
Additional weight per 10 mm stroke	2.4	2.7	4	4.6	7.2	11

Materials

Sectional view

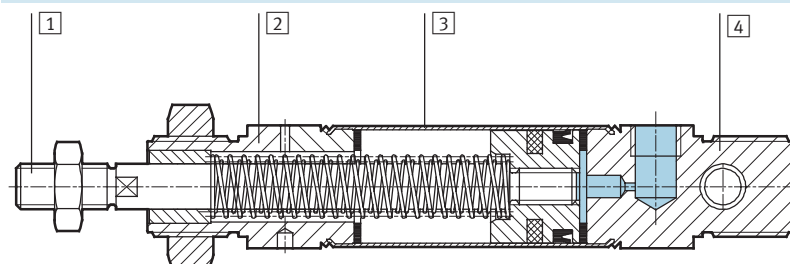

Standard cylinder		
1	Piston rod	High-alloy stainless steel
2	Bearing cap	Anodised aluminium
3	Cylinder barrel	High-alloy stainless steel
4	End cap	Anodised aluminium
-	Seals	Polyurethane, nitrile rubber
-	Spring	Spring steel

Standard cylinders ESNU, ISO 6432


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Basic version

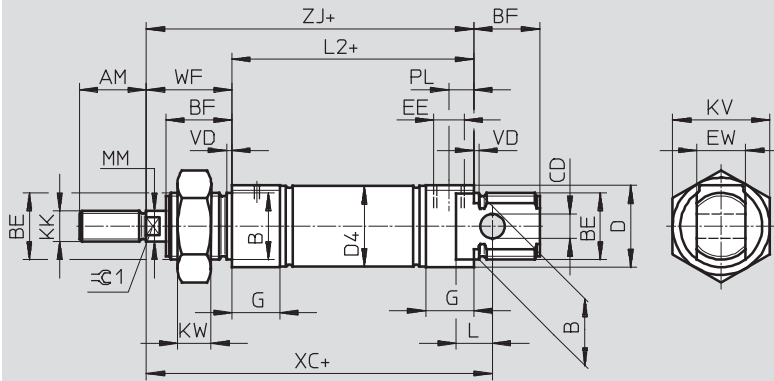


Note

Piston rod nut is not included in scope of delivery for $\varnothing$ 8 ... 20.

+ = plus stroke length

MA – Axial air connection

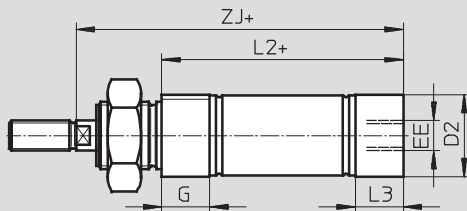

+ = plus stroke length

$\varnothing$ [mm]	AM	B $\varnothing$ h9	BE	BF	CD $\varnothing$ E10	D $\varnothing$	D2 $\varnothing$	D4 $\varnothing$	EE	EW	G	KK	KV
8	12	12	M12x1.25	12	4	15	10.5	9.3	M5	8	10	M4	19
10							12.5	11.3					
12	16	16	M16x1.5	17	6	20	14.5	13.3		12		M6	24
16							17.5	17.3					
20	20	22	M22x1.5	20	8	27	21.7	21.3	G $\frac{1}{8}$	16	16	M8	32
25	22			22			26.7	26.5				M10x1.25	

$\varnothing$ [mm]	KW	L	L2		L3	MM $\varnothing$	PL	VD	WF	XC ± 1	ZJ		$\approx \varnothing 1$
				-MA								-MA	
8	6	6	46	43.6	7.6	4	6	2	16	64	62	59.6	–
10				43.1	7.1							59.1	
12	8	9	50	47.7	7.7	6	8.2	2	22	75	72	69.7	5
16			56	53.7								75.7	
20	11	12	68	66.5	14.5	8	8.2	2	24	95	92	90.5	7
25			69.5	68.5	14	10						96.5	

Note: This product conforms to ISO 1179-1 and ISO 228-1

Standard cylinders ESNU, ISO 6432


Technical data

FESTO


Dimensions

Download CAD Data → www.festo.com/us/cad


K2 – Extended male piston rod thread




K6 – Shortened male piston rod thread




K3 – Female piston rod thread



K5 – Special piston rod thread



K8 – Extended piston rod



Ø [mm]	A1 max.	A2 max.	A3 max.	AF	AM	KF	KK		T4	WF
							Basic thread	Special thread ¹⁾		
8	15	50	4	–	12	–	M4	–	–	16
10				–		–		–	–	
12	20			–	16	–	M6	–	–	22
16				–		–		–	–	
20	25		8	12	20	M4	M8	–	2	24
25	35				22	M6	M10x1.25	M10	2.6	28

1) The special threads are only available as male threads. The scope of delivery does not include a hex nut for the piston rod thread.

Standard cylinders ESNU, ISO 6432

Technical data

FESTO

Ordering data			
Type	Stroke [mm]	Part No.	Type
Basic version			
	Ø 8 mm		
	10	19 254	ESNU-8-10-P-A
	25	19 255	ESNU-8-25-P-A
	50	19 256	ESNU-8-50-P-A
	Ø 10 mm		
	10	19 257	ESNU-10-10-P-A
	25	19 258	ESNU-10-25-P-A
	50	19 259	ESNU-10-50-P-A
	Ø 12 mm		
	10	19 260	ESNU-12-10-P-A
	25	19 261	ESNU-12-25-P-A
	50	19 262	ESNU-12-50-P-A
	Ø 16 mm		
	10	19 263	ESNU-16-10-P-A
	25	19 264	ESNU-16-25-P-A
	50	19 265	ESNU-16-50-P-A
	Ø 20 mm		
	10	19 266	ESNU-20-10-P-A
	25	19 267	ESNU-20-25-P-A
	50	19 268	ESNU-20-50-P-A
	Ø 25 mm		
	10	19 269	ESNU-25-10-P-A
	25	19 270	ESNU-25-25-P-A
	50	19 271	ESNU-25-50-P-A

- 2 - Types DSNU-...-CT/ESNU-...-CT discontinued
Available up until 2010

Standard cylinders ESNU, ISO 6432

Technical data

FESTO

Ordering data				
Type	∅ [mm]	Stroke [mm]	Part No.	Type
Variable stroke lengths				
	8	1 ... 50	14 119	ESNU-8-...-P-A
	10	1 ... 50	14 118	ESNU-10-...-P-A
	12	1 ... 50	14 317	ESNU-12-...-P-A
	16	1 ... 50	14 316	ESNU-16-...-P-A
	20	1 ... 50	14 319	ESNU-20-...-P-A
	25	1 ... 50	14 318	ESNU-25-...-P-A
Free of copper, PTFE and silicone				
 CT-free	8	1 ... 50	170 130	ESNU-8-...-P-A-CT
	10	1 ... 50	170 131	ESNU-10-...-P-A-CT
	12	1 ... 50	170 132	ESNU-12-...-P-A-CT
	16	1 ... 50	170 133	ESNU-16-...-P-A-CT
	20	1 ... 50	170 134	ESNU-20-...-P-A-CT
	25	1 ... 50	170 135	ESNU-25-...-P-A-CT

Standard cylinders ESNU, ISO 6432

Ordering data – Modular products

FESTO

M Mandatory data				O Options →		
Module No.	Function	Piston Ø	Stroke	Cushioning	Position sensing	End cap
193 996	ESNU	8	1 ... 50	P	A	MA
193 997		10				
193 998		12				
193 999		16				
194 000		20				
194 001		25				
Order example						
194 002	ESNU	25	45	P	A	MA

Ordering table									
Size	8	10	12	16	20	25	Condition s	Code	Enter code
M Module No.	193 996	193 997	193 998	193 999	194 000	194 001			
Function	Standard cylinder, single-acting pushing, based on ISO 6432							ESNU	ESNU
Piston Ø [mm]	8	10	12	16	20	25		-...	
Stroke [mm]	1 ... 50							-...	
Cushioning	Flexible cushioning rings/pads at both ends							-P	-P
O Position sensing	Via proximity sensor						1	-A	
↓ End cap	Axial air connection							-MA	

1 A Minimum stroke: 10 mm

Transfer order code

	ESNU	-		-		-	P	-		-	
--	------	---	--	---	--	---	---	---	--	---	--

Standard cylinders ESNÜ, ISO 6432

Ordering data – Modular products

FESTO

Options

Extended male thread	Shortened male thread	Female thread	Special thread	Extended piston rod
...K2	...K6	K3	"..."K5	...K8
- 30K2	-	-	- "M10"K5	- 30K8

Ordering table												
Size	8	10	12	16	20	25	Condition s	Code	Enter code			
↓	Extended male thread						Extended male piston rod thread					
0	[mm]	1 ... 15		1 ... 20		1 ... 25	1 ... 35	2			-...K2	
	Shortened male thread						Shortened male piston rod thread					
	[mm]	1 ... 4				1 ... 8						
	Female thread						Female piston rod thread				3	-K3
		-	-	-	-	(M4)	(M6)					
	Special thread						Piston rod with special thread			-” ... ”K5		
		-	-	-	-	-	M10					
	Extended piston rod						Extended piston rod			...K8		
	[mm]	1 ... 50										

- 2 K2 Not with female thread K3, shortened male thread K6
 3 K3 Not with special thread K5, shortened male thread K6

Transfer order code



- - - - -

Standard cylinders DSN, ISO 6432

Technical data

FESTO

Function



Ø - Diameter
8 ... 25 mm

Stroke length
1 ... 500 mm

Variant



S2



General technical data						
Piston Ø	8	10	12	16	20	25
Pneumatic connection	M5	M5	M5	M5	G1/8	G1/8
Piston rod thread	M4	M4	M6	M6	M8	M10x1.25
Constructional design	Piston					
	Piston rod					
	Cylinder barrel					
Cushioning	Flexible cushioning rings/pads at both ends					
	-			Pneumatic cushioning, adjustable at both ends		
Cushioning length (PPV) [mm]	-			14	17	
Type of mounting	Via accessories					
Mounting position	Any					

Note: This product conforms to ISO 1179-1 and ISO 228-1

Operating conditions						
Piston Ø	8	10	12	16	20	25
Operating medium	Filtered compressed air, lubricated or unlubricated					
Operating pressure [bar]	1.5 ... 10			1 ... 10		

Ambient conditions	
Standard cylinder	
Ambient temperature [°C]	-20 ... +80
Corrosion resistance class CRC ¹⁾	2

1) Corrosion resistance class 2 as per Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Standard cylinders DSN, ISO 6432

FESTO

Technical data


Forces [N]						
Piston Ø	8	10	12	16	20	25
Theoretical force at 6 bar, advancing ¹⁾	30	47	68	121	189	295
Theoretical force at 6 bar, retracting ¹⁾	23	40	51	104	158	247

1) The force in the advance stroke is the same as the force in the return stroke with the variant S2

Weights [g]						
Piston Ø	8	10	12	16	20	25
Product weight with 0 mm stroke	40	43	80	96	200	260
Additional weight per 10 mm stroke	2.3	2.5	4.1	4.7	7.1	10.9

Materials

Sectional view

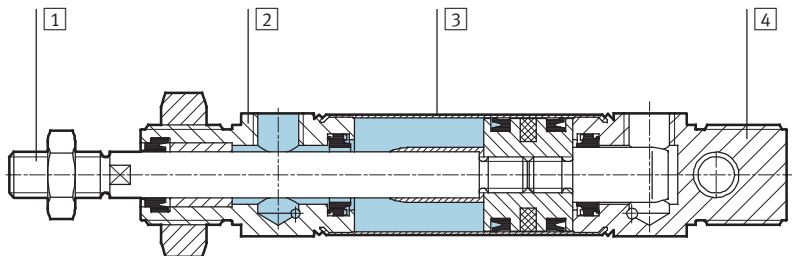

Standard cylinder		
1	Piston rod	High-alloy stainless steel
2	Bearing cap	Anodised aluminium
3	Cylinder barrel	High-alloy stainless steel
4	End cap	Anodised aluminium
–	Seals	Polyurethane, nitrile rubber

Standard cylinders DSN, ISO 6432


Technical data

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

Basic version

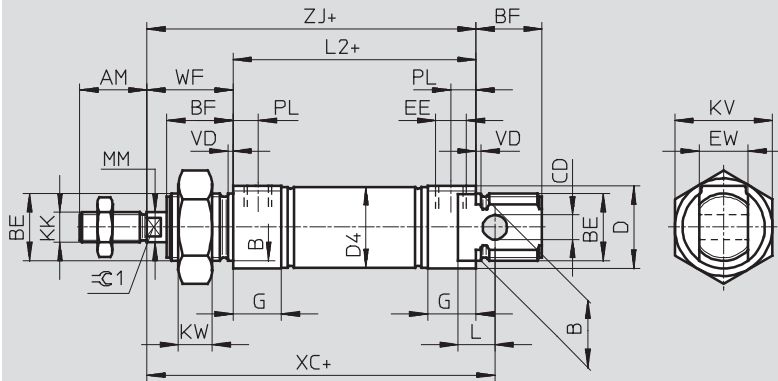


Note

Piston rod nut is not included in scope of delivery for $\varnothing 8 \dots 20$.

+ = plus stroke length

S2 – Through piston rod

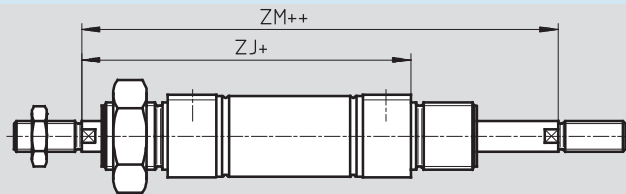

+ = plus stroke length

++ = plus 2x stroke length

$\varnothing$ [mm]	AM	B $\varnothing$ h9	BE	BF	CD $\varnothing$ E10	D $\varnothing$	D4 $\varnothing$	EE	EW	G	KK
8	12	12	M12x1.25	12	4	15	9.3	M5	8	10	M4
10							11.3				
12							13.3				
16	16	16	M16x1.5	17	6	20	17.3	G $\frac{1}{8}$	12	16	M6
20	20	22	M22x1.5	20	8	27	21.3				
25	22			22			26.5				M8 M10x1.25

Ø	KV	KW	L	L2	MM Ø	PL	VD	WF	XC	ZJ	ZM	≈S1
[mm]									±1			
8	19	6	6	46	4	6	2	16	64	62	78.4	–
10												
12	24	8	9	50	6	22		75	72	94	5	
16				56				82	78	100		
20	32	11	12	68	8	8.2		24	95	92	116	7
25				69.5				10	28	104	97.5	125.5

Note: This product conforms to ISO 1179-1 and ISO 228-1

Standard cylinders DSN, ISO 6432

Technical data

FESTO

Ordering data				
Type	Piston Ø [mm]	Stroke [mm]	Flexible cushioning rings/pads at both ends	
			Part No.	Type
Basic version				
	8	10	5 033	DSN-8-10-P
		25	5 034	DSN-8-25-P
		40	5 035	DSN-8-40-P
		50	5 036	DSN-8-50-P
		80	5 037	DSN-8-80-P
		100	5 038	DSN-8-100-P
	10	10	5 040	DSN-10-10-P
		25	5 041	DSN-10-25-P
		40	5 042	DSN-10-40-P
		50	5 043	DSN-10-50-P
		80	5 044	DSN-10-80-P
		100	5 045	DSN-10-100-P
	12	10	5 047	DSN-12-10-P
		25	5 048	DSN-12-25-P
		40	5 049	DSN-12-40-P
		50	5 050	DSN-12-50-P
		80	5 051	DSN-12-80-P
		100	5 052	DSN-12-100-P
		125	8 519	DSN-12-125-P
		160	5 053	DSN-12-160-P
		200	5 054	DSN-12-200-P

Standard cylinders DSN, ISO 6432

Technical data

FESTO

Ordering data						
Type	Piston Ø [mm]	Stroke [mm]	Flexible cushioning rings/pads at both ends		Pneumatic cushioning, adjustable at both ends	
			Part No.	Type	Part No.	Type
Basic version						
	16	10	5 056	DSN-16-10-P	–	
		25	5 057	DSN-16-25-P		
		40	5 058	DSN-16-40-P	14 534	DSN-16-40-PPV
		50	5 059	DSN-16-50-P	14 535	DSN-16-50-PPV
		80	5 060	DSN-16-80-P	14 536	DSN-16-80-PPV
		100	5 061	DSN-16-100-P	14 537	DSN-16-100-PPV
		125	8 520	DSN-16-125-P	14 538	DSN-16-125-PPV
		160	5 062	DSN-16-160-P	14 539	DSN-16-160-PPV
		200	5 063	DSN-16-200-P	14 540	DSN-16-200-PPV
	20	10	5 065	DSN-20-10-P	–	
		25	5 066	DSN-20-25-P		
		40	5 067	DSN-20-40-P	8 743	DSN-20-40-PPV
		50	5 068	DSN-20-50-P	8 744	DSN-20-50-PPV
		80	5 069	DSN-20-80-P	8 745	DSN-20-80-PPV
		100	5 070	DSN-20-100-P	8 746	DSN-20-100-PPV
		125	8 521	DSN-20-125-P	8 747	DSN-20-125-PPV
		160	5 071	DSN-20-160-P	8 748	DSN-20-160-PPV
		200	5 072	DSN-20-200-P	8 749	DSN-20-200-PPV
		250	8 522	DSN-20-250-P	8 750	DSN-20-250-PPV
		300	5 073	DSN-20-300-P	8 751	DSN-20-300-PPV
		320	34 710	DSN-20-320-P	34 712	DSN-20-320-PPV
	25	10	5 075	DSN-25-10-P	–	
		25	5 076	DSN-25-25-P		
		40	5 077	DSN-25-40-P	9 666	DSN-25-40-PPV
		50	5 078	DSN-25-50-P	9 667	DSN-25-50-PPV
		80	5 079	DSN-25-80-P	9 668	DSN-25-80-PPV
		100	5 080	DSN-25-100-P	9 669	DSN-25-100-PPV
		125	8 523	DSN-25-125-P	8 531	DSN-25-125-PPV
		160	5 081	DSN-25-160-P	9 670	DSN-25-160-PPV
		200	5 082	DSN-25-200-P	9 671	DSN-25-200-PPV
		250	8 524	DSN-25-250-P	8 532	DSN-25-250-PPV
		300	5 083	DSN-25-300-P	9 672	DSN-25-300-PPV
		320	34 711	DSN-25-320-P	34 713	DSN-25-320-PPV
		400	32 298	DSN-25-400-P	32 300	DSN-25-40-PPV
		500	32 299	DSN-25-500-P	32 301	DSN-25-500-PPV

Standard cylinders DSN, ISO 6432

Technical data

FESTO

Ordering data					
Type	Piston Ø [mm]	Stroke [mm]	Flexible cushioning rings/pads at both ends		Pneumatic cushioning, adjustable at both ends
			Part No.	Type	Part No.
Variable stroke lengths					
	8	1 ... 100	5 032	DSN-8-...-P	-
	10	1 ... 100	5 039	DSN-10-...-P	
	12	1 ... 200	5 046	DSN-12-...-P	
	16	1 ... 200	5 055	DSN-16-...-P	
	20	1 ... 320	5 064	DSN-20-...-P	
	25	1 ... 500	5 074	DSN-25-...-P	
Variable stroke lengths					
	16	1 ... 200	-	14 533 DSN-16-...-PPV	
	20	1 ... 320		8 742 DSN-20-...-PPV	
	25	1 ... 500		9 665 DSN-25-...-PPV	
Variable stroke, through piston rod					
	20	10 ... 320	-	11 893 DSN-20-...-PPV-S2	
	25	10 ... 500		11 894 DSN-25-...-PPV-S2	

Standard cylinders ESN, ISO 6432

FESTO

Technical data

Function



-  - Diameter
8 ... 25 mm
-  - Stroke length
1 ... 50 mm



General technical data						
Piston Ø	8	10	12	16	20	25
Pneumatic connection	M5	M5	M5	M5	G $\frac{1}{8}$	G $\frac{1}{8}$
Piston rod thread	M4	M4	M6	M6	M8	M10x1.25
Constructional design	Piston					
	Piston rod					
	Cylinder barrel					
Cushioning	Flexible cushioning rings/pads at both ends					
Type of mounting	Via accessories					
Mounting position	Any					

Note: This product conforms to ISO 1179-1 and ISO 228-1

Operating conditions						
Piston Ø	8	10	12	16	20	25
Operating medium	Filtered compressed air, lubricated or unlubricated					
Operating pressure [bar]	1.5 ... 10			1.2 ... 10		

Ambient conditions	
Standard cylinder	
Ambient temperature [°C]	-20 ... +80
Corrosion resistance class CRC ¹⁾	2

- 1) Corrosion resistance class 2 as per Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Standard cylinders ESN, ISO 6432

Technical data


FESTO

Force [N] and impact energy [J]						
Piston Ø	8	10	12	16	20	25
Theoretical force at 6 bar, advancing	24	41	61	107	169	270
Spring return force 10 mm stroke	4.9	4.9	6.3	13.2	18.3	22.9
Spring return force 25 mm stroke	4.1	4.1	5.4	11.9	16.5	21.2
Spring return force 50 mm stroke	2.8	4.8	3.9	9.8	13.6	18.5
Impact energy at end positions	0.03	0.05	0.07	0.15	0.20	0.30

Weight [g]						
Piston Ø	8	10	12	16	20	25
Product weight with 0 mm stroke	40	43	80	96	200	260
Additional weight per 10 mm stroke	2.3	2.5	4.1	4.7	7.1	10.9

Materials

Sectional view

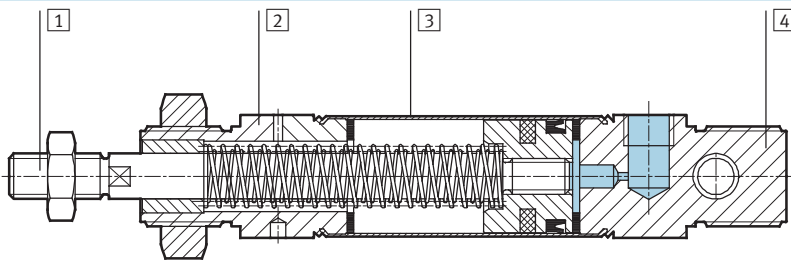

Standard cylinder		
1	Piston rod	High-alloy stainless steel
2	Bearing cap	Anodised aluminium
3	Cylinder barrel	High-alloy stainless steel
4	End cap	Anodised aluminium
–	Seals	Polyurethane, nitrile rubber
–	Spring	Spring steel

Standard cylinders ESN, ISO 6432

Technical data

FESTO

Dimensions Download CAD Data → www.festo.com/us/cad

Basic version

Note
Piston rod nut is not included in scope of delivery for Ø 8 ... 20.
+ = plus stroke length

Ø [mm]	AM	B Ø h9	BE	BF	CD Ø E10	D Ø	D4 Ø	EE	EW	G	KK
8	12	12	M12x1.25	12	4	15	9.3	M5	8	10	M4
10							11.3				
12	16	16	M16x1.5	17	6	20	13.3		12		M6
16							17.3				
20	20	22	M22x1.5	20	8	27	21.3	G1/8	16	16	M8
25	22			22			26.5				M10x1.25

Ø [mm]	KV	KW	L	L2	MM Ø	PL	VD	WF	XC ±1	ZJ	≈C1
8	19	6	6	46	4	6	2	16	64	62	–
10											
12	24	8	9	50	6			22	75	72	5
16				56						82	
20	32	11	12	68	8	8.2		24	95	92	7
25				69.5	10			28	104	97.5	9

Note: This product conforms to ISO 1179-1 and ISO 228-1

Standard cylinders ESN, ISO 6432

Technical data

FESTO

Ordering data			
Type	Stroke [mm]	Part No.	Type
Basic version			
	Ø 8 mm		
	10	5 086	ESN-8-10-P
	25	5 087	ESN-8-25-P
	50	5 088	ESN-8-50-P
	Ø 10 mm		
	10	5 089	ESN-10-10-P
	25	5 090	ESN-10-25-P
	50	5 091	ESN-10-50-P
	Ø 12 mm		
	10	5 092	ESN-12-10-P
	25	5 093	ESN-12-25-P
	50	5 094	ESN-12-50-P
	Ø 16 mm		
	10	5 095	ESN-16-10-P
	25	5 096	ESN-16-25-P
	50	5 097	ESN-16-50-P
	Ø 20 mm		
	10	5 098	ESN-20-10-P
	25	5 099	ESN-20-25-P
	50	5 100	ESN-20-50-P
	Ø 25 mm		
	10	5 101	ESN-25-10-P
	25	5 102	ESN-25-25-P
	50	5 103	ESN-25-50-P

Ordering data				
Type	Ø [mm]	Stroke [mm]	Part No.	Type
Variable stroke lengths				
	8	1 ... 50	11 651	ESN-8-...-P
	10	1 ... 50	11 652	ESN-10-...-P
	12	1 ... 50	11 653	ESN-12-...-P
	16	1 ... 50	11 654	ESN-16-...-P
	20	1 ... 50	11 655	ESN-20-...-P
	25	1 ... 50	11 656	ESN-25-...-P

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories

Foot mounting HBN/CRHBN

Scope of delivery:

HBN/CRHBN-...x1: 1 foot

HBN/CRHBN-...x2: 2 feet and 1 nut

Material:


HBN: Galvanised steel

CRHBN: High-alloy stainless steel

Free of copper, PTFE and silicone



HBN/CRHBN-...x2

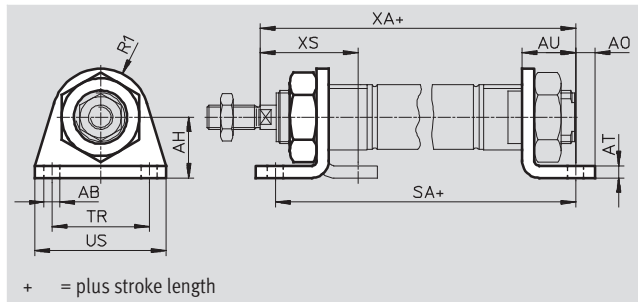

Dimensions and ordering data														
For Ø	AB Ø	AH	AO	AT	AU	R1	SA		TR	US	XA		XS	
[mm]								-KP				-KP		-KP
8, 10	4.5	16	5	3	11	10	68	97	25	35	73	102	24	–
12	5.5	20	6	4	14	13	78	116	32	42	86	124	32	–
16	5.5	20	6	4	14	13	84	122	32	42	92	130	32	–
20	6.6	25	8	5	17	20	102	149	40	54	109	156	36	–
25	6.6	25	8	5	17	20	103.5	151.5	40	54	114.5	162.5	40	–

For Ø [mm]	Basic version				High corrosion protection			
	CRC ¹⁾	Weight [g]	Part No.	Type	CRC ¹⁾	Weight [g]	Part No.	Type
8, 10	2	20	5 123	HBN-8/10x1	–	–	–	–
	2	55	5 124	HBN-8/10x2	–	–	–	–
12, 16	2	40	5 125	HBN-12/16x1	4	40	161 866	CRHBN-12/16x1
	2	105	5 126	HBN-12/16x2	4	97	162 999	CRHBN-12/16x2
20, 25	2	90	5 127	HBN-20/25x1	4	55	161 867	CRHBN-20/25x1
	2	220	5 128	HBN-20/25x2	4	100	162 998	CRHBN-20/25x2

1) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 4 as per Festo standard 940 070

Components requiring higher corrosion resistance. Parts used with aggressive media, e.g. food or chemical industry. These applications should be supported with special tests with the media if required.

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories


Flange mounting FBN/CRFBN

Material:

FBN: Galvanised steel

CRFBN: High-alloy stainless steel

Free of copper, PTFE and silicone

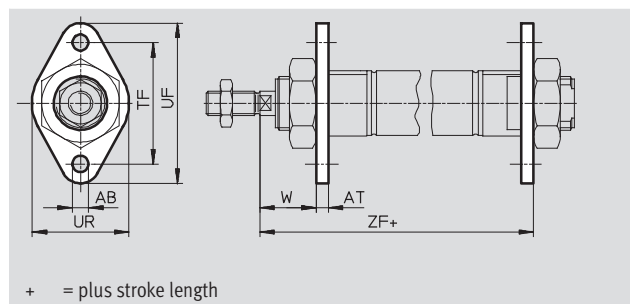

+ = plus stroke length

Dimensions and ordering data								
For Ø	AB	AT	TF	UF	UR	W	ZF	
[mm]	Ø							-KP
8, 10	4.5	3	30	40	25	13	65	94
12	5.5	4	40	53	30	18	76	114
16	5.5	4	40	53	30	18	82	120
20	6.6	5	50	66	40	19	97	144
25	6.6	5	50	66	40	23	102.5	150.5

For Ø	Basic version				High corrosion protection			
	CRC ¹⁾	Weight [g]	Part No.	Type	CRC ¹⁾	Weight [g]	Part No.	Type
8, 10	2	12	5 129	FBN-8/10	–	–	–	–
12, 16	2	26	5 130	FBN-12/16	4	26	161 864	CRFBN-12/16
20, 25	2	52	5 131	FBN-20/25	4	52	161 865	CRFBN-20/25

1) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Corrosion resistance class 4 as per Festo standard 940 070

Components requiring higher corrosion resistance. Parts used with aggressive media, e.g. food or chemical industry. These applications should be supported with special tests with the media if required.

Swivel mounting SBN

Material:


Mounting ring: Wrought aluminium alloy, anodised

Bearing: Bronze

Screws: Galvanised steel

Bracket: Steel

Cannot be used on the bearing cap in combination with bellows kit DADB.

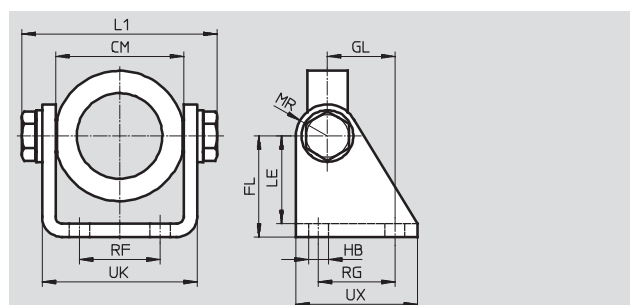

Dimensions and ordering data														
For Ø	CM	FL	GL	HB	L1	LE	MR	RF	RG	UK	UX	CRC ¹⁾	Weight	Part No. Type
[mm]					max.								[g]	
20/25	38.1+0.4	35	20	7	60.2	31	12	20	24	46.1	40	2	200	539 927 SBN-20/25

1) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a surrounding industrial atmosphere or media such as cooling or lubricating agents.

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories


Swivel mounting WBN

Material:

Galvanised steel

Free of copper, PTFE and silicone

Cannot be used on the bearing cap in combination with bellows kit DADB.

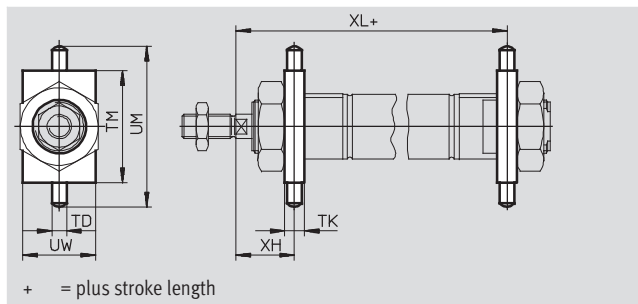

Dimensions and ordering data												
For Ø	TD	TK	TM	UM	UW	XH	XL		CRC ¹⁾	Weight	Part No.	Type
[mm]	Ø f8							-KP		[g]		
8, 10	4	6	26	38	20	13	65	94	2	20	8 608	WBN-8/10
12	6	8	38	58	25	18	76	114	2	50	8 609	WBN-12/16
16	6	8	38	58	25	18	82	120	2	50	8 609	WBN-12/16
20	6	8	46	66	30	20	96	143	2	70	8 610	WBN-20/25
25	6	8	46	66	30	24	101.5	149.5	2	70	8 610	WBN-20/25

1) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a surrounding industrial atmosphere or media such as cooling or lubricating agents.


Clevis foot LBN/CRLBN

Material:

LBN: Galvanised steel

CRLBN: High-alloy stainless steel

Free of copper, PTFE and silicone

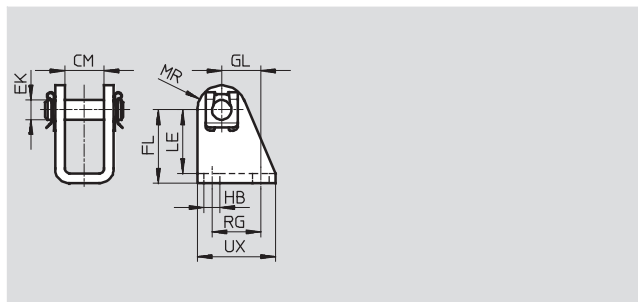

Dimensions and ordering data										
For Ø	CM	EK	FL	GL	HB	LE	MR	RG	UX	
[mm]		Ø								
8, 10	8.1	4	24 +0.3/-0.2	13.8	4.5	21.5	5	12.5	20	
12, 16	12.1	6	27 +0.3/-0.2	13	5.5	24	7	15	25	
20, 25	16.1	8	30 +0.4/-0.2	16	6.6	26	10	20	32	

For Ø	Basic version				High corrosion protection			
	CRC ¹⁾	Weight [g]	Part No.	Type	CRC ¹⁾	Weight [g]	Part No.	Type
8, 10	2	22	6 057	LBN-8/10	—	—	—	
12, 16	2	40	6 058	LBN-12/16	4	55	161 862	CRLBN-12/16
20, 25	2	81	6 059	LBN-20/25	4	62	161 863	CRLBN-20/25

1) Corrosion resistance class 2 as per Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.



Corrosion resistance class 4 as per Festo standard 940 070

Components requiring higher corrosion resistance. Parts used with aggressive media, e.g. food or chemical industry. These applications should be supported with special tests with the media if required.


Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories

Ordering data – Piston rod attachments				Technical data → Internet: piston rod attachments			
Designation	For Ø	Part No.	Type	Designation	For Ø	Part No.	Type
Rod eye SGS				Rod clevis SG			
	8	9 253	SGS-M4		8	6 532	SG-M4
	10				10		
	12	9 254	SGS-M6		12	3 110	SG-M6
	16				16		
	20	9 255	SGS-M8		20	3 111	SG-M8
	25	9 261	SGS-M10x1,25		25	6 144	SG-M10x1,25
Coupling piece KSG				Coupling piece KSZ			
	8	–			12	36 123	KSZ-M6
	10				16		
	12				20	36 124	KSZ-M8
	16				25	36 125	KSZ-M10x1,25
	20						
	25	32 963	KSG-M10x1,25				
Self-aligning rod coupler FK				Hex nut MSK			
	8	6 528	FK-M4		16	189 007	MSK-M16X1,5
	10				20, 25	189 009	MSK-M22X1,5
	12	2 061	FK-M6				
	16						
	20	2 062	FK-M8				
	25	6 140	FK-M10x1,25				

Ordering data – Piston rod attachments, corrosion resistant				Technical data → Internet: crsg			
Designation	For Ø	Part No.	Type	Designation	For Ø	Part No.	Type
Rod eye CRSGS				Rod clevis CRSG			
	12	195 580	CRSGS-M6		12	13 567	CRSG-M6
	16				16		
	20	195 581	CRSGS-M8		20	13 568	CRSG-M8
	25	195 582	CRSGS-M10x1,25		25	13 569	CRSG-M10x1,25

Ordering data – Guide units					Technical data → Internet: feng	
	For Ø	Stroke [mm]	With recirculating ball bearing guide		With plain-bearing guide	
			Part No.	Type	Part No.	Type
	8, 10	1 ... 200	35 197	FEN-8/10-...-KF	35 196	FEN-8/10-...
	12, 16	1 ... 200	33 481	FEN-12/16-...-KF	19 168	FEN-12/16-...
	20	2 ... 250	33 482	FEN-20-...-KF	19 169	FEN-20-...
	25	2 ... 250	33 483	FEN-25-...-KF	19 170	FEN-25-...

New Bellows DADB

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

Accessories

FESTO

Bellows kit DADB



General technical data					
Type DADB-S1-		12	16	20	25
Max. stroke range of cylinder ¹⁾	DSNU [mm]	10 ... 200	10 ... 200	10 ... 320	10 ... 500
	ESNU ²⁾ [mm]	–	–	10 ... 50	10 ... 50
Type of mounting		With threaded pin			
Mounting position		Any			
Resistance to media		Dust, chippings, oil, grease, fuel (→ Internet: Resistance to media)			
Ambient temperature ³⁾		[°C] –10 ... +80			
Corrosion resistance class CRC ⁴⁾		3			

1) In combination with the bellows kit DADB

2) Slight change in spring return force


3) Note operating range of proximity sensors and cylinder

4) Corrosion resistance class 3 as per Festo standard 940 070

Components with heavy corrosion exposure. Externally visible components in direct contact with normal industrial atmosphere or media such as solvents and cleaning agents, where the surface requirement is predominantly functional.

Materials

Sectional view

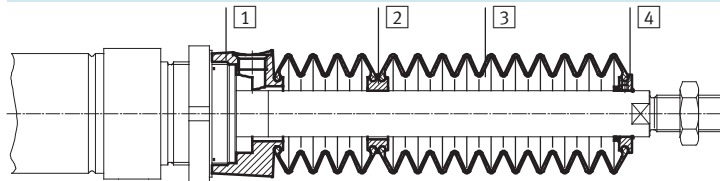

Bellows		
1	Connection	Polyamide
2	Intermediate piece	Polyamide
3	Bellows	Nitrile rubber
4	End piece	Polyamide
–	O-ring	Nitrile rubber
Note on materials		Free of copper and PTFE
		RoHS-compliant

Weight [g]				
Type DADB-S1- Stroke [mm]	12	16	20	25
10 ... 50	7	7	20	19
51 ... 100	9	9	32	31
101 ... 150	13	13	45	44
151 ... 200	16	16	58	57
201 ... 250	–	–	73	72
251 ... 300	–	–	85	84
301 ... 350	–	–	100	98
351 ... 400	–	–	–	109
401 ... 450	–	–	–	124
451 ... 500	–	–	–	136

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

Accessories

Speed of travel v as a function of tube length l




The bellows kit is a leak-free system. To prevent unwanted media from being drawn in, the supply and exhaust air must be ducted via a venting hole in the connection part

1. The pressure generated in the bellows kit by the positioning motion is primarily defined by speed of travel


and tubing length. The recommended tubing length based on the travel speed of the drive can be read from the graph.

Advancing

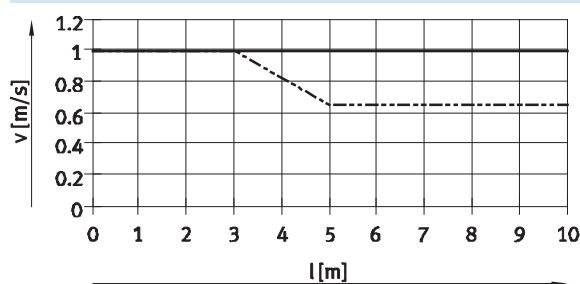

— Ø 12/16
- - - Ø 20/25

Retracting

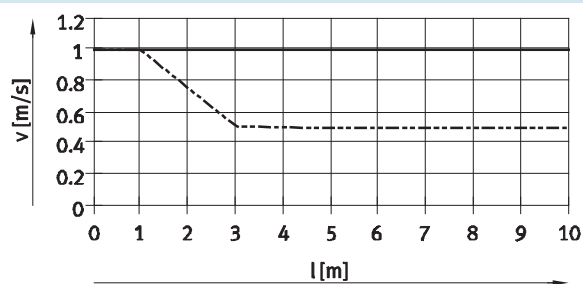

Note

The push-in fittings opposite must be used for the venting hole. Silencers can be used as an alternative. This reduces the travel speed slightly.

Tubing length and push-in fitting for venting hole

Ø [mm]	Tubing O.D. [mm]	Push-in fitting	
		Part No.	Type
12, 16, 20, 25	6	153 317	QSM-M5-6-I
		537 014	QS-F-M5-6-I
		533 845	QS-F-M5-6H
		533 875	QS-F-M5-6


Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

Accessories

FESTO

Dimensions

Download CAD Data → www.festo.com/us/cad

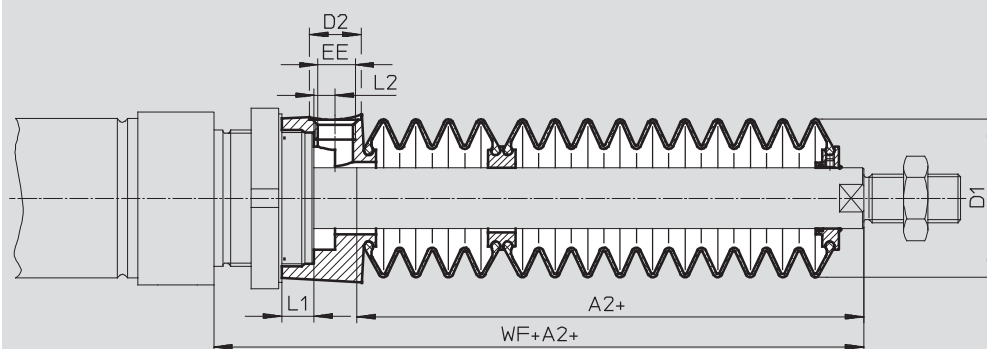

+ = plus stroke length

Ø Stroke [mm]	12/16							20						
	A2 ¹⁾	D1 max.	D2	EE	L1	L2	WF+A2	A2 ¹⁾	D1 max.	D2	EE	L1	L2	WF+A2
10 ... 50	23	22	8.5	M5	5	3.2	45	22	29	8.5	M5	4.2	2.7	46
51 ... 100	34						56	34						58
101 ... 150	48						70	47						71
151 ... 200	59						81	60						84
201 ... 250	–						–	75						99
251 ... 300	–						–	86						110
301 ... 350	–						–	101						125
351 ... 400	–						–	–						–
401 ... 450	–						–	–						–
451 ... 500	–						–	–						–

Ø Stroke [mm]	25						
	A2 ¹⁾	D1 max.	D2	EE	L1	L2	WF+A2
10 ... 50	22	29	8.5	M5	4.2	2.7	50
51 ... 100	34						62
101 ... 150	47						75
151 ... 200	60						88
201 ... 250	75						103
251 ... 300	86						114
301 ... 350	101						129
351 ... 400	112						140
401 ... 450	127						155
451 ... 500	138						166

1) The dimension corresponds to the K8 value (extended piston rod) of the drive

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

Accessories

Ordering data – Bellows kit

An extended piston rod (order code K8) is required when using a bellows kit
→ Ordering data – Modular products.

The necessary dimensions for K8 as a function of piston diameter and cylinder stroke as well as the corresponding bellows kit are indicated in the table below:

Order example:

Selected standard cylinder:

DSNU-25-320-PPV-A-MQ-...

The dimension for the corresponding K8 value (see table):
101 mm

Complete type code for standard cylinder:

DSNU-25-320-PPV-A-MQ-...-101K8

The corresponding bellows kit:

DADB-S1-25-S301-350

Cylinder data			Bellows kit		Cylinder data			Bellows kit	
Ø	Stroke	Dimension for K8	Part No.	Type	Ø	Stroke	Dimension for K8	Part No.	Type
[mm]	[mm]	[mm]			[mm]	[mm]	[mm]		
12	10 ... 50	23	553 391	DADB-S1-12-S10-50	16	10 ... 50	23	553 399	DADB-S1-16-S10-50
	51 ... 100	34	553 393	DADB-S1-12-S51-100		51 ... 100	34	553 401	DADB-S1-16-S51-100
	101 ... 150	48	553 395	DADB-S1-12-S101-150		101 ... 150	48	553 403	DADB-S1-16-S101-150
	151 ... 200	59	553 397	DADB-S1-12-S151-200		151 ... 200	59	553 405	DADB-S1-16-S151-200
20	10 ... 50	22	553 407	DADB-S1-20-S10-50	25	10 ... 50	22	553 421	DADB-S1-25-S10-50
	51 ... 100	34	553 409	DADB-S1-20-S51-100		51 ... 100	34	553 423	DADB-S1-25-S51-100
	101 ... 150	47	553 411	DADB-S1-20-S101-150		101 ... 150	47	553 425	DADB-S1-25-S101-150
	151 ... 200	60	553 413	DADB-S1-20-S151-200		151 ... 200	60	553 427	DADB-S1-25-S151-200
	201 ... 250	75	553 415	DADB-S1-20-S201-250		201 ... 250	75	553 429	DADB-S1-25-S201-250
	251 ... 300	86	553 417	DADB-S1-20-S251-300		251 ... 300	86	553 431	DADB-S1-25-S251-300
	301 ... 320	101	553 419	DADB-S1-20-S301-350		301 ... 350	101	553 433	DADB-S1-25-S301-350
						351 ... 400	112	553 435	DADB-S1-25-S351-400
						401 ... 450	127	553 437	DADB-S1-25-S401-450
						451 ... 500	138	553 439	DADB-S1-25-S451-500

Note

Can only be used with piston Ø 20 and 25 of the single-acting standard cylinder ESNU.

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories

Ordering data – Proximity sensors, round design, magneto-resistive							Technical data ➔ Internet: smto	
	Assembly	Switching output	Electrical connection		Cable length [m]	Connection direction	Part No.	Type
			Cable	Plug M8				
N/O contact								
	Via accessories	PNP	3-wire	–	2.5	In-line	152 836	SMT0-4U-PS-K-LED-24
			–	3-pin	–	In-line	152 742	SMT0-4U-PS-S-LED-24
		NPN	3-wire	–	2.5	In-line	152 837	SMT0-4U-NS-K-LED-24
			–	3-pin	–	In-line	152 743	SMT0-4U-NS-S-LED-24

Ordering data – Proximity sensors, round design, magnetic reed							Technical data → Internet: smeo	
	Assembly	Electrical connection		Cable length [m]	Connection direction	Part No.	Type	
		Cable	Plug M8					
N/O contact								
	Via accessories	3-wire	–	2.5	In-line	36 198	SMEO-4U-K-LED-24	
				5	In-line	175 401	SMEO-4U-K5-LED-24	
		–	3-pin	–	In-line	151 526	SMEO-4U-S-LED-24-B	

Ordering data – Proximity sensors, round design, magnetic reed, corrosion resistant							Technical data → Internet: crsmeo	
	Assembly	Electrical connection		Cable length [m]	Connection direction	Part No.	Type	
		Cable	Plug M8					
N/O contact								
	Via accessories	3-wire	–	2.5	In-line	161 775	CRSME0-4-K-LED-24	


Ordering data – Mounting kits for proximity sensors SME0/SMT0/CRSME0				Technical data → Internet: smbr			
Designation	For Ø	Part No.	Type	Designation	For Ø	Part No.	Type
Mounting kit SMBR				Mounting kit CRSMBR, corrosion resistant			
	8	19 272	SMBR-8		8	–	–
	10	19 273	SMBR-10		10	–	–
	12	19 274	SMBR-12		12	164 581	CRSMBR-12
	16	19 275	SMBR-16		16	164 582	CRSMBR-16
	20	19 276	SMBR-20		20	164 583	CRSMBR-20
	25	19 277	SMBR-25		25	164 584	CRSMBR-25

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories

Ordering data – Proximity sensors for T-slot, magneto-resistive					Technical data ➔ Internet: smt	
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot from above, flush with the cylinder profile	PNP	Cable, 3-wire	2.5	543 867	SMT-8M-PS-24V-K-2,5-OE
			Plug M8x1, 3-pin	0.3	543 866	SMT-8M-PS-24V-K-0,3-M8D
			Plug M12x1, 3-pin	0.3	543 869	SMT-8M-PS-24V-K-0,3-M12
	Insertable in the slot lengthwise, flush with the cylinder profile	NPN	Cable, 3-wire	2.5	543 870	SMT-8M-NS-24V-K-2,5-OE
			Plug M8x1, 3-pin	0.3	543 871	SMT-8M-NS-24V-K-0,3-M8D
	Insertable in the slot lengthwise, flush with the cylinder profile	PNP	Cable, 3-wire	2.5	175 436	SMT-8-PS-K-LED-24-B
			Plug M8x1, 3-pin	0.3	175 484	SMT-8-PS-S-LED-24-B
N/C contact						
	Insertable in the slot from above, flush with the cylinder profile	PNP	Cable, 3-wire	7.5	543 873	SMT-8M-PO-24V-K7,5-OE

Ordering data – Proximity sensors for T-slot, magnetic reed					Technical data → Internet: sme	
	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot from above, flush with the cylinder profile	Contacting	Cable, 3-wire	2.5	543 862	SME-8M-DS-24V-K-2,5-OE
				5.0	543 863	SME-8M-DS-24V-K-5,0-OE
			Cable, 2-wire	2.5	543 872	SME-8M-ZS-24V-K-2,5-OE
			Plug M8x1, 3-pin	0.3	543 861	SME-8M-DS-24V-K-0,3-M8D
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	2.5	150 855	SME-8-K-LED-24
			Plug M8x1, 3-pin	0.3	150 857	SME-8-S-LED-24
N/C contact						
	Insertable in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-wire	7.5	160 251	SME-8-O-K-LED-24

Ordering data – Mounting kits for proximity sensors SME/SMT-8			Technical data ➔ Internet: smbr	
Designation	For Ø	Part No.	Type	
Mounting kit SMBR-8				
	8	175 091	SMBR-8-8	
	10	175 092	SMBR-8-10	
	12	175 093	SMBR-8-12	
	16	175 094	SMBR-8-16	
	20	175 095	SMBR-8-20	
	25	175 096	SMBR-8-25	


Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories

Ordering data – Proximity sensors for slot type 10 (C-slot), magneto-resistive					Technical data → Internet: smt	
	Type of mounting	Switching output	Electrical connection, connection direction	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot from above, flush with the cylinder profile	PNP	Cable, 3-wire, in-line	2.5	525 915	SMT-10F-PS-24V-K2,5L-OE
			Plug M8x1, 3-pin, in-line	0.3	525 916	SMT-10F-PS-24V-K0,3L-M8D
			Plug M8x1, 3-pin, angled	0.3	526 675	SMT-10F-PS-24V-K0,3Q-M8D
	Insertable in slot lengthwise	PNP	Plug M8x1, 3-pin, in-line	0.3	173 220	SMT-10-PS-SL-LED-24
			Cable, 3-wire, in-line	2.5	173 218	SMT-10-PS-KL-LED-24

Ordering data – Proximity sensors for C-slot, magnetic reed					Technical data → Internet: sme	
	Type of mounting	Switching output	Electrical connection, connection direction	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot from above, flush with the cylinder profile	Contacting	Plug M8x1, 3-pin, in-line	0.3	525 914	SME-10F-DS-24V-K0,3L-M8D
			Cable, 3-wire, in-line	2.5	525 913	SME-10F-DS-24V-K2,5L-OE
			Cable, 2-wire, in-line	2.5	526 672	SME-10F-ZS-24V-K2,5L-OE
	Insertable in slot lengthwise	Contacting	Plug M8x1, 3-pin, in-line	0.3	173 212	SME-10-SL-LED-24
			Cable, 3-wire, in-line	2.5	173 210	SME-10-KL-LED-24

Ordering data – Mounting kits for proximity sensors SME/SMT-10				Technical data → Internet: smbr	
Designation	For Ø			Part No.	Type
Mounting kit SMBR-10					
	8			175 101	SMBR-10-8
	10			173 227	SMBR-10-10
	12			175 102	SMBR-10-12
	16			173 228	SMBR-10-16
	20			175 103	SMBR-10-20
	25			175 104	SMBR-10-25

Ordering data – Connecting cables				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 333	NEBU-M8G3-K-2.5-LE3
			5	541 334	NEBU-M8G3-K-5-LE3
	Straight socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541 363	NEBU-M12G5-K-2.5-LE3
			5	541 364	NEBU-M12G5-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541 338	NEBU-M8W3-K-2.5-LE3
			5	541 341	NEBU-M8W3-K-5-LE3
	Angled socket, M12x1, 5-pin	Cable, open end, 3-wire	2.5	541 367	NEBU-M12W5-K-2.5-LE3
			5	541 370	NEBU-M12W5-K-5-LE3

Standard cylinders DSNU/DSNUP/DSN/ESNU/ESN, ISO 6432

FESTO

Accessories

Ordering data – One-way flow control valves				Technical data → Internet: grl	
	Port		Material	Part No.	Type
	Thread	For tubing O.D.			
For exhaust air					
	M5	3	Metal design	193 137	GRLA-M5-QS-3-D
		4		193 138	GRLA-M5-QS-4-D
		6		193 139	GRLA-M5-QS-6-D
	G1/8	3		193 142	GRLA-1/8-QS-3-D
		4		193 143	GRLA-1/8-QS-4-D
		6		193 144	GRLA-1/8-QS-6-D
		8		193 145	GRLA-1/8-QS-8-D
	For supply air				
	M5	3	Metal design	193 153	GRLZ-M5-QS-3-D
		4		193 154	GRLZ-M5-QS-4-D
		6		193 155	GRLZ-M5-QS-6-D
	G1/8	3		193 156	GRLZ-1/8-QS-3-D
		4		193 157	GRLZ-1/8-QS-4-D
		6		193 158	GRLZ-1/8-QS-6-D
		8		193 159	GRLZ-1/8-QS-8-D

Ordering data – One-way flow control valves, corrosion resistant					Technical data ➔ Internet: crgla	
	Port		Material	Part No.	Type	
	Thread	For push-in fitting				
For exhaust air						
	M5	CRQS/CRQSL/CRQST	Electrolytically polished	161 403	CRGRLA-M5-B	
	G1/8		stainless steel casting	161 404	CRGRLA-1/8-B	

Note

Only push-in fittings or one-way flow control valves with cylindrical connecting thread (M or G thread) may be used for the compressed air ports in conjunction with the DSNU.

Product Range and Company Overview

A Complete Suite of Automation Services

Our experienced engineers provide complete support at every stage of your development process, including: conceptualization, analysis, engineering, design, assembly, documentation, validation, and production.



Custom Automation Components
Complete custom engineered solutions



Custom Control Cabinets
Comprehensive engineering support and on-site services



Complete Systems
Shipment, stocking and storage services

The Broadest Range of Automation Components

With a comprehensive line of more than 30,000 automation components, Festo is capable of solving the most complex automation requirements.



Electromechanical
Electromechanical actuators, motors, controllers & drives



Pneumatics
Pneumatic linear and rotary actuators, valves, and air supply



PLCs and I/O Devices
PLC's, operator interfaces, sensors and I/O devices

Supporting Advanced Automation... As No One Else Can!

Festo is a leading global manufacturer of pneumatic and electromechanical systems, components and controls for industrial automation, with more than 12,000 employees in 56 national headquarters serving more than 180 countries. For more than 80 years, Festo has continuously elevated the state of manufacturing with innovations and optimized motion control solutions that deliver higher performing, more profitable automated manufacturing and processing equipment. Our dedication to the advancement of automation extends beyond technology to the education and development of current and future automation and robotics designers with simulation tools, teaching programs, and on-site services.

Quality Assurance, ISO 9001 and ISO 14001 Certifications

Festo Corporation is committed to supply all Festo products and services that will meet or exceed our customers' requirements in product quality, delivery, customer service and satisfaction.

To meet this commitment, we strive to ensure a consistent, integrated, and systematic approach to management that will meet or exceed the requirements of the ISO 9001 standard for Quality Management and the ISO 14001 standard for Environmental Management.



© Copyright 2008, Festo Corporation. While every effort is made to ensure that all dimensions and specifications are correct, Festo cannot guarantee that publications are completely free of any error, in particular typing or printing errors. Accordingly, Festo cannot be held responsible for the same. For Liability and Warranty conditions, refer to our "Terms and Conditions of Sale", available from your local Festo office. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo. All technical data subject to change according to technical update.



Printed on recycled paper at New Horizon Graphic, Inc., FSC certified as an environmentally friendly printing plant.

Festo North America

Festo Regional Contact Center

5300 Explorer Drive
Mississauga, Ontario L4W 5G4
Canada

USA Customers:

For ordering assistance,

Call: 1.800.99.FESTO (1.800.993.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: customer.service@us.festo.com

For technical support,

Call: 1.866.GO.FESTO (1.866.463.3786)

Fax: 1.800.96.FESTO (1.800.963.3786)

Email: product.support@us.festo.com

Canadian Customers:

Call: 1.877.GO.FESTO (1.877.463.3786)

Fax: 1.877.FX.FESTO (1.877.393.3786)

Email: festo.canada@ca.festo.com

USA Headquarters

Festo Corporation
395 Moreland Road
P.O. Box 18023
Hauppauge, NY 11788, USA
www.festo.com/us

USA Sales Offices

Appleton

North 922 Tower View Drive, Suite N
Greenville, WI 54942, USA

Boston

120 Presidential Way, Suite 330
Woburn, MA 01801, USA

Chicago

1441 East Business Center Drive
Mt. Prospect, IL 60056, USA

Dallas

1825 Lakeway Drive, Suite 600
Lewisville, TX 75057, USA

Detroit – Automotive Engineering Center

2601 Cambridge Court, Suite 320
Auburn Hills, MI 48326, USA

New York

395 Moreland Road
Hauppauge, NY 11788, USA

Silicon Valley

4935 Southfront Road, Suite F
Livermore, CA 94550, USA

United States



USA Headquarters, East: Festo Corp., 395 Moreland Road, Hauppauge, NY 11788

Phone: 1.631.435.0800; Fax: 1.631.435.8026;

Email: info@festo-usa.com

www.festo.com/us

Canada



Headquarters: Festo Inc., 5300 Explorer Drive, Mississauga, Ontario L4W 5G4

Phone: 1.905.624.9000; Fax: 1.905.624.9001;

Email: festo.canada@ca.festo.com

www.festo.ca

Mexico



Headquarters: Festo Pneumatic, S.A., Av. Ceylán 3, Col. Tequesquahuac,
54020 Tlalneapantla, Edo. de México

Phone: 011 52 [55] 53 21 66 00; Fax: 011 52 [55] 53 21 66 65;

Email: festo.mexico@mx.festo.com

www.festo.com/mx

Central USA

Festo Corporation
1441 East Business
Center Drive
Mt. Prospect, IL 60056, USA
Phone: 1.847.759.2600
Fax: 1.847.768.9480



Western USA

Festo Corporation
4935 Southfront Road,
Suite F
Livermore, CA 94550, USA
Phone: 1.925.371.1099
Fax: 1.925.245.1286



Festo Worldwide

Argentina Australia Austria Belarus Belgium Brazil Bulgaria Canada Chile China Colombia Croatia Czech Republic Denmark
Estonia Finland France Germany Great Britain Greece Hong Kong Hungary India Indonesia Iran Ireland Israel Italy Japan Latvia
Lithuania Malaysia Mexico Netherlands New Zealand Norway Peru Philippines Poland Romania Russia Serbia Singapore
Slovakia Slovenia South Africa South Korea Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United States Venezuela

www.festo.com